



# FCC TEST REPORT (15.407)

**REPORT NO.:** RF130610C18-1  
**MODEL NO.:** EUB1200AC  
**FCC ID:** A8J-EUB1200AC  
**RECEIVED:** Jun. 10, 2013  
**TESTED:** Jun. 18 ~ Jun. 21, 2013  
**ISSUED:** Jul. 10, 2013

**APPLICANT:** EnGenius Technologies

**ADDRESS:** 1580 Scenic Avenue, Costa Mesa, CA92626

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS .....	6
2.1 MEASUREMENT UNCERTAINTY.....	6
3. GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT .....	7
3.2 DESCRIPTION OF TEST MODES .....	8
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	9
3.3 DUTY CYCLE OF TEST SIGNAL.....	11
3.4 DESCRIPTION OF SUPPORT UNITS .....	13
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST .....	13
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
4. TEST TYPES AND RESULTS .....	15
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	15
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	15
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS .....	15
4.1.3 TEST INSTRUMENTS.....	16
4.1.4 TEST PROCEDURES .....	17
4.1.5 DEVIATION FROM TEST STANDARD .....	17
4.1.6 TEST SETUP.....	18
4.1.7 EUT OPERATING CONDITION.....	18
4.1.8 TEST RESULTS .....	19
4.2 CONDUCTED EMISSION MEASUREMENT .....	35
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	35
4.2.2 TEST INSTRUMENTS.....	35
4.2.3 TEST PROCEDURES .....	36
4.2.4 DEVIATION FROM TEST STANDARD .....	36
4.2.5 TEST SETUP.....	36
4.2.6 EUT OPERATING CONDITIONS .....	36
4.2.7 TEST RESULTS .....	37
4.3 PEAK TRANSMIT POWER MEASUREMENT .....	39
4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT .....	39
4.3.2 TEST SETUP.....	39
4.3.3 TEST INSTRUMENTS.....	39
4.3.4 TEST PROCEDURE.....	40



4.3.5	DEVIATION FROM TEST STANDARD .....	41
4.3.6	EUT OPERATING CONDITIONS .....	41
4.3.7	TEST RESULTS .....	42
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	46
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	46
4.4.2	TEST SETUP .....	46
4.4.3	TEST INSTRUMENTS.....	46
4.4.4	TEST PROCEDURES .....	46
4.4.5	DEVIATION FROM TEST STANDARD .....	46
4.4.6	EUT OPERATING CONDITIONS .....	46
4.4.7	TEST RESULTS .....	47
4.5	PEAK POWER EXCURSION MEASUREMENT .....	49
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT .....	49
4.5.2	TEST SETUP .....	49
4.5.3	TEST INSTRUMENTS.....	49
4.5.4	TEST PROCEDURE.....	49
4.5.5	DEVIATION FROM TEST STANDARD .....	49
4.5.6	EUT OPERATING CONDITIONS .....	49
4.5.7	TEST RESULTS .....	50
4.6	FREQUENCY STABILITY.....	51
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	51
4.6.2	TEST SETUP .....	51
4.6.3	TEST INSTRUMENTS.....	51
4.6.4	TEST PROCEDURE.....	52
4.6.5	DEVIATION FROM TEST STANDARD .....	52
4.6.6	EUT OPERATING CONDITION.....	52
4.6.7	TEST RESULTS .....	53
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	54
6.	INFORMATION ON THE TESTING LABORATORIES .....	55
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	56



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130610C18-1	Original release	Jul. 10, 2013



# 1. CERTIFICATION

**PRODUCT:** Dual Band Wireless-AC USB Adapter

**MODEL:** EUB1200AC

**BRAND:** EnGenius

**APPLICANT:** EnGenius Technologies

**TESTED:** Jun. 18 ~ Jun. 21, 2013

**TEST SAMPLE:** ENGINEERING SAMPLE

**STANDARDS: FCC Part 15, Subpart E (Section 15.407)**

ANSI C63.10-2009

The above equipment (model: EUB1200AC) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Celine Chou , **DATE :** Jul. 10, 2013  
Celine Chou / Specialist

**APPROVED BY :** Ken Liu , **DATE :** Jul. 10, 2013  
Ken Liu / Senior Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.73dB at 0.72031MHz.
15.407(b/1/2/3) (b)(6)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.0dB at 119.24MHz.
15.407(a/1/2)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~ 1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Dual Band Wireless-AC USB Adapter
<b>MODEL NO.</b>	EUB1200AC
<b>POWER SUPPLY</b>	5Vdc (Host equipment)
<b>MODULATION TYPE</b>	256QAM, 64QAM, 16QAM, QPSK, BPSK
<b>MODULATION TECHNOLOGY</b>	OFDM
<b>TRANSFER RATE</b>	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
<b>OPERATING FREQUENCY</b>	5180.0 ~ 5240.0MHz
<b>NUMBER OF CHANNEL</b>	4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 802.11ac (80MHz): 1
<b>OUTPUT POWER</b>	2.422mW
<b>ANTENNA TYPE</b>	Printed antenna with 4.0dBi gain
<b>ANTENNA CONNECTOR</b>	NA
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ACCESSORY DEVICES</b>	NA

**NOTE:**

1. The EUT incorporates a MIMO function. The EUT provides 2 completed transmitters and 2 receivers.

MODULATION MODE	TX FUNCTION
802.11b	1TX, 2RX
802.11g	1TX, 2RX
802.11a	1TX, 2RX
802.11n (20MHz) MCS 0-7	1TX, 2RX
802.11n (20MHz) MCS 8-15	2TX, 2RX
802.11n (40MHz) MCS 0-7	1TX, 2RX
802.11n (40MHz) MCS 8-15	2TX, 2RX
802.11ac (80MHz) MCS 0-9	1TX, 2RX
802.11ac (80MHz) MCS 10-19	2TX, 2RX

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 DESCRIPTION OF TEST MODES

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190MHz	46	5230MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY
42	5210MHz



### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

#### **RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION
-	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0	1TX
-	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	7.2	1TX
-	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	14.4	2TX
-	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	15.0	1TX
-	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	30.0	2TX
-	802.11ac (80MHz)	42	42	OFDM	BPSK	32.5	1TX
-	802.11ac (80MHz)	42	42	OFDM	BPSK	65.0	2TX

#### **RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION
-	802.11a	36 to 48	36	OFDM	BPSK	6.0	1TX

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION
-	802.11a	36 to 48	36	OFDM	BPSK	6.0	1TX

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.


EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION
-	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0	1TX
-	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	7.2	1TX
-	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	14.4	2TX
-	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	15.0	1TX
-	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	30.0	2TX
-	802.11ac (80MHz)	42	42	OFDM	BPSK	32.5	1TX
-	802.11ac (80MHz)	42	42	OFDM	BPSK	65.0	2TX

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang
PLC	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
APCM	25deg. C, 65%RH	120Vac, 60Hz	Nick Chen

### 3.3 DUTY CYCLE OF TEST SIGNAL


Duty cycle of test signal is > 98 %, duty factor is not required.

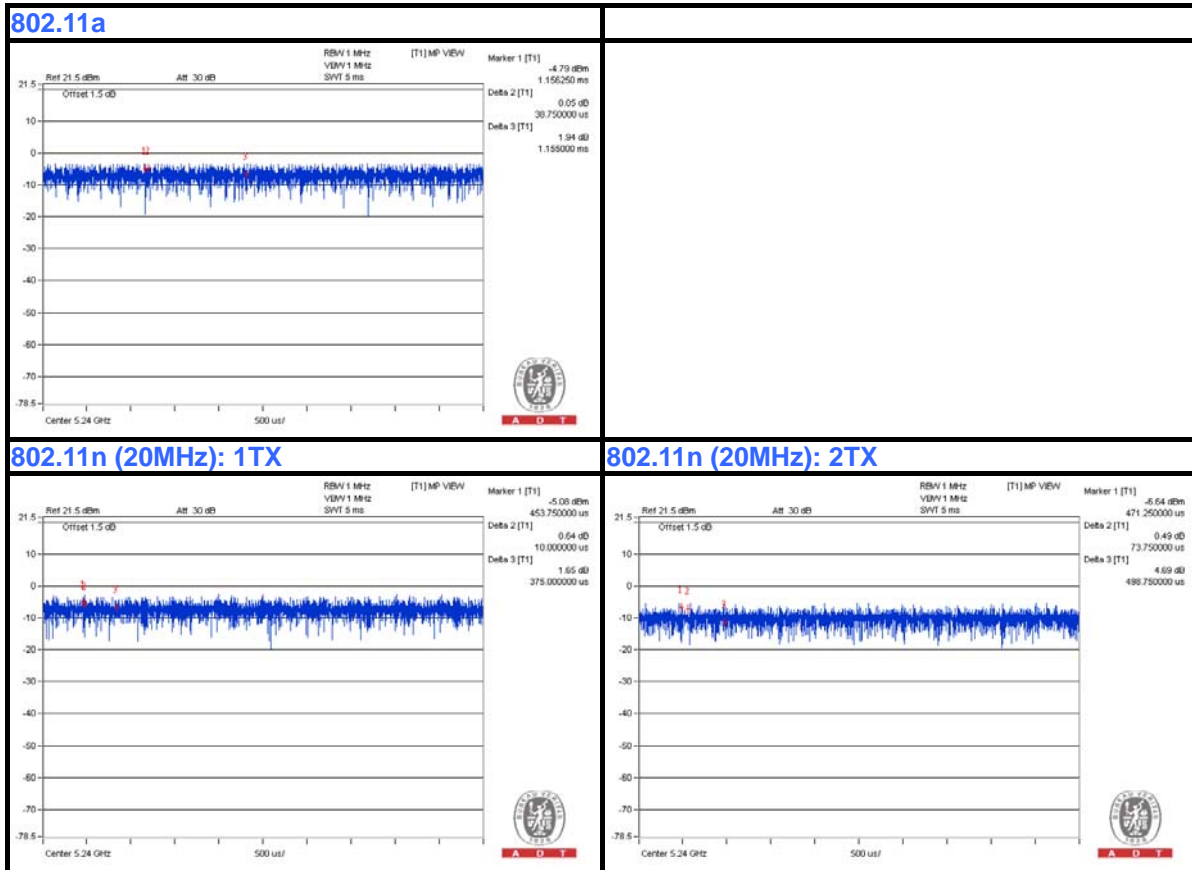




A D T


### 802.11n (40MHz): 1TX

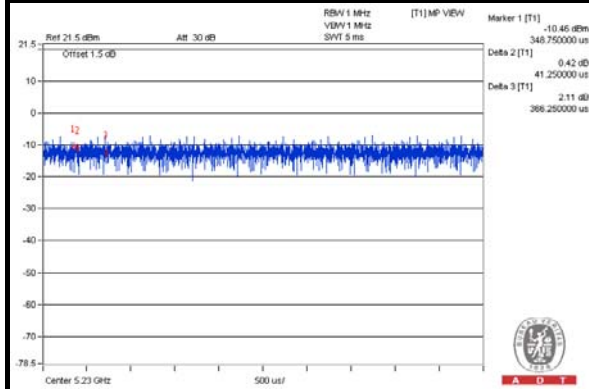


### 802.11n (40MHz): 2TX

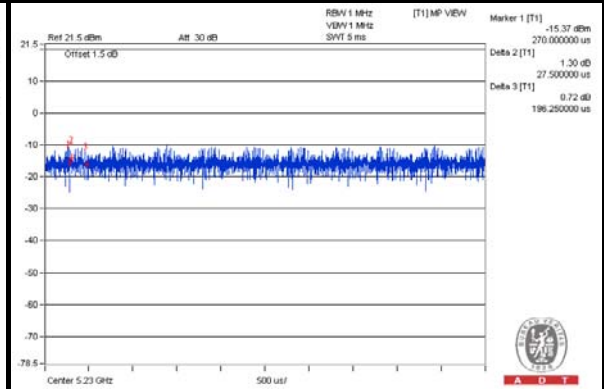

### 802.11ac (80MHz): 1TX

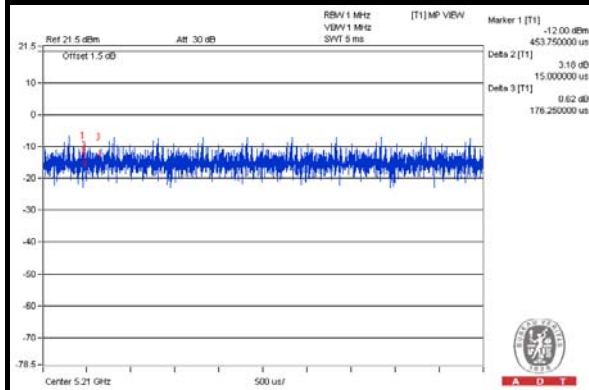

### 802.11ac (80MHz): 2TX

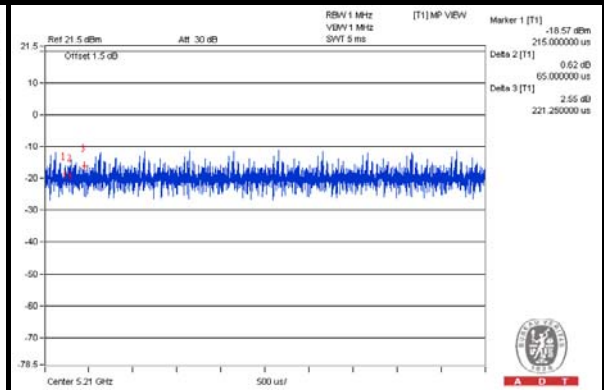

### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	E5520	8Y4DMQ1	FCC Doc approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	0.3m USB Cable without core

**NOTE:** All power cords of the above support units are non-shielded (1.8m).

#### 3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

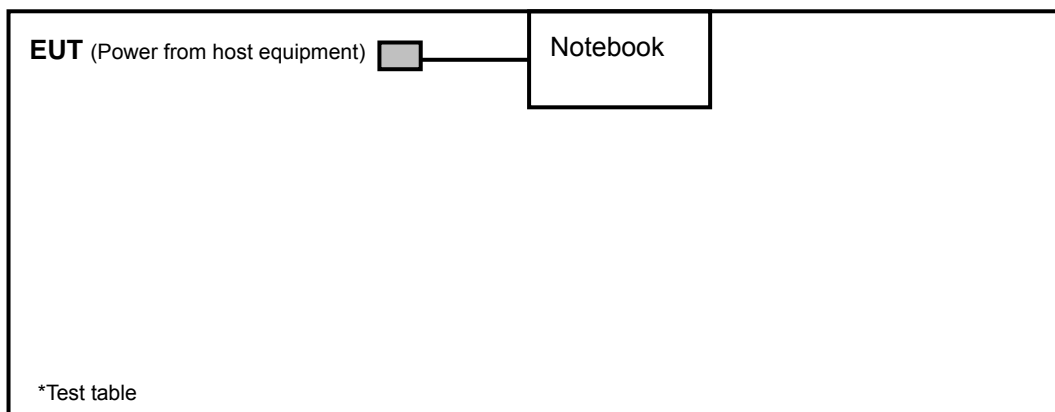

### **3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**789033 D01 General UNII Test Procedures v01 r03**

**662911 D01 Multiple Transmitter Output v02**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4. TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
√	FIELD STRENGTH AT 3m (dBμV/m)	
	PK	AV
	74	54
	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m)
	PK	PK
	-27	68.3

**NOTE:** The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

#### 4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jan. 28, 2013	Jan. 27, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Mar. 22, 2013	Mar. 21, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-209	Sep. 03, 2012	Sep. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 11, 2012	Jul. 10, 2013
Preamplifier Agilent	8449B	3008A01911	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8447D	2944A10638	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295013/4 283403/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 11, 2012	Aug. 10, 2013
Software BV ADT	ADT_Radiated_ V7.6.15.9.3	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 25, 2012	Oct. 24, 2013
High Speed Peak Power Meter	ML2495A	0842014	Apr. 28, 2013	Apr. 27, 2014
Power Sensor	MA2411B	0738404	Apr. 28, 2013	Apr. 27, 2014
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 13, 2013	Jun. 12, 2014

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 215374.
5. The IC Site Registration No. is IC 7450F-9.



#### 4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz(Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.6 TEST SETUP

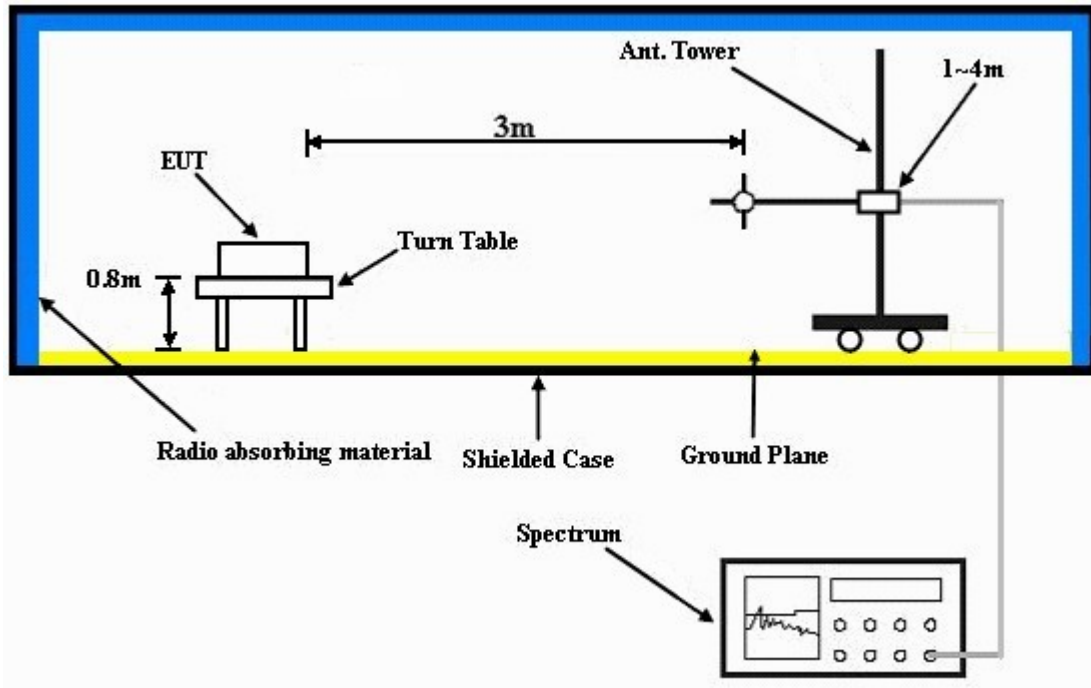

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.7 EUT OPERATING CONDITION

- a. The EUT was connected to the notebook with USB cable and placed them on the testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the system in full functions.

#### 4.1.8 TEST RESULTS

##### ABOVE 1GHz DATA :

##### 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.9 PK	74.0	-14.1	1.00 H	178	16.10	43.80
2	5150.00	46.8 AV	54.0	-7.2	1.00 H	178	3.00	43.80
3	*5180.00	99.6 PK			1.00 H	174	55.70	43.90
4	*5180.00	90.8 AV			1.00 H	174	46.90	43.90
5	#10360.00	60.1 PK	74.0	-13.9	1.00 H	58	9.20	50.90
6	#10360.00	46.6 AV	54.0	-7.4	1.00 H	58	-4.30	50.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	1.10 V	218	18.40	43.80
2	5150.00	46.8 AV	54.0	-7.2	1.10 V	218	3.00	43.80
3	*5180.00	90.2 PK			1.11 V	208	46.30	43.90
4	*5180.00	80.9 AV			1.11 V	208	37.00	43.90
5	#10360.00	55.9 PK	74.0	-18.1	1.43 V	184	5.00	50.90
6	#10360.00	44.4 AV	54.0	-9.6	1.43 V	184	-6.50	50.90

##### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	99.6 PK			1.00 H	172	55.70	43.90
2	*5200.00	90.1 AV			1.00 H	172	46.20	43.90
3	#10400.00	60.6 PK	74.0	-13.4	1.53 H	119	9.70	50.90
4	#10400.00	47.8 AV	54.0	-6.2	1.53 H	119	-3.10	50.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	87.3 PK			1.00 V	188	43.40	43.90
2	*5200.00	77.5 AV			1.00 V	188	33.60	43.90
3	#10400.00	56.3 PK	74.0	-17.7	1.24 V	192	5.40	50.90
4	#10400.00	44.0 AV	54.0	-10.0	1.24 V	192	-6.90	50.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	98.7 PK			1.00 H	172	54.70	44.00
2	*5240.00	89.7 AV			1.00 H	172	45.70	44.00
3	5350.00	61.1 PK	74.0	-12.9	1.00 H	168	17.00	44.10
4	5350.00	48.2 AV	54.0	-5.8	1.00 H	168	4.10	44.10
5	#10480.00	60.3 PK	74.0	-13.7	1.00 H	162	9.10	51.20
6	#10480.00	46.9 AV	54.0	-7.1	1.00 H	162	-4.30	51.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	88.6 PK			1.00 V	214	44.60	44.00
2	*5240.00	78.8 AV			1.00 V	214	34.80	44.00
3	5350.00	59.5 PK	74.0	-14.5	1.00 V	248	15.40	44.10
4	5350.00	46.5 AV	54.0	-7.5	1.00 V	248	2.40	44.10
5	#10480.00	57.4 PK	74.0	-16.6	1.00 V	182	6.20	51.20
6	#10480.00	44.6 AV	54.0	-9.4	1.00 V	182	-6.60	51.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



802.11n (20MHz): 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.6 PK	74.0	-12.4	1.10 H	10	17.80	43.80
2	5150.00	48.9 AV	54.0	-5.1	1.10 H	10	5.10	43.80
3	*5180.00	96.3 PK			1.00 H	5	52.40	43.90
4	*5180.00	87.2 AV			1.00 H	5	43.30	43.90
5	#10360.00	58.2 PK	74.0	-15.8	1.13 H	87	7.30	50.90
6	#10360.00	46.2 AV	54.0	-7.8	1.13 H	87	-4.70	50.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	1.68 V	52	14.60	43.80
2	5150.00	45.8 AV	54.0	-8.2	1.68 V	52	2.00	43.80
3	*5180.00	94.6 PK			1.47 V	111	50.70	43.90
4	*5180.00	85.1 AV			1.47 V	111	41.20	43.90
5	#10360.00	53.8 PK	74.0	-20.2	1.19 V	74	2.90	50.90
6	#10360.00	43.5 AV	54.0	-10.5	1.19 V	74	-7.40	50.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	95.3 PK			1.00 H	19	51.40	43.90
2	*5200.00	86.8 AV			1.00 H	19	42.90	43.90
3	#10400.00	58.4 PK	74.0	-15.6	1.06 H	88	7.50	50.90
4	#10400.00	45.9 AV	54.0	-8.1	1.06 H	88	-5.00	50.90
5	15600.00	62.3 PK	74.0	-11.7	1.23 H	47	8.30	54.00
6	15600.00	50.1 AV	54.0	-3.9	1.23 H	47	-3.90	54.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	94.9 PK			1.65 V	108	51.00	43.90
2	*5200.00	85.3 AV			1.65 V	108	41.40	43.90
3	#10400.00	54.5 PK	74.0	-19.5	1.13 V	128	3.60	50.90
4	#10400.00	43.5 AV	54.0	-10.5	1.13 V	128	-7.40	50.90
5	15600.00	58.3 PK	74.0	-15.7	1.03 V	58	4.30	54.00
6	15600.00	47.7 AV	54.0	-6.3	1.03 V	58	-6.30	54.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	96.2 PK			1.00 H	16	52.20	44.00
2	*5240.00	87.2 AV			1.00 H	16	43.20	44.00
3	5350.00	61.9 PK	74.0	-12.1	1.10 H	30	17.80	44.10
4	5350.00	49.5 AV	54.0	-4.5	1.10 H	30	5.40	44.10
5	#10480.00	58.6 PK	74.0	-15.4	1.24 H	98	7.40	51.20
6	#10480.00	46.6 AV	54.0	-7.4	1.24 H	98	-4.60	51.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	94.1 PK			1.65 V	109	50.10	44.00
2	*5240.00	84.6 AV			1.65 V	109	40.60	44.00
3	5350.00	60.0 PK	74.0	-14.0	1.70 V	120	15.90	44.10
4	5350.00	47.2 AV	54.0	-6.8	1.70 V	120	3.10	44.10
5	#10480.00	54.7 PK	74.0	-19.3	1.19 V	45	3.50	51.20
6	#10480.00	44.2 AV	54.0	-9.8	1.19 V	45	-7.00	51.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



802.11n (20MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.6 PK	74.0	-12.4	1.10 H	30	17.80	43.80
2	5150.00	49.2 AV	54.0	-4.8	1.10 H	30	5.40	43.80
3	*5180.00	92.0 PK			1.00 H	13	48.10	43.90
4	*5180.00	82.3 AV			1.00 H	13	38.40	43.90
5	#10360.00	58.3 PK	74.0	-15.7	1.32 H	214	7.40	50.90
6	#10360.00	45.9 AV	54.0	-8.1	1.32 H	214	-5.00	50.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.80 V	20	14.70	43.80
2	5150.00	47.2 AV	54.0	-6.8	1.80 V	20	3.40	43.80
3	*5180.00	84.6 PK			2.00 V	19	40.70	43.90
4	*5180.00	75.7 AV			2.00 V	19	31.80	43.90
5	#10360.00	53.8 PK	74.0	-20.2	1.22 V	204	2.90	50.90
6	#10360.00	43.9 AV	54.0	-10.1	1.22 V	204	-7.00	50.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	91.8 PK			1.00 H	11	47.90	43.90
2	*5200.00	84.0 AV			1.00 H	11	40.10	43.90
3	#10400.00	58.3 PK	74.0	-15.7	1.23 H	87	7.40	50.90
4	#10400.00	46.1 AV	54.0	-7.9	1.23 H	87	-4.80	50.90
5	15600.00	61.2 PK	74.0	-12.8	1.32 H	45	7.20	54.00
6	15600.00	48.4 AV	54.0	-5.6	1.32 H	45	-5.60	54.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	91.4 PK			1.63 V	112	47.50	43.90
2	*5200.00	83.2 AV			1.63 V	112	39.30	43.90
3	#10400.00	54.0 PK	74.0	-20.0	1.13 V	206	3.10	50.90
4	#10400.00	43.8 AV	54.0	-10.2	1.13 V	206	-7.10	50.90
5	15600.00	58.1 PK	74.0	-15.9	1.13 V	205	4.10	54.00
6	15600.00	47.7 AV	54.0	-6.3	1.13 V	205	-6.30	54.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	91.3 PK			1.00 H	19	47.30	44.00
2	*5240.00	80.9 AV			1.00 H	19	36.90	44.00
3	5350.00	61.9 PK	74.0	-12.1	1.10 H	20	17.80	44.10
4	5350.00	49.5 AV	54.0	-4.5	1.10 H	20	5.40	44.10
5	#10480.00	58.7 PK	74.0	-15.3	1.23 H	84	7.50	51.20
6	#10480.00	46.1 AV	54.0	-7.9	1.23 H	84	-5.10	51.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	85.4 PK			1.21 V	190	41.40	44.00
2	*5240.00	76.9 AV			1.21 V	190	32.90	44.00
3	5350.00	49.5 PK	74.0	-24.5	1.30 V	180	5.40	44.10
4	5350.00	47.2 AV	54.0	-6.8	1.30 V	180	3.10	44.10
5	#10480.00	54.3 PK	74.0	-19.7	1.20 V	302	3.10	51.20
6	#10480.00	44.2 AV	54.0	-9.8	1.20 V	302	-7.00	51.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

802.11n (40MHz): 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	1.29 H	87	19.80	43.80
2	5150.00	50.4 AV	54.0	-3.6	1.29 H	87	6.60	43.80
3	*5190.00	92.4 PK			1.01 H	13	48.50	43.90
4	*5190.00	83.3 AV			1.01 H	13	39.40	43.90
5	#10380.00	58.2 PK	74.0	-15.8	1.09 H	74	7.30	50.90
6	#10380.00	45.8 AV	54.0	-8.2	1.09 H	74	-5.10	50.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	1.60 V	130	14.60	43.80
2	5150.00	46.9 AV	54.0	-7.1	1.60 V	130	3.10	43.80
3	*5190.00	90.5 PK			1.48 V	111	46.60	43.90
4	*5190.00	81.3 AV			1.48 V	111	37.40	43.90
5	#10380.00	55.3 PK	74.0	-18.7	1.18 V	64	4.40	50.90
6	#10380.00	44.5 AV	54.0	-9.5	1.18 V	64	-6.40	50.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	93.4 PK			1.00 H	15	49.50	43.90
2	*5230.00	85.5 AV			1.00 H	15	41.60	43.90
3	5350.00	61.7 PK	74.0	-12.3	1.10 H	30	17.60	44.10
4	5350.00	49.7 AV	54.0	-4.3	1.10 H	30	5.60	44.10
5	#10460.00	58.5 PK	74.0	-15.5	1.18 H	64	7.40	51.10
6	#10460.00	46.4 AV	54.0	-7.6	1.18 H	64	-4.70	51.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	91.6 PK			1.63 V	110	47.70	43.90
2	*5230.00	83.4 AV			1.63 V	110	39.50	43.90
3	5350.00	59.7 PK	74.0	-14.3	1.52 V	105	15.60	44.10
4	5350.00	47.5 AV	54.0	-6.5	1.52 V	105	3.40	44.10
5	#10460.00	55.6 PK	74.0	-18.4	1.23 V	74	4.50	51.10
6	#10460.00	43.9 AV	54.0	-10.1	1.23 V	74	-7.20	51.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

802.11n (40MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.5 PK	74.0	-12.5	1.15 H	30	17.70	43.80
2	5150.00	49.2 AV	54.0	-4.8	1.15 H	30	5.40	43.80
3	*5190.00	89.3 PK			1.00 H	29	45.40	43.90
4	*5190.00	79.1 AV			1.00 H	29	35.20	43.90
5	#10380.00	58.3 PK	74.0	-15.7	1.23 H	87	7.40	50.90
6	#10380.00	46.1 AV	54.0	-7.9	1.23 H	87	-4.80	50.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	48.5 PK	74.0	-25.5	2.00 V	30	4.70	43.80
2	5150.00	46.9 AV	54.0	-7.1	2.00 V	30	3.10	43.80
3	*5190.00	81.8 PK			2.20 V	19	37.90	43.90
4	*5190.00	71.8 AV			2.20 V	19	27.90	43.90
5	#10380.00	64.9 PK	74.0	-9.1	1.23 V	45	14.00	50.90
6	#10380.00	43.9 AV	54.0	-10.1	1.23 V	45	-7.00	50.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	89.1 PK			1.00 H	29	45.20	43.90
2	*5230.00	82.3 AV			1.00 H	29	38.40	43.90
3	5350.00	61.4 PK	74.0	-12.6	1.10 H	52	17.30	44.10
4	5350.00	49.5 AV	54.0	-4.5	1.10 H	52	5.40	44.10
5	#10460.00	58.7 PK	74.0	-15.3	1.25 H	98	7.60	51.10
6	#10460.00	46.6 AV	54.0	-7.4	1.25 H	98	-4.50	51.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	86.1 PK			1.80 V	128	42.20	43.90
2	*5230.00	79.0 AV			1.80 V	128	35.10	43.90
3	5350.00	58.6 PK	74.0	-15.4	1.60 V	140	14.50	44.10
4	5350.00	47.5 AV	54.0	-6.5	1.60 V	140	3.40	44.10
5	#10460.00	55.4 PK	74.0	-18.6	1.23 V	54	4.30	51.10
6	#10460.00	44.6 AV	54.0	-9.4	1.23 V	54	-6.50	51.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

802.11ac (80MHz): 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 42	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.1 PK	74.0	-12.9	1.10 H	360	17.30	43.80
2	5150.00	49.2 AV	54.0	-4.8	1.10 H	360	5.40	43.80
3	*5210.00	92.9 PK			1.00 H	352	49.00	43.90
4	*5210.00	85.0 AV			1.00 H	352	41.10	43.90
5	#10420.00	58.2 PK	74.0	-15.8	1.32 H	201	7.20	51.00
6	#10420.00	45.8 AV	54.0	-8.2	1.32 H	201	-5.20	51.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	1.22 V	150	15.50	43.80
2	5150.00	46.7 AV	54.0	-7.3	1.22 V	150	2.90	43.80
3	*5210.00	87.7 PK			1.02 V	129	43.80	43.90
4	*5210.00	79.7 AV			1.02 V	129	35.80	43.90
5	#10420.00	54.4 PK	74.0	-19.6	1.03 V	64	3.40	51.00
6	#10420.00	43.9 AV	54.0	-10.1	1.03 V	64	-7.10	51.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



802.11ac (80MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 42	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.3 PK	74.0	-13.7	1.00 H	145	16.50	43.80
2	5150.00	47.9 AV	54.0	-6.1	1.00 H	145	4.10	43.80
3	*5210.00	94.1 PK			1.00 H	185	50.20	43.90
4	*5210.00	84.8 AV			1.00 H	185	40.90	43.90
5	#10420.00	60.2 PK	74.0	-13.8	1.26 H	248	9.20	51.00
6	#10420.00	47.4 AV	54.0	-6.6	1.26 H	248	-3.60	51.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.1 PK	74.0	-14.9	1.04 V	116	15.30	43.80
2	5150.00	47.2 AV	54.0	-6.8	1.04 V	116	3.40	43.80
3	*5210.00	88.5 PK			1.47 V	200	44.60	43.90
4	*5210.00	78.6 AV			1.47 V	200	34.70	43.90
5	#10420.00	56.4 PK	74.0	-17.6	1.82 V	204	5.40	51.00
6	#10420.00	44.1 AV	54.0	-9.9	1.82 V	204	-6.90	51.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

**BELOW 1GHz WORST-CASE DATA : 802.11a**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	119.24	40.5 QP	43.5	-3.0	1.00 H	198	28.80	11.70
2	165.80	29.6 QP	43.5	-13.9	1.00 H	195	16.30	13.30
3	239.52	30.1 QP	46.0	-15.9	1.00 H	229	17.80	12.30
4	365.62	24.6 QP	46.0	-21.4	1.00 H	130	8.20	16.40
5	623.64	30.1 QP	46.0	-15.9	1.00 H	147	7.40	22.70
6	837.04	39.4 QP	46.0	-6.6	1.00 H	65	13.50	25.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	22.5 QP	40.0	-17.5	1.50 V	240	10.10	12.40
2	99.84	27.3 QP	43.5	-16.2	1.00 V	235	17.50	9.80
3	119.24	28.7 QP	43.5	-14.8	1.99 V	139	17.00	11.70
4	165.80	28.1 QP	43.5	-15.4	1.99 V	248	14.80	13.30
5	431.58	26.5 QP	46.0	-19.5	1.00 V	196	8.40	18.10
6	821.52	31.3 QP	46.0	-14.7	1.24 V	139	5.60	25.70

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.  
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 09, 2012	Nov. 08, 2013
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 21, 2012	Dec. 20, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 06, 2012	Jul. 05, 2013
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 2.  
 3. The VCCI Site Registration No. is C-2047.

#### 4.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

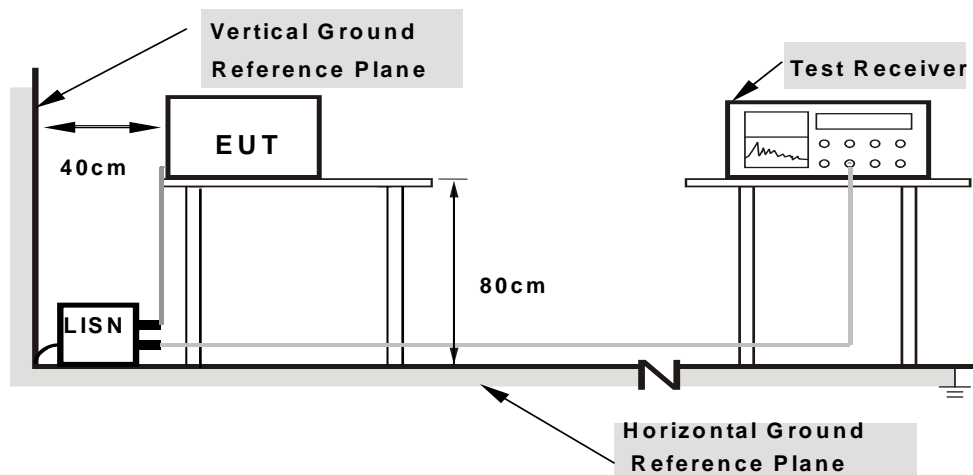

- Note:**
- Support units were connected to second LISN.
  - Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

## 4.2.7 TEST RESULTS


### CONDUCTED WORST-CASE DATA : 802.11a

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.20724	0.17	45.45	41.99	45.62	42.16	63.32
2	0.51719	0.22	36.25	35.32	36.47	35.54	56.00	46.00	-19.53	-10.46
<b>3</b>	<b>0.72031</b>	<b>0.24</b>	<b>37.43</b>	<b>36.03</b>	<b>37.67</b>	<b>36.27</b>	<b>56.00</b>	<b>46.00</b>	<b>-18.33</b>	<b>-9.73</b>
4	1.33984	0.27	37.21	33.87	37.48	34.14	56.00	46.00	-18.52	-11.86
5	4.94141	0.38	34.06	31.10	34.44	31.48	56.00	46.00	-21.56	-14.52
6	7.30859	0.40	36.51	33.45	36.91	33.85	60.00	50.00	-23.09	-16.15

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

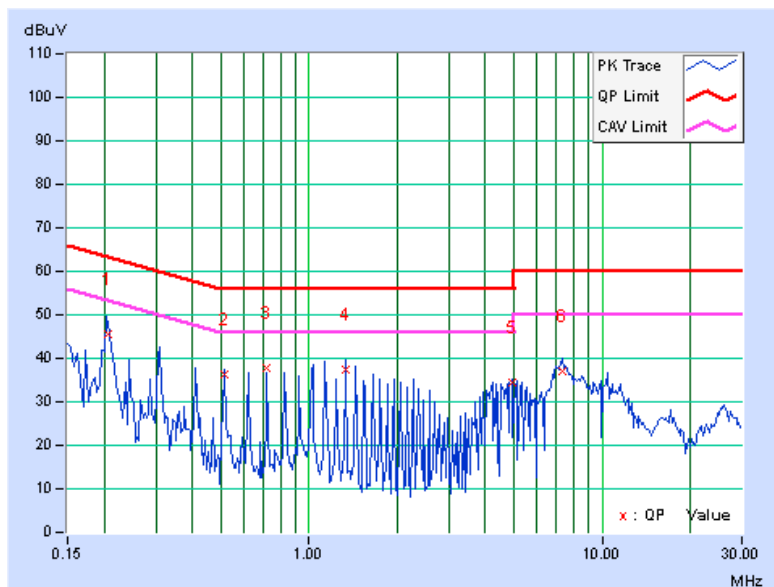




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20859	0.18	44.35	39.37	44.53	39.55	63.26	53.26	-18.73	-13.71
2	0.61866	0.24	34.10	33.32	34.34	33.56	56.00	46.00	-21.66	-12.44
3	0.82188	0.24	33.25	27.54	33.49	27.78	56.00	46.00	-22.51	-18.22
4	1.24464	0.24	28.87	28.83	29.11	29.07	56.00	46.00	-26.89	-16.93
5	5.04688	0.41	26.76	20.33	27.17	20.74	60.00	50.00	-32.83	-29.26
6	10.30859	0.49	27.07	20.78	27.56	21.27	60.00	50.00	-32.44	-28.73

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

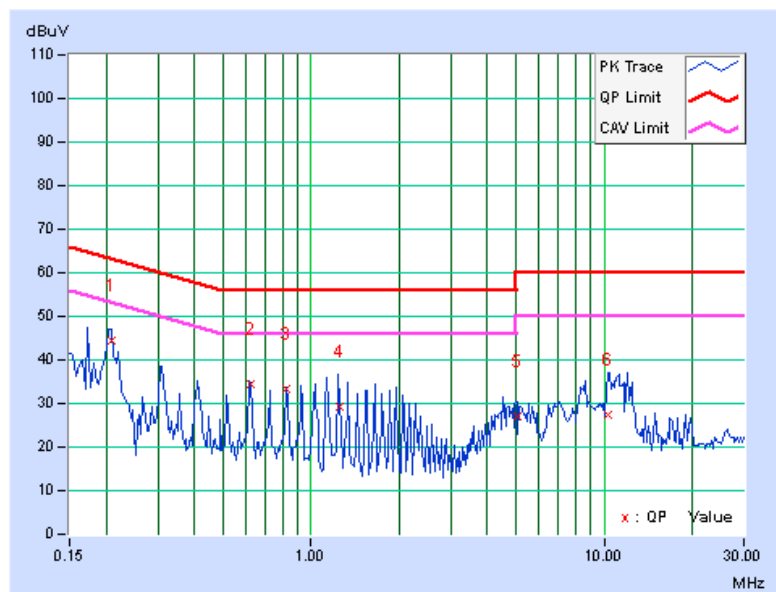

### 4.3 PEAK TRANSMIT POWER MEASUREMENT

#### 4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB

**NOTE:** Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;


Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.


#### 4.3.2 TEST SETUP

##### FOR POWER OUTPUT MEASUREMENT


For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

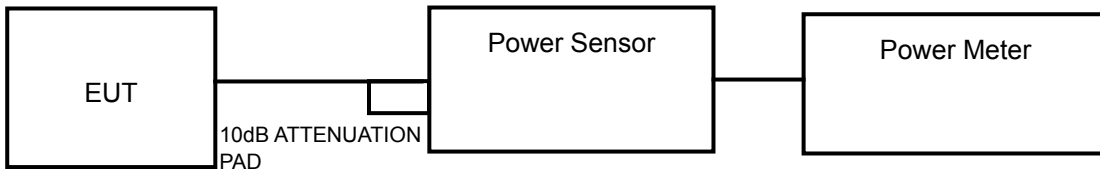

For 802.11ac (80MHz)



FOR 26dB BANDWIDTH



#### 4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

#### 4.3.4 TEST PROCEDURE

##### FOR AVERAGE POWER MEASUREMENT

###### For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

If duty cycle > 98%

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

If duty cycle < 98%

Duty cycle of test signal is < 98 %. Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is added to measured value.

###### For 802.11ac (80MHz)

Method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz.
- 3) Set VBW  $\geq$  3 MHz.
- 4) Number of points in sweep  $\geq$  2 Span / RBW.
- 5) Sweep time = auto.
- 6) Set trigger to free run (duty cycle  $\geq$  98 percent); Set video trigger (duty cycle < 98 percent)
- 7) Detector = RMS.
- 8) Trace average at least 100 traces in power averaging mode
- 9) Compute power by integrating the spectrum across the 26 dB EBW of the signal.

##### FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.



#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

### 4.3.7 TEST RESULTS

#### POWER OUTPUT:

##### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	2.421	3.84	17	PASS
40	5200	2.317	3.65	17	PASS
48	5240	2.307	3.63	17	PASS

##### 802.11n (20MHz): 1TX

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	2.350	3.71	17	PASS
40	5200	2.249	3.52	17	PASS
48	5240	2.259	3.54	17	PASS

##### 802.11n (20MHz): 2TX

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	0.77	0.59	2.340	3.69	17	PASS
40	5200	0.86	0.71	2.397	3.80	17	PASS
48	5240	0.69	0.77	2.366	3.74	17	PASS

##### 802.11n (40MHz): 1TX

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
38	5190	2.355	3.72	17	PASS
46	5230	2.228	3.48	17	PASS

##### 802.11n (40MHz): 2TX

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	0.79	0.75	2.388	3.78	17	PASS
46	5230	0.70	0.68	2.344	3.70	17	PASS



A D T

**802.11ac (80MHz): 1TX**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
42	5210	2.148	3.32	17	PASS

**802.11ac (80MHz): 2TX**

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
42	5210	0.78	0.88	2.422	3.84	17	PASS



A D T

## 26dB BANDWIDTH:

### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	PASS / FAIL
36	5180	20.95	PASS
40	5200	21.16	PASS
48	5240	21.06	PASS

### 802.11n (20MHz): 1TX

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	PASS / FAIL
36	5180	21.77	PASS
40	5200	21.83	PASS
48	5240	21.88	PASS

### 802.11n (20MHz): 2TX

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	21.78	21.34	PASS
40	5200	21.83	21.49	PASS
48	5240	21.54	21.53	PASS



**802.11n (40MHz): 1TX**

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	PASS / FAIL
38	5190	44.75	PASS
46	5230	44.80	PASS

**802.11n (40MHz): 2TX**

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
38	5190	44.78	45.42	PASS
46	5230	44.75	45.29	PASS

**802.11ac (80MHz): 1TX**

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	PASS / FAIL
42	5210	84.20	PASS

**802.11ac (80MHz): 2TX**


CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
42	5210	84.12	84.43	PASS

## 4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	4dBm

### 4.4.2 TEST SETUP



### 4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

### 4.4.4 TEST PROCEDURES

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 KHz, Set VBW  $\geq$  1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.

#### 4.4.7 TEST RESULTS

##### 802.11a

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	-8.72	4	PASS
40	5200	-9.04	4	PASS
48	5240	-8.60	4	PASS

##### 802.11n (20MHz): 1TX

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	-9.17	4	PASS
40	5200	-9.48	4	PASS
48	5240	-8.91	4	PASS

##### 802.11n (20MHz): 2TX

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	-12.37	-12.95	-9.64	2.99	PASS
40	5200	-12.87	-13.01	-9.93	2.99	PASS
48	5240	-11.60	-12.01	-8.79	2.99	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $4-(7.01-6) = 2.99\text{dBm}$ .

**802.11n (40MHz): 1TX**

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
38	5190	-13.36	4	PASS
46	5230	-11.94	4	PASS

**802.11n (40MHz): 2TX**

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-17.29	-15.45	-13.26	2.99	PASS
46	5230	-15.33	-15.59	-12.45	2.99	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $4-(7.01-6) = 2.99\text{dBm}$ .

**802.11ac (80MHz): 1TX**

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
42	5210	-14.78	2.99	PASS

**802.11ac (80MHz): 2TX**

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
42	5210	-18.21	-18.15	-15.17	2.99	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $4-(7.01-6) = 2.99\text{dBm}$ .




## 4.5 PEAK POWER EXCURSION MEASUREMENT

### 4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

### 4.5.2 TEST SETUP



### 4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW  $\geq$  3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.


### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.2.6



### 4.5.7 TEST RESULTS

MODULATION MODE	MODULATION TYPE	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS/ FAIL
802.11a	BPSK	5200	1.50	-9.04	10.54	13	PASS
	QPSK		1.35	-9.26	10.61	13	PASS
	16QAM		1.62	-9.09	10.71	13	PASS
	64QAM		1.87	-9.33	11.20	13	PASS
802.11n (20MHz)	BPSK	5240	1.76	-8.91	10.67	13	PASS
	QPSK		1.52	-9.03	10.55	13	PASS
	16QAM		1.84	-8.98	10.82	13	PASS
	64QAM		1.95	-9.04	10.99	13	PASS
802.11n (40MHz)	BPSK	5190	-2.59	-13.36	10.77	13	PASS
	QPSK		-2.47	-13.57	11.10	13	PASS
	16QAM		-2.36	-13.40	11.04	13	PASS
	64QAM		-2.60	-13.48	10.88	13	PASS
802.11ac (80MHz)	BPSK	5210	-3.98	-14.78	10.80	13	PASS
	QPSK		-3.82	-14.68	10.86	13	PASS
	16QAM		-4.00	-14.61	10.61	13	PASS
	64QAM		-4.13	-14.57	10.44	13	PASS
	256QAM		-3.89	-14.54	10.65	13	PASS

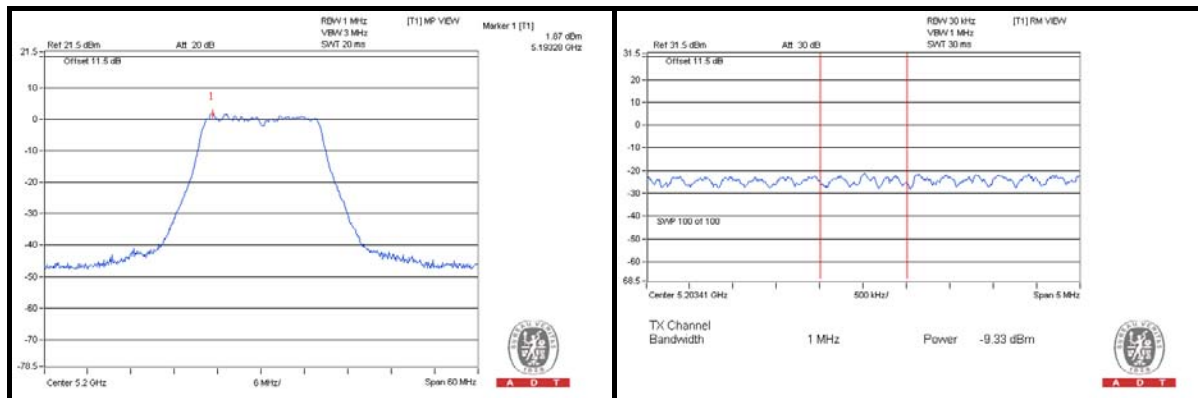


## 4.6 FREQUENCY STABILITY

### 4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

### 4.6.2 TEST SETUP

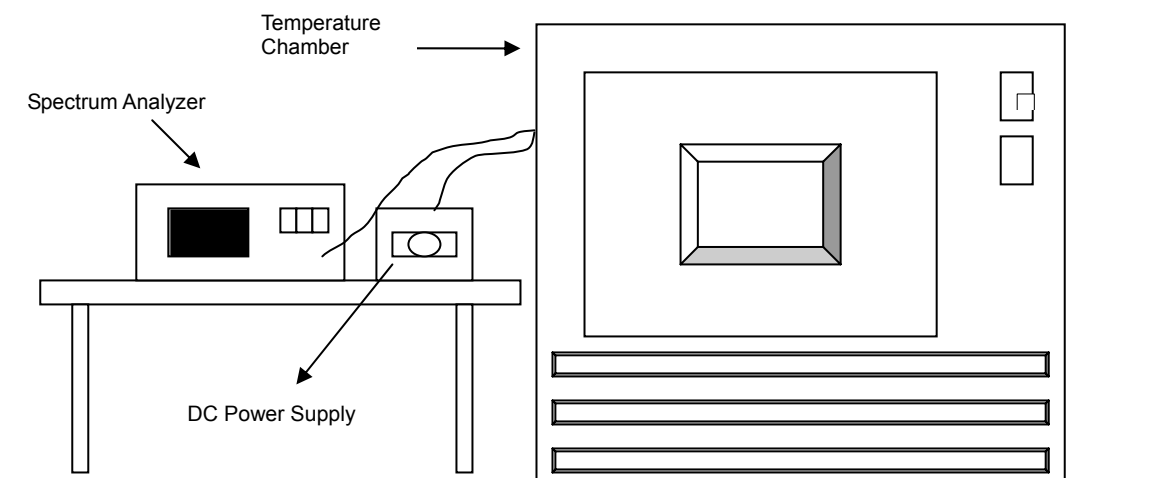

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

#### 4.6.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



### 4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	5	5179.9866	-0.00026	5179.9914	-0.00017	5179.9855	-0.00028	5179.9909	-0.00018
40	5	5179.9816	-0.00036	5179.9794	-0.00040	5179.9842	-0.00031	5179.9845	-0.00030
30	5	5180.0132	0.00025	5180.0112	0.00022	5180.0114	0.00022	5180.0107	0.00021
20	5	5179.9838	-0.00031	5179.9861	-0.00027	5179.9935	-0.00013	5179.9870	-0.00025
10	5	5180.0045	0.00009	5180.0046	0.00009	5180.0039	0.00008	5180.0074	0.00014
0	5	5179.9847	-0.00030	5179.9823	-0.00034	5179.9826	-0.00034	5179.9750	-0.00048
-10	5	5180.0179	0.00035	5180.0136	0.00026	5180.0137	0.00026	5180.0151	0.00029
-20	5	5180.0073	0.00014	5180.0112	0.00022	5180.0051	0.00010	5180.0080	0.00015
-30	5	5179.9925	-0.00014	5179.9821	-0.00035	5179.9864	-0.00026	5179.9859	-0.00027

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	5.75	5179.9830	-0.00033	5179.9862	-0.00027	5179.9936	-0.00012	5179.9878	-0.00024
	5	5179.9838	-0.00031	5179.9861	-0.00027	5179.9935	-0.00013	5179.9870	-0.00025
	4.25	5179.9828	-0.00033	5179.9856	-0.00028	5179.9940	-0.00012	5179.9862	-0.00027



A D T

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

## **7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**---END---**