



FCC TEST REPORT

(15.407)

REPORT NO.: RF141008C19-1
MODEL NO.: EWS660AP (Refer to item 3.1 for more details)
FCC ID: A8J-EWS660AP
RECEIVED: Oct. 24, 2014
TESTED: Oct. 28 ~ Nov. 17, 2014
ISSUED: Nov. 28, 2014

APPLICANT: EnGenius Technologies

ADDRESS: 1580 Scenic Avenue, Costa Mesa, CA92626

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3 DUTY CYCLE OF TEST SIGNAL	12
3.4 DESCRIPTION OF SUPPORT UNITS	14
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST	14
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
4. TEST TYPES AND RESULTS	16
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	16
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	16
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	16
4.1.3 TEST INSTRUMENTS	17
4.1.4 TEST PROCEDURES	18
4.1.5 DEVIATION FROM TEST STANDARD	18
4.1.6 TEST SETUP	19
4.1.7 EUT OPERATING CONDITION	20
4.1.8 TEST RESULTS	21
4.2 CONDUCTED EMISSION MEASUREMENT	40
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	40
4.2.2 TEST INSTRUMENTS	40
4.2.3 TEST PROCEDURES	41
4.2.4 DEVIATION FROM TEST STANDARD	41
4.2.5 TEST SETUP	41
4.2.6 EUT OPERATING CONDITIONS	41
4.2.7 TEST RESULTS	42
4.3 TRANSMIT POWER MEASUREMENT	44
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	44
4.3.2 TEST SETUP	44
4.3.3 TEST INSTRUMENTS	45
4.3.4 TEST PROCEDURE	45
4.3.5 DEVIATION FROM TEST STANDARD	45
4.3.6 EUT OPERATING CONDITIONS	45
4.3.7 TEST RESULTS	46
4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.2 TEST SETUP	48
4.4.3 TEST INSTRUMENTS	48
4.4.4 TEST PROCEDURES	48
4.4.5 DEVIATION FROM TEST STANDARD	49
4.4.6 EUT OPERATING CONDITIONS	49
4.4.7 TEST RESULTS	50
4.5 FREQUENCY STABILITY	56
4.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	56
4.5.2 TEST SETUP	56



A D T

4.5.3	TEST INSTRUMENTS.....	56
4.5.4	TEST PROCEDURE.....	57
4.5.5	DEVIATION FROM TEST STANDARD	57
4.5.6	EUT OPERATING CONDITION.....	57
4.5.7	TEST RESULTS	58
4.6	6DB BANDWIDTH MEASUREMENT	59
4.6.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	59
4.6.2	TEST SETUP.....	59
4.6.3	TEST INSTRUMENTS.....	59
4.6.4	TEST PROCEDURE.....	59
4.6.5	DEVIATION FROM TEST STANDARD	59
4.6.6	EUT OPERATING CONDITIONS	59
4.6.7	TEST RESULTS	60
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	62
6.	INFORMATION ON THE TESTING LABORATORIES	63
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	64



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF141008C19-1	Original release	Nov. 28, 2014



1. CERTIFICATION

PRODUCT: Dual Band Wireless AC1750 Managed Outdoor Access Point

MODEL: EWS660AP (Refer to item 3.1 for more details)

BRAND: EnGenius

APPLICANT: EnGenius Technologies

TESTED: Oct. 28 ~ Nov. 17, 2014

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

The above equipment (model: EWS660AP) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Celine Chou , **DATE :** Nov. 28, 2014
Celine Chou / Specialist

APPROVED BY : Ken Liu , **DATE :** Nov. 28, 2014
Ken Liu / Senior Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -19.74dB at 1.38927MHz.
15.407(b)(1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 5150.00, 5861.00, 5714.00, 5852.00 and 35.73MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Dual Band Wireless AC1750 Managed Outdoor Access Point
MODEL NO.	EWS660AP (Refer to note for more details)
POWER SUPPLY	48Vdc (POE)
MODULATION TYPE	256QAM, 64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 450Mbps 802.11ac: 1299.9Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz), 802.11ac (20MHz) 2 for 802.11n (40MHz), 802.11ac (40MHz) 1 for 802.11ac (80MHz) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (20MHz), 802.11ac (20MHz) 2 for 802.11n (40MHz), 802.11ac (40MHz) 1 for 802.11ac (80MHz)
OUTPUT POWER	5180 ~ 5240MHz: 10.782mW 5745 ~ 5825MHz: 515.871mW
ANTENNA TYPE	Refer to note as below
ANTENNA CONNECTOR	Refer to note as below
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	POE

NOTE:

- The following model names are provided to this EUT.

Brand	Model	Description
EnGenius	EWS660AP	All models are electrically identical, different model names are for marketing purpose.
	ENS1750	
	ENS1200	

* The model of the EWS660AP was chosen for final test.

2. The EUT incorporates a MIMO function. Physically, the EUT provides 3 completed transmitters and 3 receivers.

MODULATION MODE	TX FUNCTION
802.11a	3TX
802.11n (20MHz)	3TX
802.11n (40MHz)	3TX
802.11ac (80MHz)	3TX

* The modulation and bandwidth are similar for 802.11n mode for 20MHz / 40MHz and 802.11ac mode for 20MHz / 40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

3. There are 6 antennas for the EUT.

No.	Type	Gain(dBi)											Connector
		2400	2450	2500	5150	5250	5350	5450	5550	5650	5750	5850	
1	Dipole	3.54	3.34	2.99	-	-	-	-	-	-	-	-	IPEX
2	Dipole	4.96	5.02	4.90	-	-	-	-	-	-	-	-	IPEX
3	Dipole	3.55	3.01	3.17	-	-	-	-	-	-	-	-	IPEX
4	Dipole	-	-	-	4.54	5.28	5.57	5.51	4.56	4.44	4.48	4.85	IPEX
5	Dipole	-	-	-	5.46	5.65	6.12	5.57	5.83	5.13	5.02	5.82	IPEX
6	Dipole	-	-	-	4.98	5.70	6.26	5.98	4.27	4.20	4.46	4.38	IPEX

4. The EUT consumes power from the following POE.

POE's Adapter	
Brand	Powertron Electronics Corp.
Model	PA1040-480IB080
Input Power	100-240Vac, 50-60Hz, 1.5A
Output Power	48Vdc, 0.8A, 38.4W Max
Power Line	1.55m cable with one core attached on adapter

POE	
Brand	EnGenius
Model	EPE-4818G
Power Rating	48Vdc, 0.8A, 38.4W Max

5. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (20MHz), 802.11ac (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz), 802.11ac (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY
42	5210MHz

FOR 5745 ~ 5825MHz

5 channels are provided for 802.11a, 802.11n (20MHz), 802.11ac (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz), 802.11ac (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY
155	5775MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE $<$ 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
-	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
-	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	15.0
-	802.11ac (80MHz)		42	42	OFDM	BPSK	97.5
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (80MHz)		155	155	OFDM	BPSK	97.5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36	OFDM	BPSK	6.0
		5745-5825	149 to 165		OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36	OFDM	BPSK	6.0
		5745-5825	149 to 165		OFDM	BPSK	6.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
-	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
-	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	15.0
-	802.11ac (80MHz)		42	42	OFDM	BPSK	97.5
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (80MHz)		155	155	OFDM	BPSK	97.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	21deg. C, 71%RH	120Vac, 60Hz	Jones Chang
RE<1G	22deg. C, 66%RH	120Vac, 60Hz	Jones Chang
PLC	24deg. C, 73%RH	120Vac, 60Hz	Nick Hsu
APCM	25deg. C, 60%RH	120Vac, 60Hz	Frank Liu



A D T

3.3 DUTY CYCLE OF TEST SIGNAL

For U-NII-1 Band:


Duty cycle of test signal is < 98 %, duty factor is required.

802.11a: Duty cycle = $2.000/2.125 = 0.941$, Duty factor = $10 * \log(1/0.941) = 0.26$

802.11n (20MHz): Duty cycle = $1.838/2.050 = 0.897$, Duty factor = $10 * \log(1/0.897) = 0.47$

802.11n (40MHz): Duty cycle = $0.887/1.025 = 0.865$, Duty factor = $10 * \log(1/0.865) = 0.63$

802.11ac (80MHz): Duty cycle = $0.425/0.537 = 0.791$, Duty factor = $10 * \log(1/0.791) = 1.02$

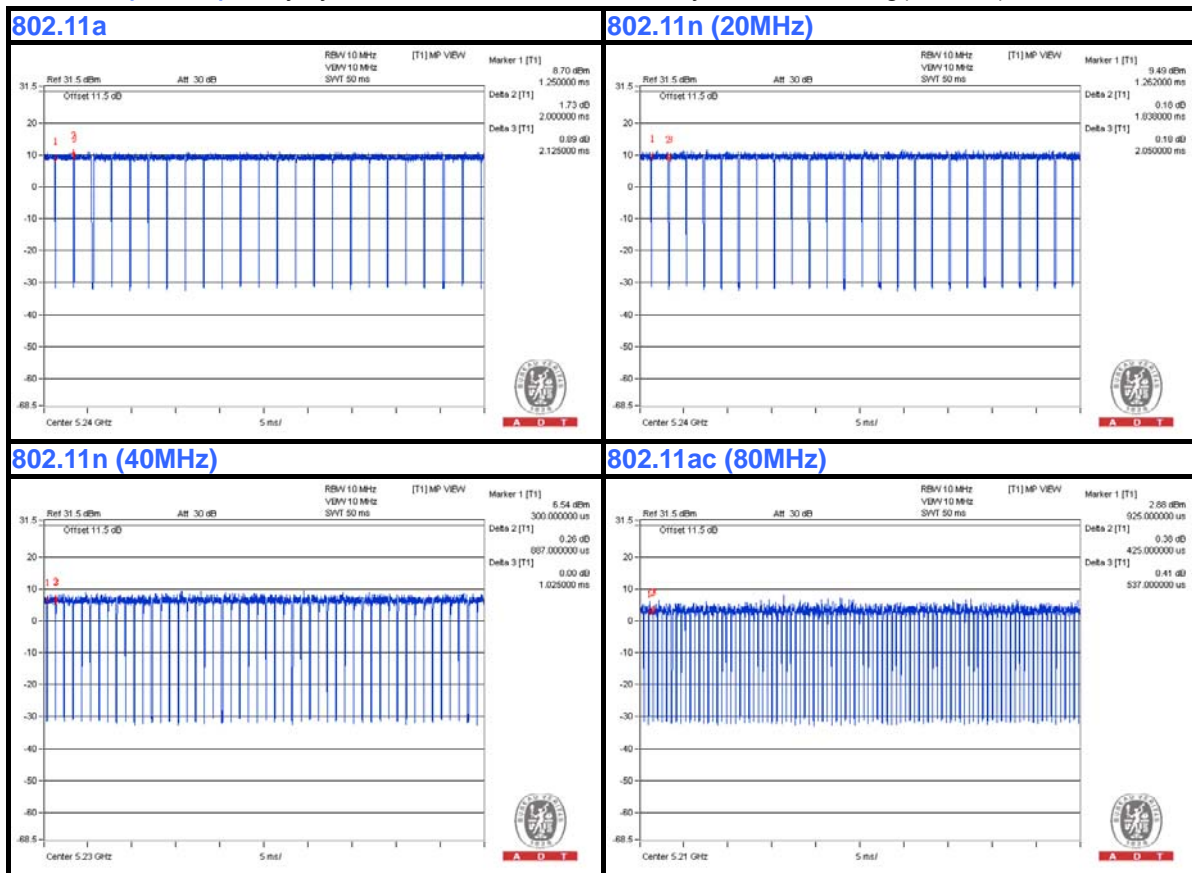

For U-NII-3 Band:


Duty cycle of test signal is < 98 %, duty factor is required.

802.11a: Duty cycle = $2.013/2.113 = 0.953$, Duty factor = $10 * \log(1/0.953) = 0.21$

802.11n (20MHz): Duty cycle = $1.879/2.054 = 0.915$, Duty factor = $10 * \log(1/0.915) = 0.39$

802.11n (40MHz): Duty cycle = $0.917/0.964 = 0.951$, Duty factor = $10 * \log(1/0.951) = 0.22$

802.11ac (80MHz): Duty cycle = $0.445/0.515 = 0.864$, Duty factor = $10 * \log(1/0.864) = 0.63$

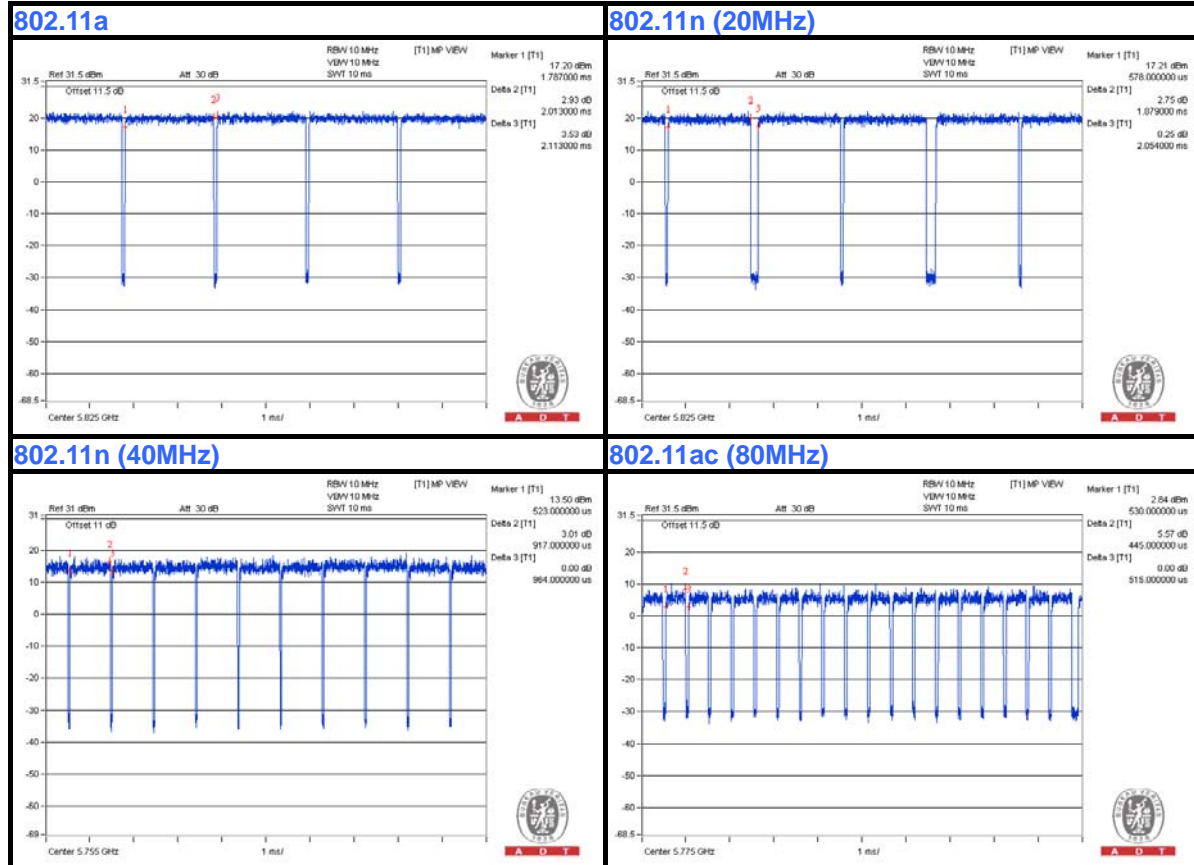

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E5410	1HC2XM1	FCC Doc approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	3m RJ45 cable and 1.8m RJ45 cable

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Items 1 acted as communication partner to transfer data.

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

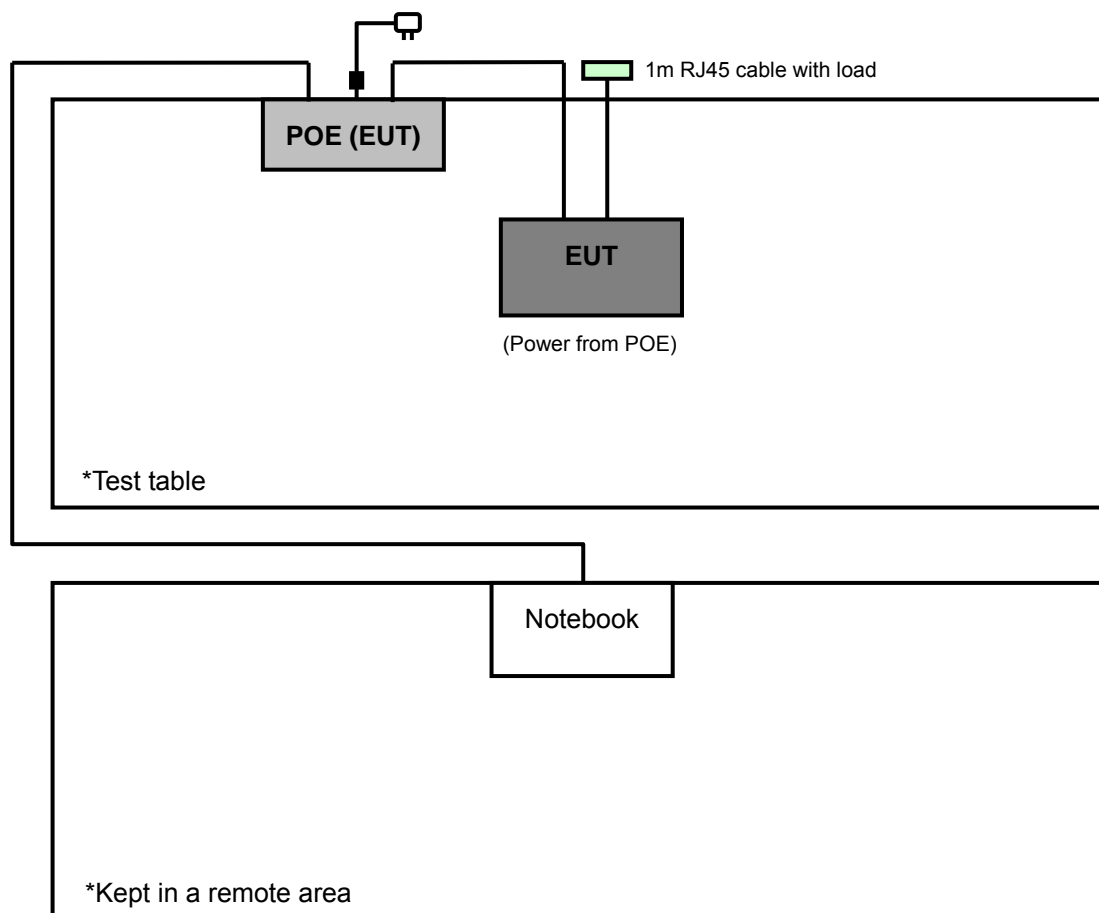

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBµV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK: -27 (dBm/MHz) ^{*1} PK: -17 (dBm/MHz) ^{*2}	PK: 68.2 (dBµV/m) ^{*1} PK: 78.2 (dBµV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$



A D T

4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	Jan. 02, 2014	Jan. 01, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Mar. 03, 2014	Mar. 02, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Feb. 26, 2014	Feb. 25, 2015
HORN Antenna SCHWARZBECK	9120D	209	Aug. 25, 2014	Aug. 24, 2015
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 17, 2014	Feb. 16, 2015
Preamplifier Agilent	8447D	2944A10738	Oct.18, 2014	Oct. 17, 2015
Preamplifier Agilent	8449B	3008A01964	Aug. 22, 2014	Aug. 21, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214378/4	Aug. 22, 2014	Aug. 21, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6 +309224/4	Aug. 22, 2014	Aug. 21, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2014	Oct. 17, 2015
High Speed Peak Power Meter	ML2495A	0824011	Jul. 26, 2014	Jul. 25, 2015
Power Sensor	MA2411B	0738171	Jul. 26, 2014	Jul. 25, 2015
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 9, 2014	Jun. 08, 2015

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD


No deviation.

4.1.6 TEST SETUP

Frequency range 30MHz~1GHz

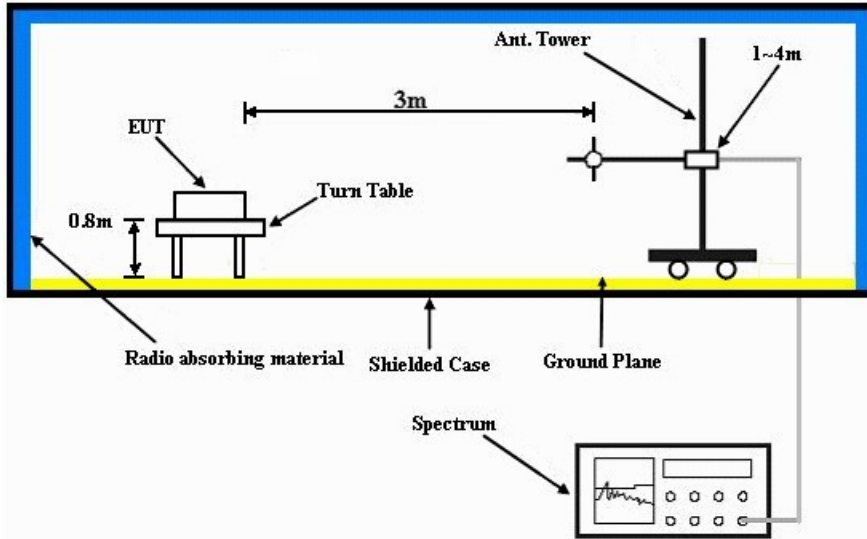

Frequency range above 1GHz

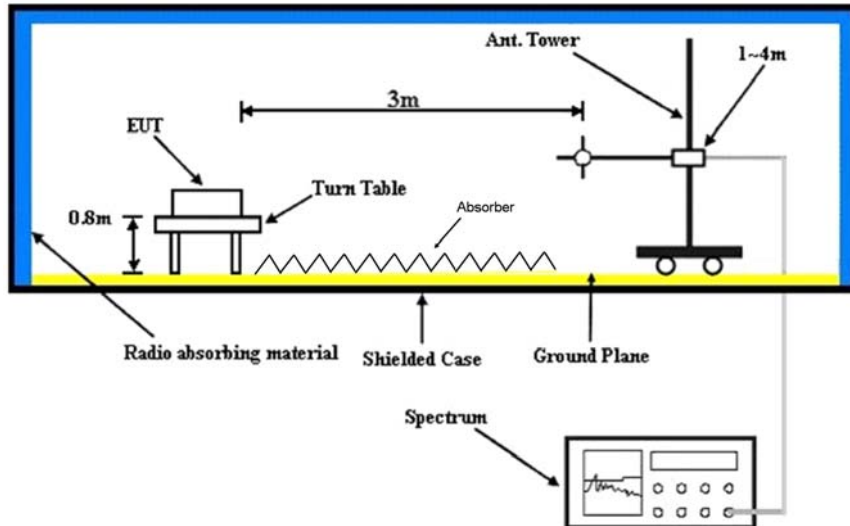

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITION

- a. Placed the EUT on the testing table.
- b. Prepared notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partners connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

4.1.8 TEST RESULTS

ABOVE 1GHz WORST-CASE DATA:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.6 PK	74.0	-4.4	1.14 H	358	63.20	6.40
2	5150.00	53.0 AV	54.0	-1.0	1.14 H	358	46.60	6.40
3	*5180.00	119.2 PK			1.18 H	346	79.30	39.90
4	*5180.00	108.8 AV			1.18 H	346	68.90	39.90
5	5350.00	62.0 PK	74.0	-12.0	1.16 H	23	55.60	6.40
6	5350.00	50.6 AV	54.0	-3.4	1.16 H	23	44.20	6.40
7	#10360.00	61.6 PK	74.0	-12.4	1.22 H	339	42.90	18.70
8	#10360.00	49.3 AV	54.0	-4.7	1.22 H	339	30.60	18.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	1.05 V	350	50.50	6.40
2	5150.00	51.7 AV	54.0	-2.3	1.05 V	350	45.30	6.40
3	*5180.00	119.7 PK			1.05 V	349	79.80	39.90
4	*5180.00	109.2 AV			1.05 V	349	69.30	39.90
5	5350.00	60.9 PK	74.0	-13.1	1.09 V	344	54.50	6.40
6	5350.00	49.8 AV	54.0	-4.2	1.09 V	344	43.40	6.40
7	#10360.00	60.7 PK	74.0	-13.3	1.02 V	288	42.00	18.70
8	#10360.00	47.7 AV	54.0	-6.3	1.02 V	288	29.00	18.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.9 PK	74.0	-2.1	1.06 H	359	65.50	6.40
2	5150.00	53.0 AV	54.0	-1.0	1.06 H	359	46.60	6.40
3	*5200.00	122.7 PK			1.01 H	2	82.70	40.00
4	*5200.00	113.5 AV			1.01 H	2	73.50	40.00
5	5360.00	61.5 PK	74.0	-12.5	1.17 H	269	55.10	6.40
6	5360.00	49.8 AV	54.0	-4.2	1.17 H	269	43.40	6.40
7	#10400.00	61.2 PK	74.0	-12.8	1.29 H	153	42.20	19.00
8	#10400.00	47.4 AV	54.0	-6.6	1.29 H	153	28.40	19.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.7 PK	74.0	-4.3	1.04 V	16	63.30	6.40
2	5150.00	52.0 AV	54.0	-2.0	1.04 V	16	45.60	6.40
3	*5200.00	123.9 PK			1.04 V	11	83.90	40.00
4	*5200.00	113.8 AV			1.04 V	11	73.80	40.00
5	5360.00	62.2 PK	74.0	-11.8	1.22 V	354	55.80	6.40
6	5360.00	50.9 AV	54.0	-3.1	1.22 V	354	44.50	6.40
7	#10400.00	63.8 PK	74.0	-10.2	1.63 V	163	44.80	19.00
8	#10400.00	50.9 AV	54.0	-3.1	1.63 V	163	31.90	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	1.13 H	183	54.10	6.40
2	5150.00	48.7 AV	54.0	-5.3	1.13 H	183	42.30	6.40
3	*5240.00	124.5 PK			1.08 H	355	84.50	40.00
4	*5240.00	113.8 AV			1.08 H	355	73.80	40.00
5	5350.00	61.8 PK	74.0	-12.2	1.23 H	0	55.40	6.40
6	5350.00	50.3 AV	54.0	-3.7	1.23 H	0	43.90	6.40
7	#10480.00	61.4 PK	74.0	-12.6	1.21 H	133	42.20	19.20
8	#10480.00	47.6 AV	54.0	-6.4	1.21 H	133	28.40	19.20
9	15720.00	64.4 PK	74.0	-9.6	1.00 H	112	45.10	19.30
10	15720.00	51.4 AV	54.0	-2.6	1.00 H	112	32.10	19.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.8 PK	74.0	-16.2	1.05 V	19	51.40	6.40
2	5150.00	47.3 AV	54.0	-6.7	1.05 V	19	40.90	6.40
3	*5240.00	126.1 PK			1.00 V	14	86.10	40.00
4	*5240.00	115.9 AV			1.05 V	14	75.90	40.00
5	5440.00	62.7 PK	74.0	-11.3	1.13 V	14	56.10	6.60
6	5440.00	51.3 AV	54.0	-2.7	1.13 V	14	44.70	6.60
7	#10480.00	61.1 PK	74.0	-12.9	1.20 V	225	41.90	19.20
8	#10480.00	47.9 AV	54.0	-6.1	1.20 V	225	28.70	19.20
9	15720.00	63.3 PK	74.0	-10.7	1.00 V	270	44.00	19.30
10	15720.00	50.7 AV	54.0	-3.3	1.00 V	270	31.40	19.30

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	71.1 PK	74.0	-2.9	1.16 H	6	64.10	7.00
2	#5714.00	52.8 AV	54.0	-1.2	1.16 H	6	45.80	7.00
3	#5722.00	76.3 PK	78.2	-1.9	1.17 H	348	69.30	7.00
4	#5725.00	75.6 PK	78.2	-2.6	1.17 H	350	68.50	7.10
5	*5745.00	118.6 PK			1.12 H	346	78.00	40.60
6	*5745.00	107.6 AV			1.12 H	346	67.00	40.60
7	11490.00	61.7 PK	74.0	-12.3	1.00 H	241	43.00	18.70
8	11490.00	48.4 AV	54.0	-5.6	1.00 H	241	29.70	18.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	68.1 PK	74.0	-5.9	1.00 V	7	61.10	7.00
2	#5714.00	52.5 AV	54.0	-1.5	1.00 V	7	45.50	7.00
3	#5722.00	74.1 PK	78.2	-4.1	1.00 V	7	67.10	7.00
4	#5725.00	73.8 PK	78.2	-4.4	1.00 V	7	66.70	7.10
5	*5745.00	119.5 PK			1.17 V	322	78.90	40.60
6	*5745.00	109.8 AV			1.17 V	322	69.20	40.60
7	11490.00	61.0 PK	74.0	-13.0	1.02 V	91	42.30	18.70
8	11490.00	47.1 AV	54.0	-6.9	1.02 V	91	28.40	18.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	63.3 PK	74.0	-10.7	1.00 H	14	56.60	6.70
2	5460.00	50.8 AV	54.0	-3.2	1.00 H	14	44.10	6.70
3	*5785.00	125.3 PK			1.46 H	6	84.60	40.70
4	*5785.00	114.6 AV			1.46 H	6	73.90	40.70
5	11570.00	62.6 PK	74.0	-11.4	1.62 H	197	43.80	18.80
6	11570.00	50.1 AV	54.0	-3.9	1.62 H	197	31.30	18.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	64.7 PK	74.0	-9.3	1.21 V	2	58.00	6.70
2	5460.00	51.4 AV	54.0	-2.6	1.21 V	2	44.70	6.70
3	*5785.00	125.4 PK			1.57 V	2	84.70	40.70
4	*5785.00	114.9 AV			1.57 V	2	74.20	40.70
5	11570.00	66.0 PK	74.0	-8.0	1.00 V	153	47.20	18.80
6	11570.00	52.6 AV	54.0	-1.4	1.00 V	153	33.80	18.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	120.7 PK			1.44 H	352	80.00	40.70
2	*5825.00	111.0 AV			1.44 H	352	70.30	40.70
3	#5850.00	72.0 PK	78.2	-6.2	1.41 H	341	65.00	7.00
4	#5853.00	72.6 PK	78.2	-5.6	1.41 H	341	65.50	7.10
5	#5861.00	71.6 PK	74.0	-2.4	1.52 H	339	64.50	7.10
6	#5861.00	53.0 AV	54.0	-1.0	1.52 H	339	45.90	7.10
7	11650.00	62.2 PK	74.0	-11.8	1.00 H	354	43.00	19.20
8	11650.00	49.3 AV	54.0	-4.7	1.00 H	354	30.10	19.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	121.4 PK			1.46 V	0	80.70	40.70
2	*5825.00	111.4 AV			1.46 V	0	70.70	40.70
3	#5850.00	75.9 PK	78.2	-2.3	1.50 V	1	68.90	7.00
4	#5853.00	77.1 PK	78.2	-1.1	1.54 V	1	70.00	7.10
5	#5860.00	72.7 PK	74.0	-1.3	1.54 V	3	65.60	7.10
6	#5860.00	52.8 AV	54.0	-1.2	1.54 V	3	45.70	7.10
7	11650.00	62.3 PK	74.0	-11.7	1.00 V	165	43.10	19.20
8	11650.00	49.4 AV	54.0	-4.6	1.00 V	165	30.20	19.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.07 H	0	60.90	6.40
2	5150.00	52.4 AV	54.0	-1.6	1.07 H	0	46.00	6.40
3	*5180.00	117.2 PK			1.27 H	5	77.30	39.90
4	*5180.00	107.0 AV			1.27 H	5	67.10	39.90
5	#10360.00	60.9 PK	74.0	-13.1	1.20 H	170	42.20	18.70
6	#10360.00	47.6 AV	54.0	-6.4	1.20 H	170	28.90	18.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.7 PK	74.0	-5.3	1.06 V	7	62.30	6.40
2	5150.00	51.7 AV	54.0	-2.3	1.06 V	7	45.30	6.40
3	*5180.00	118.5 PK			1.16 V	352	78.60	39.90
4	*5180.00	97.8 AV			1.16 V	352	57.90	39.90
5	#10360.00	61.2 PK	74.0	-12.8	1.07 V	306	42.50	18.70
6	#10360.00	47.7 AV	54.0	-6.3	1.07 V	306	29.00	18.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.7 PK	74.0	-2.3	1.07 H	356	65.30	6.40
2	5150.00	52.6 AV	54.0	-1.4	1.07 H	356	46.20	6.40
3	*5200.00	89.4 PK			1.06 H	353	82.90	6.50
4	*5200.00	79.4 AV			1.06 H	353	72.90	6.50
5	5400.00	63.3 PK	74.0	-10.7	1.12 H	183	56.70	6.60
6	5400.00	49.6 AV	54.0	-4.4	1.12 H	183	43.00	6.60
7	#10400.00	61.6 PK	74.0	-12.4	1.10 H	100	42.60	19.00
8	#10400.00	47.6 AV	54.0	-6.4	1.10 H	100	28.60	19.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.8 PK	74.0	-4.2	1.06 V	5	63.40	6.40
2	5150.00	52.1 AV	54.0	-1.9	1.06 V	5	45.70	6.40
3	*5200.00	123.2 PK			1.06 V	348	83.20	40.00
4	*5200.00	113.0 AV			1.06 V	348	73.00	40.00
5	5400.00	60.7 PK	74.0	-13.3	1.16 V	206	54.10	6.60
6	5400.00	49.0 AV	54.0	-5.0	1.16 V	206	42.40	6.60
7	#10400.00	62.0 PK	74.0	-12.0	1.60 V	165	43.00	19.00
8	#10400.00	48.8 AV	54.0	-5.2	1.60 V	165	29.80	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	124.6 PK			1.15 H	351	84.60	40.00
2	*5240.00	114.4 AV			1.15 H	351	74.40	40.00
3	5350.00	62.0 PK	74.0	-12.0	1.20 H	154	55.60	6.40
4	5350.00	50.7 AV	54.0	-3.3	1.20 H	154	44.30	6.40
5	#10480.00	61.1 PK	74.0	-12.9	1.26 H	340	41.90	19.20
6	#10480.00	48.0 AV	54.0	-6.0	1.26 H	340	28.80	19.20
7	15720.00	62.7 PK	74.0	-11.3	1.13 H	165	43.40	19.30
8	15720.00	51.1 AV	54.0	-2.9	1.13 H	165	31.80	19.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	125.5 PK			1.15 V	13	85.50	40.00
2	*5240.00	116.0 AV			1.15 V	13	76.00	40.00
3	5350.00	59.4 PK	74.0	-14.6	1.15 V	15	53.00	6.40
4	5350.00	47.7 AV	54.0	-6.3	1.15 V	15	41.30	6.40
5	#10480.00	60.2 PK	74.0	-13.8	1.25 V	320	41.00	19.20
6	#10480.00	47.1 AV	54.0	-6.9	1.25 V	320	27.90	19.20
7	15720.00	62.5 PK	74.0	-11.5	1.00 V	142	43.20	19.30
8	15720.00	50.2 AV	54.0	-3.8	1.00 V	142	30.90	19.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	64.4 PK	74.0	-9.6	1.26 H	2	57.40	7.00
2	#5714.00	50.6 AV	54.0	-3.4	1.26 H	2	43.60	7.00
3	#5722.00	71.3 PK	78.2	-6.9	1.26 H	186	64.30	7.00
4	#5725.00	71.1 PK	78.2	-7.1	1.26 H	186	64.00	7.10
5	*5745.00	119.1 PK			1.55 H	343	78.50	40.60
6	*5745.00	108.6 AV			1.55 H	343	68.00	40.60
7	11490.00	60.3 PK	74.0	-13.7	1.49 H	160	41.60	18.70
8	11490.00	47.0 AV	54.0	-7.0	1.49 H	160	28.30	18.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	67.6 PK	74.0	-6.4	1.27 V	3	60.60	7.00
2	#5714.00	53.0 AV	54.0	-1.0	1.27 V	3	46.00	7.00
3	#5722.00	76.4 PK	78.2	-1.8	1.28 V	2	69.40	7.00
4	#5725.00	76.0 PK	78.2	-2.2	1.28 V	2	68.90	7.10
5	*5745.00	119.7 PK			1.37 V	359	79.10	40.60
6	*5745.00	109.9 AV			1.37 V	359	69.30	40.60
7	11490.00	60.8 PK	74.0	-13.2	1.03 V	151	42.10	18.70
8	11490.00	47.4 AV	54.0	-6.6	1.03 V	151	28.70	18.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	52.7 PK	74.0	-21.3	1.20 H	4	46.00	6.70
2	5460.00	50.6 AV	54.0	-3.4	1.20 H	4	43.90	6.70
3	*5785.00	123.6 PK			1.24 H	343	82.90	40.70
4	*5785.00	113.2 AV			1.24 H	343	72.50	40.70
5	11570.00	62.3 PK	74.0	-11.7	1.62 H	198	43.50	18.80
6	11570.00	50.3 AV	54.0	-3.7	1.62 H	198	31.50	18.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	63.5 PK	74.0	-10.5	1.20 V	0	56.80	6.70
2	5460.00	51.2 AV	54.0	-2.8	1.20 V	0	44.50	6.70
3	*5785.00	125.3 PK			1.59 V	10	84.60	40.70
4	*5785.00	114.5 AV			1.59 V	10	73.80	40.70
5	11570.00	64.5 PK	74.0	-9.5	1.00 V	155	45.70	18.80
6	11570.00	51.8 AV	54.0	-2.2	1.00 V	355	33.00	18.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	118.0 PK			1.44 H	12	77.30	40.70
2	*5825.00	107.8 AV			1.44 H	12	67.10	40.70
3	#5850.00	71.2 PK	78.2	-7.0	1.40 H	0	64.20	7.00
4	#5853.00	72.7 PK	78.2	-5.5	1.40 H	0	65.60	7.10
5	#5861.00	64.0 PK	74.0	-10.0	1.43 H	10	56.90	7.10
6	#5861.00	50.1 AV	54.0	-3.9	1.43 H	10	43.00	7.10
7	11650.00	61.7 PK	74.0	-12.3	1.60 H	202	42.50	19.20
8	11650.00	48.3 AV	54.0	-5.7	1.60 H	202	29.10	19.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	120.3 PK			1.36 V	320	79.60	40.70
2	*5825.00	110.1 AV			1.36 V	320	69.40	40.70
3	#5850.00	75.1 PK	78.2	-3.1	1.59 V	359	68.10	7.00
4	#5852.00	77.2 PK	78.2	-1.0	1.59 V	359	70.10	7.10
5	#5861.00	70.7 PK	74.0	-3.3	1.57 V	358	63.60	7.10
6	#5861.00	52.4 AV	54.0	-1.6	1.57 V	358	45.30	7.10
7	11650.00	61.8 PK	74.0	-12.2	1.10 V	156	42.60	19.20
8	11650.00	48.8 AV	54.0	-5.2	1.10 V	156	29.60	19.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	1.08 H	347	60.10	6.40
2	5150.00	52.7 AV	54.0	-1.3	1.08 H	347	46.30	6.40
3	*5190.00	111.0 PK			1.20 H	353	71.10	39.90
4	*5190.00	101.2 AV			1.20 H	353	61.30	39.90
5	#10380.00	60.8 PK	74.0	-13.2	1.00 H	29	42.00	18.80
6	#10380.00	47.5 AV	54.0	-6.5	1.00 H	29	28.70	18.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.7 PK	74.0	-5.3	1.05 V	5	62.30	6.40
2	5150.00	53.0 AV	54.0	-1.0	1.05 V	5	46.60	6.40
3	*5190.00	114.1 PK			1.05 V	13	74.20	39.90
4	*5190.00	104.1 AV			1.05 V	13	64.20	39.90
5	#10380.00	60.5 PK	74.0	-13.5	1.52 V	60	41.70	18.80
6	#10380.00	47.3 AV	54.0	-6.7	1.52 V	60	28.50	18.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	1.17 H	339	61.30	6.40
2	5150.00	53.0 AV	54.0	-1.0	1.17 H	339	46.60	6.40
3	*5230.00	118.1 PK			1.15 H	352	78.10	40.00
4	*5230.00	108.0 AV			1.15 H	352	68.00	40.00
5	5350.00	61.4 PK	74.0	-12.6	1.15 H	313	55.00	6.40
6	5350.00	49.7 AV	54.0	-4.3	1.15 H	313	43.30	6.40
7	#10460.00	61.2 PK	74.0	-12.8	1.20 H	33	42.10	19.10
8	#10460.00	48.2 AV	54.0	-5.8	1.20 H	33	29.10	19.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.4 PK	74.0	-9.6	1.04 V	7	58.00	6.40
2	5150.00	51.2 AV	54.0	-2.8	1.04 V	7	44.80	6.40
3	*5230.00	120.0 PK			1.06 V	348	80.00	40.00
4	*5230.00	109.7 AV			1.06 V	348	69.70	40.00
5	5350.00	60.4 PK	74.0	-13.6	1.12 V	77	54.00	6.40
6	5350.00	48.9 AV	54.0	-5.1	1.12 V	77	42.50	6.40
7	#10460.00	60.9 PK	74.0	-13.1	1.00 V	350	41.80	19.10
8	#10460.00	47.5 AV	54.0	-6.5	1.00 V	350	28.40	19.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	63.9 PK	74.0	-10.1	1.27 H	342	56.90	7.00
2	#5714.00	50.5 AV	54.0	-3.5	1.27 H	342	43.50	7.00
3	#5722.00	72.6 PK	78.2	-5.6	1.25 H	345	65.60	7.00
4	#5725.00	74.0 PK	78.2	-4.2	1.27 H	345	66.90	7.10
5	*5755.00	112.4 PK			1.03 H	8	71.70	40.70
6	*5755.00	102.4 AV			1.03 H	8	61.70	40.70
7	11510.00	60.4 PK	74.0	-13.6	1.30 H	13	41.70	18.70
8	11510.00	47.0 AV	54.0	-7.0	1.30 H	13	28.30	18.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	67.7 PK	74.0	-6.3	1.38 V	359	60.70	7.00
2	#5714.00	53.0 AV	54.0	-1.0	1.38 V	359	46.00	7.00
3	#5722.00	73.7 PK	78.2	-4.5	1.29 V	357	66.70	7.00
4	#5725.00	76.1 PK	78.2	-2.1	1.30 V	359	69.00	7.10
5	*5755.00	114.2 PK			1.37 V	1	73.60	40.60
6	*5755.00	104.2 AV			1.37 V	1	63.60	40.60
7	11510.00	60.8 PK	74.0	-13.2	1.25 V	253	42.10	18.70
8	11510.00	47.6 AV	54.0	-6.4	1.25 V	253	28.90	18.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	116.5 PK			1.12 H	2	75.80	40.70
2	*5795.00	106.6 AV			1.12 H	2	65.90	40.70
3	#5850.00	67.7 PK	78.2	-10.5	1.15 H	11	60.70	7.00
4	#5853.00	68.8 PK	78.2	-9.4	1.15 H	11	61.70	7.10
5	#5861.00	60.7 PK	74.0	-13.3	1.12 H	3	53.60	7.10
6	#5861.00	49.3 AV	54.0	-4.7	1.12 H	3	42.20	7.10
7	11590.00	61.1 PK	74.0	-12.9	1.30 H	226	42.20	18.90
8	11590.00	47.3 AV	54.0	-6.7	1.30 H	226	28.40	18.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	117.6 PK			1.46 V	359	76.90	40.70
2	*5795.00	107.8 AV			1.46 V	359	67.10	40.70
3	#5850.00	69.4 PK	78.2	-8.8	1.57 V	1	62.40	7.00
4	#5853.00	69.6 PK	78.2	-8.6	1.57 V	1	62.50	7.10
5	#5861.00	65.1 PK	74.0	-8.9	1.57 V	359	58.00	7.10
6	#5861.00	52.1 AV	54.0	-1.9	1.57 V	359	45.00	7.10
7	11590.00	61.6 PK	74.0	-12.4	1.26 V	75	42.70	18.90
8	11590.00	47.7 AV	54.0	-6.3	1.26 V	75	28.80	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	1.05 H	348	61.30	6.40
2	5150.00	52.4 AV	54.0	-1.6	1.05 H	348	46.00	6.40
3	*5210.00	106.1 PK			1.15 H	356	66.10	40.00
4	*5210.00	99.4 AV			1.15 H	356	59.40	40.00
5	5350.00	48.7 PK	74.0	-25.3	1.08 H	143	42.30	6.40
6	5350.00	35.5 AV	54.0	-18.5	1.08 H	143	29.10	6.40
7	#10420.00	60.8 PK	74.0	-13.2	1.15 H	173	41.90	18.90
8	#10420.00	47.2 AV	54.0	-6.8	1.15 H	173	28.30	18.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.2 PK	74.0	-4.8	1.04 V	6	62.80	6.40
2	5150.00	53.0 AV	54.0	-1.0	1.04 V	6	46.60	6.40
3	*5210.00	107.6 PK			1.16 V	12	67.60	40.00
4	*5210.00	100.3 AV			1.16 V	12	60.30	40.00
5	5350.00	58.9 PK	74.0	-15.1	1.04 V	350	52.50	6.40
6	5350.00	47.2 AV	54.0	-6.8	1.04 V	350	40.80	6.40
7	#10420.00	61.2 PK	74.0	-12.8	1.00 V	165	42.30	18.90
8	#10420.00	48.0 AV	54.0	-6.0	1.00 V	165	29.10	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	68.9 PK	74.0	-5.1	1.26 H	172	61.90	7.00
2	#5714.00	53.0 AV	54.0	-1.0	1.26 H	172	46.00	7.00
3	#5722.00	75.8 PK	78.2	-2.4	1.26 H	12	68.80	7.00
4	#5725.00	75.1 PK	78.2	-3.1	1.26 H	12	68.00	7.10
5	*5775.00	105.2 PK			1.26 H	6	64.50	40.70
6	*5775.00	95.5 AV			1.26 H	6	54.80	40.70
7	#5850.00	60.8 PK	78.2	-17.4	1.35 H	356	53.80	7.00
8	#5853.00	59.8 PK	78.2	-18.4	1.35 H	356	52.70	7.10
9	#5861.00	59.2 PK	74.0	-14.8	1.24 H	333	52.10	7.10
10	#5861.00	48.0 AV	54.0	-6.0	1.24 H	333	40.90	7.10
11	11550.00	60.0 PK	74.0	-14.0	1.24 H	345	41.30	18.70
12	11550.00	46.8 AV	54.0	-7.2	1.24 H	345	28.10	18.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.00	71.4 PK	74.0	-2.6	1.35 V	3	64.40	7.00
2	#5714.00	52.9 AV	54.0	-1.1	1.35 V	3	45.90	7.00
3	#5722.00	76.1 PK	78.2	-2.1	1.36 V	0	69.10	7.00
4	#5725.00	75.7 PK	78.2	-2.5	1.36 V	0	68.60	7.10
5	*5775.00	108.4 PK			1.48 V	2	67.70	40.70
6	*5775.00	97.6 AV			1.48 V	2	56.90	40.70
7	#5850.00	64.2 PK	78.2	-14.0	1.34 V	170	57.20	7.00
8	#5853.00	64.7 PK	78.2	-13.5	1.34 V	170	57.60	7.10
9	#5861.00	61.7 PK	74.0	-12.3	1.34 V	169	54.60	7.10
10	#5861.00	47.4 AV	54.0	-6.6	1.34 V	169	40.30	7.10
11	11550.00	61.0 PK	74.0	-13.0	1.40 V	90	42.30	18.70
12	11550.00	47.5 AV	54.0	-6.5	1.40 V	90	28.80	18.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

BELOW 1GHz WORST-CASE DATA: 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	39.0 QP	40.0	-1.0	2.00 H	222	54.60	-15.60
2	57.12	34.3 QP	40.0	-5.7	2.00 H	77	48.80	-14.50
3	201.00	33.4 QP	43.5	-10.1	1.50 H	294	49.90	-16.50
4	249.60	35.4 QP	46.0	-10.6	1.01 H	17	49.50	-14.10
5	599.58	30.1 QP	46.0	-15.9	1.50 H	191	36.00	-5.90
6	900.94	35.3 QP	46.0	-10.7	1.50 H	5	35.30	0.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.28	38.2 QP	40.0	-1.8	1.00 V	334	52.70	-14.50
2	68.51	36.7 QP	40.0	-3.3	1.00 V	255	52.60	-15.90
3	156.28	32.1 QP	43.5	-11.4	1.00 V	38	45.70	-13.60
4	300.16	32.2 QP	46.0	-13.8	1.50 V	98	44.20	-12.00
5	599.58	31.2 QP	46.0	-14.8	1.00 V	5	37.10	-5.90
6	743.45	35.6 QP	46.0	-10.4	1.50 V	13	38.60	-3.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Apr. 24, 2014	Apr. 23, 2015
RF signal cable Woken	5D-FB	Cable-HYCO2-0 1	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 23, 2013	Dec. 22, 2014
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 10, 2014	Jul. 09, 2015
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA
Software ADT	ADT_Cond_ V7.3.7	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

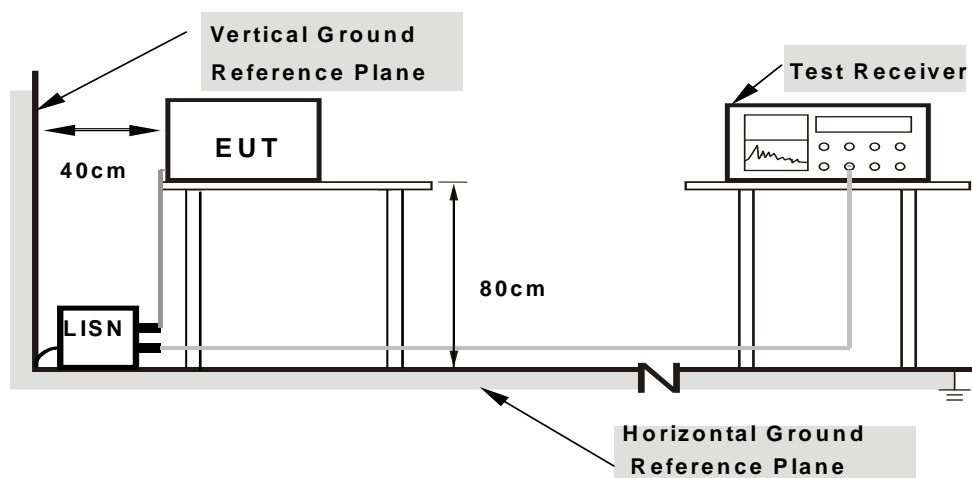

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.7.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11a

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16300	0.22	41.19	33.92	41.41	34.14	65.31	55.31	-23.90	-21.17
2	0.20604	0.24	35.66	28.65	35.90	28.89	63.36	53.36	-27.46	-24.47
3	0.49103	0.23	33.53	26.18	33.76	26.41	56.15	46.15	-22.39	-19.74
4	0.96641	0.30	28.76	17.86	29.06	18.16	56.00	46.00	-26.94	-27.84
5	1.38927	0.33	30.27	25.93	30.60	26.26	56.00	46.00	-25.40	-19.74
6	2.50000	0.39	28.78	24.54	29.17	24.93	56.00	46.00	-26.83	-21.07

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

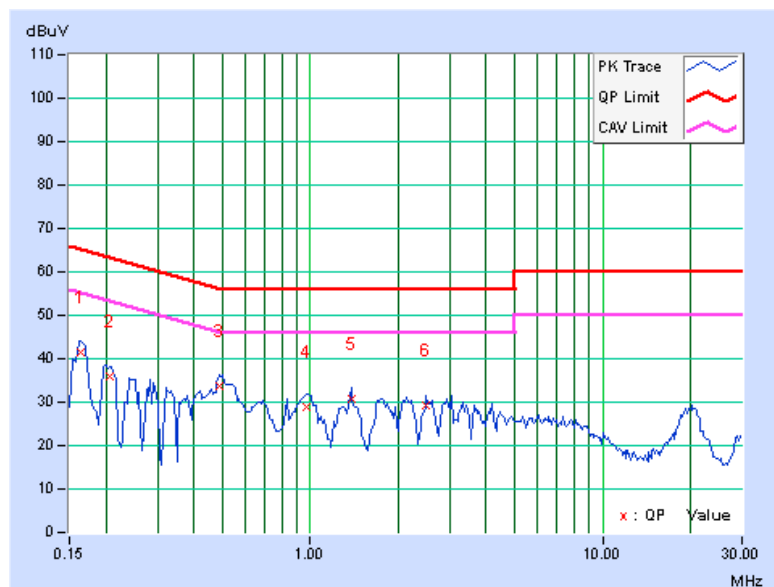


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.23	41.01	32.45	41.24	32.68	65.38	55.38	-24.14	-22.70
2	0.20322	0.24	35.37	27.21	35.61	27.45	63.48	53.48	-27.87	-26.03
3	0.49953	0.30	32.21	22.52	32.51	22.82	56.01	46.01	-23.50	-23.19
4	0.98984	0.29	27.50	20.33	27.79	20.62	56.00	46.00	-28.21	-25.38
5	1.39208	0.33	30.44	25.47	30.77	25.80	56.00	46.00	-25.23	-20.20
6	2.53125	0.42	25.26	17.41	25.68	17.83	56.00	46.00	-30.32	-28.17

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

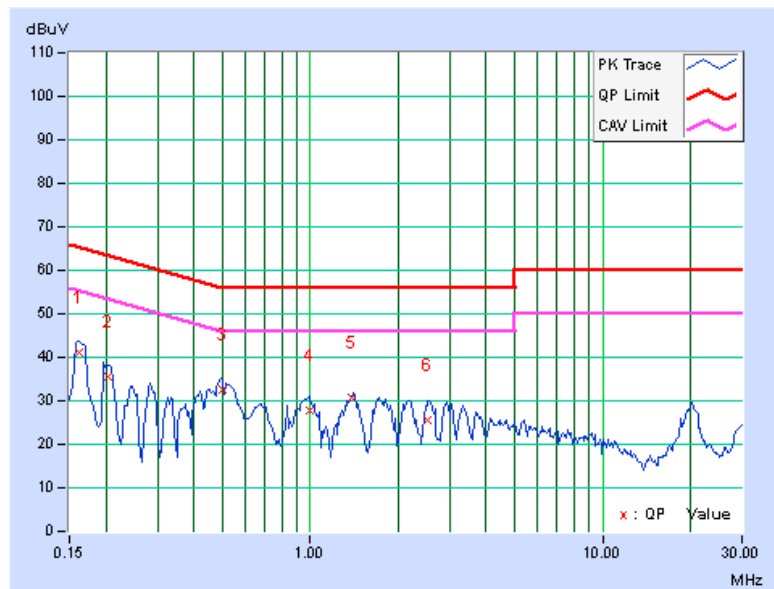

4.3 TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1	√	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p ≤ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A		---	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C		---	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√	---	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.3.2 TEST SETUP

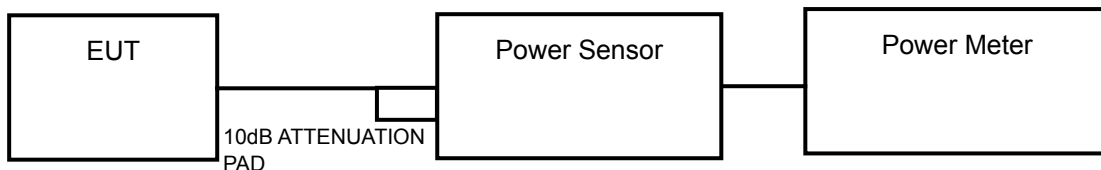

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (80MHz)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW \geq 3 MHz
- 5) Number of points in sweep \geq 2 Span / RBW.
- 6) Sweep time \leq (number of points in sweep) * T
- 7) Detector = RMS.
- 8) Trace mode = max hold.
- 9) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

POWER OUTPUT:

For U-NII-1 Band (Outdoor Access Point)

802.11a

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	GAIN (dBi)	EIRP (dBm)	EIRP LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2							
36	5180	5.50	5.40	5.01	10.185	10.08	30	10.32	20.40	21	PASS
40	5200	5.70	5.60	4.80	10.366	10.16	30	10.32	20.48	21	PASS
48	5240	5.70	5.50	4.80	10.283	10.12	30	10.32	20.44	21	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 10.32\text{dBi}$.

802.11n (20MHz)

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	GAIN (dBi)	EIRP (dBm)	EIRP LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2							
36	5180	5.70	5.80	4.80	10.537	10.23	30	10.32	20.55	21	PASS
40	5200	5.60	5.50	4.70	10.130	10.06	30	10.32	20.38	21	PASS
48	5240	5.70	5.60	4.80	10.366	10.16	30	10.32	20.48	21	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 10.32\text{dBi}$.

802.11n (40MHz)

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	GAIN (dBi)	EIRP (dBm)	EIRP LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2							
38	5190	5.80	5.70	4.60	10.401	10.17	30	10.32	20.49	21	PASS
46	5230	5.60	5.58	4.40	9.999	10.00	30	10.32	20.32	21	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 10.32\text{dBi}$.

802.11ac (80MHz)

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	GAIN (dBi)	EIRP (dBm)	EIRP LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2							
42	5210	5.90	5.80	4.90	10.782	10.33	30	10.32	20.65	21	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 10.32\text{dBi}$.



For U-NII-3 Band

802.11a

CHAN.	CHAN. FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	15.40	15.26	14.75	98.102	19.92	30	PASS
157	5785	22.93	22.87	21.00	515.871	27.13	30	PASS
165	5825	16.66	16.72	14.67	122.643	20.89	30	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	16.15	15.96	15.68	117.639	20.71	30	PASS
157	5785	22.32	22.70	21.17	487.735	26.88	30	PASS
165	5825	16.04	15.91	14.71	108.753	20.36	30	PASS

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
151	5755	12.51	12.63	11.67	50.836	17.06	30	PASS
159	5795	16.22	16.41	14.86	116.251	20.65	30	PASS

802.11ac (80MHz)

CHAN.	CHAN. FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
155	5775	9.91	9.57	8.71	26.282	14.20	30	PASS

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1	√	Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A		---	11dBm/ MHz
U-NII-2C		---	11dBm/ MHz
U-NII-3	√	---	30dBm/ 500 kHz

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

For U-NII-1 band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 kHz, Set VBW ≥ 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 500 kHz, Set VBW \geq 3 RBW, Detector = RMS
- 3) Sweep time = auto, trigger set to “free run”.
- 4) Trace average at least 100 traces in power averaging mode.
- 5) Record the max value and add $10 \log (1/\text{duty cycle})$
- 6) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where
$$\text{BWCF} = 10\log(500 \text{ kHz}/300\text{kHz})$$

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.

4.4.7 TEST RESULTS

For U-NII-1 band

802.11a

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2					
36	5180	-9.30	-7.96	-8.69	-3.84	0.26	-3.58	12.68	PASS
40	5200	-8.00	-7.52	-8.69	-3.27	0.26	-3.01	12.68	PASS
48	5240	-7.67	-8.03	-9.24	-3.49	0.26	-3.23	12.68	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 10.32 > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (10.32 - 6) = 12.68\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2					
36	5180	-8.63	-8.92	-9.87	-4.34	0.47	-3.87	12.68	PASS
40	5200	-8.50	-8.91	-9.81	-4.27	0.47	-3.80	12.68	PASS
48	5240	-8.57	-8.64	-10.15	-4.29	0.47	-3.82	12.68	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 10.32 > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (10.32 - 6) = 12.68\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.



802.11n (40MHz)





CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2					
38	5190	-12.00	-11.69	-13.16	-7.47	0.63	-6.84	12.68	PASS
46	5230	-11.72	-12.11	-13.12	-7.51	0.63	-6.88	12.68	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3]$ = 10.32 > 6dBi, so the power density limit shall be reduced to 17-(10.32-6) = 12.68dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (80MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2					
42	5210	-15.39	-15.57	-16.69	-11.08	1.02	-10.06	12.68	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3]$ = 10.32 > 6dBi, so the power density limit shall be reduced to 17-(10.32-6) = 12.68dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

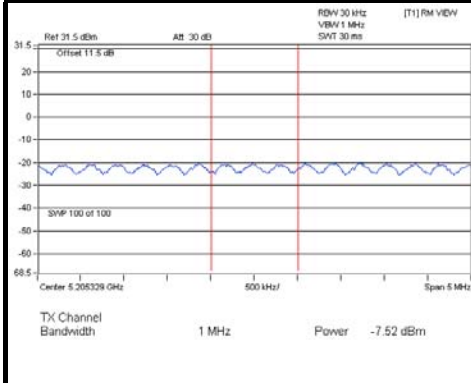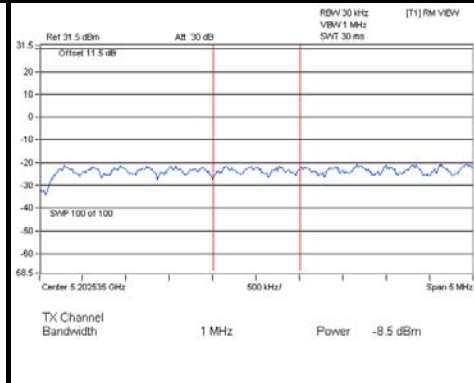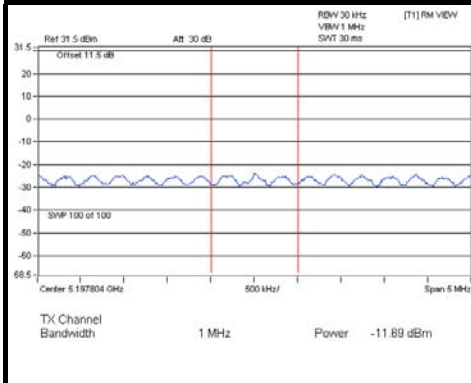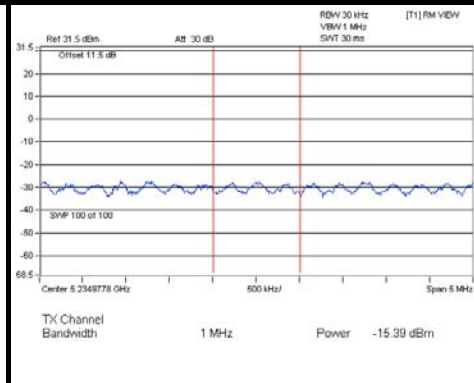SPECTRUM PLOT OF WORST VALUE**802.11a****802.11n (20MHz)****802.11n (40MHz)****802.11ac (80MHz)**

**For U-NII-3 band
802.11a**

TX chain	Channel	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=3) dB	Duty Factor	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	PASS /FAIL
0	149	5745	-0.56	1.66	4.77	0.21	6.64	26.17	PASS
	157	5785	6.24	8.46	4.77	0.21	13.44	26.17	PASS
	165	5825	-0.44	1.78	4.77	0.21	6.76	26.17	PASS
1	149	5745	-0.95	1.27	4.77	0.21	6.25	26.17	PASS
	157	5785	5.43	7.65	4.77	0.21	12.63	26.17	PASS
	165	5825	-0.49	1.73	4.77	0.21	6.71	26.17	PASS
2	149	5745	-0.61	1.61	4.77	0.21	6.59	26.17	PASS
	157	5785	5.18	7.40	4.77	0.21	12.38	26.17	PASS
	165	5825	-1.24	0.98	4.77	0.21	5.96	26.17	PASS

NOTE: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 9.83 > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (9.83 - 6) = 26.17\text{dBm}$.
2. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=3) dB	Duty Factor	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	PASS /FAIL
0	149	5745	-0.67	1.55	4.77	0.39	6.71	26.17	PASS
	157	5785	5.91	8.13	4.77	0.39	13.29	26.17	PASS
	165	5825	-0.95	1.27	4.77	0.39	6.43	26.17	PASS
1	149	5745	-1.16	1.06	4.77	0.39	6.22	26.17	PASS
	157	5785	5.10	7.32	4.77	0.39	12.48	26.17	PASS
	165	5825	-0.98	1.24	4.77	0.39	6.40	26.17	PASS
2	149	5745	-0.90	1.32	4.77	0.39	6.48	26.17	PASS
	157	5785	4.87	7.09	4.77	0.39	12.25	26.17	PASS
	165	5825	-2.03	0.19	4.77	0.39	5.35	26.17	PASS

NOTE: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 9.83 > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (9.83 - 6) = 26.17\text{dBm}$.
2. Refer to section 3.3 for duty cycle spectrum plot.



802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=3) dB	Duty Factor	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	PASS /FAIL
0	151	5755	-7.18	-4.96	4.77	0.22	0.03	26.17	PASS
	159	5795	-3.42	-1.20	4.77	0.22	3.79	26.17	PASS
1	151	5755	-7.33	-5.11	4.77	0.22	-0.12	26.17	PASS
	159	5795	-3.74	-1.52	4.77	0.22	3.47	26.17	PASS
2	151	5755	-6.95	-4.73	4.77	0.22	0.26	26.17	PASS
	159	5795	-4.14	-1.92	4.77	0.22	3.07	26.17	PASS

NOTE: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 9.83 > 6\text{dBi}$, so the power density limit shall be reduced to $30-(9.83-6) = 26.17\text{dBm}$.
 2. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (80MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=3) dB	Duty Factor	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	PASS /FAIL
0	155	5775	-10.82	-8.60	4.77	0.63	-3.20	26.17	PASS
1	155	5775	-10.76	-8.54	4.77	0.63	-3.14	26.17	PASS
2	155	5775	-10.82	-8.60	4.77	0.63	-3.20	26.17	PASS


NOTE: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/3] = 9.83 > 6\text{dBi}$, so the power density limit shall be reduced to $30-(9.83-6) = 26.17\text{dBm}$.
 2. Refer to section 3.3 for duty cycle spectrum plot.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

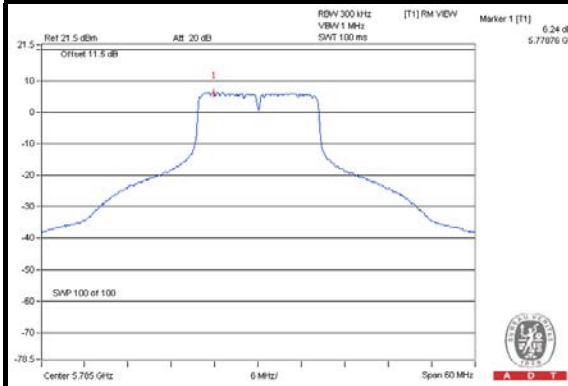


802.11n (20MHz)

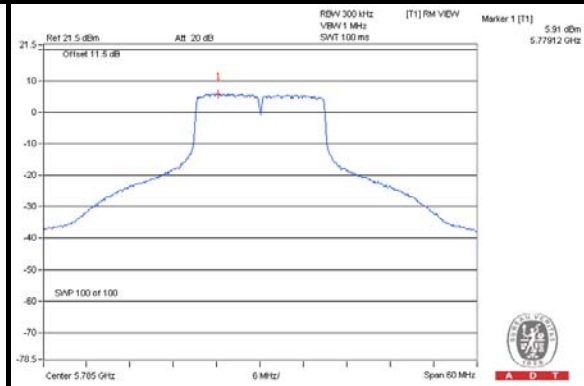

802.11n (40MHz)

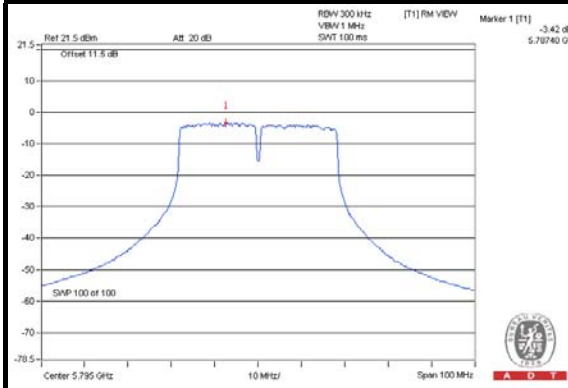

802.11ac (80MHz)

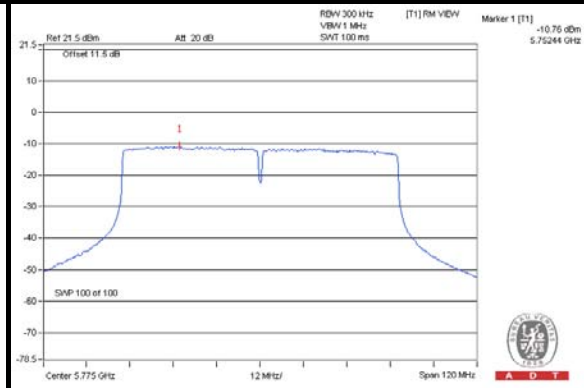


4.5 FREQUENCY STABILITY

4.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 TEST SETUP

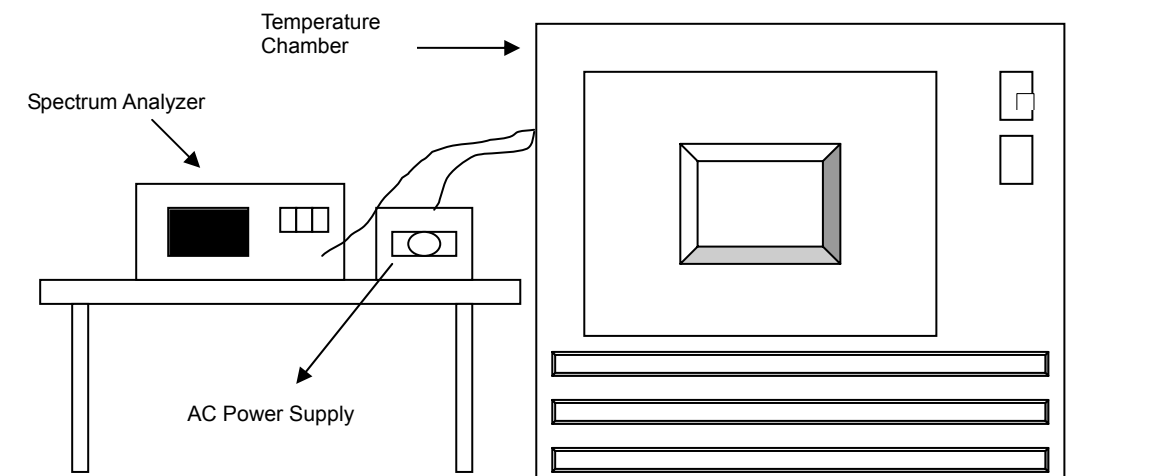

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



4.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5240.0143	0.00027	5240.0138	0.00026	5240.012	0.00023	5240.0154	0.00029
40	120	5239.9748	-0.00048	5239.9756	-0.00047	5239.9774	-0.00043	5239.9748	-0.00048
30	120	5239.9768	-0.00044	5239.9744	-0.00049	5239.9752	-0.00047	5239.9771	-0.00044
20	120	5240.01	0.00019	5240.0083	0.00016	5240.0078	0.00015	5240.0073	0.00014
10	120	5239.9902	-0.00019	5239.9883	-0.00022	5239.9882	-0.00023	5239.9886	-0.00022
0	120	5239.9898	-0.00019	5239.99	-0.00019	5239.9905	-0.00018	5239.9907	-0.00018
-10	120	5240.0082	0.00016	5240.0064	0.00012	5240.0074	0.00014	5240.0078	0.00015
-20	120	5239.9808	-0.00037	5239.9779	-0.00042	5239.9794	-0.00039	5239.9781	-0.00042
-30	120	5239.9806	-0.00037	5239.9841	-0.00030	5239.9835	-0.00031	5239.9806	-0.00037


FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5240.0101	0.00019	5240.0084	0.00016	5240.0082	0.00016	5240.0081	0.00015
	120	5240.01	0.00019	5240.0083	0.00016	5240.0078	0.00015	5240.0073	0.00014
	102	5240.0103	0.00020	5240.0091	0.00017	5240.0073	0.00014	5240.0076	0.00015

4.6 6dB BANDWIDTH MEASUREMENT

4.6.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.6.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	16.39	16.40	16.40	0.5	PASS
157	5785	16.39	16.40	16.39	0.5	PASS
165	5825	16.41	16.37	16.41	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	17.63	17.65	17.64	0.5	PASS
157	5785	17.59	17.63	17.63	0.5	PASS
165	5825	17.64	17.64	17.63	0.5	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
151	5755	36.45	36.45	36.18	0.5	PASS
159	5795	36.17	36.40	36.08	0.5	PASS

802.11ac (80MHz)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
155	5775	75.77	75.75	73.31	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

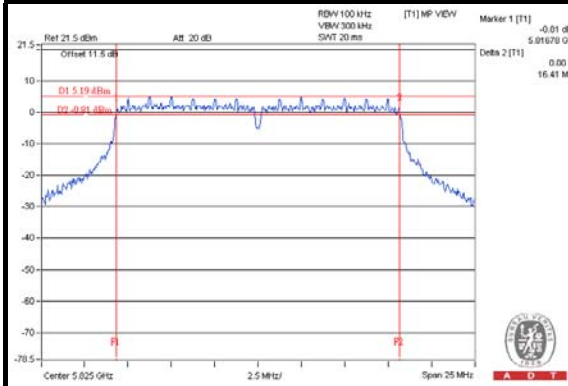


802.11n (20MHz)

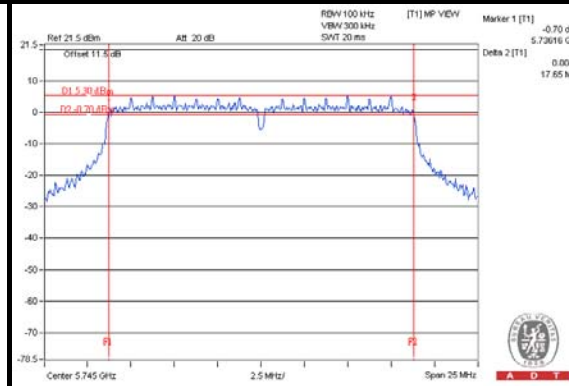

802.11n (40MHz)

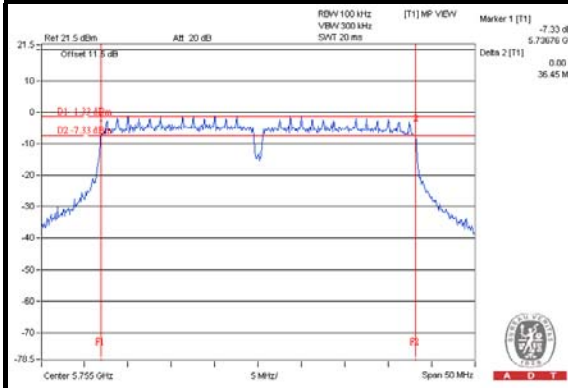

802.11ac (80MHz)

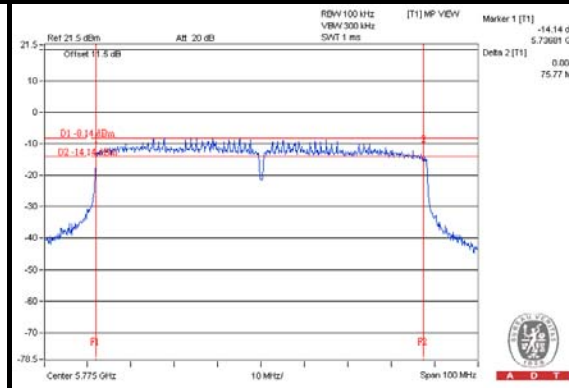

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---