



**CTS (NINGBO) TESTING SERVICE TECHNOLOGY
INTERNATIONAL**

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID TEST REPORT

TEST REPORT NUMBER : CGZ3121009-00801-E



CTS (Ningbo) Testing Service Technology Co., Ltd.
2/F., South Tower, Huoju Building, No.181, Canghai Road,
Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

TEST REPORT For FCC ID

47 CFR PART 15 OCT, 2011

Report Reference No. CGZ3121009-00801-E

Date of issue..... 12 October 2012

Testing Laboratory Name CENTRE OF TESTING SERVICE CO., LTD.

Address..... Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China.

Testing location/ procedure Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method

Applicant's name..... Del Ko Company

Address..... Room 1310, Block B, Golden Industrial Building, 16-26 Kwai Tak Street, Kwai Chung, N.T., H.K.

Test specification

Standard 47 CFR PART 15 OCT, 2011, ANSI C63.4-2009

Test Report Form No. CTSEMC-1.0

TRF Originator CENTRE OF TESTING SERVICE CO., LTD.

Master TRF..... Dated 2009-01

CENTRE OF TESTING SERVICE CO., LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the CENTRE OF TESTING SERVICE CO., LTD is acknowledged as copyright owner and source of the material. CENTRE OF TESTING SERVICE CO., LTD takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Bamboo Mouse

Trade Mark /

Manufacturer..... Del Ko Company

Model/Type reference..... DB1109/ 00T40100NAT

Ratings..... DC 5V by PC USB port

Result **PASSED**

Compiled by:



Kate zhang / Fileadministators

Supervised by:



Duke yang / Technique principal

Approved by:



Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

FCC ID -- T E S T R E P O R T

Test Report No. : CGZ3121009-00801-E

12 October. 2012
Date of issue

Type / Model..... DB1109/ 00T40100NAT

EUT..... Bamboo Mouse

Applicant..... Del Ko Company

Address..... Room 1310, Block B, Golden Industrial Building, 16-26 Kwai Tak Street, Kwai Chung, N.T., H.K.

Telephone..... +852-2127 7370

Fax..... +852-2127 7370

Contact..... Veronica Lau

Manufacturer..... Del Ko Company

Address..... Room 1310, Block B, Golden Industrial Building, 16-26 Kwai Tak Street, Kwai Chung, N.T., H.K.

Telephone..... +852-2127 7370

Fax..... +852-2127 7370

Contact..... Veronica Lau

Factory Del Ko Company

Address..... Room 1310, Block B, Golden Industrial Building, 16-26 Kwai Tak Street, Kwai Chung, N.T., H.K.

Telephone..... +852-2127 7370

Fax..... +852-2127 7370

Contact..... Veronica Lau

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. TEST STANDARDS.....	4
2. SUMMARY	4
2.1 GENERAL REMARKS.....	4
2.2 FINAL ASSESSMENT	4
3. EQUIPMENT UNDER TEST.....	5
3.1 POWER SUPPLY SYSTEM UTILISED	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
3.3 EUT OPERATION MODE	5
3.4 EUT CONFIGURATION	6
4. TEST ENVIRONMENT	7
4.1 ADDRESS OF THE TEST LABORATORY	7
4.2 TEST FACILITY	7
4.3 ENVIRONMENTAL CONDITIONS	7
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
4.6 MEASUREMENT UNCERTAINTY.....	8
5. Summary of standards and results	8
5.1.DESCRIPTION OF STANDARDS AND RESULTS	8
6. Power Line Conducted Emission Test	9
6.1.1 DESCRIPTION OF THE TEST LOCATION	9
6.1.2TEST EQUIPMENT.....	9
6.2.1 BLOCK DIAGRAM OF TEST SETUP	9
6.2.2 DESCRIPTION OF THE TEST SET-UP	9
6.2.3 LIMITS OF DISTURBANCE (CLASS B)	10
6.2.4 POWER LINE CONDUCTED EMISSION TEST RESULTS.....	10
7. Radiated disturbance (electric field)	13
7.1.TEST EQUIPMENT.....	13
7.2.BLOCK DIAGRAM OF TEST SETUP	13
7.3.RADIATED EMISSION LIMIT STANDARD: FCC 109 AND 209.....	14
7.4.TEST PROCEDURE	14
7.5.RADIATED EMISSION TEST RESULTS	15
8.Manufacturer/ Approval holder Declaration	20

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

1. TEST STANDARDS

The tests were performed according to following standards:

- **47 CFR PART 15 OCT, 2011**
- **ANSI C63.4-2009**

2. SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	09 October 2012
Testing commenced on	09~12 October 2012
Testing concluded on	12 October 2012

2.2 FINAL ASSESSMENT

The FCC requirements pertaining to the technical standards and tested operation modes are

- fulfilled.
- **not** fulfilled.

The equipment under test

- fulfils the FCC requirements cited on page 1.
- **does not** fulfil the FCC requirements cited on page 1.

3. EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : DC 5V by PC USB port
 Other

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1
Serial number: Prototype
EUT type: Mouse

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:
For Radiation emission:

-Normal

Operation mode 1: Normal

Note: EUT is the worst case, so only these test results be recorded in the test report.

3.4 EUT configuration

3.4.1. Description of configuration (EUT)

Description	:	Bamboo Mouse
Model Number	:	DB1109/ 00T40100NAT
Radio Technology	:	/
Modulation Technology	:	/
Antenna	:	/

3.4.2. Tested Supporting System Details

3.4.2.1. Monitor

M/N	:	E7722-f
S/N	:	CN-02W486-64180-3B7-01MP
Manufacturer	:	DELL
Power Cord	:	Unshielded, Detachable, 1.8m , 3Pin
FCC	:	By DoC

3.4.2.2. Personal Computer

M/N	:	DIMENSION 4600
S/N	:	CN-OTO486-42940-37M-00XB
Manufacturer	:	DELL
Power Cord	:	Unshielded, Detachable, 1.8m , 3Pin
FCC	:	By DoC

3.4.2.3. Keyboard

M/N	:	SK-8110
S/N	:	CN-07N244-71616-37T-B293
Manufacturer	:	DELL
Data Cable	:	Shielded, Detachable
FCC	:	By DoC

4. TEST ENVIRONMENT

4.1 Address of the test laboratory

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on June 6, 2011 .

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- - The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
Radiation emission (3m)	30MHz~300MHz	±3.14dB	(1)
	300MHz~1000MHz	±3.18dB	(1)

(1).This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. Summary of standards and results

5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Conducted Emission Test	ANSI C63.4-2009 FCC Part 15 B: 15.107	PASSED
Radiated Emission Test	ANSI C63.4-2009 FCC Part 15 B: 109	PASSED
N/A is an abbreviation for Not Applicable.		

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

6. Power Line Conducted Emission Test


6.1.1 Description of the test location

Test location : Shielding Room

6.1.2 Test Equipment

Conducted Disturbance					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2011/12
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2011/12
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2011/12
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2011/12
5	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2011/12

6.2.1 Block Diagram of Test Setup

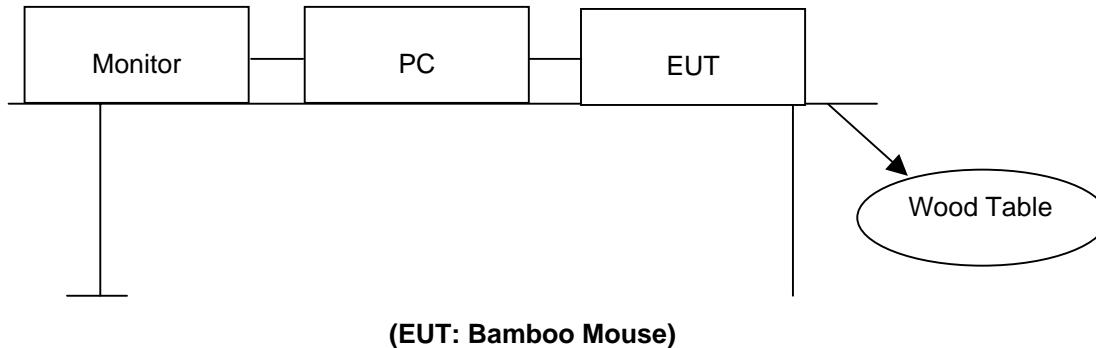


6.2.2 Description of the test set-up

6.1.2.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded.

6.1.2.2 Block Diagram of Test Setup

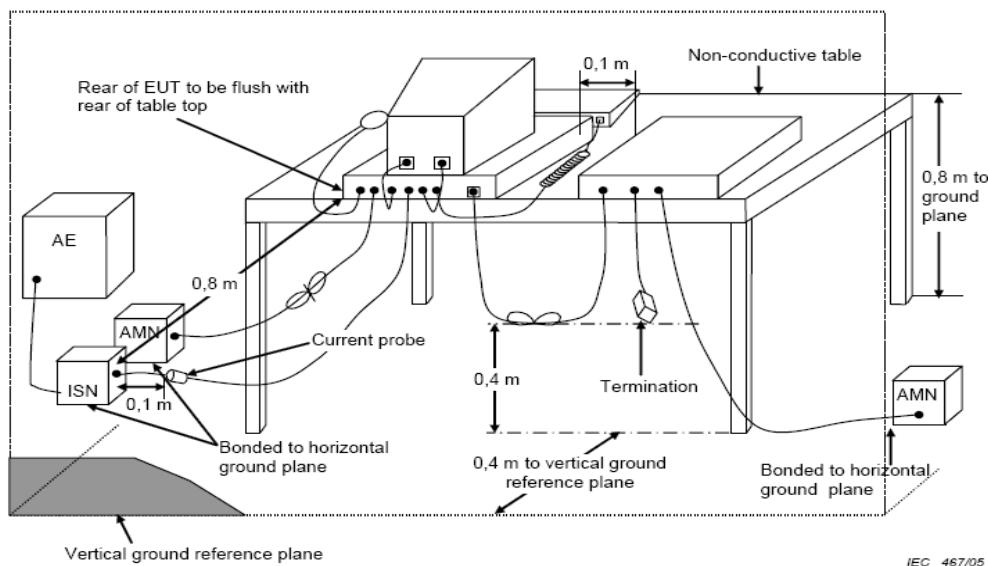

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

See Reverse For Terms And Conditions of Service.

6.2.3 Limits of disturbance (Class B)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Remarks: The limits are kept. For detailed results, please see the following page(s).

6.2.4 Power Line Conducted Emission Test Results

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Test model:	Normal	Result:	■ - passed
Test point:	L		□ - not passed
Frequency range:	0.15~30MHz		

EUT	Bamboo Mouse
Operating Condition	DC 5V BY PC USB PORT
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test Date:	11 October 2012
Operator	Duke
MODEL NO	DB1109/ 00T40100NAT

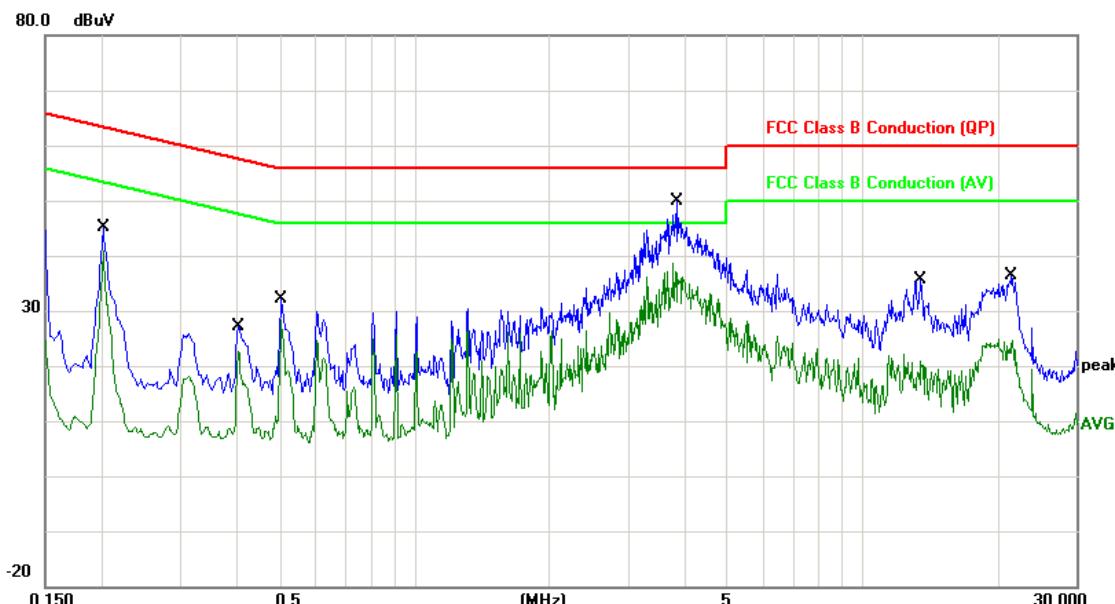

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2020	9.99	32.55	42.54	63.53	-20.99	QP
2	0.2020	9.99	27.44	37.43	53.53	-16.10	AVG
3	0.4060	10.00	14.84	24.84	57.73	-32.89	QP
4	0.4060	10.00	12.31	22.31	47.73	-25.42	AVG
5	0.5060	10.01	19.64	29.65	56.00	-26.35	QP
6	0.5060	10.01	18.28	28.29	46.00	-17.71	AVG
7	3.8660	10.07	34.85	44.92	56.00	-11.08	QP
8	3.8660	10.07	25.71	35.78	46.00	-10.22	AVG
9	13.5220	10.17	14.94	25.11	60.00	-34.89	QP
10	13.5220	10.17	6.47	16.64	50.00	-33.36	AVG
11	21.5180	10.32	18.55	28.87	60.00	-31.13	QP
12	21.5180	10.32	12.28	22.60	50.00	-27.40	AVG

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)


Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Test model:	Normal	Result:	■ - passed
Test point:	N		□ - not passed
Frequency range:	0.15~30MHz		

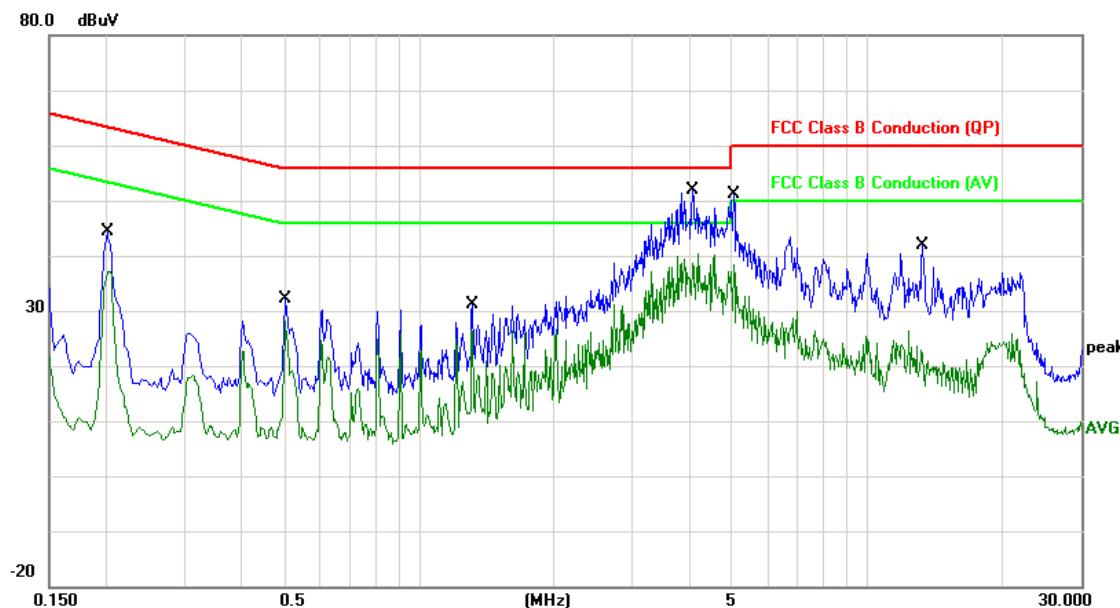

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2020	9.99	32.63	42.62	63.53	-20.91	QP
2	0.2020	9.99	27.53	37.52	53.53	-16.01	AVG
3	0.5060	10.01	19.64	29.65	56.00	-26.35	QP
4	0.5060	10.01	18.24	28.25	46.00	-17.75	AVG
5	1.3180	10.11	16.98	27.09	56.00	-28.91	QP
6	1.3180	10.11	15.83	25.94	46.00	-20.06	AVG
7	4.0900	10.08	35.50	45.58	56.00	-10.42	QP
8	4.0900	10.08	28.27	38.35	46.00	-7.65	AVG
9	5.0380	10.12	38.92	49.04	60.00	-10.96	QP
10	5.0380	10.12	27.34	37.46	50.00	-12.54	AVG
11	13.2980	10.17	24.01	34.18	60.00	-25.82	QP
12	13.2980	10.17	11.65	21.82	50.00	-28.18	AVG

Note:Level=Reading+Factor. Margin=Limit-Level.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huojie Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


7. Radiated disturbance (electric field)

7.1. Test Equipment

Radiated disturbance (electric field)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2011/12
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2011/12
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2011/12
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2011/12
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2011/12
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2011/12

7.2. Block Diagram of Test Setup

7.2.1 Block Diagram of connection between EUT and simulators

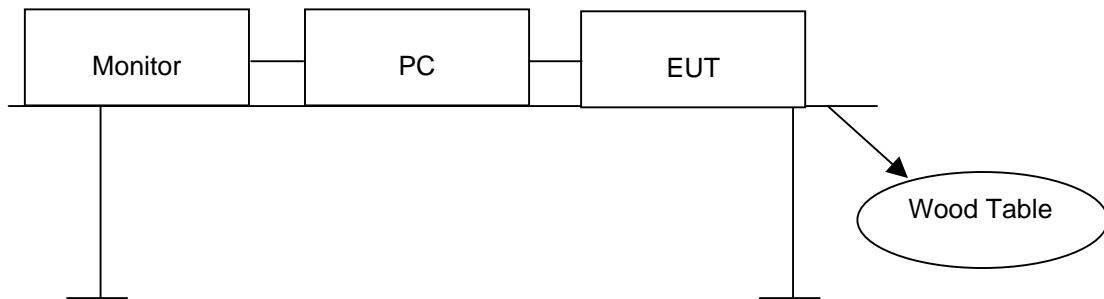

(EUT: Bamboo Mouse)

7.2.2 Anechoic Chamber Setup Diagram

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huojie Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

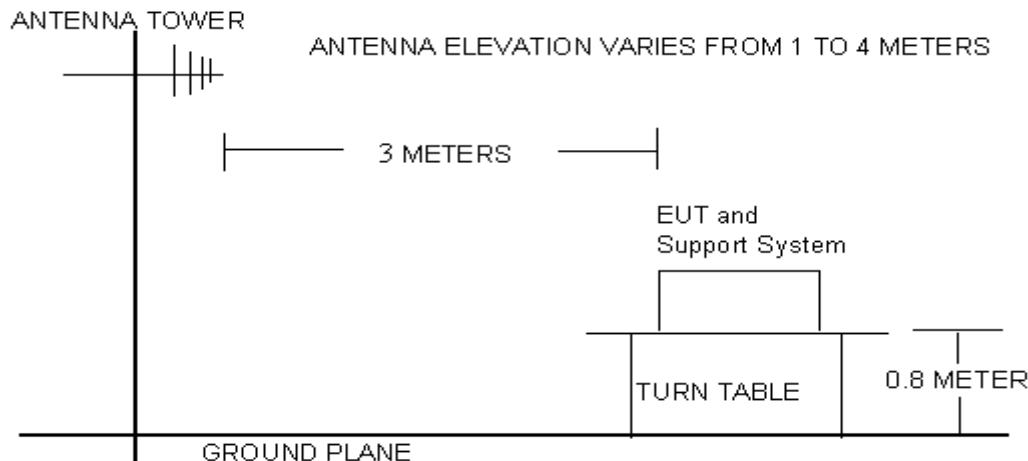

7.3.Radiated Emission Limit Standard: FCC 109 and 209

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(KHz)	-----
0.490 1.705	30	24000/F(KHz)	-----
1.705 30	3	----	49.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $dB\mu$ V = $20 \log$ Emission level μ V/m
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 1MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with 1MHz VBW above 1GHz, Pretest of EUT, final, select the worst case test and record the test results in the report.

The test modes is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

7.5.Radiated Emission Test Results

PASSED.

Test Model:	Normal	Result:	<input checked="" type="checkbox"/> - passed
Frequency range:	9KHz~30MHz		<input type="checkbox"/> - not passed

EUT	Bamboo Mouse
Operating Condition	DC 5V BY PC USB PORT
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test Date:	11 October 2012
Operator	Duke
MODEL NO	DB1109/ 00T40100NAT

No.	Frequency (MHz)	Factor (dB/m)	Reading (dB μ V/m)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.
1	2.8939	13.42	15.10	28.52	49.50	-20.98	QP
2	6.5000	13.98	12.29	26.27	49.50	-23.23	QP
3	9.6855	14.47	10.57	25.04	49.50	-24.46	QP
4	17.5588	13.95	16.41	30.36	49.50	-19.14	QP
5	22.0064	13.84	15.68	29.52	49.50	-19.98	QP
6	27.8964	14.04	23.73	37.77	49.50	-11.73	QP

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Test Model:	Normal	Result:	<input checked="" type="checkbox"/> - passed
Test point:	Horizontal		<input type="checkbox"/> - not passed
Frequency range:	30MHz-26.5GHz		

EUT	Bamboo Mouse
Operating Condition	DC 5V BY PC USB PORT
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test Date:	11 October 2012
Operator	Duke
MODEL NO	DB1109/ 00T40100NAT

Below 1GHz

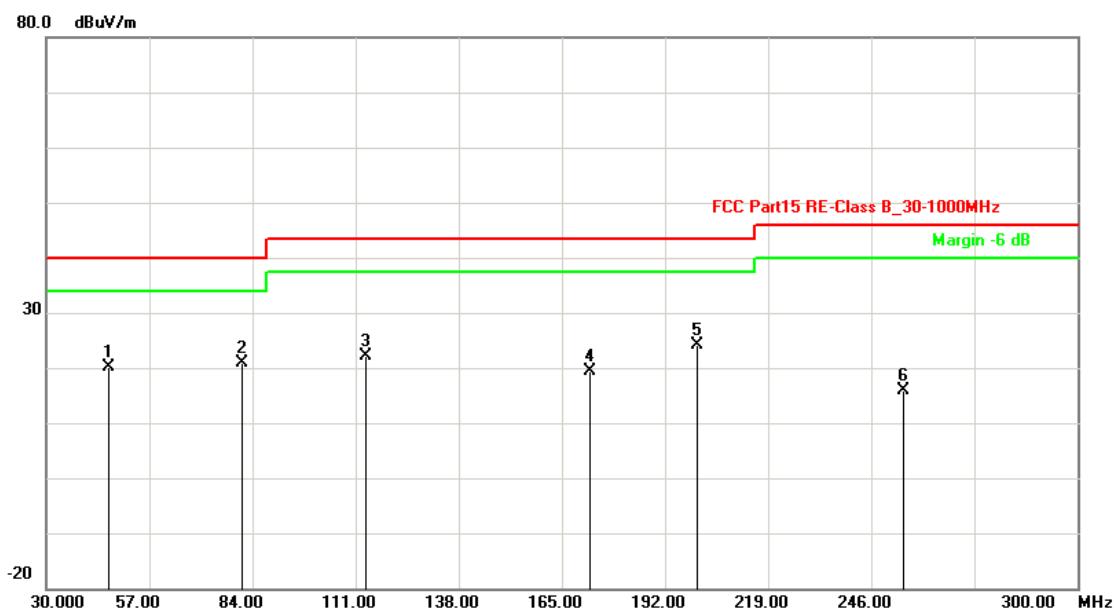

No.	Frequency (MHz)	Factor (dB/m)	Reading (dB μ V/m)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.
1	46.2325	-24.92	45.05	20.13	40.00	-19.87	QP
2	81.4028	-19.73	40.56	20.83	40.00	-19.17	QP
3	113.8677	-17.78	39.99	22.21	43.50	-21.29	QP
4	172.3046	-15.23	34.56	19.33	43.50	-24.17	QP
5	200.4409	-11.27	35.34	24.07	43.50	-19.43	QP
6	254.5491	-12.35	28.12	15.77	46.00	-30.23	QP

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

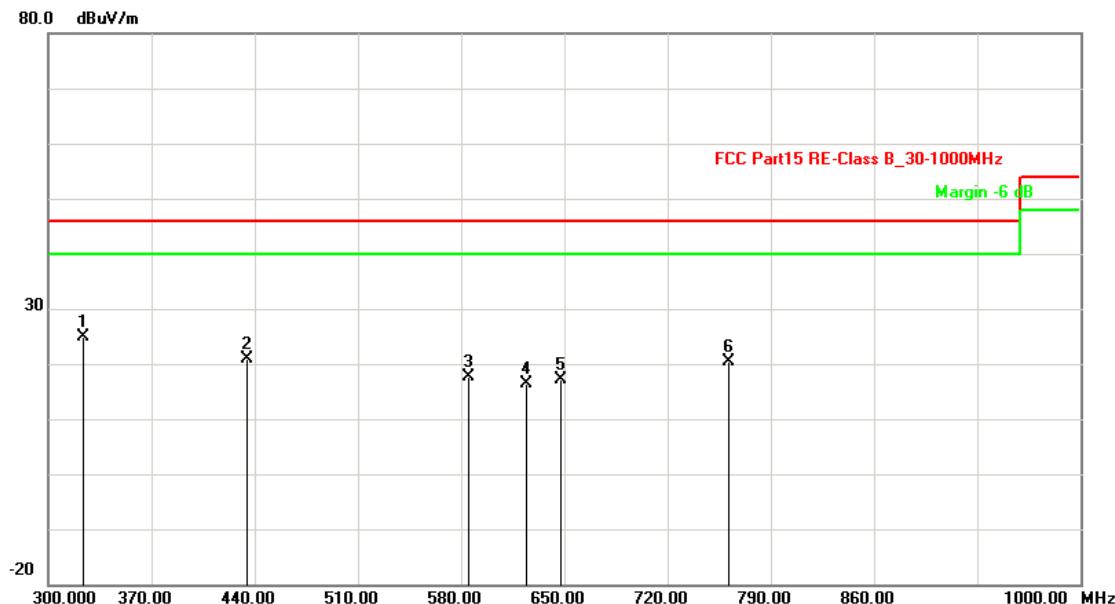

No.	Frequency (MHz)	Factor (dB/m)	Reading (dB μ V/m)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.
1	323.8477	-9.46	34.34	24.88	46.00	-21.12	QP
2	434.6693	-14.08	34.91	20.83	46.00	-25.17	QP
3	584.7695	-13.03	30.58	17.55	46.00	-28.45	QP
4	624.0481	-11.64	28.00	16.36	46.00	-29.64	QP
5	647.8958	-11.68	28.75	17.07	46.00	-28.93	QP
6	761.5230	-7.17	27.58	20.41	46.00	-25.59	QP

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huojie Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Test Model:	Normal	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	30MHz-26.5GHz		

EUT	Bamboo Mouse
Operating Condition	BATTERY 1.5V*2
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test Date:	11 October 2012
Operator	Duke
MODEL NO	DB1109/ 00T40100NAT

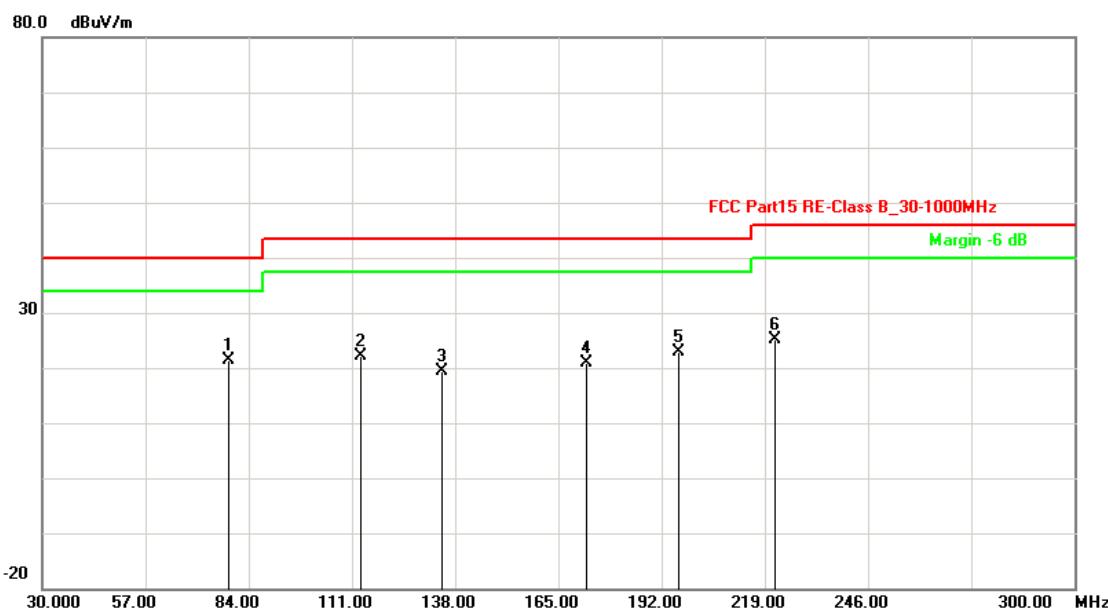

No.	Frequency (MHz)	Factor (dB/m)	Reading (dB μ V/m)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.
1	78.6974	-19.76	41.10	21.34	40.00	-18.66	QP
2	113.3267	-17.86	39.96	22.10	43.50	-21.40	QP
3	134.4289	-15.31	34.58	19.27	43.50	-24.23	QP
4	172.3046	-15.23	36.13	20.90	43.50	-22.60	QP
5	196.6533	-11.26	34.02	22.76	43.50	-20.74	QP
6	221.5431	-11.49	36.62	25.13	46.00	-20.87	QP

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

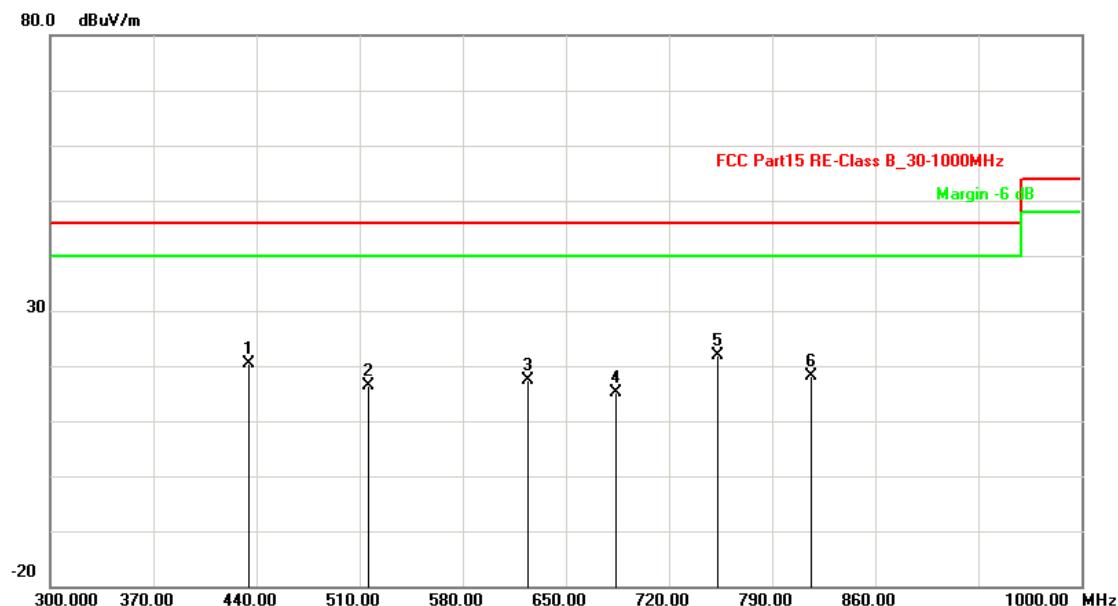

No.	Frequency (MHz)	Factor (dB/m)	Reading (dB μ V/m)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.
1	434.6693	-14.08	34.47	20.39	46.00	-25.61	QP
2	516.0321	-12.43	28.85	16.42	46.00	-29.58	QP
3	624.0481	-11.64	29.11	17.47	46.00	-28.53	QP
4	684.3687	-13.56	28.75	15.19	46.00	-30.81	QP
5	753.1062	-6.57	28.39	21.82	46.00	-24.18	QP
6	816.2325	-10.06	28.10	18.04	46.00	-27.96	QP

Note:Level=Reading+Factor. Margin= Level- Limit.

Note:Level=Reading+Factor.

Remark: Others frequency Radiated Emission level margin all >10dB of Limit.

8. Manufacturer/ Approval holder Declaration

The following identical model(s):

N/A

Belong to the tested device:

Product description: **Bamboo Mouse**

Model name: **DB1109/ 00T40100NAT**

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CTS (Ningbo) Testing Service Technology Co., Ltd.

2/F., South Tower, Huoju Building, No.181, Canghai Road, Jiangdong Science and Technology Park, Ningbo, Zhejiang, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service