



Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



Test Type: Emissions

Product Type: *Wireless Earbud*

Product Name/Number: *Model 408L*

FCC ID: *A94408L*
IC: *3232A-408L*

Prepared For: *Product Assurance Engineering Department,
Bose Corporation*

Name of manufacturing agency applying for equipment type approval Bose Corporation

Postal Address of manufacturing Agency The Mountain Framingham MA 01701 USA

Test Results: Pass

Applicable Standards: *FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5*

Report Number: *EMC.441408.23.167.1*

General Comments/Special Test Conditions:

This report relates only to the items tested. This report covers EMC marking requirements for *Enter product and any special modifications or test conditions.*

	Print Name	Signature	Date
Prepared By:	Bryan Cerqua	<i>Bryan H Cerqua</i>	8/14/2023
Electrical Engineer Review* By:	Kenneth Lee	<i>Kenneth Lee</i>	8/15/2023

* Since every test result is separately reviewed after its completion, the electrical engineer review indicated above represents a higher-level review to ensure this report lists and contains all applicable and appropriate requirements. If the report carries the "accredited" logo, the reviewer must verify all the tests in this report are covered under the current ISO17025 accreditation. The A2LA-accredited logo must be removed if any of the tests in the report are not performed under the current scope of accreditation. It is the responsibility of the reviewer to ensure the A2LA advertising policy is followed.



PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



Table of Contents

Tests Performed (Table of Contents):

Test Report Summary 3

Test Results Summary 4

Environmental Conditions 4

FCC Test Site Accreditation: 4

Canadian Test Site Registration: 4

RF Conducted Measurements 5

 On Time and Duty Cycle 5

 99% Occupied Bandwidth 8

 20dB Occupied Bandwidth 11

 Hopping Frequency Separation 14

 Number of Hopping Channels 16

 Average Time of Occupancy 18

 Output Power 21

Conducted Spurious Emissions 24

RF Radiated Emissions 30MHz -1GHz 27

Radiated Spurious Emissions 1-25GHz 33

Radiated Band Edge 42



Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



Test Report Summary

Product Information:

Description

Truly Wireless In Ear (TWIE) earbud. The bud uses Bluetooth classic (BT) Bluetooth Low Energy (BLE), and Qualcomm High Speed (QHS). The QHS is used for bud-to-bud communications. The role of master/puppet can be changed to best meet radio link conditions during operation. The unit is not supplied with an AC to USB adapter. The antenna is an inverted F with a maximum gain of 0.58 dBi (Left Earbud) and 0.86 dBi (Right Earbud) formed by Laser Direct Sequence on the inside of the top cover of the earbud.

EUT Condition

Product was as built in the factory. And for the conducted measurements the antenna was removed, and coaxial cable was installed in its place. Where necessary USB debug wires were added to allow control of the Radio.

Scope:

This report covers EMC requirements. *FCC or ISED, FHSS low power transceiver.*

Test Objective:

Verify product meets all applicable EMC requirements.

Results:

Product complies with all applicable EMC requirements. All final results represent worst-case emissions and/or immunity.

Conclusions:

The device under test (D.U.T.):

[X] meets all test standards on page 1 of this report.



**PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT**



Test Results Summary

TEST NAME	TEST RESULT PASS or N/A	COMMENT(S)
On Time and Duty Cycle	N/A	
99% Occupied Bandwidth	N/A	
20dB Occupied Bandwidth	Pass	
Hopping Frequency Separation	Pass	
Number of Hopping Channels	Pass	
Average Time of Occupancy	Pass	
Output Power	Pass	
Conducted Spurious Emissions	Pass	
RF Conducted Emissions – AC Mains	Pass	
RF Radiated Emissions 30MHz -1GHz	Pass	
Radiated RF Emissions 1-25GHz	Pass	
Radiated Band Edge	Pass	

Environmental Conditions

Ambient:
 Temperature: 22±4°C
 Humidity: 30-60%RH
 Mains Voltage: 120VAC, 5VDC USB

FCC Test Site Accreditation:

Firm Name	Location	Expiration Date	Accreditation	MRA	Designation Number	Contact	Contact Title	Address	PO Box	Mail Stop	City	State	Zip Code	Country	Email	Phone	Fax
Bose Corporation	1 New York Avenue, Framingham, MA	07/31/2024	American Association for Laboratory Accreditation	N/A	US1088	Mr. Cable Best	Quality Manager	Mail Stop 450 The Mountain	N/A	450	Framingham	Massachusetts	01701	United States	Cable_Best@bose.com	1 508 766 6137	508 766 1145

Canadian Test Site Registration:

<p align="center">BOSE CORPORATION</p> <p align="center">1 New York Avenue Framingham, MA 01701 UNITED STATES</p> <p align="center">Company Number: 3232A</p> <p align="center">Contact: Mario Espinal mario_espinal@bose.com</p>	<p align="center">US0210</p>	<p align="center">RSS-GEN (2019-02-11)</p> <p align="center">RSS-210 (2019-02-11) RSS-247 (2019-02-11) RSS-248 (2021-11-19)</p>	<p align="center">RECOGNIZED UNTIL: 2024-07-31</p> <p align="center">A2LA ISO/IEC 17025:2017 Expires: 2024-07-31</p>
--	------------------------------	---	---



Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



RF Conducted Measurements

On Time and Duty Cycle

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	May 12, 2023		
Requirements Standard(s):		Referenced Standard(s):	ANSI C62.10:2013-11.6-b		
EUT powered with:	5V USB	Temp / Humidity:	n/a	Test location:	Braun Room
Test equipment used TN's:	2409				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	Product was tested as built except the antenna was disconnected and a coaxial cable was installed.				

Conclusion:

This test is for information only.

Limits:

None; for reporting purposes only.

Procedure:

ANSI C63.10, Section 11.6: Zero-Span Spectrum Analyzer Method.

Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date
2409	Signal and Spectrum Analyzer	FSV40	101413	Rohde & Schwarz	22-Mar-2023	21-Mar-2024



Certificate # 1514.1


PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



Data Collection:

Duty cycles shown in the table below represent maximum duty cycle in test mode using maximum packet length.

Mode	ON Time (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	1/Ton (Hz)
Bluetooth DH5	2.887	3.755	.77	77	346.4
Bluetooth 3DH5	2.887	3.755	.77	77	346.4

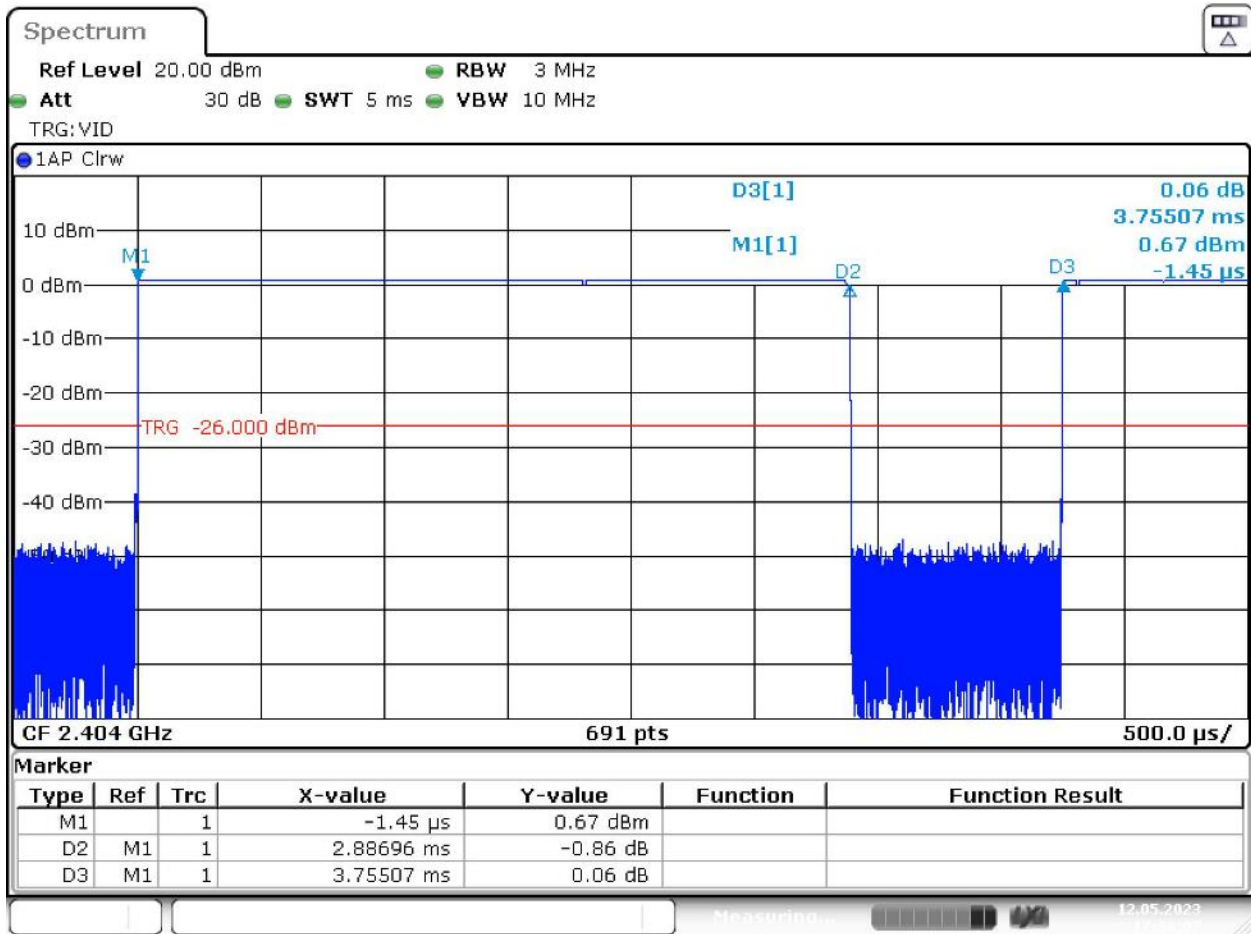



Date: 12.MAY.2023 17:36:07

DH5




Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT

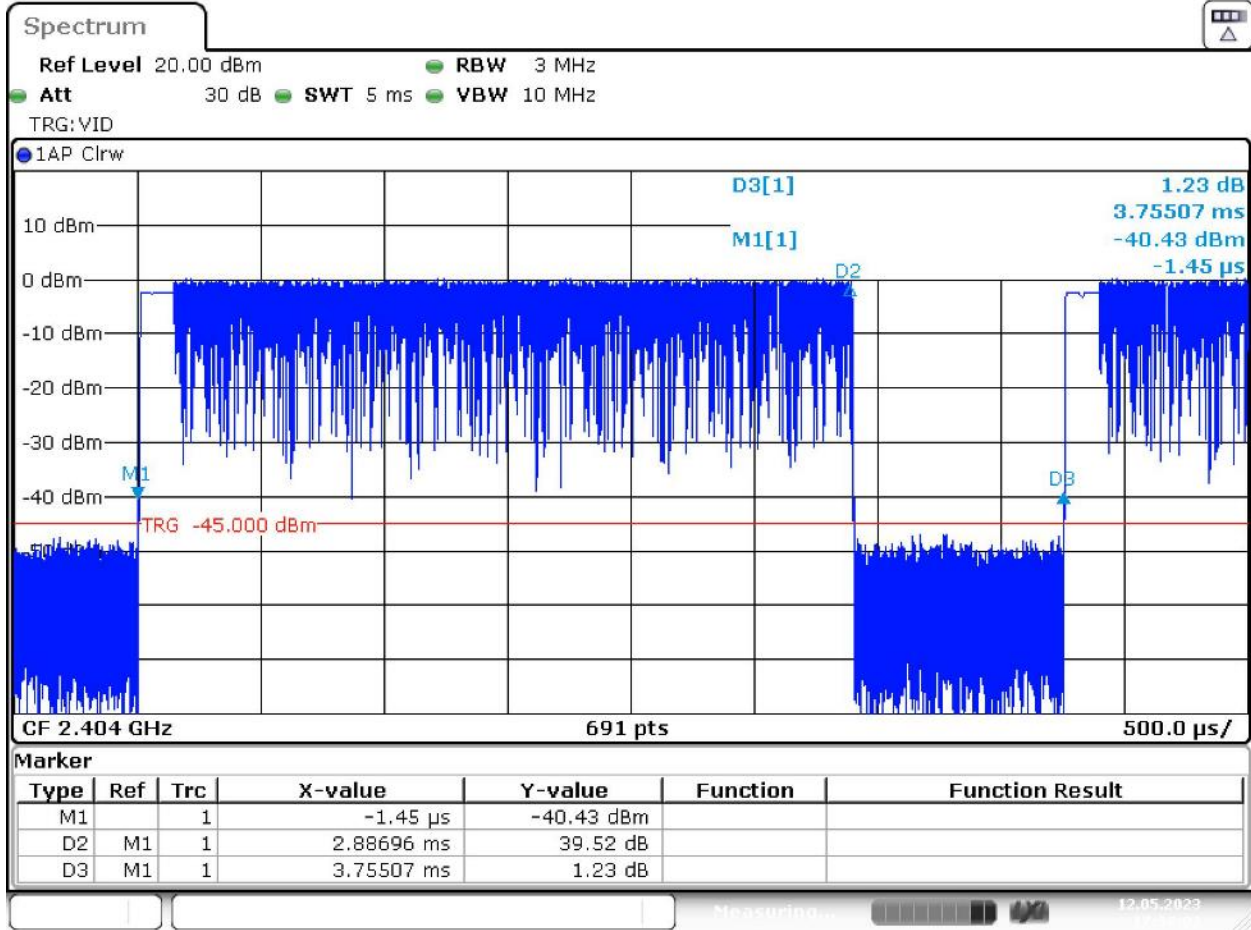

Date: 12.MAY.2023 17:38:02

3-DH5



99% Occupied Bandwidth

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	May 15, 2023		
Requirements Standard(s):		Referenced Standard(s):	ANSI C63.10:2013-6.9.3		
EUT powered with:	5V USB	Temp / Humidity:	n/a	Test location:	Braun Room
Test equipment used TN's:	2409				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	Product was tested as built except the antenna was disconnected and a coaxial cable was installed.				

Conclusion:

This test is for information only.

Limits:

None; for reporting purposes only.

Procedure:

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1-5\%$ of the 99% Occupied Bandwidth. The VBW is set to \geq RBW.




Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT




Basic Rate (DH5) Data Collection:


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	0.876
Middle	2441	0.873
High	2480	0.910

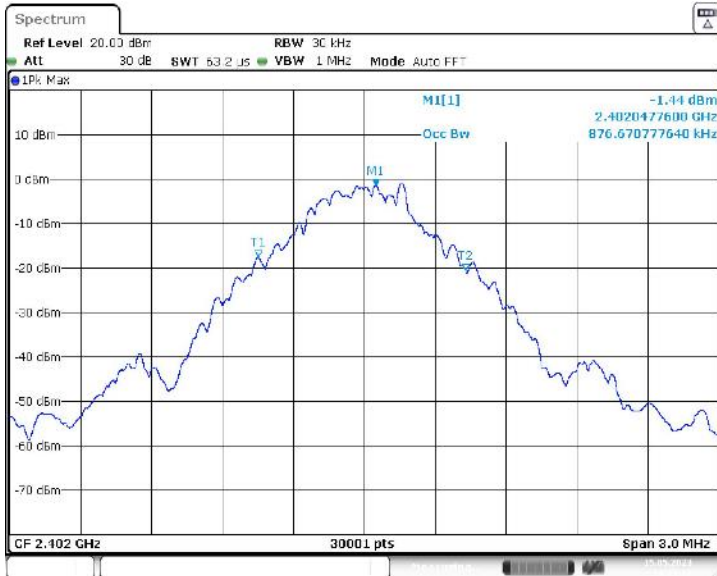

Date: 15.MAY.2023 14:21:10

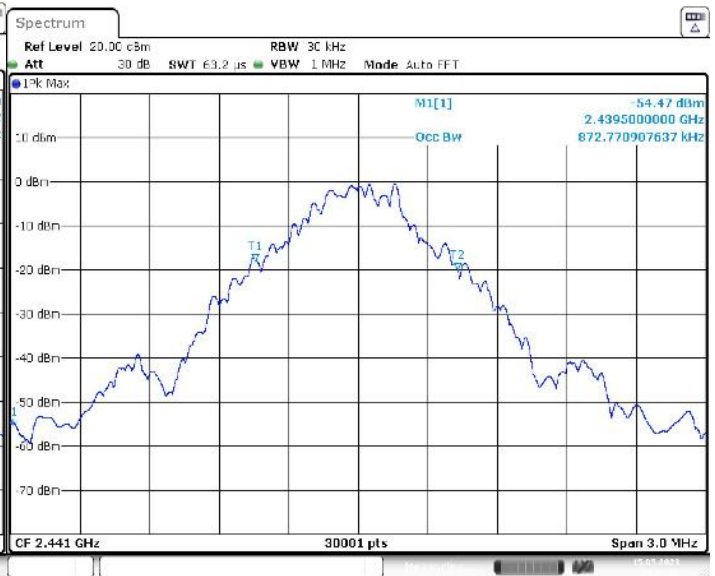

Date: 15.MAY.2023 14:22:07

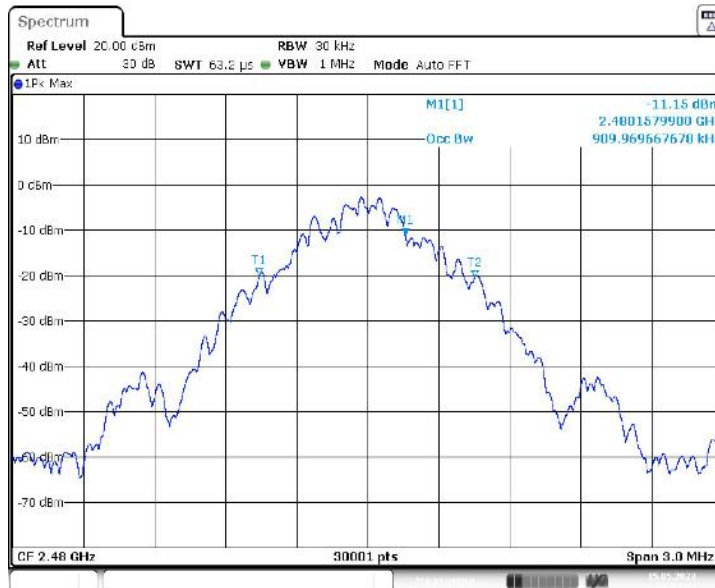


Date: 15.MAY.2023 14:24:52




Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT




Enhanced Data Rate (3DH5) Data Collection:

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.166
Middle	2441	1.190
High	2480	1.122

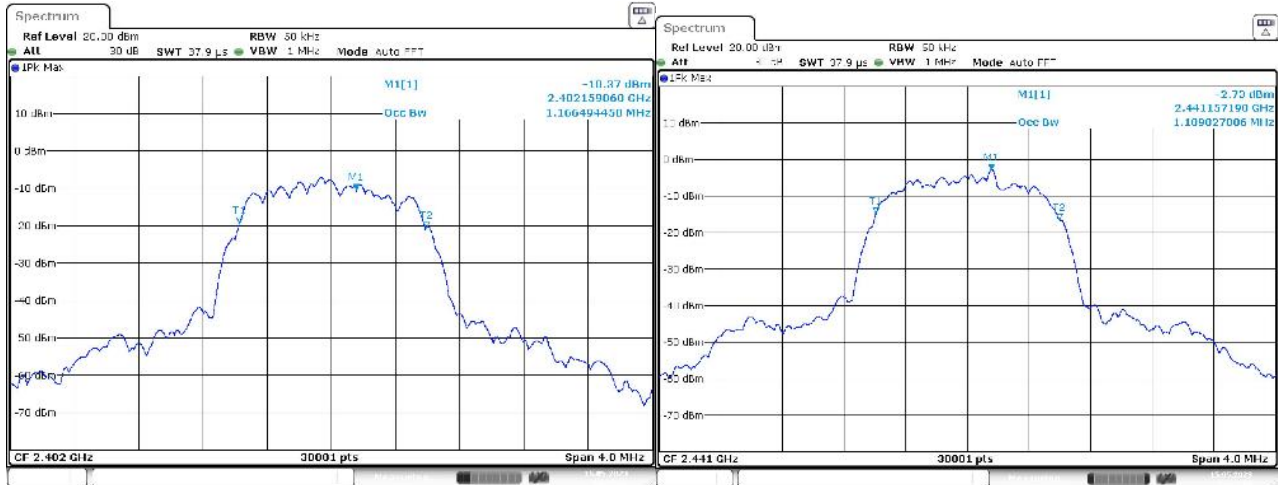

Date: 15 MAY 2023 14:20:36


Date: 16 MAY 2023 14:29:07

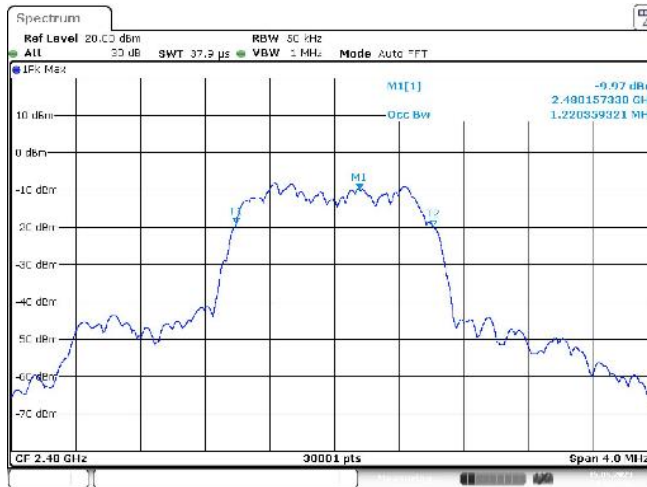

Date: 15 MAY 2023 14:29:33

Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date
2409	Signal and Spectrum Analyzer	FSV40	101413	Rohde & Schwarz	22-Mar-2023	21-Mar-2024



20dB Occupied Bandwidth

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	June 20, 2023		
Requirements Standard(s):	FCC §15.247 (a) (1) RSS-247 5.1 (a)	Referenced Standard(s):	ANSI 63.10:2013 - 6.9.2		
EUT powered with:	5V USB	Temp / Humidity:	n/a	Test location:	Braun Room
Test equipment used TN's:	2409				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	Product was tested as built except the antenna was disconnected and a coaxial cable was installed.				

Conclusion:

This test is for information only.

Limits:

None; for reporting purposes only.

Procedure:

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1-5\%$ of the 20dB bandwidth. The VBW is set to \geq RBW.




Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT




Basic Rate (DH5) Data Collection:

Setting	F1	F2	BW kHz
Left DH5 Low	2.401534	2.402469	923
Left DH5 Mid	2.440539	2.441469	922
Left DH5 High	2.479539	2.480469	936

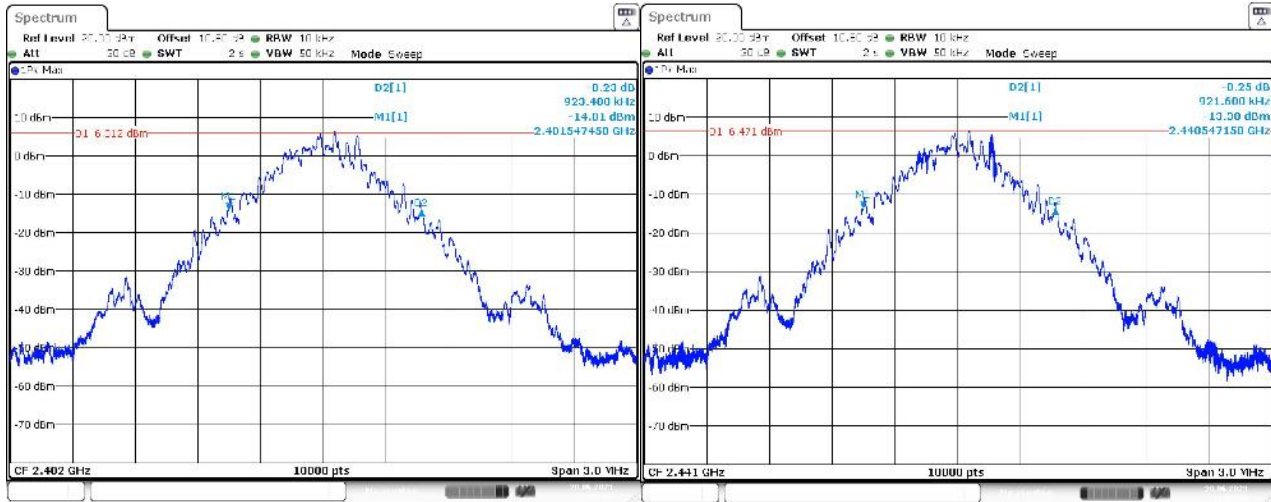

Date: 20 JUN 2023 16:06:07

Date: 20 JUN 2023 16:02:53

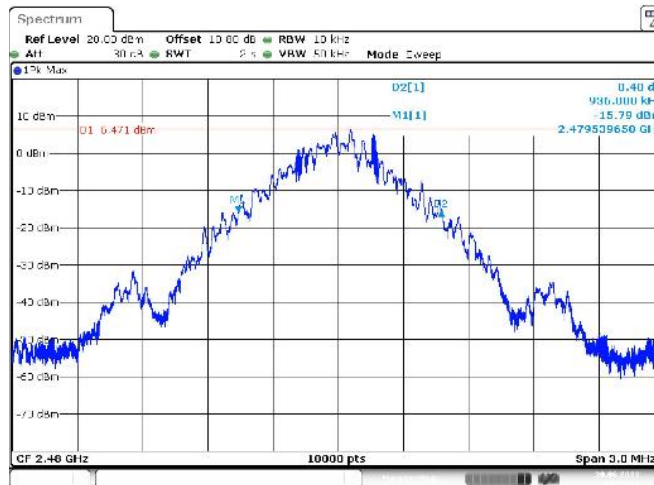


Date: 20 JUN 2023 16:07:55




Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT




Enhanced Data Rate (3DH5) Data Collection:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.302
Middle	2441	1.302
High	2480	1.297

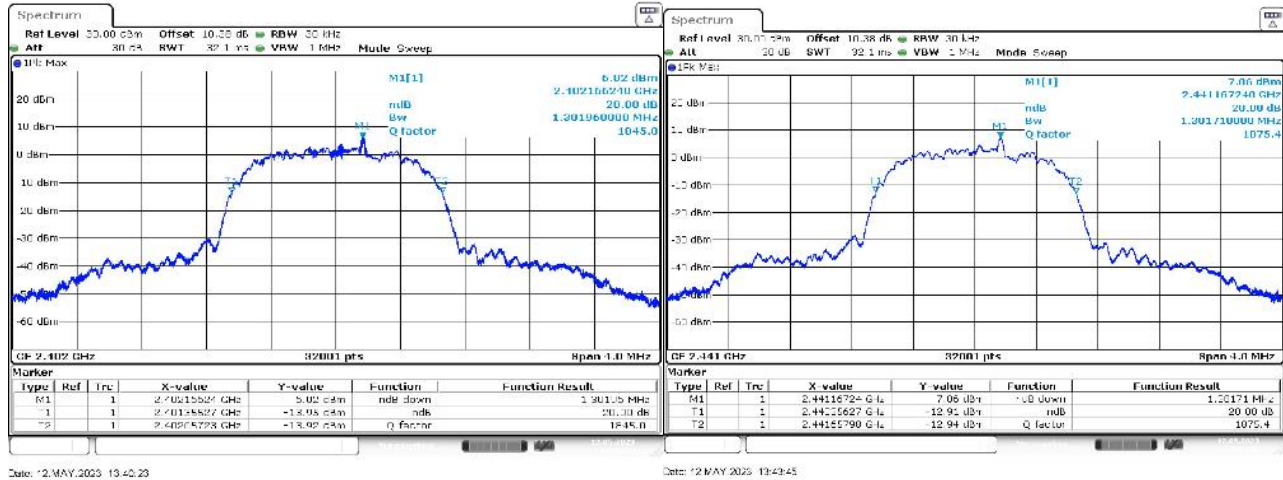

Date: 12 MAY 2025 13:42:29

Date: 12 MAY 2025 13:43:45

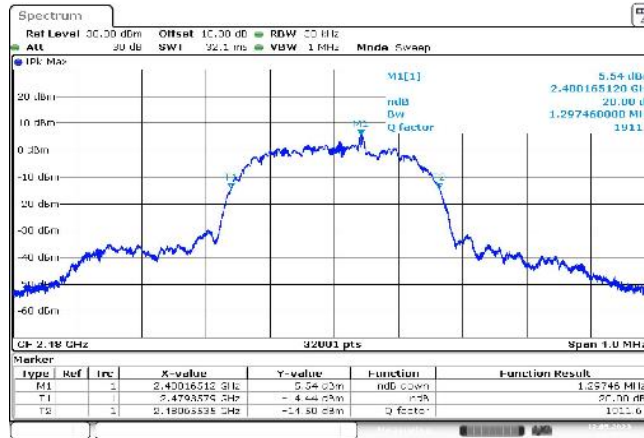

Date: 12 MAY 2025 13:46:24

Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date
2409	Signal and Spectrum Analyzer	FSV40	101413	Rohde & Schwarz	22-Mar-2023	21-Mar-2024



Hopping Frequency Separation

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	May 15, 2023		
Requirements Standard(s):	FCC 15.247 (a) (1), RSS-247 5.1 (b)	Referenced Standard(s):	ANSI C63.10-2013 7.8.2		
EUT powered with:	5V USB	Temp / Humidity:	n/a	Test location:	Braun room
Test equipment used TN's:	2409				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	Product was tested as built except the antenna was disconnected and a coaxial cable was installed.				

Conclusion:

Hopping frequencies are separated by 1MHz which is more than the required minimum of 25kHz and more than 2/3 of the 20dB bandwidth of the hopping channel which would be 869 kHz.

Limits:

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date
2409	Signal and Spectrum Analyzer	FSV40	101413	Rohde & Schwarz	22-Mar-2023	21-Mar-2024




Certificate # 1514.1


PRODUCT ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



Data Collection:

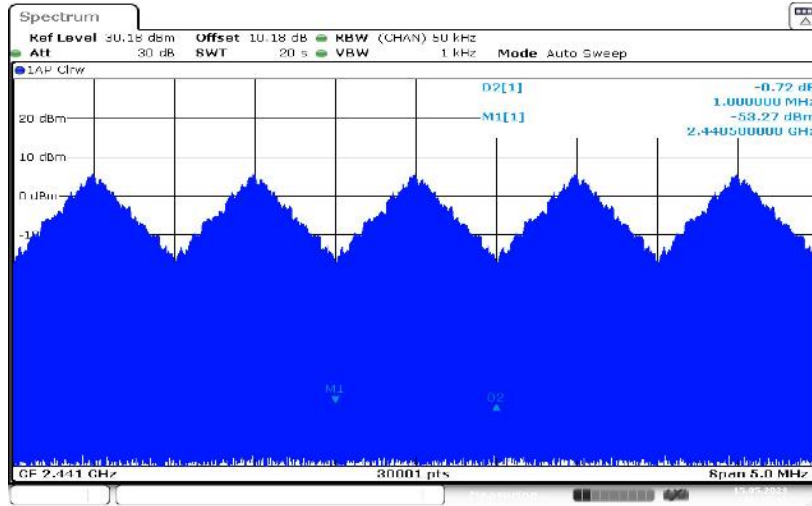

DH5 hopping

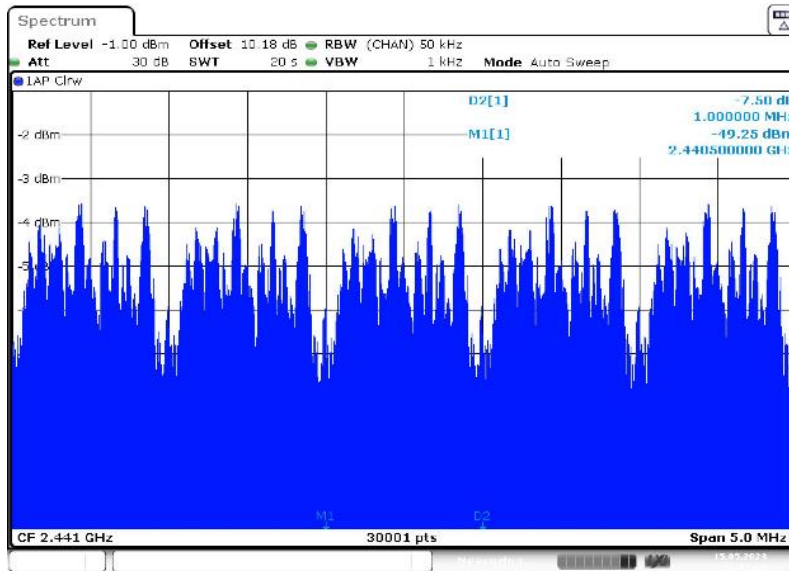

3-DH5 hopping



Number of Hopping Channels

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	May 15, 2023		
Requirements Standard(s):	FCC 15.247 (a) (1) (iii) RSS-247 5.1 (d)	Referenced Standard(s):	ANSI C63.10-2013 7.8.3		
EUT powered with:	5V USB	Temp / Humidity:	n/a	Test location:	Braun Room
Test equipment used TN's:	2409				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	Product was tested as built except the antenna was disconnected and a coaxial cable was installed.				

Conclusion:

Bose Model 408L uses 79 hopping channels in normal operation and always uses at least 20, both of which are more than the required 15.

Limits:

FCC 15.247 (a) (1) (iii), RSS-247 5.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.




Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT




Data Collection:

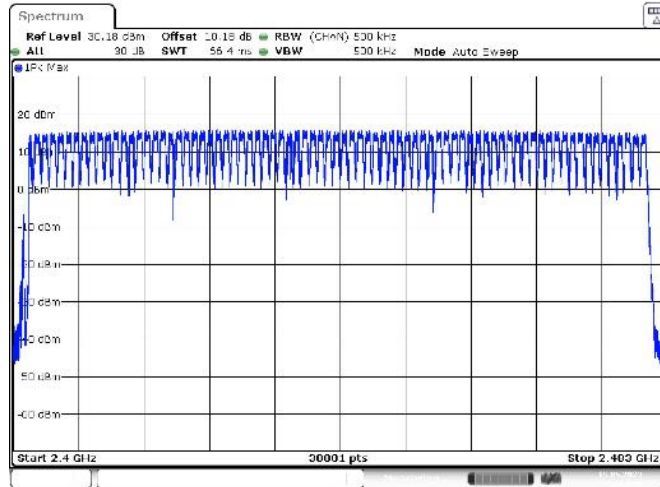

Date: 15 MAY 2023 16:54:41

79 hopping channels active DH5

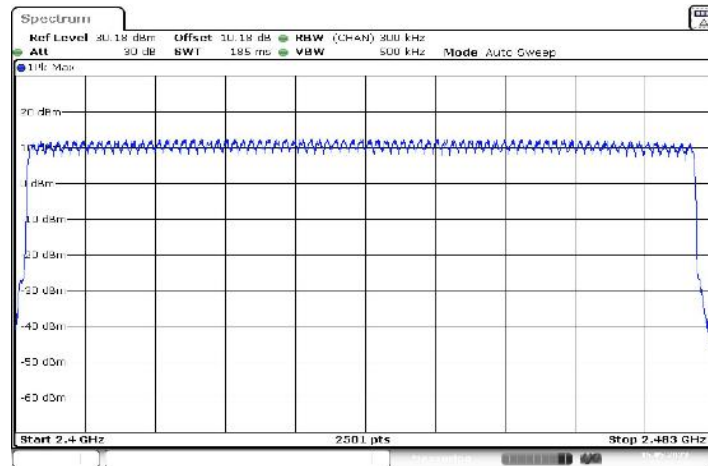

Date: 15 MAY 2023 17:12:19

79 Hopping Channels 3-DH5

Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date
2409	Signal and Spectrum Analyzer	FSV40	101413	Rohde & Schwarz	22-Mar-2023	21-Mar-2024



Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



Average Time of Occupancy

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	May 22, 2023 and June 20, 2023		
Requirements Standard(s):	FCC 15.247 (a) (1) (iii) RSS-247 5.1 (d)	Referenced Standard(s):	ANSI C63.10-2013 7.8.4		
EUT powered with:	5V USB	Temp / Humidity:	n/a	Test location:	Braun Room
Test equipment used TN's:	2409				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	Product was tested as built except the antenna was disconnected and a coaxial cable was installed.				

Conclusion:

The highest time of occupancy in any mode is 318 mS which meets the 400mS limit by 82mS.

Limit:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.



Certificate # 1514.1


PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT




Data Collection:

Observation time = (79 hopping Channels) * 400mS = 31.6 Seconds.

Channel	Frequency (MHz)	Mode	Pulse Width (mS)	Number of pulses in 3.16 S	Number of pulses in 31.6 S	Time of occupancy (Pulse Width X Number of pulses) (mS)	Limit (mS)	Margin (mS)	Result
Middle	2441	DH5	2.888	12	120	346.5	400	53.5	Pass
Middle	2441	3-DH5	2.888	10	100	288.8	400	111.2	Pass

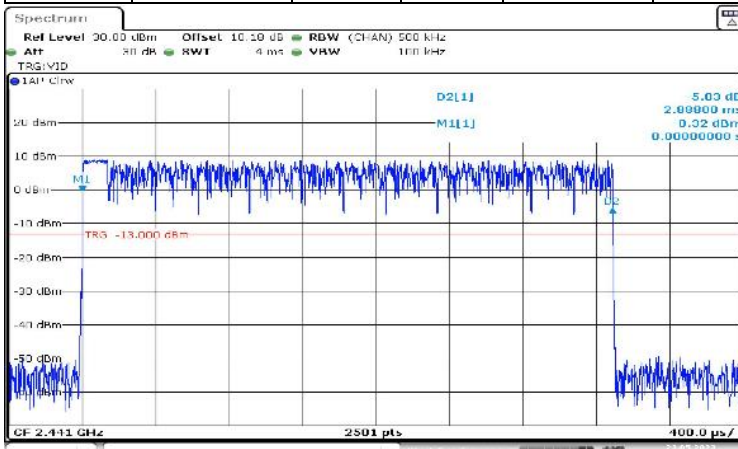


Date: 22 MAY 2023 15:29:40

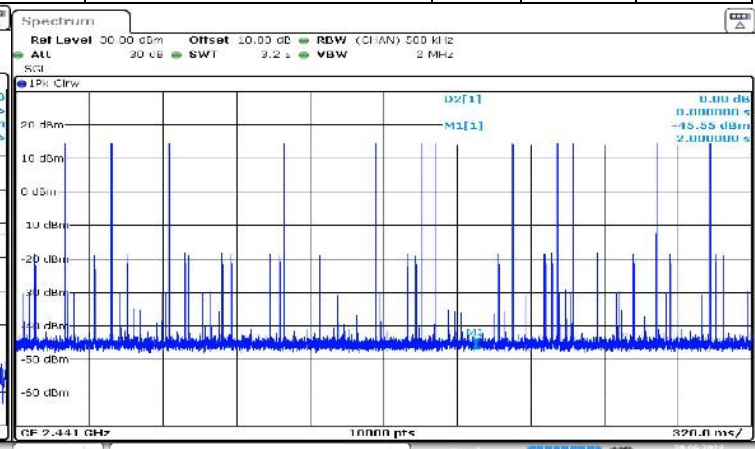


Date: 20 JUN 2023 16:38:07

DH5

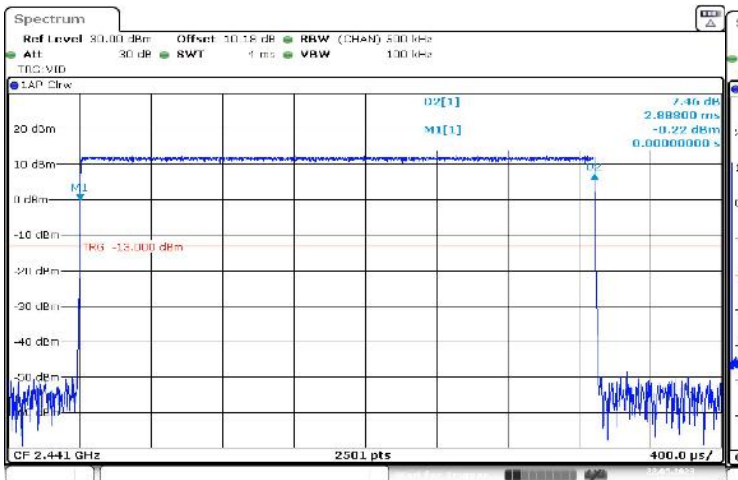

Date: 22 MAY 2023 15:50:51

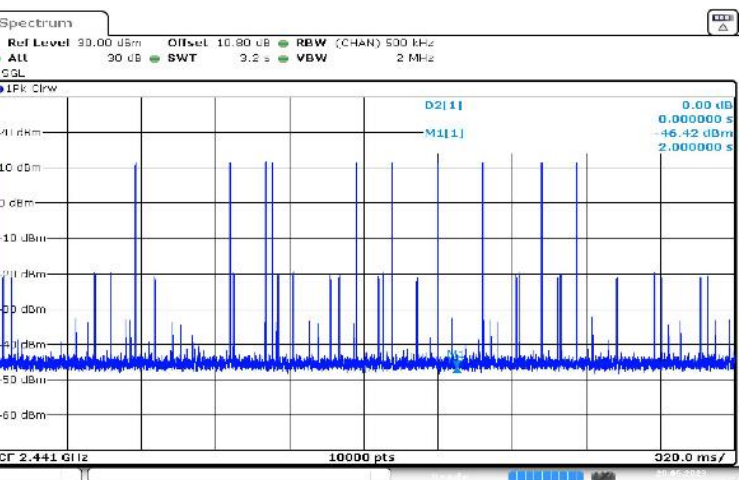

Date: 20 JUN 2023 16:39:14

3DH5



Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date
2409	Spectrum Analyzer	FSV40	101413	Rohde & Schwarz	22-Mar-2023	21-Mar-2024



Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



Output Power

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	May 16, 2023		
Requirements Standard(s):	FCC 15.247 (b) (3) RSS-247 5.4 (b)	Referenced Standard(s):	ANSI 63.10:2013 – 7.8.5		
EUT powered with:	5V USB	Temp / Humidity:	n/a	Test location:	Braun Room
Test equipment used TN's:	2409				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	Product was tested as built except the antenna was disconnected and a coaxial cable was installed.				

Conclusion:

The unit passes output power by 7.09.

Limits:

FCC §15.247 (b) (1)


RSS-247 5.4 (b)

The device maintains a minimum of 20 hopping channels. The limit is 21 dBm.




Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT




Basic Rate (DH5) Data Collection:


Output Power Summary Table (Basic Rate: 1 Mbps)						
Channel	Frequency (MHz)	Mode	Output Power (dBm)	Limit (dB)	Margin (dB)	Result
Low	2402	DH5	12.25	21	8.75	Pass
Middle	2441	DH5	12.91	21	8.09	Pass
High	2480	DH5	12.00	21	9.00	Pass

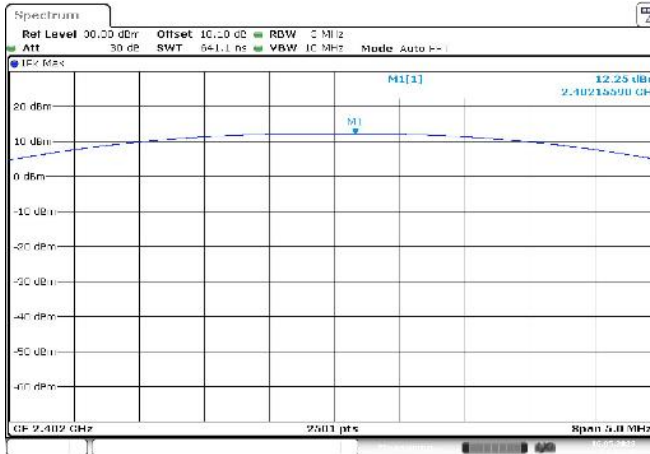

Date: 16 MAY 2023 13:46:17

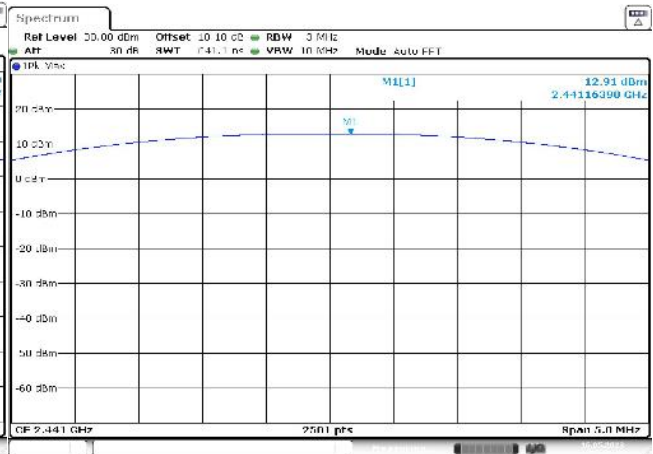

Date: 18 MAY 2023 13:48:19

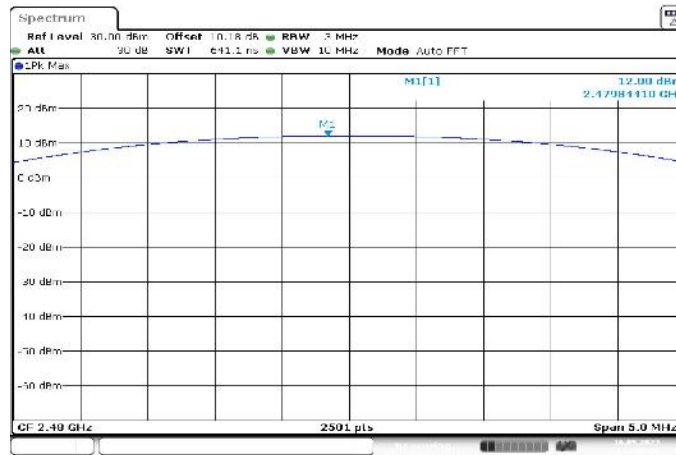


Date: 16 MAY 2023 13:48:50



Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT




Enhanced Data Rate (3DH5) Data Collection:

Output Power Summary Table (Enhanced Rate: 3 Mbps)						
Channel	Frequency (MHz)	Mode	Output Power (dBm)	Limit (dB)	Margin (dB)	Result
Low	2402	3-DH5	11.00	21	10.0	Pass
Middle	2441	3-DH5	12.28	21	8.72	Pass
High	2480	3-DH5	12.30	21	8.70	Pass



Date: 16.MAY.2023 14:04:07

Date: 16.MAY.2023 14:04:42

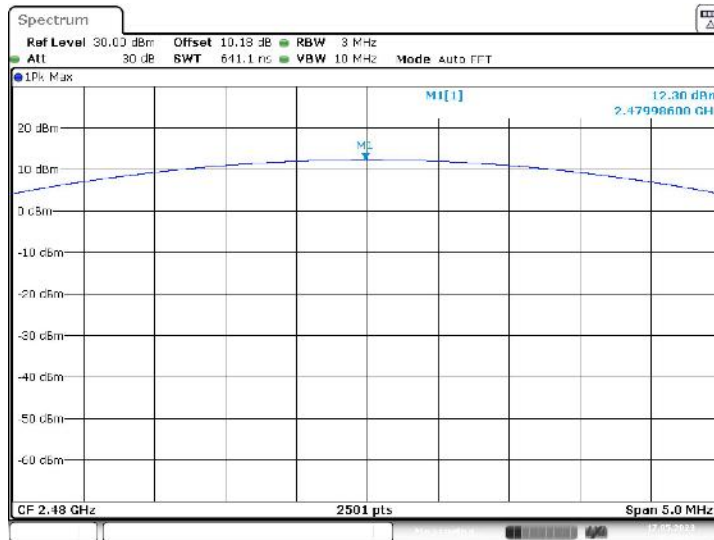

Date: 17.MAY.2023 10:54:36

Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date
2409	Signal and Spectrum Analyzer	FSV40	101413	Rohde & Schwarz	22-Mar-2023	21-Mar-2024



Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



Conducted Spurious Emissions

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	May 23, 2023		
Requirements Standard(s):	FCC §15.247 (d) RSS-247 5.5	Referenced Standard(s):	ANSI 63.10 (7.8.8)		
EUT powered with:	5V USB	Temp / Humidity:	n/a	Test location:	Braun Room
Test equipment used TN's:	2409				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	Product was tested as built except the antenna was disconnected and a coaxial cable was installed.				

Conclusion:

The Bose Model 408L passes Conducted Spurious Emissions by more than 10dB.

Limits



FCC §15.247 (d), RSS-247 5.5

Output power was measured based on the use of a peak measurement; therefore, the required attenuation is 20 dB.

Data Collection:

DH5 low channel band-edge. More than 20 dB down at center freq.

Out of band low channel (2402MHz)

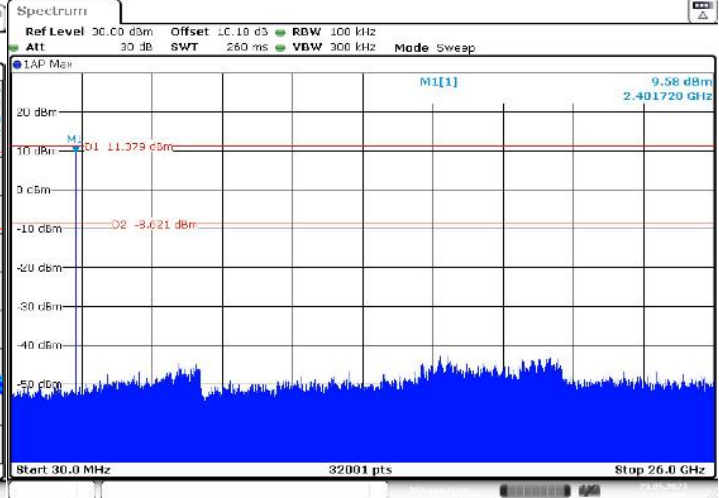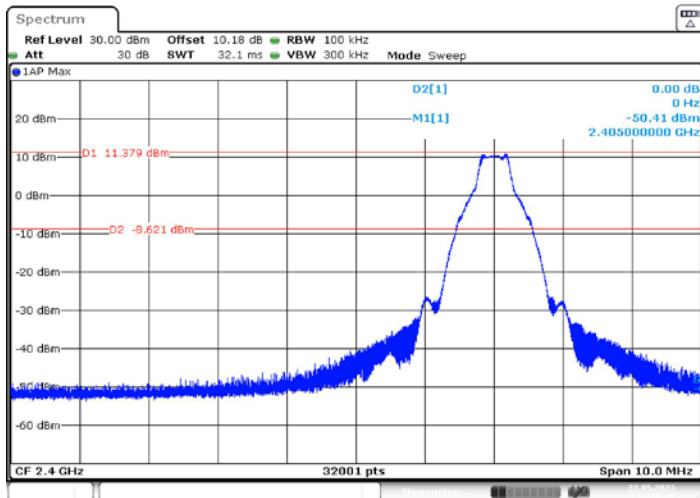


Date: 22 MAY 2023 16:29:42

Date: 23 MAY 2023 12:57:36





PRODUCT ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



Certificate # 1514.1

3DH5 low channel band-edge

Out of band low channel (2402MHz)

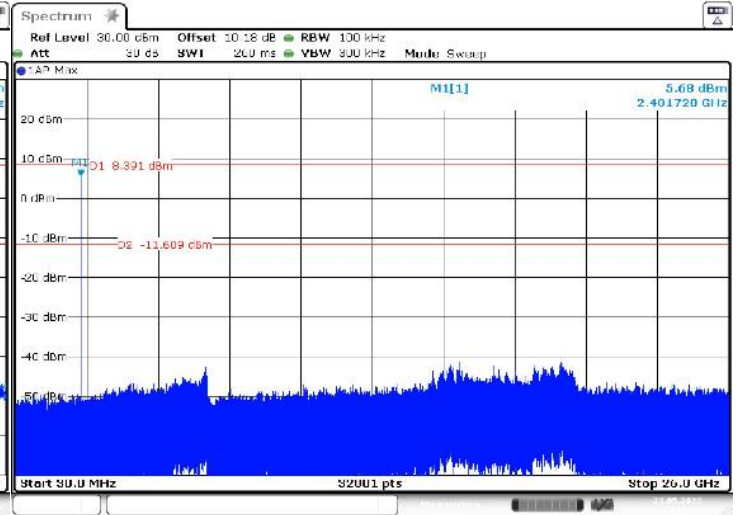
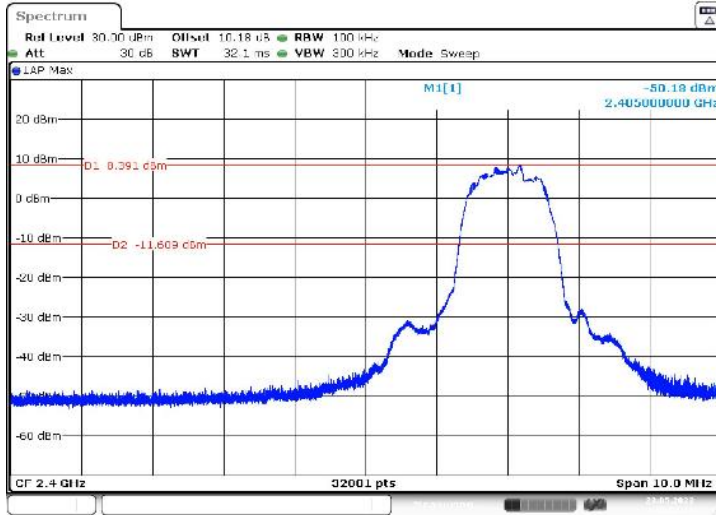


Date: 23 MAY 2023 15:37:15

Date: 23 MAY 2023 15:37:55

DH5 high channel band-edge

Out of band high channel (2480MHz)

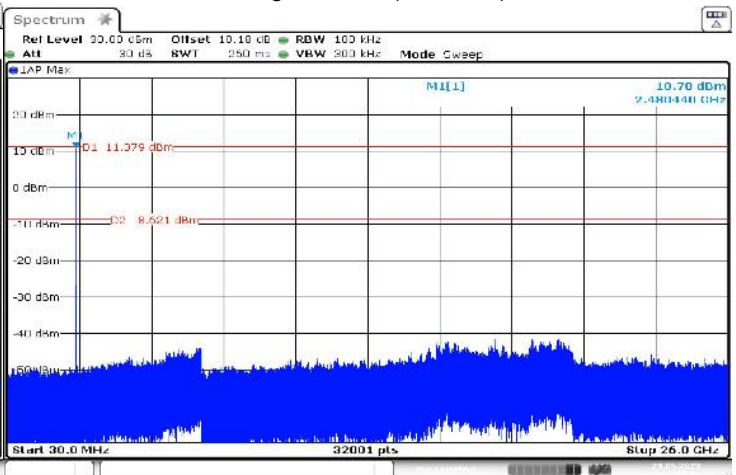
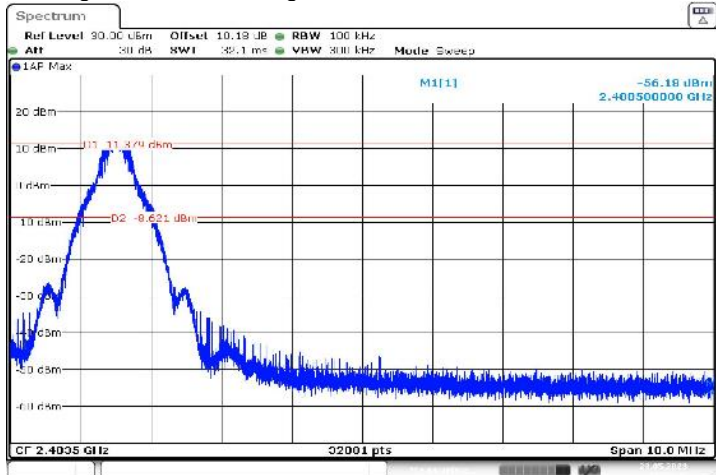


Date: 23 MAY 2023 12:58:43

Date: 23 MAY 2023 12:58:30

3DH5 high channel band-edge

Out of band high channel (2480MHz)

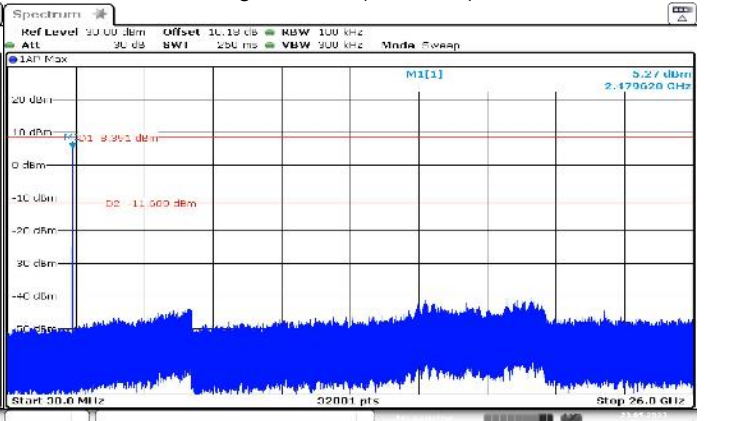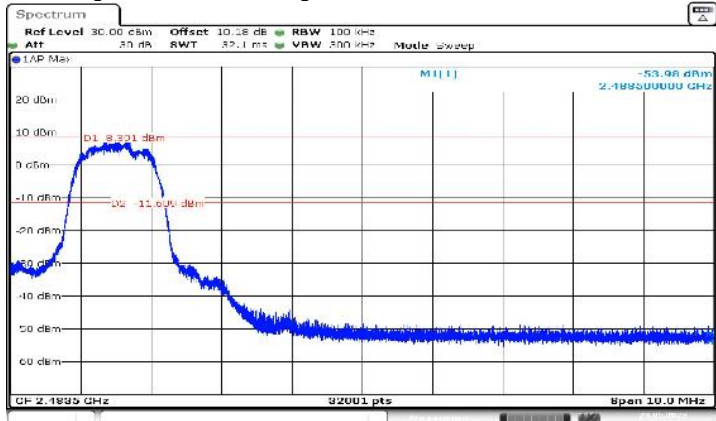

Date: 23 MAY 2023 15:38:00

Date: 23 MAY 2023 15:40:04




Certificate # 1514.1

PRODUCT ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT




DH5 low channel band-edge while hopping

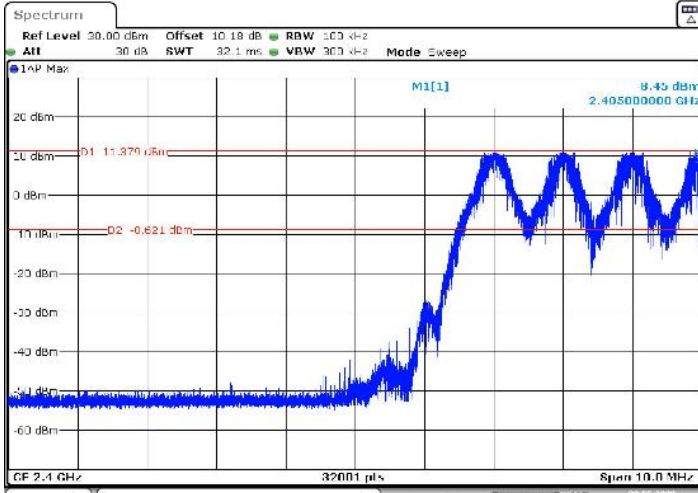


Date: 23 MAY 2023 13:02:42

DH5 high channel band-edge while hopping

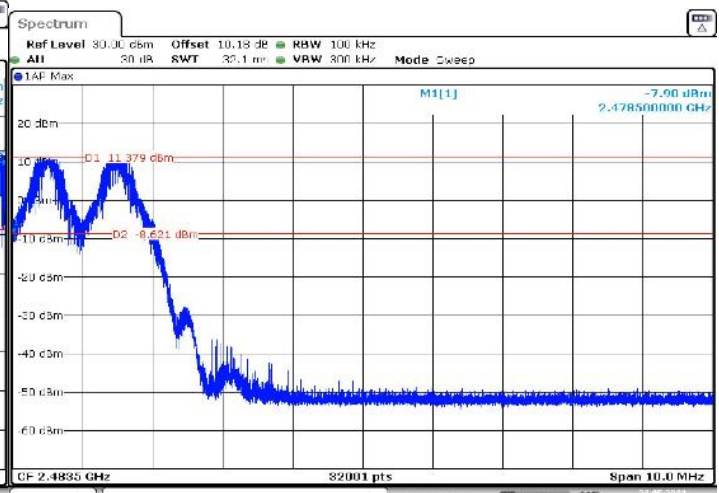


Date: 23 MAY 2023 13:05:47

3DH5 low channel band-edge while hopping

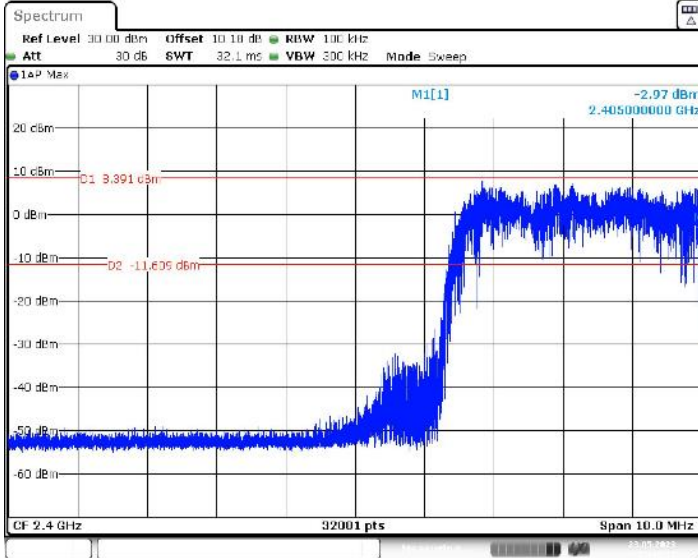

Date: 23 MAY 2023 15:41:18

3DH5 high channel band-edge while hopping

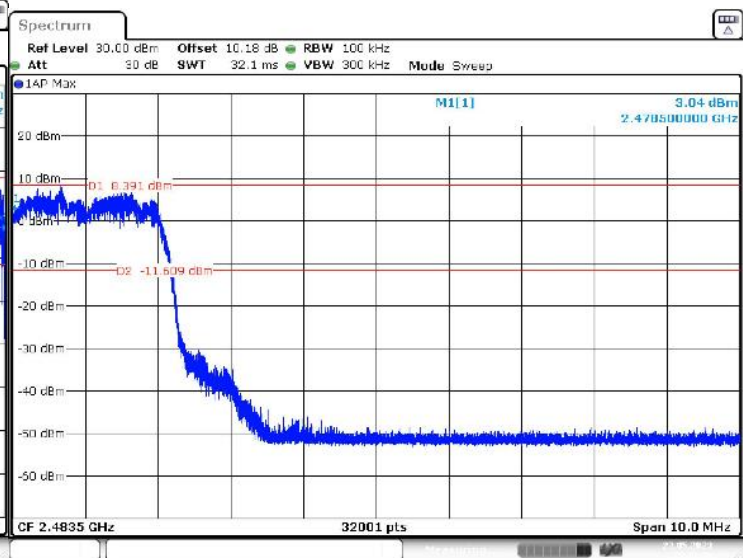

Date: 23 MAY 2023 15:43:27

Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date
2409	Signal and Spectrum Analyzer	FSV40	101413	Rohde & Schwarz	21-Mar-2023	22-Mar-2024



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



RF Radiated Emissions 30MHz -1GHz

Test Information:

Project number (Integrity):		Build Phase:	Pre-C1		
Tested by:	M. Mehrmann	Date:	8+9 February 2023		
Requirements Standard(s):	FCC §15.247 (d) and RSS-247 section 5.5		Referenced Standard(s):	ANSI C63.10 6.5	
EUT powered with:		Temp / Humidity:		Test location:	Maxwell House
Test equipment used TN's:	644,2319,1541,2077,1277-22				
EUT Serial number(s):	Left; 084803M3003B005A Right: 084803M3003B004A				
EUT Software installed:	0.0.19 diag code				
EUT Modification(s):	None				

Objective/Summary/Conclusion:

Passes FCC 15.247 and RSS-247 Section 5.5 requirements with a worst-case passing margin of 16.0 dB at 700 MHz.

Additional EUT Information:

The EUT was tested in a 3m Semi Anechoic Chamber on an insulating turntable 80 cm high.

The device was scanned in three orthogonal axis and no signals were detected.

Test Setup Details:

EUT Emissions levels contained within this report are calculated on the following basis:

Radiated Emission Level (dBµV/m) = EMI Receiver Reading (dBµV) + Antenna Correction Factor (dB/m) – Pre-amplifier Gain (dB) + Cable Loss (dB)



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



Data Collection:

EUT S/N:	Left bud	Power applied:		Plot#	1
EUT Mods:					
EUT Setup:					
Comments:	Position X				



Date: 9.FEB.2023 13:49:10




Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



EUT S/N:	Left bud	Power applied:		Plot#	2
EUT Mods:					
EUT Setup:					
Comments:	Position Y				

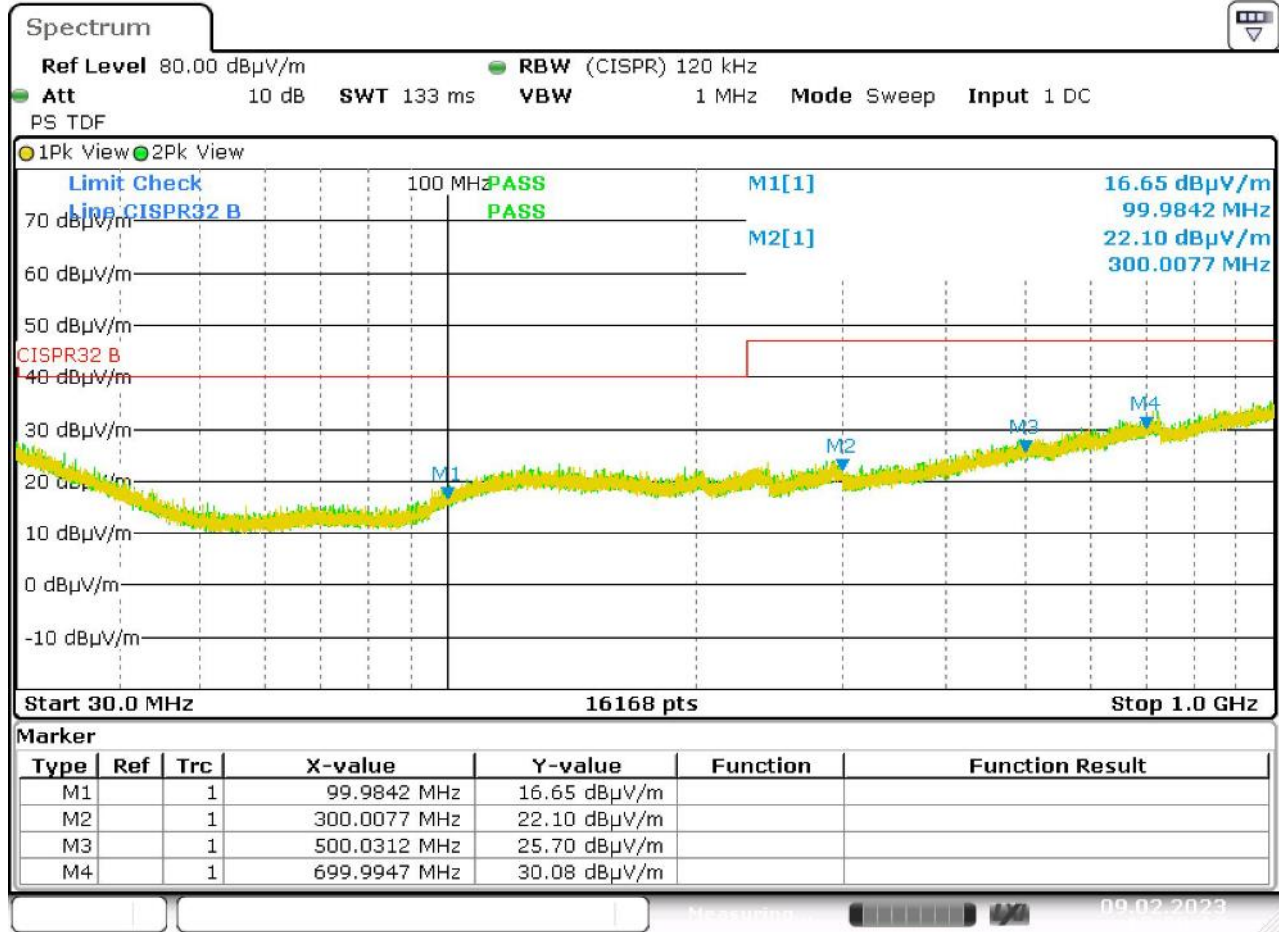

Date: 9.FEB.2023 13:58:19




Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



EUT S/N:	Left bud	Power applied:		Plot#	3
EUT Mods:					
EUT Setup:					
Comments:	Position Z				

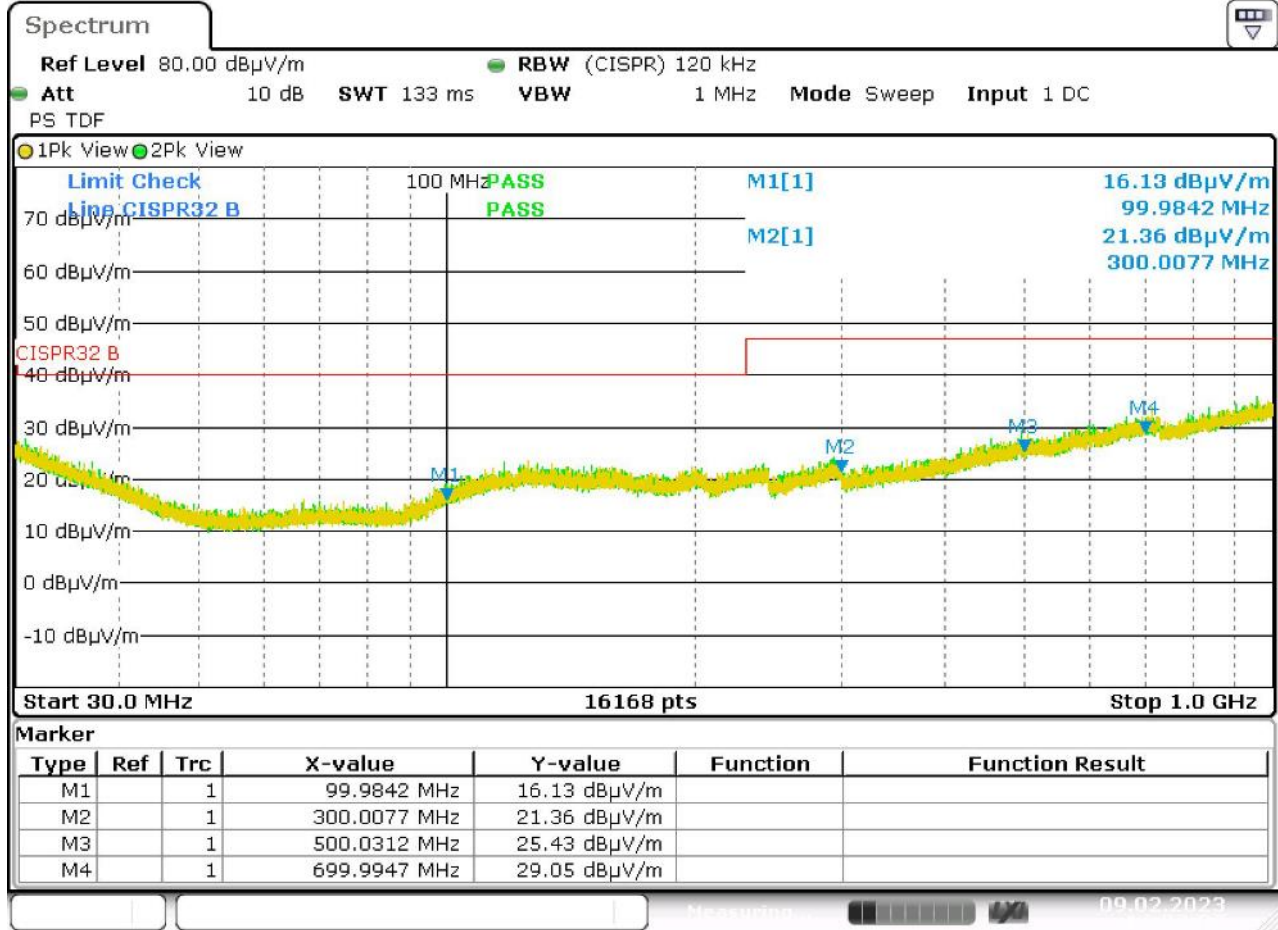

Date: 9.FEB.2023 14:07:37



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT




Limits:

Standard	Freq Range (MHz)	Limits (dBuV QP ¹)			Comments
		Class A		Class B	
		10 m	3 m ²	3 m	
FCC §15.247 (d) RSS-247 Section 5.5	30-88	39	49	40	Measurements above 1 GHz are made using average and peak detectors. Mains cables draped to floor, not bundled. *For measurements above 1 GHz, peak limits must also be met that are 20 dB higher than average limits.
	88-216	43.5	53.5	43.5	
	216-960	46.5	56.5	46	
	>960	49.5*	59.5*	54*	
bandwidth and Detector Settings:					
Freq. Range (MHz)	RBW (kHz)	VBW (kHz)	Detector		
30 – 1000	120	>300	QP		
> 1000	1000	>1000	Pk and AVG		


Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date	Most Recent Verification	Verification Due Date
1541	Antenna 30MHz - 6GHz	JB6	A050807	Sunol Sciences Corp	14-Dec-2021	14-Dec-2023		
3062	RF Cable 10MHz-18GHz, low loss LL142 coax, 26 feet, "N" connectors	SCE18110505-312	N/A	Fairview Microwave[2]			01-Sep-2022	01-Sep-2023
2077	Maxwell House RE Pre-amp (20MHz-3GHz)	N/A	N/A	Bose Corporation			01-Sep-2022	01-Sep-2023
2319	EMI Test Receiver	ESR26	101276	Rohde & Schwarz	29-Mar-2023	28-Mar-2024		



Uncertainty:

Uncertainty Budget				
Title:		Radiated RF Emissions (30MHz-1GHz)		
Source of Uncertainty	Value units:± dB	Distribution	Divisor	Uncertainty (± dB)
Receiver - absolute level	0.3	Rect.	1.73	0.17
Receiver - frequency response	0.8	Rect.	1.73	0.46
Receiver - attenuator switching	0.2	Rect.	1.73	0.12
Receiver - bandwidth switching	0.2	Rect.	1.73	0.12
Receiver - display	0.5	Rect.	1.73	0.29
Antenna factor	0.8	Norm.	2.00	0.38
Antenna directivity	1.0	Norm.	2.00	0.50
Preamp correction factor	0.5	Norm.	2.00	0.25
Cable correction factor	0.5	Norm.	2.00	0.25
Site imperfection - NSA	4.0	Triang.	2.45	1.63
Test table impact	1.1	Rect.	1.73	0.64
Combined uncertainty (RSS):				1.98
Coverage factor (2 sigma):				2.00
Extended uncertainty (95% confidence):				3.97



Radiated Spurious Emissions 1-25GHz

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	June 5 and June 13, 2023		
Requirements Standard(s):	FCC §15.247 (d) RSS-247 Section 5.5	Referenced Standard(s):	ANSI C63.10-2013 6.3 – 6.6 6.10.5 RBE 4.1.4.2.3 Reduced video BW method for average.		
EUT powered with:	Battery	Temp / Humidity:	N/A	Test location:	Marconi Manor
Test equipment used TN's:	1663,3685,2349,2602,2414				
EUT Serial number(s):	Left	084803M3051D038A1			
	Right	084808M3051D019A1			
EUT Software installed:	0.4.10				
EUT Modification(s):	USB Debug wires were attached to the earbud to allow control of the radio.				

Conclusion:

The Bose model 408L passes radiated emissions from 1-25GHz.

The peak emissions maximum is below the average limit in all cases.

1-18 GHz, the maximum emission was 53.2 dBuV/m peak, noise floor. The limit is 54 dBuV/m and the margin is 0.8 dB.

18-25 GHz. The maximum emission was 59.1. The limit is 74 dBuV/m, and the margin is 14.9 dB.

Procedure:

Per 558074 D01 15.247 Meas Guidance v05r02:

Each mode tested was measured at all 10 Harmonics, at the low, middle, and high transmit frequencies.

EUT was taped to a bamboo skewer and stuck into the test support at 150cm above the floor. From there the table was rotated and the antenna scanned up down and horizontal and vertical polarizations.

A notch filter was used to block the fundamental emission from overloading the measurement equipment including the pre-amplifier and the spectrum analyzer.

The duty cycle used is shown in the table on page 6.

Limit calculation:

The E field in the far field observes the inverse square law. So that the difference in field strength difference in decibels is;


$$20 \text{ Log} \left(\frac{D1}{D2} \right) = 20 \text{ Log} 10 = 20$$

Peak limit of 74 becomes 94 dBuV at 30cm.


Average limit of 54 becomes 74 dBuV at 30cm.

Data Collection:

EUT S/N:	Left	Power applied:	Battery		Plot#	1
EUT Mods:	None					
EUT Setup:	DH5 Low channel					
Comments:	2.4 GHz band reject filter included to suppress the fundamental. Signal duty cycle set to 100%					

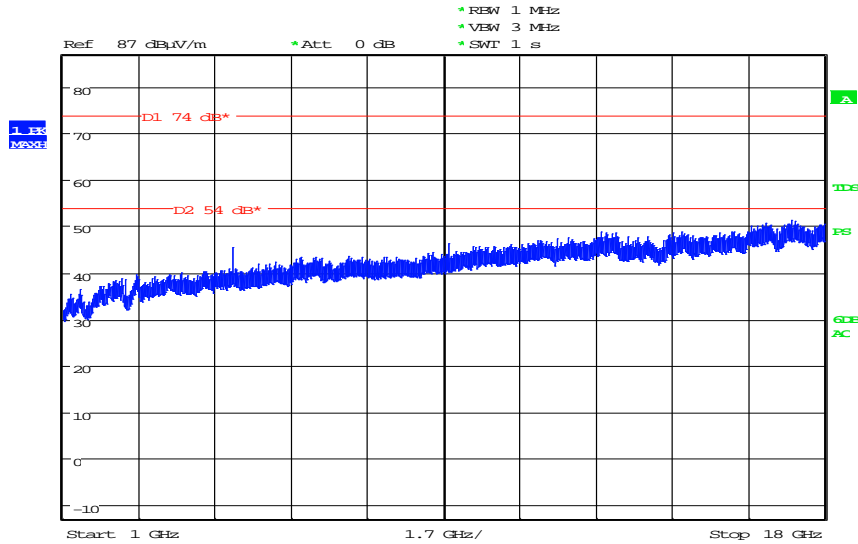

Date: 5.JUN.2023 17:04:52

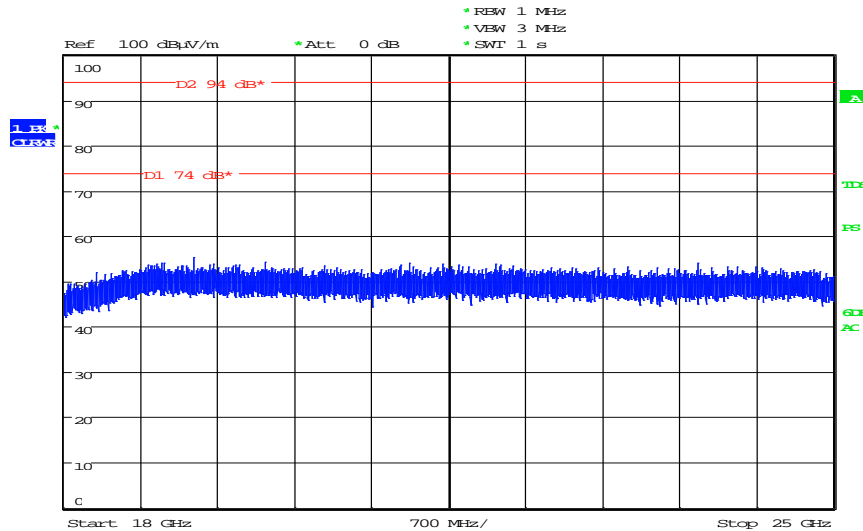


Date: 13.JUN.2023 17:28:23



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



FCC 15.247d and RSS-247 Section 5.5 @ 3 Meters

MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	4804	40.20	46.70	54.0	74.0	13.8	27.3	0	H	2.00	Signal Maximized
2	7206	31.50	45.70	54.0	74.0	22.5	28.3	0	V	1.50	Noise floor
3	9608	35.20	48.90	54.0	74.0	18.8	25.1	0	V	1.50	Noise floor
4	12010	34.80	49.10	54.0	74.0	19.2	24.9	0	V	1.50	Noise floor
5	14412	34.50	48.20	54.0	74.0	19.5	25.8	0	V	1.50	Noise floor
6	16814	38.30	51.30	54.0	74.0	15.7	22.7	0	V	1.50	Noise floor

FCC 15.247d and RSS-247 Section 5.5 @ 30 cm

MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	19824	41.00	54.30	74.0	94.0	33.0	39.7				Noise floor
2	22302	40.60	53.90	74.0	94.0	33.4	40.1				Noise floor
3	24780	40.30	54.20	74.0	94.0	33.7	39.8				Noise floor



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



EUT S/N:	Left	Power applied:	Battery		Plot#	2
EUT Mods:						
EUT Setup:	DH5 Mid channel					
Comments:						

FCC 15.247d and RSS-247 Section 5.5 @ 3 Meters											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	4882	29.30	43.50	54.0	74.0	24.7	30.5	360	V	2.50	Noise floor
2	7323	31.70	46.20	54.0	74.0	22.3	27.8	0	V	1.50	Noise floor
3	9764	33.10	47.40	54.0	74.0	20.9	26.6	0	H	1.50	Noise floor
4	12205	35.80	49.50	54.0	74.0	18.2	24.5	0	V	1.50	Noise floor
5	14646	36.30	50.20	54.0	74.0	17.7	23.8	0	H	1.50	Noise floor
6	17087	38.70	52.90	54.0	74.0	15.3	21.1	0	V	1.50	Noise floor

FCC 15.247d and RSS-247 Section 5.5 @ 30 cm											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	19527	52.70	59.10	74.0	94.0	21.3	34.9				Noise floor
2	21969	40.40	53.70	74.0	94.0	33.6	40.3				Noise floor
3	24410	40.10	53.50	74.0	94.0	33.9	40.5				Noise floor



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



EUT S/N:	Left	Power applied:	Battery		Plot#	3
EUT Mods:						
EUT Setup:	DH5 High channel					
Comments:						

FCC 15.247d and RSS-247 Section 5.5 @ 3 Meters											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	4960	39.10	46.90	54.0	74.0	14.9	27.1	0	V	2.00	Signal Maximized
2	7440	32.90	46.30	54.0	74.0	21.1	27.7	0	H	1.50	Noise floor
3	9920	39.50	51.30	54.0	74.0	14.5	22.7	0	V	1.50	Noise floor
4	12400	35.30	49.10	54.0	74.0	18.7	24.9	0	H	1.50	Noise floor
5	14880	36.70	51.20	54.0	74.0	17.3	22.8	0	V	1.50	Noise floor
6	17360	39.10	53.20	54.0	74.0	14.9	20.8	0	H	1.50	Noise floor

FCC 15.247d and RSS-247 Section 5.5 @ 30 cm											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	19839	49.00	57.20	74.0	94.0	25.0	36.8				Signal Maximized
2	22320	40.50	53.50	74.0	94.0	33.5	40.5				Noise floor
3	24798	45.00	56.00	74.0	94.0	29.0	38.0				Signal Maximized



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



EUT S/N:	Left	Power applied:	Battery	Plot#	4
EUT Mods:					
EUT Setup:	3-DH5 Low channel				
Comments:					

FCC 15.247d and RSS-247 Section 5.5 @ 3 Meters											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	4804	39.40	47.20	54.0	74.0	14.6	26.8	0	H	1.50	Signal Maximized
2	7206	31.30	44.50	54.0	74.0	22.7	29.5	0	V	1.50	Noise floor
3	9608	32.60	47.00	54.0	74.0	21.4	27.0	0	H	1.50	Noise floor
4	12010	34.60	48.40	54.0	74.0	19.4	25.6	0	V	1.50	Noise floor
5	14412	34.70	48.90	54.0	74.0	19.3	25.1	0	H	1.50	Noise floor
6	16814	38.40	52.10	54.0	74.0	15.6	21.9	0	V	1.50	Noise floor

FCC 15.247d and RSS-247 Section 5.5 @ 30 cm											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	19216	49.10	57.60	74.0	94.0	24.9	36.4				Signal Maximized
2	21618	41.20	54.30	74.0	94.0	32.8	39.7				Noise floor
3	24020	43.60	54.90	74.0	94.0	30.4	39.1				Noise floor



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



EUT S/N:	Left	Power applied:	Battery	Plot#	5
EUT Mods:					
EUT Setup:	3-DH5 Mid channel				
Comments:					

FCC 15.247d and RSS-247 Section 5.5 @ 3 Meters											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	4882	41.50	47.90	54.0	74.0	12.5	26.1	0	V	1.50	Signal Maximized
2	7323	32.20	45.30	54.0	74.0	21.8	28.7	0	H	1.50	Noise floor
3	9764	44.50	51.20	54.0	74.0	9.5	22.8	0	V	1.60	Signal Maximized
4	12205	39.60	50.90	54.0	74.0	14.4	23.1	0	H	1.50	Noise floor
5	14646	37.20	50.30	54.0	74.0	16.8	23.7	0	V	1.50	Noise floor
6	17087	38.70	52.10	54.0	74.0	15.3	21.9	0	H	1.60	Noise floor

FCC 15.247d and RSS-247 Section 5.5 @ 30 cm											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	19528	46.00	56.50	74.0	94.0	28.0	37.5				Signal Maximized
2	21969	42.00	54.70	74.0	94.0	32.0	39.3				Noise floor
3	24410	50.70	58.10	74.0	94.0	23.3	35.9				Signal Maximized



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



EUT S/N:	Left	Power applied:	Battery	Plot#	6
EUT Mods:					
EUT Setup:	3-DH5 High channel				
Comments:					

FCC 15.247d and RSS-247 Section 5.5 @ 3 Meters											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	4960	39.10	46.30	54.0	74.0	14.9	27.7	0	V	1.60	Signal Maximized
2	7440	34.20	46.20	54.0	74.0	19.8	27.8	0	H	1.50	Noise floor
3	9920	44.20	51.80	54.0	74.0	9.8	22.2	0	H	1.50	Signal Maximized
4	12400	36.50	48.80	54.0	74.0	17.5	25.2	0	V	1.50	Noise floor
5	14880	36.90	50.30	54.0	74.0	17.1	23.7	0	H	1.50	Noise floor
6	17360	39.00	52.70	54.0	74.0	15.0	21.3	0	V	1.50	Noise floor

FCC 15.247d and RSS-247 Section 5.5 @ 30 cm											
MK #	Emission Frequency (MHz)	Measured Amplitude (dBµV/m) QP/AVG*	Measured Amplitude (dBµV/m) Peak	FCC 15.247d and RSS-247 Section 5.5				Table Azimuth (0°closest to ant)	Receiving Antenna		*Average detector used for frequencies above 1 GHz. Notes/Mode
				Limit (dBµV/m) QP/AVG*	Limit (dBµV/m) Peak	Margin (dB) QP/AVG	Margin (dB) Peak		Pol (H/V)	Height (Meters)	
1	19840	50.20	58.00	74.0	94.0	23.8	36.0				Signal Maximized
2	22320	41.10	54.00	74.0	94.0	32.9	40.0				Noise floor
3	24800	46.00	56.90	74.0	94.0	28.0	37.1				Signal Maximized

Limits:

Standard	Freq Range (MHz)	Limits (dBuV QP ¹)			Comments
		Class A		Class B	
		10 m	3 m	3 m	
FCC 15.247d and RSS-247 Section 5.5	30-88	39	49	40	Measurements above 1 GHz are made using average and peak detectors. *For measurements above 1 GHz, peak limits must also be met that are 20 dB higher than average limits.
	88-216	43.5	53.5	43.5	
	216-960	46.5	56.5	46	
	>960	49.5*	59.5*	54*	
Bandwidth and Detector Settings:					
Freq. Range (MHz)	RBW (kHz)	VBW (kHz)	Detector		
30 – 1000	120	>300	QP		
> 1000	1000	>1000	Pk and AVG		



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date	Most Recent Verification	Verification Due Date
1663	EMI Test Receiver	ESU40	100098	Rohde & Schwarz	20-Mar-2023	19-Mar-2024		
3685	Marconi Manor 3M mast position RE cable set	3 cables (TN's 2373, 2479, 2357)					28-Mar-2023	27-Mar-2024
2349	Double Ridge Waveguide Horn Antenna 1-18GHz	3117	00152406	ETS Lindgren	24-Feb-2023	23-Feb-2025		
2602	Miteq pre-amp 1-18GHz 35dB	AFS42-01001800-28-10P-42	N/A	Miteq			07-Jul-2022	07-Jul-2023
2414	Band Reject Filter (2.4GHz)	BRM50702-07	003	Micro-Tronics	13-Jan-2015		28-Mar-2023	27-Mar-2024
1757	18GHz-40GHz Preamp	JS4018004000-30-8P-A1	1406279	Miteq			07-Jul-2022	07-Jul-2023
1596	Horn Antenna 18GHz - 26.5GHz	AT4640	309234	Amplifier Research				
2368	RF Cable 30MHz-26.5GHz	TRU-210	TRU-12767-35	TRU Corporation			28-Mar-2023	27-Mar-2024

Uncertainty:

Uncertainty Budget				
Title:	Radiated Emissions (>1GHz)			
Source of Uncertainty	Value units:± dB	Distribution	Divisor	Uncertainty (± dB)
Receiver - absolute level	0.3	Rect.	1.73	0.17
Receiver - frequency response	2.0	Rect.	1.73	1.16
Receiver - attenuator switching	0.2	Rect.	1.73	0.12
Receiver - bandwidth switching	0.2	Rect.	1.73	0.12
Receiver - display	0.5	Rect.	1.73	0.29
Antenna factor	0.4	Norm.	2.00	0.20
Antenna directivity	1.0	Norm.	2.00	0.50
Preamp correction factor	0.5	Norm.	2.00	0.25
Cable correction factor	0.5	Norm.	2.00	0.25
Site imperfection - NSA	3.0	Triang.	2.45	1.22
Test table impact	1.7	Rect.	1.73	0.98
Combined uncertainty (RSS):				2.09
Coverage factor (2 sigma):				2.00
Extended uncertainty (95% confidence):				4.17



Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING
COMPLIANCE
EMC TEST REPORT



Radiated Band Edge

Project number (Integrity):	408L	Build Phase:	C1.5		
Tested by:	Mike Royer	Date:	24 May 2023		
Requirements Standard(s):	FCC §15.247 (d) RSS -247 Section 5.5	Referenced Standard(s):	ANSI C63.10-2013		
EUT powered with:	Battery	Temp / Humidity:	N/A	Test location:	Marconi Manor
Test equipment used TN's:	1663,2929,2349,3685				
EUT Serial number(s):	084803M3051E021A1				
EUT Software installed:	1.4.10+g2edc594				
EUT Modification(s):	USB Debug wires were attached to the earbud to allow control of the radio.				

Conclusion:

The Bose model 408L passes Radiated Band Edge.

The blue trace is peak mode, and the black trace is average detection.

Procedure:

The EUT was taped to a bamboo skewer and stuck into the test support at 150cm above the floor. From there the table was rotated and the antenna scanned up down and horizontal and vertical polarizations.

All measurements were taken in peak mode and were below the average limits. Pass.

A high dynamic range pre-amp (TN2929) used to ensure that overloading was avoided.

For lower band edge measurements, the transmit frequency was 2402 MHz.

For upper band edge measurements, the transmit frequency was 2480 MHz.



Certificate # 1514.1


DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



Data Collection:

Left DH5 low channel band edge.


Peak emissions are below the average limit.

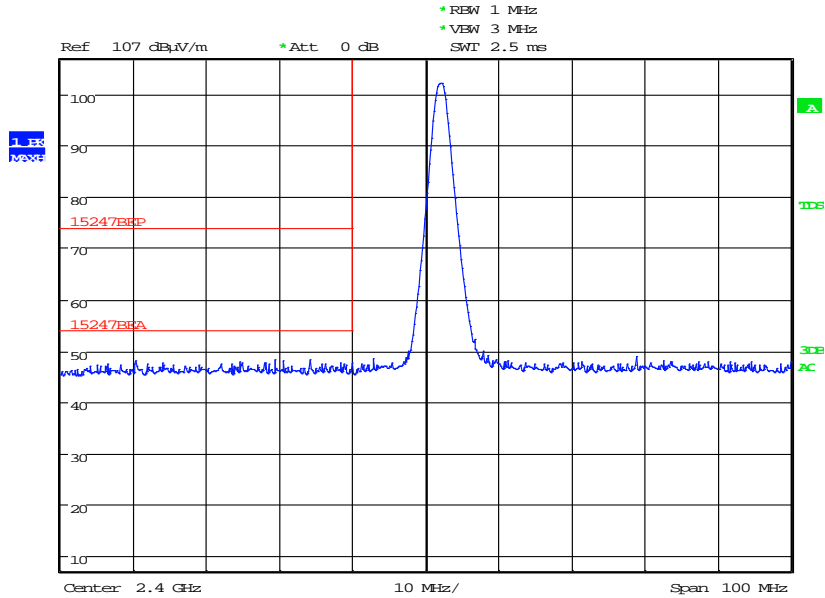

Date: 24.MAY.2023 17:04:52

Left DH5 high channel band edge.

Peak emissions are below the average limit.

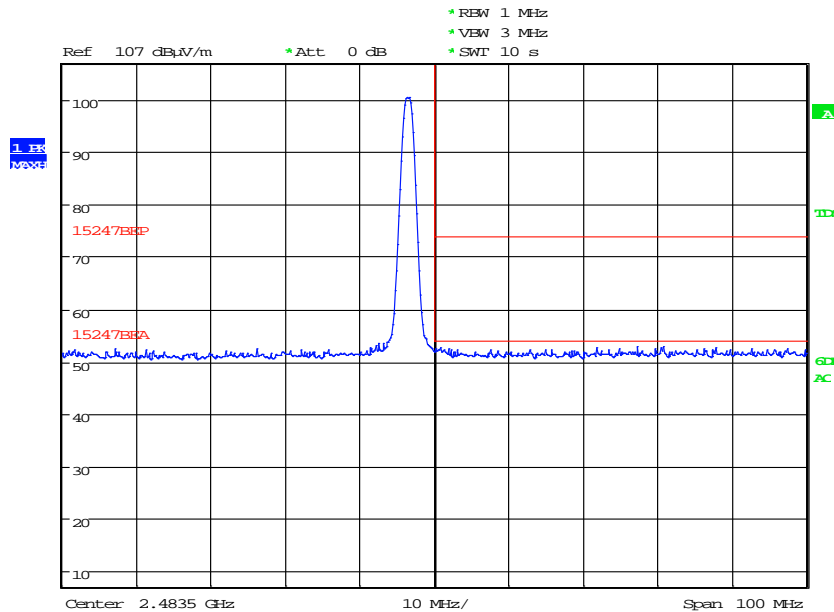


Date: 24.MAY.2023 17:28:01




Certificate # 1514.1

DESIGN ASSURANCE ENGINEERING COMPLIANCE EMC TEST REPORT



Left 3-DH5 low channel band edge.


Peak emissions are below the average limit.

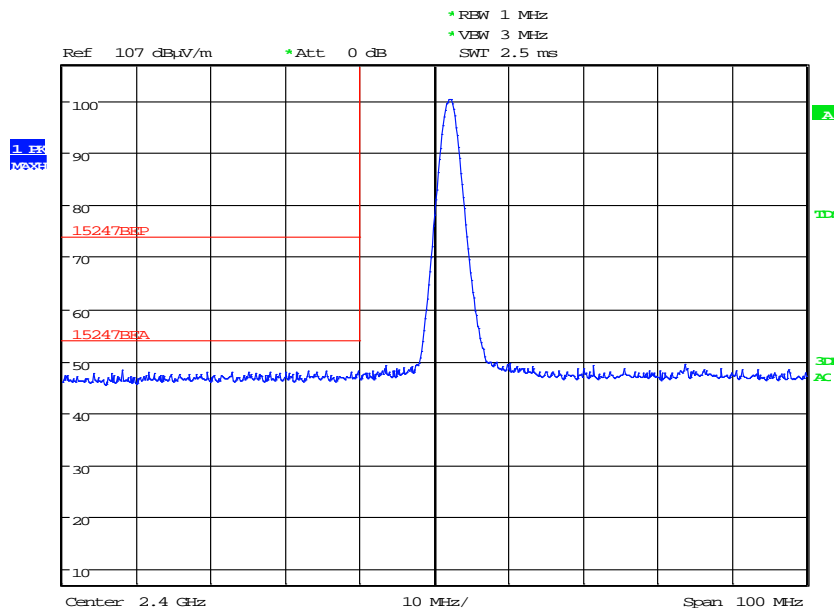

Date: 24.MAY.2023 17:09:39

Left 3 DH5 high channel band edge.

Peak emissions are below the average limit.

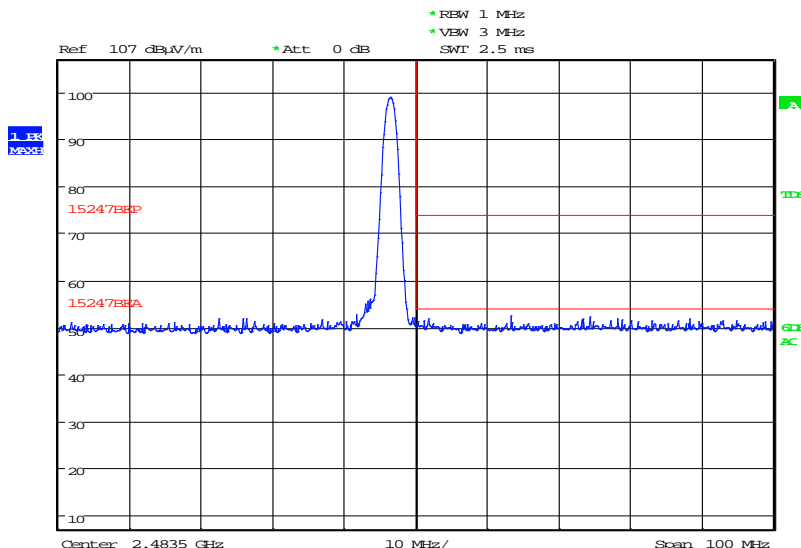

Date: 24.MAY.2023 17:33:31




Limits:

Standard	Freq Range (MHz)	Limits (dBuV QP ¹)			Comments
		Class A		Class B	
		10 m	3 m	3 m	
or RSS-GEN	30-88	39	49	40	Measurements above 1 GHz are made using average and peak detectors. Mains cables draped to floor, not bundled. *For measurements above 1 GHz, peak limits must also be met that are 20 dB higher than average limits.
	88-216	43.5	53.5	43.5	
	216-960	46.5	56.5	46	
	>960	49.5*	59.5*	54*	
CISPR 32			Class A	Class B	Mains cables bundled not draped to floor. *For measurements above 1 GHz, peak limits must also be met that are 20 dB higher than average limits.
			3 m	3 m	
	30-230		50	40	
	230-1000		57	47	
	Freq Range (GHz)				
	1-3		56*	50*	
3-6		60*	54*		
Bandwidth and Detector Settings:					
Freq. Range (MHz)	RBW (kHz)	VBW (kHz)	Detector		
30 – 1000	120	>300	QP		
> 1000	1000	>1000	Pk and AVG		

Equipment Used:

TN	Description	Model	S/N	Manufacturer	Most Recent Calibration	Calibration Due Date	Most Recent Verification	Verification Due Date
1663	EMI Test Receiver	ESU40	100098	Rohde & Schwarz	20-Mar-2023	19-Mar-2024		
2929	Mini-circuits band-edge pre-amp 300 MHz - 8 GHz 20 dB	ZX60HV-83LN+	N/A	Mini-Circuits			28-Mar-2023	27-Mar-2024
2349	Double Ridge Waveguide Horn Antenna 1-18GHz	3117	00152406	ETS Lindgren	24-Feb-2023	23-Feb-2025		
3685	Marconi Manor 3M mast position RE cable set	3 cables (TN's 2373, 2479, 2357)					28-Mar-2023	27-Mar-2024



Uncertainty:

Uncertainty Budget				
Title:	Radiated Emissions (>1GHz)			
Source of Uncertainty	Value units:± dB	Distribution	Divisor	Uncertainty (± dB)
Receiver - absolute level	0.3	Rect.	1.73	0.17
Receiver - frequency response	2.0	Rect.	1.73	1.16
Receiver - attenuator switching	0.2	Rect.	1.73	0.12
Receiver - bandwidth switching	0.2	Rect.	1.73	0.12
Receiver - display	0.5	Rect.	1.73	0.29
Antenna factor	0.4	Norm.	2.00	0.20
Antenna directivity	1.0	Norm.	2.00	0.50
Preamp correction factor	0.5	Norm.	2.00	0.25
Cable correction factor	0.5	Norm.	2.00	0.25
Site imperfection - NSA	3.0	Triang.	2.45	1.22
Test table impact	1.7	Rect.	1.73	0.98
Combined uncertainty (RSS):				2.09
Coverage factor (2 sigma):				2.00
Extended uncertainty (95% confidence):				4.17

End of report