

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM140600299702 Page: 1 of 55

FCC REPORT

Test Result:	PASS *		
Date of Issue:	2014-07-08		
Date of Test:	2014-07-01 to 2014-07-02		
Date of Receipt:	2014-06-13		
Standards:	47 CFR Part 15, Subpart C (2013)		
FCC ID:	A94418048		
Trade Mark:	_B/05/57		
Model No.(EUT):	418048		
Product Name:	Bose Bluetooth [®] Audio adapter		
Factory:	Guoguang Electric Co., Ltd		
Manufacturer:	Bose Corporation		
Applicant:	Bose Corporation		
Application No.:	SZEM1406002997RF		

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140600299702 Page: 2 of 55

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2014-07-08		Original

Authorized for issue by:		
Tested By	Rack . Unry (Back Huang) /Project Engineer	2014-07-02
Prepared By	Linton Lv (Linlin Lv)/Clerk	2014-07-08
Checked By	Emen _ Li) /Reviewer	2014-07-21

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 3 of 55

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	- ANSI C63 10 2009	
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r01 PASS	
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r01 PASS	
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)		
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r01 PASS	
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009 PASS	
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009 PASS	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 4 of 55

4 Contents

1	C	COVER PAGE	
2	V	/ERSION	2
3	т	EST SUMMARY	
4	C	CONTENTS	4
5	G	GENERAL INFORMATION	
-	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	E	QUIPMENT LIST	9
7	т	EST RESULTS AND MEASUREMENT DATA	
	7.1	ANTENNA REQUIREMENT	
	7.2	CONDUCTED EMISSIONS	
	7.3	CONDUCTED PEAK OUTPUT POWER	
	7.4	6DB OCCUPY BANDWIDTH	
	7.5	POWER SPECTRAL DENSITY	
	7.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	7.7	Spurious RF Conducted Emissions	
	7.8	RADIATED SPURIOUS EMISSION	
	7.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
		-	
8	P	PHOTOGRAPHS - EUT TEST SETUP	
	8.1	CONDUCTED EMISSION	
	8.2	RADIATED EMISSION	
	8.3	RADIATED SPURIOUS EMISSION	
9	P	PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	



Report No.: SZEM140600299702 Page: 5 of 55

5 General Information

5.1 Client Information

Applicant:	Bose Corporation	
Address of Applicant:	The Mountain, Framingham MA 01701, United States	
Manufacturer:	Bose Corporation	
Address of Manufacturer:	The Mountain, Framingham MA 01701, United States	
Factory:	Guoguang Electric Co., Ltd	
Address of Factory:	No.8 Jinghu Road Xinhua Street, Huada Reg., Guangzhou	

5.2 General Description of EUT

Product Name:	Bose Bluetooth®	[®] Audio adapter		
Model No.:	418048	418048		
Trade Mark:	BOSE			
Operation Frequency:	2402MHz~2480	MHz		
Bluetooth Version:	4.0			
	This report is for	r BLE mode.		
Modulation Type:	GFSK			
Number of Channel:	40			
Sample Type:	Portable production			
Test Power Grade:	Default transmit power 0 / -2			
Test Software of EUT:	CSR BlueSuite			
Antenna Type:	Metal monopole antenna			
Antenna Gain:	3dBi			
Power Supply:	AC adapter:	BOSE Switching Power Supply		
	Battery: Model: PSA05F-050QBT1 Input: 100-240V~0.18A 50-60Hz Output: DC5V 1.0A			
Test Voltage:	AC 120V 60Hz			
Optical Cable:	201 cm			
Audio Cable:	156 cm			
Power Supply Cord:	151 cm			
Female to RCA Cable:	18 cm			



Report No.: SZEM140600299702 Page: 6 of 55

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	
The Lowest channel	2402MHz	
The Middle channel	2440MHz	
The Highest channel	2480MHz	



Report No.: SZEM140600299702 Page: 7 of 55

5.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	1005mbar

5.4 Description of Support Units

The audio output of EUT connects a speaker and has been tested.

Description	Manufacturer	Model No.
Speaker	Supply by SGS	N/A





Report No.: SZEM140600299702 Page: 8 of 55

5.5 Test Location

All tests were performed at: SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab, No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057. Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM140600299702 Page: 9 of 55

6 Equipment List

	Conducted Emission	n			
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 10 of 55

	RE in Chamber				
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 11 of 55

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R & S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 12 of 55

7 Test results and Measurement Data

7.1 Antenna Requirement


Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

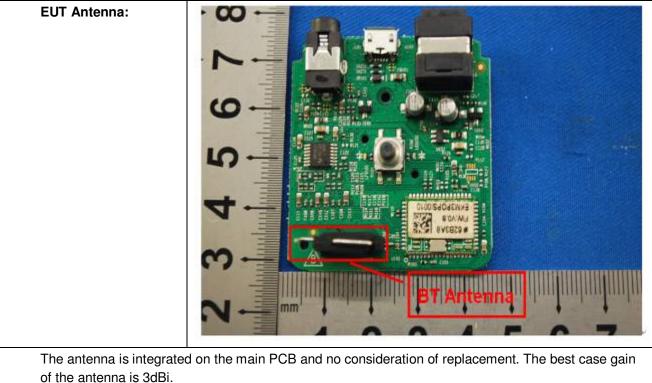






Report No.: SZEM140600299702 Page: 13 of 55

Test Requirement:	47 CFR Part 15C Section 15.	207			
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	150kHz to 30MHz				
Limit:		Limit (c	lBuV)		
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithr	n of the frequency.			
Test Procedure:	 The mains terminal distur- room. The EUT was connected to Impedance Stabilization N impedance. The power cal connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded. The tabletop EUT was place ground reference plane. A placed on the horizontal gi of the EUT shall be 0.4 m vertical ground reference p reference plane. The LISN unit under test and bonded mounted on top of the gro between the closest points the EUT and associated e 	o AC power source thro etwork) which provides bles of all other units of SN 2, which was bonde ne way as the LISN 1 for set outlet strip was used ISN provided the rating ced upon a non-metalli nd for floor-standing ar round reference plane, th a vertical ground ref from the vertical ground plane was bonded to the 1 1 was placed 0.8 m fro d to a ground reference und reference plane. T is of the LISN 1 and the quipment was at least 0	bugh a LISN 1 (Line a $50\Omega/50\mu$ H + 5Ω linear f the EUT were d to the ground or the unit being d to connect multiple g of the LISN was not c table 0.8m above the rangement, the EUT was erence plane. The rear d reference plane. The ne horizontal ground om the boundary of the e plane for LISNs his distance was EUT. All other units of 0.8 m from the LISN 2.		
		quipment was at least (um emission, the relativ les must be changed a	0.8 m from the LISN 2. ve positions of equipment		

7.2 Conducted Emissions



Report No.: SZEM140600299702 Page: 14 of 55

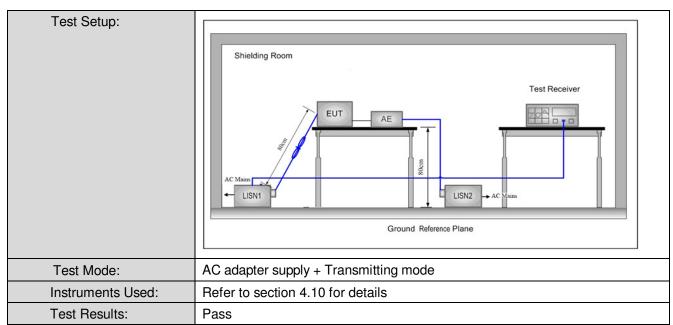




Report No.: SZEM140600299702 Page: 15 of 55

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

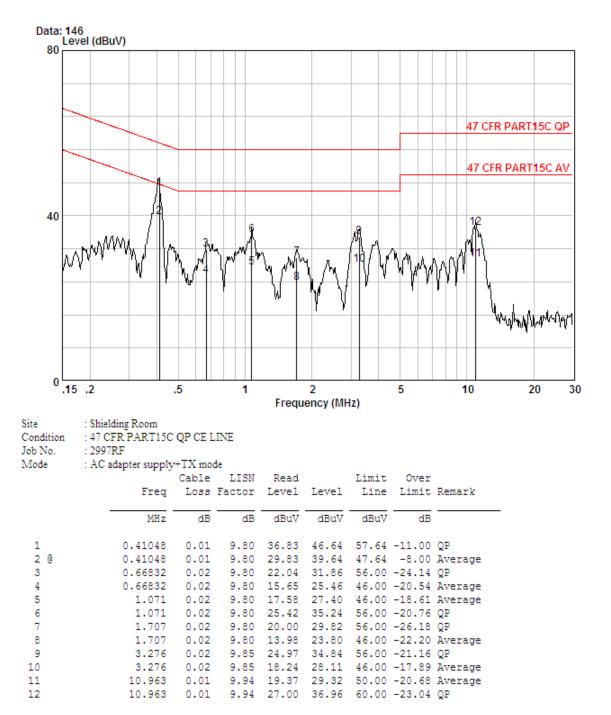



Report No.: SZEM140600299702 Page: 16 of 55

Neutral line:

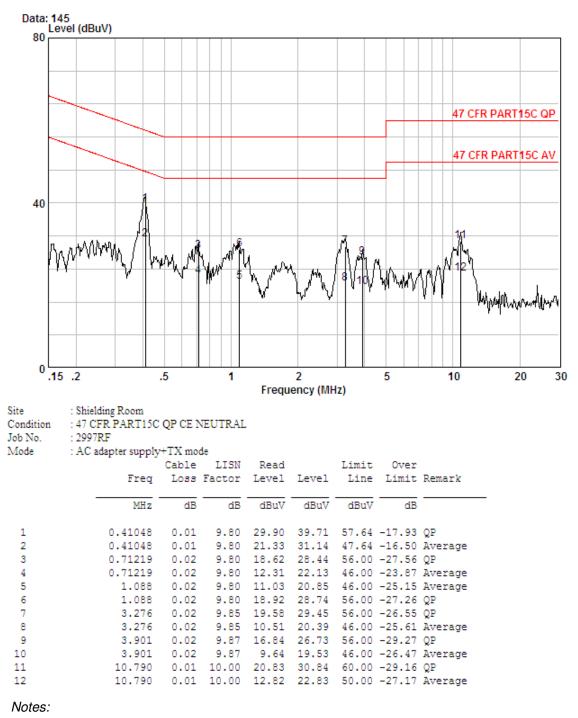

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140600299702 Page: 17 of 55

7.3 Conducted Peak Output Power


Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	KDB558074 D01 v03r01
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table
	Ground Reference Plane
	Remark:
	Offset the High-Frequency cable loss 0.5dB in the spectrum analyzer.
Limit:	30dBm
Test Mode:	Non-hopping transmitting with GFSK modulation
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

Measurement Data

GFSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-1.03	30.00	Pass			
Middle	0.36	30.00	Pass			
Highest	0.32	30.00	Pass			




Report No.: SZEM140600299702 Page: 18 of 55

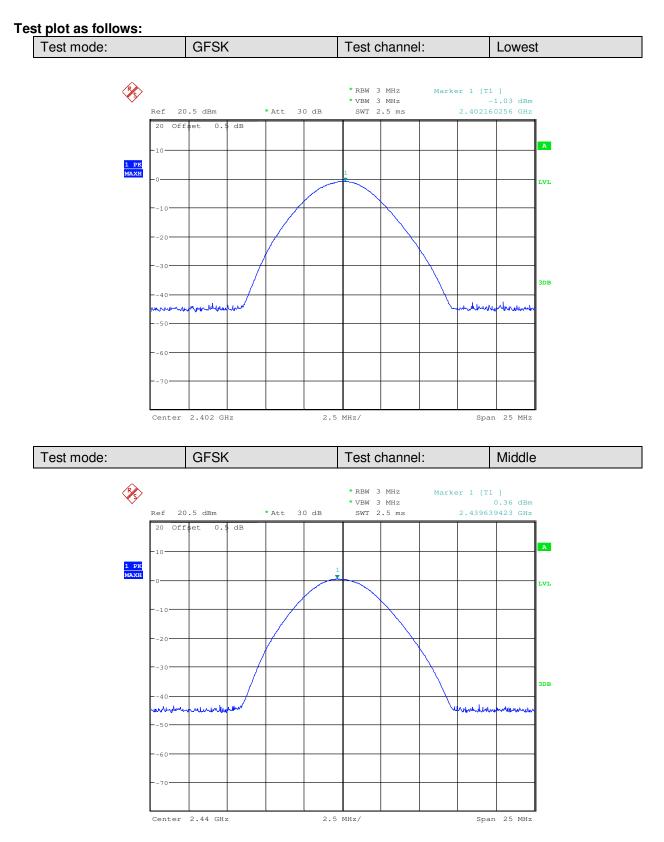



Report No.: SZEM140600299702 Page: 19 of 55

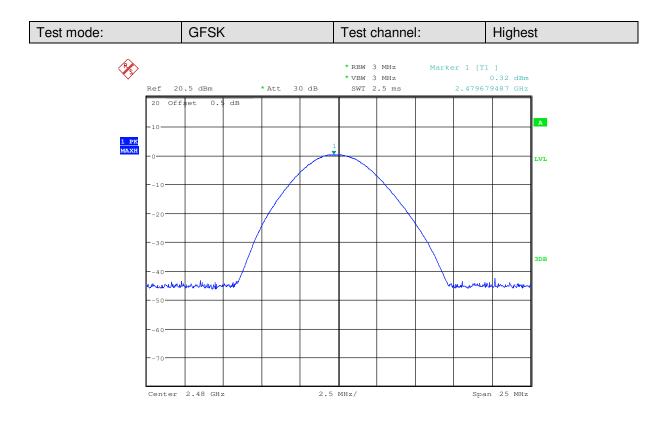



Report No.: SZEM140600299702 Page: 20 of 55

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(2) **Test Method:** KDB558074 D01 v03r01 Test Setup: Spectrum Analyzer E.U.T 0 Non-Conducted Table Ground Reference Plane Limit: ≥ 500 kHz Test Mode: Non-hopping transmitting with GFSK modulation Instruments Used: Refer to section 4.10 for details **Test Results:** Pass

7.4 6dB Occupy Bandwidth


Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.697115384615	≥500	Pass
Middle	0.692307692308	≥500	Pass
Highest	0.697115384615	≥500	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140600299702 Page: 21 of 55

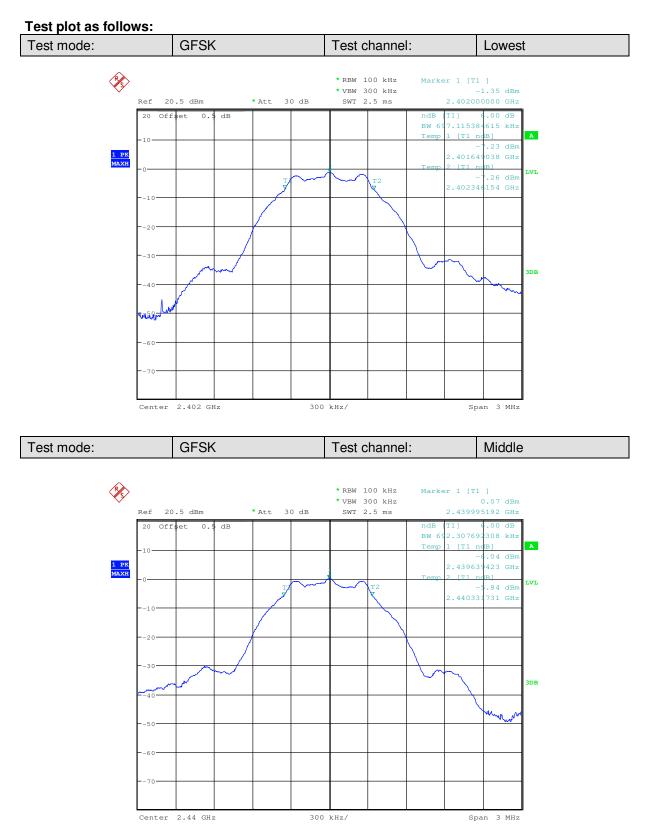



Report No.: SZEM140600299702 Page: 22 of 55

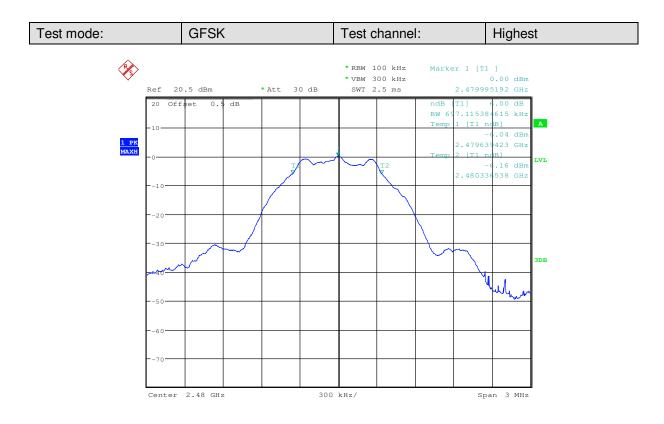



Report No.: SZEM140600299702 Page: 23 of 55

Test Requirement:	47 CFR Part 15C Section 15.247 (e)			
Test Method:	KDB558074 D01 v03r01			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Limit:	≤8.00dBm			
Exploratory Test Mode:	Non-hopping transmitting with GFSK modulation			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			

7.5 Power Spectral Density


Measurement Data

GFSK mode							
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result				
Lowest	-1.40	≤8.00	Pass				
Middle	0.00	≤8.00	Pass				
Highest	-0.08	≤8.00	Pass				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140600299702 Page: 24 of 55

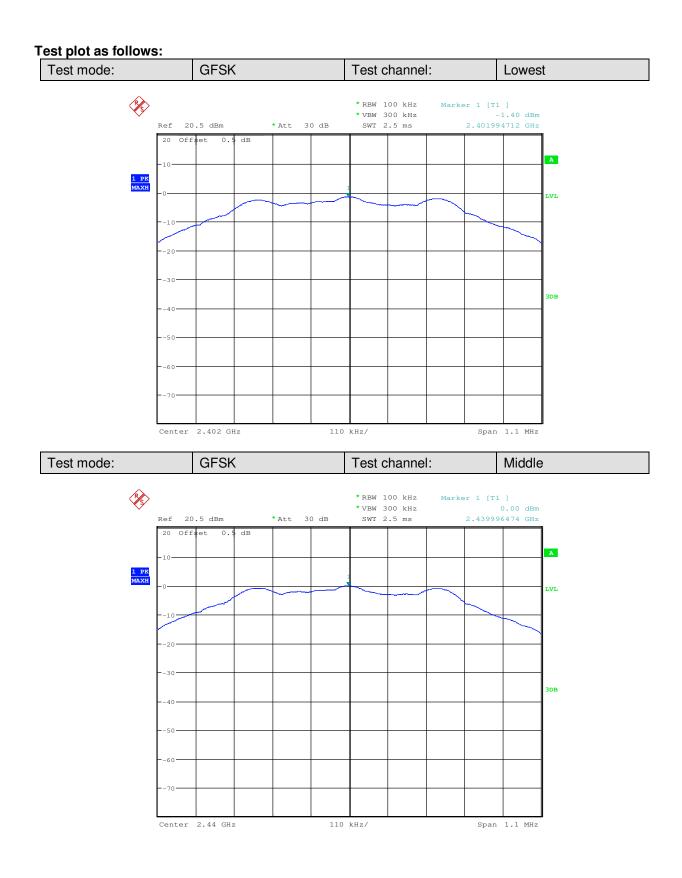



Report No.: SZEM140600299702 Page: 25 of 55

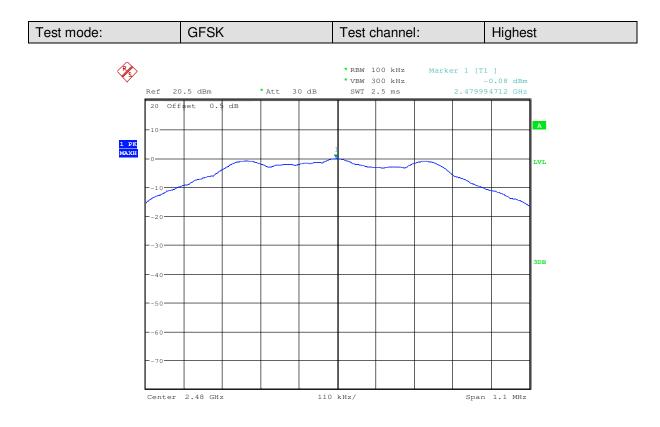



Report No.: SZEM140600299702 Page: 26 of 55


7.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	KDB558074 D01 v03r01				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:				
	Offset the High-Frequency cable loss 0.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test Mode:	Non-hopping transmitting with GFSK modulation				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 27 of 55

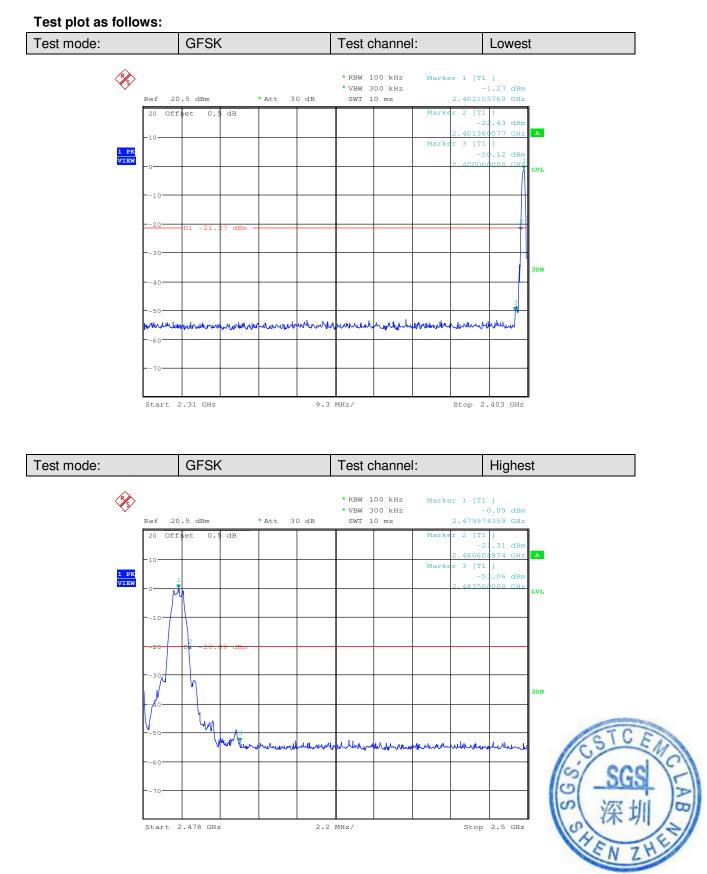



Report No.: SZEM140600299702 Page: 28 of 55

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	KDB558074 D01 v03r01			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Remark:			
	Offset the High-Frequency cable loss 0.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Non-hopping transmitting with GFSK modulation			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			


7.7 Spurious RF Conducted Emissions

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full within the limits of the company is the time of the company is determined effective of the intervention of the company of the company is determined effective of the company is determined of the company is determined of the company of the company of the company of the company is determined of the company is determined of the company of the company is determined of the company of the compa full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: SZEM140600299702 Page: 29 of 55

Test plot as follows:

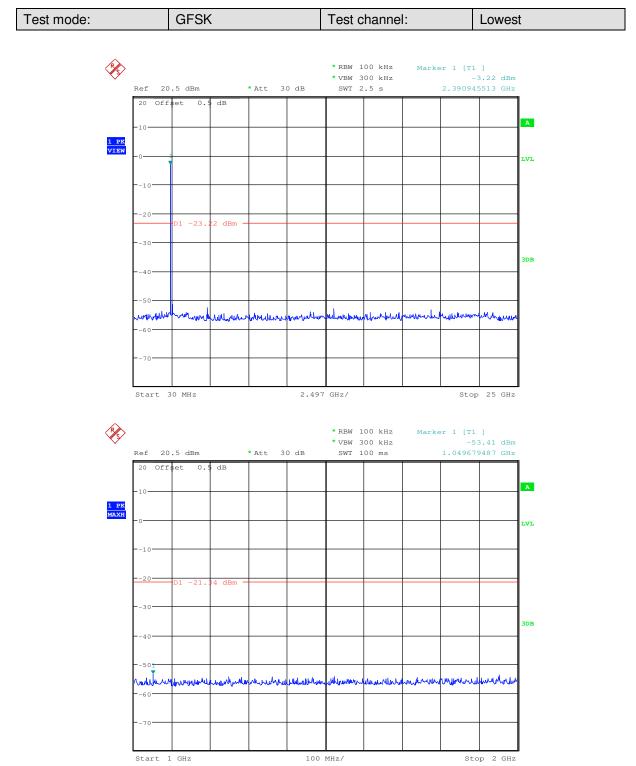




Report No.: SZEM140600299702 Page: 30 of 55

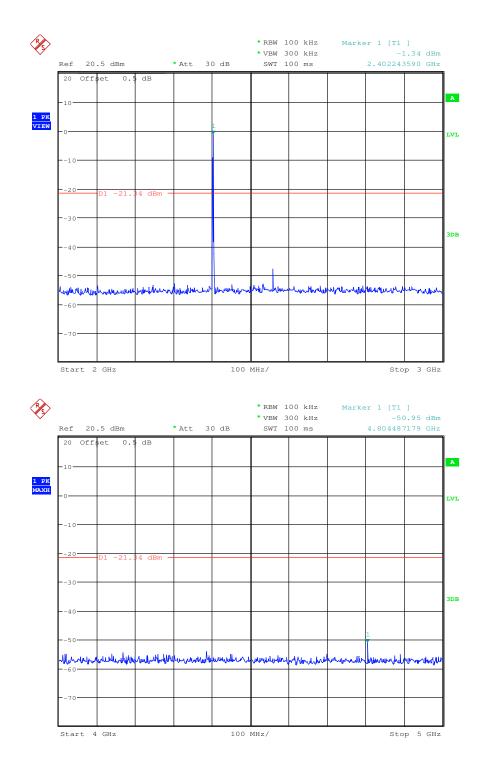




Report No.: SZEM140600299702 Page: 31 of 55

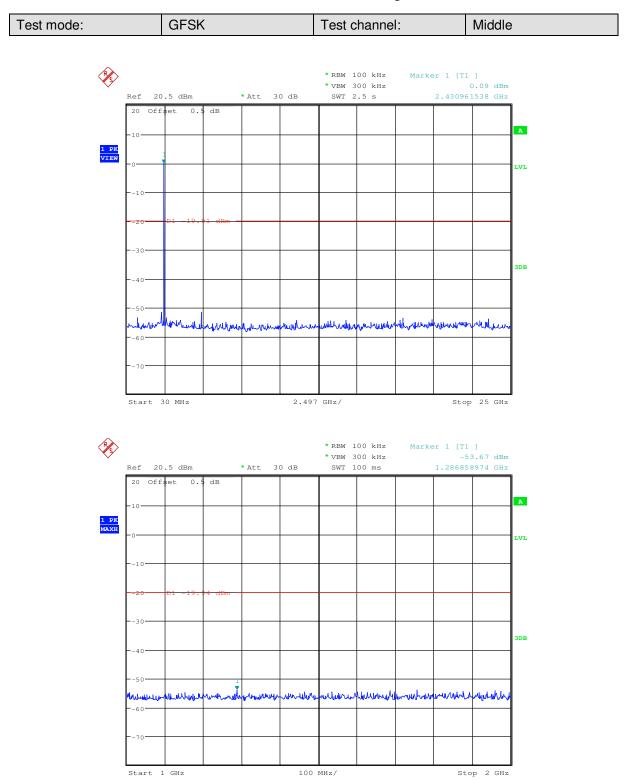




Report No.: SZEM140600299702 Page: 32 of 55

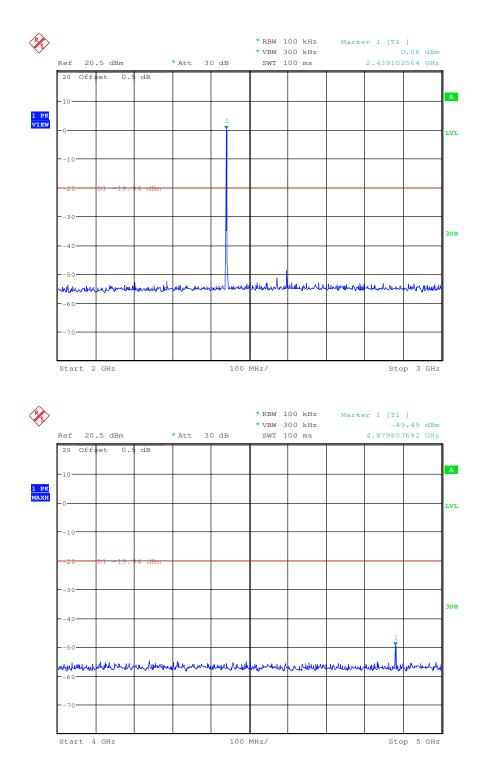




Report No.: SZEM140600299702 Page: 33 of 55

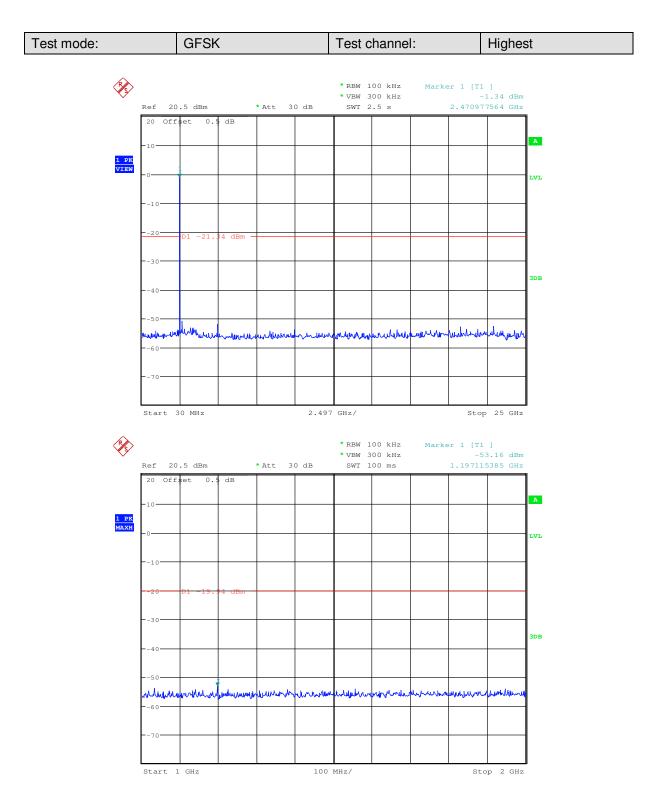



Report No.: SZEM140600299702 Page: 34 of 55

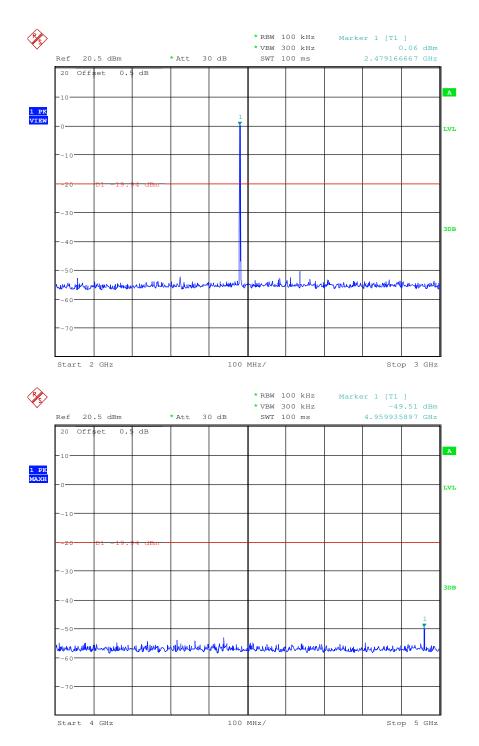

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.




Report No.: SZEM140600299702 Page: 35 of 55

7.8 Radiated Spurious Emission

7.8.1 Spurious Emiss	ions							
Test Requirement:	47 CFR Part 15C Secti	on 1	15.209 and 15	.205				
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance	leasurement Distance: 3m (Semi-Anechoic Chamber)						
Receiver Setup:	Frequency		Detector	RBW		VBW	Remark]
	0.009MHz-0.090MH	z	Peak	10kHz	2	30kHz	Peak	
	0.009MHz-0.090MH	z	Average	10kHz	2	30kHz	Average	
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	2	30kHz	Quasi-peak	
	0.110MHz-0.490MH	z	Peak	10kHz	2	30kHz	Peak	
	0.110MHz-0.490MH	z	Average	10kHz	2	30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	2	30kHz	Quasi-peak	
	30MHz-1GHz		Quasi-peak	100 kH	lz	300kHz	Quasi-peak	
	Above 1GHz		Peak	1MHz		3MHz	Peak	
			Peak	1MHz		10Hz	Average	
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)		Remark	Measureme distance (n	
	0.009MHz-0.490MHz	2	400/F(kHz)	-		-	300	
	0.490MHz-1.705MHz	24	4000/F(kHz)	-	-		30	
	1.705MHz-30MHz		30	-	-		30	
	30MHz-88MHz		100	40.0	Q	uasi-peak	3	
	88MHz-216MHz		150	43.5	Q	uasi-peak	3	
	216MHz-960MHz		200	46.0	Q	uasi-peak	3	
	960MHz-1GHz		500	54.0	Q	uasi-peak	3	
	Above 1GHz		500	54.0	Average		3	
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							
Test Setup:								



Report No.: SZEM140600299702 Page: 36 of 55

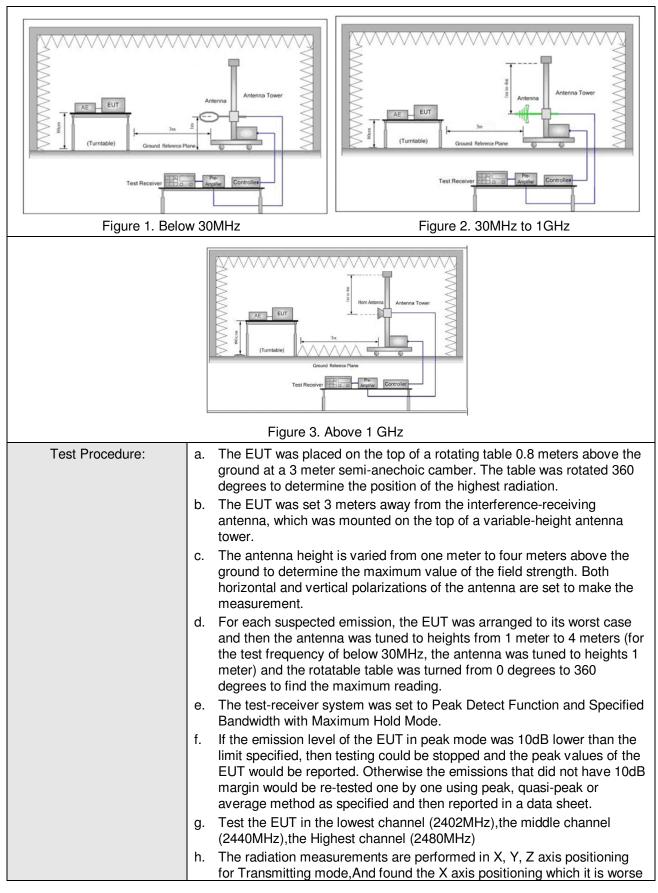

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140600299702 Page: 37 of 55


	case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting with GFSK modulation Transmitting mode, AC Charge +Transmitting mode
Final Test Mode:	Pretest the EUT at AC Charge +Transmitting mode.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass





Report No.: SZEM140600299702 Page: 38 of 55



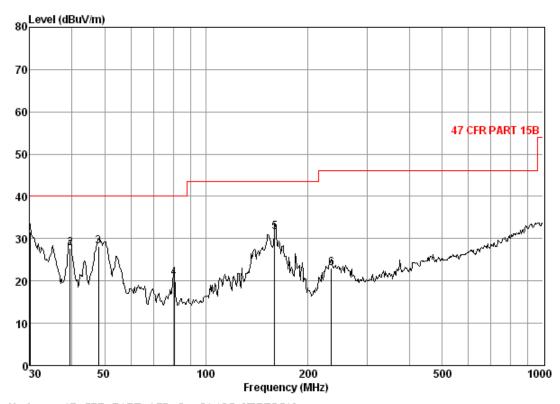

Condi	tion: 47 Cl	FR PART	'15B 3m	n 3142C	VERTICA	۱L		
Job No	o. : 2997)	RF						
Mode	: AC a	dapter	supply+	-TX mode				
		CableA	ntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_								
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	0.60	17.90	27.36	40.39	31.53	40.00	-8.47
2	39.44	0.60	11.32	27.32	43.06	27.66	40.00	-12.34
3	47.99	0.76	8.40	27.30	46.30	28.16	40.00	-11.84
4	80.36	1.10	5.28	27.23	41.57	20.72	40.00	-19.28
5	159.78	1.34	9.50	26.86	47.65	31.63	43.50	-11.87
6	234.99	1.60	8.50	26.58	39.56	23.08	46.00	-22.92



333.69

462.35

948.76

4 5

6

10.37

13.33

21.40

2.01

2.46

3.65

26.66

27.52

26.54 33.74

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140600299702 39 of 55 Page:

Test mode:

AC adapter supply + Transmitting mode Horizontal

80 Level (dBuV/m) 70 60 **47 CFR PART 15B** 50 000

										+]
4	0											
3	0					. 3.		, ma	a		فللمهمو	зл -
2	0 Carrow and a construction	Munh	1 Marilie	MM	₩V [#] *		when the production	MM .				
1												
	030	50		100	Frames	200		50	00		1	0
Job No		7RF										
Mode	: AC a Freq		ntenna	TX mode Preamp Factor	Read		Limit Line	Over Limit				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB				

39.03

38.11

24.75

26.38

46.00 -21.25

46.00 -19.62

32.25 46.00 -13.75



Report No.: SZEM140600299702 Page: 40 of 55

Transmitte	er Emiss	ion above	e 1GHz						
Test mode:	G	FSK	Test	channel:	Lowest		Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBu)	-	Over Limit (dB)	Polarization
3776.385	6.16	33.53	40.87	46.64	45.46	74	4	-28.54	Vertical
4804.000	7.44	34.70	41.63	47.00	47.51	74	4	-26.49	Vertical
5925.863	7.94	35.59	40.99	46.57	49.11	74	4	-24.89	Vertical
7206.000	8.72	35.88	39.87	47.08	51.81	74	4	-22.19	Vertical
9608.000	9.68	37.30	37.80	44.66	53.84	74	4	-20.16	Vertical
11842.690	11.17	38.74	38.21	41.45	53.15	74	4	-20.85	Vertical
3700.260	6.05	33.45	40.81	46.90	45.59	74	4	-28.41	Horizontal
4804.000	7.44	34.70	41.63	46.53	47.04	74	4	-26.96	Horizontal
5850.919	7.91	35.45	41.06	47.23	49.53	74	4	-24.47	Horizontal
7206.000	8.72	35.88	39.87	47.25	51.98	74	4	-22.02	Horizontal
9608.000	9.68	37.30	37.80	44.64	53.82	74	4	-20.18	Horizontal
11112.520	10.64	38.48	37.91	45.89	57.10	74	4	-16.90	Horizontal

Test mode:	(GFSK	Test	channel:	Lowest	Rema	ırk:	Average
11112.52	10.64	38.48	37.91	36.43	47.64	54	-6.36	Horizontal

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 41 of 55

Test mode:		GFSK	Tes	t channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3607.257	5.90	33.32	40.74	45.86	44.34	74	-29.66	Vertical
4880.000	7.48	34.59	41.68	46.88	47.27	74	-26.73	Vertical
5925.863	7.94	35.59	40.99	46.39	48.93	74	-25.07	Vertical
7320.000	8.87	35.93	39.77	46.58	51.61	74	-22.39	Vertical
9760.000	9.74	37.46	37.66	44.43	53.97	74	-20.03	Vertical
11283.550	10.77	38.44	37.98	44.59	55.82	74	-18.18	Vertical
3700.260	6.05	33.45	40.81	46.87	45.56	74	-28.44	Horizontal
4880.000	7.48	34.59	41.68	46.83	47.22	74	-26.78	Horizontal
5940.967	7.95	35.62	40.97	46.66	49.26	74	-24.74	Horizontal
7320.000	8.87	35.93	39.77	46.83	51.86	74	-22.14	Horizontal
9760.000	9.74	37.46	37.66	44.19	53.73	74	-20.27	Horizontal
12303.620	11.41	39.21	38.40	40.98	53.20	74	-20.80	Horizontal

Test mode:	(GFSK	Te	est channel:	Middle		Rema	rk:	Average
11283.55	10.77	38.44	37.98	35.21	46.44	5	54	-7.56	Vertical



Report No.: SZEM140600299702 Page: 42 of 55

Test mode:		GFSK	Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3738.129	6.11	33.49	40.84	46.12	44.88	74	-29.12	Vertical
4960.000	7.53	34.46	41.74	46.99	47.24	74	-26.76	Vertical
5971.290	7.97	35.64	40.94	47.92	50.59	74	-23.41	Vertical
7440.000	9.01	35.98	39.67	46.32	51.64	74	-22.36	Vertical
9920.000	9.81	37.63	37.53	43.54	53.45	74	-20.55	Vertical
11963.890	11.26	38.87	38.26	41.99	53.86	74	-20.14	Vertical
3672.110	6.00	33.41	40.80	46.83	45.44	74	-28.56	Horizontal
4960.000	7.53	34.46	41.74	47.21	47.46	74	-26.54	Horizontal
6094.137	8.01	35.82	40.84	47.16	50.15	74	-23.85	Horizontal
7440.000	9.01	35.98	39.67	46.61	51.93	74	-22.07	Horizontal
9920.000	9.81	37.63	37.53	43.19	53.10	74	-20.90	Horizontal
11027.980	10.59	38.49	37.88	42.45	53.65	74	-20.35	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM140600299702 Page: 43 of 55

7.9 Restricted bands around fundamental frequency

7.9 Restricted barr	us around rundame	intal inequency	
Test Requirement:	47 CFR Part 15C Section 1	5.209 and 15.205	
Test Method:	ANSI C63.10 2009		
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			
Figure 1. 30ME Test Procedure:	Az to 1GHz a. The EUT was place the ground at a 3 m rotated 360 degrees radiation.	Figure 2. Above d on the top of a rotating to eter semi-anechoic cambe s to determine the position	ve 1 GHz rable 0.8 meters above er. The table was n of the highest
"This document is issued by the Com	 antenna, which was tower. c. The antenna height the ground to detern Both horizontal and make the measurer d. For each suspected case and then the a meters and the rota degrees to find the e. The test-receiver sy Specified Bandwidth f. Place a marker at the transmit frequency frequency for each power of the test of test of	emission, the EUT was a intenna was tuned to heig table table was turned from maximum reading. Instem was set to Peak Det in with Maximum Hold Moo the end of the restricted ba to show compliance. Also stricted bands. Save the sp wer and modulation for low	variable-height antenna to four meters above of the field strength. he antenna are set to rranged to its worst hts from 1 meter to 4 m 0 degrees to 360 rect Function and de. nd closest to the measure any pectrum analyzer plot. west and highest



Report No.: SZEM140600299702 Page: 44 of 55

	 g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting with GFSK modulation Transmitting mode, AC Charge +Transmitting mode
Final Test Mode:	Pretest the EUT at AC Charge +Transmitting mode.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 45 of 55


Test plot as follows:

t mode:	GFSK		Test chanr	nel: Lo	owest	Remark:	Peak	Vertical
ata: 37 Level (dBu\	//m)							
120]
							2	
							1	
						ECC DA	RT15(>16) PK	
60								
						1		
manne	man man	mon	eron marine	monor	manha	mound	the Man	
0 2310 232	20		2350				240)5
2010 20	20		Frequence	:y (MHz)			210	
	ART15(>1G) PK	3m VERTI	CAL					
No. : 2997R Je : 2402 B								
. 24021		CableAn	ntenna Pres	amp Re	ad	Limit	Over	
	Freq	Loss 1	factor Fact	tor Lev	el Leve	l Line	Limit	
	MHz	dB	dB/m	dB dB	uV dBuV/:	m dBuV/m	dB	
	2390.000	2.98	32.51 39	.85 48.	82 44.4	7 74.00 -	-29.53	



Report No.: SZEM140600299702 Page: 46 of 55

Test mode: GFSK Test channel: Lowest Remark: Peak Horizontal
--

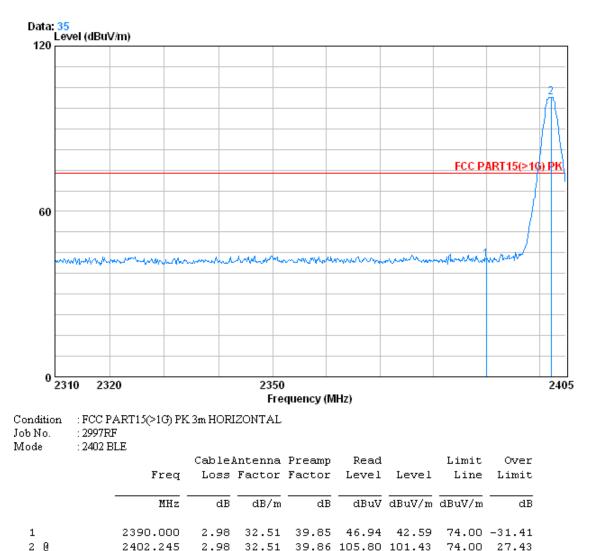

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140600299702 Page: 47 of 55

Test mode: GFSK	Test channel:	Lowest	Remark:	Average	Vertical
-----------------	---------------	--------	---------	---------	----------


Data: 38 Level (dBuV/m) 120 a 60 FCC PART15(>1G) AV 0 2310 2320 2350 2405 Frequency (MHz) Condition : FCC PART15(>1G) AV 3m VERTICAL : 2997RF Job No. Mode : 2402 BLE CableAntenna Preamp Read Limit Over Frea Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 2390.000 2.98 39.85 36.56 32.21 1 32.51 54.00 -21.79 20 2402.150 2.98 32.51 39.86 86.62 82.25 54.00 28.25





Report No.: SZEM140600299702 Page: 48 of 55

Test mode: GFSK	Test channel:	Lowest	Remark:	Average	Horizontal
-----------------	---------------	--------	---------	---------	------------

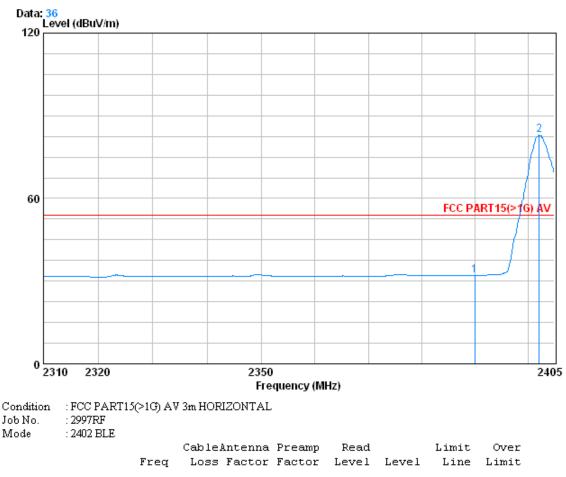


	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2402.150							



Report No.: SZEM140600299702 Page: 49 of 55

Test mode: GFSK	Test channel:	Highest	Remark:	Peak	Vertical
-----------------	---------------	---------	---------	------	----------

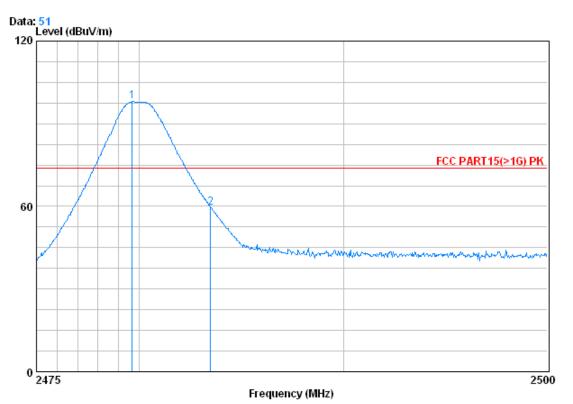

Condition : FCC PART15(>1G) PK 3m VERTICAL Job No. : 2997RF


Mode : 2480 BLE

101046	Fre		Antenna Factor	-			Limit Line	Over Limit	
	MF	iz dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
10 2	2479.67 2483.50		32.67 32.67						



Report No.: SZEM140600299702 Page: 50 of 55

Test mode: GFSK	Test channel:	Highest	Remark:	Peak	Horizontal
-----------------	---------------	---------	---------	------	------------

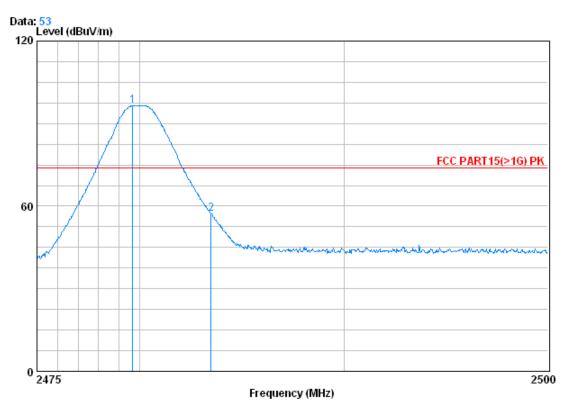

Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job No : 2997BF


100140.	. 277)10.
Mode	· 2420 BLE

wode	. 2460 BLE F1		Antenna Factor	-			Limit Line	Over Limit
	1	MHz dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2479. 2483.		32.67 32.67					



Report No.: SZEM140600299702 Page: 51 of 55

Test mode: GFSK	Test channel:	Highest	Remark:	Average	Vertical
-----------------	---------------	---------	---------	---------	----------

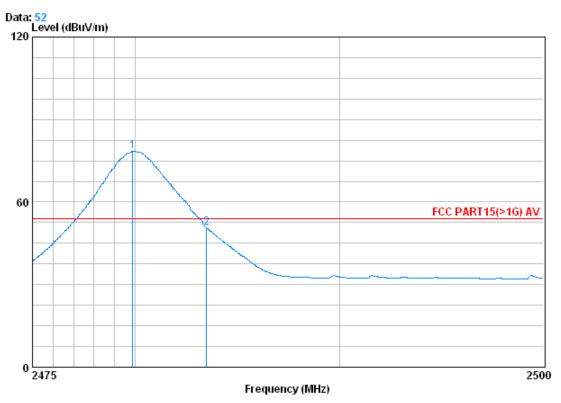

Condition	FCC PART15(>1G) AV 3m VERTICAL


Job No. : 2997RF Mode : 2480 BLE

Mode	:2460 BLE	Cable q Loss		Preamp Factor	Read Level		Limit Line	Over Limit	
	МН	z dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
10 2	2479.87 2483.50						54.00 54.00		



Report No.: SZEM140600299702 Page: 52 of 55

Test mode: GFSK	Test channel:	Highest	Remark:	Average	Horizontal
-----------------	---------------	---------	---------	---------	------------

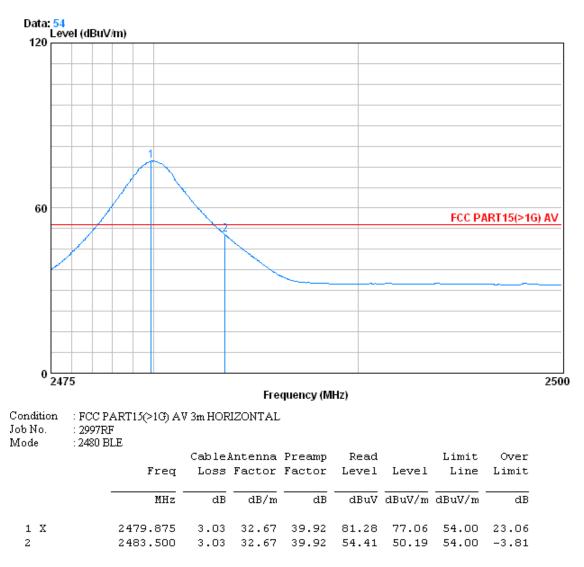

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor



Report No.: SZEM140600299702 Page: 53 of 55

8 Photographs - EUT Test Setup

Test model No.: 418048

8.1 Conducted Emission



8.2 Radiated Emission





Report No.: SZEM140600299702 Page: 54 of 55



8.3 Radiated Spurious Emission



Report No.: SZEM140600299702 Page: 55 of 55

9 Photographs - EUT Constructional Details

Refer to Report No. SZEM140600299701 for EUT external and internal photos.