

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Report No.:** RFBHWX-WTW-P23120571-2 R1

**FCC ID:** A94442591

**Product:** Bluetooth Speaker

**Brand:** Bose

**Model No.:** 442591

**Received Date:** 2023/12/22

**Test Date:** 2024/1/24 ~ 2024/4/14

**Issued Date:** 2024/4/26

**Applicant:** Bose Corporation

**Address:** The Mountain, Framingham, MA 01701 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

**FCC Registration /** 788550 / TW0003

**Designation Number:**

**Approved by:** Jeremy Lin, **Date:** 2024/4/26  
Jeremy Lin / Project Engineer

This test report consists of 46 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Celine Chou / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us-our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description .....	7
3.2 Antenna Description of EUT .....	8
3.3 Channel List .....	9
3.4 Test Mode Applicability and Tested Channel Detail .....	10
3.5 Duty Cycle of Test Signal .....	11
3.6 Test Program Used and Operation Descriptions .....	12
3.7 Connection Diagram of EUT and Peripheral Devices .....	12
3.8 Configuration of Peripheral Devices and Cable Connections .....	12
<b>4 Test Instruments</b> .....	<b>13</b>
4.1 RF Output Power .....	13
4.2 Number of Hopping Frequency Used .....	13
4.3 Dwell Time on Each Channel .....	13
4.4 Hopping Channel Separation .....	13
4.5 20 dB Bandwidth .....	13
4.6 Conducted Out of Band Emissions .....	13
4.7 AC Power Conducted Emissions .....	14
4.8 Unwanted Emissions below 1 GHz .....	15
4.9 Unwanted Emissions above 1 GHz .....	16
<b>5 Limits of Test Items</b> .....	<b>17</b>
5.1 RF Output Power .....	17
5.2 Number of Hopping Frequency Used .....	17
5.3 Dwell Time on Each Channel .....	17
5.4 Hopping Channel Separation .....	17
5.5 20 dB Bandwidth .....	17
5.6 Conducted Out of Band Emissions .....	17
5.7 AC Power Conducted Emissions .....	17
5.8 Unwanted Emissions below 1 GHz .....	18
5.9 Unwanted Emissions above 1 GHz .....	18
<b>6 Test Arrangements</b> .....	<b>19</b>
6.1 RF Output Power .....	19
6.1.1 Test Setup .....	19
6.1.2 Test Procedure .....	19
6.2 Number of Hopping Frequency Used .....	19
6.2.1 Test Setup .....	19
6.2.2 Test Procedure .....	19
6.3 Dwell Time on Each Channel .....	20
6.3.1 Test Setup .....	20
6.3.2 Test Procedure .....	20
6.4 Hopping Channel Separation .....	20
6.4.1 Test Setup .....	20
6.4.2 Test Procedure .....	20
6.5 20 dB Bandwidth .....	21
6.5.1 Test Setup .....	21
6.5.2 Test Procedure .....	21
6.6 Conducted Out of Band Emissions .....	21
6.6.1 Test Setup .....	21
6.6.2 Test Procedure .....	21
6.7 AC Power Conducted Emissions .....	22



6.7.1	Test Setup .....	22
6.7.2	Test Procedure .....	22
6.8	Unwanted Emissions below 1 GHz .....	23
6.8.1	Test Setup .....	23
6.8.2	Test Procedure .....	24
6.9	Unwanted Emissions above 1 GHz .....	25
6.9.1	Test Setup .....	25
6.9.2	Test Procedure .....	25
<b>7</b>	<b>Test Results of Test Item .....</b>	<b>26</b>
7.1	RF Output Power .....	26
7.2	Number of Hopping Frequency Used .....	27
7.3	Dwell Time on Each Channel .....	28
7.4	Hopping Channel Separation .....	29
7.5	20 dB Bandwidth .....	30
7.6	Conducted Out of Band Emissions .....	31
7.7	AC Power Conducted Emissions .....	33
7.8	Unwanted Emissions below 1 GHz .....	35
7.9	Unwanted Emissions above 1 GHz .....	37
<b>8</b>	<b>Pictures of Test Arrangements .....</b>	<b>45</b>
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>46</b>

## Release Control Record

Issue No.	Description	Date Issued
RFBHWX-WTW-P23120571-2	Original release.	2024/3/15
RFBHWX-WTW-P23120571-2 R1	Reduced the power, therefore revised the test data of section 7.1 ~ section 7.6	2024/4/26

## 1 Certificate

**Product:** Bluetooth Speaker  
**Brand:** Bose  
**Test Model:** 442591  
**Sample Status:** Engineering sample  
**Applicant:** Bose Corporation  
**Test Date:** 2024/1/24 ~ 2024/4/14  
**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
**Measurement procedure:** ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247 (a)(1)	RF Output Power	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	Hopping Channel Separation	Pass	Meet the requirement of limit.
15.247(a)(1)	20 dB Bandwidth	-	Refer to Note 1
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -16.63 dB at 3.31800 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -10.3 dB at 215.27 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -6.6 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

### Notes:

1. If the Frequency Hopping System operating in 2400-2483.5 MHz band and the output power less than 125 mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
Dwell Time on Each Channel	-	0.0218
Hopping Channel Separation	-	390 Hz
20 dB Bandwidth	-	206.5 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.79 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.88 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.64 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	Bluetooth Speaker
Brand	Bose
Test Model	442591
Status of EUT	Engineering sample
Power Supply Rating	5 Vdc from host equipment or adapter 3.67 Vdc from battery
Modulation Type	$\pi/4$ QPSK (HSL2, HSL3) $\pi/4$ DQPSK (HSL4) 8PSK (HSL5) D8PSK (HSL6)
Modulation Technology	FHSS
Transfer Rate	Up to 6 Mbps
Operating Frequency	2.404 GHz ~ 2.478 GHz
Number of Channel	38
Output Power	8.035 mW (9.05 dBm)

Note:

1. The EUT uses following accessories.

Battery		
Brand	Model	Specification
Bose	083289	Manufacturer: Inventus Power, Inc. Power Rating: 3.67 Vdc

USB Cable		
Brand	Model	Specification
Bose	826383	0.5 m non-shielded cable without core

2. Pre-Scan HSL2, HSL3, HSL4, HSL5 and HSL6, HSL2 and HSL6 were worst-cases and chosen for final test.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	Gain (dBi)	Antenna Type	Connector Type
	2400~2480 MHz		
1	5.05	Inverted-F PCB	none(like solder)

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.



### 3.3 Channel List

38 channels are provided for HSL-C:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460		
10	2422	20	2442	30	2462		

### 3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	X-axis/ Y-axis/ Z-axis Worst Condition: Y-axis


Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel & Tested Frequency	Modulation	Data Rate Parameter
RF Output Power	HSL-C 2M	1, 19, 38	$\pi/4$ QPSK	2Mb/s
	HSL-C 6M	1, 19, 38	D8PSK	6Mb/s
Number of Hopping Frequency Used	HSL-C 2M	Hopping	$\pi/4$ QPSK	2Mb/s
	HSL-C 6M	Hopping	D8PSK	6Mb/s
Dwell Time on Each Channel	HSL-C 2M	Hopping	$\pi/4$ QPSK	2Mb/s
	HSL-C 6M	Hopping	D8PSK	6Mb/s
Hopping Channel Separation / 20 dB Bandwidth	HSL-C 2M	1, 19, 38	$\pi/4$ QPSK	2Mb/s
	HSL-C 6M	1, 19, 38	D8PSK	6Mb/s
Conducted Out of Band Emissions	HSL-C 2M	Hopping 1, 19, 38	$\pi/4$ QPSK	2Mb/s
	HSL-C 6M	Hopping 1, 19, 38	D8PSK	6Mb/s
AC Power Conducted Emissions	HSL-C 2M	38	$\pi/4$ QPSK	2Mb/s
Unwanted Emissions below 1 GHz	HSL-C 2M	38	$\pi/4$ QPSK	2Mb/s
Unwanted Emissions above 1 GHz	HSL-C 2M	1, 19, 38	$\pi/4$ QPSK	2Mb/s
	HSL-C 6M	1, 19, 38	D8PSK	6Mb/s

### 3.5 Duty Cycle of Test Signal

**HSL-C 2M:** Duty cycle = 0.4 ms / 100 ms x 100% = 0.4%


**HSL-C 6M:** Duty cycle = 0.4 ms / 100 ms x 100% = 0.4%

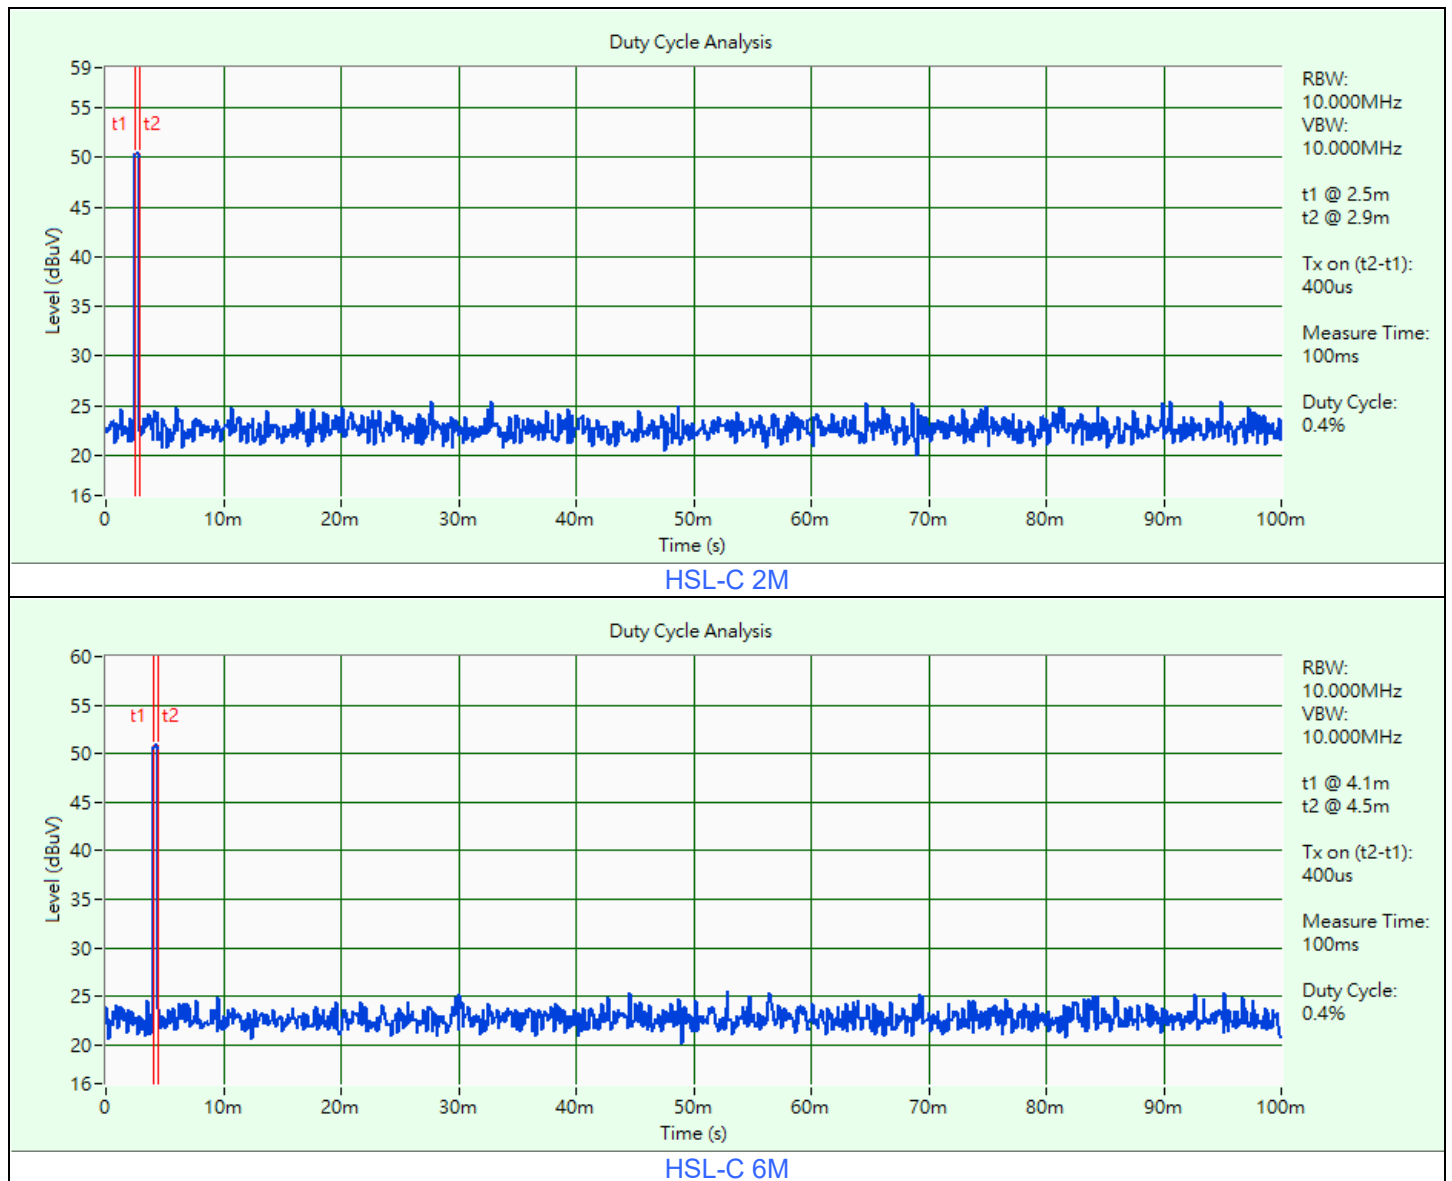

### 3.6 Test Program Used and Operation Descriptions

Controlling software Blue Test3 version: 3.3.15.1537 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

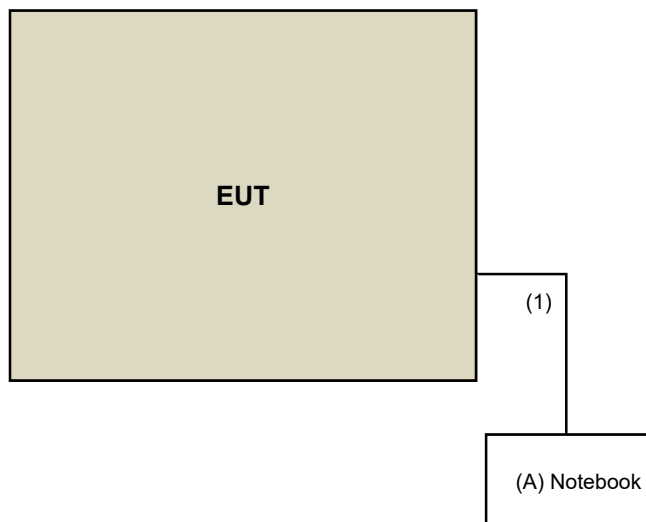

-----  
**Under Table**

-----  
**Remote Site**

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Notebook	DELL	E5430	2RL3YW1	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB Cable	1	0.5	N	0	Accessory of EUT

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2024/1/21	2025/1/20
Wideband Power Sensor Keysight	N1923A	MY58020002	2024/1/18	2025/1/17
		MY58140009	2024/1/18	2025/1/17

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/3/1 ~ 2024/4/14

### 4.2 Number of Hopping Frequency Used

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/3/1 ~ 2024/4/14

### 4.3 Dwell Time on Each Channel

Refer to section 4.2 to get information of the instruments.

### 4.4 Hopping Channel Separation

Refer to section 4.2 to get information of the instruments.

### 4.5 20 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

### 4.6 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

#### 4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance HUBER+SUHNER	E1-011315	13	2023/11/22	2024/11/21
50 ohm terminal resistance	E1-011279	04	2023/11/22	2024/11/21
	E1-011280	05	2023/11/22	2024/11/21
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2023/11/7	2024/11/6
EMI Test Receiver R&S	ESCI	100613	2023/12/4	2024/12/3
Fixed Attenuator Mini-Circuits	HAT-10+	PAD-COND1-01	2024/1/6	2025/1/5
LISN R&S	ENV216	101826	2023/3/23	2024/3/22
	ESH3-Z5	100311	2023/9/6	2024/9/5
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2024/1/6	2025/1/5
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2023/8/31	2024/8/30

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2024/1/26

#### 4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-155	2023/10/13	2024/10/12
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Loop Antenna Electro-Metrics	EM-6879	269	2023/9/23	2024/9/22
Loop Antenna TESEQ	HLA 6121	45745	2023/8/8	2024/8/7
Preamplifier Agilent	8447D	2944A10631	2023/5/7	2024/5/6
Preamplifier EMCI	EMC001340	980201	2023/9/27	2024/9/26
RF Coaxial Cable Woken	8D-FB	Cable-CH4-01	2023/7/8	2024/7/7
Signal & Spectrum Analyzer R&S	FSW43	101582	2023/4/13	2024/4/12
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2024/1/26

#### 4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower inn-co GmbH	MA 4000	010303	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-408	2023/11/12	2024/11/11
	BBHA 9170	9170-480	2023/11/12	2024/11/11
		BBHA9170241	2023/10/16	2024/10/15
		BBHA9170243	2023/11/12	2024/11/11
Preamplifier EMCI	EMC 184045	980116	2023/9/27	2024/9/26
Preamplifier Keysight	83017A	MY53270295	2023/5/7	2024/5/6
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2023/7/8	2024/7/7
	EMC102-KM-KM-3000	150929	2023/7/8	2024/7/7
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03(250724)	2023/5/7	2024/5/6
	Sucoflex 104	MY 13380+295012/04	2023/5/7	2024/5/6
Signal & Spectrum Analyzer R&S	FSW43	101582	2023/4/13	2024/4/12
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 3.
2. Tested Date: 2024/1/24



## 5 Limits of Test Items

### 5.1 RF Output Power

The Maximum Output Power Measurement is 125 mW (21 dBm).

### 5.2 Number of Hopping Frequency Used

At least 15 channels frequencies, and should be equally spaced.

### 5.3 Dwell Time on Each Channel

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 5.4 Hopping Channel Separation

At least 25 kHz or two-third of 20 dB hopping channel bandwidth (whichever is greater).

### 5.5 20 dB Bandwidth

Maximum bandwidth is not specified.

### 5.6 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

## 5.8 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Notes:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

## 5.9 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


**Notes:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup

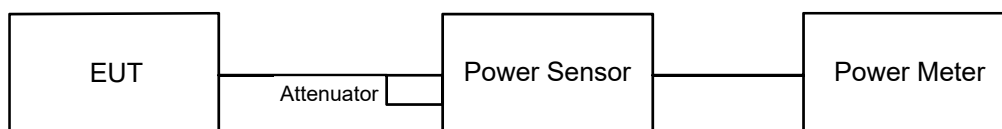

#### 6.1.2 Test Procedure

##### Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

##### Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 6.2 Number of Hopping Frequency Used

#### 6.2.1 Test Setup




#### 6.2.2 Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

### 6.3 Dwell Time on Each Channel

#### 6.3.1 Test Setup




#### 6.3.2 Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

### 6.4 Hopping Channel Separation

#### 6.4.1 Test Setup




#### 6.4.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

## 6.5 20 dB Bandwidth

### 6.5.1 Test Setup




### 6.5.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

## 6.6 Conducted Out of Band Emissions

### 6.6.1 Test Setup



### 6.6.2 Test Procedure

#### MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW  $\geq$  300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW  $\geq$  300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

## 6.7 AC Power Conducted Emissions

### 6.7.1 Test Setup

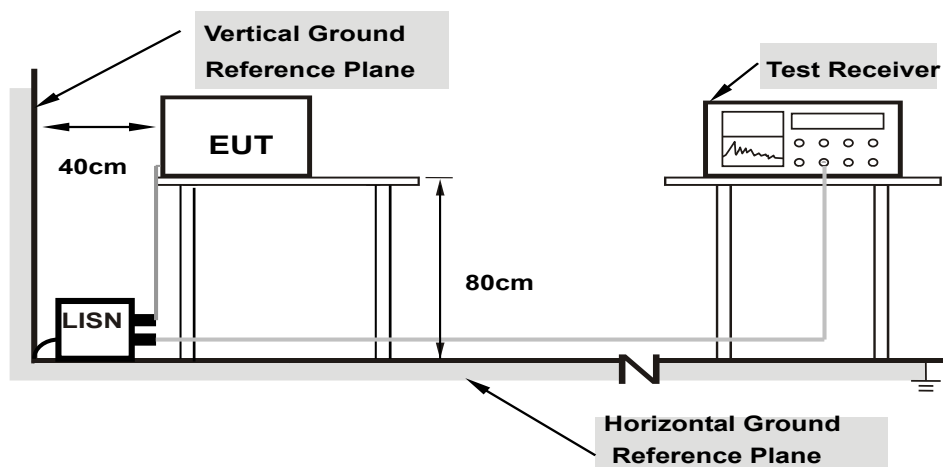

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.8 Unwanted Emissions below 1 GHz

### 6.8.1 Test Setup

#### For Radiated emission below 30 MHz

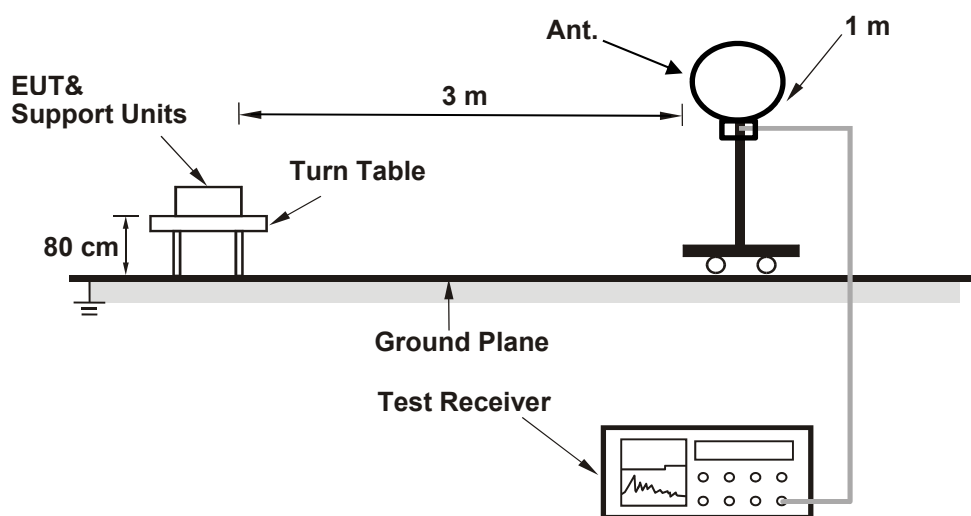

#### For Radiated emission above 30 MHz

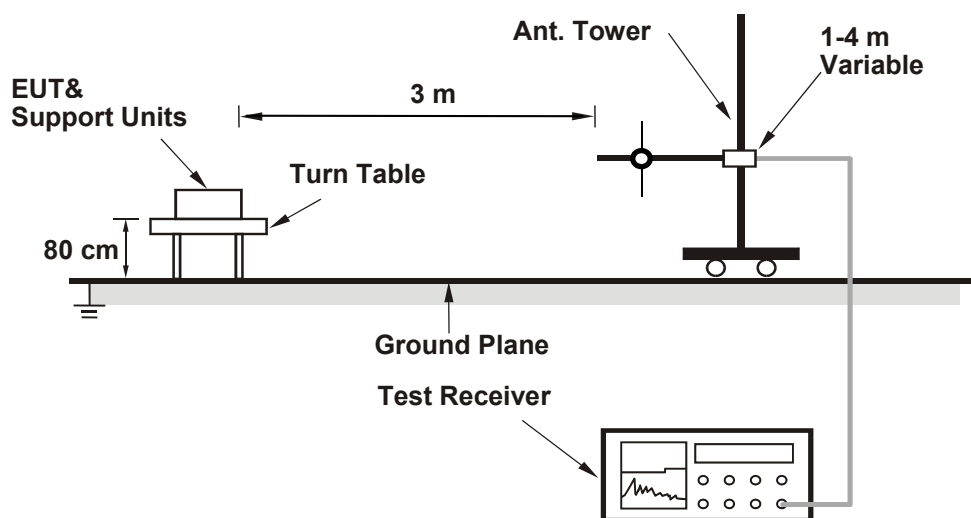

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.8.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.


#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.



## 6.9 Unwanted Emissions above 1 GHz

### 6.9.1 Test Setup

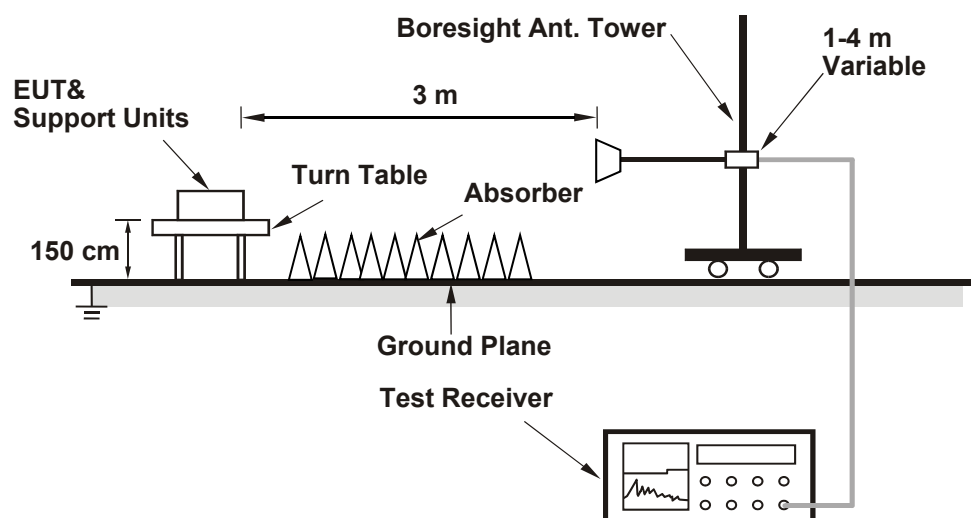

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.9.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- According to ANSI C63.10 section 6.6.4 and 4.1.4.2.2. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. For duty cycle correction factor values, see the Test Signal Duty Cycle section in this report.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 RF Output Power

Input Power:	120 Vac, 60 Hz (System)	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	-------------------------	---------------------------	--------------	------------	-----------

#### For Peak Power

##### HSL-C 2M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2404	6.339	8.02	21	Pass
19	2440	6.902	8.39	21	Pass
38	2478	6.902	8.39	21	Pass

Note: The antenna gain is 5.05 dBi < 6 dBi, so the output power limit shall not be reduced.

##### HSL-C 6M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2404	7.031	8.47	21	Pass
19	2440	7.962	9.01	21	Pass
38	2478	8.035	9.05	21	Pass

Note: The antenna gain is 5.05 dBi < 6 dBi, so the output power limit shall not be reduced.

#### For Average Power

##### HSL-C 2M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2404	3.926	5.94
19	2440	4.395	6.43
38	2478	4.256	6.29


##### HSL-C 6M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2404	3.793	5.79
19	2440	4.416	6.45
38	2478	4.315	6.35

## 7.2 Number of Hopping Frequency Used


Input Power:	120 Vac, 60 Hz (System)	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	-------------------------	---------------------------	--------------	------------	-----------

### HSL-C 2M

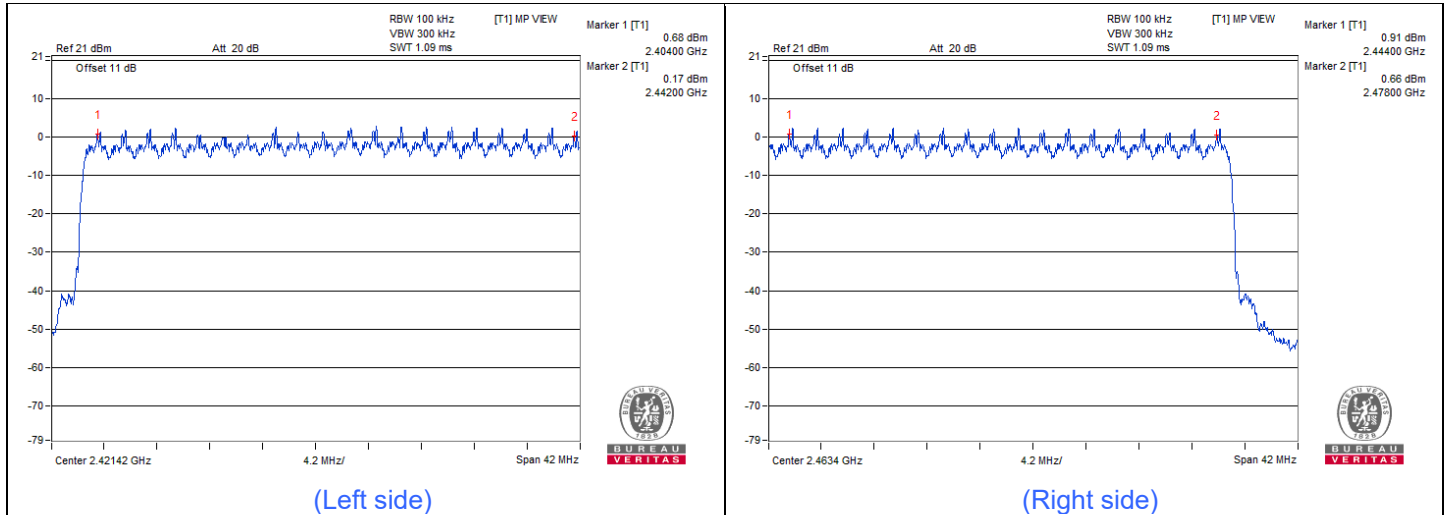

Note: There are 38 hopping frequencies in the hopping mode. On the plots, it shows that the hopping frequencies are equally spaced.

### HSL-C 6M

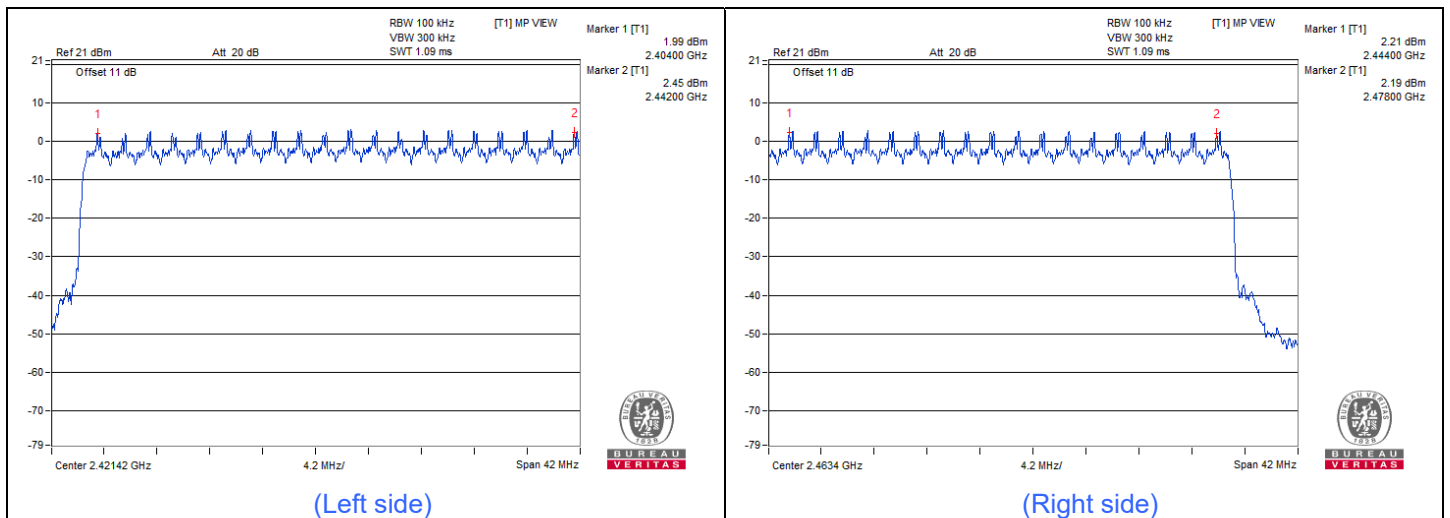


Note: There are 38 hopping frequencies in the hopping mode. On the plots, it shows that the hopping frequencies are equally spaced.

### 7.3 Dwell Time on Each Channel

Input Power:	120 Vac, 60 Hz (System)	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	-------------------------	---------------------------	--------------	------------	-----------


#### HSL-C 2M

Mode	Number of transmission in 15.2 sec	Length of transmission time (msec)	Dwell Time (msec)	Limit (msec)	Test Result
FHSS	18 (times / 5 sec) * 3.04 = 55 times	0.136	7.48	400	Pass

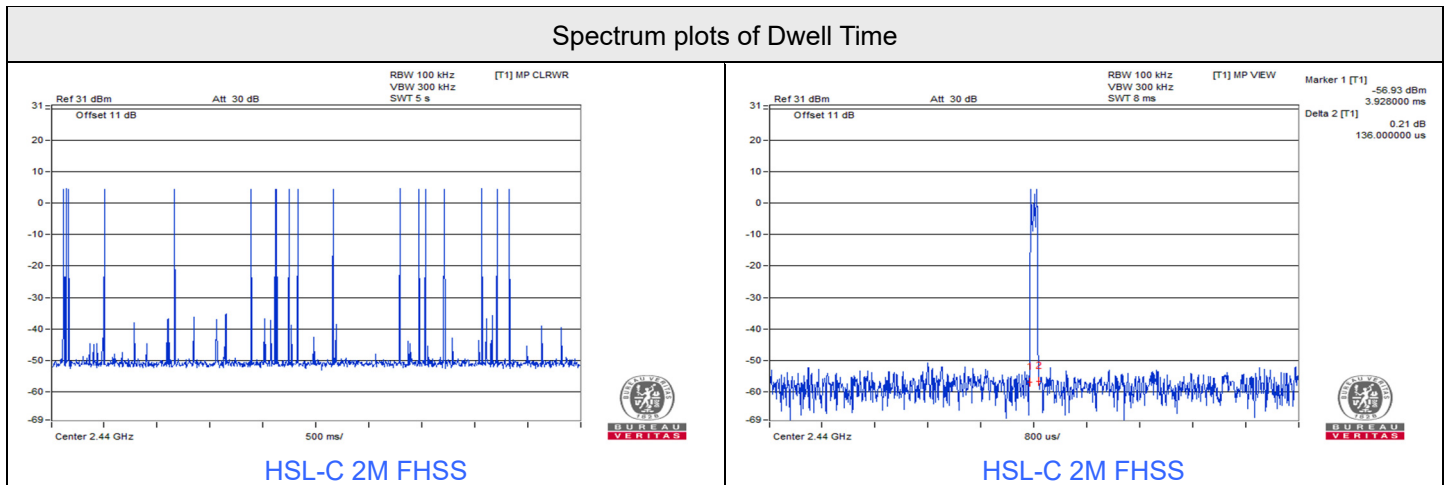

#### HSL-C 6M

Mode	Number of transmission in 15.2 sec	Length of transmission time (msec)	Dwell Time (msec)	Limit (msec)	Test Result
FHSS	18 (times / 5 sec) * 3.04 = 55 times	0.16	8.8	400	Pass

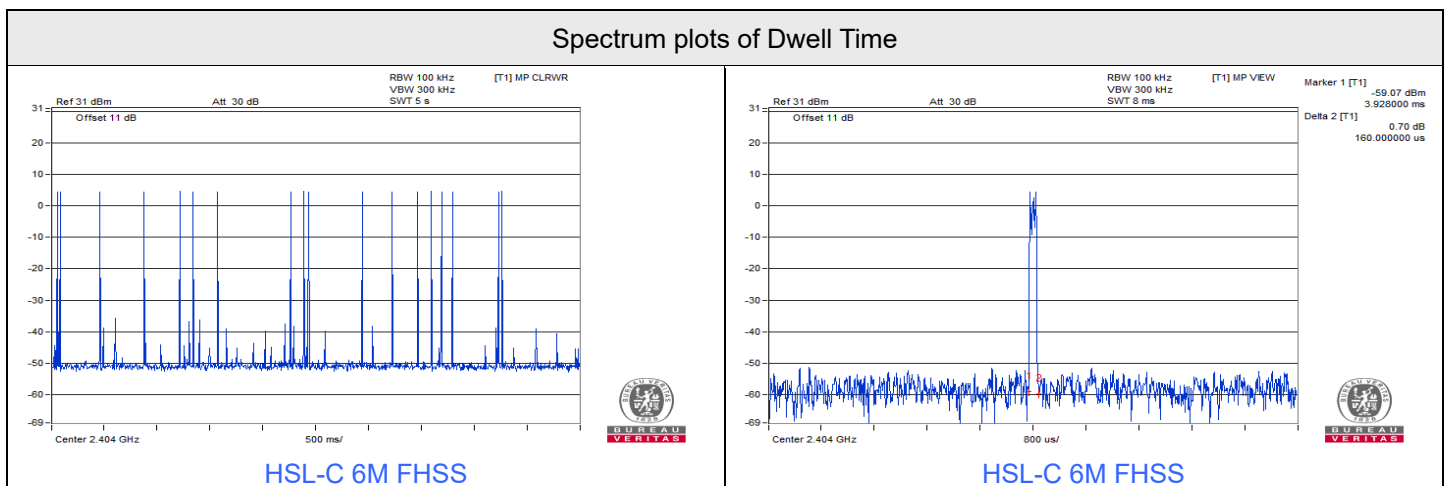

### 7.4 Hopping Channel Separation

Input Power:	120 Vac, 60 Hz (System)	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	-------------------------	---------------------------	--------------	------------	-----------

#### HSL-C 2M


Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Minimum Limit (MHz)	Test Result
1	2404	2.00	1.7	Pass
19	2440	2.00	1.72	Pass
38	2478	2.00	1.71	Pass

Note: The minimum limit is two-third 20dB bandwidth.

#### HSL-C 6M

Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Minimum Limit (MHz)	Test Result
1	2404	2.00	1.69	Pass
19	2440	2.01	1.7	Pass
38	2478	2.00	1.7	Pass

Note: The minimum limit is two-third 20dB bandwidth.

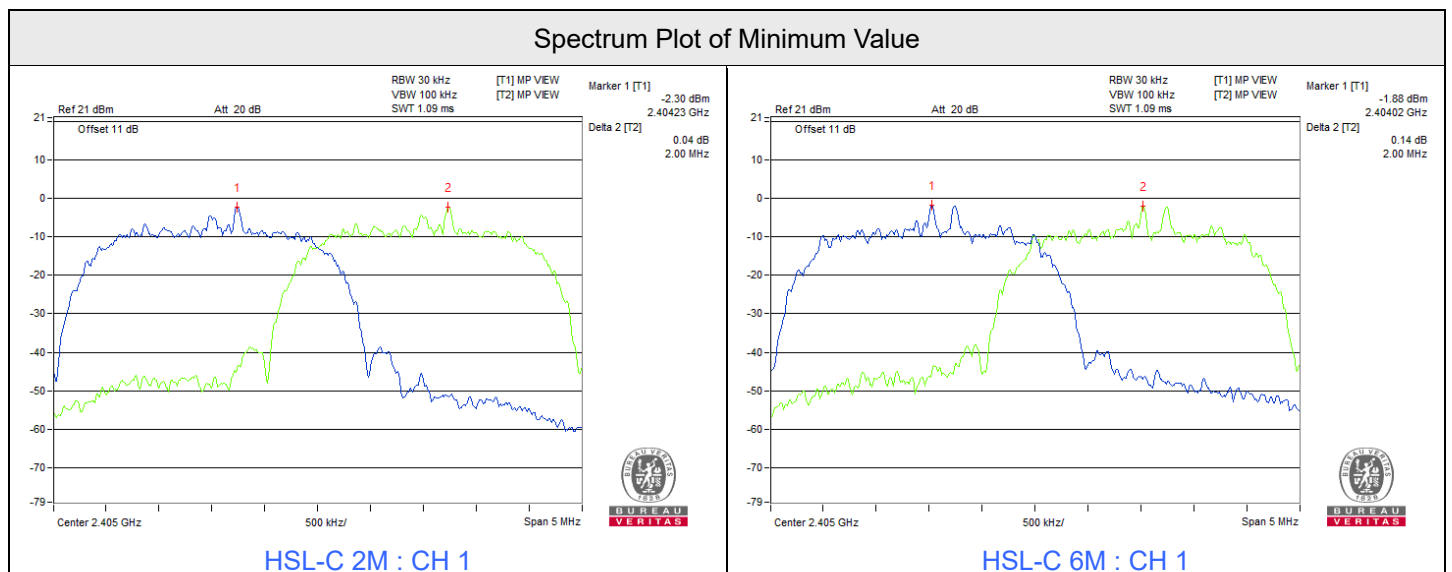

## 7.5 20 dB Bandwidth

Input Power:	120 Vac, 60 Hz (System)	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	-------------------------	---------------------------	--------------	------------	-----------


### HSL-C 2M

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
1	2404	2.55
19	2440	2.57
38	2478	2.56

### HSL-C 6M

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
1	2404	2.53
19	2440	2.54
38	2478	2.54

### Spectrum Plot of Minimum Value

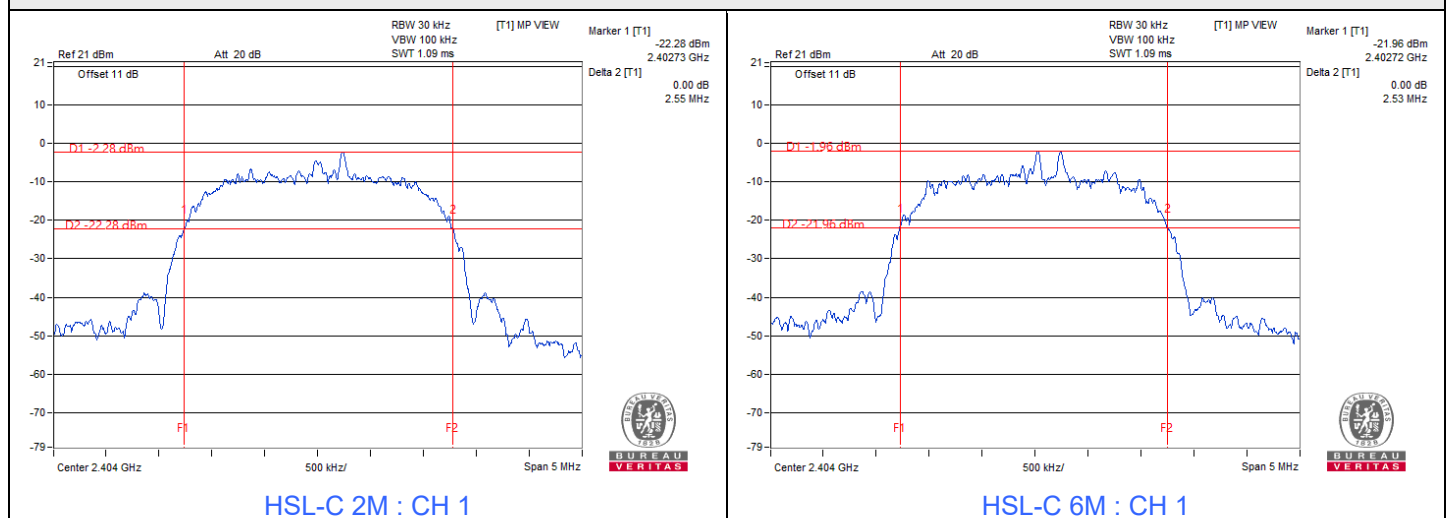



BUREAU VERITAS

### 7.6 Conducted Out of Band Emissions


Input Power:	120 Vac, 60 Hz (System)	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	-------------------------	---------------------------	--------------	------------	-----------

#### HSL-C 2M







HSL-C 6M

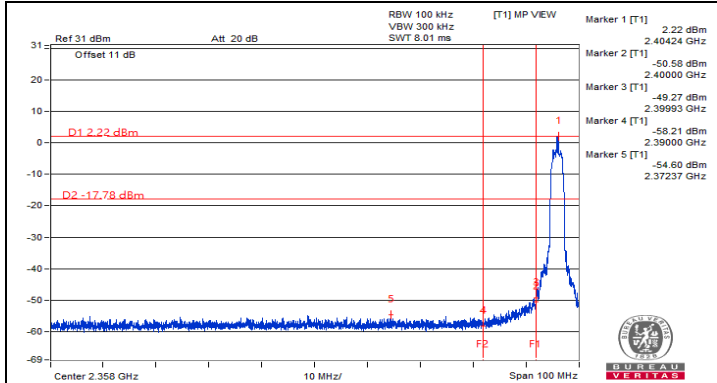


Hopping disabled (Low Channel)

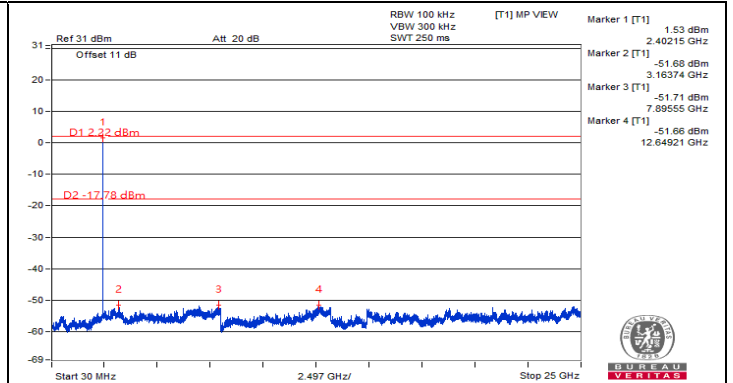


Hopping disabled (Low Channel)

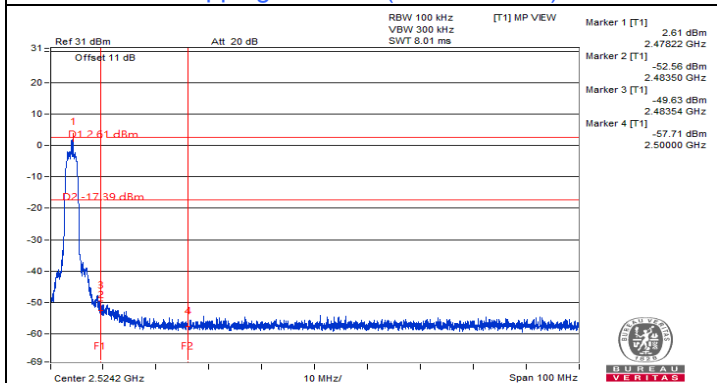


Hopping disabled (High Channel)

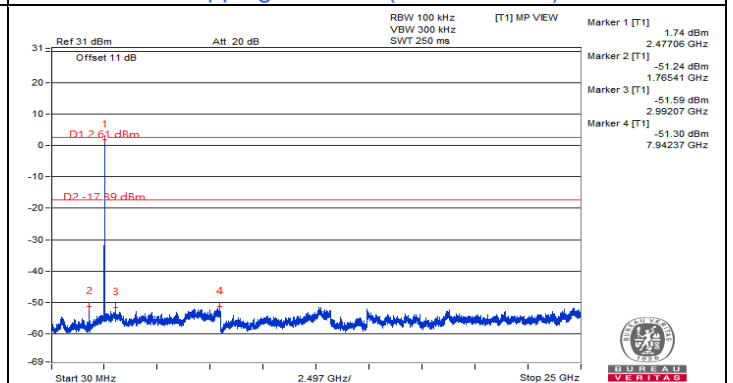


Hopping disabled (High Channel)

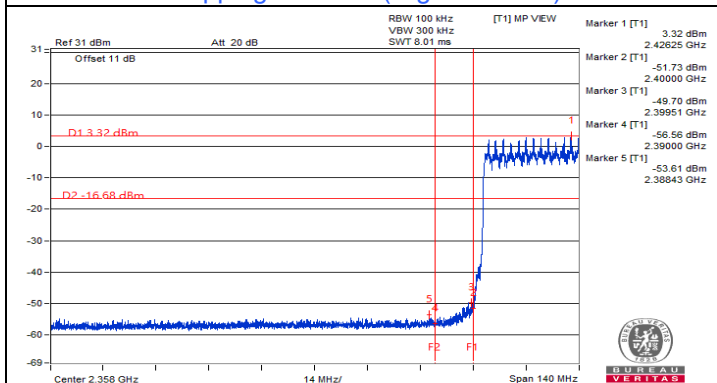


Hopping enabled

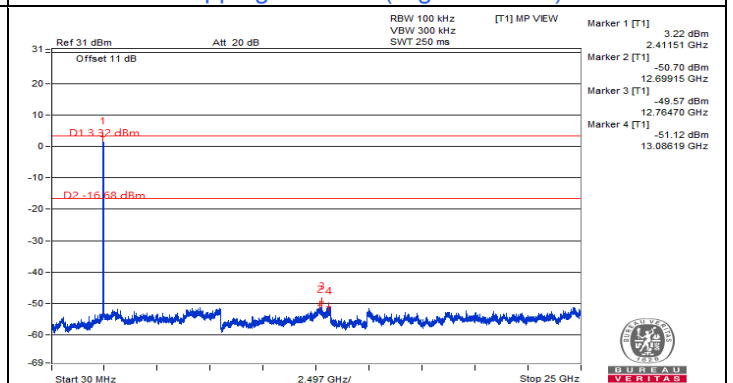

Hopping enabled

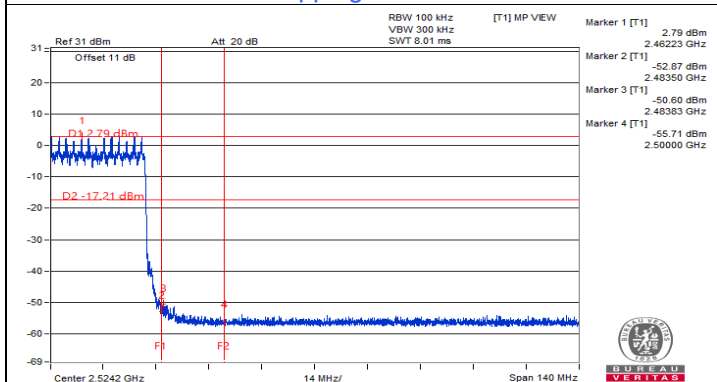

Hopping enabled

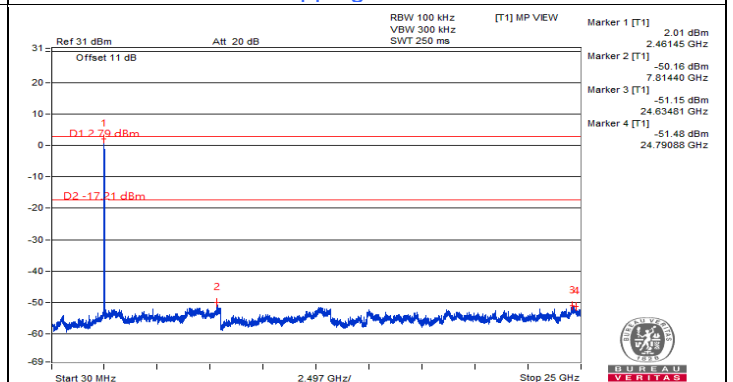

Hopping enabled




## 7.7 AC Power Conducted Emissions

<b>RF Mode</b>	HSL-C 2M	<b>Channel</b>	CH 38 : 2478 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19400	9.64	37.28	23.56	46.92	33.20	63.86	53.86	-16.94	-20.66
2	0.21800	9.64	21.14	8.36	30.78	18.00	62.89	52.89	-32.11	-34.89
3	0.26200	9.65	27.70	14.03	37.35	23.68	61.37	51.37	-24.02	-27.69
4	0.29000	9.66	24.57	12.59	34.23	22.25	60.52	50.52	-26.29	-28.27
5	0.31800	9.66	22.86	11.65	32.52	21.31	59.76	49.76	-27.24	-28.45
<b>6</b>	<b>3.31800</b>	<b>9.73</b>	<b>29.64</b>	<b>18.79</b>	<b>39.37</b>	<b>28.52</b>	<b>56.00</b>	<b>46.00</b>	<b>-16.63</b>	<b>-17.48</b>

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

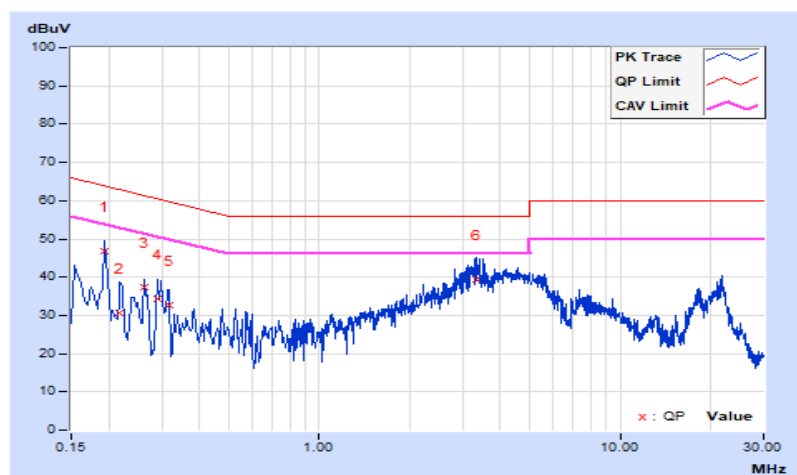


<b>RF Mode</b>	HSL-C 2M	<b>Channel</b>	CH 38 : 2478 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17400	9.63	32.48	20.57	42.11	30.20	64.77	54.77	-22.66	-24.57
2	0.19400	9.64	36.69	21.33	46.33	30.97	63.86	53.86	-17.53	-22.89
3	0.22200	9.64	20.98	8.18	30.62	17.82	62.74	52.74	-32.12	-34.92
4	0.24600	9.65	28.81	17.37	38.46	27.02	61.89	51.89	-23.43	-24.87
5	0.29800	9.66	24.63	14.55	34.29	24.21	60.30	50.30	-26.01	-26.09
6	3.49400	9.74	29.28	19.45	39.02	29.19	56.00	46.00	-16.98	-16.81

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

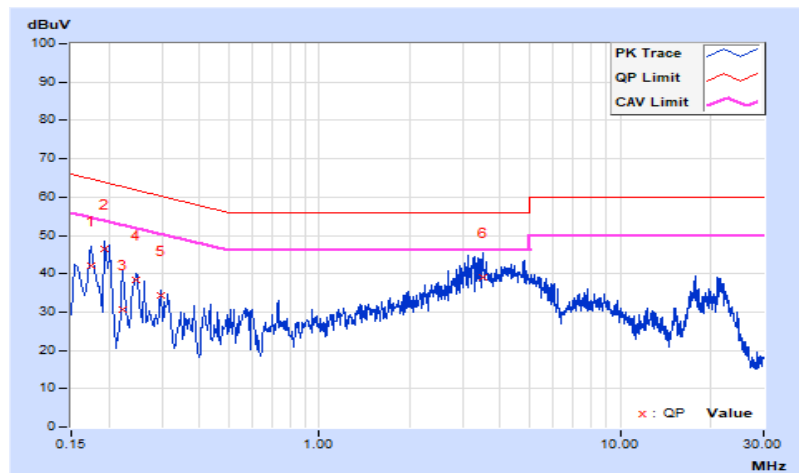


## 7.8 Unwanted Emissions below 1 GHz

RF Mode	HSL-C 2M	Channel	CH 38 : 2478 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz (System)	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	90.14	28.4 QP	43.5	-15.1	1.01 H	162	42.8	-14.4
2	167.74	25.5 QP	43.5	-18.0	1.01 H	296	34.3	-8.8
<b>3</b>	<b>215.27</b>	<b>33.2 QP</b>	<b>43.5</b>	<b>-10.3</b>	<b>1.01 H</b>	<b>198</b>	<b>44.5</b>	<b>-11.3</b>
4	239.52	28.3 QP	46.0	-17.7	1.01 H	218	38.0	-9.7
5	294.81	29.1 QP	46.0	-16.9	1.01 H	17	36.8	-7.7
6	388.90	30.4 QP	46.0	-15.6	1.01 H	31	36.3	-5.9

### Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

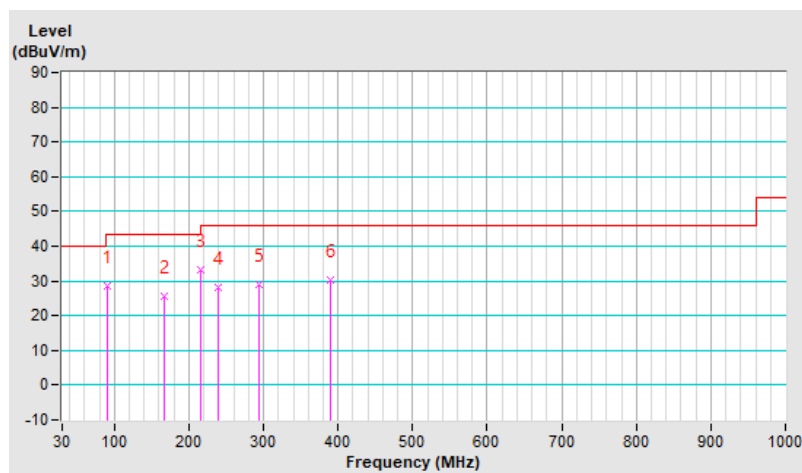


<b>RF Mode</b>	HSL-C 2M	<b>Channel</b>	CH 38 : 2478 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.73	27.0 QP	40.0	-13.0	1.49 V	190	36.4	-9.4
2	106.63	21.4 QP	43.5	-22.1	1.49 V	227	33.5	-12.1
3	167.74	22.1 QP	43.5	-21.4	1.49 V	18	30.9	-8.8
4	215.27	24.6 QP	43.5	-18.9	1.00 V	0	35.9	-11.3
5	323.91	24.7 QP	46.0	-21.3	1.49 V	277	31.5	-6.8
6	449.04	29.2 QP	46.0	-16.8	1.00 V	332	33.9	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

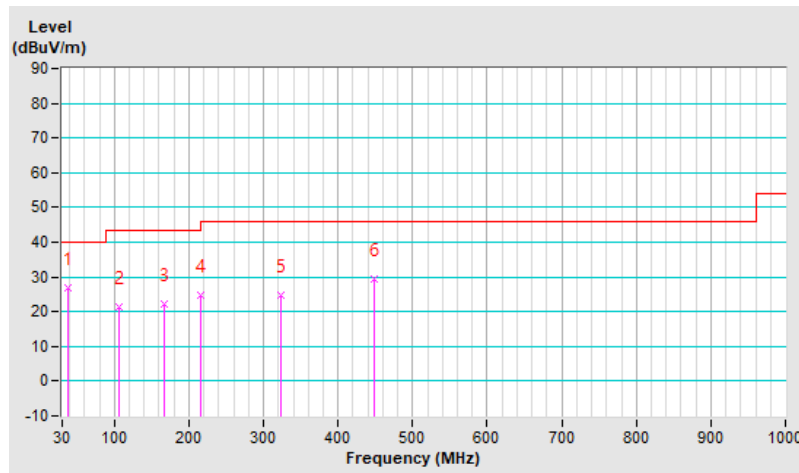

### 7.9 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	HSL-C 2M	<b>Channel</b>	CH 1 : 2404 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.40 H	163	24.8	33.8
2	2390.00	45.8 AV	54.0	-8.2	1.40 H	163	12.0	33.8
3	*2404.00	104.7 PK			1.40 H	163	71.0	33.7
4	*2404.00	56.7 AV			1.40 H	163	23.0	33.7
5	4808.00	61.5 PK	74.0	-12.5	1.85 H	229	48.6	12.9
6	4808.00	13.5 AV	54.0	-40.5	1.85 H	229	0.6	12.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	1.83 V	157	25.0	33.8
2	2390.00	46.0 AV	54.0	-8.0	1.83 V	157	12.2	33.8
3	*2404.00	110.1 PK			1.83 V	157	76.4	33.7
4	*2404.00	62.1 AV			1.83 V	157	28.4	33.7
5	4808.00	61.7 PK	74.0	-12.3	1.92 V	155	48.8	12.9
6	4808.00	13.7 AV	54.0	-40.3	1.92 V	155	0.8	12.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(0.4 \text{ ms} / 100 \text{ ms}) = -48.0 \text{ dB}$



<b>RF Mode</b>	HSL-C 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	105.3 PK			1.34 H	166	71.5	33.8
2	*2440.00	57.3 AV			1.34 H	166	23.5	33.8
3	4880.00	61.8 PK	74.0	-12.2	1.82 H	226	48.5	13.3
4	4880.00	13.8 AV	54.0	-40.2	1.82 H	226	0.5	13.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	111.1 PK			1.70 V	156	77.3	33.8
2	*2440.00	63.1 AV			1.70 V	156	29.3	33.8
3	4880.00	62.0 PK	74.0	-12.0	1.95 V	157	48.7	13.3
4	4880.00	14.0 AV	54.0	-40.0	1.95 V	157	0.7	13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(0.4 \text{ ms} / 100 \text{ ms}) = -48.0 \text{ dB}$



<b>RF Mode</b>	HSL-C 2M	<b>Channel</b>	CH 38 : 2478 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	105.1 PK			1.30 H	167	71.3	33.8
2	*2478.00	57.1 AV			1.30 H	167	23.3	33.8
3	2483.50	59.2 PK	74.0	-14.8	1.30 H	167	57.1	2.1
4	2483.50	11.2 AV	54.0	-42.8	1.30 H	167	9.1	2.1
5	4956.00	62.0 PK	74.0	-12.0	1.85 H	221	48.7	13.3
6	4956.00	14.0 AV	54.0	-40.0	1.85 H	221	0.7	13.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	110.0 PK			1.74 V	156	76.2	33.8
2	*2478.00	62.0 AV			1.74 V	156	28.2	33.8
3	2483.50	63.4 PK	74.0	-10.6	1.74 V	156	61.3	2.1
4	2483.50	15.4 AV	54.0	-38.6	1.74 V	156	13.3	2.1
5	4956.00	62.2 PK	74.0	-11.8	1.88 V	155	48.9	13.3
6	4956.00	14.2 AV	54.0	-39.8	1.88 V	155	0.9	13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(0.4 \text{ ms} / 100 \text{ ms}) = -48.0 \text{ dB}$



<b>RF Mode</b>	HSL-C 6M	<b>Channel</b>	CH 1 : 2404 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.28 H	163	25.5	33.8
2	2390.00	45.8 AV	54.0	-8.2	1.28 H	163	12.0	33.8
3	*2404.00	104.6 PK			1.28 H	163	70.9	33.7
4	*2404.00	56.6 AV			1.28 H	163	22.9	33.7
5	4808.00	61.5 PK	74.0	-12.5	1.82 H	220	48.6	12.9
6	4808.00	13.5 AV	54.0	-40.5	1.82 H	220	0.6	12.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.6 PK	74.0	-14.4	1.83 V	155	25.8	33.8
2	2390.00	46.1 AV	54.0	-7.9	1.83 V	155	12.3	33.8
3	*2404.00	109.7 PK			1.83 V	155	76.0	33.7
4	*2404.00	61.7 AV			1.83 V	155	28.0	33.7
5	4808.00	61.7 PK	74.0	-12.3	1.99 V	158	48.8	12.9
6	4808.00	13.7 AV	54.0	-40.3	1.99 V	158	0.8	12.9

**Remarks:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
20 log(Duty cycle) = 20 log(0.4 ms / 100 ms) = -48.0 dB





<b>RF Mode</b>	HSL-C 6M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	104.3 PK			1.41 H	167	70.5	33.8
2	*2440.00	56.3 AV			1.41 H	167	22.5	33.8
3	4880.00	61.8 PK	74.0	-12.2	1.79 H	229	48.5	13.3
4	4880.00	13.8 AV	54.0	-40.2	1.79 H	229	0.5	13.3

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	110.8 PK			1.70 V	156	77.0	33.8
2	*2440.00	62.8 AV			1.70 V	156	29.0	33.8
3	4880.00	62.0 PK	74.0	-12.0	1.92 V	159	48.7	13.3
4	4880.00	14.0 AV	54.0	-40.0	1.92 V	159	0.7	13.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(0.4 \text{ ms} / 100 \text{ ms}) = -48.0 \text{ dB}$



<b>RF Mode</b>	HSL-C 6M	<b>Channel</b>	CH 38 : 2478 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	120 Vac, 60 Hz (System)	<b>Environmental Conditions</b>	23°C, 66% RH
<b>Tested By</b>	Titan Hsu		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	104.7 PK			1.34 H	169	70.9	33.8
2	*2478.00	56.7 AV			1.34 H	169	22.9	33.8
3	2483.50	61.7 PK	74.0	-12.3	1.34 H	169	59.6	2.1
4	2483.50	13.7 AV	54.0	-40.3	1.34 H	169	11.6	2.1
5	4956.00	62.1 PK	74.0	-11.9	1.88 H	229	48.8	13.3
6	4956.00	14.1 AV	54.0	-39.9	1.88 H	229	0.8	13.3

**Antenna Polarity & Test Distance : Vertical at 3 m**


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	109.8 PK			1.72 V	156	76.0	33.8
2	*2478.00	61.8 AV			1.72 V	156	28.0	33.8
<b>3</b>	<b>2483.50</b>	<b>67.4 PK</b>	<b>74.0</b>	<b>-6.6</b>	<b>1.72 V</b>	<b>156</b>	<b>65.3</b>	<b>2.1</b>
4	2483.50	19.4 AV	54.0	-34.6	1.72 V	156	17.3	2.1
5	4956.00	62.3 PK	74.0	-11.7	1.92 V	158	49.0	13.3
6	4956.00	14.3 AV	54.0	-39.7	1.92 V	158	1.0	13.3

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
20 log(Duty cycle) = 20 log(0.4 ms / 100 ms) = -48.0 dB

### Plot of Band Edge

Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

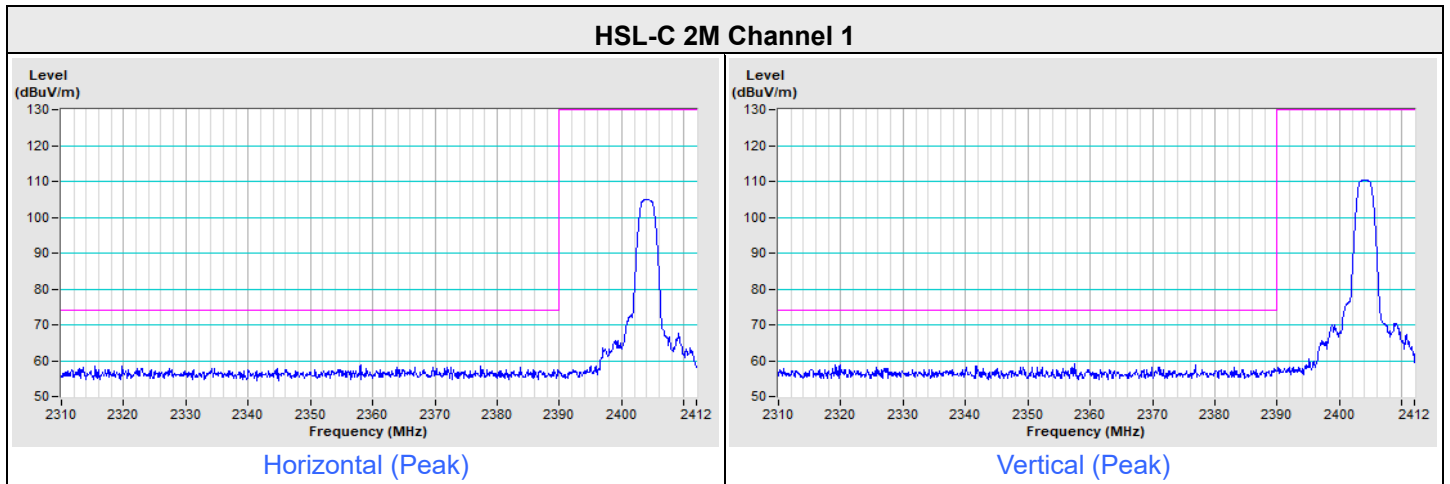


Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

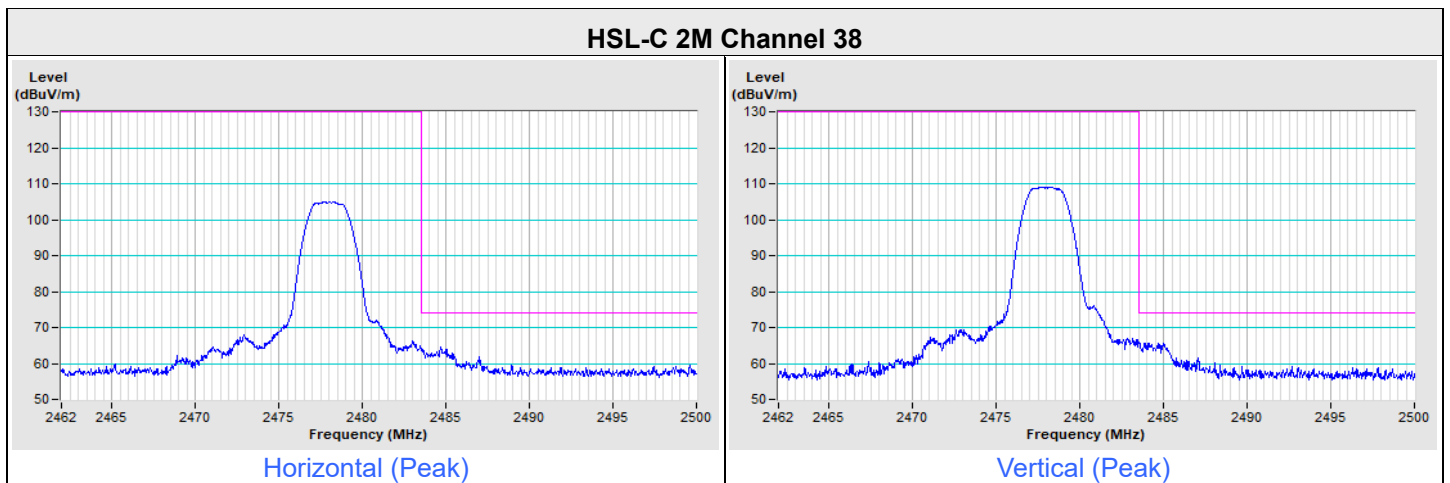


Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

**HSL-C 6M Channel 1**

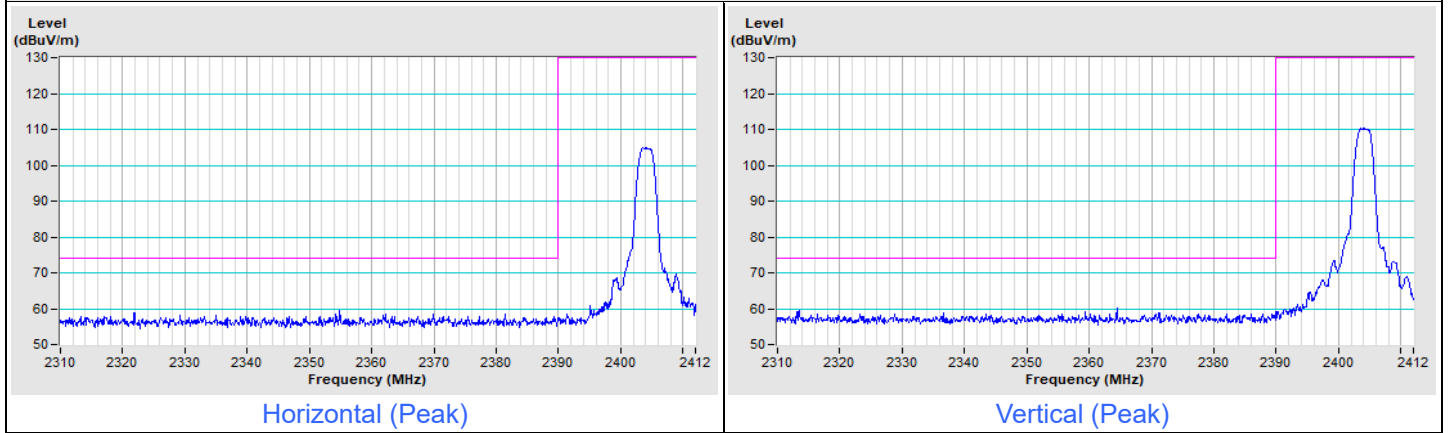

Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

**HSL-C 6M Channel 38**

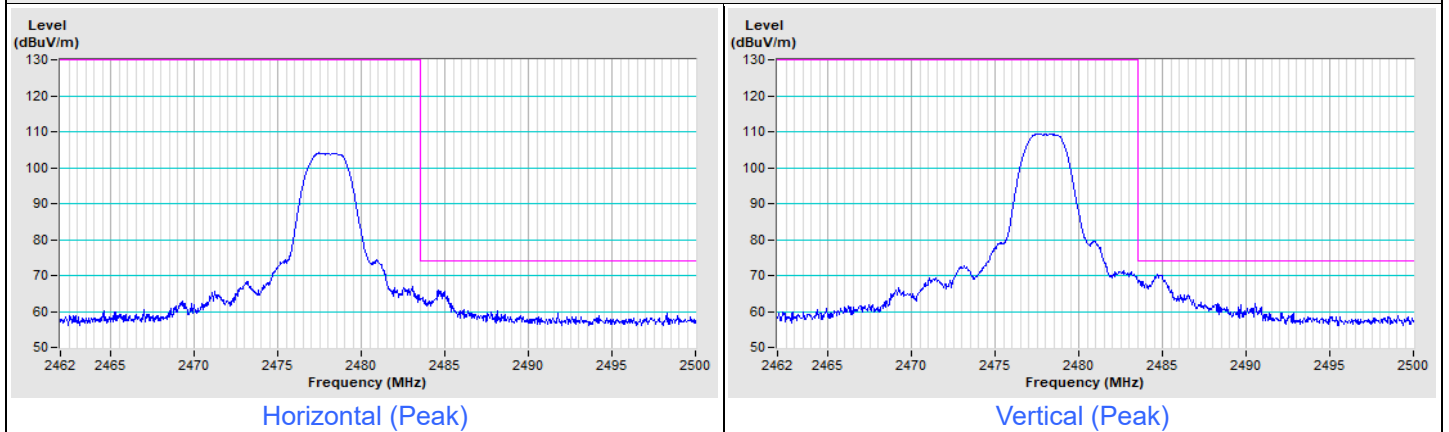

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---