



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

FCC Rules and Regulations / Intentional Radiators

Operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands

Part 15, Subpart C, Section 15.249

**THE FOLLOWING "MEETS" THE ABOVE TEST SPECIFICATION**

Formal Name: Aclick  
Kind of Equipment: Wireless 802.15.4 transceiver  
Test Configuration: Stand alone hand-held unit (Tested at 3 vdc)  
Model Number(s): SRSAC1  
Model(s) Tested: SRSAC1  
Serial Number(s): 0000001  
Date of Tests: June 28, 2007  
Test Conducted For: Dukane Corporation, AV Division  
2900 Dukane Drive  
St. Charles, Illinois 60174

**NOTICE:** "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report.

© Copyright 1983- 2006 D.L.S. Electronic Systems, Inc

**COPYRIGHT NOTICE**

This report or any portion their of, may not be reproduced or modified in any form without the expressed written consent of D.L.S. Electronic Systems, Inc.



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

#### SIGNATURE PAGE

Report By:

Aron C. Rowe  
Test Engineer  
EMC-001375-NE

Reviewed By:

William Stumpf  
OATS Manager

Approved By:

Brian Mattson  
General Manager

Company Official:

Dukane Corporation, AV Division



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## TABLE OF CONTENTS


i.	Cover Page .....	1
ii.	Signature Page .....	2
iii.	Table of Contents.....	3
iv.	NVLAP Certificate of Accreditation .....	4
1.0	Summary of Test Report.....	5
2.0	Introduction.....	5
3.0	Object.....	5
4.0	Test Set-Up .....	6
5.0	Test Equipment .....	7
6.0	Ambient Measurements .....	8
7.0	Description of Test Sample.....	9
8.0	Additional Description of Test Sample.....	10
9.0	Photo Information and Test Set-Up .....	11
10.0	Radiated Photos Taken During Testing .....	12
11.0	Results of Tests .....	16
12.0	Conclusion .....	16
	TABLE 1 – EQUIPMENT LIST .....	17
	Appendix A – Electric Field Radiated Emissions Test.....	19
1.0	Conducted Emission Measurements .....	20
2.0	Band Edge and Restrict Band Compliance.....	21
2.0	Data and Graph(s) taken showing the Band Edge and Restrict Band Compliance .....	22
3.0	Field Strength of Spurious Emission Measurements .....	27
3.0	Radiated Data taken for Fundamental Emissions (Substitution) .....	29
3.0	Radiated Data taken for Fundamental, Harmonic and Restricted Bands.....	33
4.0	20 dB Bandwidth .....	37
5.0	Duty Cycle Correction Factor.....	41



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

United States Department of Commerce  
National Institute of Standards and Technology

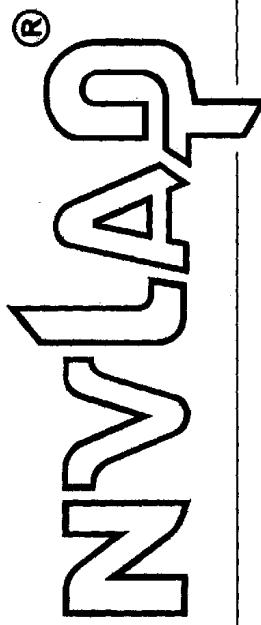

## Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.  
Wheeling, IL

is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:

### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.*

*This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO/IEC/IEC/AFI Communiqué dated 18 June 2005).*



2006-10-01 through 2007-09-30  
Effective dates

*Dolly A. Bruce, P.E.*  
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2006-09-13)



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## 1.0 SUMMARY OF TEST REPORT

It was found that the Aclick, Model Number(s) SRSAC1, "meets" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.249 for operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands. The conducted emissions test was not required because the Aclick is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.

## 2.0 INTRODUCTION

On June 28, 2007, a series of radio frequency interference measurements was performed on Aclick, Model Number(s) SRSAC1, Serial Number: 0000001. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2003. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

## 3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.35(b), 15.37(d), 15.209 & 15.249 for Intentional Radiators operating in the Bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24-24.25 GHz.



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

#### 4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2003, Section 8, (Figures 11a and 11b). The conducted tests were performed with the test item placed on a non-conductive table (table top equipment), located in the test room. Equipment normally operated on the floor was tested by placing it on the metal ground plane. The ground plane has an electrical isolation layer over its surface approximately 7mm thick. The power line supplied was connected to a dual line impedance stabilization network electrically bonded to the ground plane, located on the floor. The networks were constructed per the requirements of the American National Standards Institute, ANSI C63.4-2003, Section 4, (Figure 2).

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2003, Sections 6 and 8.



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## 5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and/or ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2003, Section 4.2.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## 6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in MP-5 or ANSI C63.4-2003, as appropriate.



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## 7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

### 7.1 Description:

This device is a hand-held wireless transceiver operating in the ISM band from 2400Mhz to 2485Mhz. The device is battery operated and uses a 802.15.4 communications protocol. The device is intended to be used as a wireless data path for small amounts of data.

The unit will operate in a continuously transmitting mode while testing. The PC program used to control the device is Test Tool from Freescale. this program is used to force the radio into the different test modes. The unit will be running software that will allow it to communicate to the Test Tool program. The Test Tool program allows the unit to operate in continuous transmit or continuous receive modes. It also has the ability to turn modulation on or off and to change the operating channel.

### 7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

Length: 5.6in x Width: 2.7in x Height: 1.2in

### 7.3 LINE FILTER USED:

N/A

### 7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

N/A

Clock Frequencies:

16 MHz

### 7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

1. 09-0295-00001 Blank PC board

PN: D

2. 10-0395-00001 PCB assembly

PN: B



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:  
(See also Paragraph 7.0)

1: There were no additional descriptions noted at the time of test.

NOTE:

Constant Transmit Mode for Low, Mid and High Channels.

I certify that the above, as described in paragraph 7.0, describes the equipment tested and will be manufactured as stated.

By: \_\_\_\_\_ Signature \_\_\_\_\_ Title

For: \_\_\_\_\_ Company \_\_\_\_\_ Date



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

**1250 Peterson Dr., Wheeling, IL 60090**

## **9.0 PHOTO INFORMATION AND TEST SET-UP**

**Item 0 Aclick**

Model Number: SRSAC1; Serial Number: 0000001



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

#### 10.0 RADIATED PHOTOS TAKEN DURING TESTING




RADIATED FRONT VERTICAL POSITION



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

#### 10.0 RADIATED PHOTOS TAKEN DURING TESTING

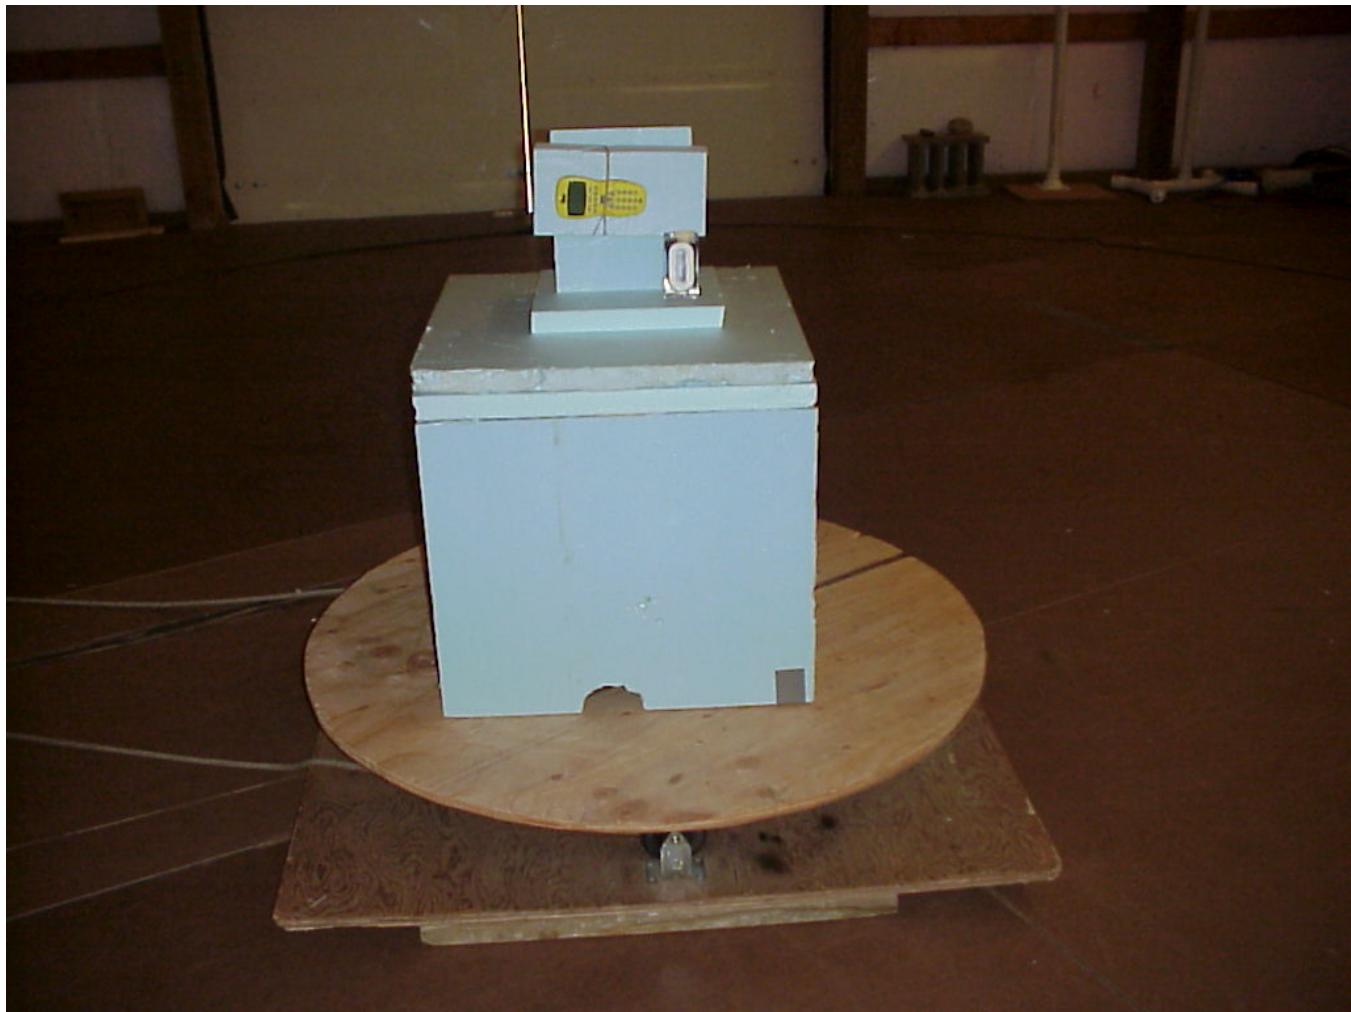


RADIATED FRONT HORIZONTAL POSITION 1



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

#### 10.0 RADIATED PHOTOS TAKEN DURING TESTING

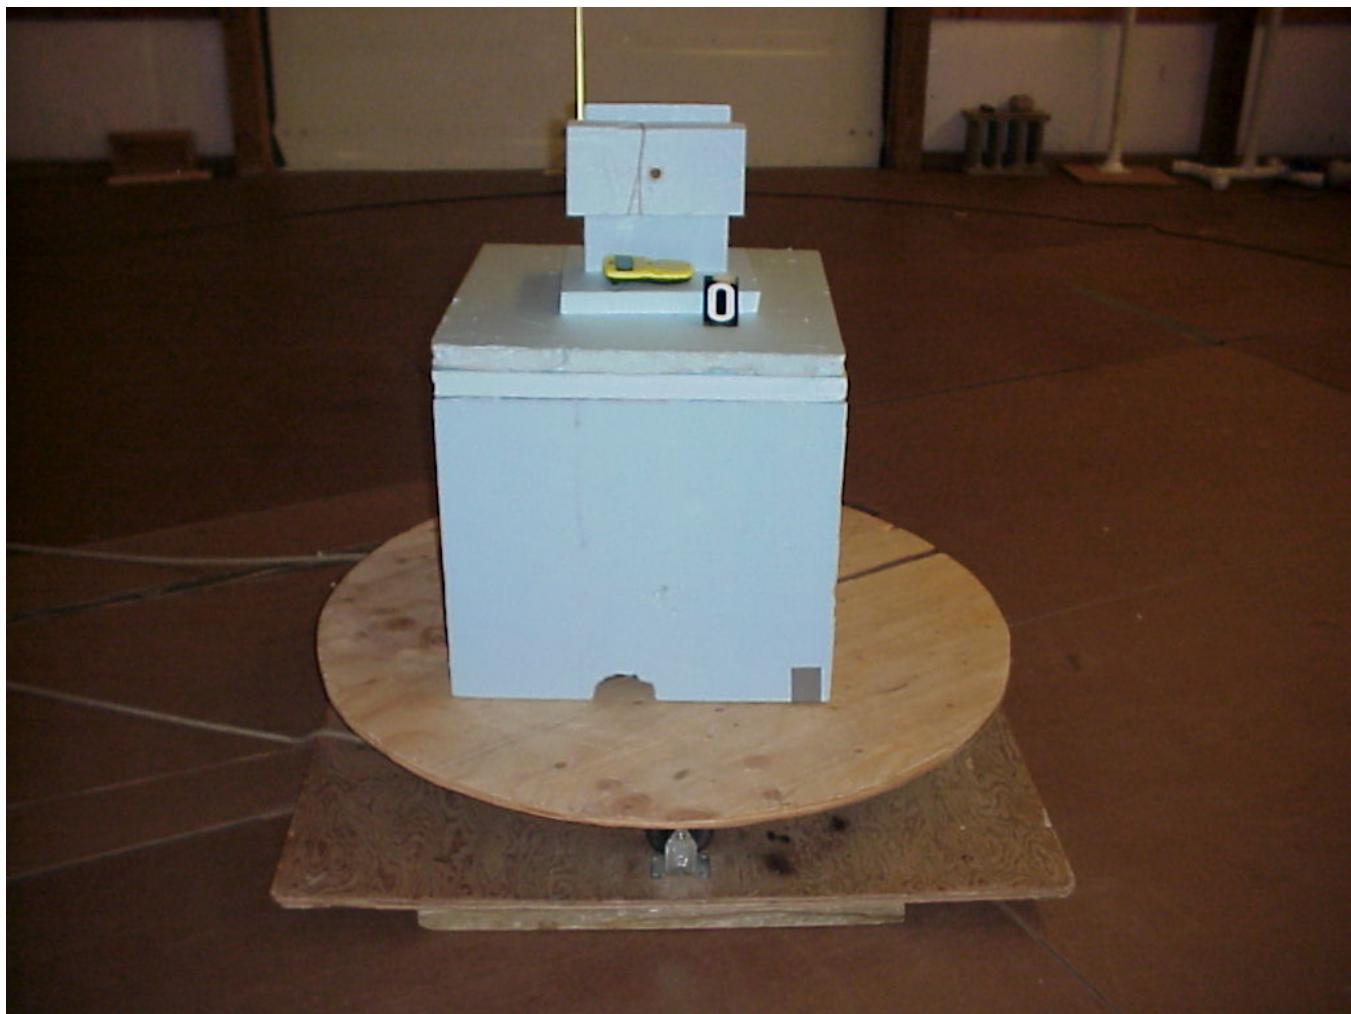


RADIATED FRONT HORIZONTAL POSITION 2



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## 10.0 RADIATED PHOTOS TAKEN DURING TESTING

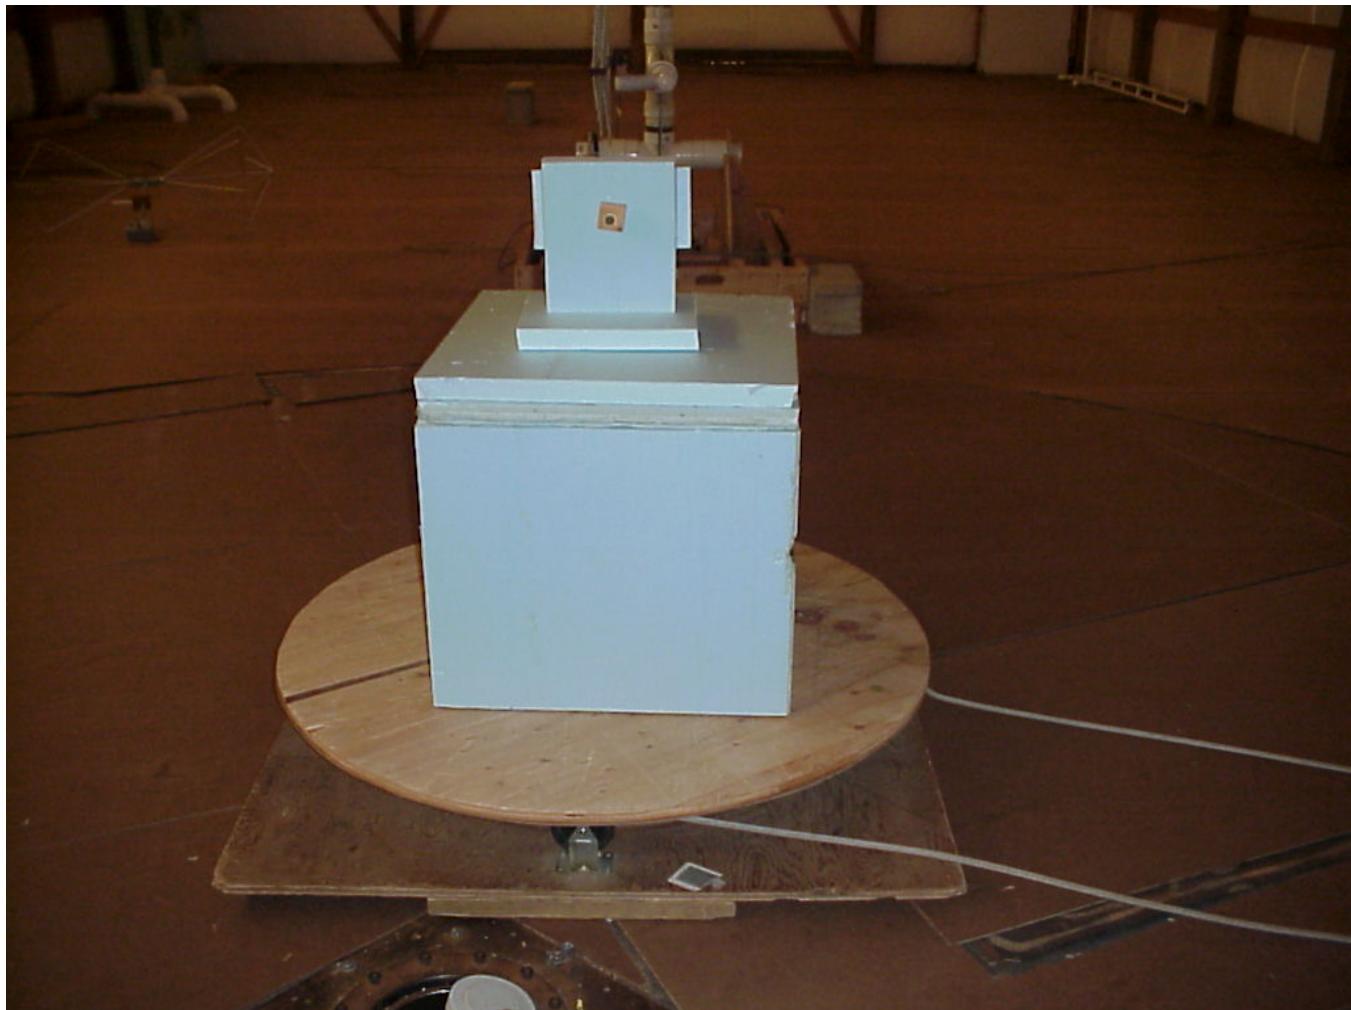

RADIATED REAR VIEW



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## 11.0 RESULTS OF TESTS

The radio interference emission charts can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report.

## 12.0 CONCLUSION

It was found that the Aclick, Model Number(s) SRSAC1 **"meets"** the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.249 for operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands. The conducted emissions test was not required because the Aclick is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	11/07
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	12/07
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	12/07
Antenna	EMCO	3104C	00054891	20 MHz – 200 MHz	2/08
Antenna	Electrometrics	LPA-25	1114	200 MHz – 1 GHz	3/08
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	3/08
Antenna	Electrometrics	3146	1205	200 MHz – 1 GHz	3/08
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	2/08
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	3/08
Antenna	Rohde & Schwarz	HUF-Z1	829381001	20 MHz – 1 GHz	2/08
Antenna	Rohde & Schwarz	HUF-Z1	829381005	20 MHz – 1 GHz	8/07
Horn Antenna	EMCO	3115	4451	1 GHz – 18 GHz	5/08
Horn Antenna	EMCO	3115	99035731	1 GHz – 18 GHz	6/08
Horn Antenna	EMCO	3115	6204	1 GHz – 18 GHz	5/08
Horn Antenna	COM POWER	AH 118	071127	1 GHz – 18 GHz	5/08

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Horn Antenna	EMCO	3116	2549	18 GHz – 40 GHz	5/08
Horn Antenna	ETS Lindgren	3116	00062917	18 GHz – 40 GHz	10/07
Horn Antenna	A.H. Systems	SAS-574	221	18 GHz – 40 GHz	4/08
Horn Antenna	A.H. Systems	SAS-574	222	18 GHz – 40 GHz	4/08
Preamp	Ciao	CA118-4010	184a	1 GHz - 18 GHz	1/08
Preamp	Miteq	AMF-8B-180265-40-10P-H/S	181	18 GHz – 26 GHz	9/07
Sig-Gen	R&S	SMR-40	100092	1 GHz – 40 GHz	8/07
High-Pass Filter	Q-Microwave	100461	192B	2.9 GHz	5/08
LISN	Solar	8012-50-R-24-BNC	8305116	10 MHz – 30 MHz	8/07
LISN	Solar	8012-50-R-24-BNC	814548	10 MHz – 30 MHz	8/07
LISN	Solar	9252-50-R-24-BNC	961019	10 MHz – 30 MHz	12/07
LISN	Solar	9252-50-R-24-BNC	971612	10 MHz – 30 MHz	10/07
LISN	Solar	9252-50-R-24-BNC	92710620	10 MHz – 30 MHz	7/07

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## APPENDIX A

### TEST PROCEDURE

Part 15, Subpart C, Section 15.249a-e

Operation within the Bands 902-928 MHz,  
2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz MHz



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### 1.0 CONDUCTED EMISSION MEASUREMENTS

Conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in FCC Part 15, Subpart C, Section 15.207 & ANSI C63.4-2003. Since the device is operated from the public utility lines, the 120 Vac, 60 Hz power leads, high (hot) and low (neutral) sides, were measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. During the test, the cables were placed and items moved (when appropriate) to maximize emissions. All signals were then recorded. The allowed levels for Intentional Radiators which is designed to connected to the public utility (AC) power line cannot exceed the following:

Frequency of Emissions (MHz)	Conducted Limits (dBuV)	
	Quasi Peak	Average
.15 to .5	66 to 56	56 to 46
.5 to 5	56	46
5 to 30	60	50

#### **NOTE:**

The conducted emissions test was not required because the Aclick is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### 2.0 BAND EDGE AND RESTRICTED BAND COMPLIANCE

The field strength of any emissions appearing outside the 902 to 928 MHz band shall not exceed the general radiated emissions limits as stated Section 15.209. The fundamental from the Aclick transmitter shall not be inside the restricted band 960 to 1240 MHz.

As stated in Section 15.205a, the fundamental emission from the Aclick shall not fall within any of the bands listed below:

Frequency in MHz	Frequency in MHz	Frequency in MHz	Frequency in GHz
.0900 to .1100	162.0125 to 167.17	2310.0 to 2390	9.30 to 9.50
.4900 to .5100	167.7200 to 173.20	2483.5 to 2500	10.60 to 12.70
2.1735 to 2.1905	240.000 to 285.00	2655.0 to 2900	13.25 to 13.40
8.362 to 8.3660	322.200 to 335.40	3260.0 to 3267	14.47 to 14.50
13.36 to 13.410	399.900 to 410.00	3332.0 to 3339	15.35 to 16.20
25.50 to 25.670	608.000 to 614.00	3345.8 to 3358	17.70 to 21.40
37.50 to 38.250	960.000 to 1240.00	3600.0 to 4400	22.01 to 23.13
73.00 to 75.500	1300.000 to 1427.00	4500.0 to 5250	23.60 to 24.00
108.00 to 121.94	1435.000 to 1626.50	5350.0 to 5450	31.20 to 31.80
123.00 to 138.00	1660.000 to 1710.00	7250.0 to 7750	36.43 to 36.50
149.90 to 150.00	1718.800 to 1722.20	8025.0 to 8500	ABOVE 38.60
156.70 to 156.90	2200.000 to 2300.00	9000.0 to 9200	

#### NOTE:

The noise floor within the Restricted Bands for the EMC Receiver and HP Spectrum Analyzer will typically lay 20 dB below the limit.

See the following page (s) for the graph (s) made showing compliance for Band Edge. See page 30 for the Restricted Band charts and data.



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## APPENDIX A

# DATA AND GRAPH(S) TAKEN SHOWING THE BAND EDGE BAND COMPLIANCE

PART 15.249




Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 06-28-2007  
Company: Dukane  
EUT: Aclick  
Test: Low Band-Edge Compliance - Radiated  
Operator: Jason Lauer  
Comment: Low Channel: Frequency – 2.405 GHz

Band-Edge Frequency = 2.4 GHz

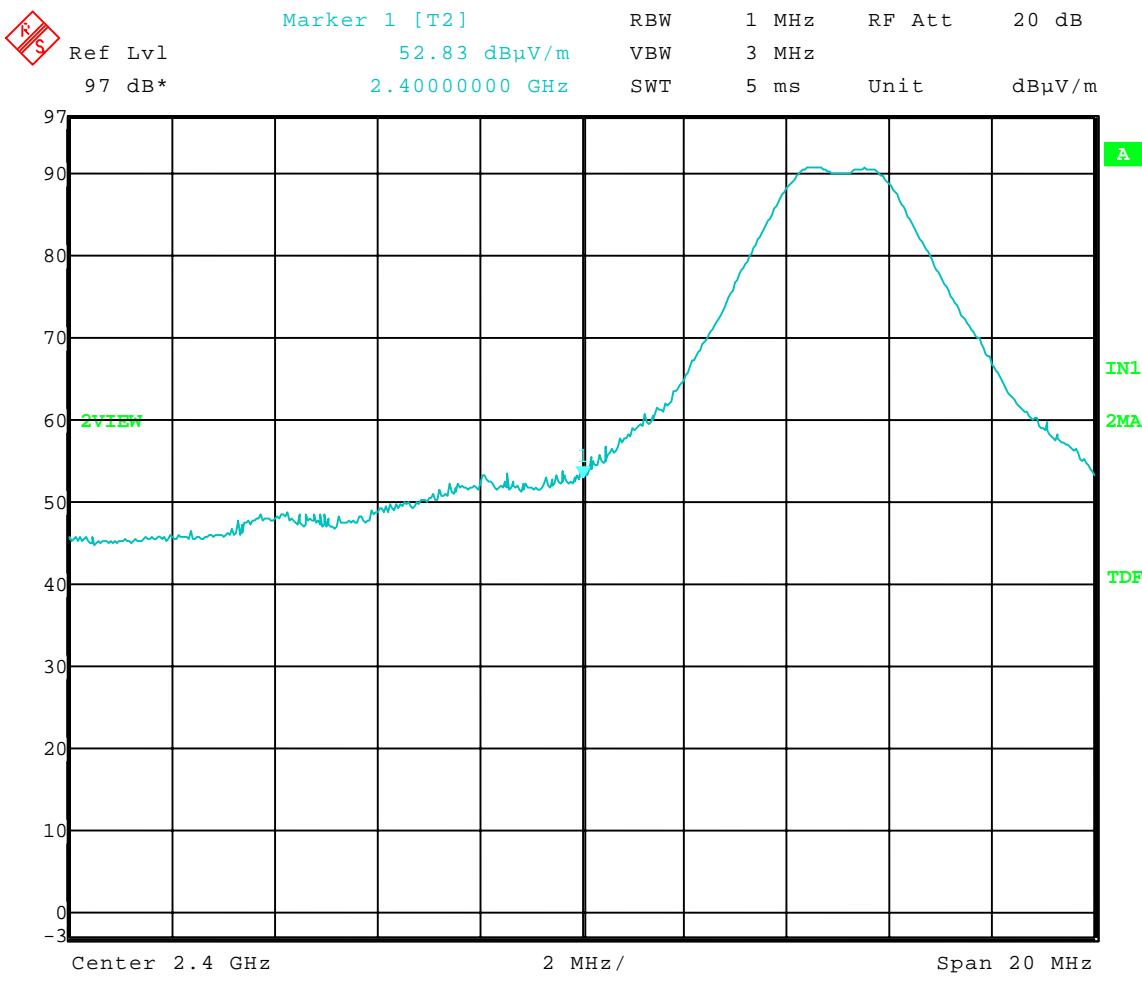




Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 06-28-2007  
Company: Dukane  
EUT: Aclick  
Test: Low Band-Edge Compliance - Radiated  
Operator: Jason Lauer  
Comment: Low Channel: Frequency – 2.405 GHz

Band-Edge Frequency = 2.4 GHz

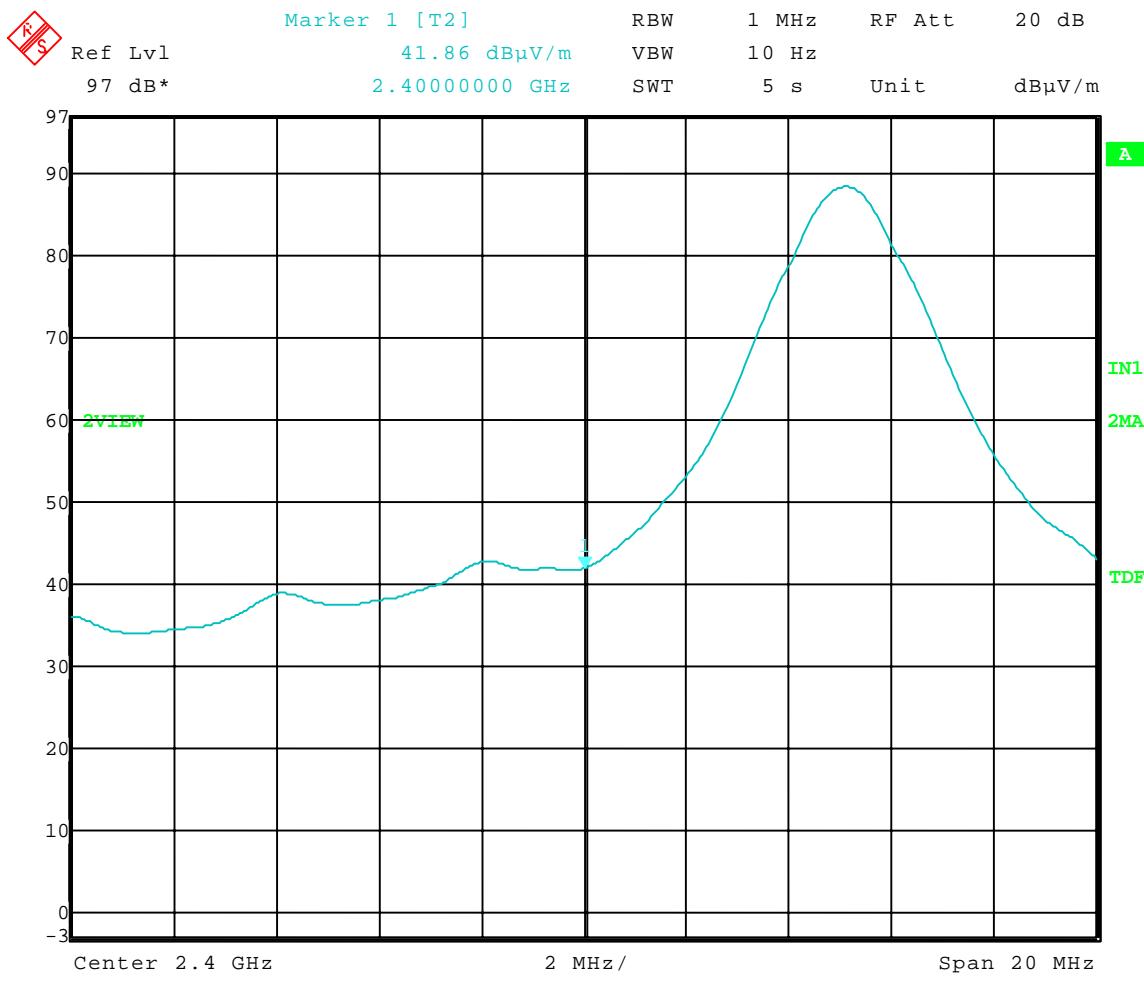




Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 06-28-2007  
Company: Dukane  
EUT: Aclick  
Test: High Band-Edge Compliance - Radiated  
Operator: Jason Lauer  
Comment: High Channel: Frequency – 2.480 GHz

Band-Edge Frequency = 2.4835 GHz

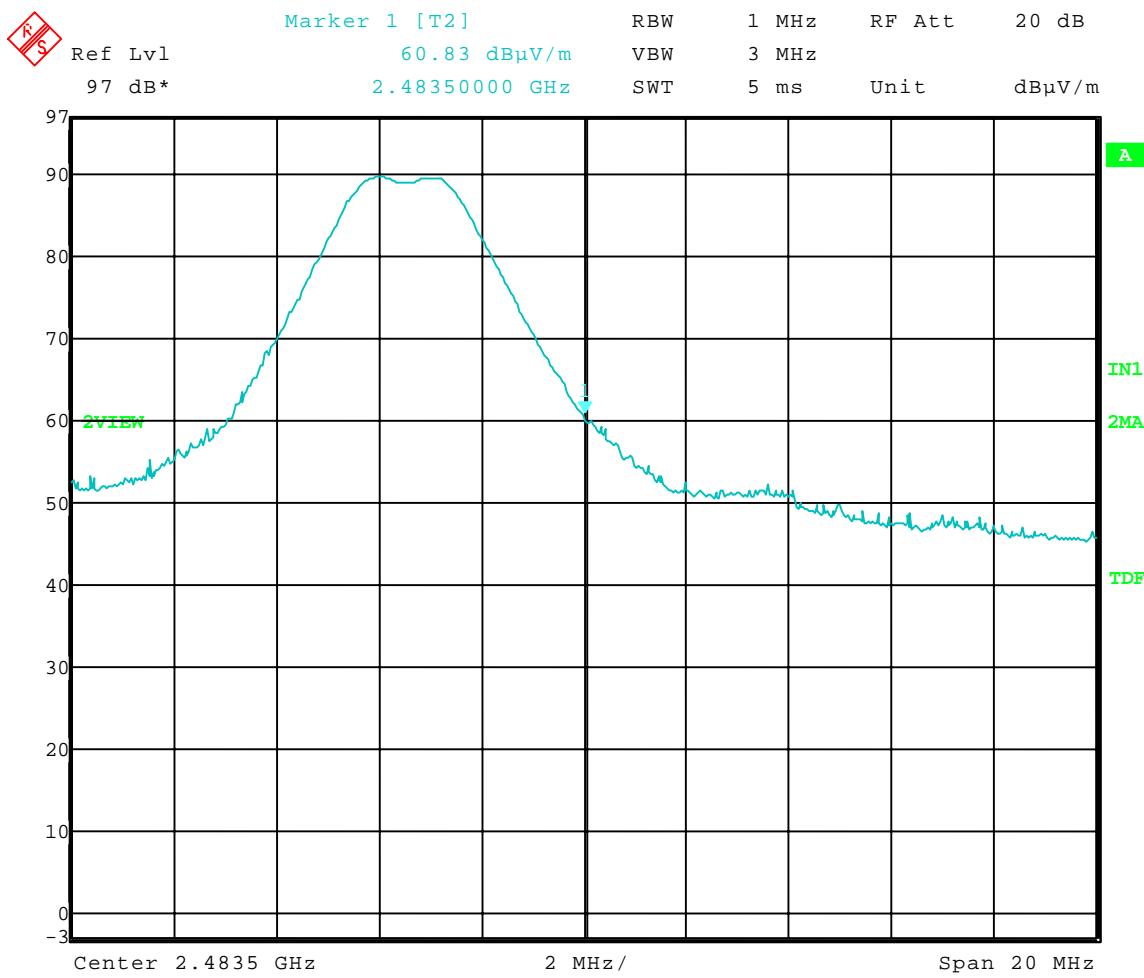

Date: 28.JUN.2007 11:15:39




Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 06-28-2007  
Company: Dukane  
EUT: Aclick  
Test: High Band-Edge Compliance - Radiated  
Operator: Jason Lauer  
Comment: High Channel: Frequency – 2.480 GHz

Band-Edge Frequency = 2.4835 GHz

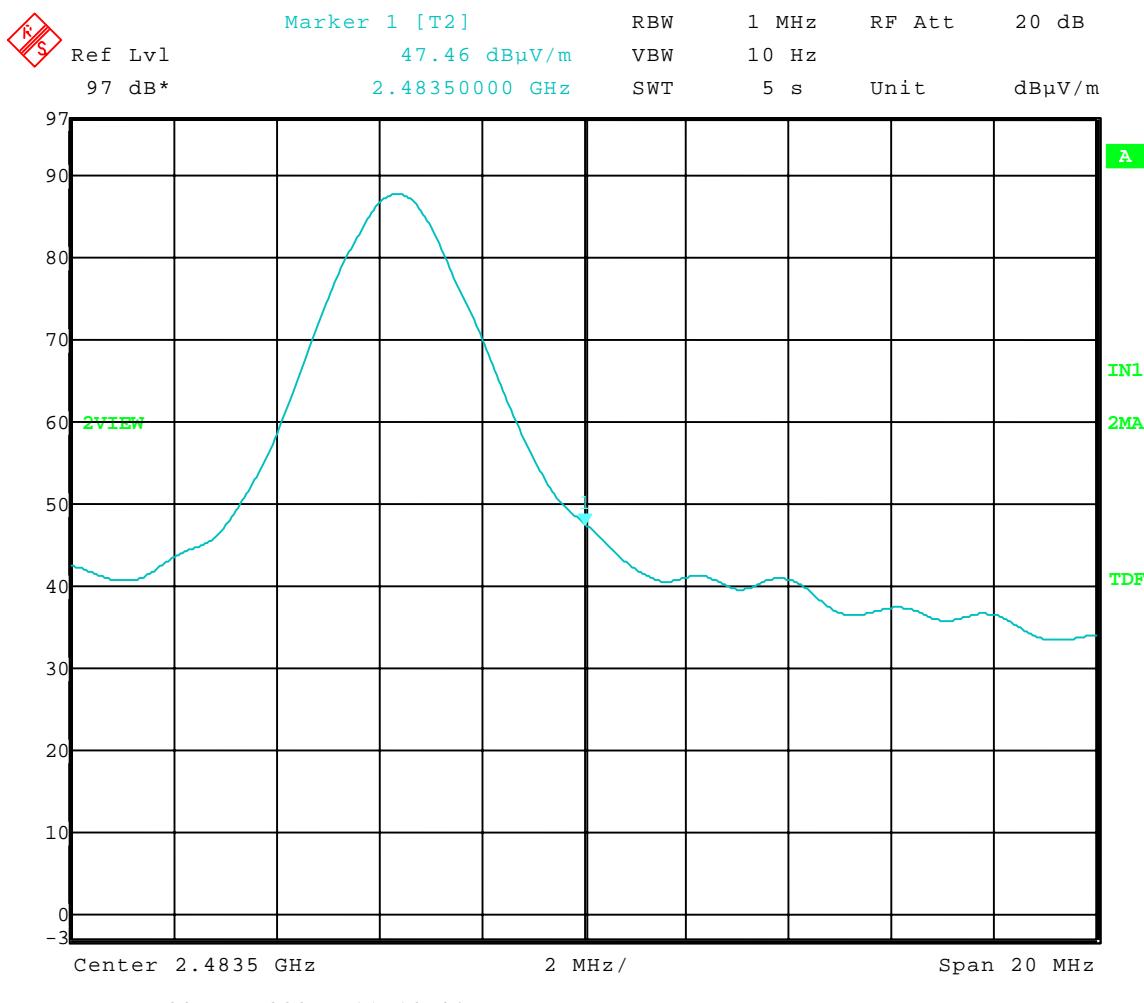

Date: 28.JUN.2007 11:18:09



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### 3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (SECTION 15.249a-d)

The radiated measurements made at D.L.S. Electronic Systems, Inc., for the Aclick, Model Number: SRSAC1, are shown in tabulated and graph form. Preliminary radiation measurements were performed at a 3 meter test distance with the limits adjusted linearly when required. The frequency range from 30 MHz to over 960 MHz, depending upon the fundamental frequency as stated in Part 15.33a, was automatically scanned and plotted at various angles.

Measurements for the Aclick were made up to 25000 MHz, in accordance with Section 15.33a for Intentional Radiators with a fundamental frequency of 2480 MHz. For intentional radiators, the frequency range to be investigated is determined by the lowest radio frequency generated by the device without going below 30 MHz, up to at least the tenth harmonic of the highest fundamental frequency or 10 GHz, whichever is lower. At those frequencies where significant signals were detected, measurements were made over the entire frequency range specified in FCC Part 15, Subpart C, Section 15.249 at the open field test site, located at Genoa City, Wisconsin, FCC file number **31040/SIT**. When required, levels were extrapolated from 10 meters to 3 meters using a linear extrapolation.

All signals in the frequency range of 30 MHz to 2000 MHz were measured with a Biconical Antenna or tuned dipoles and from 200 MHz to 1000 MHz, a Log Periodic or Tuned Dipoles were used. From 1000 MHz to 10 GHz Horn Antennas were used. During the test the equipment was rotated and the antenna was raised and lowered from 1 meter to 4 meters to find the maximum level of emissions. In order to find maximum emissions, the cables were moved through all the positions the equipment would be expected to experience in the field. The EUT, peripheral equipment and cables were configured to meet the conditions in ANSI C63.4-2003, Clauses 6 & 8. Tests were made with the receive antenna(s) in both the horizontal and vertical planes of polarization. In each case, the table was rotated to find the maximum emissions.



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### 3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T)

For operation in the bands 902 to 928 MHz, 2400 to 2483.5 MHz, 5725 to 5875 MHz, and 24.0 to 24.25 GHz the field strength of any emissions within this band shall not exceed the field strength levels specified in the following table as stated in FCC, Part 15, Section 15.249(a).

Frequency range in MHz	Field Strength of Fundamental millivolts/meter	Field Strength of Fundamental dBuV/meter	Field Strength of Harmonics microvolts/meter	Field Strength of Harmonics dBuV/meter
902 to 928	50	93.98	500	53.98
2400 to 2483.5	50	93.98	500	53.98
5725 to 5875	50	93.98	500	53.98
24000 to 24250	250	107.96	2500	67.96

Field strength limits are at a distance of 3 meters. The emission limits shown are based on measurement instrumentation employing an average detector.

Emissions radiated outside of the specified frequency bands, except for harmonics are attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Preliminary radiated emission measurements were performed at a 3 meter test distance. The frequency range from 30 MHz to 1000 MHz was automatically scanned and plotted at various angles.

#### **NOTE:**

**All radiated emissions measurements were made at a test room temperature of 70°F at 63% relative humidity.**



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## APPENDIX A

# RADIATED DATA TAKEN FOR FUNDAMENTAL EMISSION MEASUREMENTS

## USING THE SUBSTITUTION METHOD

### PART 15.249



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### DLS Electronic Systems, Inc.

Company: Dukane  
Operator: Jason Lauer  
Date of test: 06-28-2007  
Temperature: 70 deg. F  
Humidity: 63% R.H.

#### EIRP - Substitution Method on Fundamental

Model: **Aclick**

Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Factor to Convert to dBm	Power EIRP in dBm	Strength of emission [EIRP] (mW)
2405 vertical	89.3	96.6	-7.3	0.19
2405 horizontal	92.9	97.9	-5	0.32



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

#### APPENDIX A

### DLS Electronic Systems, Inc.

Company: Dukane  
Operator: Jason Lauer  
Date of test: 06-28-2007  
Temperature: 70 deg. F  
Humidity: 63% R.H.

#### EIRP - Substitution Method on Fundamental

Model: <b>Aclick</b>				
Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Factor to Convert to dBm	Power EIRP in dBm	Strength of emission [EIRP] (mW)
2440 vertical	89.3	95.9	-6.6	0.22
2440 horizontal	92.9	97.7	-4.8	0.33



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### DLS Electronic Systems, Inc.

Company: Dukane  
Operator: Jason Lauer  
Date of test: 06-28-2007  
Temperature: 70 deg. F  
Humidity: 63% R.H.

#### EIRP - Substitution Method on Fundamental

Model: <b>Aclick</b>				
Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Factor to Convert to dBm	Power EIRP in dBm	Strength of emission [EIRP] (mW)
2480 vertical	90.5	96.2	-5.7	0.27
2480 horizontal	90.8	98.2	-7.4	0.18



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## APPENDIX A

**RADIATED DATA TAKEN FOR**  
**FUNDAMENTAL, HARMONIC AND RESTRICTED**  
**BANDS FIELD STRENGTH MEASUREMENTS**

**PART 15.209**



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz Tested at a 3 Meter Distance (30 MHz to 10 GHz) and Tested at a 1 Meter Distance (10 GHz to 25 GHz)

**EUT:** Aclick  
**Manufacturer:** Dukane  
**Operating Condition:** 70 deg F; 63% R.H.  
**Test Site:** Site 2  
**Operator:** Jason Lauer  
**Test Specification:** FCC Part 15.249, Part 15.205 and Part 15.209  
**Comment:** Continuous Transmit – 2.405 GHz  
**Date:** 06/28/2007

**Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.

(2) All other emissions at least 20 dB under the FCC Part 15.209 limits

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Duty Cycle Correction (dB)	Final Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
2405	Max Peak	Vert	58.38	28.63	2.3	89.3	NA	89.3	113.98 (Peak)	24.7	1.0	45	Fundamental
2405	Max Peak	Vert	58.38	28.63	2.3	89.3	0	89.3	93.98 (Avg)	4.7	1.0	45	Fundamental
2405	Max Peak	Horz	61.94	28.63	2.3	92.9	NA	92.9	113.98 (Peak)	21.1	1.0	45	Fundamental
2405	Max Peak	Horz	61.94	28.63	2.3	92.9	0	92.9	93.98 (Avg)	1.1	1.0	45	Fundamental
4810	Max Peak	Vert	53.25	33.32	-36.7	49.9	NA	49.9	74 (Peak)	24.1	1.1	225	Res. Band
4810	Max Peak	Vert	53.25	33.32	-36.7	49.9	0	49.9	54 (Avg)	4.1	1.1	225	Res. Band
4810	Max Peak	Horz	52.99	33.32	-36.7	49.6	NA	49.6	74 (Peak)	24.4	1.0	245	Res. Band
4810	Max Peak	Horz	52.99	33.32	-36.7	49.6	0	49.6	54 (Avg)	4.4	1.0	245	Res. Band
7215	Max Peak	Vert	49.96	36.00	-34.5	51.5	NA	51.5	74 (Peak)	22.5	1.0	225	Harmonic
7215	Max Peak	Vert	49.96	36.00	-34.5	51.5	0	51.5	54 (Avg)	2.5	1.0	225	Harmonic
7215	Max Peak	Horz	51.36	36.00	-34.5	52.9	NA	52.9	74 (Peak)	21.1	1.0	245	Harmonic
7215	Max Peak	Horz	51.36	36.00	-34.5	52.9	0	52.9	54 (Avg)	1.1	1.0	245	Harmonic
9620	Max Peak	Vert	47.74	38.22	-34.5	51.5	NA	51.5	74 (Peak)	22.5	1.0	180	Harmonic
9620	Max Peak	Vert	47.74	38.22	-34.5	51.5	0	51.5	54 (Avg)	2.5	1.0	180	Harmonic
9620	Max Peak	Horz	49.14	38.22	-34.5	52.9	NA	52.9	74 (Peak)	21.1	1.0	180	Harmonic
9620	Max Peak	Horz	49.14	38.22	-34.5	52.9	0	52.9	54 (Avg)	1.1	1.0	180	Harmonic



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz Tested at a 3 Meter Distance (30 MHz to 10 GHz) and Tested at a 1 Meter Distance (10 GHz to 25 GHz)

**EUT:** Aclick  
**Manufacturer:** Dukane  
**Operating Condition:** 70 deg F; 63% R.H.  
**Test Site:** Site 2  
**Operator:** Jason Lauer  
**Test Specification:** FCC Part 15.249, Part 15.205 and Part 15.209  
**Comment:** Continuous Transmit – 2.440 GHz  
**Date:** 06/28/2007

**Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.

(2) All other emissions at least 20 dB under the FCC Part 15.209 limits

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Duty Cycle Correction (dB)	Final Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
2440	Max Peak	Vert	58.28	28.73	2.3	89.3	NA	89.3	113.98 (Peak)	24.7	1.0	0	Fundamental
2440	Max Peak	Vert	58.28	28.73	2.3	89.3	0	89.3	93.98 (Avg)	4.7	1.0	0	Fundamental
2440	Max Peak	Horz	61.84	28.73	2.3	92.9	NA	92.9	113.98 (Peak)	21.1	1.0	325	Fundamental
2440	Max Peak	Horz	61.84	28.73	2.3	92.9	0	92.9	93.98 (Avg)	1.1	1.0	325	Fundamental
4880	Max Peak	Vert	53.21	33.46	-36.8	49.9	NA	49.9	74 (Peak)	24.1	1.0	225	Res. Band
4880	Max Peak	Vert	53.21	33.46	-36.8	49.9	0	49.9	54 (Avg)	4.1	1.0	225	Res. Band
4880	Max Peak	Horz	52.95	33.46	-36.8	49.6	NA	49.6	74 (Peak)	24.4	1.0	180	Res. Band
4880	Max Peak	Horz	52.95	33.46	-36.8	49.6	0	49.6	54 (Avg)	4.4	1.0	180	Res. Band
7320	Max Peak	Vert	49.46	36.3	-34.3	51.5	NA	51.5	74 (Peak)	22.5	1.0	90	Harmonic
7320	Max Peak	Vert	49.46	36.3	-34.3	51.5	0	51.5	54 (Avg)	2.5	1.0	90	Harmonic
7320	Max Peak	Horz	50.86	36.3	-34.3	52.9	NA	52.9	74 (Peak)	21.1	1.0	225	Harmonic
7320	Max Peak	Horz	50.86	36.3	-34.3	52.9	0	52.9	54 (Avg)	1.1	1.0	225	Harmonic



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz

**Tested at a 3 Meter Distance (30 MHz to 10 GHz)**

**Tested at a 1 Meter Distance (10 GHz to 25 GHz)**

**EUT:** Aclick  
**Manufacturer:** Dukane  
**Operating Condition:** 70 deg F; 63% R.H.  
**Test Site:** Site 2  
**Operator:** Jason Lauer  
**Test Specification:** FCC Part 15.249, Part 15.205 and Part 15.209  
**Comment:** Continuous Transmit – 2.480 GHz  
**Date:** 06/28/2007

**Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.

(2) All other emissions at least 20 dB under the FCC Part 15.209 limits

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Duty Cycle Correction (dB)	Final Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
2480	Max Peak	Vert	59.33	28.86	2.3	90.5	NA	90.5	113.98 (Peak)	23.5	1.0	30	Fundamental
2480	Max Peak	Vert	59.33	28.86	2.3	90.5	0	90.5	93.98 (Avg)	3.5	1.0	30	Fundamental
2480	Max Peak	Horz	59.6	28.86	2.3	90.8	NA	90.8	113.98 (Peak)	23.2	1.0	170	Fundamental
2480	Max Peak	Horz	59.6	28.86	2.3	90.8	0	90.8	93.98 (Avg)	3.2	1.0	170	Fundamental
4960	Max Peak	Vert	51.46	33.62	-36.7	48.4	NA	48.4	74 (Peak)	25.6	1.0	180	Res. Band
4960	Max Peak	Vert	51.46	33.62	-36.7	48.4	0	48.4	54 (Avg)	5.6	1.0	180	Res. Band
4960	Max Peak	Horz	51.39	33.62	-36.7	48.3	NA	48.3	74 (Peak)	25.7	1.1	180	Res. Band
4960	Max Peak	Horz	51.39	33.62	-36.7	48.3	0	48.3	54 (Avg)	5.7	1.1	180	Res. Band
7440	Max Peak	Vert	49.94	36.63	-33.8	52.8	NA	52.8	74 (Peak)	21.2	1.0	180	Harmonic
7440	Max Peak	Vert	49.94	36.63	-33.8	52.8	0	52.8	54 (Avg)	1.2	1.0	180	Harmonic
7440	Max Peak	Horz	49.54	36.63	-33.8	52.4	NA	52.4	74 (Peak)	21.6	1.0	90	Harmonic
7440	Max Peak	Horz	49.54	36.63	-33.8	52.4	0	52.4	54 (Avg)	1.6	1.0	90	Harmonic



**1250 Peterson Dr., Wheeling, IL 60090**

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## APPENDIX A

# 20 dB BANDWIDTH

## PART 15.249




Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 06-28-2007  
Company: Dukane  
EUT: Aclick  
Test: 20 dB Bandwidth (FCC Part 15.249) To Show in Band Operation  
Operator: Jason Lauer  
Comment: Frequency – 2.405 GHz

**20 dB Bandwidth = 2.605 MHz**

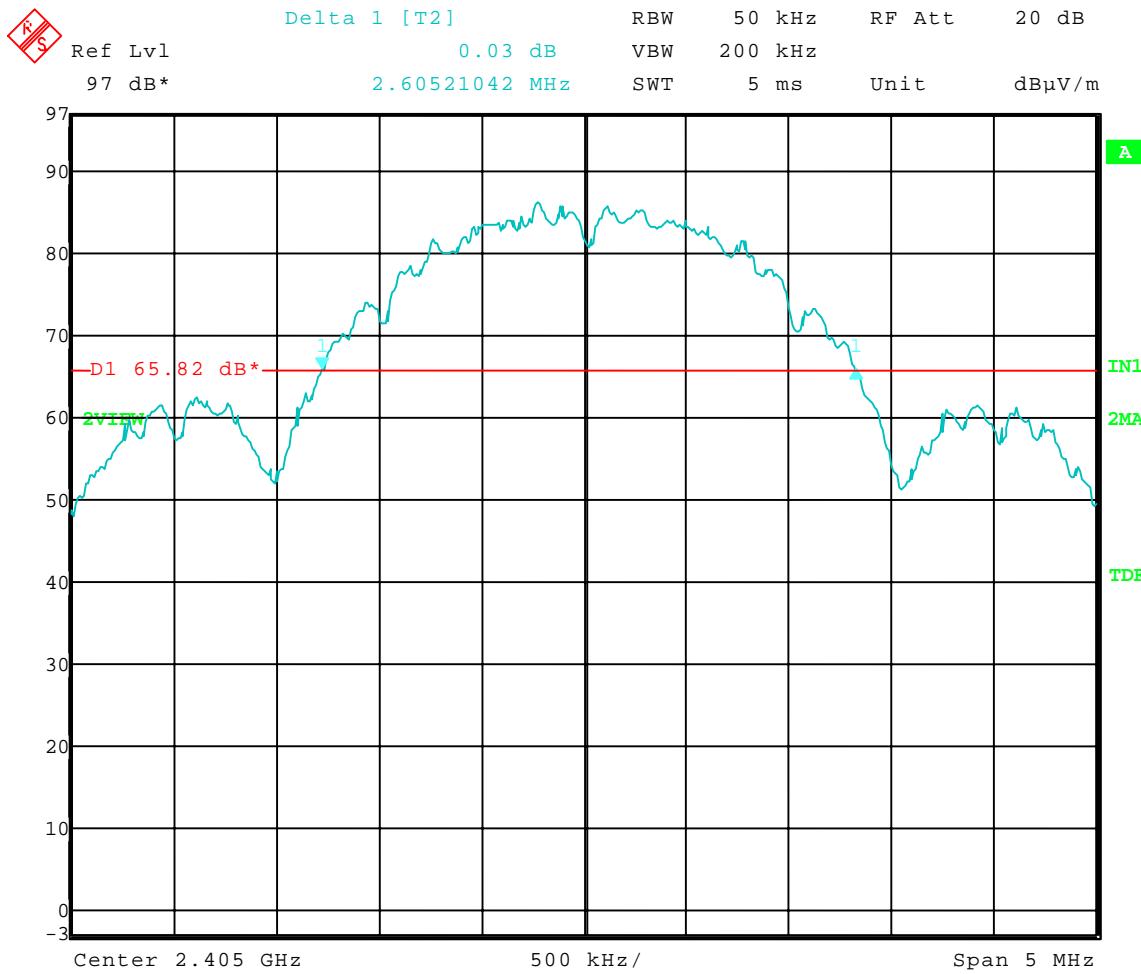




Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 06-28-2007  
Company: Dukane  
EUT: Aclick  
Test: 20 dB Bandwidth (FCC Part 15.249) To Show in Band Operation  
Operator: Jason Lauer  
Comment: Frequency – 2.440 GHz

**20 dB Bandwidth = 2.605 MHz**

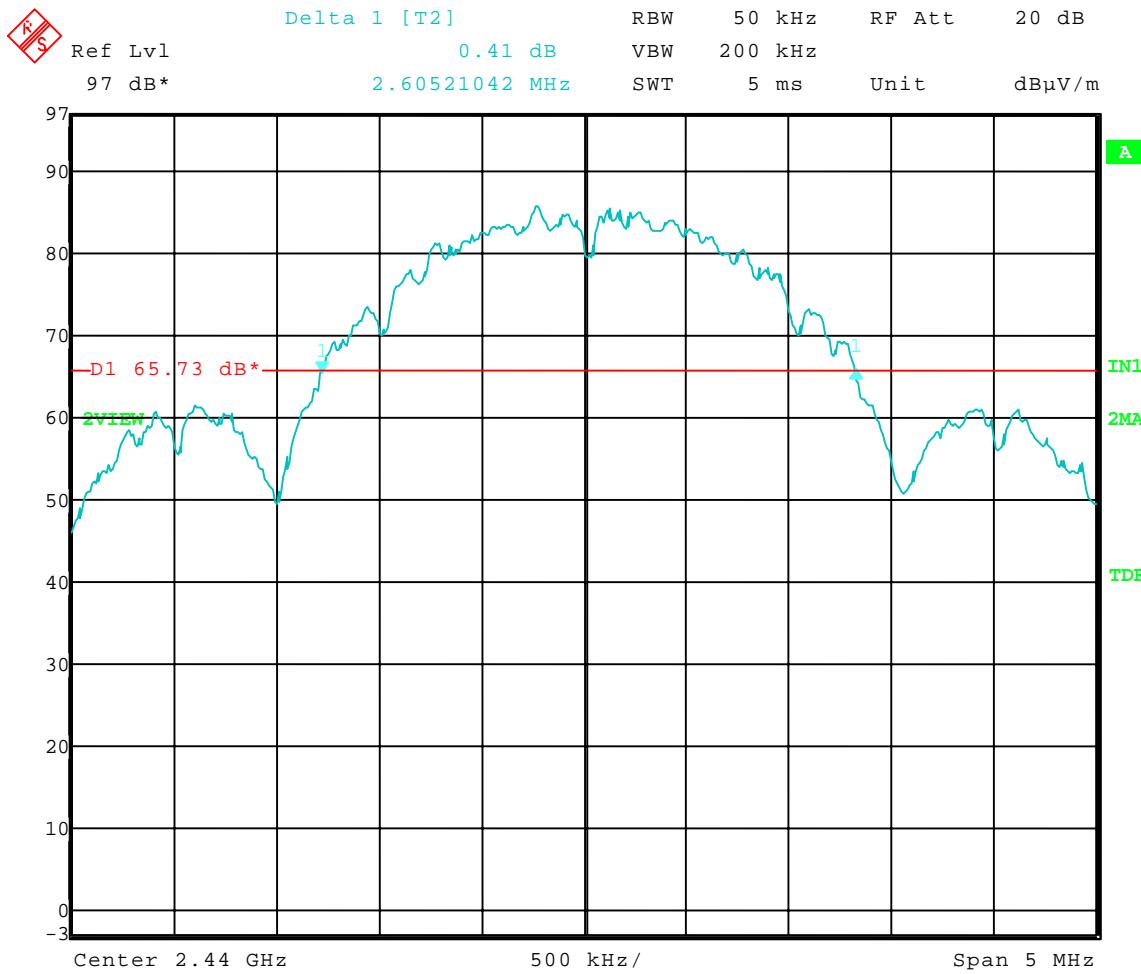

Date: 28.JUN.2007 11:41:59




Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 06-28-2007  
Company: Dukane  
EUT: Aclick  
Test: 20 dB Bandwidth (FCC Part 15.249) To Show in Band Operation  
Operator: Jason Lauer  
Comment: Frequency – 2.480 GHz

**20 dB Bandwidth = 2.375 MHz**

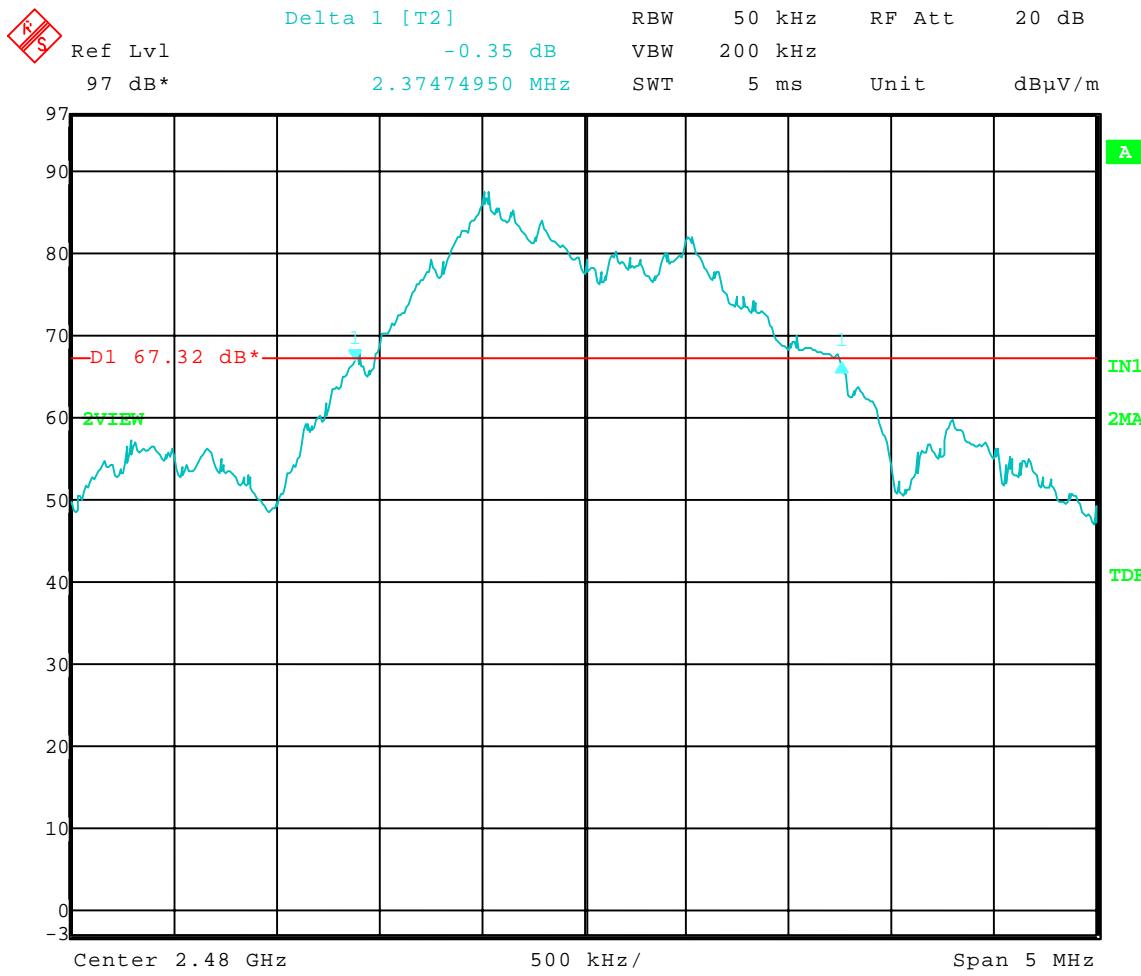



1250 Peterson Dr., Wheeling, IL 60090

Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

## APPENDIX A

# DUTY CYCLE CORRECTION FACTOR



Company: Dukane Corporation, AV Division  
Model Tested: SRSAC1  
Report Number: 13328

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

Test Date: 6-29-2007  
Company: Dukane  
EUT: Zigray  
Test: Aclick  
Operator: Jason Lauer  
Comment: Total on Time = 100 ms during 100 ms Sweep  
 $20 \log (100/100) = 0$   
**Duty Cycle Correction Factor = 0 dB**

