



RADIO TEST REPORT

Test Report No.: 32GE0273-HO-01-A-R1

Applicant : **NEC Corporation of America**
Type of Equipment : **Digital Portable Cellular Telephone**
Model No. : **KMP7R4E1-2A**
Test regulation : **FCC Part 22 Subpart H: 2006**
FCC ID : **A98-ROV0164**
Test Result : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This report is a revised version of 32GE0273-HO-01-A. 32GE0273-HO-01-A is replaced with this report.

Date of test:

March 30 to April 9, 2012

**Representative
test engineer:**

Yutaka Yoshida
Engineer of WiSE Japan,
UL Verification Service

Approved by:

Takahiro Hatakeda
Leader of WiSE Japan,
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	6
SECTION 4: Operation of E.U.T. during testing.....	9
SECTION 5: RF Output Power (Conducted/Radiated).....	15
SECTION 6: Bandwidth (Conducted)	16
SECTION 7: Spurious Emission and Band-Edge (Conducted/Radiated)	16
SECTION 8: Frequency Stability(Temperature/Voltage Variation)	17
APPENDIX 1: Data of EMI test	18
RF Output Power (Conducted).....	18
RF Output Power (Radiated).....	21
Peak to Average power Ratio (Conducted)	23
Bandwidth(Conducted)	25
Band Edge (Conducted)	27
Band Edge (Radiated).....	30
Spurious Emission (Conducted)	32
Spurious Emission (Radiated)	40
Frequency Stability(Temperature/Voltage Variation).....	43
APPENDIX 2: Test instruments	45
APPENDIX 3: Photographs of test setup.....	47
Radiated Emissions	47

SECTION 1: Customer information

Company Name : NEC Corporation of America
Address : Radio Communications Systems Division
6535N. State Highway 161, Irving, TX 75039-2402 USA
Telephone Number : +1 214 262 4241
Facsimile Number : +1 214 262 4225
Contact Person : Sanjay Wadhwa

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Digital Portable Cellular Telephone
Model No. : KMP7R4E1-2A
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC 3.8V
Receipt Date of Sample : March 27, 2012
Country of Mass-production : Japan
Condition of EUT : Production prototype
Modification of EUT : No Modification by the test lab

2.2 Product description

Model No: KMP7R4E1-2A, (referred to as the EUT in this report), is the Digital Portable Cellular Telephone.

Radio Specification [1/2]

Bluetooth (Ver.2.1 + EDR)

Equipment Type	Transceiver
Frequency of Operation	2402-2480MHz
Other Clock Frequency	48MHz
Type of Modulation	FHSS
Bandwidth & Channel spacing	1MHz & 1MHz
Antenna Connector Type	Integrated antenna

Low Energy (Ver.4.0)

Equipment Type	Transceiver
Frequency of Operation	2402-2480MHz
Other Clock Frequency	48MHz
Bandwidth & Channel spacing	1MHz & 2MHz
Antenna Connector Type	Integrated antenna

WLAN (IEEE802.11b/g/n (SISO/HT20))

Equipment Type	Transceiver
Frequency of Operation	2412-2462MHz
Other Clock Frequency	48MHz
Type of Modulation	DSSS, OFDM
Antenna Connector Type	Integrated antenna

GSM

Equipment Type	Transceiver
Frequency of Operation	[Up Link] GSM850: 824 – 849MHz PCS: 1850 – 1910MHz [Down Link] GSM850: 869 – 894MHz PCS: 1930 – 1990MHz
Other Clock Frequency	19.2MHz
Type of Modulation	GMSK
Channel spacing	200kHz
Antenna Connector Type	Integrated antenna

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Radio Specification [2/2]

WCDMA

Equipment Type	Transceiver
Frequency of Operation	[Up Link] Band V: 824 – 849MHz [Down Link] Band V: 869 – 894MHz
Other Clock Frequency	19.2MHz
Type of Modulation	HPSK
Channel spacing	5MHz
Antenna Connector Type	Integrated antenna

GPS

Equipment Type	Receiver
Receiver Type	Direct Downconversion
Frequency of Operation	1575.42MHz
Other Clock Frequency	57.6MHz
Antenna Connector Type	Integrated antenna

RFID

Equipment Type	Transceiver
Frequency of Operation	13.56MHz
Type of Modulation	ASK
Antenna Connector Type	Integrated antenna

*This test report applies for GSM(GSM850) and W-CDMA.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 22 Subpart H: 2006, final revised on November 29, 2006
Title : FCC 47CFR Part 22 Subpart H
Cellular Radiotelephone Service

3.2 Procedures and results

Item	Test Specification & Procedure	Remarks	Deviation	Worst margin	Results
RF Output Power(Conducted/ Radiated) (Conducted Output Power / Effective radiated power(ERP))	FCC 2.1046 FCC 22.913(a)(2)	Conducted/ Radiated	N/A	-	Complied
Emission Bandwidth, 99% Occupied Bandwidth	FCC 2.1049 FCC 22.917	Conducted	N/A	-	Complied
Band-Edge	FCC 2.1051 FCC 2.1053 FCC 22.917	Conducted/ Radiated	N/A	GSM [Conducted] 0.11dB 849.018MHz [Radiated] 4.8dB 849.10MHz, Hori./Vert. (Chassis's color: Pink) 5.1dB 824.00MHz, Vert. W-CDMA [Conducted] 7.06dB 824.000MHz [Radiated] 17.4dB 824.00MHz, Vert.	Complied
Spurious Emission(Conducted)	FCC 2.1051 FCC 22.917	Conducted	N/A	-	Complied
Spurious Emission(Radiated)	FCC 2.1053 FCC 22.917	Radiated	N/A	GSM 19.5dB 1697.60MHz, Vert. (Chassis's color: Pink) 16.3dB 1648.40MHz, Hori. W-CDMA 40.2dB 1673.20MHz, Hori.	Complied
Frequency Stability (Temperature Variation)	FCC 2.1055(a)(1)(b) FCC 22.355	Conducted	N/A	-	Complied
Frequency Stability (Voltage Variation)	FCC 2.1055(d)(1)(2) FCC 22.355	Conducted	N/A	-	Complied

Note: UL Japan's EMI Work Procedures No. 13-EM-W0420

*These tests were also referred to ANSI/TIA 603-C-2004 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards."

*These tests were performed without any deviations from test procedure except for additions or exclusions.

3.3 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Radiated Emission (EUT height: 0.8m) (+dB)	
Measurement Distance 3m	
25MHz-300MHz	5.4dB
300MHz-1000MHz	4.0dB
1GHz-12.75GHz	4.4dB

Power meter (+dB)	
Below 1GHz	Above 1GHz
1.0dB	1.0dB

Antenna terminal conducted emission and Power density (+dB)			Antenna terminal conducted emission (+dB)		Channel power (±dB)
Below 1GHz	1GHz-3GHz	3GHz-18GHz	18GHz-26.5GHz	26.5GHz-40GHz	
1.0dB	1.1dB	2.7dB	3.2dB	3.3dB	1.5dB

Antenna terminal conducted emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

3.4 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test): 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.5 Test instruments, Data of EMI, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

<GSM850>

Test	Operating mode	Power control	Tested frequency	Channel
RF output Power(Conducted), Peak to Average power Ratio (Conducted)	Transmitting (Tx) (GSM, GMSK) Transmitting (Tx) (GPRS, GMSK)	Max	824.2MHz 836.6MHz 848.8MHz	128 190 251
RF output Power (Radiated), *1)	Transmitting (Tx) (GPRS, GMSK)	Max	824.2MHz 836.6MHz 848.8MHz	128 190 251
Spurious Emission	Transmitting (Tx) (GSM, GMSK) *2)			
Band Edge (Conducted)	Transmitting (Tx) (GSM, GMSK) Transmitting (Tx) (GPRS, GMSK)	Max	824.2MHz 848.8MHz	128 251
Band Edge (Radiated)	Transmitting (Tx) (GSM, GMSK) *2)	Max	824.2MHz 848.8MHz	128 251
Emission Bandwidth, 99% Occupied bandwidth	Transmitting (Tx) (GSM, GMSK) Transmitting (Tx) (GPRS, GMSK)	Max	836.6MHz	190
Frequency Stability (Temperature/Voltage Variation)	Transmitting (Tx) (GSM, GMSK)	Max	836.6MHz	190

*1) The mode was used for testing as a representative, because it had the worst RF output Power (Conducted).

*2) The mode was used for testing as a representative, because it had the worst Band Edge (Conducted).

<W-CDMA>

Test	Operating mode	Power Control	Tested frequency	Channel
RF output Power(Conducted)	Transmitting (Tx) W-CDMA (RMC12.2kbps), Transmitting (Tx) W-CDMA (AMR), Transmitting (Tx) W-CDMA (HSDPA Subtest 1-4), Transmitting (Tx) W-CDMA (HSUPA Subtest 1-5)	See Section 4.1.1	826.4MHz 836.6MHz 846.6MHz	4132 4183 4233
RF output Power (Radiated), Spurious Emission, Peak to Average power Ratio (Conducted)	Transmitting (Tx) W-CDMA (RMC12.2kbps)	TPC all up bits (MAX)	826.4MHz 836.6MHz 846.6MHz	4132 4183 4233
Band Edge	Transmitting (Tx) W-CDMA (RMC12.2kbps)	TPC all up bits (MAX)	826.4MHz 846.6MHz	4132 4233
Emission Bandwidth, 99% Occupied bandwidth, Frequency Stability (Temperature/Voltage Variation)	Transmitting (Tx) W-CDMA (RMC12.2kbps)	TPC all up bits (MAX)	836.6MHz	4183

*The WCDMA and HSPA modes of EUT were verified on each channel and "sub-tests" according to section 4.1.1.
(Also refer to Release-6 procedures in section 5.2 of 3GPP TS 34.121.)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4.1.1 Explanation of the Rel-99 WCDMA and Rel-6 HSPA measurement mode

3GPP defines UE Test Modes and Channel Configurations for Regulatory Testing.

- **UE Test Modes:**
Test Mode 1(Data Loopback Test)
- **Channel Configurations:**
R99 – 12.2kpbs Reference Measurement Channel (RMC) channel
HSDPA – Fixed Reference Channel (FRC)
HSUPA – New HSUPA channel configuration (HSDPA data from DL is looped back onto UL)
- **Procedure to configure UE to transmit maximum power:**
Rel99: 3GPP TS 34.121 section 5.2
HSDPA Rel5: 3GPP TS 34.121 section 5.2A
HSDPA Rel6: 3GPP TS 34.121 section 5.2AA
HSUPA Rel6: 3GPP TS 34.121 section 5.2B

* About Rel-99 and HSDPA testing, test equipment send “all up bits” forcing UE max power

1) Explanation for HSDPA/HSPA Subtests

3GPP TS 34.121 defines test requirements and procedures for testing all variations of WCDMA. 3GPP TS 34.121 defines 4 HSDPA test configurations and 5 HSPA test configurations (“Subtests”) for various RF Conformance tests. The Following table shows Release 5 HSDPA and Release 6 HSPA Subtest Configurations per 3GPP TS 34.121.

[HSDPA]

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

[HSUPA]

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{oc}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

2) Maximum Output Power Verification

[HSDPA]

Maximum output power was verified on High, Middle and Low channels according to the Release 5 procedures described in section 5.2 of 3GPP TS 34.121, using an FRC with H-set 1 and 12.2kbps RMC with TPC (transmit power control) set to all "1's". Output power was measured according requirements for HS-DPCCH Sub-test 1-4.

[HSUPA]

Maximum output power was verified on the High, Middle and Low channels according to Release 6 procedures in section 5.2 of 3GPP TS 34.121, using the appropriate RMC, FRC and E-DCH configurations. When E-DCH was active, inner loop power control with power control algorithm 2 was used to maintain E-TFCI requirements. Output power for the applicable HSPA modes was measured for E-DCH Sub-test 1-5.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3) Test Equipment Setting Summary Table

The following table is the key parameters that was configured in test equipment.

Subtest	Mode	Loopback Mode	Rel99 RMC	HSDPA FRC	HSUPA Test	Common Setting		β_c/β_d	MPR	Power Class 3 limit
						β_c	β_d			
	Rel99	Test Mode 1	12.2kbps RMC	-	-	-	-	8/15	-	24(+1.7/-3.7dB)
1	Rel6 HSDPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	-	2/15	15/15	2/15	0	24(+1.7/-3.7dB)
2	Rel6 HSDPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	-	12/15	15/15	12/15	0	24(+1.7/-3.7dB)
3	Rel6 HSDPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	-	15/15	8/15	15/8	0.5	23.5(+2.2/-3.7dB)
4	Rel6 HSDPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	-	15/15	4/15	15/4	0.5	23.5(+2.2/-3.7dB)
1	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	HSUPA Loopback	11/15	15/15	11/15	0	24(+1.7/-3.7dB)
2	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	HSUPA Loopback	6/15	15/15	6/15	2	22(+3.7/-3.7dB)
3	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	HSUPA Loopback	15/15	9/15	15/9	1	23(+2.7/-3.7dB)
4	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	HSUPA Loopback	2/15	15/15	2/15	2	22(+3.7/-3.7dB)
5	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set 1 (QPSK)	HSUPA Loopback	15/15	15/15	15/15	0	24(+1.7/-3.7dB)

Subtest	HSDPA Specific Settings						
	ΔACK	ΔNACK	ΔCQI	Ack-Nack repetition factor	CQI Feedback	CQI Repetition Factor	Ahs= β_{hs}/β_c
Rel 6 HSDPA							
1	8	8	8	3	4ms	2	30/15
2	8	8	8	3	4ms	2	30/15
3	8	8	8	3	4ms	2	30/15
4	8	8	8	3	4ms	2	30/15

Subtest	HSDPA Specific Settings							HSUPA Specific Settings			HSUPA Additional Info	
	ΔACK	ΔNACK	ΔCQI	Ack-Nack repetition factor	CQI Feedback	CQI Repetition Factor	Ahs= β_{hs}/β_c	$\Delta\text{E-DPCCH}$	ΔHARQ	AG Index	ETFCI (form TS34.121 Table C.11.1.3)	Associated Max UL Data Rate kbps
Rel 6 HSPA												
1	8	8	8	3	4ms	2	30/15	6	0	20	75	242.1
2	8	8	8	3	4ms	2	30/15	8	0	12	67	174.9
3	8	8	8	3	4ms	2	30/15	8	0	15	92	482.8
4	8	8	8	3	4ms	2	30/15	5	0	17	71	205.8
5	8	8	8	3	4ms	2	30/15	7	0	21	81	308.9


HSUPA Reference E-TFCI Parameters
[Subtest 1,2,4,5]

Information Element	Value/Remark
E-DCH info	Uplink DPCH info
- E-DPDCH info	
- Reference E-TFCIs	5 E-TFCIs
- Reference E-TFCI	11
- Reference E-TFCI PO	4
- Reference E-TFCI	67
- Reference E-TFCI PO	18
- Reference E-TFCI	71
- Reference E-TFCI PO	23
- Reference E-TFCI	75
- Reference E-TFCI PO	26
- Reference E-TFCI	81
- Reference E-TFCI PO	27

[Subtest 3]

Information Element	Value/Remark
E-DCH info	Uplink DPCH info
- E-DPDCH info	
- Reference E-TFCIs	2 E-TFCIs
- Reference E-TFCI	11
- Reference E-TFCI PO	4
- Reference E-TFCI	92
- Reference E-TFCI PO	18

4.2 Configuration and peripherals



* Setup was taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Digital Portable Cellular Telephone	KMP7R4E1-2A	004401200900013 *1) 004401200900047 *2) 004401200900062 *3)	NEC Corporation of America	EUT

*1) Used for Antenna Terminal Conducted test

*2) Used for Radiated Emission test

*3) Used for Radiated Emission test (Chassis's color: Pink)

SECTION 5: RF Output Power (Conducted/Radiated)

[Conducted : Conducted Output Power]

Test Procedure

The RF output power (conducted) was measured with a Wireless Communication Test Set at the antenna port.

[Radiated : Effective radiated power(ERP)]

Test Procedure

- 1) EUT was placed on a platform of nominal size, 1.0 m by 1.5m, raised 80cm above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The Radiated Electric Field Strength intensity has been measured in a semi anechoic chamber with a ground plane and at a distance of 3m.
The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
- 2) Exchanged the EUT to the Substitution Antenna, the antenna was set for the same height as EUT on the table. The frequency below 1GHz of the Substitution Antenna was used as the Half wave dipole Antenna, which is harmonized with the measured frequency in 1).
The Substitution Antenna was connected with the Signal Generator, and the polarized electromagnetic radiation of the Substitution Antenna was matched with the one of the measuring Antenna, which was set with the Signal Generator to the measured frequency in 1). Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field is equal to the measured value in 1).
The measuring antenna height varied between 1 and 4m to obtain the maximum receiving level.
Its Output power of Signal Generator was recorded.
- 3) Effective radiated power(ERP) was calculated by subtracting the cable loss and the attenuator loss connected between the Signal Generator and the Substitution Antenna from the Output power of the Signal Generator recorded in 2).

- The carrier level and noise levels were confirmed at each position of X, Y and Z axis of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data	:	APPENDIX 1
Test result	:	Pass

SECTION 6: Bandwidth (Conducted)

Test Procedure

The Emission Bandwidth and 99% Occupied Bandwidth was measured with a spectrum analyzer and attenuator connected to the antenna port.

Test data	:	APPENDIX 1
Test result	:	Pass

SECTION 7: Spurious Emission and Band-Edge (Conducted/Radiated)

[Conducted]

Test Procedure

The Spurious Emission and Band-Edge was measured with a spectrum analyzer and attenuator connected to the antenna port.

Test data	:	APPENDIX 1
Test result	:	Pass

[Radiated]

Test Procedure

- 1) EUT was placed on a platform of nominal size, 1.0m by 1.5m, raised 80cm above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The Radiated Electric Field Strength intensity has been measured in a semi anechoic chamber with a ground plane and at a distance of 3m.
The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
- 2) Exchanged the EUT to the Substitution Antenna, the antenna was set for the same height as EUT on the table. The frequency below 1GHz of the Substitution antenna was used as the Half wave dipole antenna and Shorted dipole antenna calibrated with the Half wave dipole antenna, which is harmonized with the measured frequency in 1).
The frequency above 1GHz of the Substitution antenna was used with Horn antenna calibrated with the Half wave dipole antenna.
The Substitution antenna was connected with the Signal Generator, and the polarized electromagnetic radiation of the Substitution antenna was matched with the one of the measuring antenna, which was set with the Signal Generator to the measured frequency in 1). Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field is equal to the measured value in 1).
The measuring antenna height varied between 1 and 4m to obtain the maximum receiving level.
Its Output power of Signal Generator was recorded.
- 3) Effective radiated power was calculated by subtracting the cable loss and the attenuator loss connected between the Signal Generator and the Substitution Antenna from the Output power of the Signal Generator recorded in 2).
For the usage of the antenna (Shorted dipole and Horn antenna) except for the Half wave dipole antenna (2.15dBi) for the Substitution antenna, the Effective radiated power was calculated by compensating the finite difference in the antenna gain of the Half wave dipole antenna, and Substitution antenna.

- The carrier level and noise levels were confirmed at each position of X, Y and Z axis of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data	:	APPENDIX 1
Test result	:	Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 8: Frequency Stability(Temperature/Voltage Variation)

Test Procedure

The Frequency Stability was measured with a Wireless Communication Test Set and attenuator connected to the antenna port.

The Frequency Drift was measured with the 10 deg. C. steps from -30 deg. C. to 50 deg. C., and it is presented as the ppm unit. The Frequency Drift was measured with the normal temperature (20 deg. C.) and Voltage tolerance (DC3.4V to DC4.35V), and it is presented as the ppm unit.

Temperature	: -30deg.C to +50deg.C (10 deg. C. step)
Voltage	: Vnom:DC3.8V, Vmin:DC3.4V, Vmax:DC4.35V

In case of the voltage supply below DC 3.4V, the EUT stops operation by low battery detection function. Therefore, Frequency Stability test was performed under the above condition.

Test data	:	APPENDIX 1
Test result	:	Pass

APPENDIX 1: Data of EMI test

RF Output Power (Conducted)

Conducted Output Power GSM Mode

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 32GE0273-HO-01
Date 04/06/2012
Temperature/ Humidity 20deg. C / 50% RH
Engineer Yutaka Yoshida
Mode Tx

Mode	Ch	Frequency [MHz]	Reading Average frame power [dBm]	Atten. [dB]	Cable Loss [dB]	Result [dBm]
GSM (GMSK)	Low	824.2	16.02	10.05	6.94	33.01
	Mid	836.6	16.00	10.05	6.94	32.99
	High	848.8	15.98	10.05	6.94	32.97
GPRS (GMSK)	Low	824.2	16.10	10.05	6.94	33.09
	Mid	836.6	15.95	10.05	6.94	32.94
	High	848.8	16.07	10.05	6.94	33.06

Results = Reading + Attenuator + Cable Loss

RF Output Power (Conducted)

Conducted Output Power W-CDMA Mode

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 32GE0273-HO-01
Date 03/30/2012
Temperature/ Humidity 20deg. C / 40% RH
Engineer Yutaka Yoshida
Mode Tx

Mode	Ch	Frequency [MHz]	Reading AVG [dBm]	Cable loss [dB]	Result [dBm]
AMR	4132	826.4	17.02	7.00	24.02
	4183	836.6	16.79	7.00	23.79
	4233	846.6	16.81	7.00	23.81
RMC 12.2kbps	4132	826.4	16.95	7.00	23.95
	4183	836.6	17.12	7.00	24.12
	4233	846.6	17.18	7.00	24.18
HSDPA Subtest1	4132	826.4	16.69	7.00	23.69
	4183	836.6	17.11	7.00	24.11
	4233	846.6	16.90	7.00	23.90
HSDPA Subtest2	4132	826.4	16.92	7.00	23.92
	4183	836.6	17.00	7.00	24.00
	4233	846.6	16.96	7.00	23.96
HSDPA Subtest3	4132	826.4	16.55	7.00	23.55
	4183	836.6	16.71	7.00	23.71
	4233	846.6	16.54	7.00	23.54
HSDPA Subtest4	4132	826.4	16.52	7.00	23.52
	4183	836.6	16.75	7.00	23.75
	4233	846.6	16.65	7.00	23.65
HSUPA Subtest1	4132	826.4	16.30	7.00	23.30
	4183	836.6	16.23	7.00	23.23
	4233	846.6	16.63	7.00	23.63
HSUPA Subtest2	4132	826.4	15.04	7.00	22.04
	4183	836.6	15.18	7.00	22.18
	4233	846.6	15.10	7.00	22.10
HSUPA Subtest3	4132	826.4	15.63	7.00	22.63
	4183	836.6	15.98	7.00	22.98
	4233	846.6	15.74	7.00	22.74
HSUPA Subtest4	4132	826.4	15.81	7.00	22.81
	4183	836.6	15.88	7.00	22.88
	4233	846.6	15.41	7.00	22.41
HSUPA Subtest5	4132	826.4	16.53	7.00	23.53
	4183	836.6	16.50	7.00	23.50
	4233	846.6	16.58	7.00	23.58

MPR Explanation

The product implements an Enhanced MPR (E-MPR) software algorithm that also considers power compression (Scaling), a requirement per 3GPP 25.214 section 5.1.2.6, to generate a more accurate Cubic Metric (CM) value that is used to determine the magnitude of power reduction for HSPA signals. The Enhanced MPR solution can introduce a deviation of the actual observed power reduction from the MPR target values configured for a device.

In the power scaling process defined by 3GPP TS 25.214, the channel beta values are modified as the transmitted signal approaches maximum power to ensure that the transmit power does not exceed the maximum rated transmit power and is also compliant with emissions requirements. The power scaling process considers the software-defined MPR target values based on the CM for the signal to be transmitted to determine the required power reduction for a given signal. The actual CM value of the signal transmitted after power scaling, however, is often different from the estimated CM value used in the power reduction algorithm.

An accurate CM value is desirable as the goal of power reduction is to maintain compliance with emissions limits. By using a more accurate CM value, the E-MPR process minimizes the magnitudes of power reduction required to maintain emissions compliance whereas the legacy MPR software may incorporate a magnitude of power reduction that is higher than is required for emissions compliance.

The enhanced power reduction may result in around 1dB of variance from the MPR target values depending on HSPA channel configuration (e.g. 34.121 subtest) and characteristics of hardware RF design.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

RF Output Power (Radiated)

Effective radiated power(ERP)
GSM Mode

Report No. 32GE0273-HO-01
Test place Head Office EMC Lab.
Semi Anechoic Chamber No.3
Date 04/09/2012
Temperature / Humidity 27 deg. C / 30 % RH
Engineer Tomohisa Nakagawa
Mode Tx (GPRS, GMSK)

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal		Vertical		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER	Rx Ant. Height [cm]	Turn Table [deg.]	Rx Ant. Height [cm]	Turn Table [deg.]	
824.20	101.3	99.3	42.5	43.5	4.7	2.15	10.0	27.8	28.9	38.4	10.6	9.5	109	219	137	120	
836.60	100.7	98.6	42.0	43.7	4.7	2.15	10.0	27.3	29.0	38.4	11.1	9.4	100	209	135	59	
848.80	100.0	98.1	42.0	42.5	4.7	2.15	10.1	27.2	27.7	38.4	11.2	10.7	100	214	135	52	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 3MHz, VBW: 8MHz)

(Chassis's color: Pink)

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal		Vertical		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER	Rx Ant. Height [cm]	Turn Table [deg.]	Rx Ant. Height [cm]	Turn Table [deg.]	
824.20	101.6	100.3	42.8	44.5	4.7	2.15	10.0	28.1	29.9	38.4	10.3	8.5	100	212	149	117	
836.60	101.2	99.0	42.5	44.1	4.7	2.15	10.0	27.8	29.4	38.4	10.6	9.0	100	208	143	52	
848.80	99.4	98.1	41.4	42.5	4.7	2.15	10.1	26.6	27.7	38.4	11.8	10.7	100	202	145	59	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 3MHz, VBW: 8MHz)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

RF Output Power (Radiated)
Effective radiated power(ERP)
W-CDMA (RMC12.2kbps) Mode

Report No. 32GE0273-HO-01
Test place Head Office EMC Lab.
Semi Anechoic Chamber No.2
Date 03/30/2012
Temperature / Humidity 22 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal		Vertical		Remarks
	HOR	VER	HOR	VER				HOR	VER		Rx Ant. Height [cm]	Turn Table [deg]	Rx Ant. Height [cm]	Turn Table [deg]			
826.40	91.1	89.5	35.4	37.1	5.6	2.15	10.0	19.8	21.5	38.4	18.6	16.9	100	209	149	50	
836.60	91.4	89.8	35.7	36.9	5.6	2.15	10.0	20.1	21.3	38.4	18.4	17.2	100	217	139	48	
846.60	92.1	89.8	37.2	36.6	5.7	2.15	10.1	21.5	20.9	38.4	16.9	17.5	100	215	137	41	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 5MHz, VBW: 50MHz)


Peak to Average power Ratio (Conducted)

Report No. 32GE0273-HO-01
Test place Head Office EMC Lab. No. 6 Measurement Room
Date 03/30/2012 04/06/2012
Temperature / Humidity 20deg. C / 40% RH 20deg. C / 50% RH
Engineer Yutaka Yoshida Yutaka Yoshida
Mode Tx GSM(GMSK)
Tx GPRS(GMSK)
Tx W-CDMA(RMC12.2kbps)

Mode	Channel	Frequency [MHz]	Peak to Average power Ratio [dB]
GSM	128	824.20	0.363
	190	836.60	0.246
	251	848.80	0.193
GPRS	128	824.20	0.350
	190	836.60	0.224
	251	848.80	0.205
W-CDMA	4132	826.40	2.77
	4183	836.60	2.95
	4233	846.60	2.86

*In order to decide the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth, an average and a peak trace were used on a spectrum analyzer .

Peak to Average power Ratio (Coducted)
W-CDMA Band V

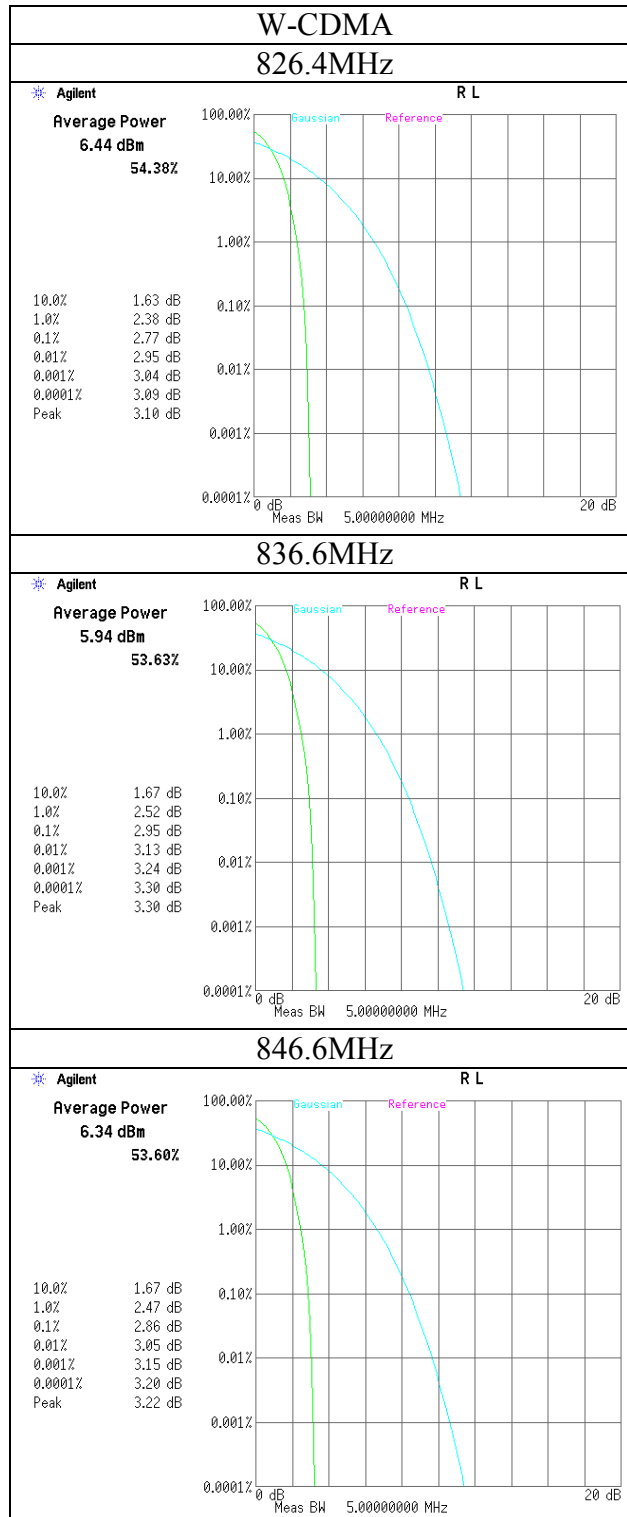


*Set the spectrum analyzer radio mode to 3GPP WCDMA (CCDF)

Bandwidth(Conducted) GSM Mode

Test place	Head Office EMC Lab. No.6 Measurement Room
Report No.	32GE0273-HO-01
Date	04/06/2012
Temperature/ Humidity	20deg. C / 50% RH
Engineer	Yutaka Yoshida
Mode	Tx GSM(GMSK)
Mode	Tx GPRS(GMSK)


Mode	FREQ [MHz]	26dB Bandwidth [kHz]	99% OBW [kHz]	Limit [kHz]
GSM	836.6	336.235	249.7716	-
GPRS	836.6	333.373	248.9933	-

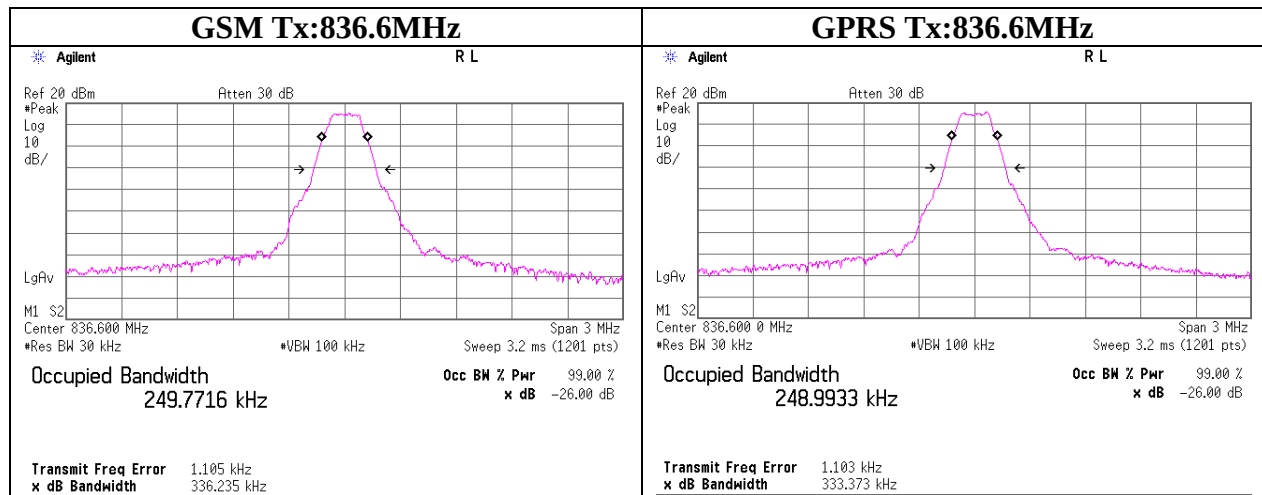

Bandwidth(Conducted)
W-CDMA (RMC12.2kbps) Mode

Test place	Head Office EMC Lab. No.6 Measurement Room
Report No.	32GE0273-HO-01
Date	03/30/2012
Temperature/ Humidity	20deg.C / 40% RH
Engineer	Yutaka Yoshida
Mode	Tx

CH	FREQ	26dB Bandwidth	99% OBW	Limit
	[MHz]	[MHz]	[MHz]	[MHz]
Mid	836.6	4.670	4.1633	-

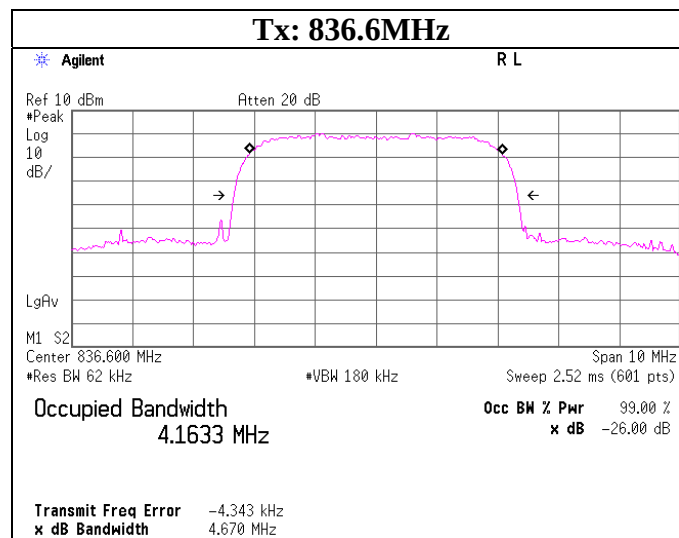


Band Edge (Conducted)

Test place	Head Office EMC Lab. No.6 Measurement Room
Report No.	32GE0273-HO-01
Date	04/06/2012
Temperature/ Humidity	20deg. C / 50% RH
Engineer	Yutaka Yoshida
Mode	Tx GSM(GMSK)

Frequency [MHz]	Reading [dBm]	Atten. [dB]	Cable Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
823.979	-33.11	10.05	7.89	-15.17	-13.0	2.17
824.000	-36.08	10.05	7.89	-18.14	-13.0	5.14
849.000	-34.98	10.05	7.89	-17.04	-13.0	4.04
849.018	-31.05	10.05	7.89	-13.11	-13.0	0.11

VIDEO AV 30 times

Sample Calculation : Result = Reading + Atten. + Cable Loss

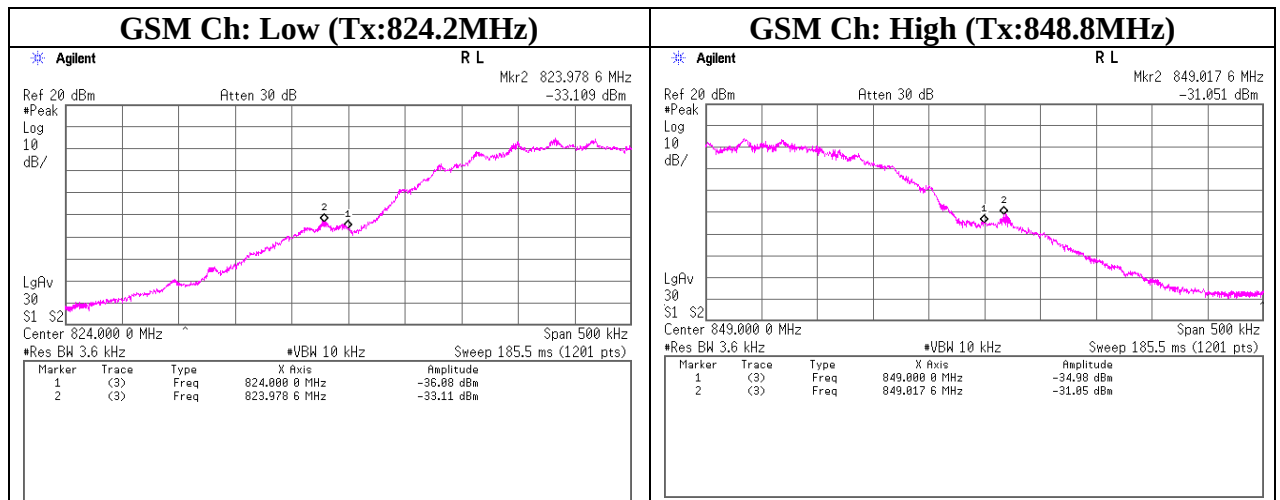


Band Edge (Conducted)

Test place	Head Office EMC Lab. No.6 Measurement Room
Report No.	32GE0273-HO-01
Date	04/06/2012
Temperature/ Humidity	20deg. C / 50% RH
Engineer	Yutaka Yoshida
Mode	Tx GPRS(GMSK)

Frequency [MHz]	Reading [dBm]	Atten. [dB]	Cable Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
823.995	-32.24	10.05	7.89	-14.30	-13.0	1.30
824.000	-37.84	10.05	7.89	-19.90	-13.0	6.90
849.000	-37.22	10.05	7.89	-19.28	-13.0	6.28
849.022	-31.06	10.05	7.89	-13.12	-13.0	0.12

VIDEO AV 30 times

Sample Calculation : Result = Reading + Atten. + Cable Loss

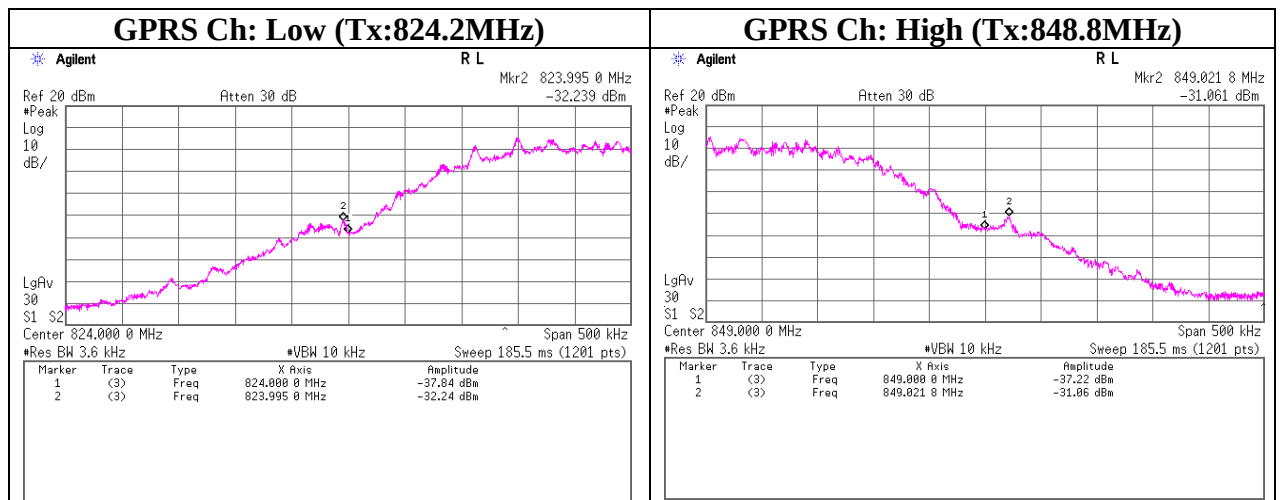


Band Edge (Conducted)
W-CDMA (RMC12.2kbps) Mode

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 32GE0273-HO-01
Date 03/30/2012
Temperature/ Humidity 20deg. C / 40% RH
Engineer Yutaka Yoshida
Mode Tx

Frequency	Reading	Atten.	Cable Loss	Result	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dBm]	[dBm]	[dB]
823.833	-39.12	10.05	7.88	-21.19	-13.0	8.19
824.000	-37.99	10.05	7.88	-20.06	-13.0	7.06
849.000	-39.67	10.05	7.88	-21.74	-13.0	8.74

Result = Reading + Atten. + Cable Loss

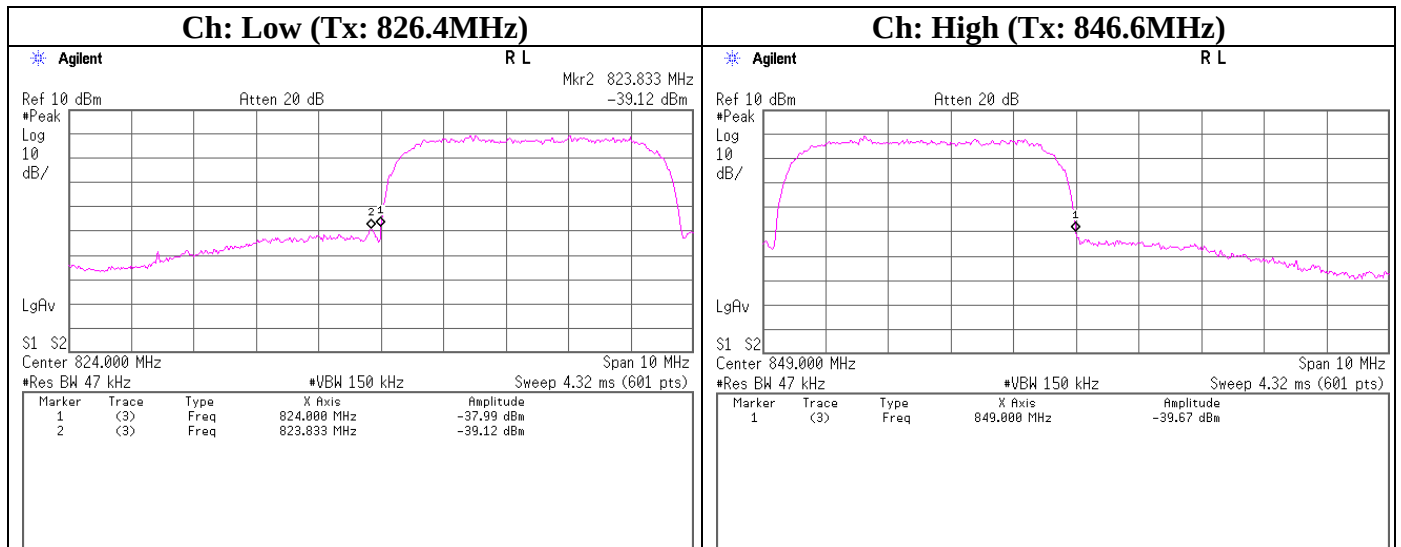

Band Edge (Radiated) GSM Mode

Report No. 32GE0273-HO-01
Test place Head Office EMC Lab.
Semi Anechoic Chamber No.3
Date 04/09/2012
Temperature / Humidity 27 deg. C / 30 % RH
Engineer Tomohisa Nakagawa
Mode Tx (GSM, GMSK)

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal		Vertical		Remarks
	HOR	VER	HOR	VER				HOR	VER		Rx Ant. Height [cm]	Turn Table [deg.]	Rx Ant. Height [cm]	Turn Table [deg.]			
823.99	51.1	47.4	-7.3	-7.4	4.7	2.15	10.0	-22.0	-22.1	-13.0	9.0	9.1	109	219	137	120	
824.00	47.7	46.0	-10.7	-8.8	4.7	2.15	10.0	-25.4	-23.5	-13.0	12.4	10.5	109	219	137	120	
849.00	49.0	46.8	-8.3	-7.6	4.7	2.15	10.1	-23.1	-22.4	-13.0	10.1	9.4	100	214	135	52	
849.10	54.3	51.4	-3.0	-3.0	4.7	2.15	10.1	-17.8	-17.8	-13.0	4.8	4.8	100	214	135	52	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A AV (RBW: 3.6kHz, VBW: 10kHz)

(Chassis's color: Pink)

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal		Vertical		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER	Rx Ant. Height [cm]	Turn Table [deg.]	Rx Ant. Height [cm]	Turn Table [deg.]	
823.99	53.0	51.4	-5.4	-3.4	4.7	2.15	10.0	-20.1	-18.1	-13.0	7.1	5.1	100	212	149	117	
824.00	48.6	46.8	-9.8	-8.0	4.7	2.15	10.0	-24.5	-22.7	-13.0	11.5	9.7	100	212	149	117	
849.00	47.7	46.9	-9.6	-7.5	4.7	2.15	10.1	-24.4	-22.3	-13.0	11.4	9.3	100	202	145	135	
849.10	51.5	50.3	-5.8	-4.1	4.7	2.15	10.1	-20.6	-18.9	-13.0	7.6	5.9	100	202	145	135	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A AV (RBW: 3.6kHz, VBW: 10kHz)

Band Edge (Radiated)
W-CDMA (RMC12.2kbps) Mode

Report No. 32GE0273-HO-01
Test place Head Office EMC Lab.
Semi Anechoic Chamber No.2
Date 03/30/2012
Temperature / Humidity 22 deg. C / 32 % RH
Engineer Tomohisa Nakagawa
Mode Tx

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal Rx Ant. Turn Height Table [cm] [deg.]		Vertical Rx Ant. Turn Height Table [cm] [deg.]		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER					
823.96	38.9	34.2	-15.2	-15.9	8.6	2.15	10.0	-33.8	-34.5	-13.0	20.8	21.5	100	209	149	50	
824.00	38.9	38.3	-15.2	-11.8	8.6	2.15	10.0	-33.8	-30.4	-13.0	20.8	17.4	100	209	149	50	
849.00	39.9	37.5	-13.3	-13.5	8.7	2.15	10.1	-32.1	-32.3	-13.0	19.1	19.3	100	215	137	41	
850.03	38.7	35.2	-14.5	-15.8	8.7	2.15	10.1	-33.3	-34.6	-13.0	20.3	21.6	100	215	137	41	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 47kHz, VBW: 150kHz)

Spurious Emission (Conducted)

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 32GE0273-HO-01
Date 04/06/2012
Temperature/ Humidity 20deg. C / 50% RH
Engineer Yutaka Yoshida
Mode Tx GSM(GMSK)


Limit Line

Tx Frequency [MHz]	Limit [dBm]	Atten. [dB]	Cable Loss [dB]	Limit Line [dBm]
824.2	-13.0	10.05	7.89	-30.9
836.6	-13.0	10.05	7.89	-30.9
848.8	-13.0	10.05	7.89	-30.9


Sample Calculation : Limit Line = Limit - Atten. - Cable Loss

*All the spurious noises were below the above limit line.


Spurious Emission (Conducted)
GSM Mode / Tx:824.2MHz

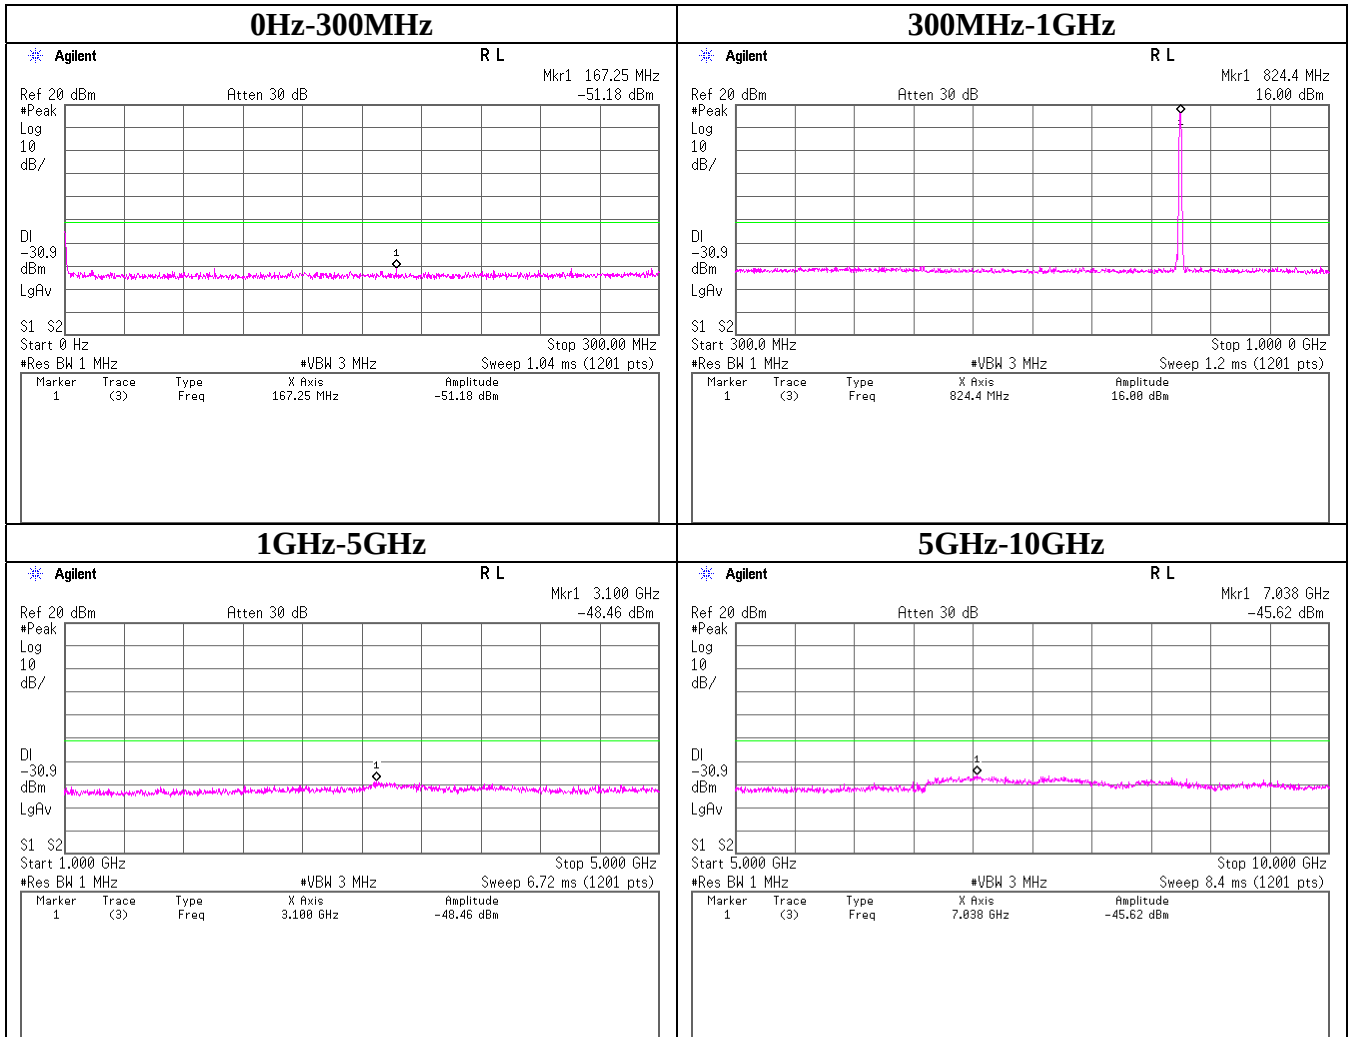

Spurious Emission (Conducted)
GSM Mode / Tx:836.6MHz

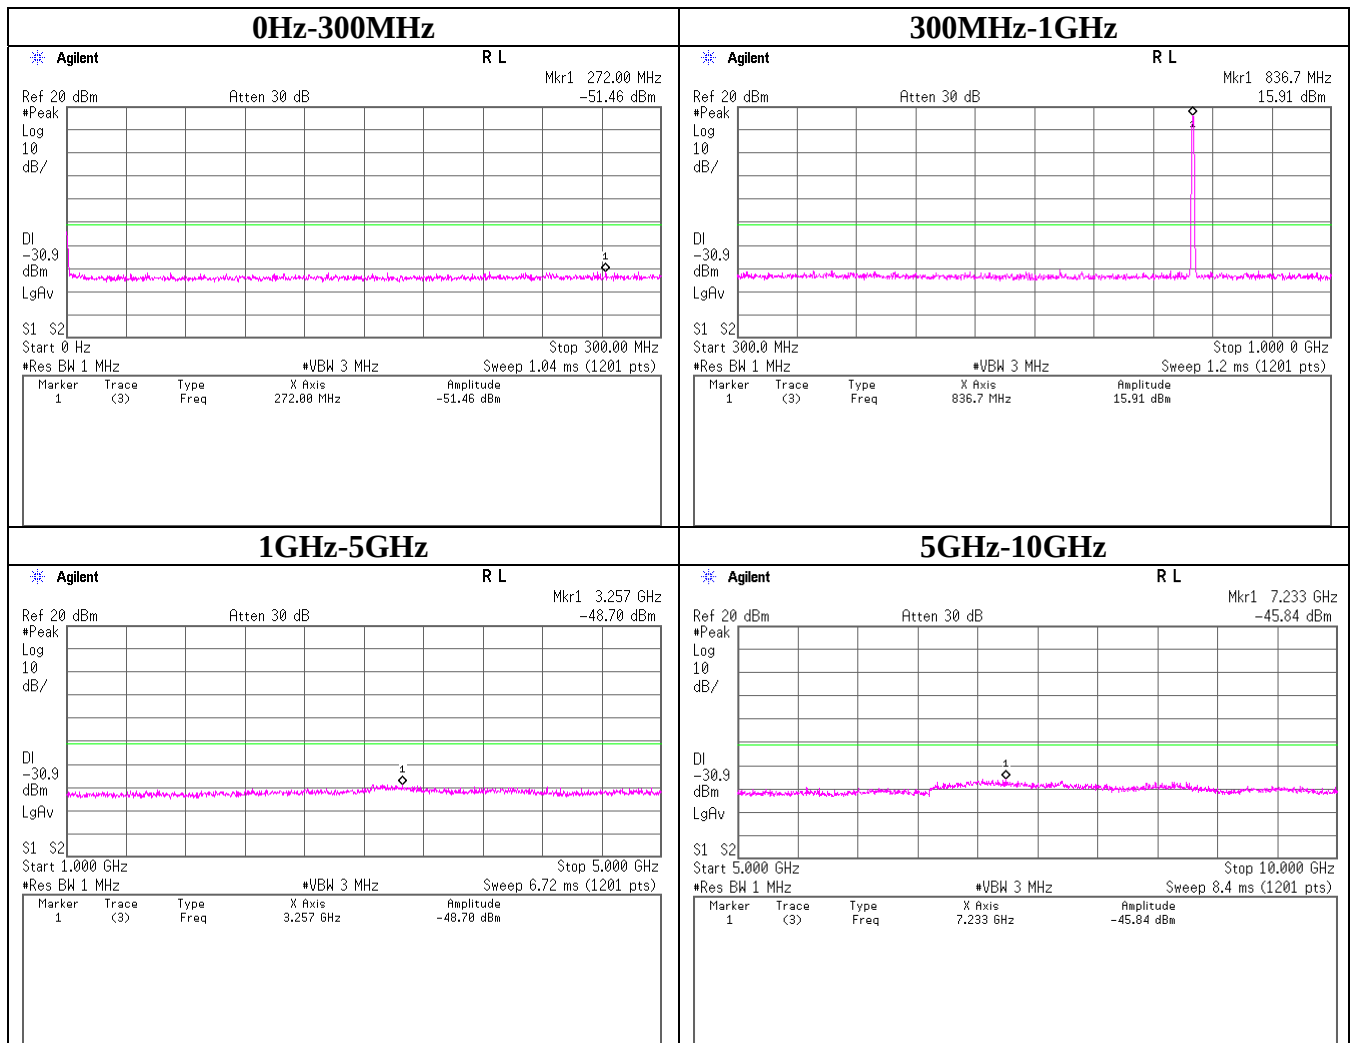

Spurious Emission (Conducted)
GSM Mode / Tx:848.8MHz

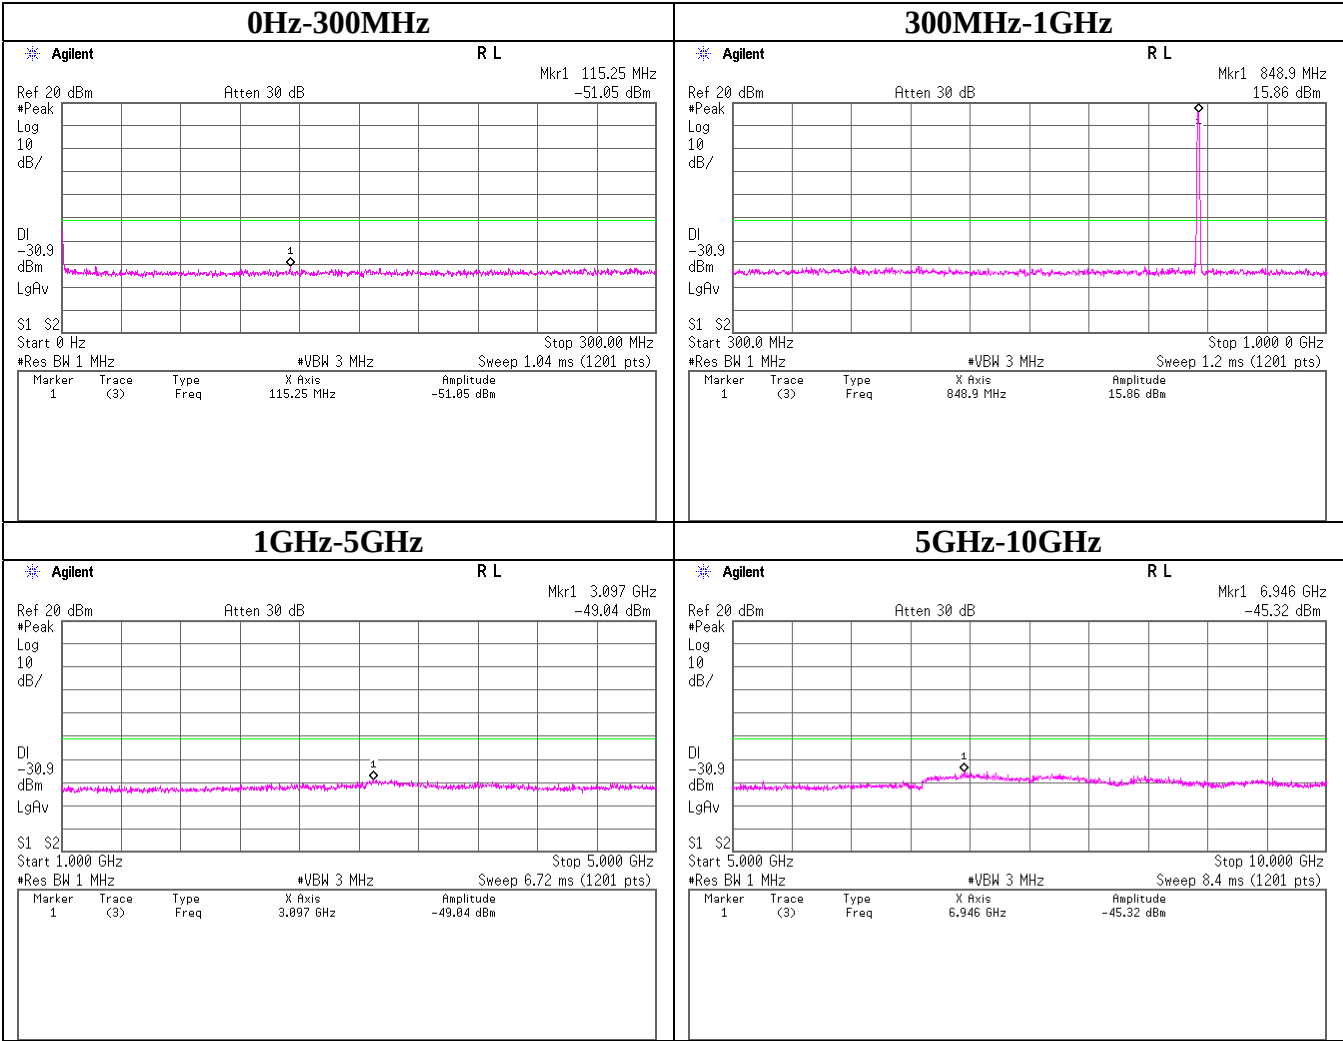

Spurious Emission (Conducted)
W-CDMA (RMC12.2kbps) Mode

Test place	Head Office EMC Lab. No.6 Measurement Room
Report No.	32GE0273-HO-01
Date	03/30/2012
Temperature/ Humidity	20deg. C / 40% RH
Engineer	Yutaka Yoshida
Mode	Tx


Limit Line

Tx Frequency [MHz]	Limit [dBm]	Atten. [dB]	Cable Loss [dB]	Limit Line [dBm]
826.4	-13.0	10.05	7.88	-30.9
836.6	-13.0	10.05	7.88	-30.9
846.6	-13.0	10.05	7.88	-30.9


Sample Calculation : Limit Line = Limit - Atten. - Cable Loss

*All the spurious noises were below the above limit line.


Spurious Emission (Conducted)
W-CDMA(RMC12.2kbps) Mode / Tx: 826.4MHz

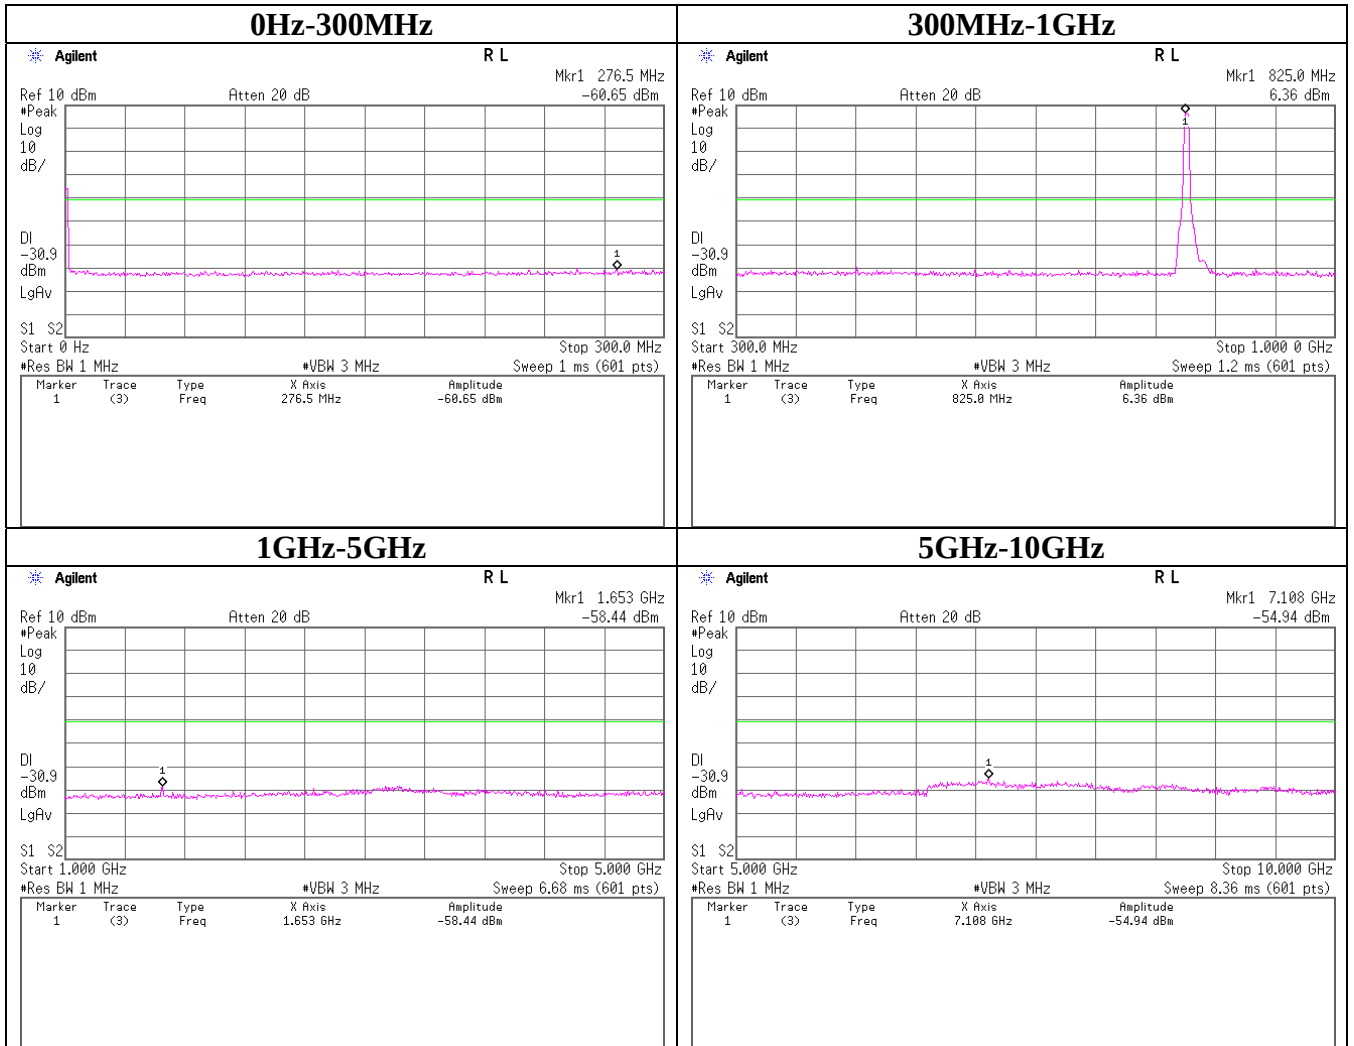

Spurious Emission (Conducted)
W-CDMA(RMC12.2kbps) Mode / Tx: 836.6MHz

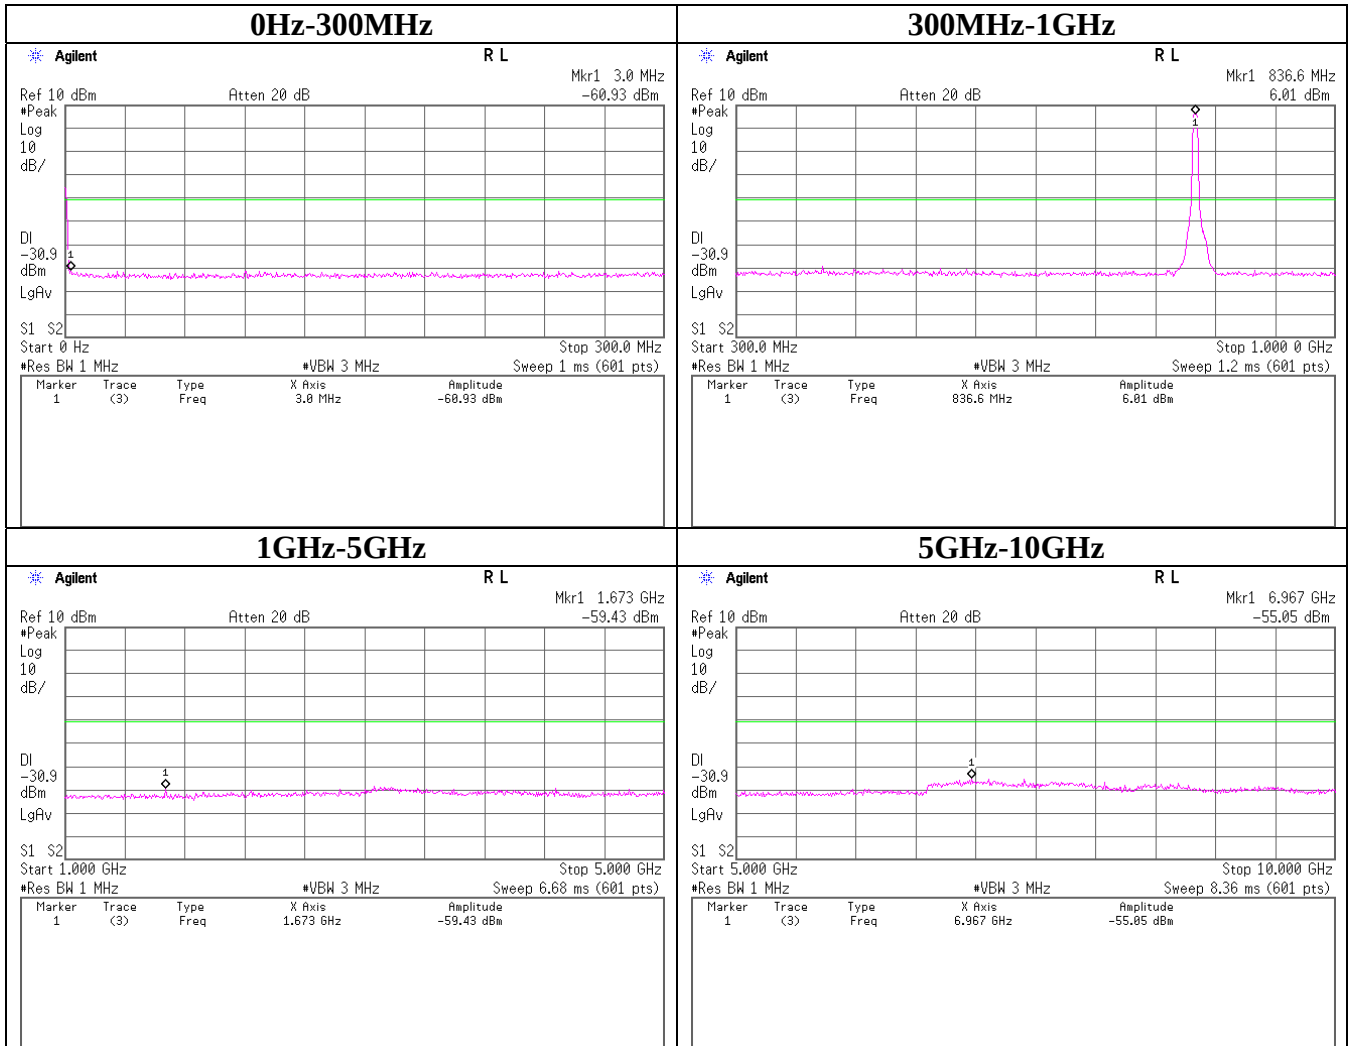

Spurious Emission (Conducted)
W-CDMA(RMC12.2kbps) Mode / Tx: 846.6MHz

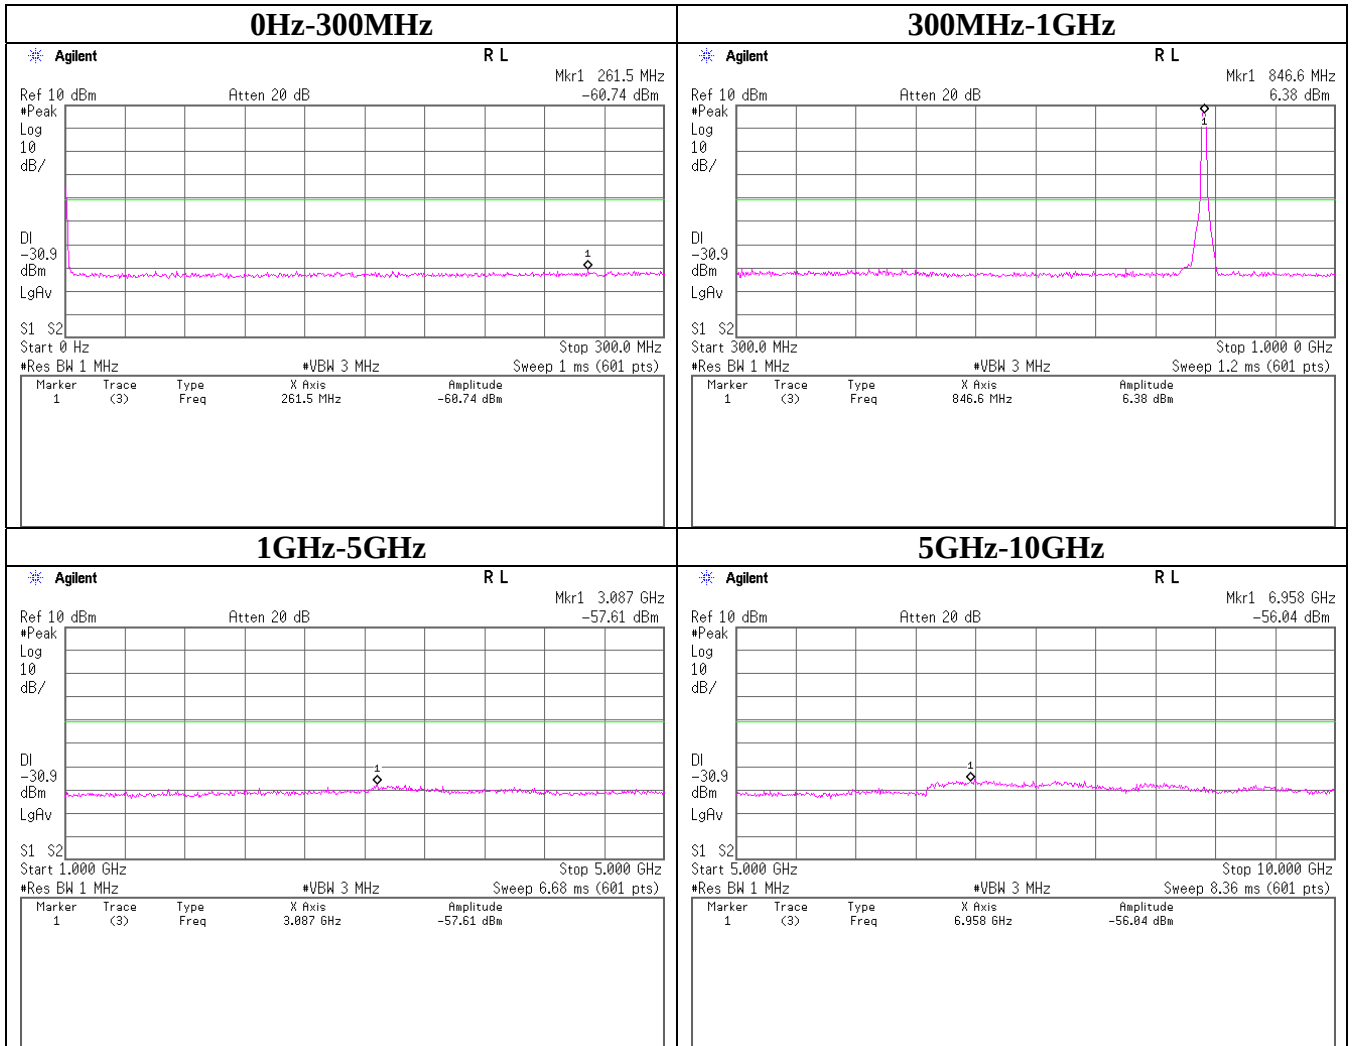

Spurious Emission (Radiated) GSM Mode

Report No. 32GE0273-HO-01
Test place Head Office EMC Lab.
Semi Anechoic Chamber No.3
Date 04/09/2012
Temperature / Humidity 27 deg. C / 30 % RH
Engineer Tomohisa Nakagawa
Mode Tx (GSM, GMSK)

Tx 824.2MHz

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal Rx Ant. Height [cm]		Vertical Turn Table [deg.]		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER					
1648.40	69.3	66.7	-39.5	-43.0	3.8	9.6	0.0	-35.9	-39.4	-13.0	22.9	26.4	100	188	106	285	
2472.60	55.0	52.1	-49.1	-56.2	4.4	9.5	0.0	-46.1	-53.2	-13.0	33.1	40.2	153	141	146	126	
3296.80	48.3	49.4	-64.0	-59.5	4.4	11.6	0.0	-59.0	-54.5	-13.0	46.0	41.5	153	251	100	141	
4121.00	45.5	44.8	-60.8	-70.5	5.0	11.6	0.0	-56.3	-66.0	-13.0	43.3	53.0	113	125	100	266	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Tx 836.6MHz

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal Rx Ant. Height [cm]		Vertical Turn Table [deg.]		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER					
1673.20	65.8	68.7	-43.2	-41.1	3.8	9.6	0.0	-39.6	-37.5	-13.0	26.6	24.5	100	261	100	0	
2509.80	54.6	48.2	-47.9	-59.2	4.4	9.6	0.0	-44.9	-56.2	-13.0	31.9	43.2	100	149	100	297	
3346.40	49.2	51.6	-55.8	-54.4	4.5	11.7	0.0	-50.7	-49.3	-13.0	37.7	36.3	100	214	105	152	
4183.00	47.2	46.1	-59.4	-69.5	5.0	11.6	0.0	-55.0	-65.1	-13.0	42.0	52.1	100	56	100	213	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Tx 848.8MHz

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal Rx Ant. Height [cm]		Vertical Turn Table [deg.]		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER					
1697.60	65.4	74.1	-43.6	-36.1	3.8	9.6	0.0	-40.0	-32.5	-13.0	27.0	19.5	100	141	100	149	
2546.40	53.2	53.5	-47.9	-56.9	4.4	9.6	0.0	-44.8	-53.8	-13.0	31.8	40.8	100	247	106	200	
3395.20	49.8	53.1	-54.2	-52.0	4.5	11.8	0.0	-49.0	-46.8	-13.0	36.0	33.8	132	211	105	140	
4244.00	44.0	43.5	-64.4	-71.7	5.0	11.5	0.0	-60.1	-67.4	-13.0	47.1	54.4	100	213	100	0	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Spurious Emission (Radiated)
GSM Mode
(Chassis's color: Pink)

Report No. 32GE0273-HO-01
Test place Head Office EMC Lab.
Semi Anechoic Chamber No.3
Date 04/09/2012
Temperature / Humidity 27 deg. C / 30 % RH
Engineer Tomohisa Nakagawa
Mode Tx (GSM, GMSK)

Tx 824.2MHz (Chassis's color: Pink)

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal Rx Ant. Turn Height Table [cm] [deg.]		Vertical Rx Ant. Turn Height Table [cm] [deg.]		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER					
1648.40	62.7	61.4	-32.9	-48.3	3.8	9.6	0.0	-29.3	-44.7	-13.0	16.3	31.7	100	188	106	285	
2472.60	60.3	58.4	-43.8	-49.9	4.4	9.5	0.0	-40.8	-46.9	-13.0	27.8	33.9	153	141	146	126	
3296.80	49.6	49.5	-62.7	-59.4	4.4	11.6	0.0	-57.7	-54.4	-13.0	44.7	41.4	153	251	100	141	
4121.00	42.3	42.8	-64.0	-72.5	5.0	11.6	0.0	-59.5	-68.0	-13.0	46.5	55.0	113	125	100	266	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Tx 836.6MHz (Chassis's color: Pink)

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal Rx Ant. Turn Height Table [cm] [deg.]		Vertical Rx Ant. Turn Height Table [cm] [deg.]		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER					
1673.20	61.2	66.6	-47.8	-43.2	3.8	9.6	0.0	-44.2	-39.6	-13.0	31.2	26.6	100	261	100	0	
2509.80	54.4	51.2	-48.1	-56.2	4.4	9.6	0.0	-45.1	-53.2	-13.0	32.1	40.2	100	149	100	297	
3346.40	52.8	55.1	-52.2	-50.9	4.5	11.7	0.0	-47.1	-45.8	-13.0	34.1	32.8	100	214	105	152	
4183.00	46.3	45.1	-60.3	-70.5	5.0	11.6	0.0	-55.9	-66.1	-13.0	42.9	53.1	100	56	100	213	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Tx 848.8MHz (Chassis's color: Pink)

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal Rx Ant. Turn Height Table [cm] [deg.]		Vertical Rx Ant. Turn Height Table [cm] [deg.]		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER					
1697.60	61.1	67.1	-47.9	-43.1	3.8	9.6	0.0	-44.3	-39.5	-13.0	31.3	26.5	100	0	100	257	
2546.40	53.4	52.0	-48.1	-55.4	4.4	9.6	0.0	-45.0	-52.3	-13.0	32.0	39.3	100	160	105	239	
3395.20	55.9	58.4	-48.1	-46.7	4.5	11.8	0.0	-42.9	-41.5	-13.0	29.9	28.5	112	132	100	142	
4244.00	43.4	42.7	-65.0	-72.5	5.0	11.5	0.0	-60.7	-68.2	-13.0	47.7	55.2	100	0	100	0	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS : No signal detect.

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Spurious Emission (Radiated) W-CDMA(RMC12.2kbps) Mode

Report No. 32GE0273-HO-01
Test place Head Office EMC Lab.
Semi Anechoic Chamber No.2 No.2
Date 03/31/2012 03/30/2012
Temperature / Humidity 23 deg. C / 39 % RH 22 deg. C / 32 % RH
Engineer Katsunori Okai Tomohisa Nakagawa
Above 1GHz Below 1GHz
Mode Tx

Tx 826.4MHz

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal		Vertical		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER	Rx Ant. Height [cm]	Turn Table [deg.]	Rx Ant. Height [cm]	Turn Table [deg.]	
1652.80	53.6	55.2	-57.2	-57.3	3.8	9.3	0.0	-53.9	-54.0	-13.0	40.9	41.0	100	130	114	115	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Tx 836.6MHz

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal		Vertical		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER	Rx Ant. Height [cm]	Turn Table [deg.]	Rx Ant. Height [cm]	Turn Table [deg.]	
1673.20	54.2	54.7	-56.6	-57.9	3.8	9.4	0.0	-53.2	-54.5	-13.0	40.2	41.5	154	172	106	113	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Tx 846.6MHz

Frequency [MHz]	Rx SA/TR Reading [dBuV]		Tx SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. Atten. Loss [dB]	Result (ERP) [dBm]		Limit (ERP) [dBm]	Margin [dB]		Horizontal		Vertical		Remarks
	HOR	VER	HOR	VER				HOR	VER		HOR	VER	Rx Ant. Height [cm]	Turn Table [deg.]	Rx Ant. Height [cm]	Turn Table [deg.]	
1693.20	53.9	54.7	-57.0	-57.8	3.8	9.5	0.0	-53.5	-54.3	-13.0	40.5	41.3	151	168	112	286	

Calculation Result = SG Reading - Tx Cable Loss + Tx Antenna Gain - Tx Antenna Attenuator Loss -2.15

Rx-ANTENNA : Biconical Antenna(30M-300MHz), Logperiodic Antenna(300M-1000MHz), Horn Antenna(1G-12.75GHz)

Tx-ANTENNA : 120MHz tuned Dipole Antenna(30M-120MHz), Dipole Antenna(120M-1000MHz), Horn Antenna(1G-12.75GHz)

Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Detector : S/A PK (RBW: 1MHz, VBW: 3MHz)

Frequency Stability(Temperature/Voltage Variation)
GSM Mode / Tx:836.6MHz

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 32GE0273-HO-01
Date 04/09/2012
Temperature/ Humidity 20deg.C / 41% RH
Engineer Yutaka Yoshida
Mode Tx

Temp. [deg.C]	Volt. [V]	Frequency Reading [MHz]	Frequency Error [Hz]	Frequency Error [ppm]	Limit [ppm]	Remark
-30	3.80	836.5999973	-2.30	-0.003	2.5	-
-20	3.80	836.5999949	-4.70	-0.006	2.5	-
-10	3.80	836.6000114	11.80	0.014	2.5	-
0	3.80	836.5999845	-15.10	-0.018	2.5	-
10	3.80	836.5999835	-16.10	-0.019	2.5	-
20	3.80	836.5999996	-	-	-	Reference
30	3.80	836.5999801	-19.50	-0.023	2.5	-
40	3.80	836.5999848	-14.80	-0.018	2.5	-
50	3.80	836.5999807	-18.90	-0.023	2.5	-

Temp. [deg.C]	Volt. [V]	Frequency Reading [MHz]	Frequency Error [Hz]	Frequency Error [ppm]	Limit [ppm]	Remark
20	4.35	836.5999976	-2.00	-0.002	2.5	-
20	3.80	836.5999996	-	-	-	Reference
20	3.40	836.6000004	0.80	0.001	2.5	Battery End Point

Frequency Stability(Temperature/Voltage Variation)
W-CDMA(RMC12.2kbps) Mode / Tx: 836.6MHz

Test place Head Office EMC Lab. No.6 Measurement Room
Report No. 32GE0273-HO-01
Date 04/02/2012
Temperature/ Humidity 16deg. C / 22% RH
Engineer Yutaka Yoshida
Mode Tx

Temp. [deg.C]	Volt. [V]	Frequency Reading [MHz]	Frequency Error [Hz]	Frequency Error [ppm]	Limit [ppm]	Remark
-30	3.80	836.59996458	-6.72	-0.008	2.5	-
-20	3.80	836.59996482	-6.48	-0.008	2.5	-
-10	3.80	836.59997394	2.64	0.003	2.5	-
0	3.80	836.59997229	0.99	0.001	2.5	-
10	3.80	836.59996393	-7.37	-0.009	2.5	-
20	3.80	836.59997130	-	-	-	Reference
30	3.80	836.59994310	-28.20	-0.034	2.5	-
40	3.80	836.59991917	-52.13	-0.062	2.5	-
50	3.80	836.59990951	-61.79	-0.074	2.5	-

Temp. [deg.C]	Volt. [V]	Frequency Reading [MHz]	Frequency Error [Hz]	Frequency Error [ppm]	Limit [ppm]	Remark
20	4.35	836.59996758	-3.72	-0.004	2.5	-
20	3.80	836.59997130	-	-	-	Reference
20	3.40	836.59995758	-13.72	-0.016	2.5	Battery End Point

APPENDIX 2: Test instruments

EMI test equipment (1/2)

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date	Expiration date of the calibration
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	AT	2012/02/03	2013/02/28
MURC-02	Wireless Communication Test Set	Agilent	E5515C	GB47050683	AT	2011/11/26	2012/11/30
MPM-12	Power Meter	Anritsu	ML2495A	0825002	AT	2011/08/09	2012/08/31
MPSE-17	Power sensor	Anritsu	MA2411B	0738285	AT	2011/08/09	2012/08/31
MCC-138	Microwave cable	HUBER+SUHNER	SUCOFLEX 102	37953/2	AT	2011/10/28	2012/10/31
MCC-67	Microwave Cable 1G-40GHz	Suhner	SUCOFLEX102	28635/2	AT	2011/04/22	2012/04/30
MAT-23	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	AT	2012/03/27	2013/03/31
MPD-02	Power Divider DC-12.4GHz	SUHNER	4901.19.A	-	AT	2011/05/23	2012/05/31
MMM-10	DIGITAL HiTESTER	Hioki	3805	051201148	AT	2012/01/13	2013/01/31
MOS-14	Thermo-Hygrometer	Custom	CTH-201	-	AT	2012/02/06	2013/02/28
MCH-04	Temperature and Humidity Chamber	Tabai Espec	PL-2KP	14015723	AT	2011/08/22	2012/08/31
MURC-03	Radio Communication Analyzer	Anritsu	MT8815B	6200711471	AT/RE	2011/11/26	2012/11/30
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2011/06/21	2012/06/30
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2012/02/06	2013/02/28
MJM-14	Measure	KOMELON	KMC-36	-	RE	-	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-	-
MRENT-95	Spectrum Analyzer	Agilent	E4440A	MY46185823	RE	2011/06/30	2012/06/30
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	VHA91032008	RE	2011/10/23	2012/10/31
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	201	RE	2011/10/23	2012/10/31
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2012/02/16	2013/02/28
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2011/11/02	2012/11/30
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2011/09/26	2012/09/30
MDA-04	Dipole Antenna	Schwarzbeck	UHAP	992	RE	2011/10/15	2012/10/31
YTSSG03	Signal Generator	Rohde & Schwarz	SMT02	51400043	RE	2011/08/19	2012/08/31
MCC-125	Corexial Cable	UL Japan	-	-	RE	2011/07/04	2012/07/31
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2012/02/22	2013/02/28
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2012/01/25	2013/01/31
MHA-02	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	RE	2012/02/22	2013/02/28
MCC-133	Microwave Cable	HUBER+SUHNER	SUCOFLEX104	336164/4(1m) / 340640(5m)	RE	2011/09/07	2012/09/30
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2011/05/23	2012/05/31

EMI test equipment (2/2)

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date	Expiration date of the calibration
MCC-130	Microwave Cable (1-33GHz)	HUBER+SUHNER	SF103/11PC3.5-31/11PC3.5-31/8.0m	54308/3	RE	2012/01/05	2013/01/31
KSG-05	Signal Generator	Rohde & Schwarz	SMR40	100137	RE	2011/08/30	2012/08/31
MHF-03	High pass Filter 1.4-5.0GHz	Mini-Circuit	VHF-1320	10411	RE	2011/08/25	2012/08/31
MHF-06	High Pass Filter 3.5-24GHz	TOKIMEC	TF323DCA	601	RE	2011/05/16	2012/05/31
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2012/02/24	2013/02/28
MOS-13	Thermo-Hygrometer	Custom	CTH-180	-	RE	2012/02/06	2013/02/28
MJM-06	Measure	PROMART	SEN1955	-	RE		
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-	-
MSA-05	Spectrum Analyzer	Advantest	R3273	160400285	RE	2011/11/23	2012/11/30
MCC-134	Microwave Cable	HUBER+SUHNER	SUCOFLEX104	336167/4(1m) / 340641(5m)	RE	2011/09/07	2012/09/30
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2012/03/29	2013/03/31
MHF-19	High Pass Filter 3.5-18.0GHz	TOKIMEC	TF323DCA	602	RE	2011/09/07	2012/09/30
MCC-76	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	278967/4	RE	2011/12/08	2012/12/31
MCC-126	Corexial Cable	UL Japan	-	-	RE	2011/07/15	2012/07/31
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2011/08/11	2012/08/31

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Radiated Emission

AT: Antenna Terminal Conducted

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124