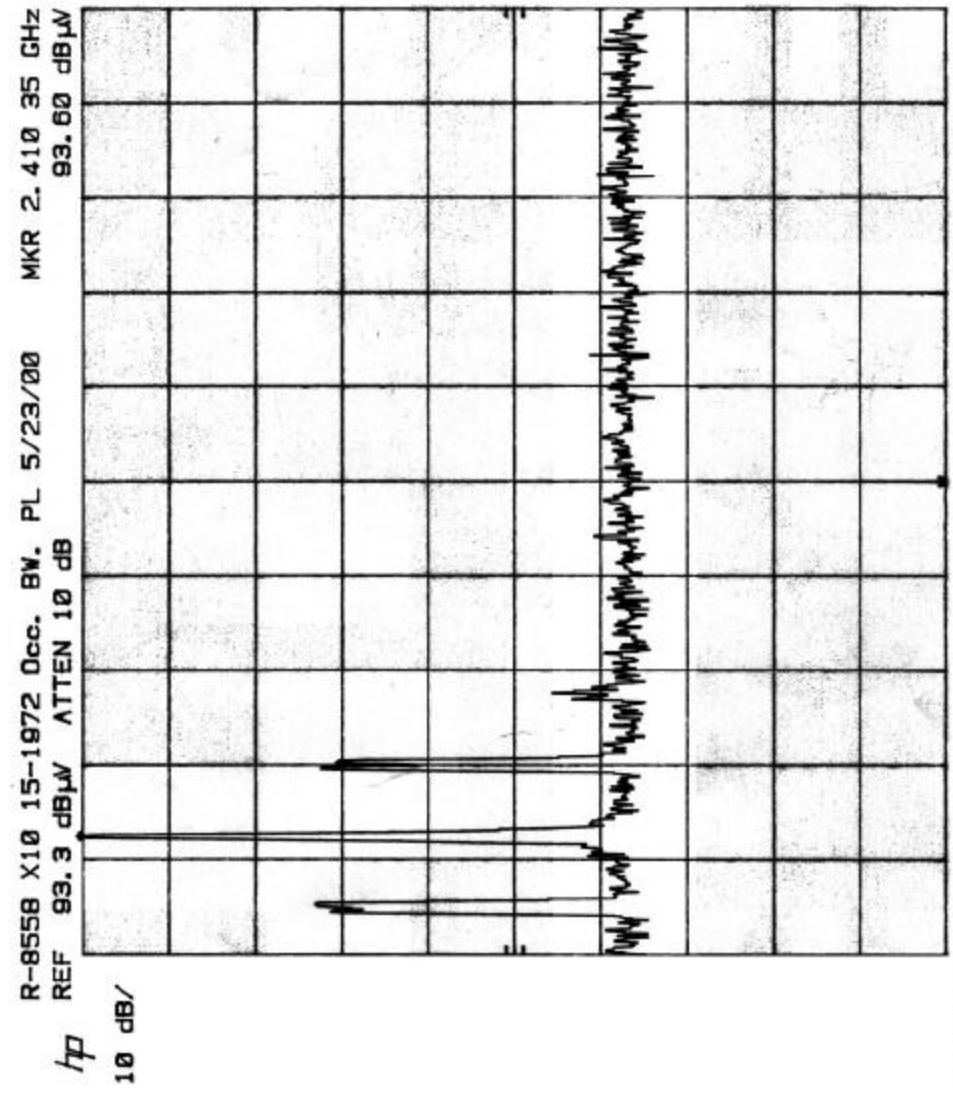

Customer:	X-10 (USA)
Test Sample:	2.4GHz RF Transmitter
Model No:	15-1972
Test Method:	FCC15.249(c). Occupied Bandwidth
Notes:	Emissions outside the band are attenuated by 50dB or the general radiated limits of 15.209. Channel: A
Date: May 26, 2000	Tech: Peter Lananna Sheet 1 of 4

Retlif Testing Laboratories

Report No. R-8558-1

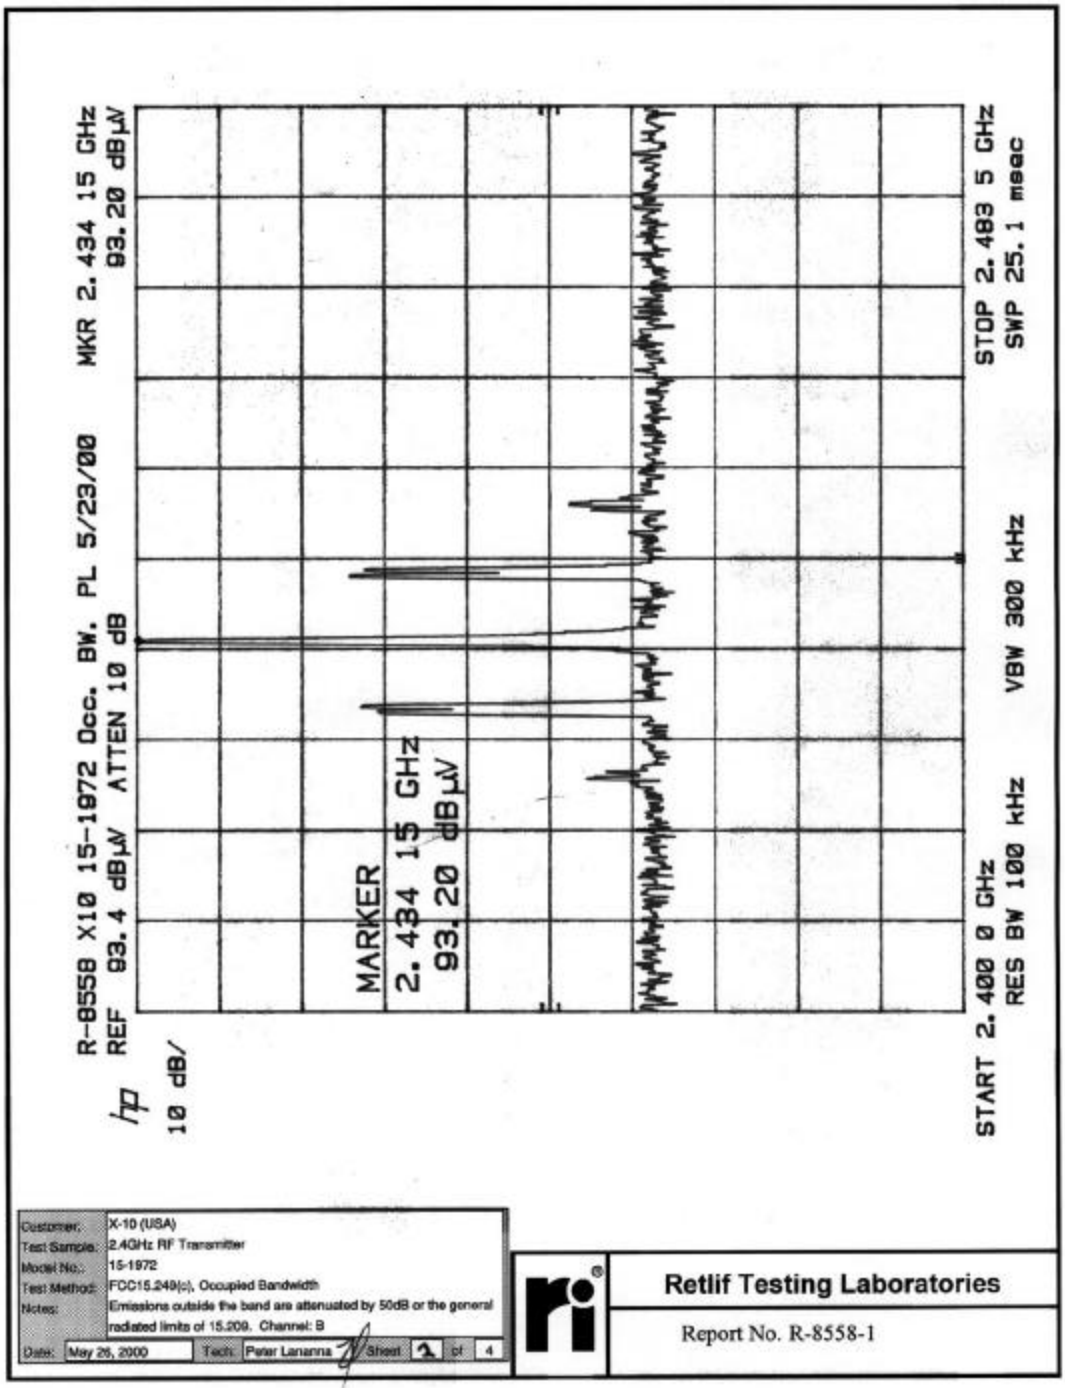

Customer:	X-10 (USA)
Test Sample:	2.4GHz RF Transmitter
Model No.:	15-1972
Test Method:	FCC15.249(c), Occupied Bandwidth
Notes:	Emissions outside the band are attenuated by 50dB or the general radiated limits of 15.209. Channel: B
Date:	May 26, 2000
Tech:	Peter Lananna
Sheet	1 of 4

Retlif Testing Laboratories

Report No. R-8558-1

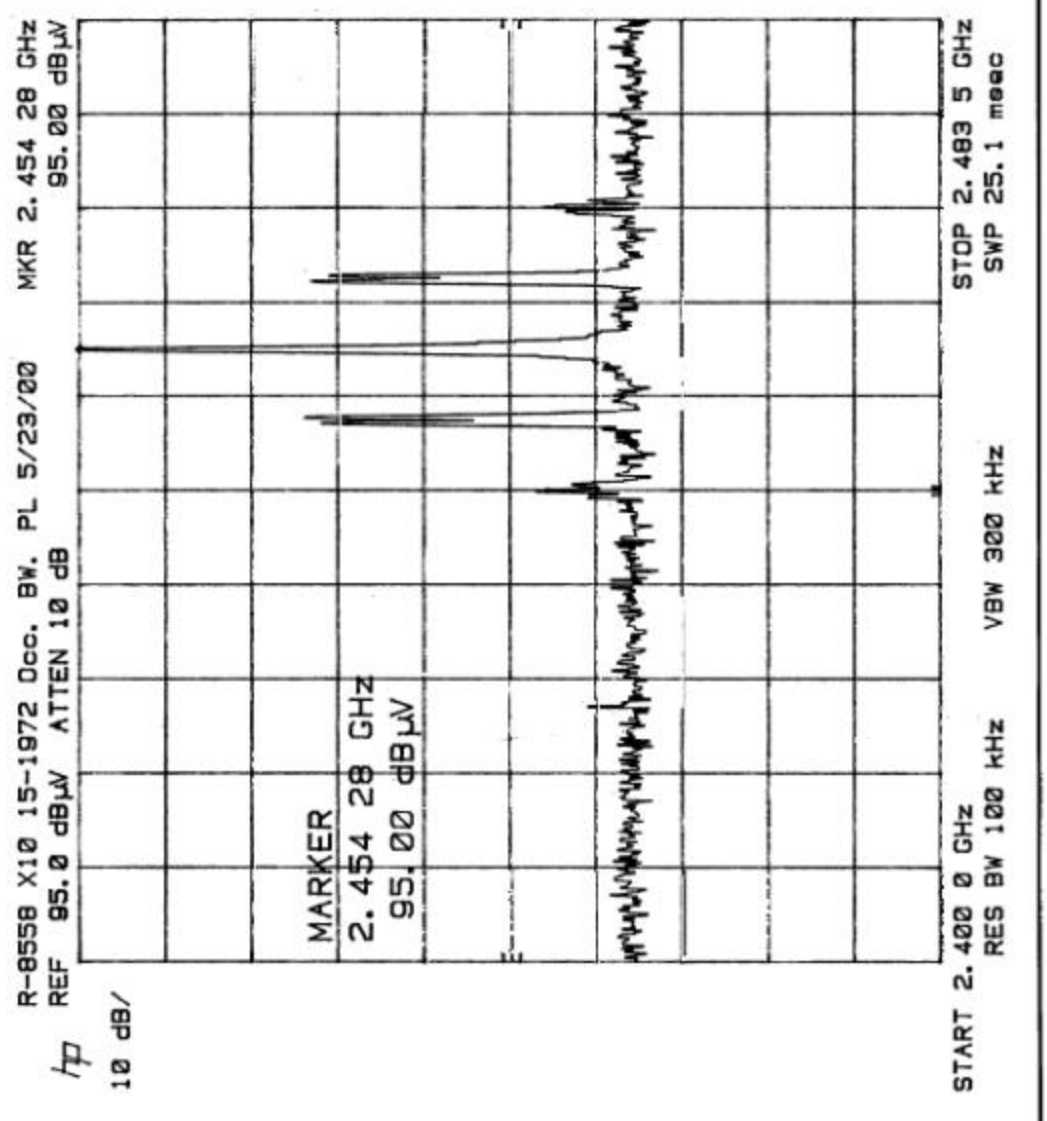

Customer:	X-10 (USA)
Test Sample:	2.4GHz RF Transmitter
Model No.:	15-1972
Test Method:	FCC15.249(c). Occupied Bandwidth
Notes:	Emissions outside the band are attenuated by 50dB or the general radiated limits of 15.209. Channel: C
Date:	May 26, 2000
Tech:	Peter Lananna
Sheet	3 of 4

Retlif Testing Laboratories

Report No. R-8558-1

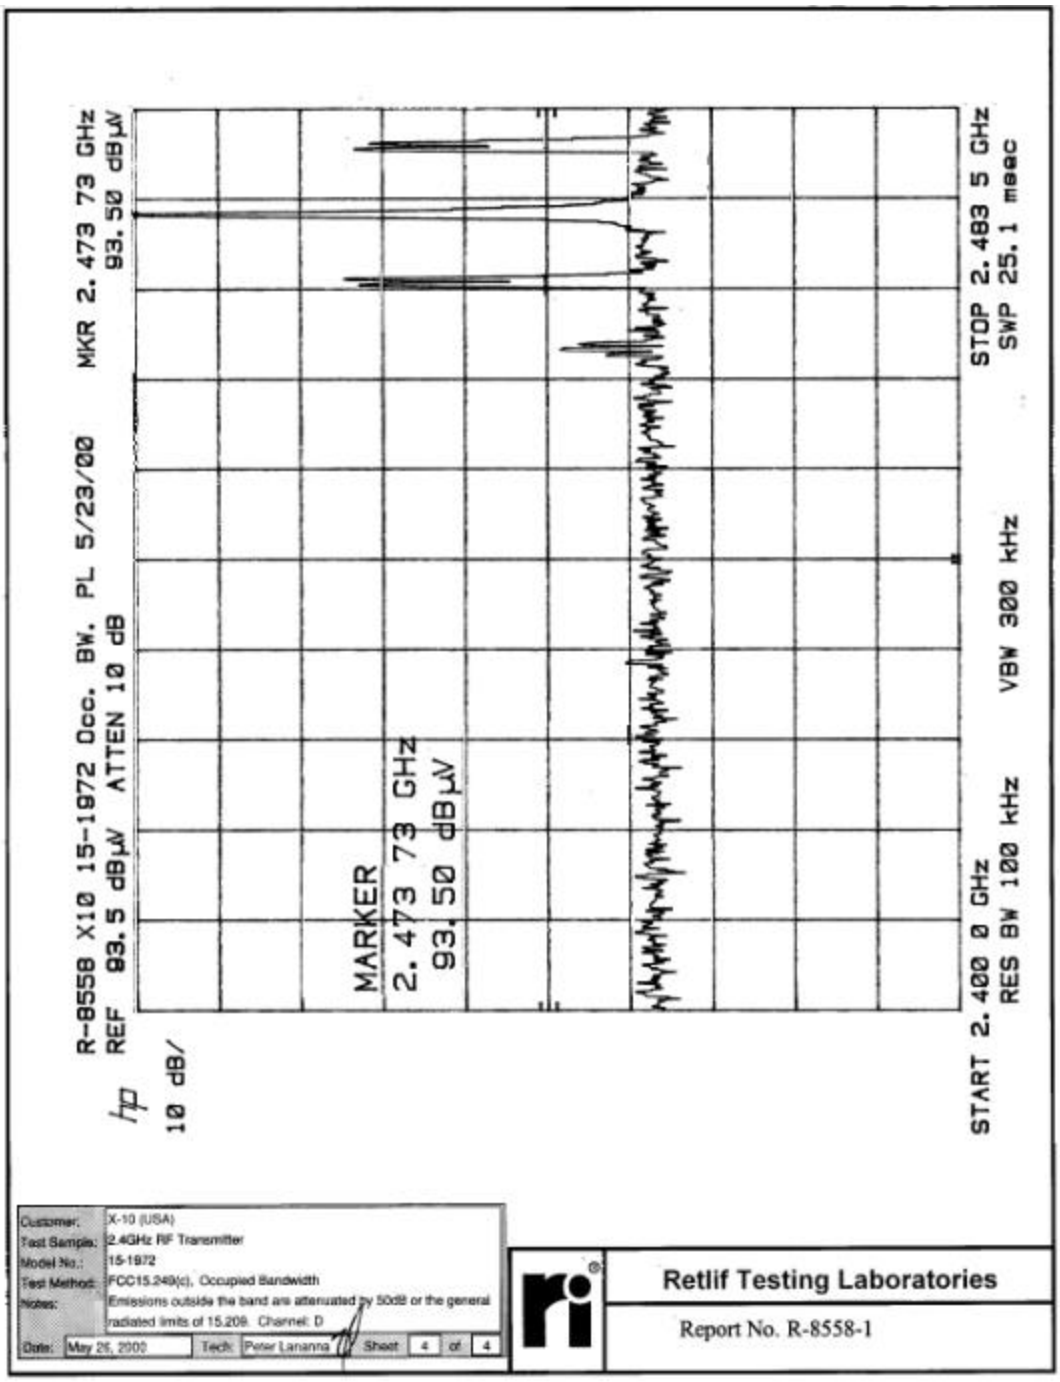

Customer:	X-10 (USA)
Test Sample:	2.4GHz RF Transmitter
Model No.:	15-1972
Test Method:	FCC15.249(c), Occupied Bandwidth
Notes:	Emissions outside the band are attenuated by 50dB or the general radiated limits of 15.209. Channel: D
Date: May 26, 2000	Tech: Peter Lananna Sheet 4 of 4

Retlif Testing Laboratories

Report No. R-8558-1