

13.0 MEASUREMENT UNCERTAINTIES

Uncertainty Description	Error	Distribution	Weight	Standard Deviation	Offset
Probe Uncertainty					
Axial isotropy	± 0.2 dB	U-Shaped	0.5	± 2.4 %	
Spherical isotropy	± 0.4 dB	U-Shaped	0.5	± 4.8 %	
Isotropy from gradient	± 0.5 dB	U-Shaped	0	$\pm$	
Spatial resolution	± 0.5 %	Normal	1	± 0.5 %	
Linearity error	± 0.2 dB	Rectangle	1	± 2.7 %	
Calibration error	± 3.3 %	Normal	1	± 3.3 %	
SAR Evaluation Uncertainty					
Data acquisition error	± 1 %	Rectangle	1	± 0.6 %	
ELF and RF disturbances	± 0.25 %	Normal	1	± 0.25 %	
Conductivity assessment	± 10 %	Rectangle	1	± 5.8 %	
Spatial Peak SAR Evaluation Uncertainty					
Extrapolated boundary effect	± 3 %	Normal	1	± 3 %	± 5 %
Probe positioning error	± 0.1 mm	Normal	1	± 1 %	
Integrated and cube orientation	± 3 %	Normal	1	± 3 %	
Cube Shape inaccuracies	± 2 %	Rectangle	1	± 1.2 %	
Device positioning	± 6 %	Normal	1	± 6 %	
Combined Uncertainties				± 11.7 %	± 5 %

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, the estimated measurement uncertainties in SAR are less than 15-25 %.

According to ANSI/IEEE C95.3, the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC, typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

14.0 REFERENCES


- (1) ANSI, *ANSI/IEEE C95.1: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 Ghz*, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992;
- (2) Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, FCC, Washington, D.C. 20554, 1997;
- (3) Thomas Schmid, Oliver Egger, and Neils Kuster, "Automated E-field scanning system for dosimetric assessments", *IEEE Transaction on Microwave Theory and Techniques*, Vol. 44, pp. 105 – 113, January, 1996.
- (4) Niels Kuster, Ralph Kastle, and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with know precision", *IEICE Transactions of Communications*, vol. E80-B, no. 5, pp. 645 – 652, May 1997.

APPENDIX "A" - SAR MEASUREMENT DATA

RADIOSHACK CORPORATION

Generic Twin Phantom; Flat Section; Position: (90°,90°);
Probe: ET3DV6 - SN1387; ConvF(6.76,6.76,6.76); Crest factor: 1.0;
450MHz Brain: $\sigma = 0.61$ mho/m $\epsilon_r = 48.9$ $\rho = 1.00$ g/cm³
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 0.563 mW/g *, SAR (10g): 0.422 mW/g Max outside


Face SAR
RadioShack Corporation
Model 19-1207
Low Channel [461.0375MHz]
Conducted Power 32dBm
Test date: Oct 24, 2000

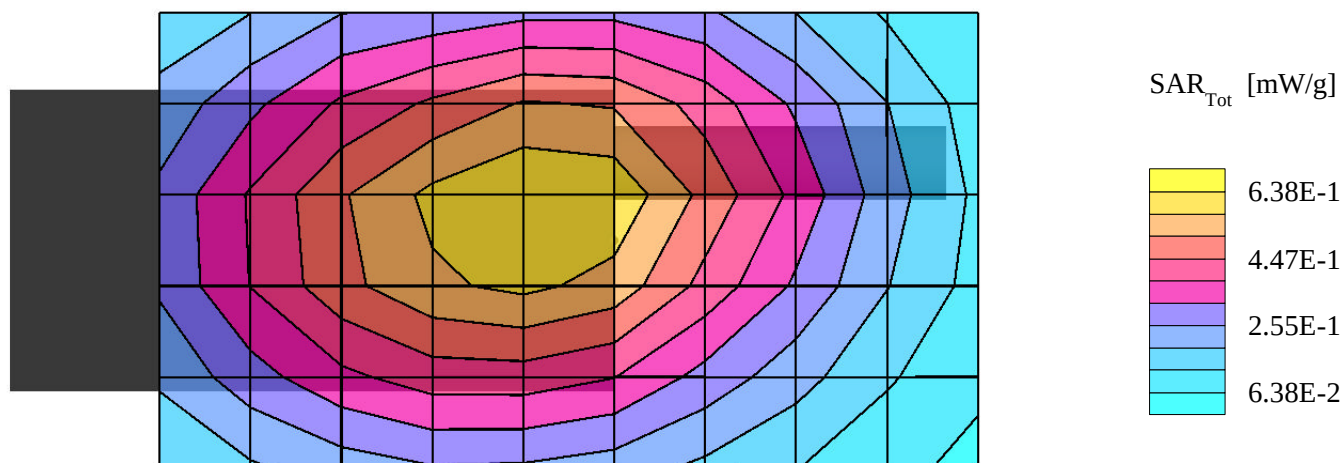

RADIOSHACK CORPORATION

Generic Twin Phantom; Flat Section; Position: (90°,90°);
Probe: ET3DV6 - SN1387; ConvF(6.76,6.76,6.76); Crest factor: 1.0;
450MHz Brain: $\sigma = 0.61$ mho/m $\epsilon_r = 48.9$ $\rho = 1.00$ g/cm³
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 0.561 mW/g, SAR (10g): 0.425 mW/g


Face SAR
RadioShack Corporation
Model: 19-1207
Unmodulated Carrier
High Channel [469.5625MHz]
Conducted Power 32dBm
Test date: Oct 24, 2000

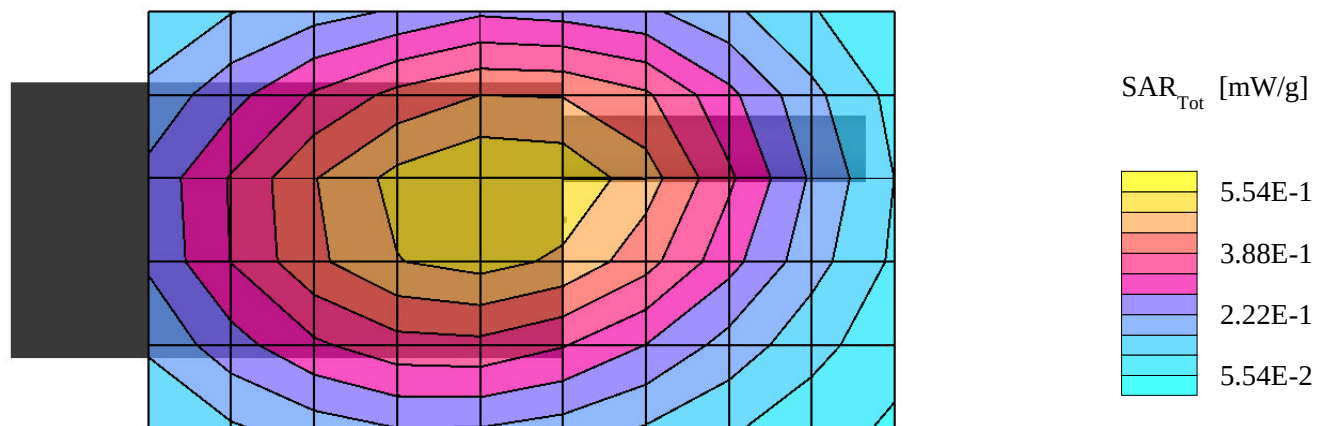

RADIOSHACK CORPORATION

Generic Twin Phantom; Flat Section; Position: (270°,270°);
Probe: ET3DV6 - SN1387; ConvF(6.76,6.76,6.76); Crest factor: 1.0;
450MHz Muscle: $\sigma = 0.84$ mho/m $\epsilon_r = 57.5$ $\rho = 1.00$ g/cm³
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 2.52 mW/g, SAR (10g): 1.89 mW/g


Body SAR Using Belt Clip
Separation Distance 0.8cm
RadioShack Corporation
Model 19-1207
Low Channel [461.0375MHz]
Conducted Power 32dBm
Test date: Oct 24, 2000

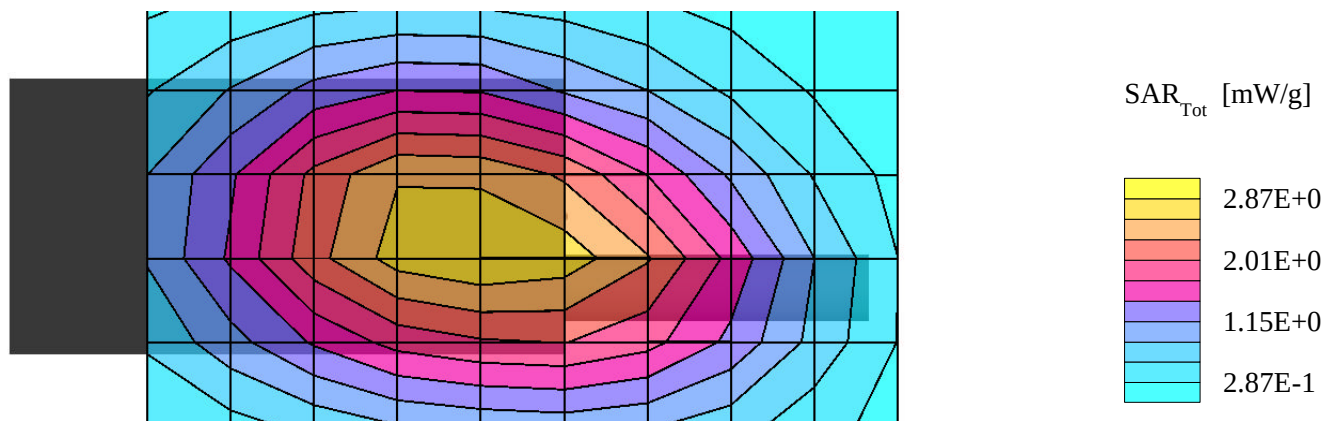

RADIOSHACK CORPORATION

Generic Twin Phantom; Flat Section; Position: (270°,270°);
Probe: ET3DV6 - SN1387; ConvF(6.76,6.76,6.76); Crest factor: 1.0;
450MHz Muscle: $\sigma = 0.84$ mho/m $\epsilon_r = 57.5$ $\rho = 1.00$ g/cm³
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 1.99 mW/g, SAR (10g): 1.49 mW/g

Body SAR Using Belt Clip
Separation Distance 0.8cm
RadioShack Corporation
Model 19-1207
High Channel [469.5625MHz]
Conducted Power 32dBm
Test date: Oct 24, 2000

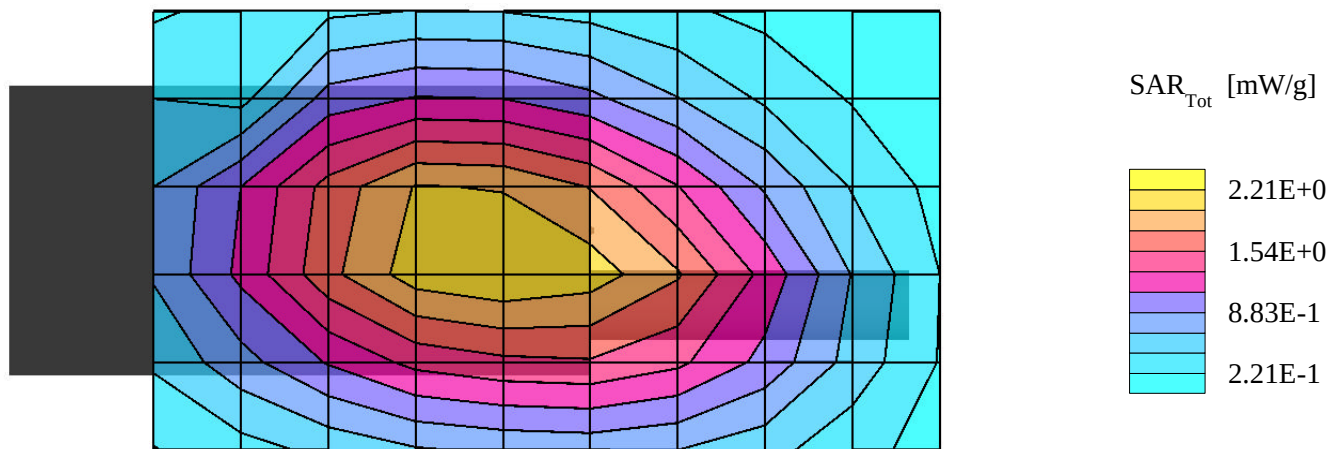


APPENDIX "B" – DIPOLE VALIDATION

Dipole 835 MHz

Generic Twin Phantom; Flat Section; Position: (90°,90°);
Probe: ET3DV6 - SN1387; ConvF(6.43,6.43,6.43); Crest factor: 1.0;
Brain 835 MHz: $\sigma = 0.80$ mho/m $\epsilon_r = 44.2$ $\rho = 1.00$ g/cm³
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Cube 5x5x7
SAR (1g): 2.03 mW/g, SAR (10g): 1.34 mW/g

Validation Date: Oct. 24, 2000

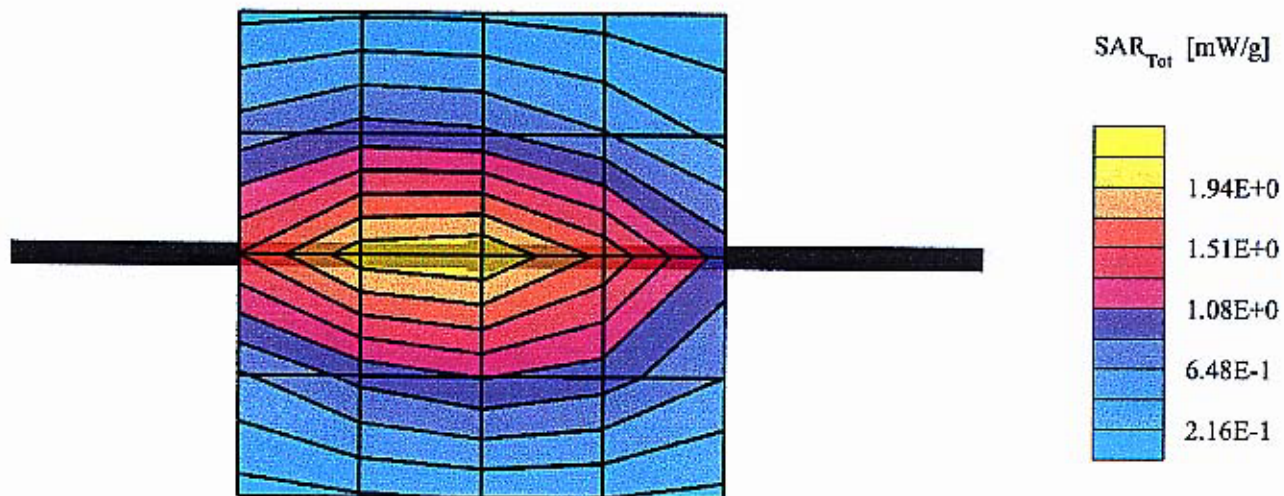

Validation Dipole D835V2 SN:411, d = 15mm

Frequency: 835 MHz; Antenna Input Power: 250 [mW]
 Generic Twin Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
 Probe: ET3DV5 - SN1342/DAE3; ConvP(5.75,5.75); Brain 835 MHz; $\sigma = 0.80$ mho/m $\epsilon_r = 44.2$ $\rho = 1.00$ g/cm³
 Cubes (2): Peak: 3.07 mW/g ± 0.05 dB, SAR (1g): 2.06 mW/g ± 0.05 dB, SAR (10g): 1.38 mW/g ± 0.05 dB, (Worst-case extrapolation)
 Penetration depth: 13.6 (12.7, 14.8) [mm]
 Powerdrift: -0.00 dB

