

TABLE OF CONTENTS LIST

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

TEST REPORT:

PAGE	1.....	COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....	TECHNICAL DESCRIPTION CONTD. & RF POWER OUTPUT
PAGE	3.....	MODULATION CHARACTERISTICS & OCCUPIED BANDWIDTH
PAGE	4.....	OCCUPIED BANDWIDTH
PAGE	5.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE	6.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE	7-8....	FREQUENCY STABILITY
PAGE	9.....	TRANSIENT FREQUENCY STABILITY
PAGE	10.....	LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT	1.....	FCC ID LABEL SAMPLE
EXHIBIT	2.....	SKETCH OF LABEL LOCATION
EXHIBIT	3A.....	EXTERNAL PHOTO - FRONT VIEW
EXHIBIT	3B.....	EXTERNAL PHOTO - REAR VIEW
EXHIBIT	3C.....	INTERNAL PHOTO - COMPONENT VIEW
EXHIBIT	3D.....	INTERNAL PHOTO - COPPER VIEW
EXHIBIT	4.....	BLOCK DIAGRAM
EXHIBIT	5.....	SCHEMATIC
EXHIBIT	6.....	USER'S MANUAL
EXHIBIT	7A-7B....	OPERATIONAL DESCRIPTION
EXHIBIT	8A-C.....	TUNING PROCEDURE
EXHIBIT	9.....	AUDIO LOW PASS FILTER
EXHIBIT	10.....	MODULATION LIMITING 300 Hz
EXHIBIT	11.....	MODULATION LIMITING 1000 Hz
EXHIBIT	12.....	MODULATION LIMITING 3000 Hz
EXHIBIT	13.....	AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT	14A-B....	CRYSTAL SPECIFICATIONS
EXHIBIT	15.....	OCCUPIED BANDWIDTH PLOT - CW
EXHIBIT	16.....	OCCUPIED BANDWIDTH
EXHIBIT	17A.....	LOW POWER TRANSIENT FREQUENCY RESPONSE
EXHIBIT	17B.....	LOW POWER TRANSIENT FREQUENCY RESPONSE
EXHIBIT	18A.....	HIGH POWER TRANSIENT FREQUENCY RESPONSE
EXHIBIT	18B.....	HIGH POWER TRANSIENT FREQUENCY RESPONSE
EXHIBIT	19.....	TEST SET UP PHOTO

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.1033 (C)(1)(2) RADIOSHACK CORPORATION will sell the FCCID:
AA01901208 UHF BUSINESS BAND transciever
in quantity, for use under FCC
RULES PART 22, 90

RADIOSHACK CORPORATION
100 THROCKMORTON STREET SUITE 1300
FT. WORTH, TX 76102-2802 U.S.A.

2.1033(C)(3) A copy of the instruction manual is included as
Exhibit 6.

(4) ALLOWED AUTHORIZED BANDWIDTH = 11.25kHz.
90.209(b)(5)

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 2625 \text{ (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(2625)(1) = 6.0K + 5250 = 11.25 K$$

Type of Emission: 11K25F3E

2.1033(C)(5) Frequency Range: 464.5000-467.9250 MHz

(6) Power Range and Controls: This UUT has two (2) power
ranges, 1.0 and 2.5 watts

(7) Maximum Power Rating: 2.5 Watts
into a 50 ohm resistive load.

(8) DC Voltages and Current Final Amplifier:
FINAL AMPLIFIER ONLY
Vce = 8.4 Volts DC Ice = 0.92A
Pin = 7.70 Watts

(9) The tuning procedure is included as
Exhibit 8A-8C.

(10) A schematic in included in Exhibit 5.

(11) Photograph or drawing of the label showing the FCC
ID and the location of the label is shown in
Exhibits 1 and 2.

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 1


- 2.1033(c)(12) Photographs completely documenting the radio are shown in Exhibits 3A-3D.
- 2.1033(c)(13) N/A This is for devices that use digital modulation.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 follows;

- 2.1046(a) RF power output. The test procedure used was TIA/EIA-603 S2.2.1. RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 8.4V, and the transmitter properly adjusted the RF output measures:

INPUT POWER: $(8.4V)(0.9A) = 7.7\text{Watts}$
OUTPUT POWER: 2.5 Watts Efficiency: 32%

INPUT POWER(MED): $(8.4V)(0.4) = 3.36\text{ Watts}$
OUTPUT POWER(L0): 1.0 Watts Efficiency: 29%

- 2.1046(a) RF power output. The test procedure used was TIA/EIA-603 S2.2.1.

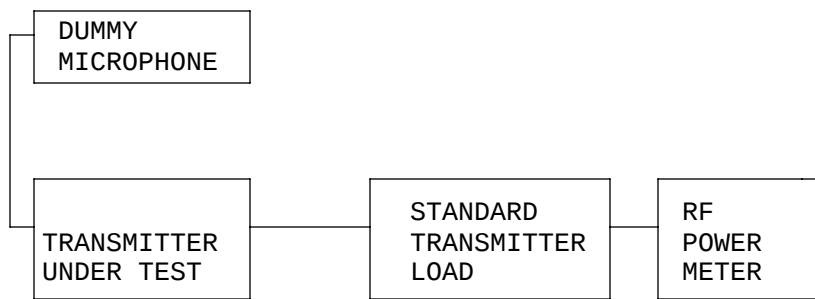


APPLICANT: RADIOSHACK CORPORATION
FCC ID: AA01901208
DATE: MAY 3, 2001
REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC
PAGE #: 2

2.1047(a) Modulation characteristics:

AUDIO FREQUENCY RESPONSE The audio frequency response was measured in accordance with TIA/EIA Specification TIA/EIA-603 S2.2.6.2.1. The audio frequency response curve is shown in Exhibit 13.

2.1049 AUDIO LOW PASS FILTER Transmitters utilizing analog emissions and meets the requirements of paragraph 90.210(b)&(c) and the plot of the post limiter filter is included as Exhibit #9. .

2.1049 AUDIO INPUT VERSUS MODULATION The audio frequency input versus deviation was measured in accordance with TIA/EIA Specification 603 S2.2.6.2.1. with the following exceptions; starting with 1000Hz the input was increased well beyond the deviation changing. This measurement was repeated for the band limits and any frequency deemed appropriate. See Exhibits 10-12.

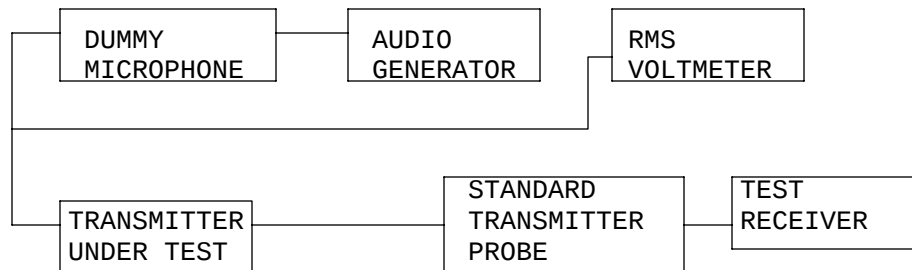

1.The test receiver audio bandwidth was <50Hz to >20,000Hz.

2.1049 Occupied bandwidth:

90.210 (d)

- (1) On any frequency from the center of the authorized Bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 3

2.1049 Occupied bandwidth:
90.210 (d) 2

Requirement For 12.5 kHz channel bandwidth equipment, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;

(1) On any frequency from the center of the authorized bandwidth f_0 : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdd kHz) of more than 5.625kHz but no more than 12.5kHz: At least $7.27(f_d - 2.88\text{kHz})\text{dB}$

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdd kHz) of more than 12.5kHz: At least $50 + 10 \log(P)$ dB or 70dB, whichever is the lesser attenuation.

See Exhibits 15 and 16.


2.1049 Occupied bandwidth: Using TIA/EIA 2.2.11 sideband Spectrum TIA/EIA-603 S2.2.11 was used to measure the occupied bandwidth. Plots were made of the highest frequency and at 2500Hz. Data in the plots show that all sidebands beyond the authorized bandwidth are less than 0.5% of the unmodulated carrier. The plots show the transmitter modulation with;

For 12.5KHz spacing no modulation, 2500Hz, 3000Hz Tones
For 25.0KHz Channel spacing no modulation, 2500Hz, 3000Hz

At each of the tone input was adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

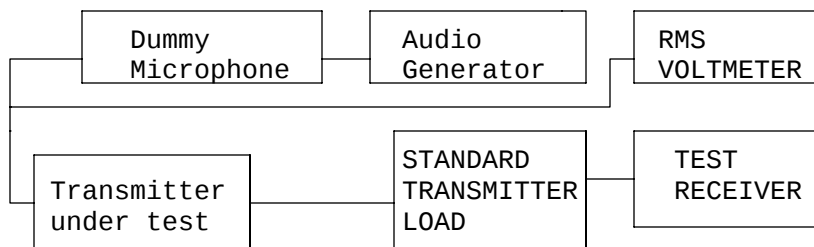

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001


REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 4

2.1051

Spurious emissions at antenna terminals(conducted):

The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental.

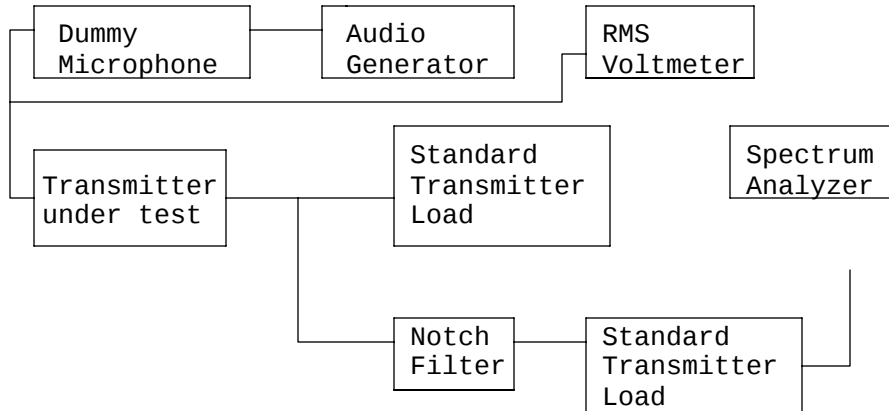

Method of Measuring Conducted Spurious Emissions

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be $50 + 10\log(P_o)$ dB below the mean power output of the transmitter.

HIGH POWER $50 + 10\log(2.5) = 57.98\text{dB}$ OR 70dB Whichever is the lessor

LOW POWER $50 + 10\log(1.0) = 50.00\text{dB}$ OR 70dB Whichever is the lessor

EMISSION FREQUENCY ____MHz____	dB BELOW CARRIER	
	HIGH POWER	LOW POWER
467.80	00.0	0.0
935.60	61.5	58.8
1403.40	56.4	55.7
1871.20	67.6	65.7
2339.00	64.3	64.0
2806.80	80.1	81.4
3274.60	82.7	82.7
3742.40	86.8	80.0
4210.20	91.5	87.7
4678.00	84.4	85.3

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 5

2.1053 (b) Field strength of spurious emissions:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to 4.7 GHz. This test was conducted per ANSI C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference.

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS:

HIGH POWER $50 + 10\log(2.5) = 53.98\text{dB}$ OR 70dB Whichever is the lessor

LOW POWER $50 + 10\log(1.0) = 50.00\text{db}$ OR 70dB Whichever is the lessor

TEST DATA:

EMISSION FREQUENCY MHZ	MR @ 3m dB	COAX LOSS dB	ACF dB	FIELD STRENGTH DbuV/m	FCC. LIMIT dB	ATTN dB	MARGIN dB	ANT. POL
------------------------------	------------------	--------------------	-----------	-----------------------------	---------------------	------------	--------------	-------------

HIGH POWER

464.50	112.40	1.60	18.48	132.48	0.00	0.00	0.00	V
929.00	30.60	2.90	24.13	57.63	53.98	74.85	20.87	V
1393.60	24.00	1.00	25.57	50.57	53.98	81.91	27.93	V
1858.10	15.30	1.01	27.43	43.74	53.98	88.74	34.76	V
2322.70	29.70	1.08	28.81	59.59	53.98	72.90	18.92	V
2787.20	12.20	1.15	29.97	43.32	53.98	89.17	35.19	V
3251.70	24.30	1.22	31.13	56.65	53.98	75.84	21.86	H
3716.30	4.80	1.29	32.29	38.38	53.98	94.11	40.13	H
4180.80	1.00	1.36	33.20	35.56	53.98	96.92	42.94	V
4645.40	1.30	1.43	33.73	36.45	53.98	96.03	42.05	H

LOW

464.50	105.20	1.60	18.48	125.28	0.00	0.00	0.00	V
929.00	30.00	2.90	24.13	57.03	50.00	68.25	18.25	V
1393.60	19.50	1.00	25.57	46.07	50.00	79.21	29.21	V
1858.10	14.50	1.01	27.43	42.94	50.00	82.34	32.34	V
2322.70	26.00	1.08	28.81	55.89	50.00	69.40	19.40	V
2787.20	5.60	1.15	29.97	36.72	50.00	88.57	38.57	V
3251.70	9.80	1.22	31.13	42.15	50.00	83.14	33.14	H
4645.40	1.50	1.43	33.73	36.65	50.00	88.63	38.63	V

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 6

2.1055 Frequency stability:
90.213

Temperature and voltage tests were performed to verify that the frequency remains within the .00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus & minus 15% of the supply voltage of 8.4 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 464.550 000 MHz

TEMPERATURE°C		FREQUENCY_MHz	PPM
REFERENCE		464.550 000	0.00
-30		464.549 700	-0.65
-20		464.549 806	-0.42
-10		464.549 251	-1.62
0		464.550 563	+1.21
+10		464.550 905	+1.95
+20		464.550 717	+1.55
+30		464.550 433	+0.93
+40		464.550 696	+1.50
+50		464.550 315	+0.68
BATT. %	BATT. DATA	VOLTS	BATT PPM
-15%	464.550 179	7.65	+0.39
+15%	464.550 220	10.35	+0.47

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -1.62 to +1.95ppm. The maximum frequency variation over battery endpoint voltage range was +0.47 ppm.

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 7

2.1055 Frequency stability:

90.214 Transient Frequency Behavior

REQUIREMENTS: In the 450-500MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 25kHz Channels:

Time Interval	Maximum Frequency	Portable Radios 450-500Mhz
t1	+25kHz	10.0ms
t2	+12.5kHz	25.0ms
t3	+25.0kHz	10.0ms

REQUIREMENTS: In the 450-500MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:

Time Interval	Maximum Frequency	Portable Radios 450-500Mhz
t1	+12.5kHz	10.0ms
t2	+6.25kHz	25.0ms
t3	+12.5kHz	10.0ms

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test recievers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

APPLICANT: RADIOSHACK CORPORATION


FCC ID: AA01901208

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 8

2.995(a)(b)(d) Frequency stability:

90.214 Transient Frequency Behavior
(Continued)

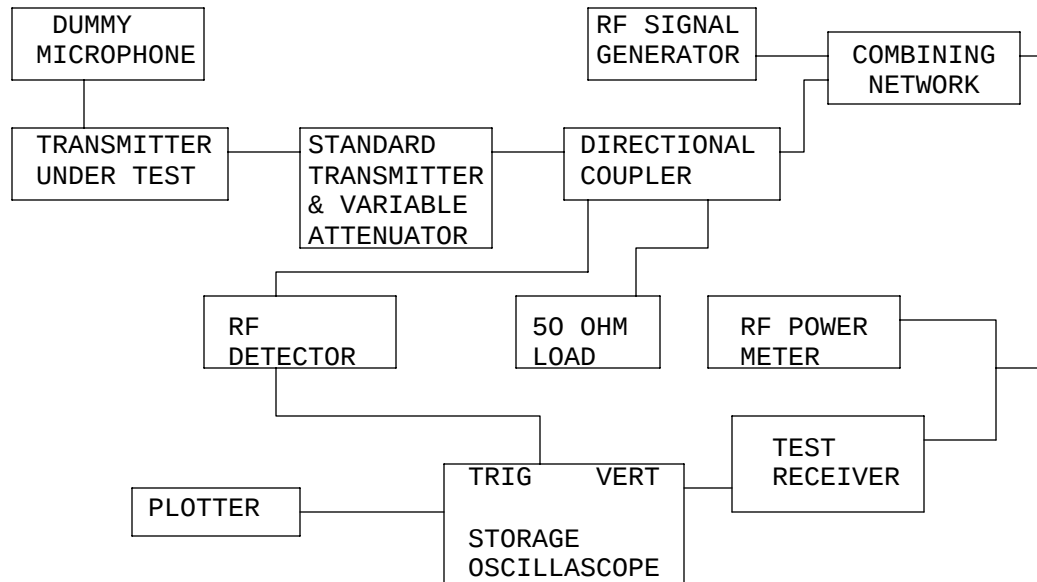

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 9

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

TEST EQUIPMENT LIST

1. X Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
2. X Biconnical Antenna: Eaton Model 94455-1, S/N 1057
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
4. X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
6. X Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
11. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545
13. X Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMC0 Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/10/00
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
20. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
21. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AA01901208

DATE: MAY 3, 2001

REPORT #: T:\CUS\R\RADSHACK\578AZ1\578AZ1TESTRPT.DOC

PAGE #: 10