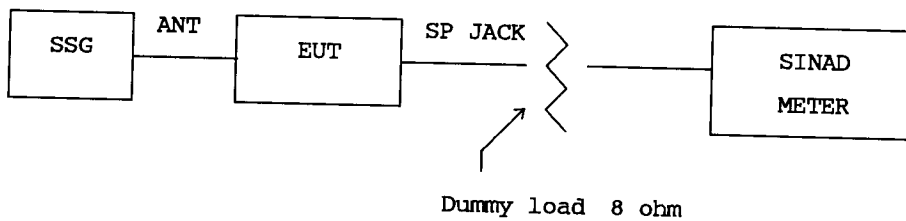


5-3 Test Result: Cellular image rejection

15.121(b)

Rationale:

In order for measuring image(spurious) rejection ratio on scanning receiver, use of one SSG method would be suitable rather than two or three SSG method since cellular image reception would be considered as unwanted reception solely at outside of cellular band.

Test set-up:

Conditions: AF Signal : 1 kHz
 Deviation : +/- 3kHz (for frequency modulation)
 Modulation : 60 % (for amplitude modulation)

Test frequencies: 824.01MHz, 836.52MHz, 849.00MHz
 869.01MHz, 881.52MHz, 894.00MHz

A) Initial screening

- A-1) Disable the output signal of SSG. Disconnect dummy load and enable the EUT to confirm the presence of audio noise on speaker.
- A-2) Set the EUT with "Squelched Threshold" to prevent audio signal.
- A-3) Set the frequency of SSG to cellular band, and apply 60dBuV of RF output to EUT. Note that 60dBuV signal level corresponds approx. 66dB above the "Squelched Threshold" sensitivity of -6dBuV (not, receiving sensitivity). This is approx. 28dB (= 66 - 38) above the FCC limit.
- A-4) Enable EUT and search the cellular frequencies on the all of receiving range.
- A-5) List the all of detected frequencies if EUT detects them, and the following steps shall be taken to determine the actual image rejection ratio individually.
- A-6) Repeat the above procedure for remaining frequencies.
- A-7) Go to Part B of the test.

B) Measuring the image rejection ratio

- B-1) Based on Initial screening, both of EUT and SSG shall be set to the frequency at which obtained in A-5) in the above. Connect the dummy load and set the squelch volume of EUT to unsquelched for obtaining the audio signal.
- B-2) Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT. SSG level at which obtaining the 12dB SINAD is receiving sensitivity of EUT (not, tight squelch sensitivity).
- B-3) Adjust the frequency of SSG to the corresponded cellular frequency associated with A-5. Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT.
- B-4) Image rejection ratio is obtained as differences between B-2) and B-3).

C) Test Data**Spec. : At least 38dB**

UB-286Z (20-521A)

Cellular Frequency (MHz)	Image/spurious (Frequency stopped on EUT) (MHz)	Image Rjection Ratio (dB)
824.01	---	---
836.52	814.8125	52.5
	814.8250	49.0
	924.2125	64.0
	941.8750	67.0
	946.8250	60.0
849.00	29.2000	53.0
	819.8000	48.0
	861.6375	63.5
	928.4750	63.0
	940.5000	59.5
869.01	863.5875	42.5
	868.1125	53.5
	910.4750	62.0
	910.4875	61.0
	919.8625	61.0
881.52	808.7750	61.5
	859.8125	51.5
	859.8250	45.5
	939.2125	64.0
	950.8570	64.0
894.00	44.2000	52.5
	918.0000	62.0
	943.4750	63.5

Note: All data not reported were more than 28 dB above the FCC limit.