

TABLE OF CONTENTS LIST

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.

FCC ID: AA02101822

TEST REPORT:

PAGE	1.....	COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....	TECHNICAL DESCRIPTION CONTD. & RF POWER OUTPUT
PAGE	3.....	RF POWER OUTPUT CONTD. & MODULATION CHARACTERISTICS
PAGE	4.....	OCCUPIED BANDWIDTH
PAGE	5.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS AND FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE	6.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	7.....	FREQUENCY STABILITY
PAGE	8.....	CERTIFICATION OF TECHNICAL DATA AND LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT	1.....	POWER OF ATTORNEY LETTER
EXHIBIT	2.....	FCC ID LABEL SAMPLE AND SKETCH OF LOCATION
EXHIBIT	3A.....	EXTERNAL REAR VIEW PHOTOGRAPH
EXHIBIT	3B.....	EXTERNAL FRONT VIEW PHOTOGRAPH
EXHIBIT	3C-3D.....	EXTERNAL SIDE VIEW PHOTOGRAPHS
EXHIBIT	3E.....	EXTERNAL TOP VIEW PHOTOGRAPH
EXHIBIT	3F.....	INTERNAL COMPONENT SIDE PHOTOGRAPH
EXHIBIT	3G.....	INTERNAL SOLDER SIDE PHOTOGRAPH
EXHIBIT	4A-4C.....	THEORY OF OPERATION
EXHIBIT	5A-5B.....	TUNING PROCEDURE
EXHIBIT	6A-6B.....	LIST OF ACTIVE DEVICES
EXHIBIT	7.....	BLOCK DIAGRAM
EXHIBIT	8.....	SCHEMATIC
EXHIBIT	9A-9D.....	USER'S MANUAL
EXHIBIT	10.....	AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT	11A.....	MODULATION LIMITING - 300 Hz
EXHIBIT	11B.....	MODULATION LIMITING - 1000 Hz
EXHIBIT	11C.....	MODULATION LIMITING - 3000 Hz
EXHIBIT	12.....	AUDIO LOW PASS FILTER GRAPH
EXHIBIT	13.....	OCCUPIED BANDWIDTH CW PLOT
EXHIBIT	14.....	OCCUPIED BANDWIDTH With DEVIATION PLOT

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.

FCC ID: AA02101822

DATE: OCTOBER 18, 1999

REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.983 (a,b,c) RADIOSHACK, A DIV. TANDY CORP. will manufacture the
FCCID: AA02101822 FAMILY RADIO SERVICES 14 CHANNEL
TRANSCIVER in quantity, for use under FCC RULES
PART 95.

2.983 (d) TECHNICAL DESCRIPTION

2.983 (d) (1) Type of Emission: 8K8F3E
95.629

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 2.2K$$

$$B_n = 2(3.0) + 2(1.4) = 8.80K$$

Authorized Bandwidth 12.5KHz

2.983 (d) (2) Frequency Range: 1. 462.5625 8. 467.5625
95.627 2. 462.5875 9. 467.5875
 3. 462.6125 10. 467.6125
 4. 462.6375 11. 467.6375
 5. 462.6625 12. 467.6625
 6. 462.6875 13. 467.6875
 7. 462.7125 14. 467.7125 MHz

2.983 (d) (3) Power Output shall not exceed 0.500Watts effective
95.637 radiated power. There can be no provisions for
95.647 increasing the power.

2.983 (d) (4) Maximum Output Power Rating: 500 milliWatts
95.637 effective radiated power.

95.645 The antenna is an intergral part to the unit, it cannot
 be removed without rendering the unit inoperative. In
 order to remove the antenna the case must unscrewed,
 then the PCB assemblies must be removed then the
 antenna can be removed.

2.983 (d) (5) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY

Vce = 4.5 Volts DC Ice = 0.31A.

Pin = 1.42 Watts

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.
FCC ID: AA02101822
DATE: OCTOBER 18, 1999
REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT
PAGE #: 1

2.983 (d) (6) Function of each electron tube or semiconductor device or other active circuit device: SEE EXHIBITS 6A-6B.

2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 8 of this report. The block diagrams are included as EXHIBIT 7 of this report.

2.983(d) (8) Instruction book. A draft copy of the instruction manual is included as EXHIBIT 9.

2.983 (d) (9) Tune-up procedure. The tune-up procedure is included 5A-5B.

(10) Description of all circuitry and devices provided for determining and stabilizing frequency is given in EXHIBIT 9. The crystal specifications are included as PAGES NA.

2.983 (d)(11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power will be 4.

(12) Digital modulation. This unit does not use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF power output.

95.637 RF power is measured by measuring the radiated power at 3 meters and then replacing the transmitter with a signal generator to determine the effective radiated power. The ERP shall not exceed 0.500 Watts.

MEASURED POWER OUTPUT = 500 milliWatts ERP

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.


FCC ID: AA02101822

DATE: OCTOBER 18, 1999

REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT

PAGE #: 2

R.F. POWER OUTPUT
TEST SET UP

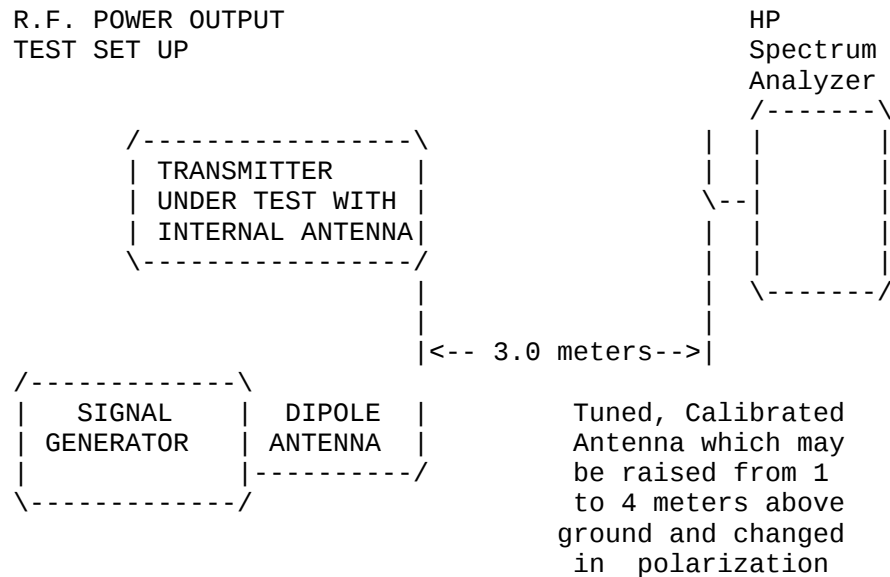

Equipment placed 1 meter above ground on a rotatable platform.

2.987(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. See Exhibit 10.

2.987(b) 1 Audio input versus modulation
The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz. See Exhibits 11A-11C.

95.635(b) Post Limiter Filter The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20KHz the filter must have an attenuation of $60\log(f/3)$ greater than the attenuation at 1KHz. See Exhibit 12.

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.
FCC ID: AA02101822
DATE: OCTOBER 18, 1999
REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT
PAGE #: 3


2.989(c) EMISSION BANDWIDTH:
95.633(b)(1)(3)(7)

Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25dB and from 100 to 250% the sidebands must be attenuated by at least 35dB. Beyond 250% the sidebands must be attenuated by at least $43 + \log_{10}(TP)$. The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth PLOTS follow.

Radiotelephone transmitter with modulation limiter.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

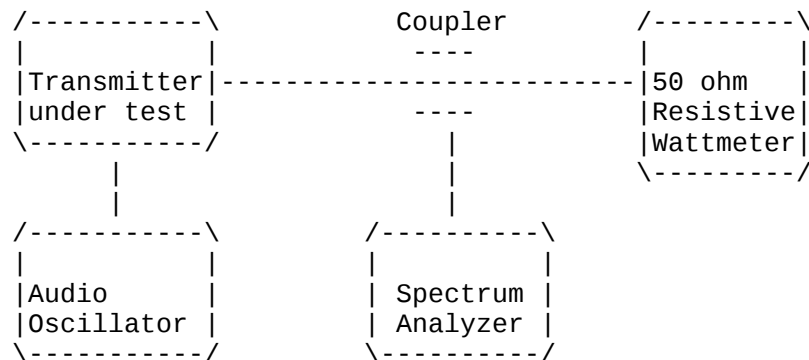

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.
FCC ID: AA02101822
DATE: OCTOBER 18, 1999
REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT
PAGE #: 4

2.991 Not Applicable, no antenna terminal allowed.

2.993(a)(b) UNWANTED RADIATION:
95.635(b)(7)

REQUIREMENTS: Emissions must be attenuated by at least the following below the output of the transmitter.

$$43 + 10\log(TP) = 43 + 10\log(0.5) = 40.00\text{dB}$$

TEST DATA:

EMISSION FREQ. MHZ	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRNGTH dBuV/m	ATT. dBuV/m	MARGIN dB	ANT.
467.63	103.50	1.60	18.56	123.66	0.00	0.00	V
935.20	13.20	2.90	24.18	40.28	83.37	43.37	V
1402.89	23.90	1.00	25.61	50.51	73.14	33.14	V
1870.52	35.50	1.01	27.48	63.99	59.66	19.66	V
2330.15	30.00	1.08	28.83	59.90	63.75	23.75	V
2805.78	27.40	1.15	30.01	58.57	65.09	25.09	V
3273.41	19.50	1.22	31.18	51.90	71.75	31.75	H
3741.04	19.50	1.29	32.35	53.14	70.51	30.51	V
4208.67	8.30	1.36	33.23	42.90	80.76	40.76	H
4676.30	9.90	1.43	33.76	45.09	78.56	38.56	H

MARGIN = (Field strength of Fund - FS OF EMISSION)- 40dB


METHOD OF MEASUREMENT: The procedure used was C63.4-1992 for intentional radiators. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2 and RGA-180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane, Gainesville, FL. 32605.

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.
FCC ID: AA02101822
DATE: OCTOBER 18, 1999
REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT
PAGE #: 5

2.993(a)(b) UNWANTED RADIATION:
95.631(b)(8)(9)

Method of Measuring Radiated Spurious Emissions

Hewlett Packard
Spectrum
Analyzer
HP8566B

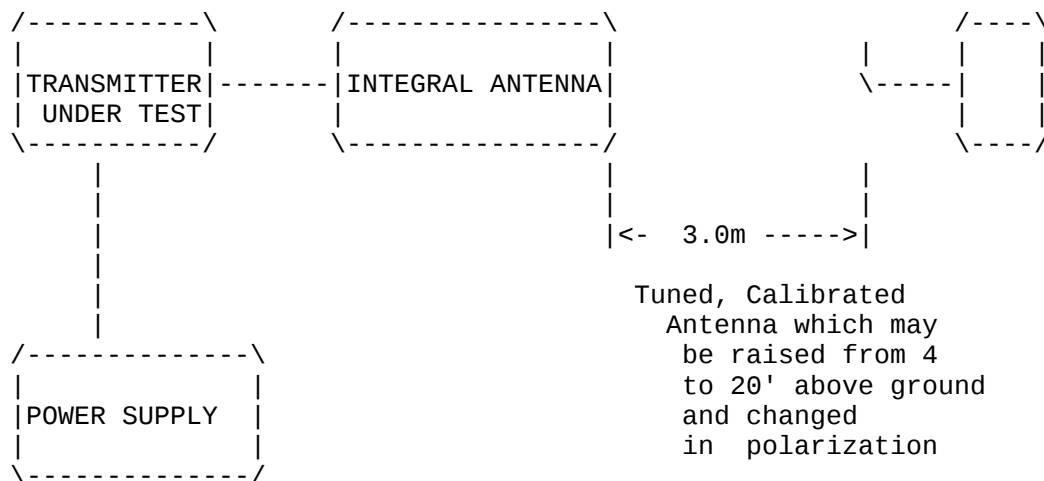

Equipment placed 4' above ground
on a rotatable platform.

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.
FCC ID: AA02101822
DATE: OCTOBER 18, 1999
REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT
PAGE #: 6

2.995(a)(b)(d) Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 4.5 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 467.712 440

TEMPERATURE oC	FREQUENCY MHz	PPM
REFERENCE_____	467.712 440	00.00
-20_____	467.712 630	+0.04
-10_____	467.712 940	+0.11
0_____	467.712 820	+0.08
+10_____	467.712 700	+0.06
+20_____	467.715 550	+0.02
+30_____	467.712 510	+0.01
+40_____	467.712 830	+0.08
+50_____	467.713 337	+0.21

20c BATT. End-Point 4.5V/dc 467.712 343 +0.23

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was +0.01 to +0.21 ppm. The maximum frequency variation with voltage was +0.23ppm.

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.

FCC ID: AA02101822

DATE: OCTOBER 18, 1999

REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT

PAGE #: 7

- 2.983(f) Photo or Drawing of Label:
See EXHIBIT 2.
- 2.983(g) Photos of Equipment:
See EXHIBIT 3A-3G.
- 2.999 Measurement Procedures for Type Acceptance:

Measurement techniques have been in accordance
with EIA specifications and the FCC requirements.
- 2.909 Certification of Technical Data by Engineers

We, the undersigned, certify that the enclosed
measurements and enclosed data are true and
correct.

S.S. Sanders
Engineer

LIST OF TEST EQUIPMENT

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/
preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP
8449B - OPT H02 Cal. 7/6/99
2. Signal Generator, Hewlett Packard 8640B, cal. 9/23/99
3. Signal Generator, HP 8614A Serial No.2015A07428 cal. 5/27/99
3. Eaton Biconnical Antenna Model 94455-1
20-200 MHz Serial No. 0997 Cal. 10/30/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 4/27/99
6. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
7. Electro-Metric Line Impedance Stabilization Network Model
No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal.11/19/98
8. Electro-Metric Line Impedance Stabilization Network Model
No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber
11. AC Voltmeter, HP 400FL, Serial No 2213A14499. Cal. 9/21/99
12. Digital Multimeter, Fluke 8010A/12A, Serial No. 4810047.
Cal 9/21/99
13. Digital Multimeter, Fluke 77, Serial No. 43850817. Cal 9/21/99
14. Oscilloscope, Tektronix 2230, Serial No. 300572. Cal 9/23/99
15. Frequency Counter, HP 5385A, Serial No. 3242A07460. Cal 10/6/99

APPLICANT: RADIOSHACK, A DIV. TANDY CORP.
FCC ID: AA02101822
DATE: OCTOBER 18, 1999
REPORT #: T:\CUS\R\RADSHACK\RAD434A9\RAD434A9.RPT
PAGE #: 8