



KTL EMC Test Report : 4H8379GUS1

Applicant : Flextronics SA

Apparatus : Nortel IP Phone IP1150E

A handwritten signature in black ink that reads 'K J Anderson'. The signature is written in a cursive, slightly slanted style.

Authorised by : K J Anderson, Principal EMC and Radio Group Engineer

Issue Date : 25th August 2006

Authorised Copy Number : PDF

Total number of pages : 43

Contents

Section 1:	Introduction	3
	1.1 General	3
	1.2 Tests Requested By	4
	1.3 Manufacturer	4
	1.4 Apparatus Assessed	4
	1.5 Test Result Summary	5
	1.6 Notes Relating To The Assessment	6
	1.7 Deviations from Test Standards	7
Section 2:	Measurement Uncertainty	8
	2.1 Introduction	8
	2.2 Application of Measurement Uncertainty	8
	2.3 Measurement Uncertainty Values	8
Section 3:	Modifications	9
	3.1 Modifications Performed During Assessment	9
Appendix A:	Formal Emission Test Results	10
	A1 Radiated Electric Field Emissions	11
	A2 Power Line Conducted Emissions	14
	A3 20 dB Bandwidth and Channel Spacing	16
	A4 Conducted carrier power	17
	A5 Hopping frequencies	18
	A6 Channel Occupancy	19
Appendix B:	Supporting Graphical Data	20
Appendix C:	Additional Test and Sample Details	31
Appendix D:	Additional Information	37
Appendix E:	Photographs and Figures	39
Appendix F:	MPE Calculation	43

Section 1:

Introduction

1.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by:

KTL
Saxon Way
Priory Park West
Hull HU13 9PB
United Kingdom

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806
Email: ktl@ktl.com
Web site: www.ktl.com



Tests performed by:

,K J Anderson, Principal EMC and Radio Group Engineer



Report author:.

M E Leach, Senior EMC and Radio Group Engineer

This report must not be reproduced except in full without prior written permission from KTL.

1.2 Tests Requested By

This testing in this report was requested by:

Flextronics SA
260 Surrey Avenue
Ferndale
Randburg
2194
South Africa

1.3 Manufacturer

Flextronics Technology (Shanghai) Co. Ltd
No. 77 Yong Sheng Road
Malu Jiading
Shanghai
210801
China

1.4 Apparatus Assessed

The following apparatus was assessed between 21st and 22nd August 2006:

Nortel IP Phone IP1150E

The above equipment was an IP phone incorporating a Bluetooth radio module

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
REFE	Title 47 of the CFR: 2004, Part 15 Subpart (c) 15.247	ANSI C63.4: 2003	PASS
AC Power conducted emissions	Title 47 of the CFR: 2004, Part 15 Subpart (c) 15.207	ANSI C63.4: 2003	PASS
20dB Bandwidth and Channel Spacing	Title 47 of the CFR :2004, Part 15 Subpart (c) 15.247(a)(1)(i)	Public Notice DA 00-705 March 30, 2000	PASS
Conducted Carrier Power	Title 47 of the CFR :2004, Part 15 Subpart (c) 15.247(b)(2)	Public Notice DA 00-705 March 30, 2000	PASS
Hopping Frequencies	Title 47 of the CFR :2004, Part 15 Subpart (c) 15.247(a)(1)	Public Notice DA 00-705 March 30, 2000	PASS
Channel Occupancy	Title 47 of the CFR :2004, Part 15 Subpart (c) 15.247(a)(1)(i)	Public Notice DA 00-705 March 30, 2000	PASS

Abbreviations used in the above table:

Mod : Modification
 CFR : Code of Federal Regulations
 REFE : Radiated Electric Field Emissions
 ANSI : American National Standards Institution

1.6 Notes Relating To The Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

KTL Hull is a listed electromagnetic compatibility Conformance Assessment Body (CAB) for EC access to the US market. (Decision No 3/2000 of the Joint Committee established under the Agreement on Mutual Recognition between the European Community and the United States of America. This decision was effective from 16th January 2001).

FCC Facility Registration number (3m semi anechoic chamber) : 90743

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:

Measurement Uncertainty

2.1 Introduction

The standard ISO/IEC 17025 used for laboratory accreditation requires laboratories to estimate measurement uncertainty using accepted methods of analysis.

Where required, the reported expanded uncertainty is based on a standard uncertainty providing a confidence level of approximately 95%.

Measurement uncertainty is calculated using the methods defined in the UKAS document LAB34 Edition 1 August 2002.

KTL measurement uncertainty is recorded in the KTL document UNC/RFG/001 Issue 16.

2.2 Application of Measurement Uncertainty

The following procedure is used when determining the result of a measurement :

- (i) If specification limits are not exceeded by the measured result, extended by the positive component of the expanded uncertainty interval at a confidence level of 95%, then a pass result is recorded.
- (ii) Where a specification limit is exceeded by the result even when the result is decreased by the negative component of the expanded uncertainty interval, a fail result is recorded.
- (iii) Where measured result is below a limit, but by a margin less than the positive measurement uncertainty component, it is not possible to record a pass based on a 95% confidence level. However, the result indicates that a pass result is more probable than a fail result.
- (iv) Where a measured result is above a limit, but by a margin less than the negative measurement uncertainty component, it is not possible to record a fail based on a 95% confidence level. However the result indicates that a fail is more probable than a pass.

2.3 Measurement Uncertainty Values

All results were recorded in accordance with Section 2.2(i).

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment.

Appendix A:

Formal Emission Test Results

Abbreviations used in the tables in this appendix:

Spec : Specification
Mod : Modification

EUT : Equipment Under Test
SE : Support Equipment

L : Live Power Line
N : Neutral Power Line
E : Earth Power Line

Pk : Peak Detector
QP : Quasi-Peak Detector
Av : Average Detector

ALSR : Absorber Lined Screened Room
OATS : Open Area Test Site
ATS : Alternative Test Site

Ref : Reference
Freq : Frequency

MD : Measurement Distance
SD : Spec Distance

Pol : Polarisation
H : Horizontal Polarisation
V : Vertical Polarisation

CDN : Coupling & decoupling network

A1 Radiated Electric Field Emissions

Preliminary radiated electric field emissions testing was performed using a peak detector in an absorber lined screened room.

The following test site was used for final measurements as specified by the standard tested to :

10m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details	
Regulation	Title 47 of the CFR :2002, Part 15 Subpart (c) Clause 15.247
Measurement standard	ANSI C63.4:2003
Frequency range	16 MHz to 25 GHz
EUT sample number	S11 and S07
Modification state	0
SE in test environment	None
SE isolated from EUT	EMC Laptop
EUT set up	Refer to Appendix C
Photographs (Appendix E)	Photograph 1 and 2

The worst case radiated emission measurements are listed below:

Ref No.	Freq (MHz)	Det .	Angle. Deg.	Height (cm)	Pol.	MD (m)	Result at MD (dB μ V/m)	SD (m)	Result at SD (dB μ V/m)	Spec. Limit (dB μ V/m)	Margin (dB)	Summary
1	45.62	QP	346	125	V	3	35.87	3	35.9	81.7	-45.8	Pass
2	874.6	QP	295	101	V	3	40.7	3	40.7	81.7	-41	Pass
3	1620	Pk	34	100	V	3	31.35	3	31.4	74	-42.6	Pass
4	1620	Av	34	100	V	3	27.75	3	27.8	54	-26.2	Pass
5	2402	Pk	19	100	V	3	101.7	3	101.7	Note 3	N/A	Pass
6	2402	Av	19	100	V	3	100.9	3	100.9	Note 3	N/A	Pass
6	4804	Pk	56	100	V	3	51.4	3	51.4	91.1	-39.7	Pass
7	4804	Av	56	100	V	3	48.2	3	48.2	71.1	-22.9	Pass
8	2400	Pk	19	100	V	3	55.6	3	55.6	101.7	-46.1	Pass
9	2400	Av	19	100	V	3	50.4	3	50.4	81.7	-31.33	Pass
10	2483.5	Pk	19	100	V	3	56.7	3	56.7	74	-17.3	Pass
11	2483.5	Av	19	100	V	3	48.7	3	48.7	54	-5.3	Pass

Notes:

1. Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.4: 2003 section 8.2.1.
2. All other emissions in the restricted bands defined in 47CFR15.205(a) were greater than 10 dB below the 47CFR15.209 limit.
3. The emissions limits for emissions outside the restricted bands defined in 47CFR15.205(a) are based on a transmitted carrier level of 101.7 dB μ V/m at 3m. Emissions from the EUT are required to be 20 dB below the level of the emissions in the operating band. The carrier level was measured whilst varying the supply voltage between 85% and 105% of the nominal supply voltage as required by 15.31(e). No variation in carrier level was observed.
4. In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
5. The measurements at 2400 MHz and 2483.5 MHz were made to ensure band edge compliance.
6. Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded.
7. For Frequencies Below 1 GHz, RBW= 100 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak	RBW=VBW= 1MHz
Average	RBW= 1 MHz, VBW = 10 Hz

These settings as per ANSI C63.4 and DA 00-705.

The upper frequency of the measurement range was decided according to 47 CFR 15:1999 Clause 15.33.

Radiated emission limits (47 CFR 15:1999 Clause 15.209) for emissions falling within the restricted bands defined in 15.205(a):

Frequency of emission (MHz)	Field strength $\mu\text{V/m}$	Measurement Distance m	Field strength $\text{dB}\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	210	3	46.4
Above 960	500	3	54.0

Notes:

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

The results displayed take into account applicable antenna factors and cable losses.

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels	✓			
(i)	Parameter defined by standard and / or single possible, refer to Appendix D			
(ii)	Parameter defined by client and / or single possible, refer to Appendix D			
(iii)	Parameter had a negligible effect on emission levels, refer to Appendix D			
(iv)	Worst case determined by initial measurement, refer to Appendix D			

A2 AC Power Conducted Emissions

Preview power line conducted emission measurements were performed with a peak detector in a screened room.

The effect of the EUT set-up on the measurements is summarised in note (b) below.

Where applicable formal measurements of the emissions were performed with a peak, average and/or quasi peak detector. The formal measurements are detailed below:

Test Details	
Regulation	Title 47 of the CFR Part 15(c) Section 15.207
Measurement standard	ANSI C63.4:2003
Frequency range	150kHz to 30MHz
EUT sample number	S11 and S07
Modification state	0
SE in test environment	None
SE isolated from EUT	EMC Laptop
EUT set up	Refer to Appendix C
Photographs (Appendix E)	Photograph 3

The worst case power line conducted emission measurements are listed below:

Ref No.	Freq (MHz)	Conductor	Detector Used	Result (dBuV)	Av Spec Limit (dBuV)	Result Summary
1	0.162	Neutral	Av	43.5	55.3	Pass
2	0.217	Neutral	Av	36.3	53.0	Pass
3	0.325	Neutral	Av	40.3	49.6	Pass
4	0.379	Neutral	Av	37.7	48.3	Pass
5	0.479	Neutral	Av	36.6	46.4	Pass
6	1.679	Neutral	Av	31.3	46.0	Pass
7	0.163	Live	Av	42.8	55.3	Pass
8	0.217	Live	Av	36.1	53.0	Pass
9	0.325	Live	Av	40.5	49.6	Pass
10	0.379	Live	Av	40.4	48.3	Pass
11	0.478	Live	Av	36.7	46.4	Pass
12	1.679	Live	Av	31.9	46.0	Pass

Ref No.	Freq (MHz)	Conductor	Detector Used	Result (dBuV)	QP Spec Limit (dBuV)	Result Summary
1	0.162	Neutral	QP	55.9	65.3	Pass
2	0.217	Neutral	QP	47.1	63.0	Pass
3	0.325	Neutral	QP	45.8	59.6	Pass
4	0.379	Neutral	QP	41.5	58.3	Pass
5	0.479	Neutral	QP	39.2	56.4	Pass
6	1.679	Neutral	QP	32.5	56.0	Pass
7	0.163	Live	QP	53.8	65.3	Pass
8	0.217	Live	QP	44.5	63.0	Pass
9	0.325	Live	QP	43.0	59.6	Pass
10	0.379	Live	QP	43.2	58.3	Pass
11	0.478	Live	QP	39.2	56.4	Pass
12	1.679	Live	QP	33.2	56.0	Pass

Conducted emission limits (47 CFR 15:1999 Clause 15.207):

Frequency range MHz	Limits dB μ V	
	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

Notes :

- (a) The levels may have been rounded for display purposes.
- (b) The following table summarises the effect of the EUT operating mode and internal configuration on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

- (c) Conducted emissions testing was performed using a Rohde and Schwarz ESH3-Z5 50ohm/50uH LISN .

A3 20 dB Bandwidth and Channel Spacing

Title 47 of the CFR: 2002, Part 15 Subpart (c) 15.247(a)(1)(i) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is the greater. The formal measurements are detailed below:

Test Details: Conference Phone	
Regulation	Title 47 of the CFR :2002, Part 15 Subpart (c) 15.247(a)(1)(i)
EUT sample number	S11 and S07
Modification state	0
SE in test environment	EMC Laptop
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Measured 20 dB Bandwidth	Limit	Result
855 kHz	N/A	N/A

Measured Channel Spacing	Limit	Result
1012.5 kHz	≥ 855 kHz	Pass

Plots of the 20 dB bandwidth and channel spacing are contained in Appendix B of this test report.

A4 Conducted carrier power

Conducted carrier power was verified using a spectrum analyser with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details: Conference Phone	
Regulation	Title 47 of the CFR2002, Part15 Subpart (c) 15.247(b)(2)
EUT sample number	S11 and S07
Modification state	0
SE in test environment	EMC Laptop
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Frequency (MHz)	Measured Conducted Carrier Power (W)	Limit (W)	Result
2402.000	0.0035	1	Pass
2437.125	0.0038	1	Pass
2481.125	0.0040	1	Pass

Note

The carrier power was measured whilst varying the supply voltage between 85% and 105% of the nominal supply voltage as required by 15.31(e). No variation in carrier power was observed.

A5 Hopping frequencies

Hopping frequencies were verified using a spectrum analyser set to 20 MHz spans, displaying sub sets of the hopping channels in turn, while the EUT was operating in its normal frequency hopping mode.

Test Details:	
Regulation	Title 47 of the CFR :2002, Part 15 Subpart (c) 15.247(a)(1)(i)
EUT sample number	S11 and S07
Modification state	0
SE in test environment	EMC Laptop
SE isolated from EUT	None
EUT set up	Refer to Appendix C

No. of Hopping Channels	Requirement	Result
79	For 1W conducted carrier power Limit, greater than 75	Pass

Plots showing the hopping channels are contained in Appendix B

A6 Channel Occupancy

Channel occupancy time was verified using a spectrum analyser in zero span mode, centred on the middle hopping channel frequency (2441 MHz), while the EUT was operating in its normal frequency hopping mode. The other channels were then verified to ensure that the channel occupancy was identical for all channels.

Test Details: Conference Phone	
Regulation	Title 47 of the CFR2002, Part15 Subpart (c) 15.247(a)(1)
EUT sample number	S11 and S07
Modification state	0
SE in test environment	EMC Laptop
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Measured Channel Occupancy Time	Limit	Result
0.146 ms	400 ms	Pass

Plots showing the channel occupancy time and time between successive transmissions are contained in Appendix B of this test report.

Average Occupancy

For a frequency hopping system utilising 79 channels (N), with a channel occupancy time (t_{occ}) of 0.146 ms and a repetition time (t_{rep}) of 41 ms

No of transmission cycles in specified averaging period $(400 \times N) / t_{rep}$ (ms)

$$\begin{aligned}
 &= (0.4 \times N) / t_{rep} \\
 &= (0.4 \times 79) / 0.041 \\
 &= 771 \text{ cycles}
 \end{aligned}$$

$$\begin{aligned}
 \text{total activation time} &= t_{occ} \text{ (ms)} \times 771 \\
 &= 0.146\text{ms} \times 771 \\
 &= 112.6 \text{ ms}
 \end{aligned}$$

$$\text{limit} = 400 \text{ ms}$$

Result: Pass


Appendix B:

Supporting Graphical Data


This appendix contains graphical data obtained during testing.

Notes:


- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.
- (f) The limit line on the conducted emissions plots is the EN55022:1998 class B limit. This is identical to the 47 CFR Part 15(b) class B limit.
- (g) The limit line on the radiated emissions is the limit for emissions outside the restricted bands. Any emissions detected within the restricted band were formally assessed against the limits in 15.209.

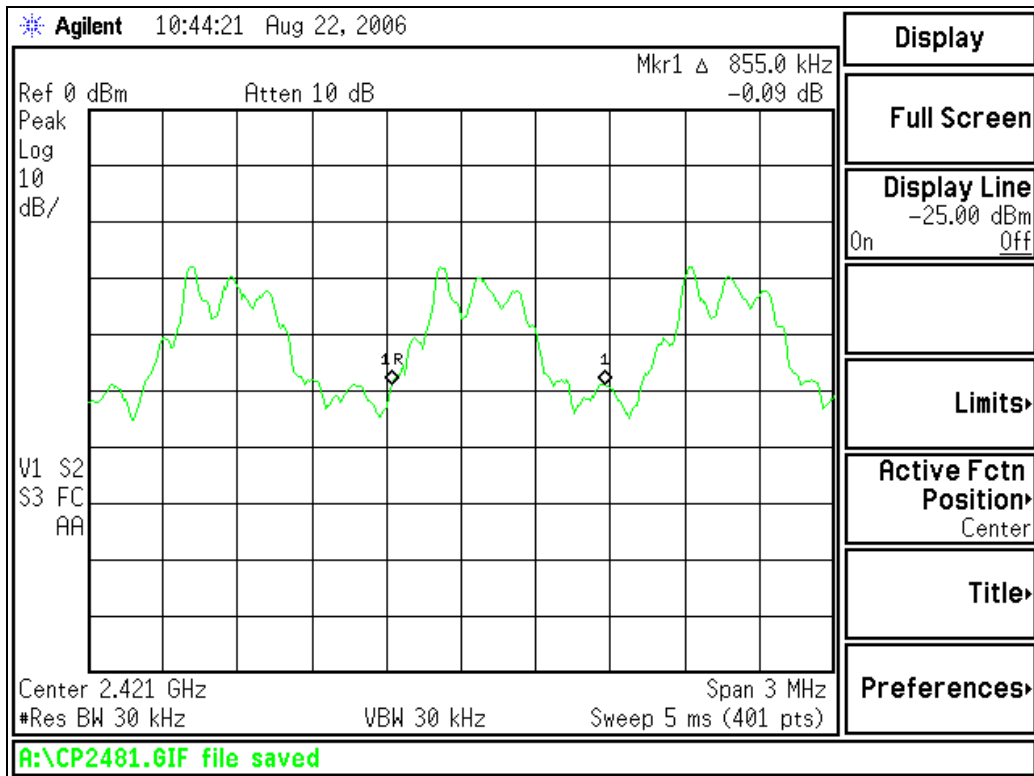


20 dB Bandwidth

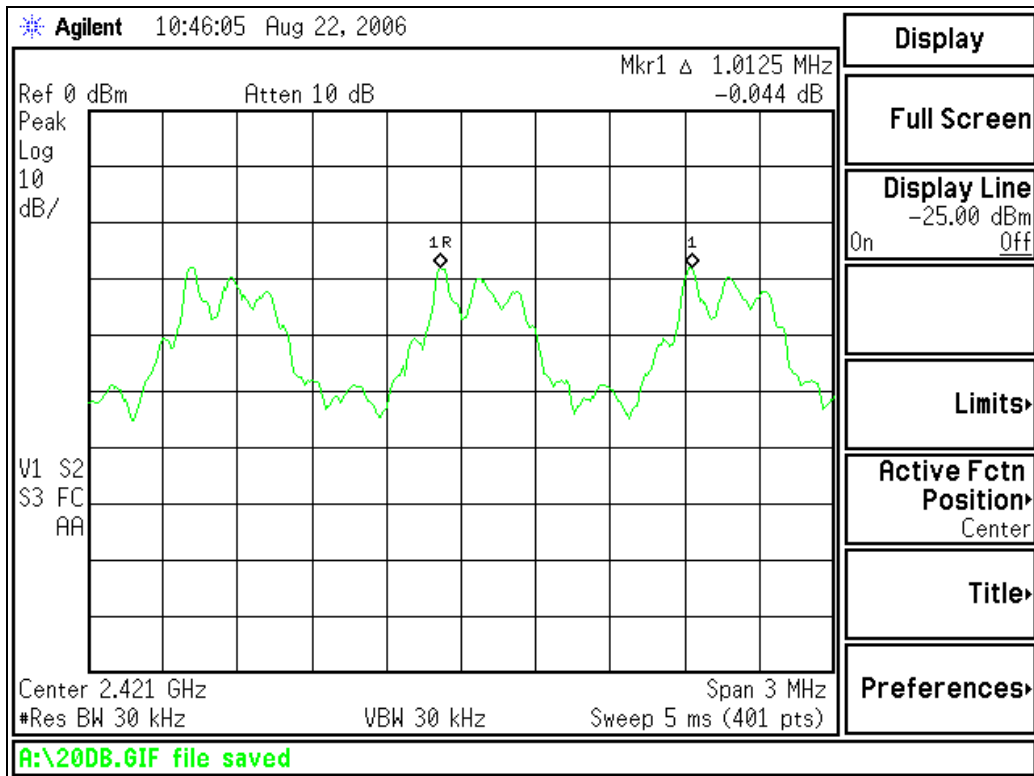


Channel Spacing

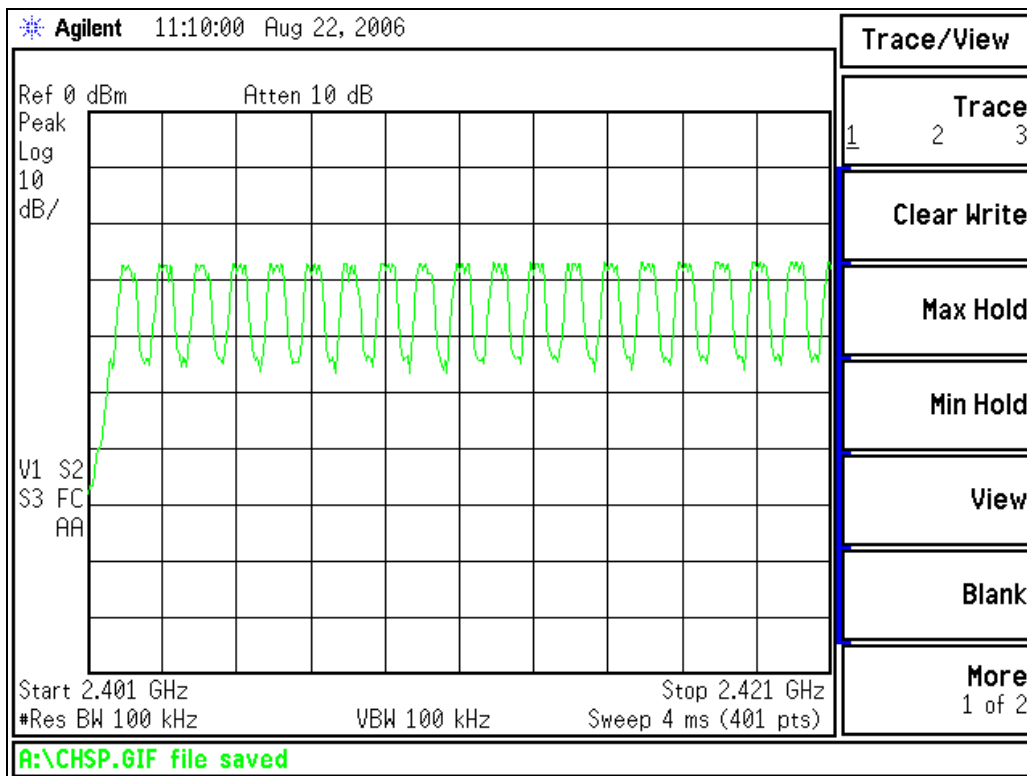


Channels 0 to 19

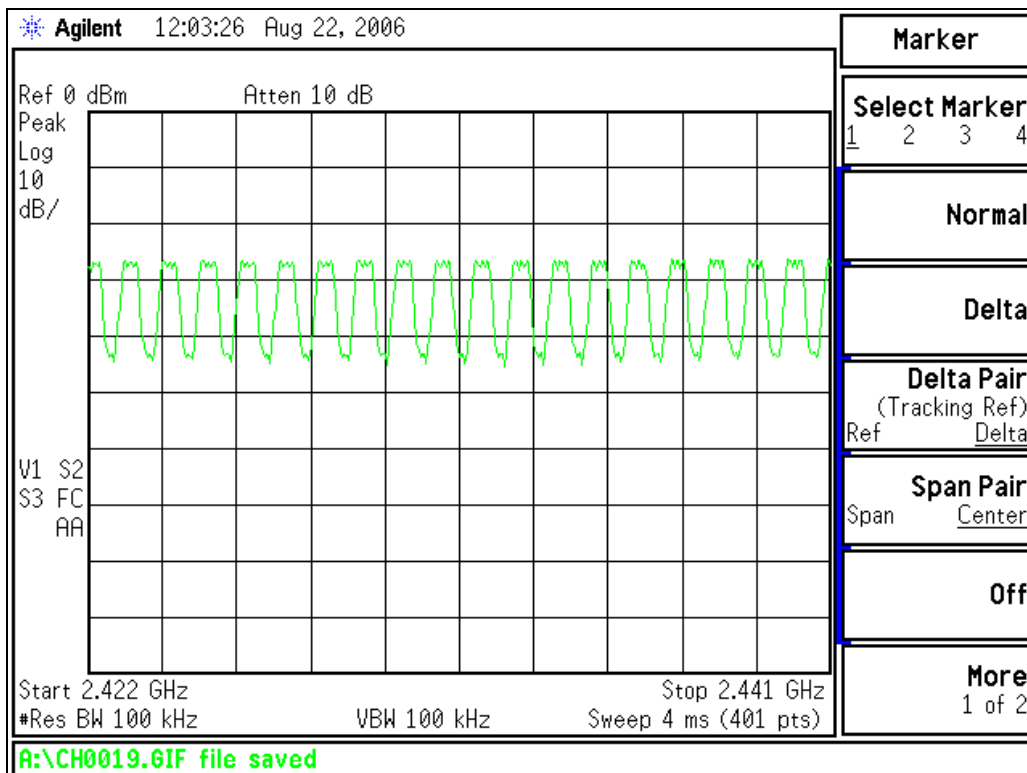


Channels 20 to 39

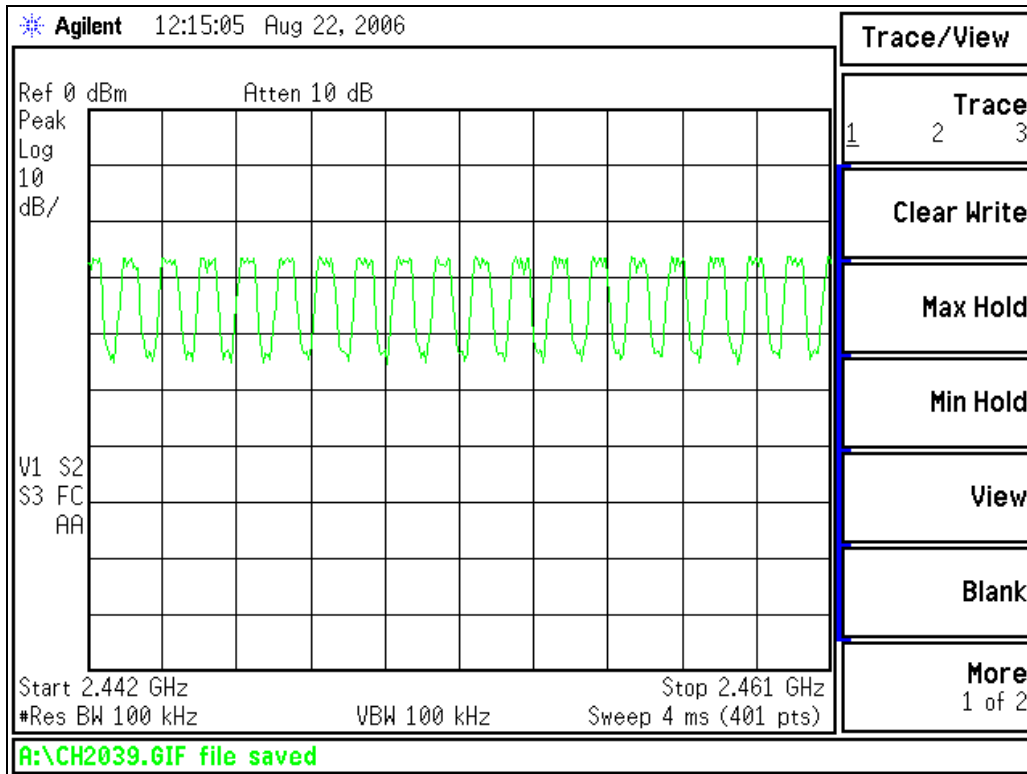


Channels 40 to 59

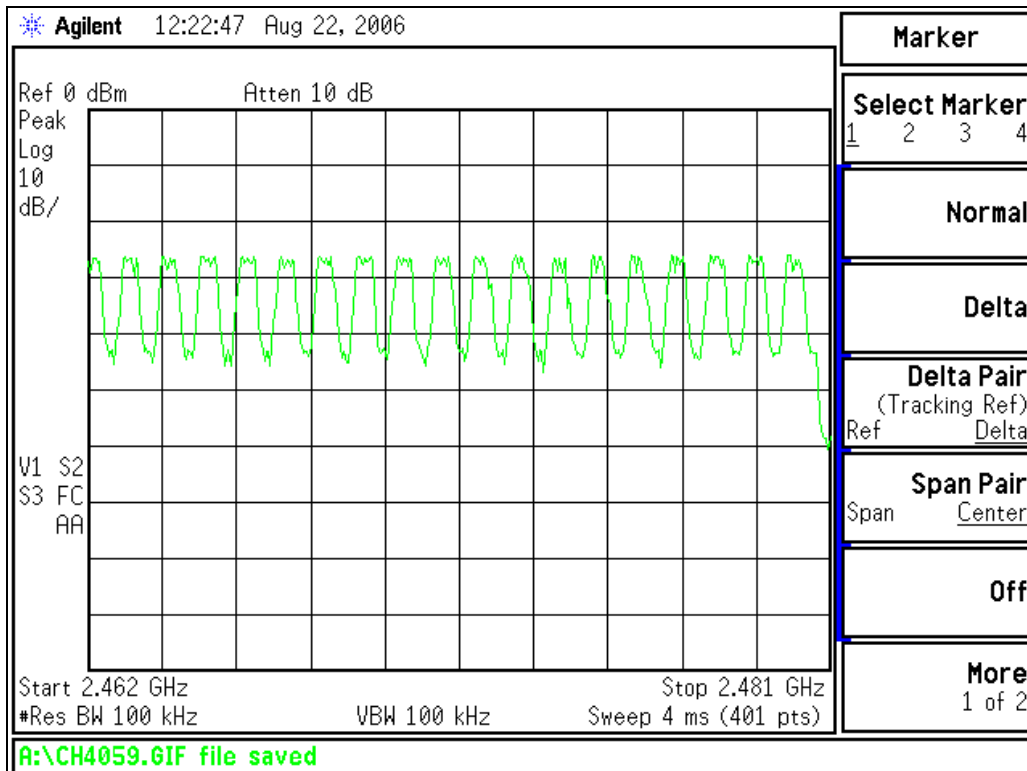



Channels 60 to 78


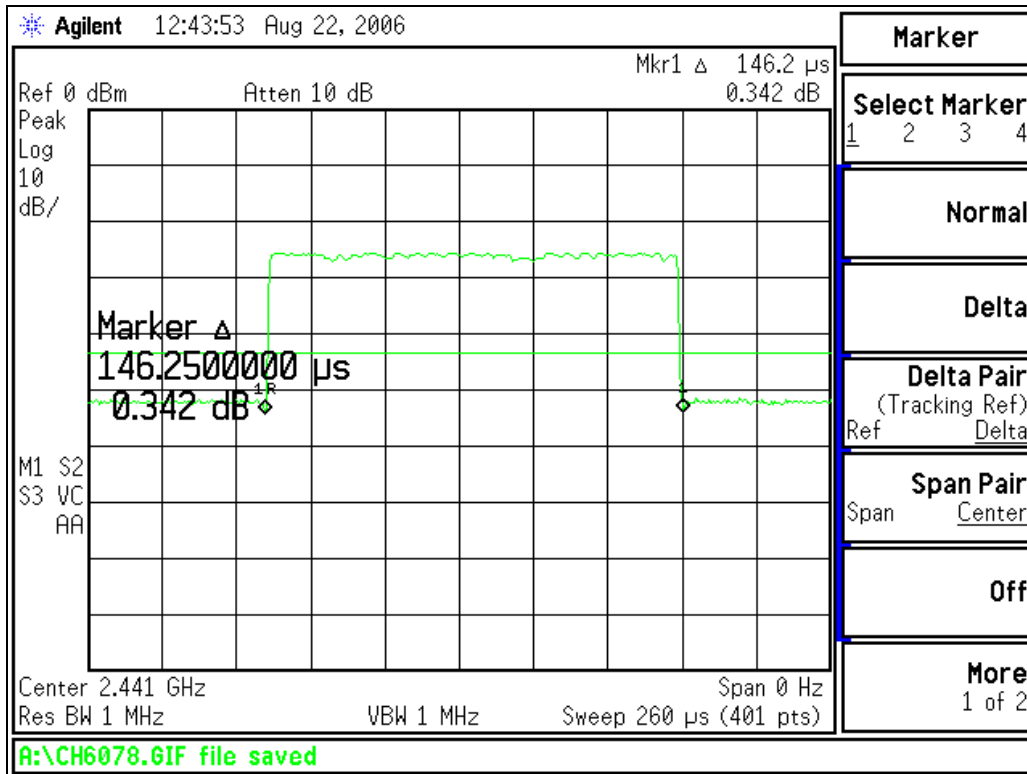



Channel occupancy

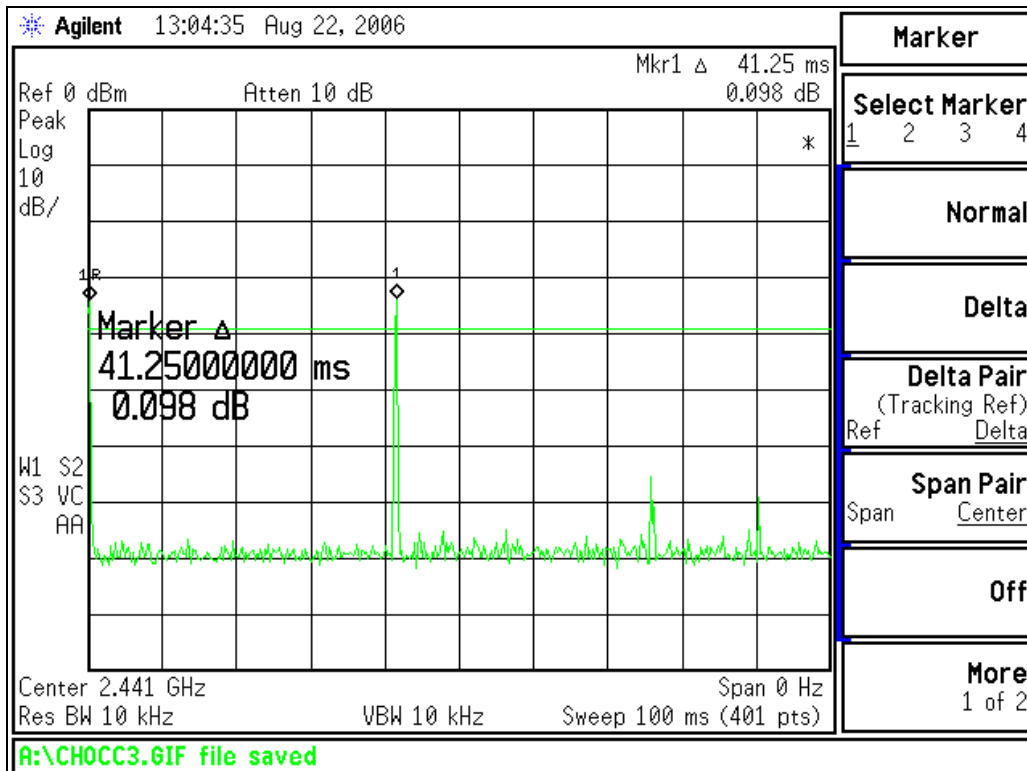



Channel repetition time

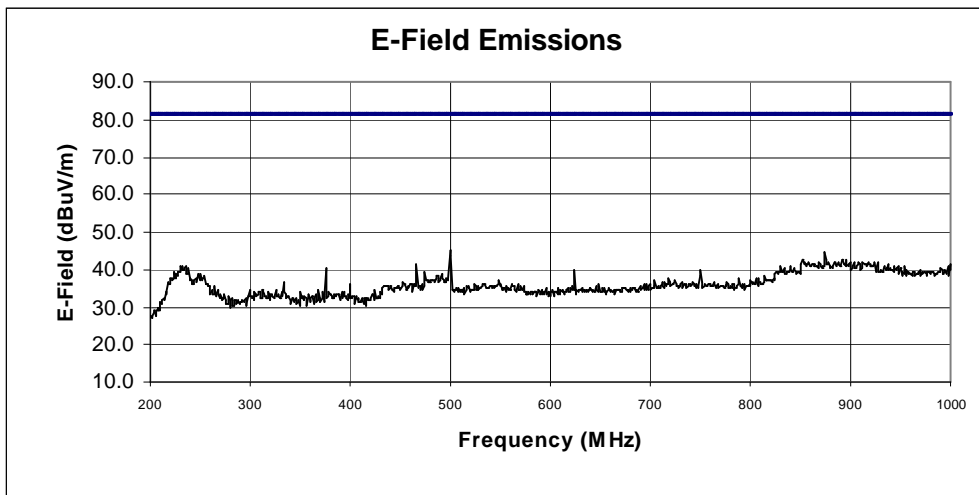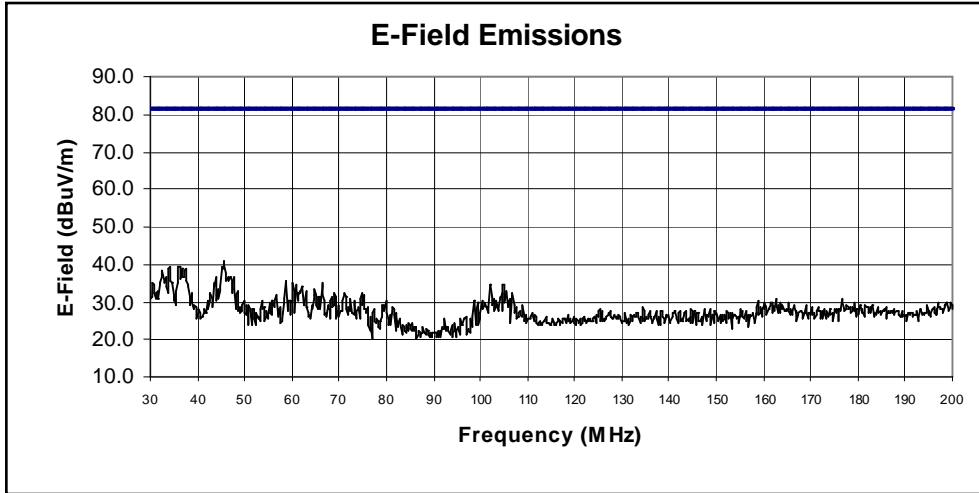

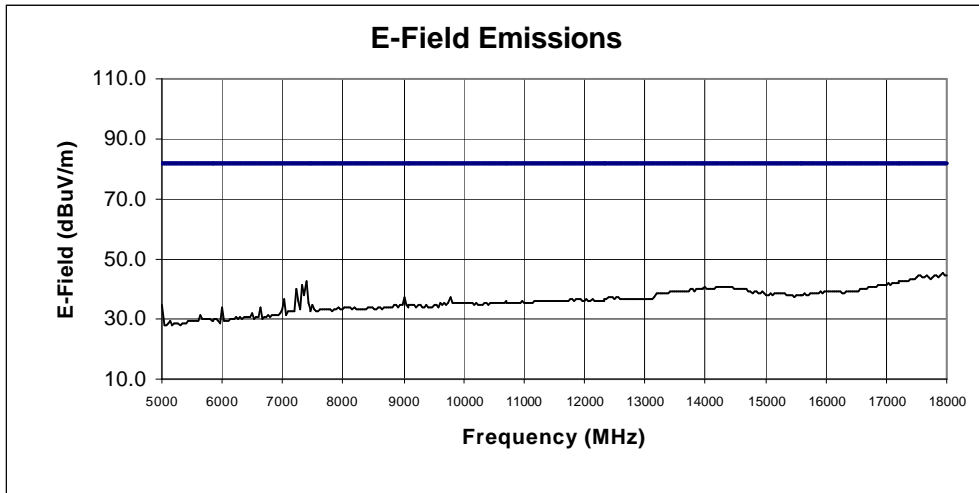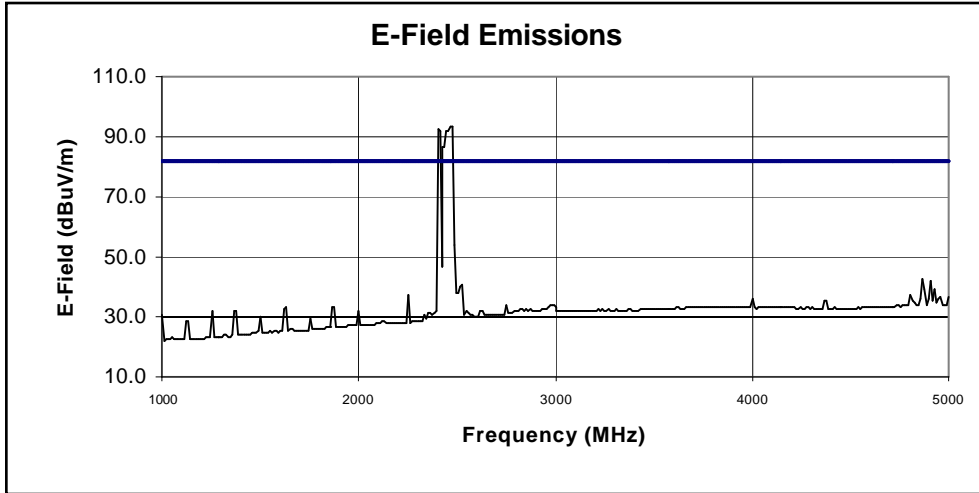


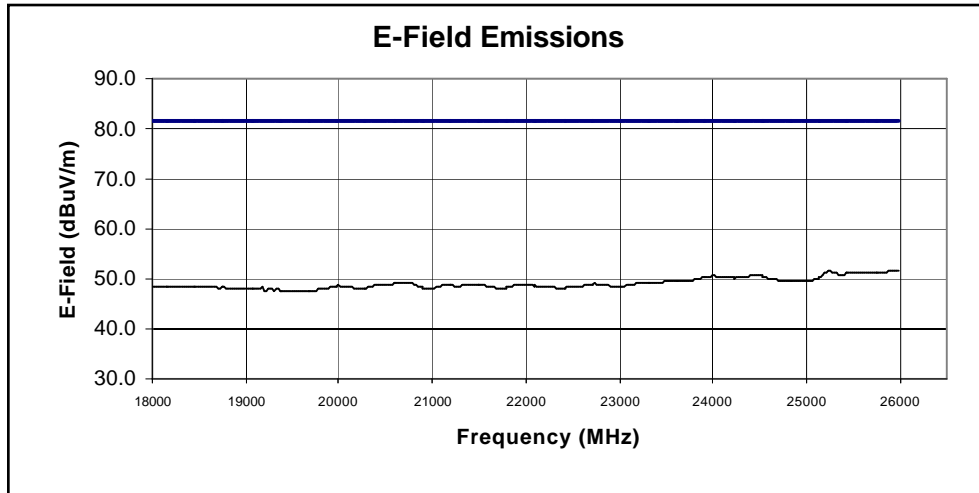

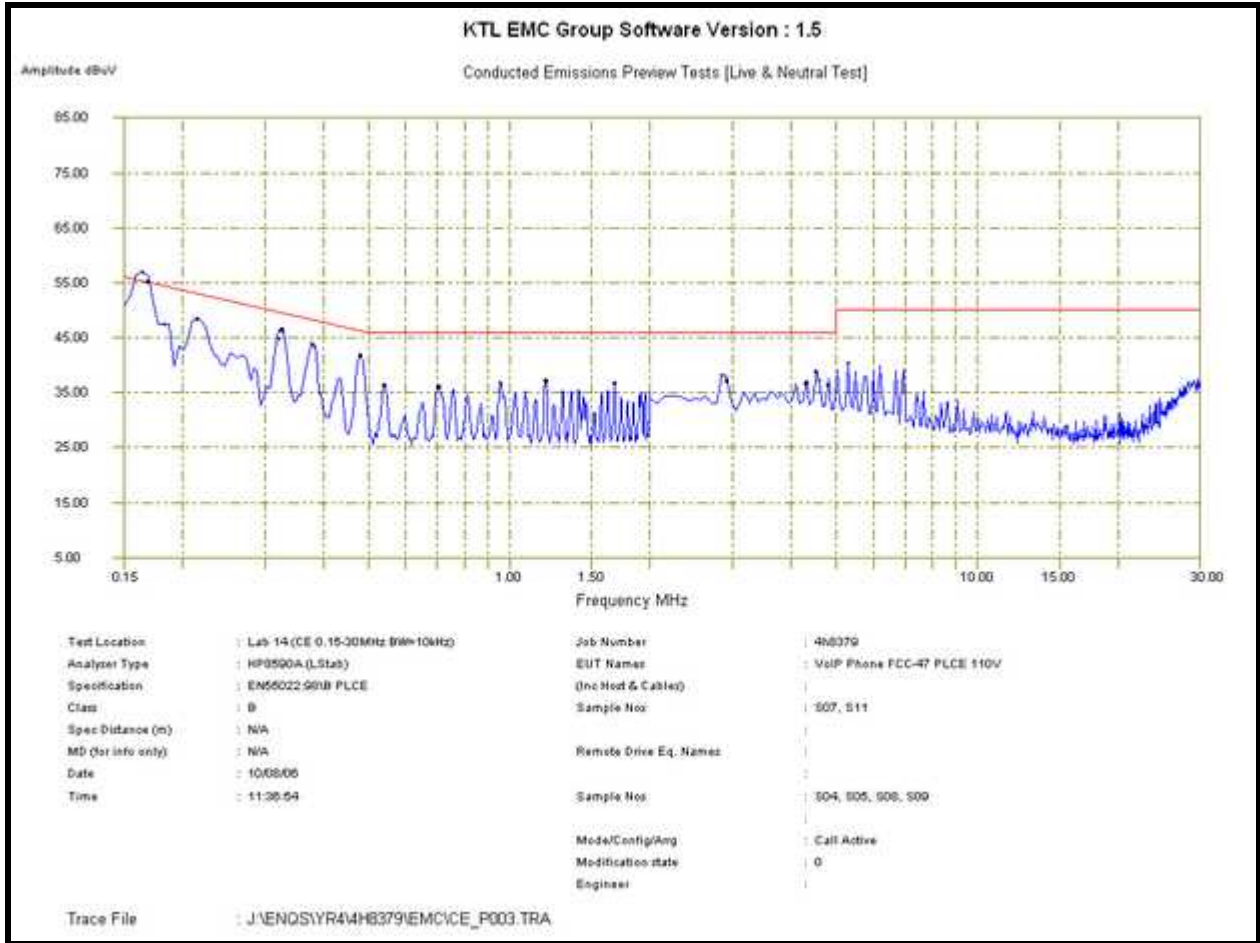


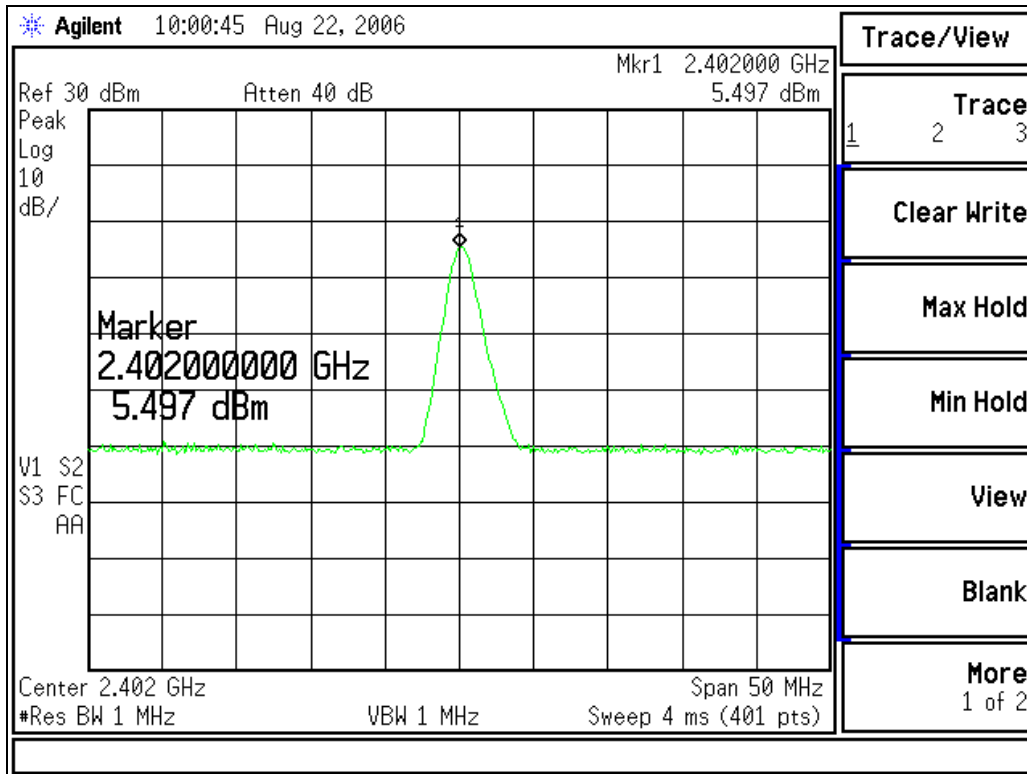

Conducted carrier power 2.402GHz

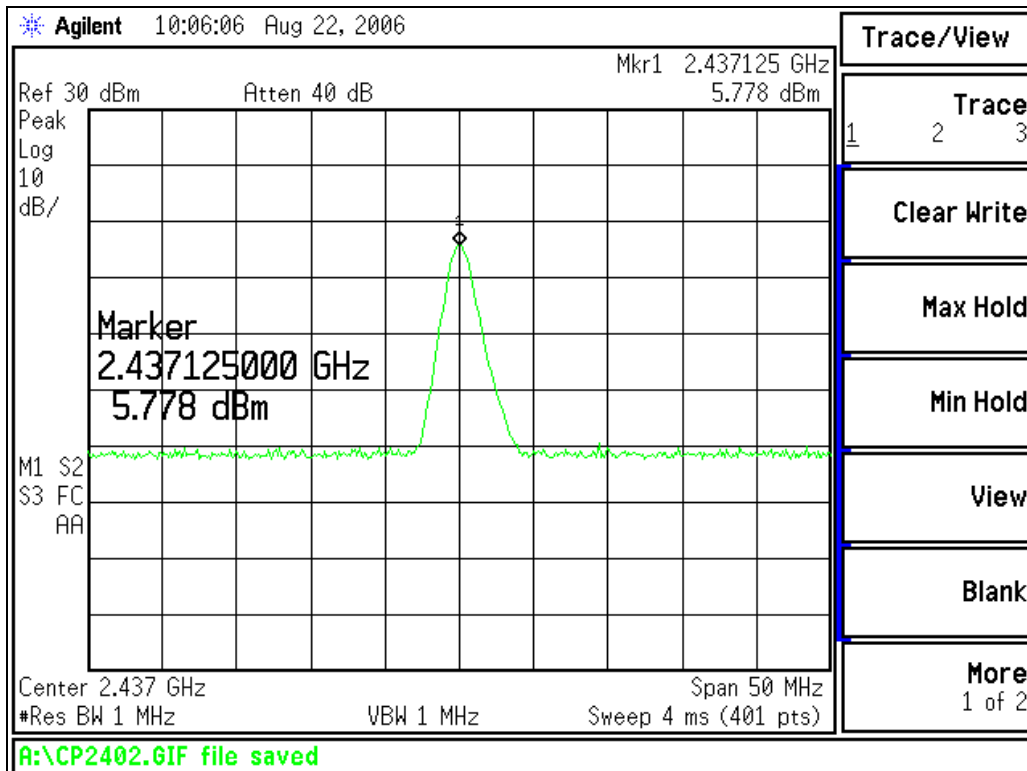

Conducted carrier power 2.437.125 GHz

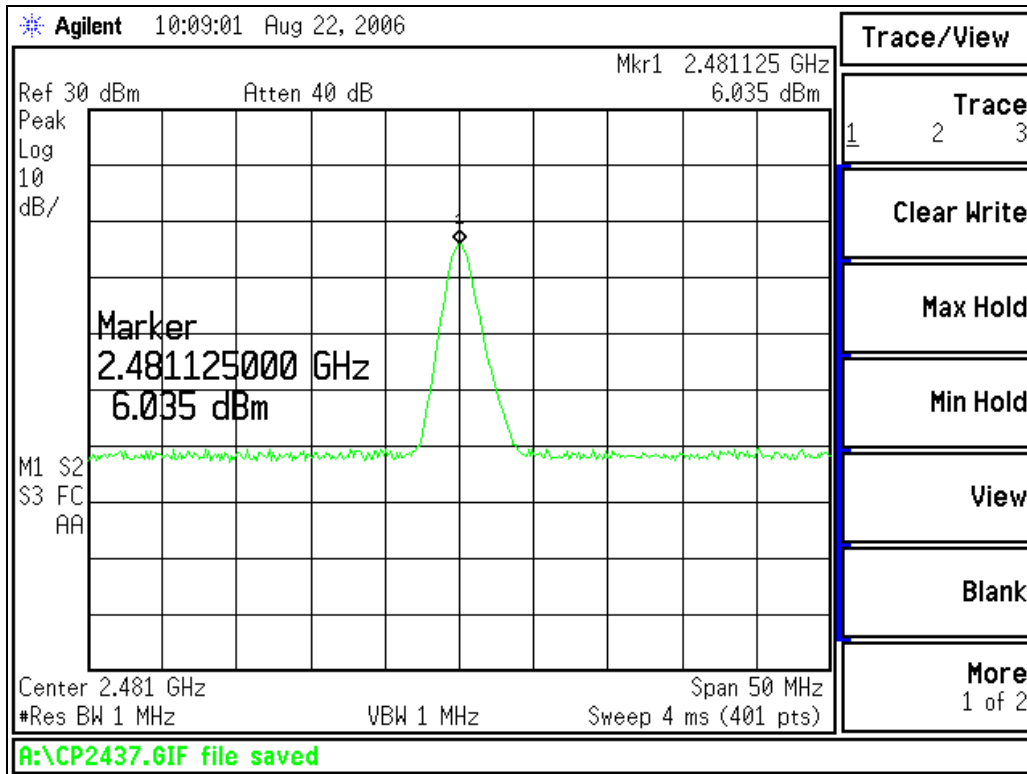

Conducted carrier power 2.481.125 GHz

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The Samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by KTL upon request.

C1) Test samples

The following samples of the apparatus were submitted for testing:

Sample No.	Description	Identification
S11	Nortel IP Phone IP1150E	NNTMDV00P5X6
S07	PSU	H00002919

The following samples of apparatus were submitted (or supplied by KTL) as host, support or drive equipment (auxiliary equipment):

Sample No.	Description	Identification
N/A	EMC Laptop	RFG 456

C2) EUT Operating Mode During Testing.

During testing, the EUT was exercised as described in the following tables :

Test	Description of Operating Mode
All tests detailed in this report	EUT transmitting on maximum power using FHSS over 79 channels with 1 MHz channel spacing using FSK Modulation

C3) EUT Configuration Information.

The EUT was submitted for testing in one single possible configuration.

C4) List of EUT Ports

The table below describes the termination of EUT ports:

Sample : S11
Tests : All

Port	Description of Cable Attached	Cable length	Equipment Connected
LAN Ethernet	None	N/A	N/A
PC Ethernet	CAT 6 UTP	2m	Laptop PC
USB	None	N/A	N/A
DC I/P	2 Core Unscreened	1.5m	S07
Agent H/S	None	N/A	N/A
Supervisor H/S	None	N/A	N/A

Sample : S07
Tests : All

Port	Description of Cable Attached	Cable length	Equipment Connected
DC O/P	2 Core Unscreened	1.5m	S11
AC I/P	3 Core Unscreened	1m	Mains Supply

Notes on the above:

The connection of cables and drive or support equipment was identical for all tests

C5) Details of test equipment used

For Radiated Electric Field Emissions 30MHz to 1GHz:

RFG No	Type	Description	Manufacturer	Date Calibrated.
274	ATS	Ferrite Lined Chamber	KTL	24/05/05
231	CBL6111	Blue Bilog Antenna (0.03 - 1GHz)	Chase	31/08/05
214	ESAI	Spec Analyser/Test Rxer (LF/HF)	R & S	27/09/05
249	N-type	RF coaxial cable (Lab 10)	KTL	12/08/05
255	N-type	RF coaxial cable (Lab 10)	KTL	12/08/05
270	N-type	RF coaxial cable (Lab 10)	KTL	12/08/05

For Radiated Electric Field Emissions 1GHz to 25GHz

RFG No	Type	Description	Manufacturer	Date Calibrated
274	ATS	Ferrite Lined Chamber	KTL	10/05/06
129	3115	Horn Antennas	EMCO	29/07/98
307	HP8449B	Microwave Pre-Amp (1-26.5GHz)	HP	25/01/06
312	-	Sucoflex uW Adapter Cable 1m	Suhner	30/01/06
313	-	Sucoflex uW Adapter Cable 1m	Suhner	30/01/06
137	N-104	Sucoflex uW Cable 2m	Suhner	30/01/06
138	N-104	Sucoflex uW Cable 2m	Suhner	30/01/06
158	N-106	Sucoflex uW Cable 6m	Suhner	30/01/06
404	E4407B	Spectrum Analyser	Agilent	25/01/06

For conducted RF power

RFG No	Type	Description	Manufacturer	Date Calibrated
404	E4407B	Spectrum Analyser	Agilent	25/01/06

For power line conducted emissions

RFG No	Type	Description	Manufacturer	Date Calibrated
n/a	Lab 14	Small Screened Chamber	KTL	-
030	ESH3-Z5	Single-phase LISN	R & S	08/02/06
232	ESH3-Z2	Pulse Limiter	R & S	16/12/05
125	ESHS 10	Test Receiver (LF)	R & S	19/07/05
404	E4407B	Spectrum Analyser	Agilent	25/01/06
092	BNC	RF coaxial cable (Lab 14)	KTL	12/08/05
295	BNC	RF coaxial cable (Lab 14)	KTL	12/08/05

Appendix D:

Additional Information

The following information is a copy of The KTL Product Information Form, as completed by the client, detailing the frequencies used within the EUT. The lowest declared frequency is 125 MHz, the highest generated frequency is 2481.125 MHz (highest channel of transmitter).

Product information form for EMC testing

The information requested in this form will enable the laboratory to assess your equipment in the most efficient manner in order to produce a quotation. Product names etc. will appear in the report as they are recorded here unless notification in writing is received to the contrary. Please use continuation sheets as necessary. Please do not hesitate to contact KTL if you have any queries regarding this form.

Tel: 01482 801 801

Fax: 01482 801 806

email : ktl@ctl.com

Section 1: General Information.

Company name : Flextronics SA	
Company address : P.O. Box 412 Pinegowrie 2123 South Africa	
Telephone No. : +27214421240	Fax : +27214421264
Contact name : Paul de Villiers/ Maarten den Heijer	Date : 22 June 2006
Email : paul.devilliers@za.flextronics.com	Signed :

Section 2: About the Equipment Submitted for Assessment (Equipment Under Test : EUT)

Name (as will appear on a test report):	Nortel IP Phone IP1150E
Model :	NTYS06
Serial number :	
Manufacturer (if different)	Flextronics
Approximate power requirement (current & voltage) :	48Vdc 0.12A (100-230Vac 0.1A when running off power brick)
Clock frequencies :	166MHz, 125MHz
Dimensions:	250mm x 157mm x 84mm
Weight :	

Appendix E:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement: front view.
2. Radiated electric field emissions arrangement: rear view
3. AC power conducted emissions arrangement.



Photograph 1



Photograph 2



Photograph3

Appendix F:**MPE Calculation**

As the 20cm separation specified under FCC rules may not be achievable under normal operation of the EUT, an RF exposure calculation is needed to show the minimum distance required to be less than 1mW/cm² power density limit, as required under FCC rules.

$$\text{RF Exposure (S)} = \text{EIRP}/4\pi R^2 \text{ mW/cm}^2$$

$$\therefore R^2 = \text{EIRP}/4\pi S$$

$$\therefore R = \sqrt{(\text{EIRP}/4\pi S)}$$

$$\text{For } S = 1 \text{ mW/cm}^2$$

$$\text{and EIRP} = 5.6 \text{ mW maximum (7.5 dBm)}$$

$$R = 0.4 \text{ cm}$$

Note:

The EIRP measurement was performed using the signal substitution method with a substitution antenna, and were not calculated from field strength using the Friis transmission formula.