



EXHIBIT 2A

Test Report-Part 1 Provided by Nortel Networks

Applicant: Nortel Networks

**For Class II Permissive
Change on:**

**FCC: AB6NT800RM-CBTS
IC: 332D-CBS800RM**



Test Report for FCC Equipment Authorization

FCC ID AB6NT800RM-CBTS

Document: TR_AB6NT800RM-CBTS-P1
Stream: 00
Issue: 0.2
Document Status: Approved
Issue Date: Jan 19, 2005
Security Status: Nortel Networks Confidential
Author: Tuan Tran

© 2004 Nortel Networks Limited

Disclaimer

The master of this document is stored on an electronic database and "write protected". The protection can be altered by authorized persons only. Viewing of the master document electronically ensures access to the current issue. Any hardcopies must be regarded as uncontrolled copies.

Security Warning

The information disclosed herein is proprietary to Nortel Networks and not to be used by or disclosed by unauthorized persons without the written consent of Nortel Networks. The recipient of this document shall respect the security status of the information.

PAGE INTENTIONALLY LEFT BLANK

Table of Contents

Publication History	15
List of Consultants	15
Decision Maker	15
Decision Ratifier	15
Revision History	16
Acronyms and Abbreviations	17
1 Introduction.....	19
1.1 Required Tests	19
2 Engineering Declaration.....	20
3 Equipment Authorization Application Requirements	21
3.1 Standard Test Conditions and Test Equipment.....	21
3.2 EUT Identification List.....	21
3.3 Test Equipment List.....	22
4 Transmitter Tests.....	23
4.1 RF Power Output	23
4.1.1 RF Power Output Requirements	23
4.1.1 FCC Part 2.1046 Measurements required: RF power output.....	23
4.1.2 Test Method	23
4.1.3 Test Setup	23
4.1.4 IS-95.....	23
4.1.5 IS-856 DOM	23
4.1.6 Noise Floor	24
4.1.7 RF Output Power Test Results.....	25
4.2 Certification Requirements	27
4.2.1 Application for certification.....	27
4.2.1 FCC Part 2.1033 Application for certification.....	27
4.2.2 Test Method	27
4.2.3 Test Setup	27
4.2.4 Test Results.....	27
4.3 Occupied Bandwidth.....	28
4.3.1 Occupied Bandwidth Requirements	28
4.3.1 FCC Part 2.1049	28
4.3.2 Test Method	28
4.3.3 Test Setup	28
4.3.4 Test Result	29
4.4 Spurious Emissions at Antenna Terminals	31
4.4.1 Spurious Emissions Requirements.....	31
4.4.1 FCC Part 2.1051	31
4.4.1 FCC Part 2.1057 - Frequency Spectrum to be investigated.....	31
4.4.1 FCC Part 22.917 Limit.....	31
4.4.2 Test Method	32

4.4.2.1 Adjacent 1MHz to indicated cellular band (Upper and Lower)	32
4.4.2.2 All other Spurious Emissions up to 10 GHz.....	33
4.4.3 Test Requirements	33
4.4.4 Test Setup	34
4.4.5 Test Results IS-95 and IS-856	35
4.5 Transmitter Tests (CDMA Mode)	47
4.5 Unwanted Emissions.....	47
4.5 IC RSS-129	47
4.5.1 Test Method	47
4.5.1.1 Adjacent 1MHz to indicated cellular band (Upper and Lower)	48
4.5.2 Test Setup	49
4.5.3 Test Results.....	50
4.5.4 Frequency Stability Requirements.....	55
4.5.4 FCC Part 2.1055	55
4.5.5 Test Procedure	56
4.5.6 Frequency Results.....	56
5 Appendix A - Single Carrier IS-95 Spurious Emission	59
6 Appendix B - Two Carriers IS-95 Spurious Emission.....	81
7 Appendix C - Three Carriers IS-95 Spurious Emission.....	103
8 Appendix D - One Carrier IS-856 16QAM Spurious Emission.....	125
9 Appendix E - Three Carriers IS-856 16QAM Spurious Emission	147
10 Appendix F - Two Carriers IS-856 16QAM, One Carrier IS-95 Spurious Emission.....	169
11 Appendix G - Three Carriers IS-856 8PSK Spurious Emission.....	191
12 Appendix H - Three Carriers IS-856 QPSK Spurious Emission.....	213
References.....	235

List of Figures

Figure 1 : Test Setup for RF Power Output Measurement	24
Figure 2 : Test Setup for Occupied Bandwidth Measurement.....	29
Figure 3 : Test Setup for Spurious Emissions Measurement.....	34
Figure 4 : Test Setup for Spurious Emissions Measurement.....	49
Figure 5 : Test configuration for Frequency Stability	56
Figure 6 : 1 Carrier - Occupied Bandwidth Channel 1015	59
Figure 7 : One Carrier - A'' Band Ch 1015 IS95 Adjacent 1 MHz Lower emissions 868-869 MHz 60	
Figure 8 : One Carrier - Ch1015 IS95 Lower A'' Band Adjacent to outside edge 12.5kHz band Channel Power	61
Figure 9 : One Carrier - Ch 308 Upper A Band adjacent 1MHz band emissions.....	62
Figure 10 : One Carrier - Ch 308 Upper A Band adjacent to outside edge 12.5 kHz band Channel power	63
Figure 11 : One Carrier - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 1015 ... 64	
Figure 12 : One Carrier - Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 101565	
Figure 13 : One Carrier - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 1015. 66	
Figure 14 : One Carrier - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 1015 . 67	
Figure 15 : One Carrier - A'' and A Band IS95 Spurious emissions 10kHz-400 MHz	68
Figure 16 : One Carrier - A'' and a Band IS95 Spurious emissions 400 MHz to Lower 1 MHz Band Edge.....	69
Figure 17 : One Carrier - A'' and a Band IS95 Spurious emissions Upper 1 MHz Band Edge to 1 GHz.....	70
Figure 18 : One Carrier - A'' and A Band IS95 Spurious emissions 400-1000 MHz.....	71
Figure 19 : One Carrier - A'' and A Band IS95 Spurious emissions 1000-2000 MHz.....	72
Figure 20 : One Carrier - A'' and A Band IS95 Spurious emissions 2000-3000 MHz.....	73
Figure 21 : One Carrier - A'' and A Band IS95 Spurious emissions 3000-4000 MHz.....	74
Figure 22 : One Carrier - A'' and A Band IS95 Spurious emissions 4000-5000 MHz.....	75
Figure 23 : One Carrier - A'' and A Band IS95 Spurious emissions 5000-6000 MHz.....	76
Figure 24 : One Carrier - A'' and A Band IS95 Spurious emissions 6000-7000 MHz.....	77
Figure 25 : One Carrier - A'' and A Band IS95 Spurious emissions 7000-8000 MHz.....	78

Figure 26 : One Carrier - A'' and A Band IS95 Spurious emissions 8000-9000 MHz.....	79
Figure 27 : One Carrier - A'' and A Band IS95 Spurious emissions 9000-10000 MHz.....	80
Figure 28 : Two Carriers - Occupied Bandwidth Ch 358, 399 Band B.....	81
Figure 29 : Two Carriers - B Band Ch. 358, 399 IS95 Adjacent 1 MHz Lower emissions 879-880 MHz	82
Figure 30 : Two Carriers - Ch358, 399 IS95 Lower BBand Adjacent to outside edge 25kHz band Channel Power	83
Figure 31 : Two Carriers - Ch 601, 642 Upper a Band adjacent 1 MHz band emissions 890-891 MHz	84
Figure 32 : Two Carriers - Ch 601, 642 Upper A Band adjacent to outside edge 25.0 kHz band Channel power	85
Figure 33 : Two Carriers - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 358, 399	86
Figure 34 : Two Carriers - Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 358, 399	87
Figure 35 : Two Carriers - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 358, 399	88
Figure 36 : Two Carriers - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 358, 399	89
Figure 37 : Two Carriers - B Band IS95 Spurious emissions 10kHz-400 MHz	90
Figure 38 : Two Carriers - B Band IS95 Spurious emissions 400 MHz to Lower 1 MHz Band Edge	91
Figure 39 : Two Carriers - B Band IS95 Spurious emissions Upper 1 MHz Band Edge to 1 GHz .	92
Figure 40 : Two Carriers - B Band IS95 Spurious emissions 400-1000 MHz	93
Figure 41 : Two Carriers - B Band IS95 Spurious emissions 1000-2000 MHz	94
Figure 42 : Two Carriers - B Band IS95 Spurious emissions 2000-3000 MHz	95
Figure 43 : Two Carriers - B Band IS95 Spurious emissions 3000-4000 MHz	96
Figure 44 : Two Carriers - B Band IS95 Spurious emissions 4000-5000 MHz	97
Figure 45 : Two Carriers - B Band IS95 Spurious emissions 5000-6000 MHz	98
Figure 46 : Two Carriers - B Band IS95 Spurious emissions 6000-7000 MHz	99
Figure 47 : Two Carriers - B Band IS95 Spurious emissions 7000-8000 MHz	100
Figure 48 : Two Carriers - B Band IS95 Spurious emissions 8000-9000 MHz	101
Figure 49 : Two Carriers - B Band IS95 Spurious emissions 9000-10000 MHz	102
Figure 50 : Three Carriers - Occupied Bandwidth Ch 1015, 33, 74 A''	103

Figure 51 : Three Carriers - A'' Band Ch 1015, 33, 74 IS95 Adjacent 1MHz Lower emissions 868-869MHz 104

Figure 52 : Three Carriers - Ch 1015, 33, 74 IS95 Lower A'' Band Adjacent to outside edge 37.5kHz band Channel Power 105

Figure 53 : Three Carriers - Ch 226, 267, 308 Upper a Band adjacent 1 MHz band emissions 880-881 MHz 106

Figure 54 : Three Carriers - Ch 226, 267, 308 Upper A Band adjacent to outside edge 37.5 kHz band Channel power 107

Figure 55 : Three Carriers - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 1015, 33, 74 108

Figure 56 : Three Carriers - Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 1015, 33, 74 109

Figure 57 : Three Carriers - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 1015, 33, 74 110

Figure 58 : Three Carriers - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 1015, 33, 74 111

Figure 59 : Three Carriers - A'' and A Band IS95 Spurious emissions 10kHz-400 MHz 112

Figure 60 : Three Carriers - A'' and A Band IS95 Spurious emissions 400 MHz to Lower 1 MHz Band Edge 113

Figure 61 : Three Carriers - A'' and a Band IS95 Spurious emissions Upper 1 MHz Band Edge to 1 GHz 114

Figure 62 : Three Carriers - A'' and A Band IS95 Spurious emissions 400-1000 MHz 115

Figure 63 : Three Carriers - A'' and A Band IS95 Spurious emissions 1000-2000 MHz 116

Figure 64 : Three Carriers - A'' and A Band IS95 Spurious emissions 2000-3000 MHz 117

Figure 65 : Three Carriers - A'' and A Band IS95 Spurious emissions 3000-4000 MHz 118

Figure 66 : Three Carriers - A'' and A Band IS95 Spurious emissions 4000-5000 MHz 119

Figure 67 : Three Carriers - A'' and A Band IS95 Spurious emissions 5000-6000 MHz 120

Figure 68 : Three Carriers - A'' and A Band IS95 Spurious emissions 6000-7000 MHz 121

Figure 69 : Three Carriers - A'' and A Band IS95 Spurious emissions 7000-8000 MHz 122

Figure 70 : Three Carriers - A'' and A Band IS95 Spurious emissions 8000-9000 MHz 123

Figure 71 : Three Carriers - A'' and A Band IS95 Spurious emissions 9000-10000 MHz 124

Figure 72 : 1 DOM IS856 16QAM - Occupied Bandwidth Channel 358 125

Figure 73 : One Carrier - B Band 16QAM Ch 358 IS856 Adjacent 1 MHz Lower emissions 868-869 MHz 126

Figure 74 : One Carrier - Ch 358 IS856 16QAM Lower B Band Adjacent to outside edge 12.5kHz band Channel Power 127

Figure 75 : One Carrier - IS856 16QAM Ch 642 Upper B Band adjacent 1MHz band emissions. 128	
Figure 76 : One Carrier - IS856 16QAM Ch 642 Upper B Band adjacent to outside edge 12.5 kHz band Channel power	129
Figure 77 : One Carrier - B Band IS856 16QAM Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 358	130
Figure 78 : One Carrier -B Band IS856 16QAM Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 358	131
Figure 79 : One Carrier - B Band IS856 16QAM Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 358	132
Figure 80 : One Carrier - B Band IS856 16QAM Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 358	133
Figure 81 : One Carrier - B Band IS856 16QAM Spurious emissions 10kHz-400 MHz	134
Figure 82 : One Carrier - B Band IS856 16QAM Spurious emissions 400 MHz to Lower 1 MHz Band Edge.....	135
Figure 83 : One Carrier - B Band IS856 16QAM Spurious emissions Upper 1 MHz Band Edge to 1 GHz.....	136
Figure 84 : One Carrier - B Band IS856 16QAM Spurious emissions 400-1000 MHz	137
Figure 85 : One Carrier - B Band IS856 16QAM Spurious emissions 1000-2000 MHz	138
Figure 86 : One Carrier - B Band IS856 16QAM Spurious emissions 2000-3000 MHz	139
Figure 87 : One Carrier - B Band IS856 16QAM Spurious emissions 3000-4000 MHz	140
Figure 88 : One Carrier - B Band IS856 16QAM Spurious emissions 4000-5000 MHz	141
Figure 89 : One Carrier - B Band IS856 16QAM Spurious emissions 5000-6000 MHz	142
Figure 90 : One Carrier - B Band IS856 16QAM Spurious emissions 6000-7000 MHz	143
Figure 91 : One Carrier - B Band IS856 16QAM Spurious emissions 7000-8000 MHz	144
Figure 92 : One Carrier - B Band IS856 16QAM Spurious emissions 8000-9000 MHz	145
Figure 93 : One Carrier - B Band IS856 16QAM Spurious emissions 9000-10000 MHz	146
Figure 94 : Three Carriers IS856 16QAM - Occupied Bandwidth Ch 358, 399, 440 Band B...147	
Figure 95 : Three Carriers IS856 16QAM - B Band Ch 358, 399, 440 IS856 Adjacent 1MHz Lower emissions 879-880MHz	148
Figure 96 : Three Carriers IS856 16QAM - Ch 358, 399, 440 IS856 Lower B Band Adjacent to outside edge 37.5kHz band Channel Power	149
Figure 97 : Three Carriers IS856 16QAM - Ch 560, 601, 642 Upper B Band adjacent 1 MHz band emissions 890-891 MHz	150
Figure 98 : Three Carriers IS856 16QAM - Ch 560, 601, 642 Upper B Band adjacent to outside edge 37.5 kHz band Channel power	151

Figure 99 : Three Carriers IS856 16QAM - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 358, 399, 440..... 152

Figure 100 : Three Carriers IS856 16QAM - Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 358, 399, 440..... 153

Figure 101 : Three Carriers IS856 16QAM - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 358, 399, 440..... 154

Figure 102 : Three Carriers IS856 16QAM - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 358, 399, 440..... 155

Figure 103 : Three Carriers IS856 16QAM - B Band Spurious emissions 10kHz-400 MHz 156

Figure 104 : Three Carriers IS856 16QAM - B Band Spurious emissions 400 MHz to Lower 1 MHz Band Edge..... 157

Figure 105 : Three Carriers IS856 16QAM - B Band Spurious emissions Upper 1 MHz Band Edge to 1 GHz..... 158

Figure 106 : Three Carriers IS856 16QAM - B Band Spurious emissions 400-1000 MHz..... 159

Figure 107 : Three Carriers IS856 16QAM - B Band Spurious emissions 1000-2000 MHz..... 160

Figure 108 : Three Carriers IS856 16QAM - B Band Spurious emissions 2000-3000 MHz..... 161

Figure 109 : Three Carriers IS856 16QAM - B Band Spurious emissions 3000-4000 MHz..... 162

Figure 110 : Three Carriers IS856 16QAM - B Band Spurious emissions 4000-5000 MHz..... 163

Figure 111 : Three Carriers IS856 16QAM - B Band Spurious emissions 5000-6000 MHz..... 164

Figure 112 : Three Carriers IS856 16QAM - B Band Spurious emissions 6000-7000 MHz..... 165

Figure 113 : Three Carriers IS856 16QAM - B Band Spurious emissions 7000-8000 MHz..... 166

Figure 114 : Three Carriers IS856 16QAM - B Band Spurious emissions 8000-9000 MHz..... 167

Figure 115 : Three Carriers IS856 16QAM - B Band Spurious emissions 9000-10000 MHz... 168

Figure 116 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - Occupied Bandwidth Ch 358, 399, 440 Band B 169

Figure 117 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Ch 358, 399, 440 IS856 Adjacent 1MHz Lower emissions 879-880MHz 170

Figure 118 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - Ch 358, 399, 440 IS856 Lower B Band Adjacent to outside edge 37.5kHz band Channel Power 171

Figure 119 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - Ch 560, 601, 642 Upper B Band adjacent 1 MHz band emissions 890-891 MHz 172

Figure 120 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - Ch 560, 601, 642 Upper B Band adjacent to outside edge 37.5 kHz band Channel power..... 173

Figure 121 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 358, 399, 440..... 174

Figure 122 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - Industry Canada Upper 750

kHz offset 30 kHz Chan Power Ch 358, 399, 440.....	175
Figure 123 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 358, 399, 440.....	176
Figure 124 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 358, 399, 440	177
Figure 125 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 10kHz-400 MHz	178
Figure 126 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 400 MHz to Lower 1 MHz Band Edge.....	179
Figure 127 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions Upper 1 MHz Band Edge to 1 GHz.....	180
Figure 128 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 400-1000 MHz	181
Figure 129 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 1000-2000 MHz.....	182
Figure 130 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 2000-3000 MHz.....	183
Figure 131 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 3000-4000 MHz.....	184
Figure 132 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 4000-5000 MHz.....	185
Figure 133 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 5000-6000 MHz.....	186
Figure 134 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 6000-7000 MHz.....	187
Figure 135 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 7000-8000 MHz.....	188
Figure 136 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 8000-9000 MHz.....	189
Figure 137 : Combination Three Carriers 2-IS856 16QAM, 1-IS95 - B Band Spurious emissions 9000-10000 MHz.....	190
Figure 138 : Three Carriers IS856 8PSK - Occupied Bandwidth Ch 358, 399, 440 Band B.....	191
Figure 139 : Three Carriers IS856 8PSK - B Band Ch 358, 399, 440 IS856 Adjacent 1MHz Lower emissions 879-880MHz	192
Figure 140 : Three Carriers IS856 8PSK - Ch 358, 399, 440 IS856 Lower B Band Adjacent to outside edge 37.5kHz band Channel Power	193
Figure 141 : Three Carriers IS856 8PSK - Ch 560, 601, 642 Upper B Band adjacent 1 MHz band emissions 890-891 MHz	194

Figure 142 : Three Carriers IS856 8PSK - Ch 560, 601, 642 Upper B Band adjacent to outside edge 37.5 kHz band Channel power..... 195

Figure 143 : Three Carriers IS856 8PSK - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 358, 399, 440..... 196

Figure 144 : Three Carriers IS856 8PSK - Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 358, 399, 440..... 197

Figure 145 : Three Carriers IS856 8PSK - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 358, 399, 440..... 198

Figure 146 : Three Carriers IS856 8PSK - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 358, 399, 440..... 199

Figure 147 : Three Carriers IS856 8PSK - B Band Spurious emissions 10kHz-400 MHz 200

Figure 148 : Three Carriers IS856 8PSK - B Band Spurious emissions 400 MHz to Lower 1 MHz Band Edge..... 201

Figure 149 : Three Carriers IS856 8PSK - B Band Spurious emissions Upper 1 MHz Band Edge to 1 GHz..... 202

Figure 150 : Three Carriers IS856 8PSK - B Band Spurious emissions 400-1000 MHz..... 203

Figure 151 : Three Carriers IS856 8PSK - B Band Spurious emissions 1000-2000 MHz..... 204

Figure 152 : Three Carriers IS856 8PSK - B Band Spurious emissions 2000-3000 MHz..... 205

Figure 153 : Three Carriers IS856 8PSK - B Band Spurious emissions 3000-4000 MHz..... 206

Figure 154 : Three Carriers IS856 8PSK - B Band Spurious emissions 4000-5000 MHz..... 207

Figure 155 : Three Carriers IIS856 8PSK - B Band Spurious emissions 5000-6000 MHz 208

Figure 156 : Three Carriers IS856 8PSK - B Band Spurious emissions 6000-7000 MHz..... 209

Figure 157 : Three Carriers IS856 8PSK - B Band Spurious emissions 7000-8000 MHz..... 210

Figure 158 : Three Carriers IS856 8PSK - B Band Spurious emissions 8000-9000 MHz..... 211

Figure 159 : Three Carriers IS856 8PSK - B Band Spurious emissions 9000-10000 MHz..... 212

Figure 160 : Three Carriers IS856 QPSK - Occupied Bandwidth Ch 358, 399, 440 Band B 213

Figure 161 : Three Carriers IS856 QPSK - B Band Ch 358, 399, 440 IS856 Adjacent 1MHz Lower emissions 879-880MHz 214

Figure 162 : Three Carriers IS856 QPSK - Ch 358, 399, 440 IS856 Lower B Band Adjacent to outside edge 37.5kHz band Channel Power 215

Figure 163 : Three Carriers IS856 QPSK - Ch 560, 601, 642 Upper B Band adjacent 1 MHz band emissions 890-891 MHz 216

Figure 164 : Three Carriers IS856 QPSK - Ch 560, 601, 642 Upper B Band adjacent to outside edge 37.5 kHz band Channel power 217

Figure 165 : Three Carriers IS856 QPSK - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 358, 399, 440..... 218

Figure 166 : Three Carriers IS856 QPSK - Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 358, 399, 440.....	219
Figure 167 : Three Carriers IS856 QPSK - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 358, 399, 440.....	220
Figure 168 : Three Carriers IS856 QPSK - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 358, 399, 440.....	221
Figure 169 : Three Carriers IS856 QPSK - B Band Spurious emissions 10kHz-400 MHz	222
Figure 170 : Three Carriers IS856 QPSK - B Band Spurious emissions 400 MHz to Lower 1 MHz Band Edge.....	223
Figure 171 : Three Carriers IS856 QPSK - B Band Spurious emissions Upper 1 MHz Band Edge to 1 GHz.....	224
Figure 172 : Three Carriers IS856 QPSK - B Band Spurious emissions 400-1000 MHz	225
Figure 173 : Three Carriers IS856 QPSK - B Band Spurious emissions 1000-2000 MHz	226
Figure 174 : Three Carriers IS856 QPSK - B Band Spurious emissions 2000-3000 MHz	227
Figure 175 : Three Carriers IS856 QPSK - B Band Spurious emissions 3000-4000 MHz	228
Figure 176 : Three Carriers IS856 QPSK - B Band Spurious emissions 4000-5000 MHz	229
Figure 177 : Three Carriers IS856 QPSK - B Band Spurious emissions 5000-6000 MHz	230
Figure 178 : Three Carriers IS856 QPSK - B Band Spurious emissions 6000-7000 MHz	231
Figure 179 : Three Carriers IS856 QPSK - B Band Spurious emissions 7000-8000 MHz	232
Figure 180 : Three Carriers IS856 QPSK - B Band Spurious emissions 8000-9000 MHz	233
Figure 181 : Three Carriers IS856 QPSK - B Band Spurious emissions 9000-10000 MHz	234

List of Tables

Table 1 : Required Tests	19
Table 2 : EUT Identification List.....	21
Table 3 : Test Equipment List.....	22
Table 4 : Spectrum Analyzer Noise Floor	24
Table 5 : RF Output Power Optimized 800MHz Radio Module 1-Carrier IS95.....	25
Table 6 : RF Output Power Optimized 800MHz Radio Module 2-Carrier IS95.....	25
Table 7 : RF Output Power of Optimized 800MHz Radio Module 3-Carrier IS95	25
Table 9 : Average Current Values Pout = 48 dBm @ the output of PA.....	27
Table 10 : Measured Occupied Bandwidth 800MHz Optimized Radio Module 1-Carrier IS95 .	29
Table 11 : Measured Occupied Bandwidth 800MHz Optimized Radio Module 2-Carrier IS95 .	30
Table 12 : Measured Occupied Bandwidth of 800MHz Optimized Radio Module 3-Carrier IS95 .	30
Table 15 : All other Emission Spectrum Analyze Settings	33
Table 16 : Spurious Emissions Requirements for 1MHz adjacent frequency band	33
Table 17 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95	35
Table 18 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Three Carrier band A and A'' IS-95.....	36
Table 19 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port One Carrier band B IS-95	37
Table 20 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Two Carrier band B IS-95	38
Table 21 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Three Carrier band B IS-95	39
Table 22 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port One Carrier band A' IS-95.....	40
Table 23 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port One Carrier band B' IS95	41
Table 30 : Industry Canada Suppression inside cellular band 800MHz Optimized Radio Module Antenna Port IS95, 1 Carrier band A''	50
Table 31 : Industry Canada Suppression inside cellular band 800MHz Optimized Radio Module Antenna Port IS95, 3 Carrier band A'' and A	51
Table 35 : Test results for Frequency Stability versus Power supply Voltage	57

Table 36 : Test results for Frequency Stability versus Temperature at -48V operation57
Table 37 : Test results for Frequency Stability versus Temperature at 24V operation58

Publication History

The latest controlled release of this document is located in Livelink at the following location:

<http://livelink-ott.ca.nortel.com/livelink/livelink.exe?func=ll&objId=10430989&objAction=browse&sort=name>

All other soft and hard copies are uncontrolled. It is the responsibility of the reader to ensure that the latest release of this document is being used.

List of Consultants

The following people have reviewed this document prior to its release and have recommended its approval:

Printed Name	Function	Department
Tuan Tran	RF Systems Development	2M67
Thomas Wong	CDMA/TDMA Regulatory Prime	2U40
Darryl Therens	RF Systems Development	2M67
Tam Dang	PDC Systems Design	2U41
Vladimir Mandrusov	Radio Algorithm & DSP Development	2M69

Decision Maker

Decision Maker's Name	Signature	Date
Thomas Wong	Thomas Wong	January 19, 2005

Decision Ratifier

The release of this document has been reviewed and approved for distribution and use by the following:

Ratifier's Name	Signature	Date
Richard Kerslake	Richard Kerslake	January 19, 2005

Revision History

Stream/Issue	Revision Date	Reason for Change	Author
00/0.1	Jan / 15 / 2005	Draft release of Test Report	Tuan Tran
00/0.2	Jan / 19 / 2005	Approved Test Report	Tuan Tran

Change bars will not be used in this document.

Acronyms and Abbreviations

BPF	Bandpass Filter
BTS	Base Station Transceiver Subsystem
BW	Bandwidth
cBTS	Compact Base Station Transceiver Subsystem
CDMA	Code Division Multiple Access
CEM	Channel Enhancement Module
CM	Control Module
CR	Cost Reduced
DE	Digital Encloser
DOM	Data Only Module
DPM	Duplexer Preselector Module
GPSTM	Global Position System Timing Module
LO	Local Oscillator
MFRM	Multi-Carrier Flexible Radio Module
PA	Power Amplifier
PSK	Phase Shift Keying
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RBW	Resolution BandWidth
RM	Radio Module
RMS	Root Mean Square
RF	Radio Frequency
SA	Spectrum Analyzer
TBD	To Be Determined
VSA	Vector Signal Analyzer

1 Introduction

This test report supports FCC filing for the Optimized 800MHz Radio Module. This test report will be used as a filing for FCC part 22. This filing includes single, two and three carrier modes for the 800MHz cellular band. The following test results include; RF Power Output, Occupied Bandwidth, Spurious Emissions at Antenna Terminals, and Transmitter Test (CDMA Mode Transmitter). Frequency over voltage and temperature test results are included. Emissions testing was conducted at -48VDC at room temperature. The IS95 and IS856 modulation schemes will be included in this report.

This test report is submitted in accordance with the FCC Rules and Regulations, Part 2, Subpart J, Sections 2.1046 through 2.1057 for equipment authorization of Nortel Networks' Optimized 800MHz Radio Module.

The Optimized 800MHz Radio Module is intended for use in the Domestic Public Cellular Radio Telecommunications Service and is designed in accordance with the following standards:

- *CFR 47, Part 22, Subpart H, Cellular Radiotelephone Service [1]*
- *CFR 47, Part 2, Subpart J, Equipment Authorization Procedures - Equipment Authorization[2]*
- *IC RSS-129, Issue 2, 800 MHz Dual-Mode CDMA Cellular Telephones [3]*
- *TIA/EIA-97-D, Recommended Minimum Performance Standards for Base Stations Supporting Dual Mode Spread Spectrum Systems [4]*

1.1 Required Tests

Table 1 summarizes the required tests for the Optimized 800MHz Radio Module.

Table 1 : Required Tests

FCC Measurement Specification	FCC Limit Specification	Description	Test to be Performed ?
2.1046	22.913	RF Power Output	Yes
2.1049	22.917	Occupied Bandwidth	Yes
2.1051, 2.1057	22.917	Spurious Emissions at Antenna Terminals	Yes
2.1053, 2.1057	22.917	Field Strength of Spurious Emissions	Yes ^a
2.1055		Frequency Stability	Yes


a. Field strength of spurious emissions testing will be performed by Sanmina-SCI Canada, Calgary.

2 Engineering Declaration


The Optimized 800MHz Radio Module has been tested in accordance with the requirements contained in the Federal Communications Commission Rules and Regulations Part 2 and 22.

To the best of my knowledge, these tests were performed in accordance with good engineering practices using measurement procedures consistent with industry or commission standards or previous Commission correspondence or guidance and demonstrate that this equipment complies with the appropriate standards. All tests were conducted on a representative sample of the equipment for which equipment authorization is sought.


Tested by:
Tuan Tran
RF Systems Test Prime
Nortel Networks
Calgary Canada


Signature _____ Date January 19 / 2005

Reviewed by:
Thomas Wong
CDMA/TDMA Regulatory
Emissions Prime
Nortel Networks
Calgary Canada

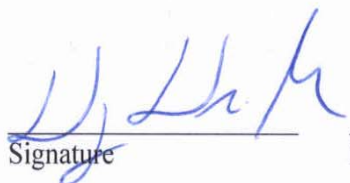
Signature _____ Date Jan 19, 2005

Approved by:
Rick Kerslake
RF Systems Development
Manager
Nortel Networks
Calgary Canada

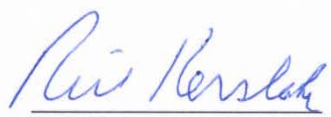
Signature _____ Date Jan 19, 2005

3 Equipment Authorization Application Requirements

3.1 Standard Test Conditions and Test Equipment

The Optimized 800MHz Radio Module will be tested under the following standard test conditions unless otherwise noted:

- Ambient Temperature: 20 to 35 degrees C
- Ambient Humidity: 20 to 40%
- DC Supply Voltage: -48 Vdc and +24 Vdc (nominal)
- Input modulation IS-95, IS-856

3.2 EUT Identification List

Table 2 shows the identification of the components required for testing.

Table 2 : EUT Identification List

Equipment Description	Model / Part Number	Release Number	Serial Number
Optimized 800MHz Radio Module	NTRZ71AA	P5	NNTM536G2WUK
800 DPM	NTRZ79AA	P4	ALLG74000G06

3.3 Test Equipment List

Table 3 shows the identification of the test equipment required.

Table 3 : Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Due Date
9kHz to 40 GHz Spectrum Analyzer	Rohde&Schwarz	FSEK-30	DE22481	19 May 2005
RF Power Meter	Agilent	E4419B	US38260706	6 Jan 2006
RF Power Sensor Head	Agilent	E9300A	MY41496938	10 Jan 2006
30dB Attenuator (>100W)	Weinschel	40-30-43	KL694	n/a
RF Cable 1 24"	Nortel	A0734233	n/a	n/a
RF Cable 2 8m Heliax	Nortel	A0803065	n/a	n/a

4 Transmitter Tests

4.1 RF Power Output

4.1.1 RF Power Output Requirements

FCC Part 2.1046 Measurements required: RF power output

§(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

4.1.2 Test Method

Setup the DE via the BTS controller to enable the Optimized 800MHz Radio Module to transmit at the rated power for each of the carrier configurations one, two and three carrier in the Base-band modulation formats IS-95 and IS-856. Measurements will be made on channels at the bottom and top of the operator bands with the 800MHz Optimized Radio Module operating with -48Vdc. The RF output power will be measured using the power meter.

4.1.3 Test Setup

The set-up required for the Optimized 800MHz Radio Module RF output power test is illustrated in Figure 1. RF output power measurements will be referenced to the antenna port of the DPM

4.1.4 IS-95

The conducted spurious emissions of the Optimized 800MHz Radio Module, with IS-95 waveforms were tested at maximum power. Transmitters operating with IS95 are tested at +47.3 dBm.

4.1.5 IS-856 DOM

The conducted spurious emissions of the Optimized 800MHz Radio Module, with IS-856 waveforms were tested at maximum power. Transmitters operating with IS-856 are tested at +47.3 dBm.

4.1.6 Noise Floor

Table 4 lists the noise floor of the measurement system with no signal present.

Table 4 : Spectrum Analyzer Noise Floor

Start (MHz)	Stop (MHz)	Peak (dBm)	RBW kHz
0.01	400	-42.19	100
400	1000	-39.73	100
1000	2000	-37.82	100
2000	3000	-37.04	100
3000	4000	-36.06	100
4000	5000	-36.13	100
5000	6000	-33.52	100
6000	7000	-29.81	100
7000	8000	-31.88	100
8000	9000	-32.18	100
9000	10000	-32.77	100

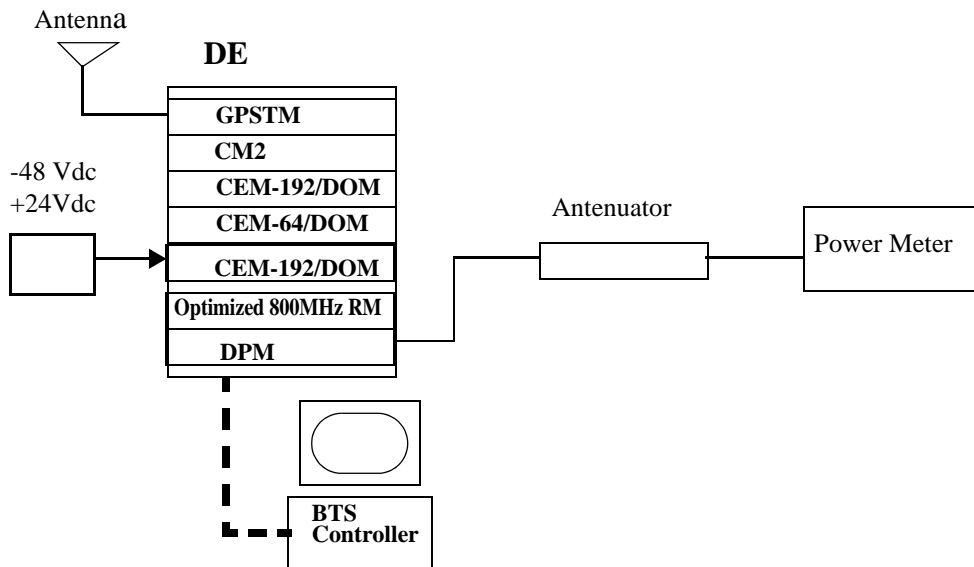


Figure 1 : Test Setup for RF Power Output Measurement

4.1.7 RF Output Power Test Results

Table 5 : RF Output Power Optimized 800MHz Radio Module 1-Carrier IS95

Channel Number (Band)	Frequency (MHz)	Measured RF Output Power (dBm)	Typical Maximum Rated Power (dBm)
1015 (A'')	869.76	47.17	47.3
308 (A)	879.24	47.28	47.3
358 (B)	880.74	47.35	47.3
642 (B)	889.26	47.20	47.3
692 (A')	890.76	47.26	47.3
742 (B')	892.26	47.14	47.3
775 (B')	893.25	47.19	47.3

Table 6 : RF Output Power Optimized 800MHz Radio Module 2-Carrier IS95

Channel Number (Band)	Frequency (MHz)	Measured RF Output Power (dBm)	Typical Maximum Rated Power (dBm)
358, 399 (B)	880.74, 881.97	47.32	47.3
601, 642 (B)	888.03, 889.26	47.17	47.3

Table 7 : RF Output Power of Optimized 800MHz Radio Module 3-Carrier IS95

Channel Number (Band)	Frequencies (MHz)	Measured RF Output Power (dBm)	Typical Maximum Rated Power (dBm)
1015, 33, 74 (A'', A)	869.76, 870.99, 872.22	47.29	47.3
226, 267, 308 (A)	876.78, 878.01, 879.24	47.29	47.3
358, 399, 440 (B)	880.74, 881.97, 883.20	47.29	47.3
560, 601, 642 (B)	886.8, 888.03, 889.26	47.22	47.3

Table 8: RF Output Power of 800MHz Optimized Radio Module IS-856 Modulation

Carriers	Channel Number	Frequency(MHz)	Measured O/P (dBm)	Typical Maximum Rated Power (dBm)
1-IS856-16QAM	358	880.74	47.14	47.3
1-IS856-16QAM	642	889.26	47.14	47.3
3-IS856-16QAM	358, 399, 440	880.74, 881.97, 883.2	47.15	47.3
3-IS856-16QAM	560, 601, 642	886.8, 888.03, 889.26	47.15	47.3
2-IS856-16QAM, 1-IS95	358, 399, 440	880.74, 881.97, 883.2	47.12	47.3
2-IS856-16QAM, 1-IS95	560, 601, 642	886.8, 888.03, 889.26	47.16	47.3
3-IS856-8PSK	358, 399, 440	880.74, 881.97, 883.2	47.27	47.3
3-IS856-8PKS	560, 601, 642	886.8, 888.03, 889.26	47.2	47.3
3-IS856-QPSK	358, 399, 440	880.74, 881.97, 883.2	47.26	47.3
3-IS856-QPSK	560, 601, 642	886.8, 888.03, 889.26	47.19	47.3

4.2 Certification Requirements

4.2.1 Application for certification

FCC Part 2.1033 Application for certification.

(c) Applications for equipment other than that operating under parts 15 and 18 of the rules shall be accompanied by a technical report containing the following information:

(8) The dc voltages applied to and dc currents into the several elements of the final radio frequency amplifying device for normal operation over the power range.

4.2.2 Test Method

This information required for this section is available from [6]:

Title: Compact Metrocell Radio Module Beta Test Plan
Dataset Name: TPRZ71AA
Document Status: Approved
Stream: 00 Issue: 03.1
Issue Date: January 7, 2004
Author: Ken Minderhoud

4.2.3 Test Setup

See above document

4.2.4 Test Results

The final amplifying dc voltage is 27.0 Vdc. The final dc current is

Table 9 : Average Current Values Pout = 48 dBm @ the output of PA

Average Current Values @ Pout = 48 dBm				
25°C				
	Q4	Q5	Q6	Q7
Mean	2.81	2.5	2.67	2.78

4.3 Occupied Bandwidth

4.3.1 Occupied Bandwidth Requirements

FCC Part 2.1049

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(g) Transmitter in which the modulating baseband comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

4.3.2 Test Method

Setup the DE via the BTS controller to enable the 800MHz Optimized Radio Module to transmit at maximum rated power for each of the carrier configurations one, two and three carrier in the Baseband modulation formats IS-95 and IS-856. Measurements will be made on channels at the bottom and top of each of the operator bands. The Occupied bandwidth is measured using the 99% Channel Power feature of the SA.

4.3.3 Test Setup

The set-up required for the 800MHz Optimized Radio Module Occupied bandwidth test is illustrated in Figure 2.

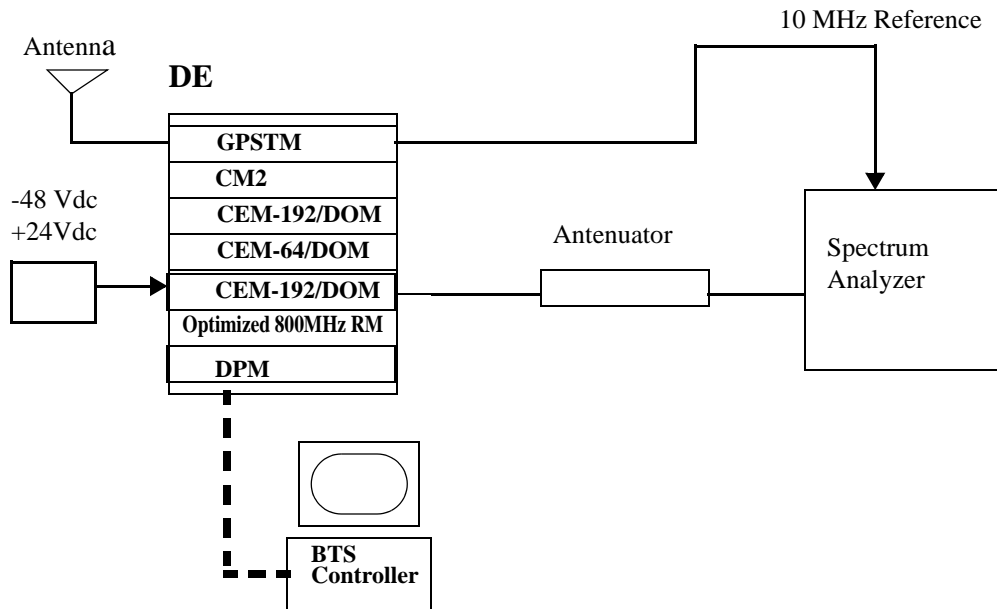


Figure 2 : Test Setup for Occupied Bandwidth Measurement

4.3.4 Test Result

Table 10 : Measured Occupied Bandwidth 800MHz Optimized Radio Module 1-Carrier IS95

Channel Number (Band)	Frequency (MHz)	Measured Occupied Bandwidth (MHz) (1-Carrier)
1015 (A'')	869.76	1.267
308 (A)	879.24	1.267
358 (B)	880.74	1.267
642 (B)	889.26	1.267
692 (A')	890.76	1.263
742 (B')	892.26	1.263
775 (B')	893.25	1.267

Table 11 : Measured Occupied Bandwidth 800MHz Optimized Radio Module 2-Carrier IS95

Channel Number (Band)	Frequency (MHz)	Measured Occupied Bandwidth (MHz)
358, 399 (B)	880.74, 881.97	2.461
601, 642 (B)	888.03, 889.26	2.469

Table 12 : Measured Occupied Bandwidth of 800MHz Optimized Radio Module 3-Carrier IS95

Channel Number (Band)	Frequencies (MHz)	Measured Occupied Bandwidth (MHz)
1015, 33, 74 (A", A)	869.76, 870.99, 872.22	3.671
226, 267, 308 (A)	876.78, 878.01, 879.24	3.687
358, 399, 440 (B)	880.74, 881.97, 883.20	3.671
560, 601, 642 (B)	886.8, 888.03, 889.26	3.671

Table 13: Measured Occupied Bandwidth of 800MHz Optimized Radio Module IS856 Modulation

Carrier	Channel Number	Frequencies (MHz)	Measured Occupied Bandwidth (MHz)
1-IS856-16QAM	358	880.74	1.267
1-IS856-16QAM	642	889.26	1.263
3-IS856-16QAM	358, 399, 440	880.74, 881.97, 883.2	3.671
3-IS856-16QAM	560, 601, 642	886.8, 888.03, 889.26	3.687
2-IS856-16QAM, 1-IS95	358, 399, 440	880.74, 881.97, 883.2	3.671
2-IS856-16QAM, 1-IS95	560, 601, 642	886.8, 888.03, 889.26	3.671
3-IS856-8PSK	358, 399, 440	880.74, 881.97, 883.2	3.671
3-IS856-8PKS	560, 601, 642	886.8, 888.03, 889.26	3.671
3-IS856-QPSK	358, 399, 440	880.74, 881.97, 883.2	3.671
3-IS856-QPSK	560, 601, 642	886.8, 888.03, 889.26	3.671

4.4 Spurious Emissions at Antenna Terminals

4.4.1 Spurious Emissions Requirements

FCC Part 2.1051

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

FCC Part 2.1057 - Frequency Spectrum to be investigated

The spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC Part 22.917 Limit

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section

4.4.2 Test Method

Configure the BTS via the BTS controller to enable the 800MHz Optimized Radio Module to transmit at maximum rated power for each of the carrier configurations one, two and three carrier in the Baseband modulation formats IS-95. Measurements will be made on channels at the bottom and top of the operator bands. The following spectrum analyzer settings are to be used for the measurement of the antenna port (DPM) spurious emissions:

4.4.2.1 Adjacent 1MHz to indicated cellular band (Upper and Lower)

Table 14: Adjacent 1MHz Spectrum Analyze Settings

Setting	1 Carrier	2 Carrier	3 Carrier
Resolution Bandwidth ^a :	12.5 kHz	25 kHz	37.5 kHz
Video Bandwidth (3x RBW) ^b	(3x RBW)	(3x RBW)	(3x RBW)
Video Average	10 Averages	10 Averages	10 Averages
Span	Set accordingly	Set accordingly	Set accordingly
Detector	RMS	RMS	RMS
Attenuation ^c	30 dB	30 dB	30 dB
Ref. Level	35 dBm	35 dBm	35 dBm
Ref. Level Offset	31-34.5 dB	31-34.5 dB	31-34.5 dB

- a. If the spectrum analyze cannot be set to the specified RBW the next highest RBW should be used and all measurements corrected to the specified RBW
- b. If the spectrum analyze cannot be set to the specified Video Bandwidth the next highest Video Bandwidth should be used.
- c. The lowest value of attenuator should be used to improve measurement accuracy, without overdriving the Spectrum Analyzer.

All spectrum analyzer settings were coupled as per the manufacturers recommendations to improve measurement time, without compromising data.

4.4.2.2 All other Spurious Emissions up to 10 GHz

Table 15 : All other Emission Spectrum Analyze Settings

Setting	1 Carrier	2 Carrier	3 Carrier
Resolution Bandwidth	100 kHz	100 kHz	100 kHz
Video Bandwidth (3x RBW)	300 kHz	300 kHz	300 kHz
Video Average	10 Averages	10 Averages	10 Averages
Span	Set accordingly	Set accordingly	Set accordingly
Detector	RMS	RMS	RMS
Attenuation ^a	30 dB	30 dB	30 dB
Ref. Level	35 dBm	35 dBm	35 dBm
Ref. Level Offset	31-34.5 dB	31-34.5 dB	31-34.5 dB

a. The lowest value of attenuator should be used to improve measurement accuracy, without overdriving the Spectrum Analyzer.

The emissions will be investigated up to 10 GHz (the 10th harmonic of the fundamental emission) for all carrier configurations (1, 2, 3) as per FCC Part 22.

4.4.3 Test Requirements

Table 16 : Spurious Emissions Requirements for 1MHz adjacent frequency band

Frequency Offset	1 Carrier	2 Carrier	3 Carrier
+/- 740 kHz	< -13 dBm/12.5KHz	< -13 dBm/25 KHz	< -13 dBm/37.5 KHz

4.4.4 Test Setup

The set-up required for the 800MHz Optimized Radio Module Antenna Port (DPM) Spurious Emission test is illustrated in Figure 3.

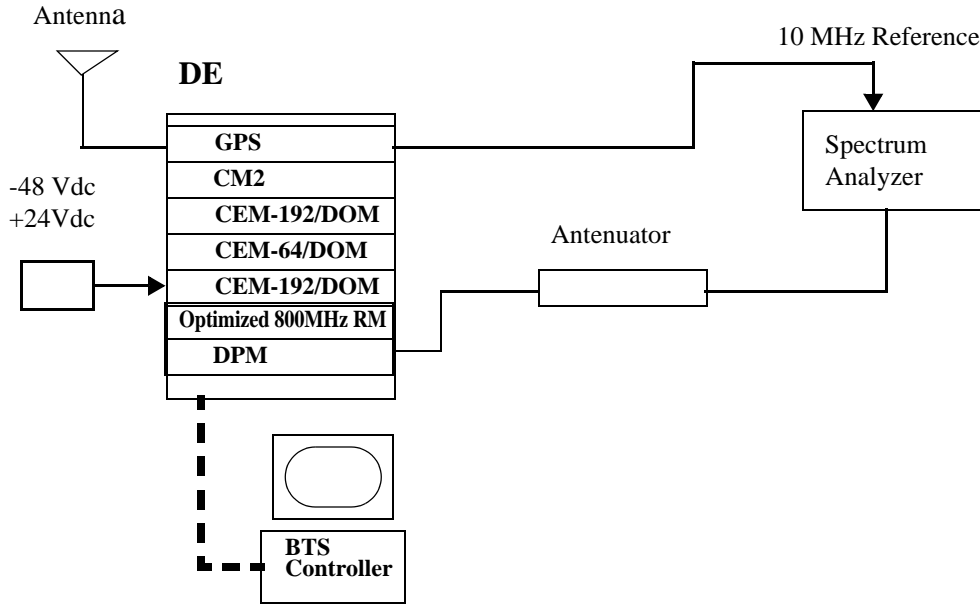


Figure 3 : Test Setup for Spurious Emissions Measurement

4.4.5 Test Results IS-95 and IS-856 *

**Table 17 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port one
 Carrier band A and A'' IS95^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	1Carrier IS-95	1Carrier
869 MHz (Lower edge of band A'') Ch 1015 (RBW=12.5 kHz)	-27.82	14.82
880 MHz (Upper edge of band A) Ch 308 (RBW=12.5 kHz)	-28.11	15.11
0-1000 (RBW=100KHz)	-31.39	18.99
1000-2000 (RBW=100KHz)	31.71	18.71
2000-3000 (RBW=100KHz)	-25.57	12.57
3000-4000 (RBW=100KHz)	-34	21
4000-5000 (RBW=100KHz)	-33	20
5000-6000 (RBW=100KHz)	-31.08	18.08
6000-7000 (RBW=100KHz)	-29.17	16.17
7000-8000 (RBW=100KHz)	-31.42	18.42
8000-9000 (RBW=100KHz)	-31.77	18.77
9000-10000 (RBW=100KHz)	-32	19

a. See Appendix A. Single Carrier IS-95 Spurious Emission

*. Samples of the plots are shown in Appendix A to H

**Table 18 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Three
Carrier band A and A'' IS-95***

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	3Carrier IS-95	3Carrier
869 MHz (Lower edge of band A'') Ch 1015, 33, 74 (RBW=37.5 kHz)	-27.92	14.92
880 MHz (Upper edge of band A) Ch 226, 267, 308 (RBW=37.5 kHz)	-29.53	16.53
0-1000 (RBW=100KHz)	-24.06	11.06
1000-2000 (RBW=100KHz)	-34.14	21.44
2000-3000 (RBW=100KHz)	-29.88	16.88
3000-4000 (RBW=100KHz)	-34.7	21.7
4000-5000 (RBW=100KHz)	-34.02	21.02
5000-6000 (RBW=100KHz)	-31.79	18.79
6000-7000 (RBW=100KHz)	-29.79	16.79
7000-8000 (RBW=100KHz)	-32.27	19.27
8000-9000 (RBW=100KHz)	-32.86	19.86
9000-10000 (RBW=100KHz)	-33.04	20.04

*. See Appendix C - Three Carriers IS-95 Spurious Emission

**Table 19 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port One
 Carrier band B IS-95**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	1Carrier IS-95	1Carrier
880 MHz (Lower edge of band B) Ch 358 (RBW=12.5kHz)	-23.73	10.73
890 MHz (Upper edge of band B) Ch 642 (RBW=12.5kHz)	-24.59	11.59
0-1000 (RBW=100KHz)	-30.14	17.14
1000-2000 (RBW=100KHz)	-31.38	18.38
2000-3000 (RBW=100KHz)	-25.68	12.68
3000-4000 (RBW=100KHz)	-33.79	20.79
4000-5000 (RBW=100KHz)	-33.03	20.03
5000-6000 (RBW=100KHz)	-30.87	17.87
6000-7000 (RBW=100KHz)	-29.14	16.14
7000-8000 (RBW=100KHz)	-31.07	18.07
8000-9000 (RBW=100KHz)	-31.81	18.81
9000-10000 (RBW=100KHz)	-32.19	19.19

**Table 20 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Two
Carrier band B IS-95***

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	2Carrier IS-95	2Carrier
880 MHz (Lower edge of band B) Ch 358, 399 (RBW=25.0 kHz)	-23.51	10.51
890 MHz (Upper edge of band B) Ch 601, 642 (RBW=25.0 kHz)	-25.46	12.46
0-1000 (RBW=100KHz)	-25.88	12.88
1000-2000 (RBW=100KHz)	-32.7	19.7
2000-3000 (RBW=100KHz)	-27.46	14.46
3000-4000 (RBW=100KHz)	-34.32	21.32
4000-5000 (RBW=100KHz)	-33.6	20.6
5000-6000 (RBW=100KHz)	-31.28	18.28
6000-7000 (RBW=100KHz)	-29.24	16.24
7000-8000 (RBW=100KHz)	-31.66	18.66
8000-9000 (RBW=100KHz)	-32.24	19.24
9000-10000 (RBW=100KHz)	-32.77	19.77

*. See Appendix B - Two Carriers IS-95 Spurious Emission

**Table 21 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Three
 Carrier band B IS-95**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	3Carrier IS-95	3Carrier
880 MHz (Lower edge of band B) Ch 358, 399, 440 (RBW=37.5 kHz)	-24.72	11.72
890 MHz (Upper edge of band B) Ch 560, 601, 642 (RBW=37.5 kHz)	-28.3	15.3
0-1000 (RBW=100KHz)	-23.27	10.27
1000-2000 (RBW=100KHz)	-34.27	21.27
2000-3000 (RBW=100KHz)	-29.35	16.35
3000-4000 (RBW=100KHz)	-34.69	21.69
4000-5000 (RBW=100KHz)	-34.09	21.09
5000-6000 (RBW=100KHz)	-32.02	19.02
6000-7000 (RBW=100KHz)	-30.11	17.11
7000-8000 (RBW=100KHz)	-32.22	19.22
8000-9000 (RBW=100KHz)	-32.84	19.84
9000-10000 (RBW=100KHz)	-33.25	20.25

**Table 22 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port One
 Carrier band A' IS-95**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	1Carrier IS-95	1Carrier
890 Mhz (Lower edge of band A') Ch 692(RBW=12.5 kHz)	-27.66	14.66
891.5 MHz (upper edge of band A') Ch 692 (RBW=12.5kHz)	-24.3	11.3
0-1000 (RBW=100KHz)	-29.79	16.79
1000-2000 (RBW=100KHz)	-31.54	18.54
2000-3000 (RBW=100KHz)	-26.59	13.59
3000-4000 (RBW=100KHz)	-33.69	20.69
4000-5000 (RBW=100KHz)	-33.16	20.16
5000-6000 (RBW=100KHz)	-30.82	17.82
6000-7000 (RBW=100KHz)	-28.98	15.98
7000-8000 (RBW=100KHz)	-31.39	18.39
8000-9000 (RBW=100KHz)	-32.02	19.02
9000-10000 (RBW=100KHz)	-31.95	18.95

**Table 23 : Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port One
 Carrier band B' IS95**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	1 Carrier IS-95	1 Carrier
891.5 MHz (lower edge of band B') Ch 742 (RBW=12.5kHz)	-27.63	14.63
894 MHz (upper edge of band B') Ch 775 (RBW=12.5kHz)	-26.71	13.71
0-1000 (RBW=100KHz)	-30.31	17.31
1000-2000 (RBW=100KHz)	-31.51	18.51
2000-3000 (RBW=100KHz)	-25.66	12..66
3000-4000 (RBW=100KHz)	-34.28	21.28
4000-5000 (RBW=100KHz)	-33.45	20.45
5000-6000 (RBW=100KHz)	-31.07	18.07
6000-7000 (RBW=100KHz)	-29.2	16.2
7000-8000 (RBW=100KHz)	-31.52	18.52
8000-9000 (RBW=100KHz)	-32.26	19.26
9000-10000 (RBW=100KHz)	-32.27	19.27

**Table 24: Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port One
Carrier band B IS856^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	1 Carrier IS 856 16QAM	1 Carrier
880 MHz (Lower edge of band B) Ch 358 (RBW=12.5kHz)	-25.43	12.43
890 MHz (Upper edge of band B) Ch 642 (RBW=12.5kHz)	-25.46	12.46
0-1000 (RBW=100KHz)	-30.5	17.5
1000-2000 (RBW=100KHz)	-32.56	19.56
2000-3000 (RBW=100KHz)	-26.55	13.55
3000-4000 (RBW=100KHz)	-33.85	20.85
4000-5000 (RBW=100KHz)	-32.77	19.77
5000-6000 (RBW=100KHz)	-30.77	17.77
6000-7000 (RBW=100KHz)	-28.79	15.79
7000-8000 (RBW=100KHz)	-31.19	18.19
8000-9000 (RBW=100KHz)	-31.75	18.75
9000-10000 (RBW=100KHz)	-32.11	19.11

a. See Appendix D - One Carrier IS-856 16QAM Spurious Emission

**Table 25: Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Three
 Carrier band B IS856 16QAM^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	3-Carriers IS856 16QAM	3 Carriers
880 MHz (Lower edge of band B) Ch 358, 399, 440 (RBW=37.5 kHz)	-23.68	10.68
890 MHz (Upper edge of band B) Ch 560, 601, 642 (RBW=37.5 kHz)	-26.01	13.01
0-1000 (RBW=100KHz)	-22.2	9.2
1000-2000 (RBW=100KHz)	-34.27	-21.27
2000-3000 (RBW=100KHz)	-29.36	16.36
3000-4000 (RBW=100KHz)	-34.88	21.88
4000-5000 (RBW=100KHz)	-34.28	21.28
5000-6000 (RBW=100KHz)	-31.78	18.78
6000-7000 (RBW=100KHz)	-30.13	17.13
7000-8000 (RBW=100KHz)	-32.37	19.37
8000-9000 (RBW=100KHz)	-33.02	20.02
9000-10000 (RBW=100KHz)	-33.34	20.34

a. See Appendix E - Three Carriers IS-856 16QAM Spurious Emission

**Table 26: Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Band B
Two Carrier IS856 (16QAM) One Carrier IS95 ^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	3 Carriers 2-IS856 16QAM ,1-IS95	3 Carriers
880 MHz (Lower edge of band B) Ch 358, 399, 440 (RBW=37.5 kHz)	-24.28	11.28
890 MHz (Upper edge of band B) Ch 560, 601, 642 (RBW=37.5 kHz)	-24.19	11.19
0-1000 (RBW=100KHz)	-242	11.2
1000-2000 (RBW=100KHz)	-34.26	21.26
2000-3000 (RBW=100KHz)	-29.2	16.2
3000-4000 (RBW=100KHz)	-34.87	21.87
4000-5000 (RBW=100KHz)	-34.07	21.07
5000-6000 (RBW=100KHz)	-31.41	18.41
6000-7000 (RBW=100KHz)	-30.05	17.05
7000-8000 (RBW=100KHz)	-32.4	19.4
8000-9000 (RBW=100KHz)	-33.19	20.19
9000-10000 (RBW=100KHz)	-33.49	20.49

a. See Appendix F - Two Carriers IS856 16QAM, One Carrier IS95 Spurious Emission

**Table 27: Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Three
 Carrier band B IS856 [8PSK] ^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	3 Carriers IS856 8PSK	3 Carriers
880 MHz (Lower edge of band B) Ch 358, 399, 440 (RBW=37.5 kHz)	-23.78	10.78
890 MHz (Upper edge of band B) Ch 560, 601, 642 (RBW=37.5 kHz)	-26.7	13.7
0-1000 (RBW=100KHz)	-21.44	8.44
1000-2000 (RBW=100KHz)	-34.3	21.3
2000-3000 (RBW=100KHz)	-29.22	16.22
3000-4000 (RBW=100KHz)	-34.74	21.74
4000-5000 (RBW=100KHz)	-34.19	21.19
5000-6000 (RBW=100KHz)	-31.77	18.77
6000-7000 (RBW=100KHz)	-30.05	17.05
7000-8000 (RBW=100KHz)	-32.24	19.24
8000-9000 (RBW=100KHz)	-32.86	19.86
9000-10000 (RBW=100KHz)	-33.06	20.06

a. See Appendix G - Three Carriers IS856 8PSK Spurious Emission

**Table 28: Spurious Emissions at the 800MHz Optimized Radio Module Ant. Port Three
Carrier band B IS856 [QPSK] ^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Margin to FCC Limit of -13 dBm (dB)
	3 Carriers IS856 QPSK	3 Carriers
880 MHz (Lower edge of band B) Ch 358, 399, 440 (RBW=37.5 kHz)	-23.62	10.62
890 MHz (Upper edge of band B) Ch 560, 601, 642 (RBW=37.5 kHz)	-26.61	13.61
0-1000 (RBW=100KHz)	-21.35	8.35
1000-2000 (RBW=100KHz)	-34.19	21.19
2000-3000 (RBW=100KHz)	-28.96	15.96
3000-4000 (RBW=100KHz)	-34.17	21.17
4000-5000 (RBW=100KHz)	-34.05	21.05
5000-6000 (RBW=100KHz)	-31.71	18.71
6000-7000 (RBW=100KHz)	-29.88	16.88
7000-8000 (RBW=100KHz)	-32.12	19.12
8000-9000 (RBW=100KHz)	-32.68	19.68
9000-10000 (RBW=100KHz)	-32.91	19.91

a. See Appendix H - Three Carriers IS856 QPSK Spurious Emission

4.5 Transmitter Tests (CDMA Mode)

Unwanted Emissions

Unwanted emissions are emissions on a frequency or frequencies outside the necessary bandwidth which result from the modulation process, from spurious emissions and harmonics.

IC RSS-129

(1) Suppression inside cellular band: For all base station transmit frequencies allocated to the same operator system, the total spurious emissions in any 30 kHz band shall be attenuated below the mean output power level in accordance with the following schedule:

(a) for all offset frequencies greater than 750 kHz from the CDMA centre frequency, at least 45 dB. 800 MHz Dual-Mode CDMA Cellular Telephones RSS-129.

(b) for all offset frequencies greater than 1.98 MHz from the CDMA centre frequency, at least 60 dB.

(c) for all offset frequencies not allocated to the same operator system, at least 60 dB or -13 dBm, whichever is less stringent.

(2) In any 30 kHz outside the cellular band, the attenuation shall be at least $43+10 \log_{10}$ (mean output power in watts) or 70, dB, whichever is the less stringent.

4.5.1 Test Method

Configure the BTS via the BTS controller to enable the 800MHz Optimized Radio Module to transmit at maximum rated power for each of the carrier configurations one, two and three carrier in the Baseband modulation formats IS-95. Measurements will be made on channels at the bottom and top of the duplexer band. The following spectrum analyzer settings are to be used for the measurement of the antenna port (DPM) spurious emissions:

4.5.1.1 Adjacent 1MHz to indicated cellular band (Upper and Lower)
Table 29: Adjacent 750 KHz and 1.98 MHz Spectrum Analyze Settings

Setting	1 Carrier	2 Carrier	3 Carrier
Resolution Bandwidth ^a :	30 kHz	30 kHz	30 kHz
Video Bandwidth (3x RBW)	100 kHz	100 kHz	100 kHz
Video Average	10 Averages	10 Averages	10 Averages
Span	Set accordingly	Set accordingly	Set accordingly
Detector	RMS	RMS	RMS
Attenuation	30 dB	30 dB	30 dB
Ref. Level	35 dBm	35 dBm	35 dBm
Ref. Level Offset	31-34.5 dB	31-34.5 dB	31-34.5 dB

- a. If the spectrum analyze can not be set to the specified RBW the next highest RBW should be used and all measurements corrected to the specified RBW

All spectrum analyzer settings were coupled as per the manufacturers recommendations to improve measurement time, without compromising data.

4.5.2 Test Setup

The set-up required for the 800MHz Optimized Radio Module Antenna Port (DPM) Spurious Emission test is illustrated in Figure 4.

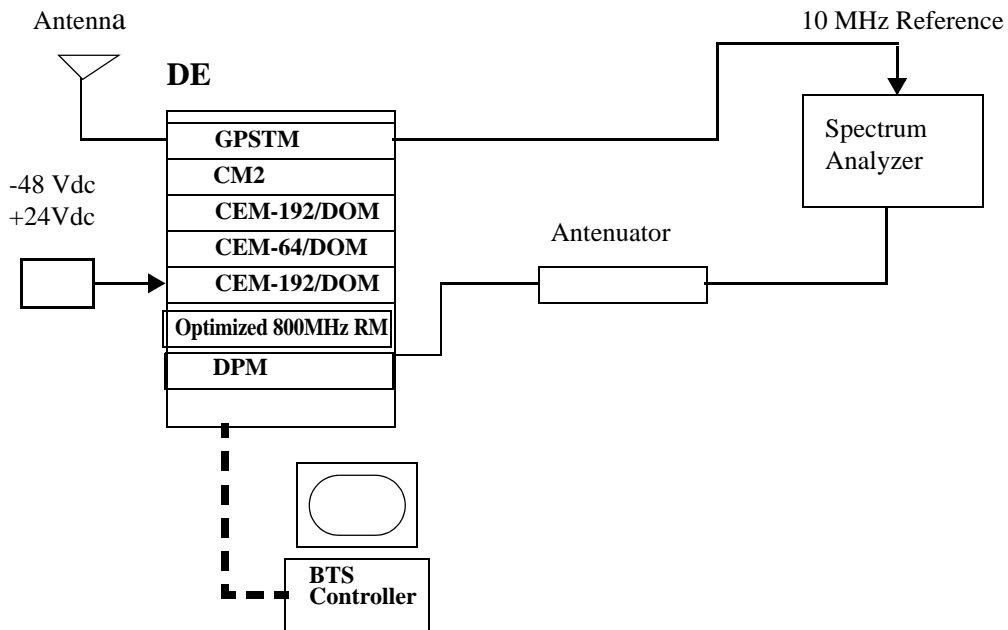


Figure 4 : Test Setup for Spurious Emissions Measurement

4.5.3 Test Results

Table 30 : Industry Canada Suppression inside cellular band 800MHz Optimized Radio Module Antenna Port IS95, 1 Carrier band A”*

Frequency (MHz)	Spurious Emissions Level (dBm)	Limit for 45 dBc/ 30KHz (dBm)	Margin to IC Limit of 45 dBc/ 30KHz (dB)
	1Carrier IS-95	1Carrier	1 Carrier
Ch1015 750KHz offset at lower side	-18.64	2.3	20.94
Ch1015 750KHz offset at upper side	-18.21	2.3	20.51
		Limit for 60 dBc/ 30KHz (dBm)	Margin to IC Limit of 60 dBc/ 30KHz (dB)
Ch1015 1.98MHz offset at lower side	-41.12	-12.7	28.42
Ch1015 1.89MHz offset at upper side	-42.06	-12.7	29.36

*. See Appendix A - Single Carrier IS95 Spurious Emission

**Table 31 : Industry Canada Suppression inside cellular band 800MHz Optimized Radio
 Module Antenna Port IS95, 3 Carrier band A” and A^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Limit for 45 dBc/ 30KHz (dBm)	Margin to IC Limit of 45 dBc/ 30KHz (dB)
	3Carrier IS-95	3Carrier	3Carrier
Ch1015, 33, 74 750KHz offset at lower side	-23.28	2.3	25.58
Ch1015, 33, 74 750KHz offset at upper side	-23.13	2.3	25.43
		Limit for 60 dBc/ 30KHz (dBm)	Margin to IC Limit of 60 dBc/ 30KHz (dB)
Ch1015, 33, 74 1.98MHz offset at lower side	-33.98	-12.7	21.28
Ch1015, 33, 74 1.98MHz offset at upper side	-33.96	-12.7	21.26

a. See Appendix C - Three Carriers IS95 Spurious Emission

**Table 32: Industry Canada Suppression inside cellular band 800MHz Optimized Radio
 Module Antenna Port IS95, 1 Carrier band B'**

Frequency (MHz)	Spurious Emissions Level (dBm)	Limit for 45 dBc/ 30KHz (dBm)	Margin to IC Limit of 45 dBc/ 30KHz (dB)
	1Carrier IS-95	1Carrier	1Carrier
Ch 742 750KHz offset at lower side	-18.12	2.3	20.42
Ch 742 750KHz offset at upper side	-18.58	2.3	20.88
		Limit for 60 dBc/ 30KHz (dBm)	Margin to IC Limit of 60 dBc/ 30KHz (dB)
Ch 742 1.98MHz offset at lower side	-42.41	-12.7	29.71
Ch 742 1.98MHz offset at upper side	-41.86	-12.7	29.16

**Table 33: Industry Canada Suppression inside cellular band 800MHz Optimized Radio
 Module Antenna Port IS856-16QAM, 1 Carrier band B ^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Limit for 45 dBc/30KHz (dBm)	Margin to IC Limit of 45 dBc/ 30KHz (dB)
	1Carrier IS856-16QAM	1Carrier	1Carrier
Ch 358 750KHz offset at lower side	-18.31	2.3	20.61
Ch 358 750KHz offset at upper side	-17.49	2.3	19.79
		Limit for 60 dBc/30KHz (dBm)	Margin to IC Limit of 60 dBc/ 30KHz (dB)
Ch 358 1.98MHz offset at lower side	-42.43	-12.7	29.73
Ch 358 1.98MHz offset at upper side	-42.56	-12.7	29.86

a. See Appendix D - One Carrier IS-856 16QAM Spurious Emission

**Table 34: Industry Canada Suppression inside cellular band 800MHz Optimized Radio
Module Antenna Port IS856-16QAM, 3 Carriers band B^a**

Frequency (MHz)	Spurious Emissions Level (dBm)	Limit for 45 dBc/30KHz (dBm)	Margin to IC Limit of 45 dBc/ 30KHz (dB)
	3Carrier IS856-16QAM	3Carrier	3Carrier
Ch 358, 399, 440 750KHz offset at lower side	-22.1	2.3	24.4
Ch 358, 399, 440 750KHz offset at upper side	-22.73	2.3	25.03
		Limit for 60 dBc/30KHz (dBm)	Margin to IC Limit of 60 dBc/ 30KHz (dB)
Ch 358, 399, 440 1.98MHz offset at lower side	-29.45	-12.7	16.75
Ch 358, 399, 440 1.98MHz offset at upper side	-34.04	-12.7	21.34

a. See Appendix E - Three Carriers IS-856 16QAM Spurious Emission

Frequency Stability

4.5.4 Frequency Stability Requirements

FCC Part 2.1055

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30 to +50 centigrade for all equipment except that specified in subparagraphs (2) and (3) of this paragraph.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

FCC Part 22.355 Frequency Tolerance

The carrier frequency of each transmitter in the 821-896 MHz Frequency range, must be maintained within 1.5ppm tolerance, according to table C-1 of this section (22.355)

4.5.5 Test Procedure

The test equipment was configured as shown in figure 5.

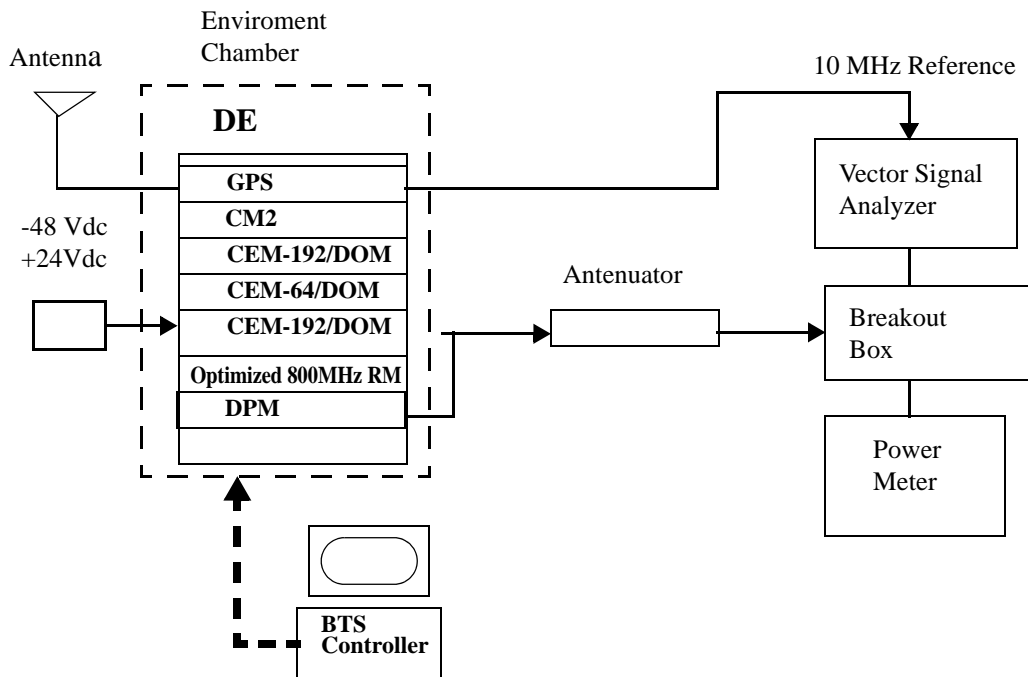


Figure 5 : Test configuration for Frequency Stability

4.5.6 Frequency Results

The results below are from the previous submission - FCC - AB6NT8000RM-CBTS . See Reference [8]

The frequency measured in this section is 881.97 MHz. Operating temperature for the 800MHz Optimized Radio Module is from -5°C to $+50^{\circ}\text{C}$. See Reference [7]

Table 35 : Test results for Frequency Stability versus Power supply Voltage

Voltage (Vdc)	Maximum Carrier Frequency Deviation (PPM)	Maximum Carrier Frequency Deviation (Hz)
40	0.005805	5.12
48 nominal	0.006202	5.47
56	0.006610	5.83
20	0.005318	4.69
24 nominal	0.007154	6.31
28	0.006905	6.09

Table 36 : Test results for Frequency Stability versus Temperature at -48V operation

Temperature (°C)	Maximum Carrier Frequency Deviation (PPM)	Maximum Carrier Frequency Deviation (Hz)
-5	0.006192	5.48
0	0.005907	5.21
10	0.006848	6.04
20	0.006690	5.90
30	0.005397	4.76
40	0.007041	6.21
50	0.006089	5.37

Table 37 : Test results for Frequency Stability versus Temperature at 24V operation

Temperature (°C)	Maximum Carrier Frequency Deviation (PPM)	Maximum Carrier Frequency Deviation (Hz)
-5	0.006055	5.34
0	0.006758	5.96
10	0.007086	6.25
20	0.007279	6.42
30	0.006440	5.68
40	0.006032	5.32
50	0.007427	6.55

5 Appendix A - Single Carrier IS-95 Spurious Emission

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier Band A and A'' IS95

Occupied Bandwidth Ch 1015 A''

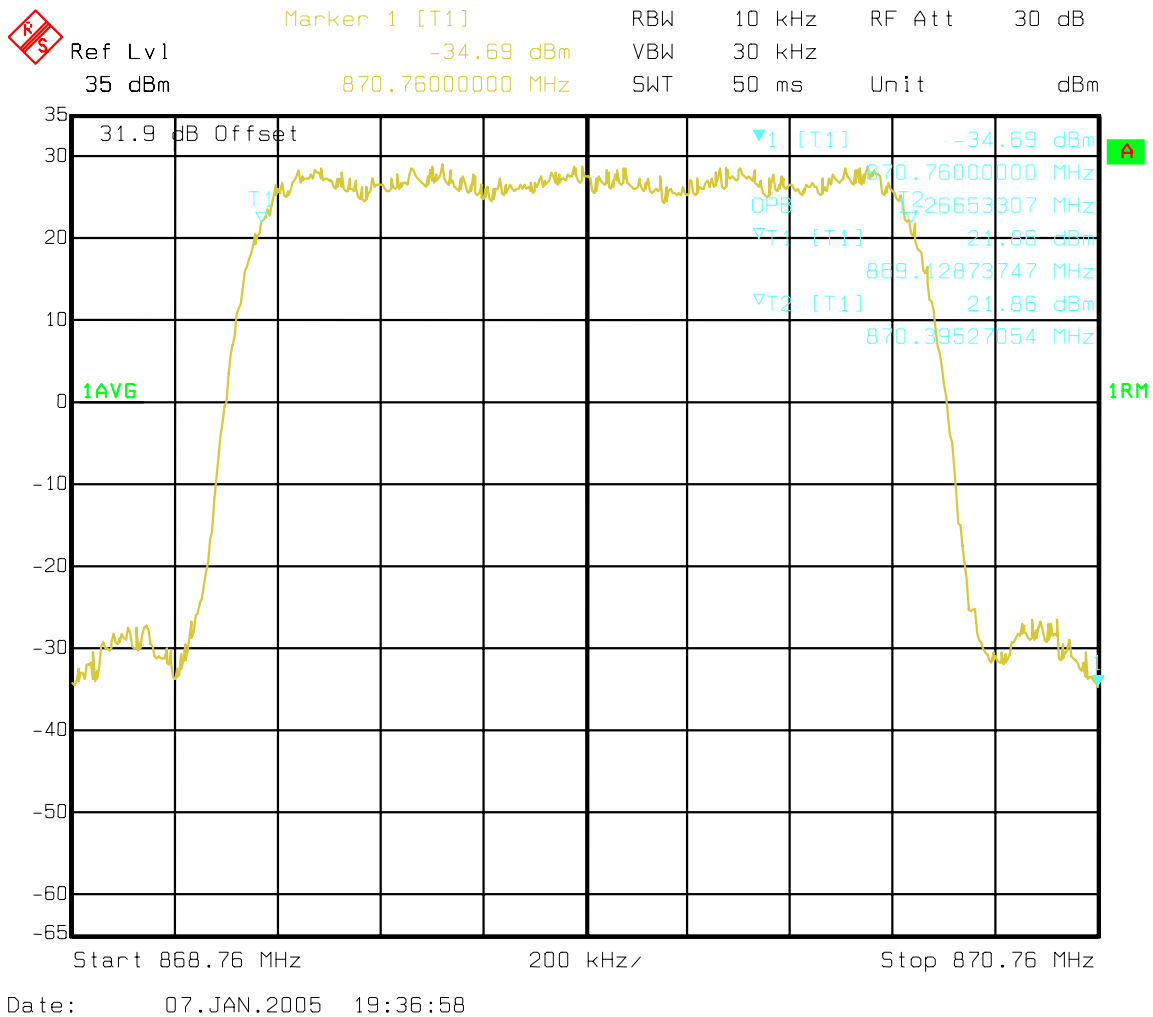


Figure 6 : 1 Carrier - Occupied Bandwidth Channel 1015

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A '' Band Ch 1015 IS95 Adjacent 1 MHz Lower emissions 868-869 MHz

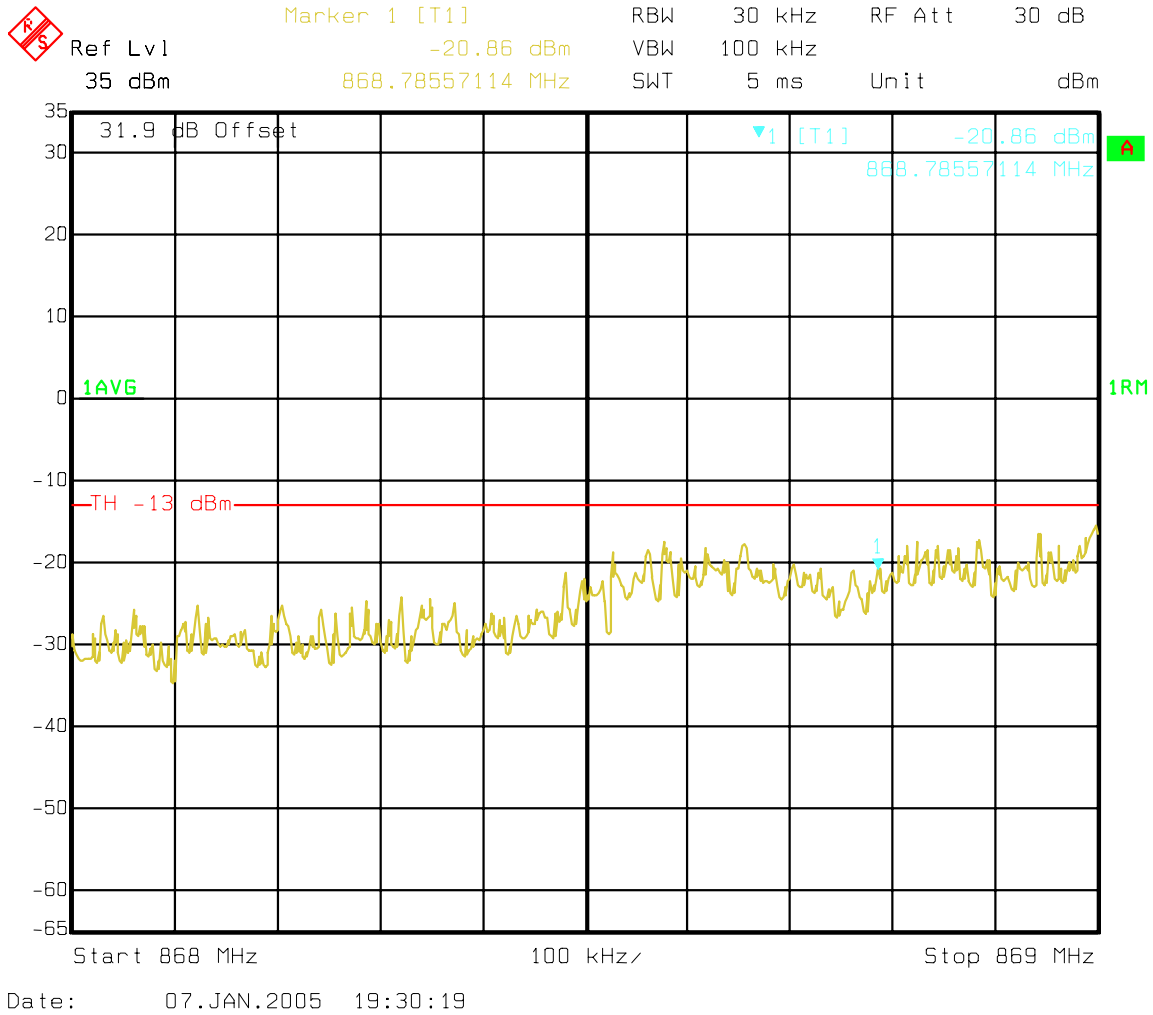


Figure 7 : One Carrier - A '' Band Ch 1015 IS95 Adjacent 1 MHz Lower emissions 868-869 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

Ch1015 IS95 Lower A'' Band Adjacent to outside edge 12.5kHz Band Channel Power


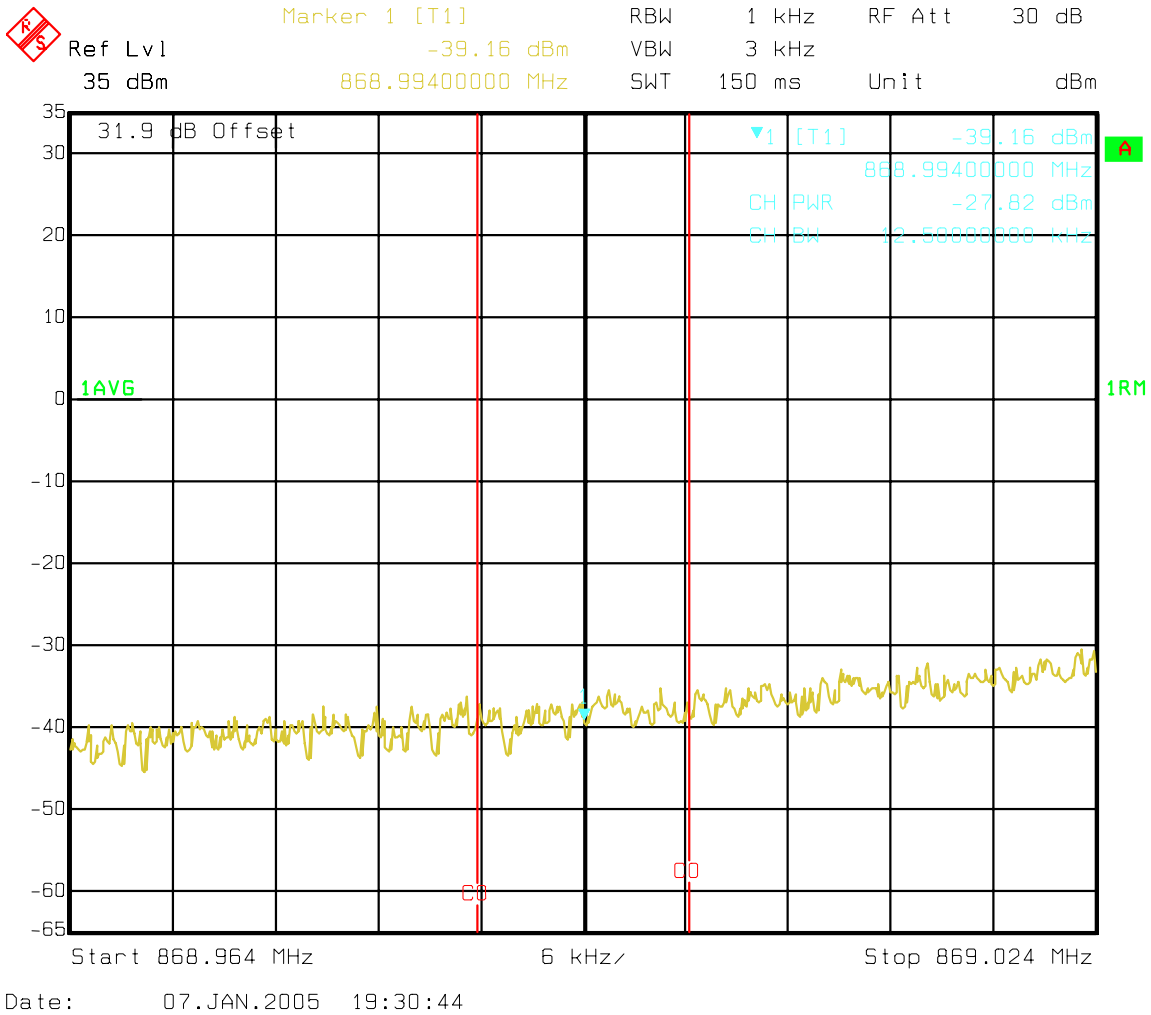


Figure 8 : One Carrier - Ch1015 IS95 Lower A'' Band Adjacent to outside edge 12.5kHz band Channel Power

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

Ch 308 Upper A Band adjacent 1MHz band emissions

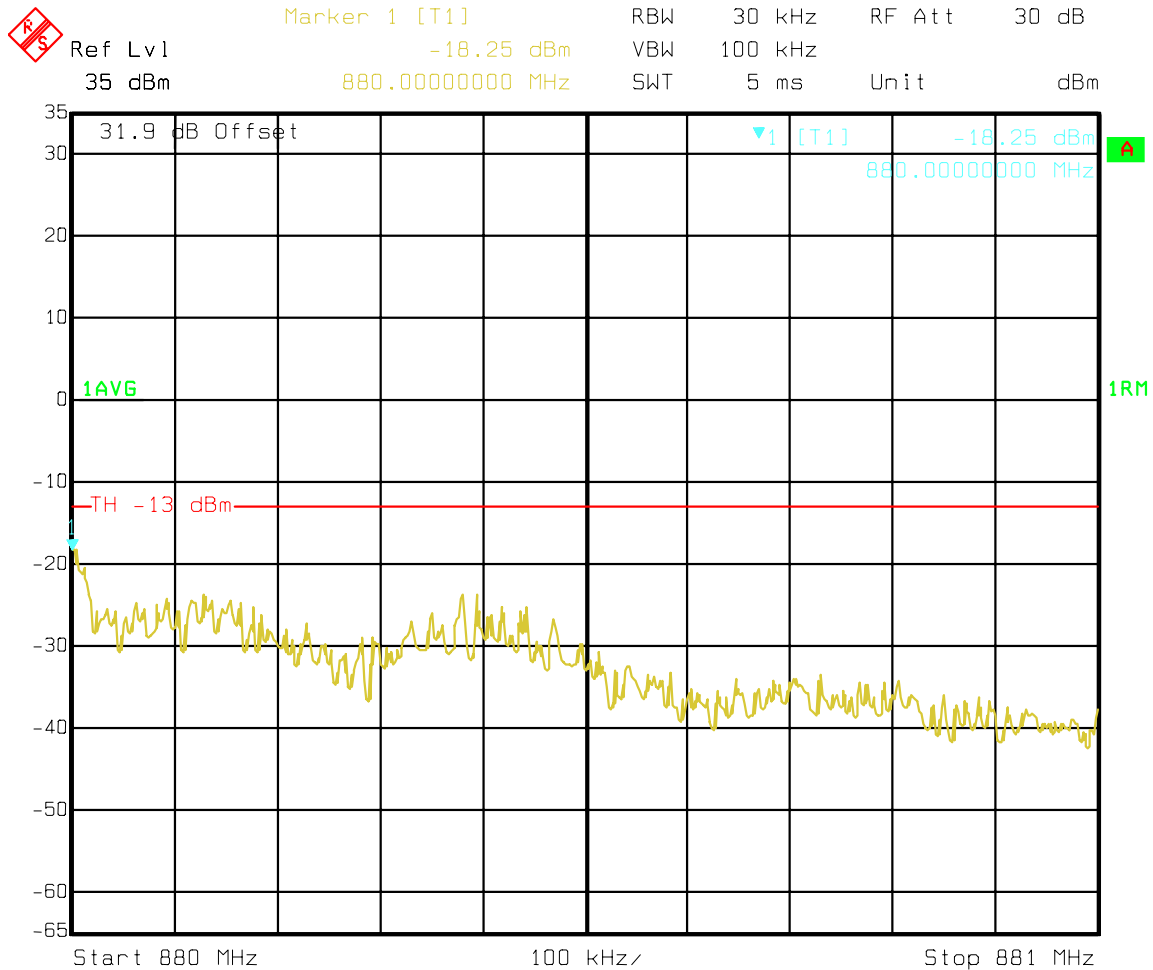

Date: 07.JAN.2005 18:57:45

Figure 9 : One Carrier - Ch 308 Upper A Band adjacent 1MHz band emissions

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

Ch 308 Upper A Band adjacent to outside edge 12.5 kHz band Channel power

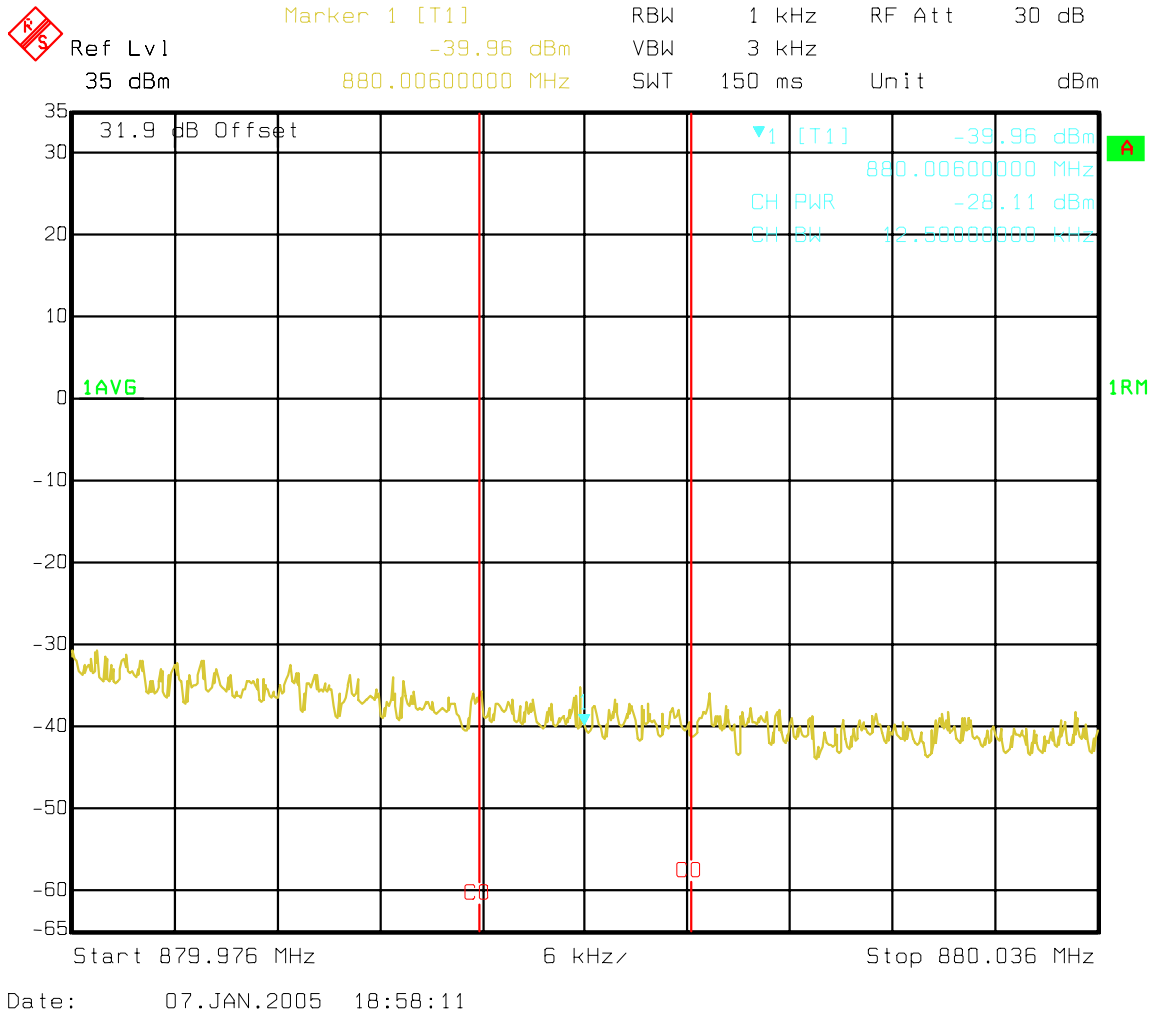


Figure 10 : One Carrier - Ch 308 Upper A Band adjacent to outside edge 12.5 kHz band Channel power

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 1015

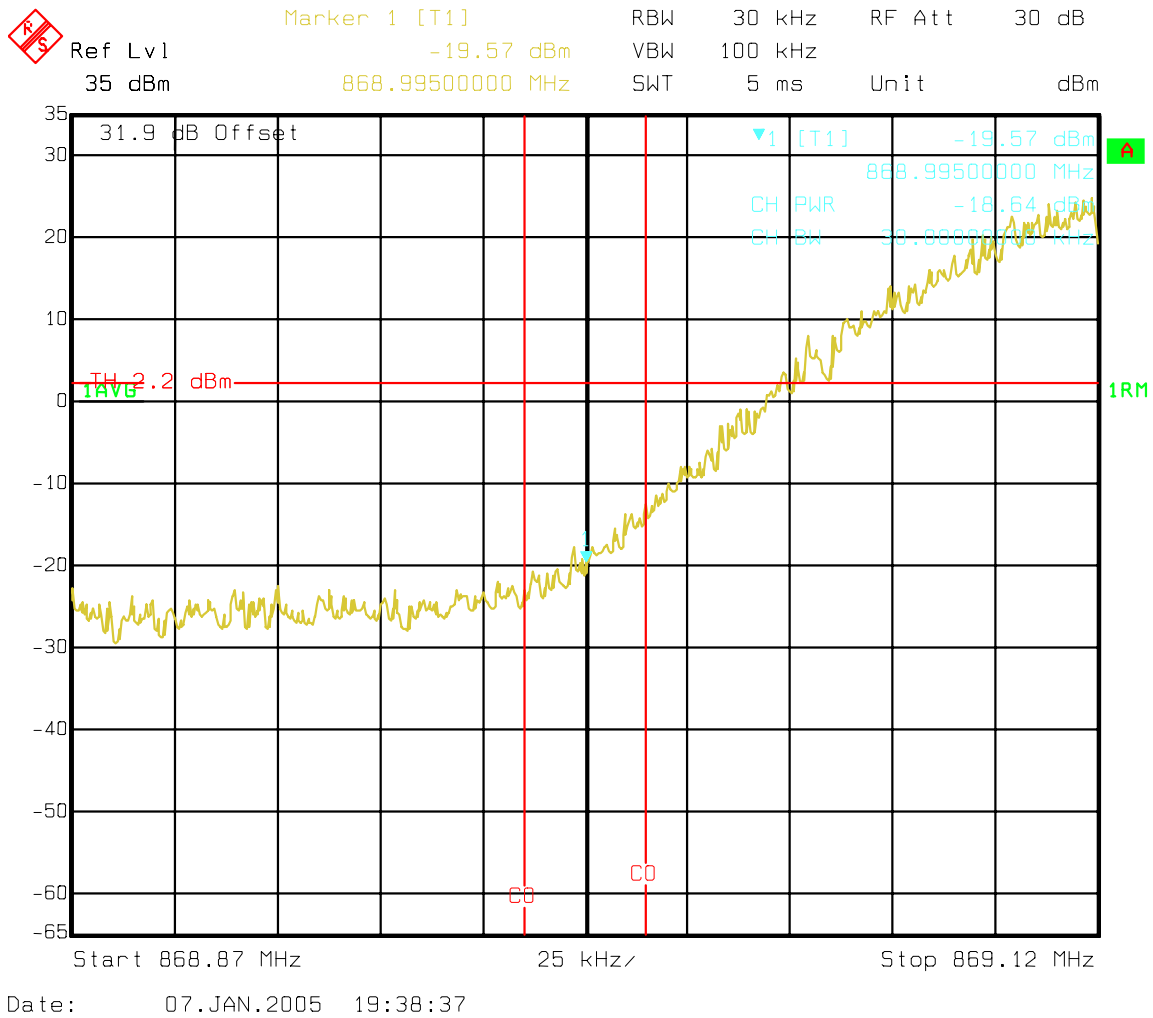


Figure 11 : One Carrier - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 1015

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 1015

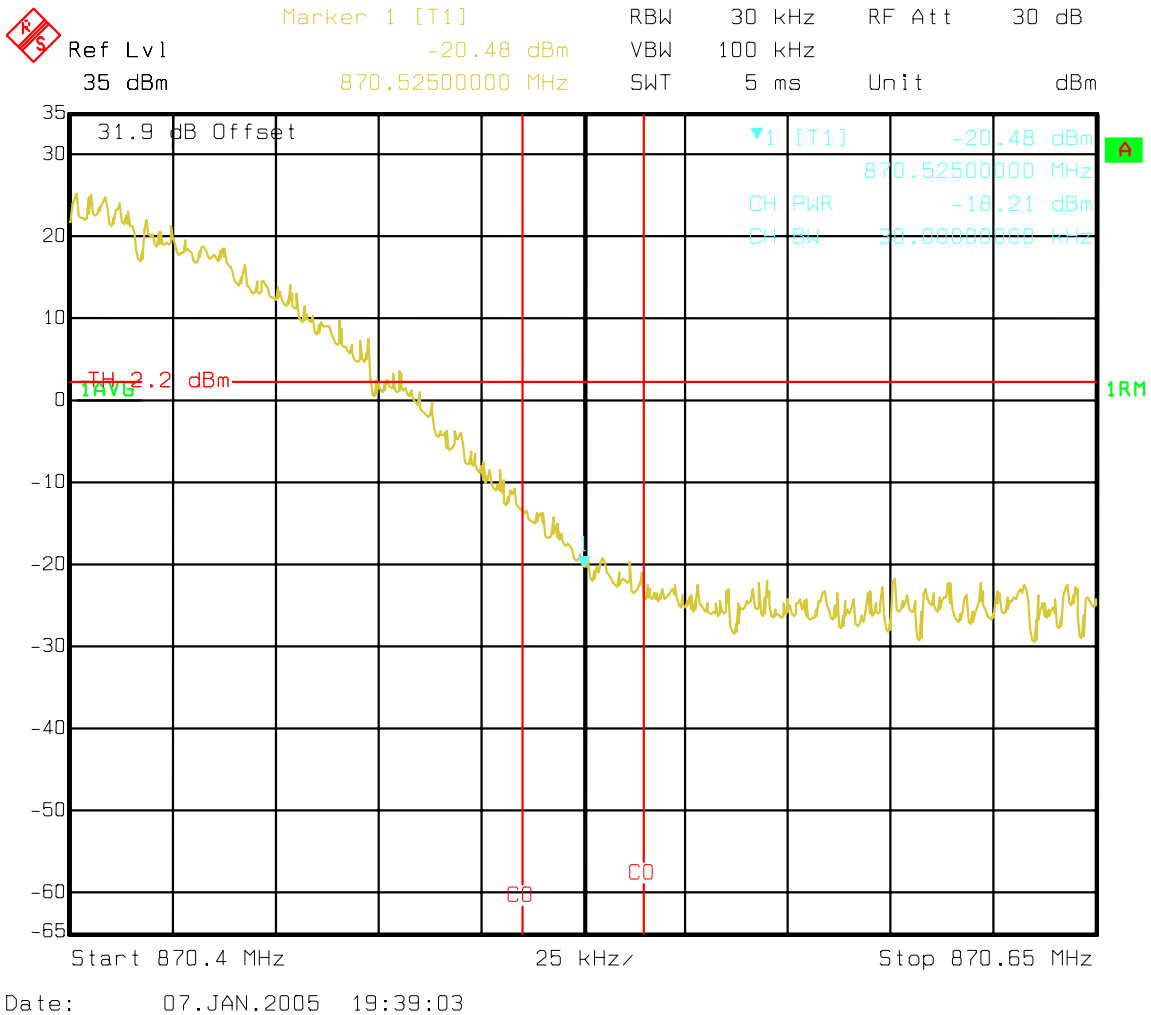


Figure 12 : One Carrier - Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 1015

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 1015

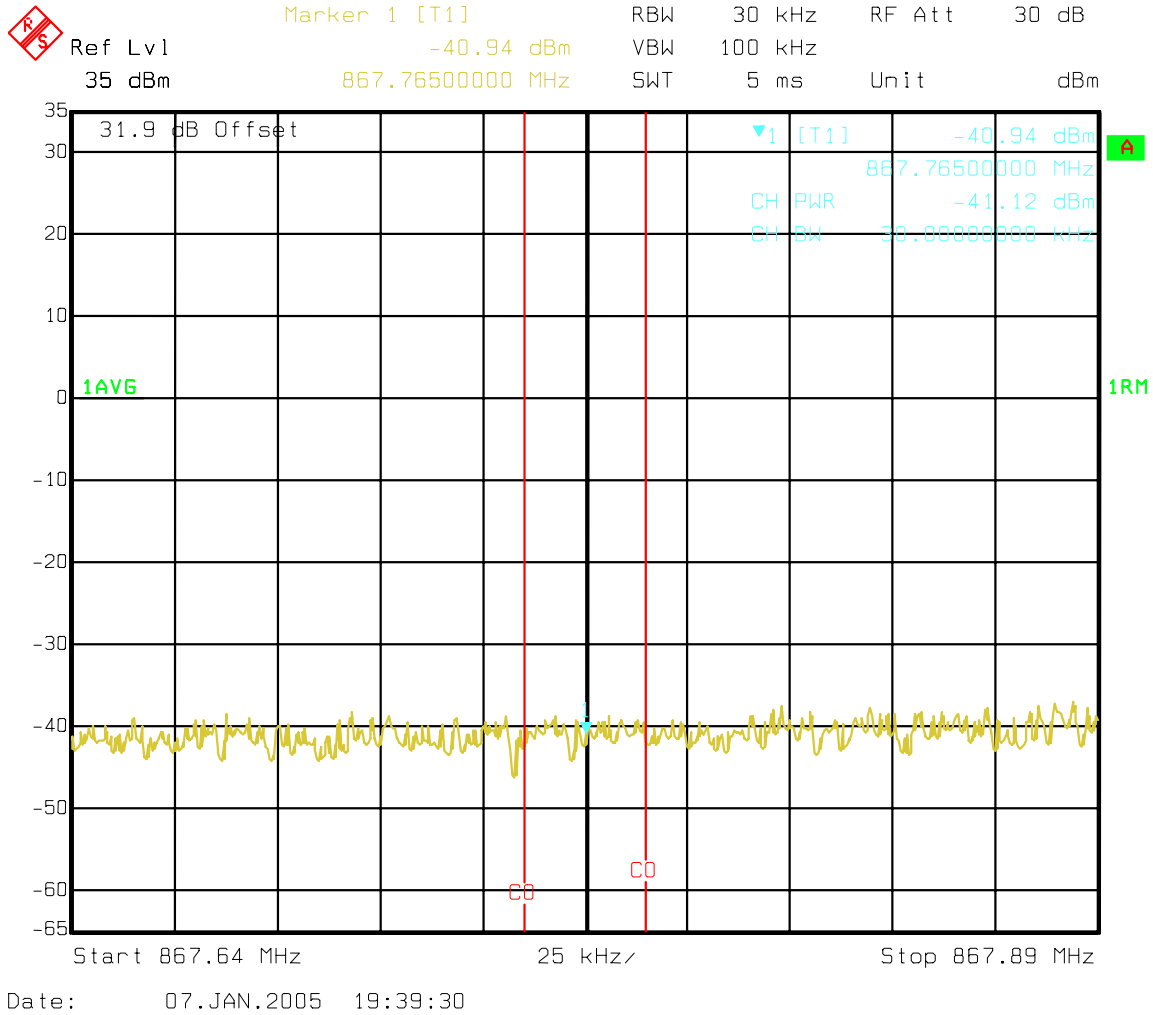


Figure 13 : One Carrier - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 1015

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 1015


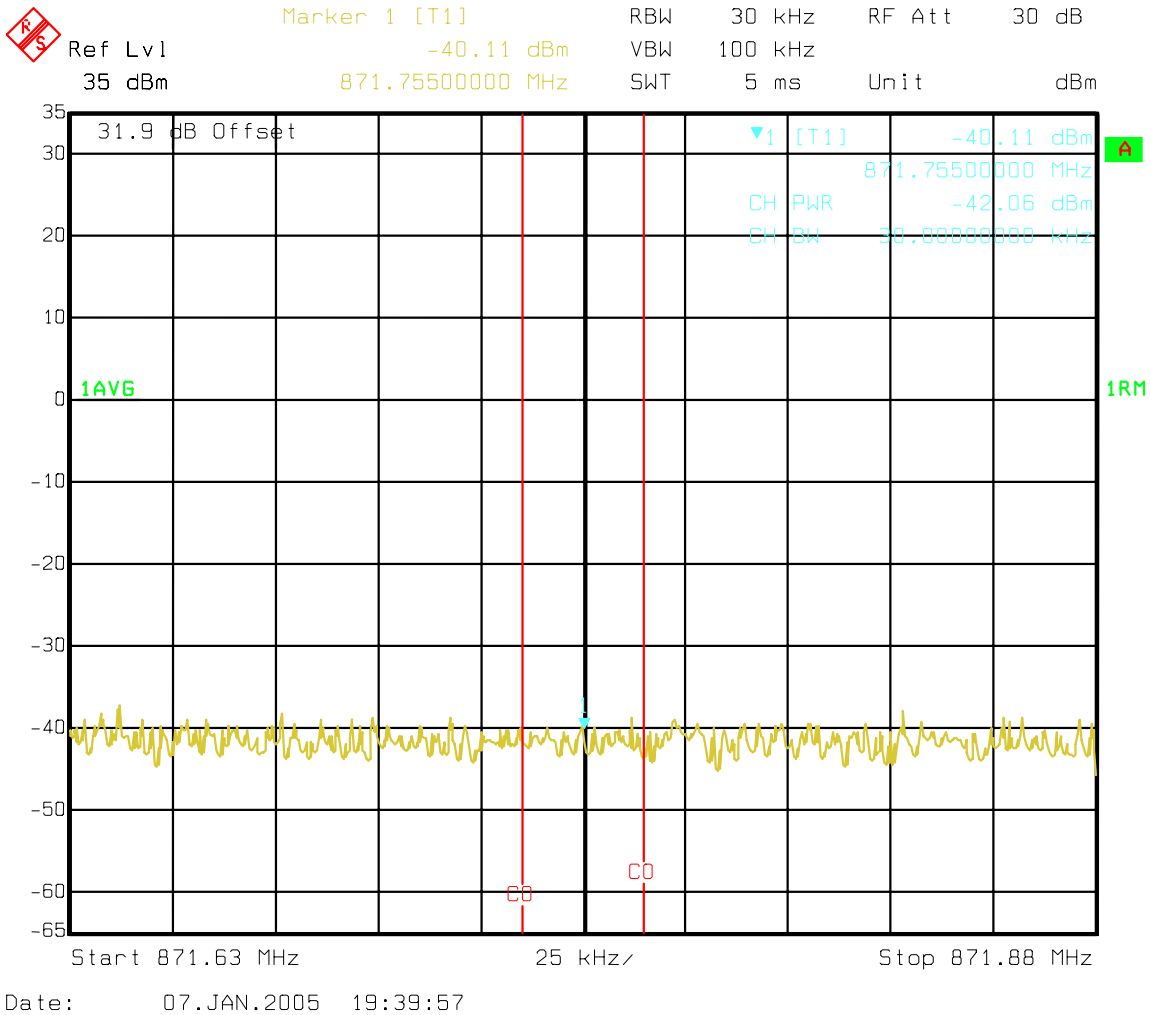


Figure 14 : One Carrier - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 1015

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 10kHz-400 MHz

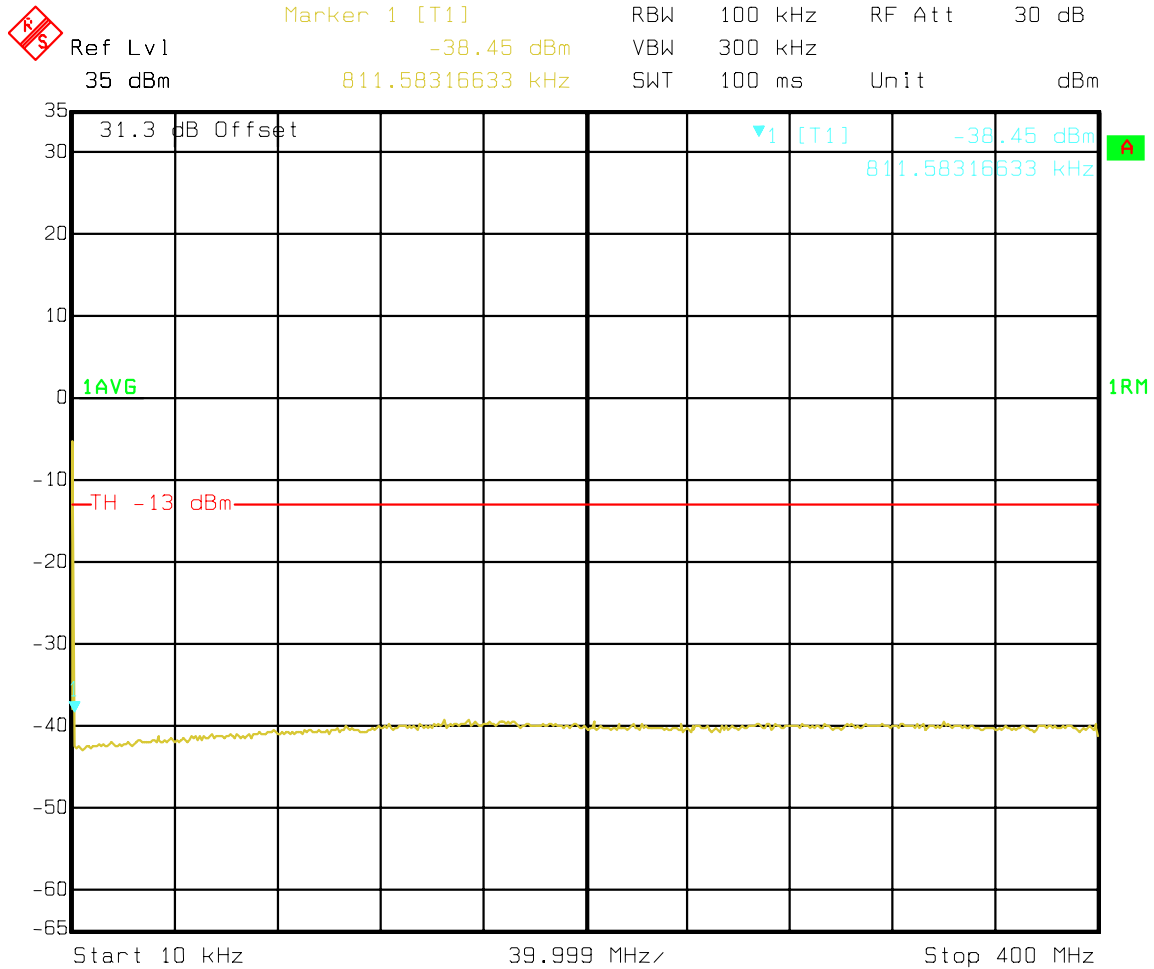

Date: 07.JAN.2005 19:32:02

Figure 15 : One Carrier - A'' and A Band IS95 Spurious emissions 10kHz-400 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and a Band IS95 Spurious emissions 400 MHz to Lower 1 MHz Band Edge

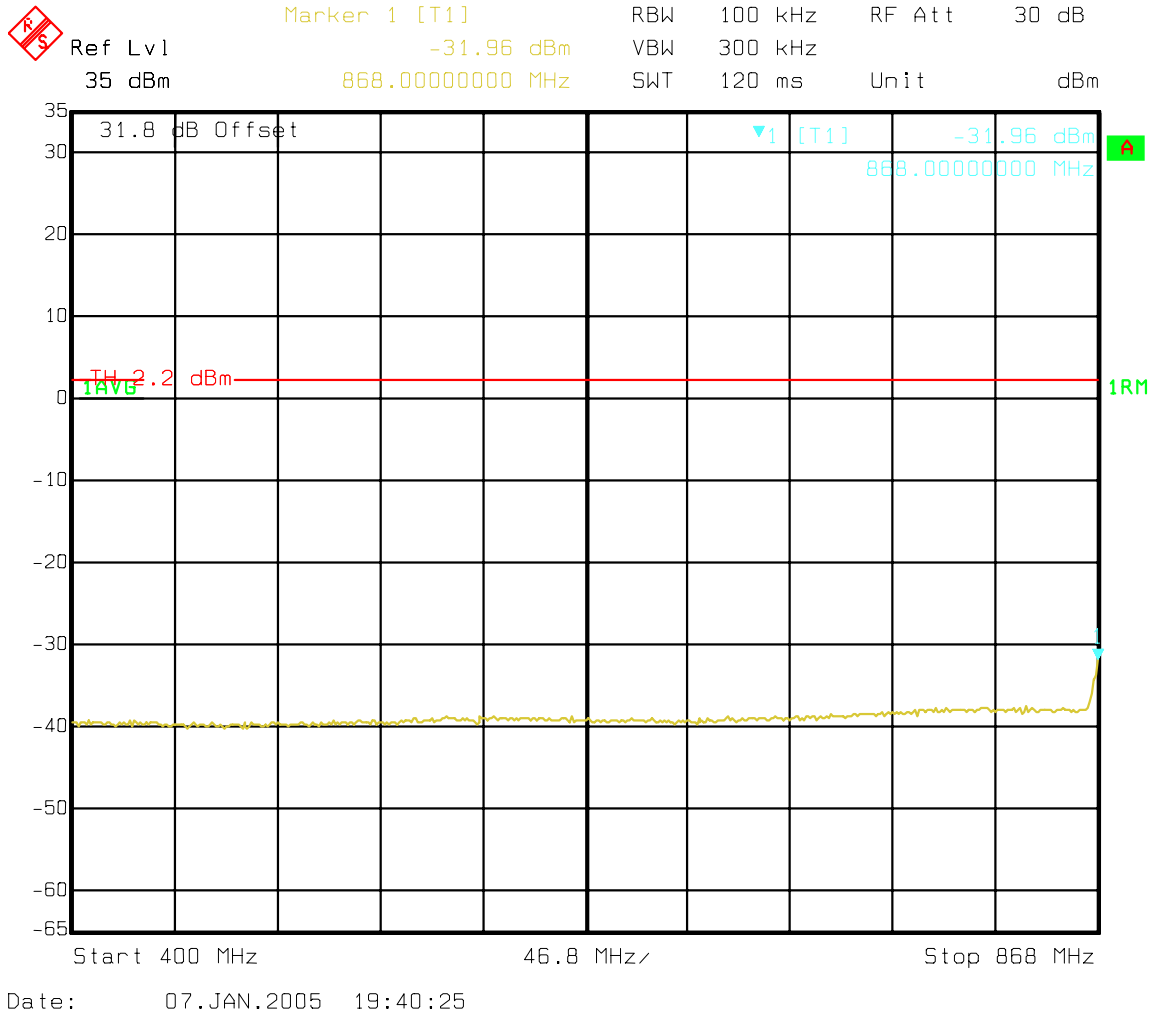


Figure 16 : One Carrier - A'' and a Band IS95 Spurious emissions 400 MHz to Lower 1 MHz Band Edge

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and a Band IS95 Spurious emissions Upper 1 MHz Band Edge to 1 GHz

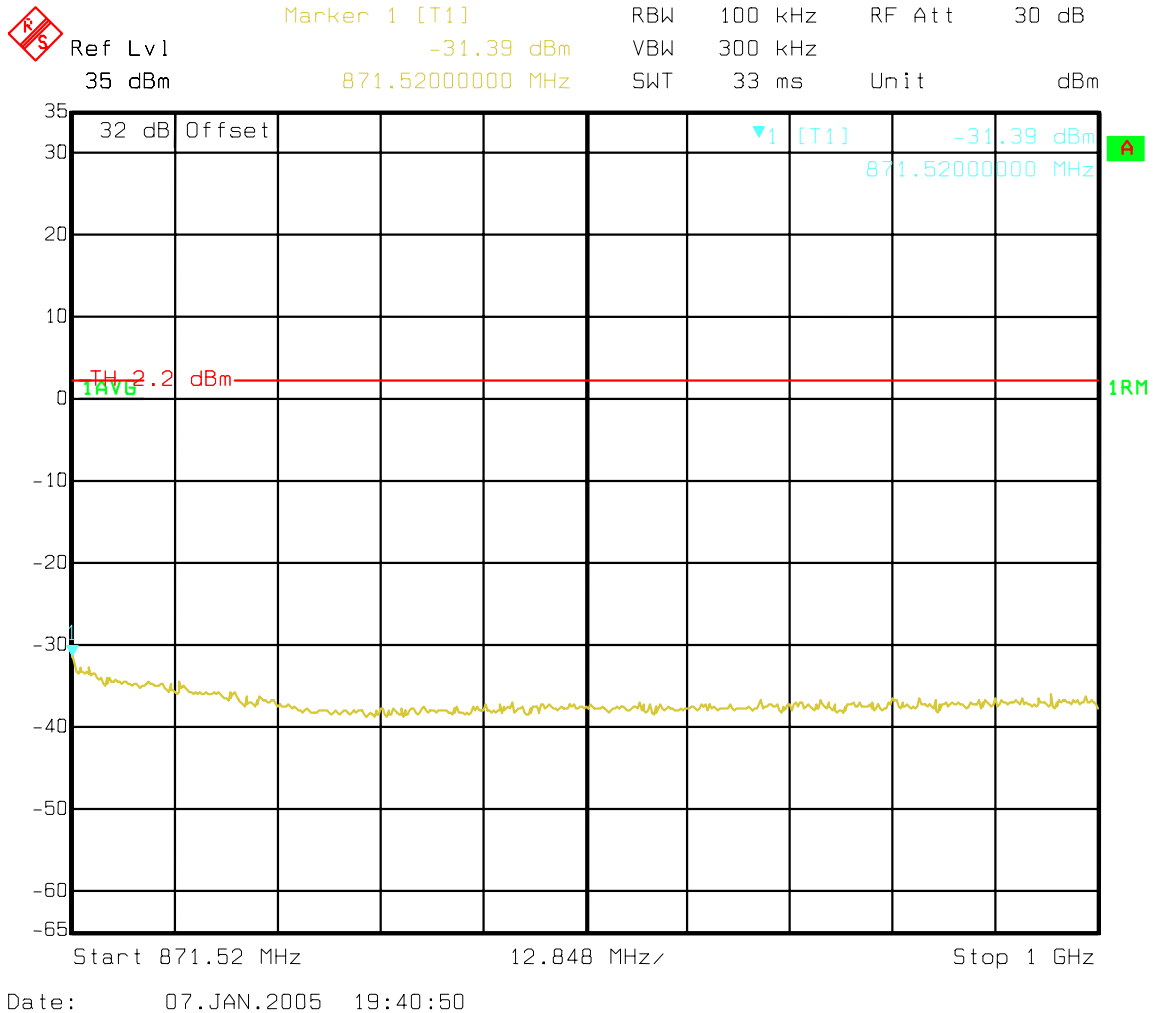


Figure 17 : One Carrier - A'' and a Band IS95 Spurious emissions Upper 1 MHz Band Edge to 1 GHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 400-1000 MHz


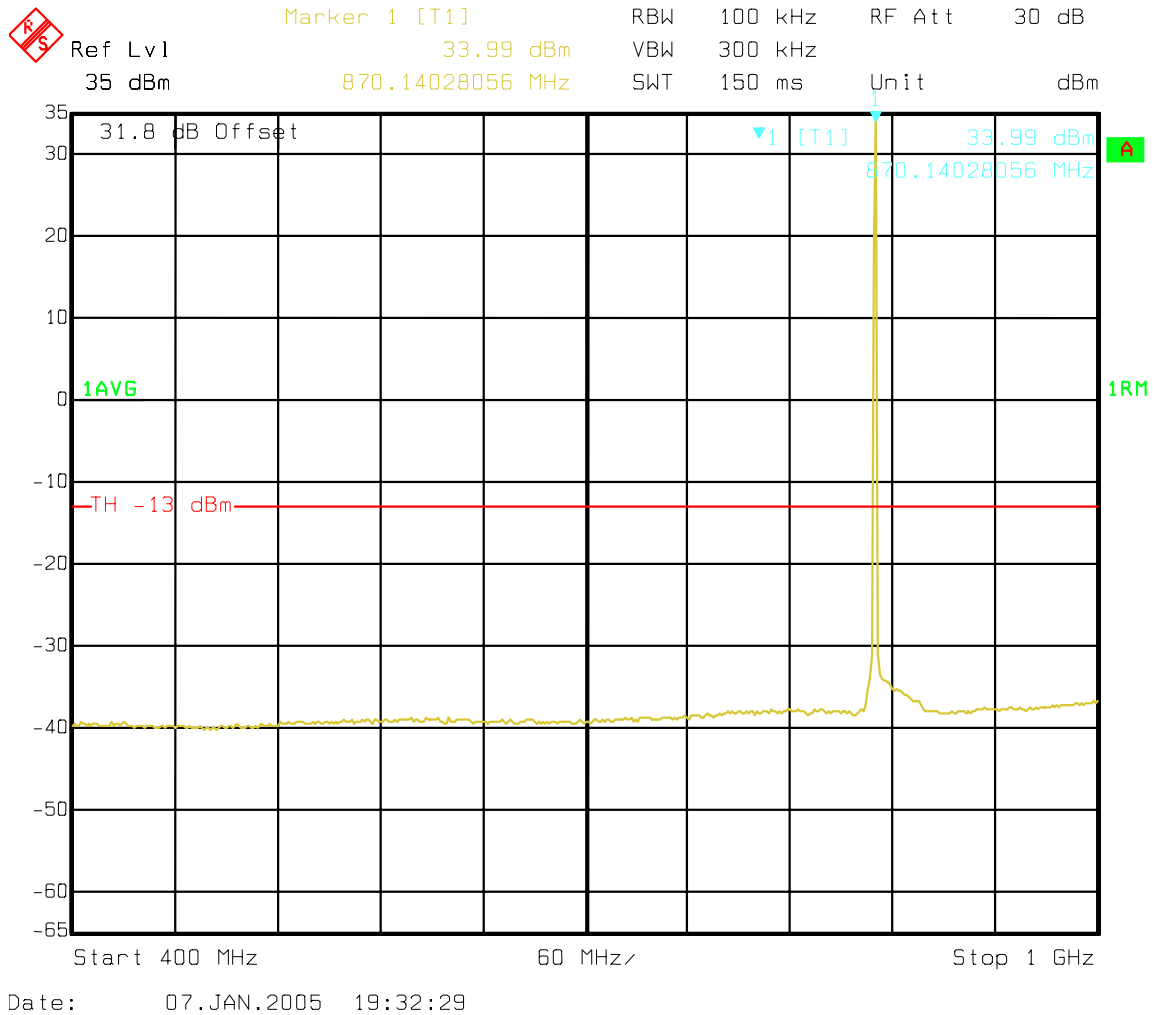


Figure 18 : One Carrier - A'' and A Band IS95 Spurious emissions 400-1000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 1000-2000 MHz

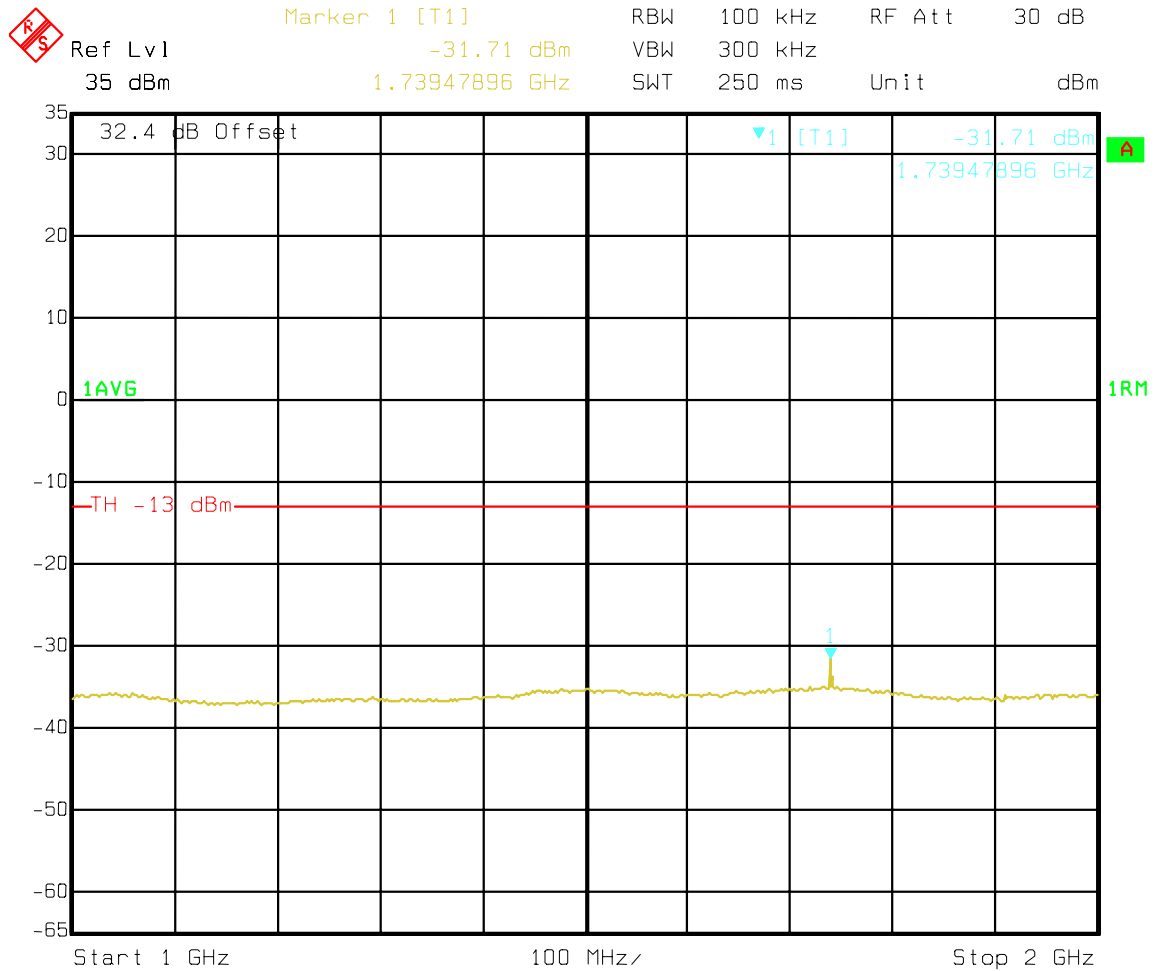


Date: 07.JAN.2005 19:32:54

Figure 19 : One Carrier - A'' and A Band IS95 Spurious emissions 1000-2000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 2000-3000 MHz

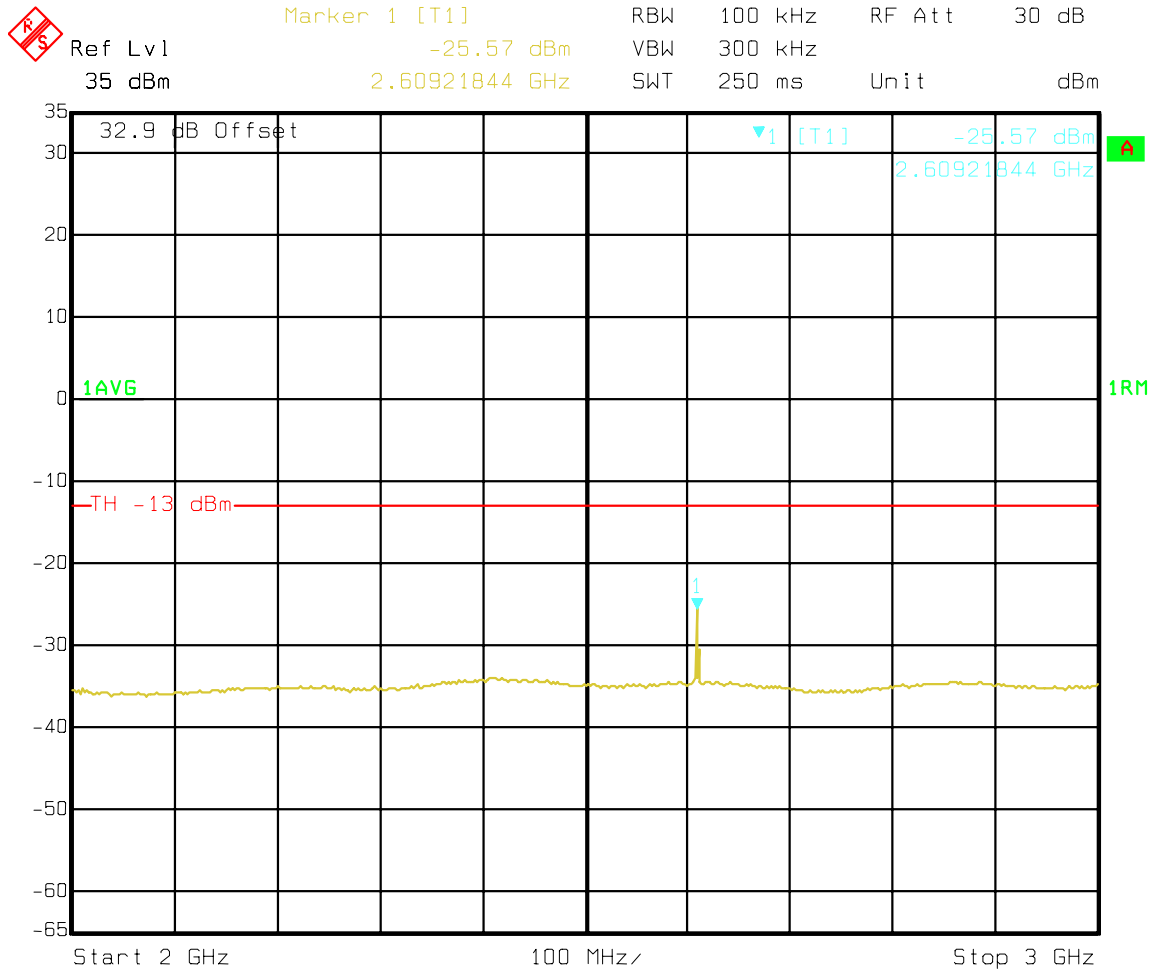


Date: 07.JAN.2005 19:33:20

Figure 20 : One Carrier - A'' and A Band IS95 Spurious emissions 2000-3000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 3000-4000 MHz

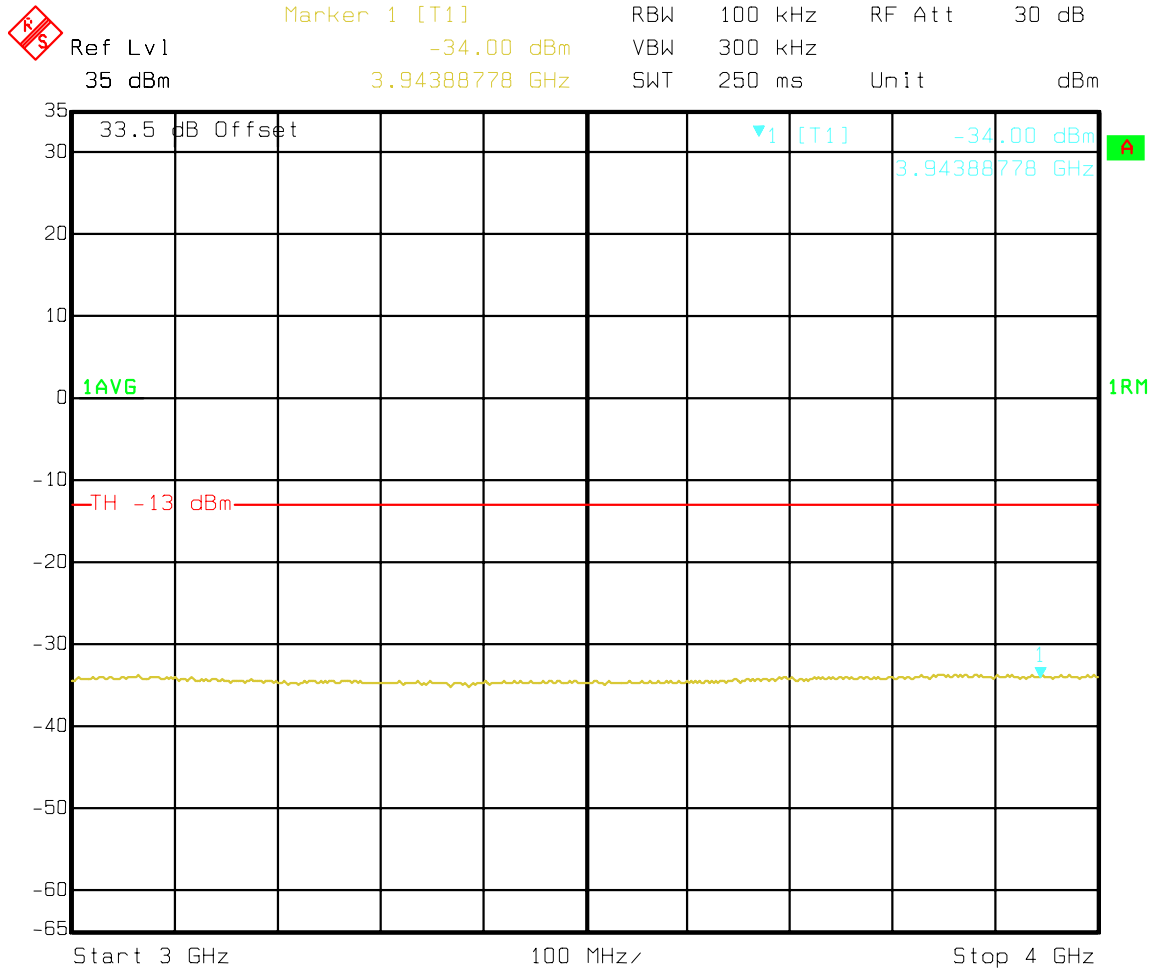


Date: 07.JAN.2005 19:33:47

Figure 21 : One Carrier - A'' and A Band IS95 Spurious emissions 3000-4000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 4000-5000 MHz

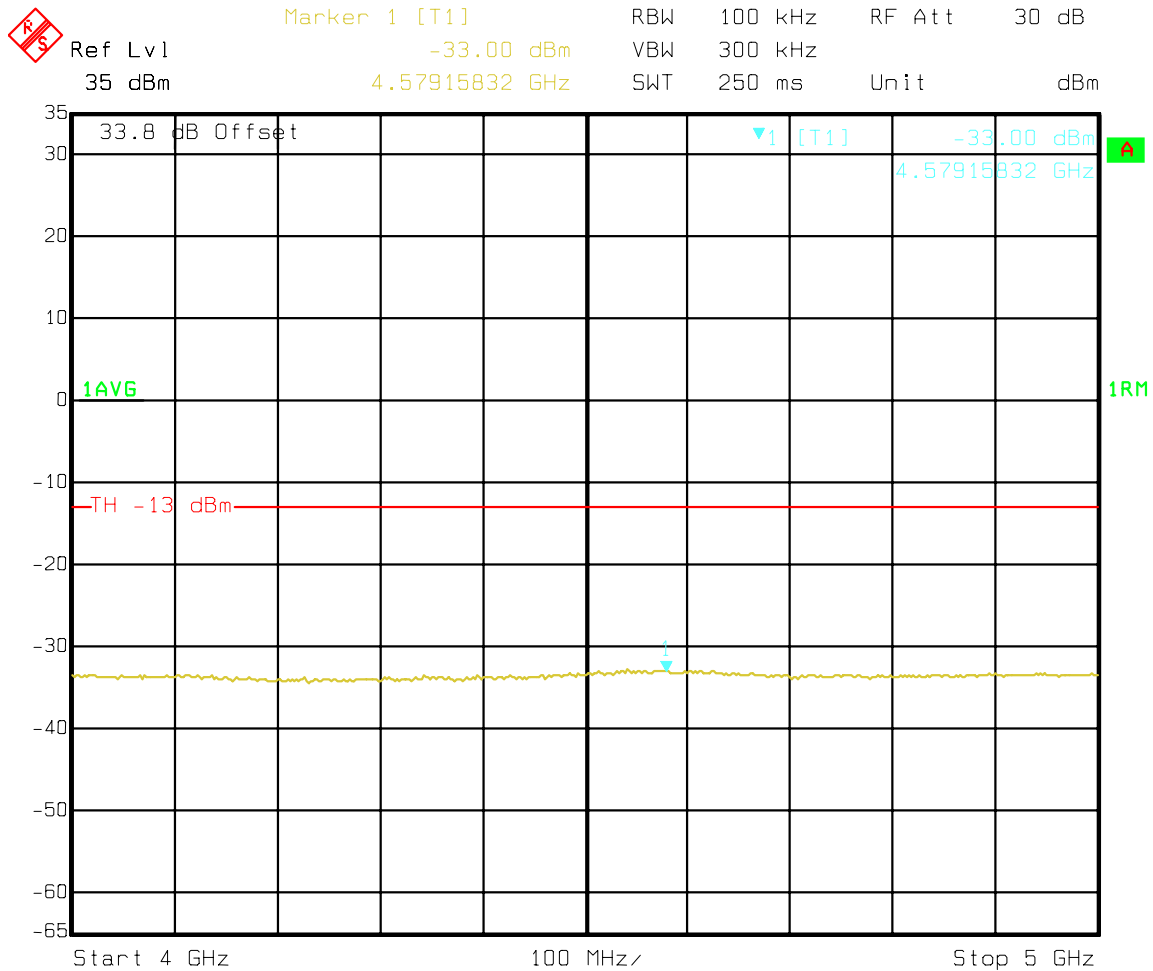


Date: 07.JAN.2005 19:34:14

Figure 22 : One Carrier - A'' and A Band IS95 Spurious emissions 4000-5000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 5000-6000 MHz

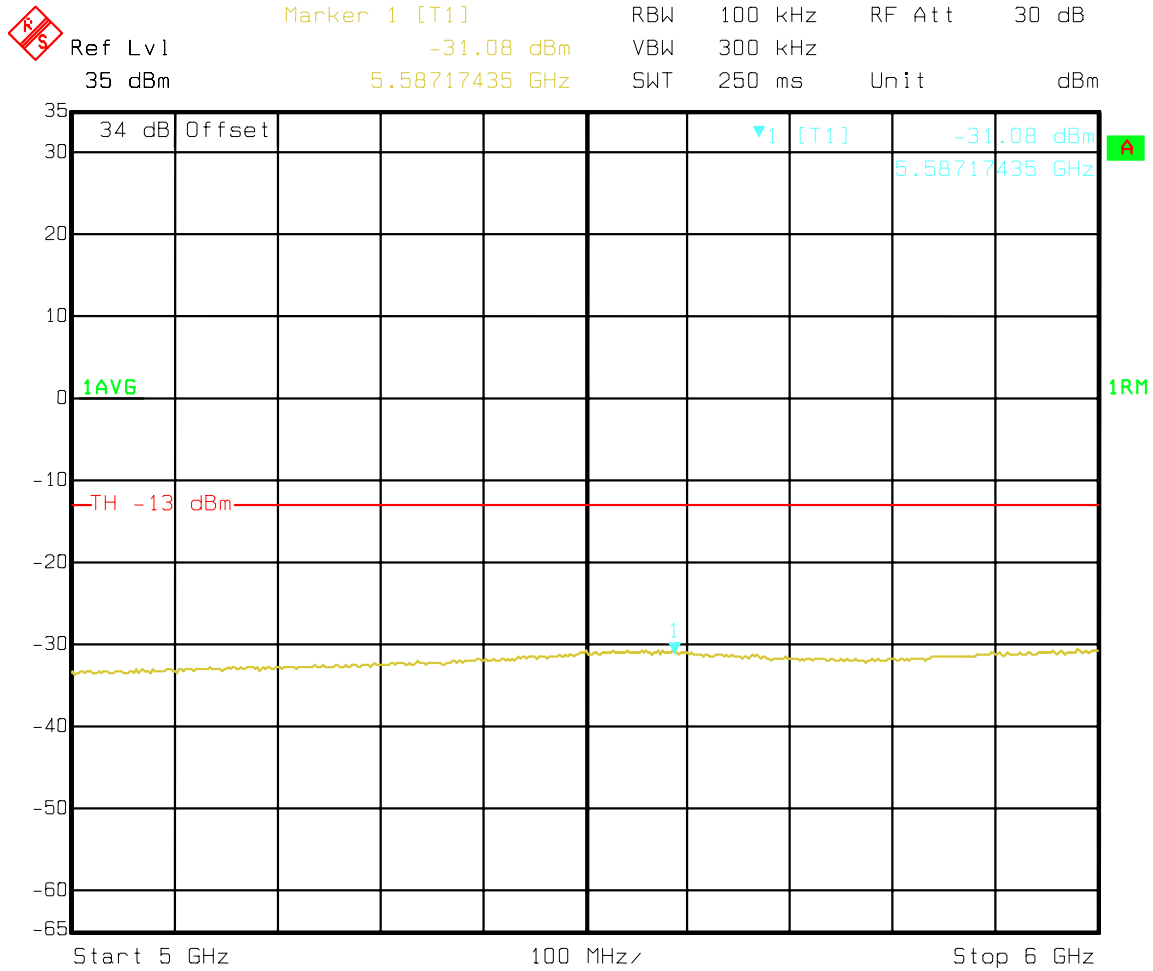

Date: 07.JAN.2005 19:34:41

Figure 23 : One Carrier - A'' and A Band IS95 Spurious emissions 5000-6000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 6000-7000 MHz


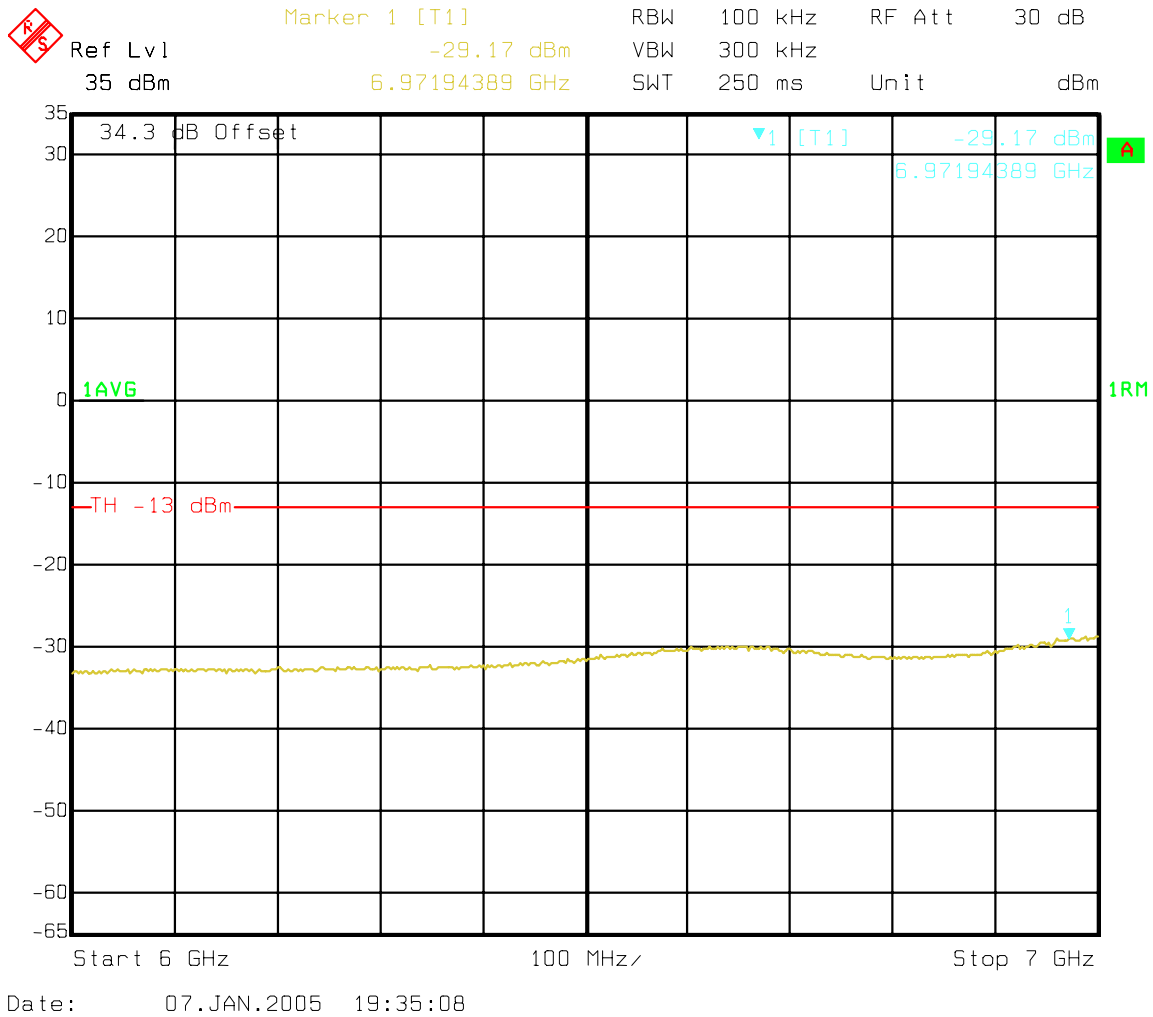


Figure 24 : One Carrier - A'' and A Band IS95 Spurious emissions 6000-7000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 7000-8000 MHz

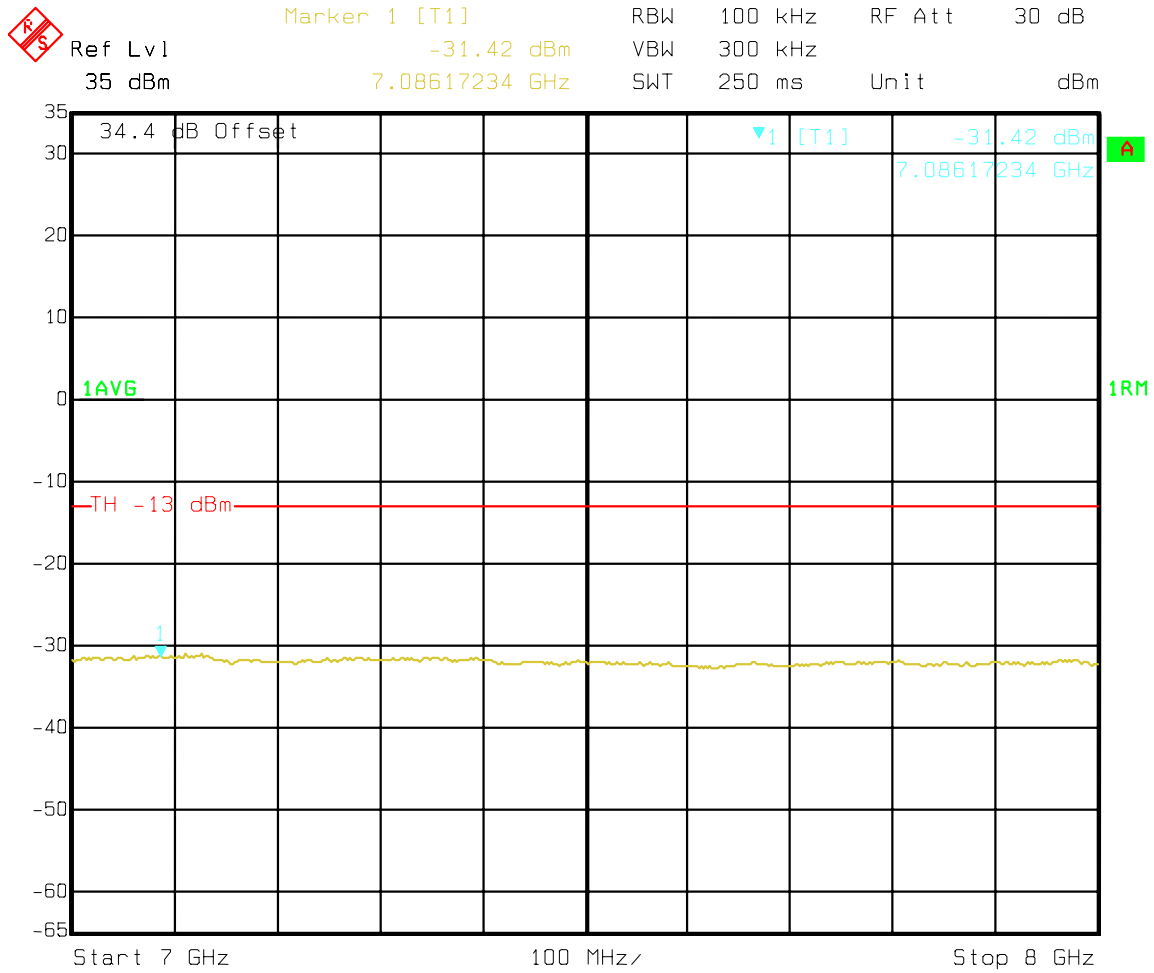


Date: 07.JAN.2005 19:35:36

Figure 25 : One Carrier - A'' and A Band IS95 Spurious emissions 7000-8000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 8000-9000 MHz

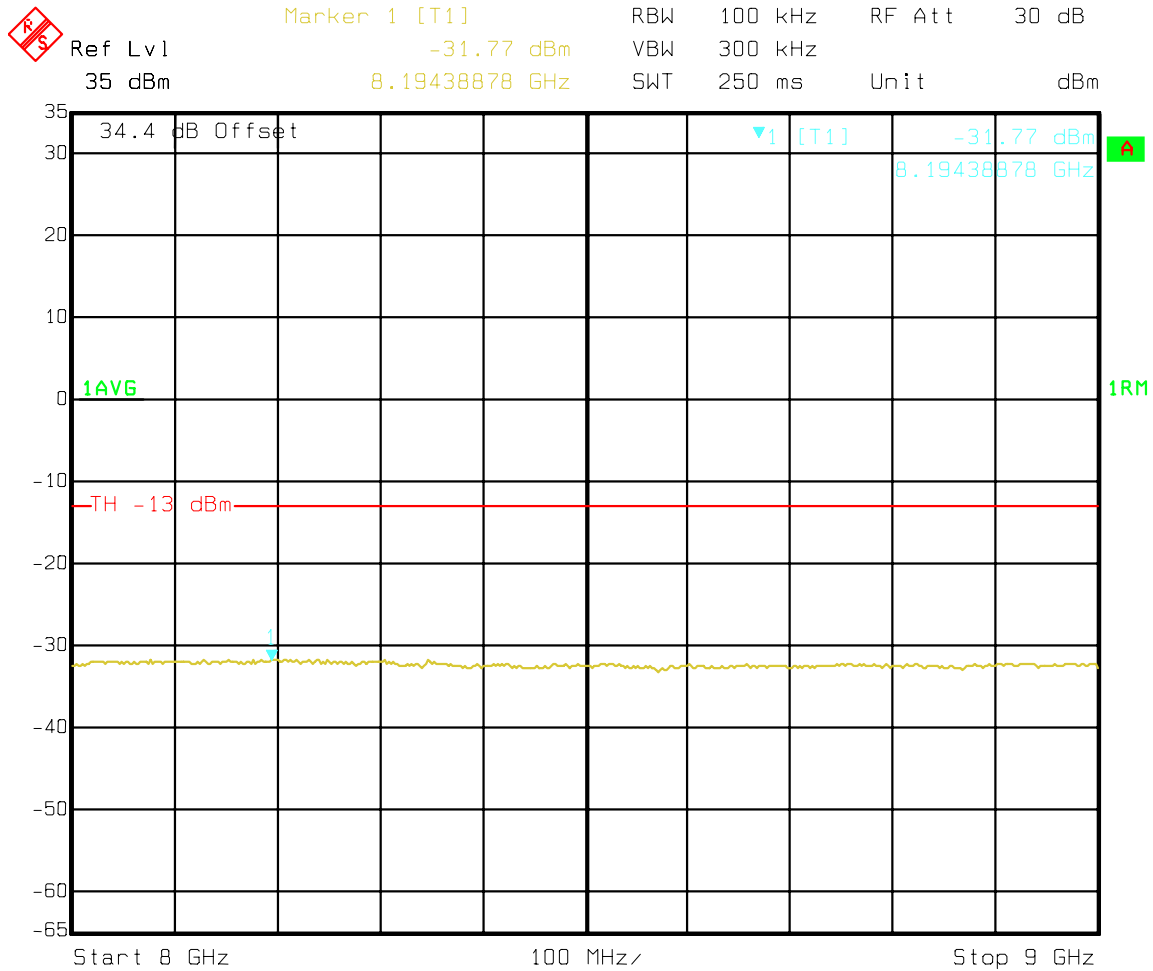


Date: 07.JAN.2005 19:36:02

Figure 26 : One Carrier - A'' and A Band IS95 Spurious emissions 8000-9000 MHz

Single Chan 1015 and 308 IS95 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port one Carrier band A and A'' IS95

A'' and A Band IS95 Spurious emissions 9000-10000 MHz

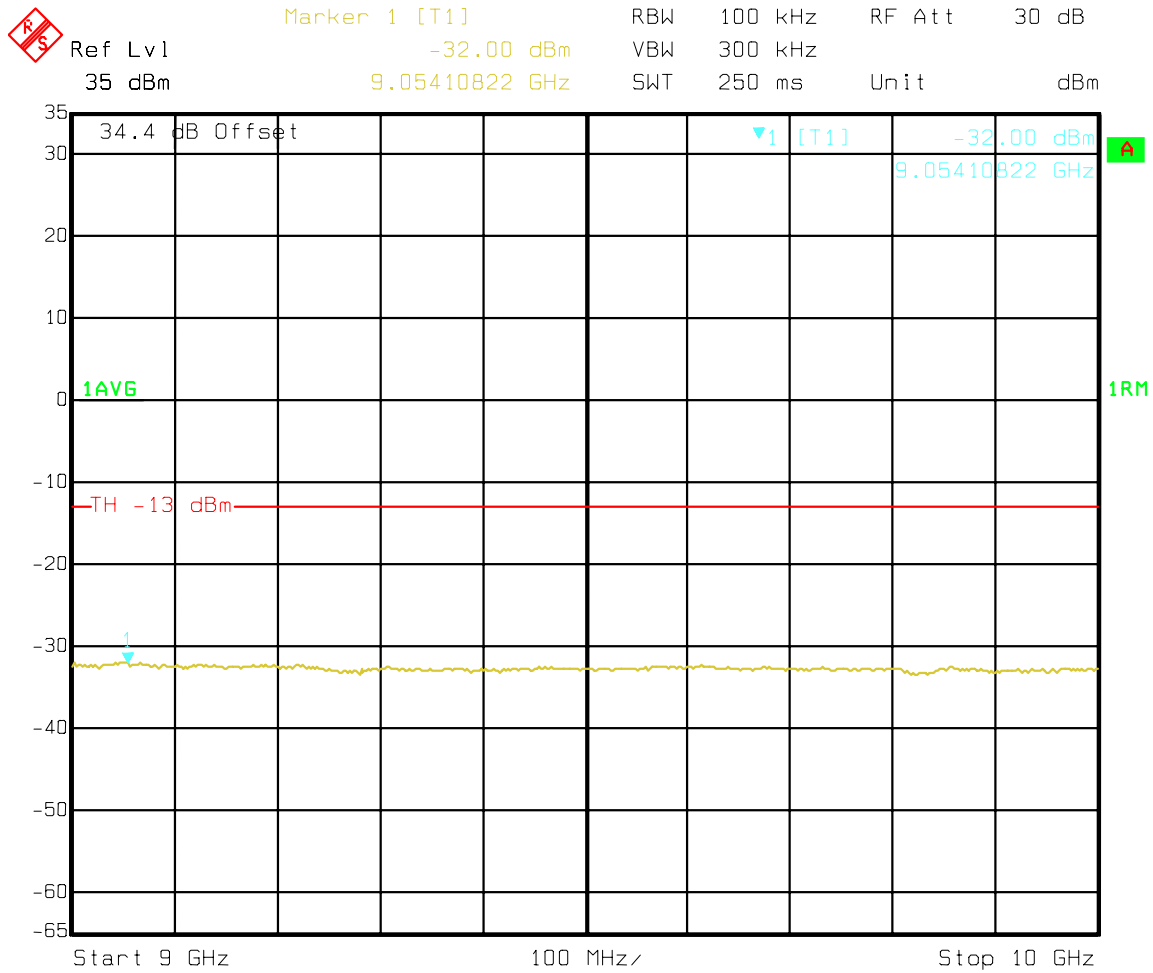

Date: 07.JAN.2005 19:36:30

Figure 27 : One Carrier - A'' and A Band IS95 Spurious emissions 9000-10000 MHz

6 Appendix B - Two Carriers IS-95 Spurious Emission

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

Occupied Bandwidth Ch 358, 399 Band B

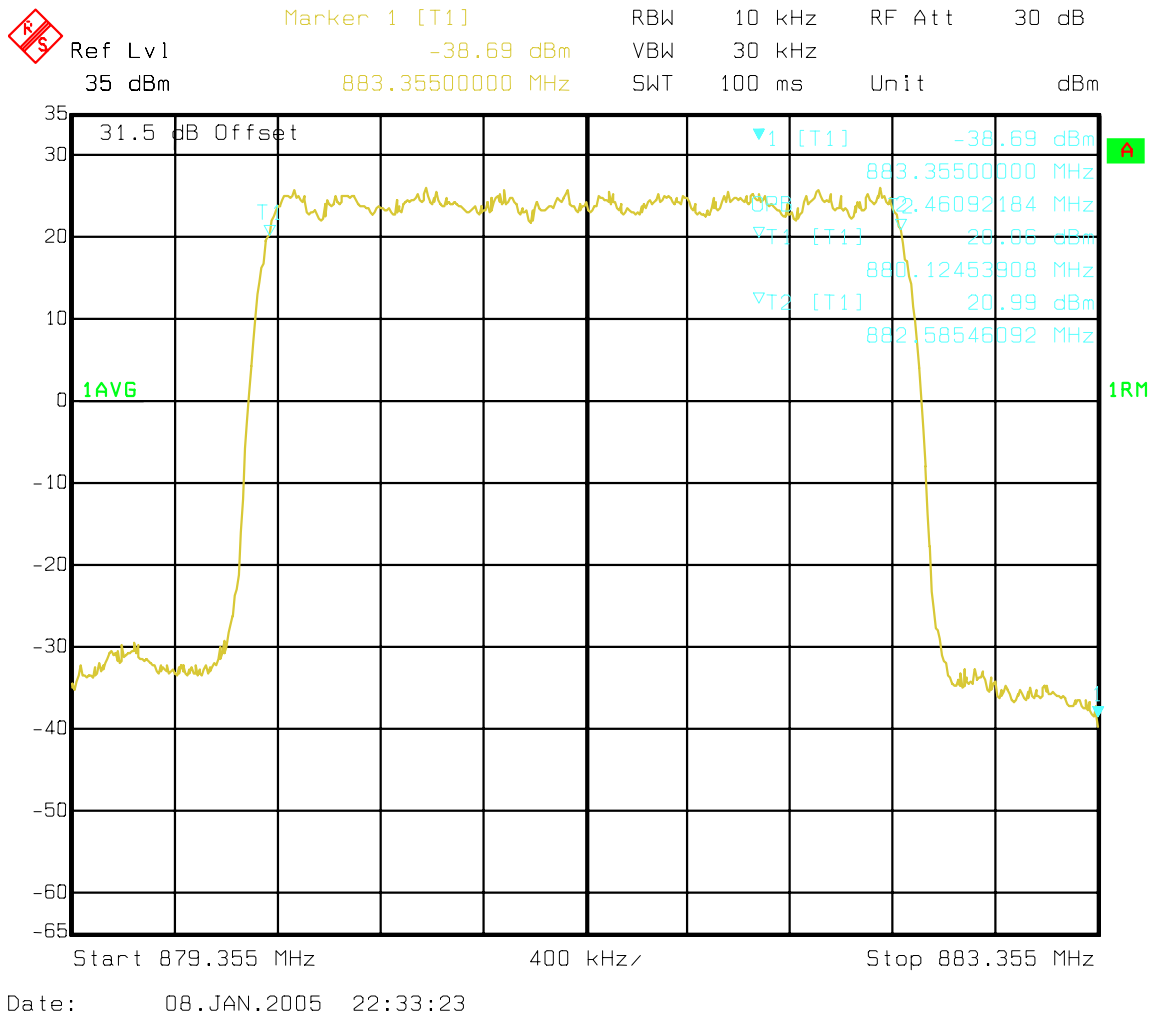


Figure 28 : Two Carriers - Occupied Bandwidth Ch 358, 399 Band B

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band Ch 358, 399 IS95 Adjacent 1 MHz Lower emissions 879-880 MHz

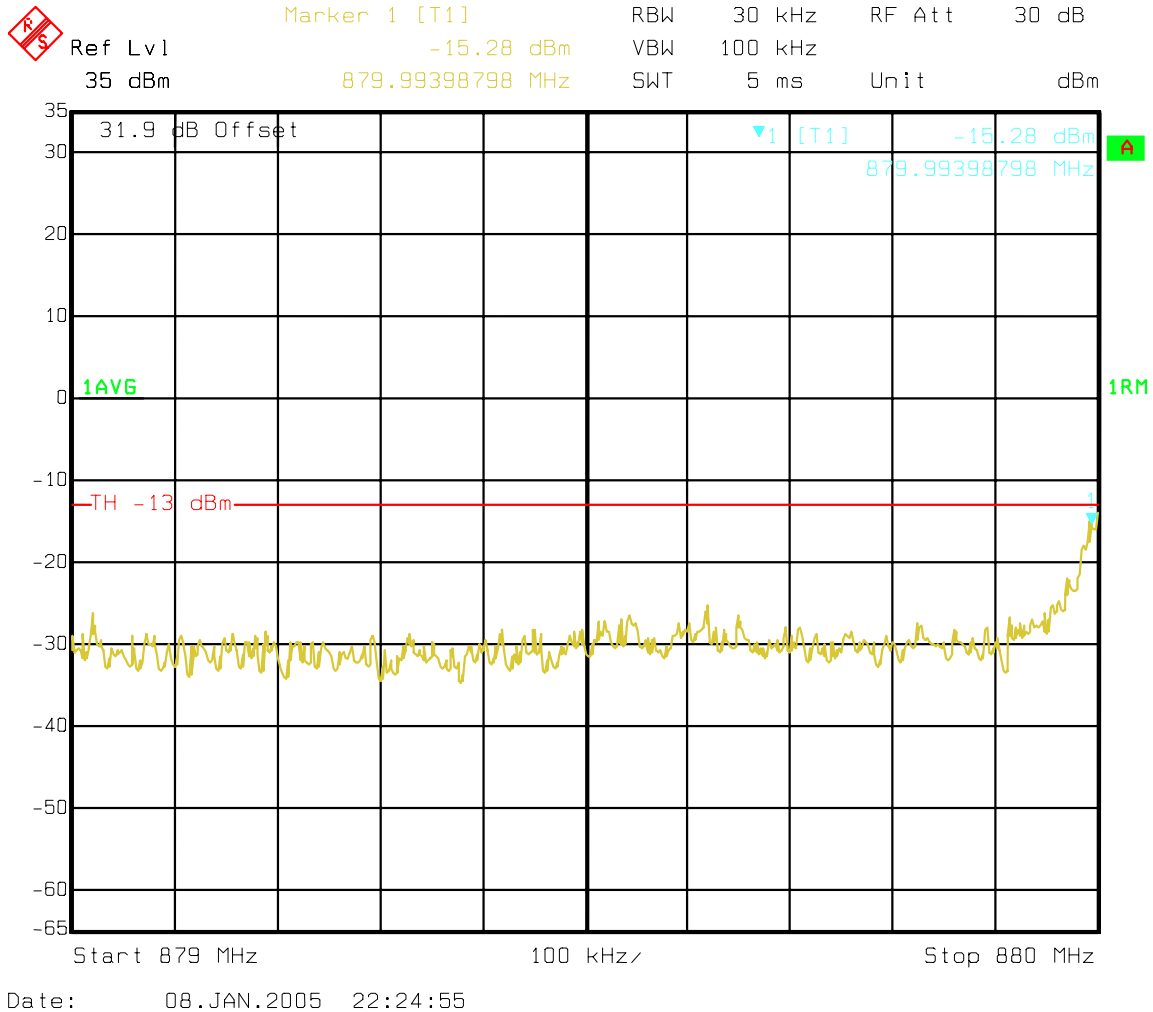


Figure 29 : Two Carriers - B Band Ch. 358, 399 IS95 Adjacent 1 MHz Lower emissions 879-880 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

Ch358, 399 IS95 Lower B Band Adjacent to outside edge 25kHz band Channel Power

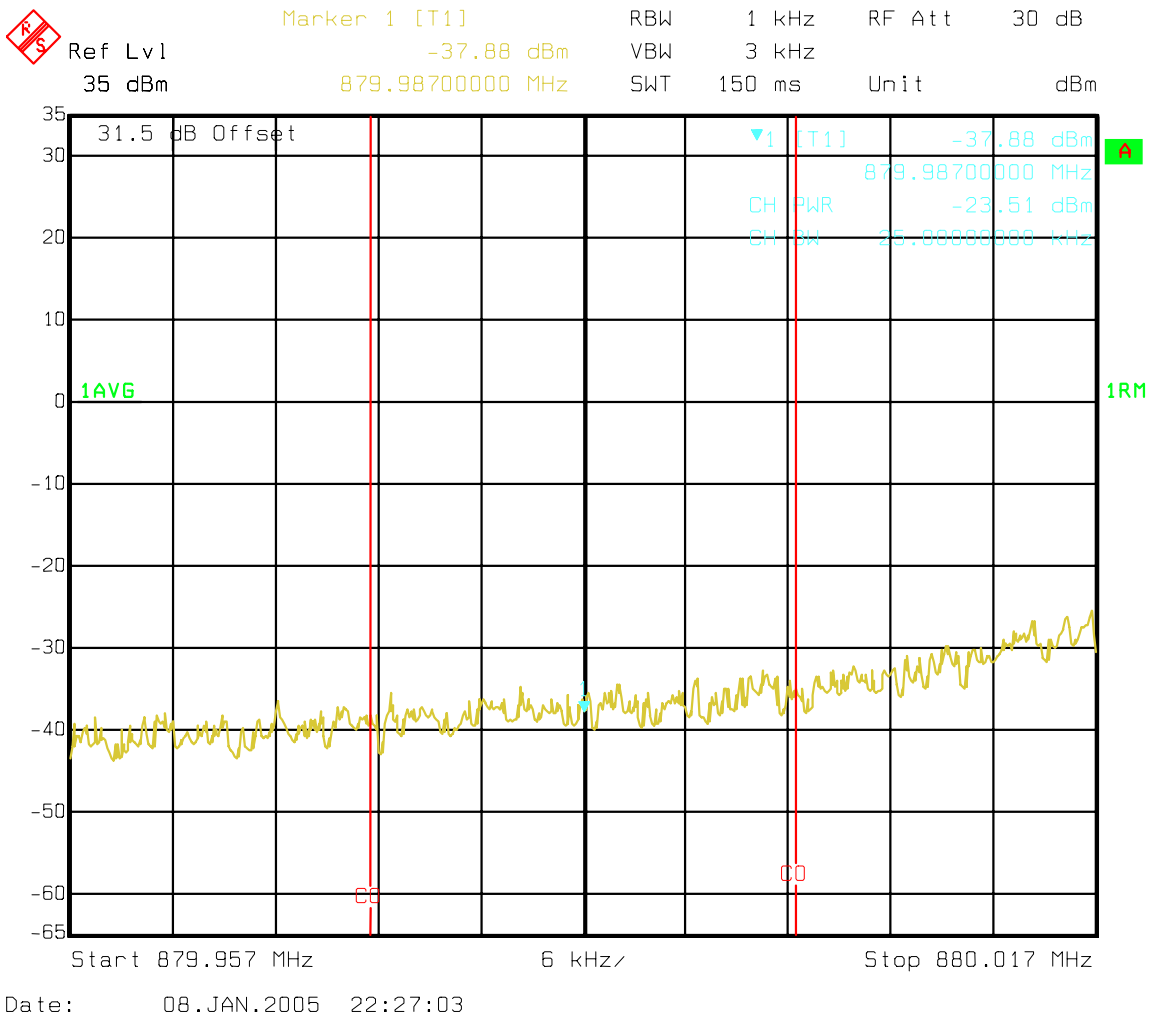


Figure 30 : Two Carriers - Ch358, 399 IS95 Lower BBand Adjacent to outside edge 25kHz band Channel Power

**Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz
Optimized Radio Module Ant. Port band B IS95**

Ch 601, 642 Upper a Band adjacent 1 MHz band emissions 890-891 MHz

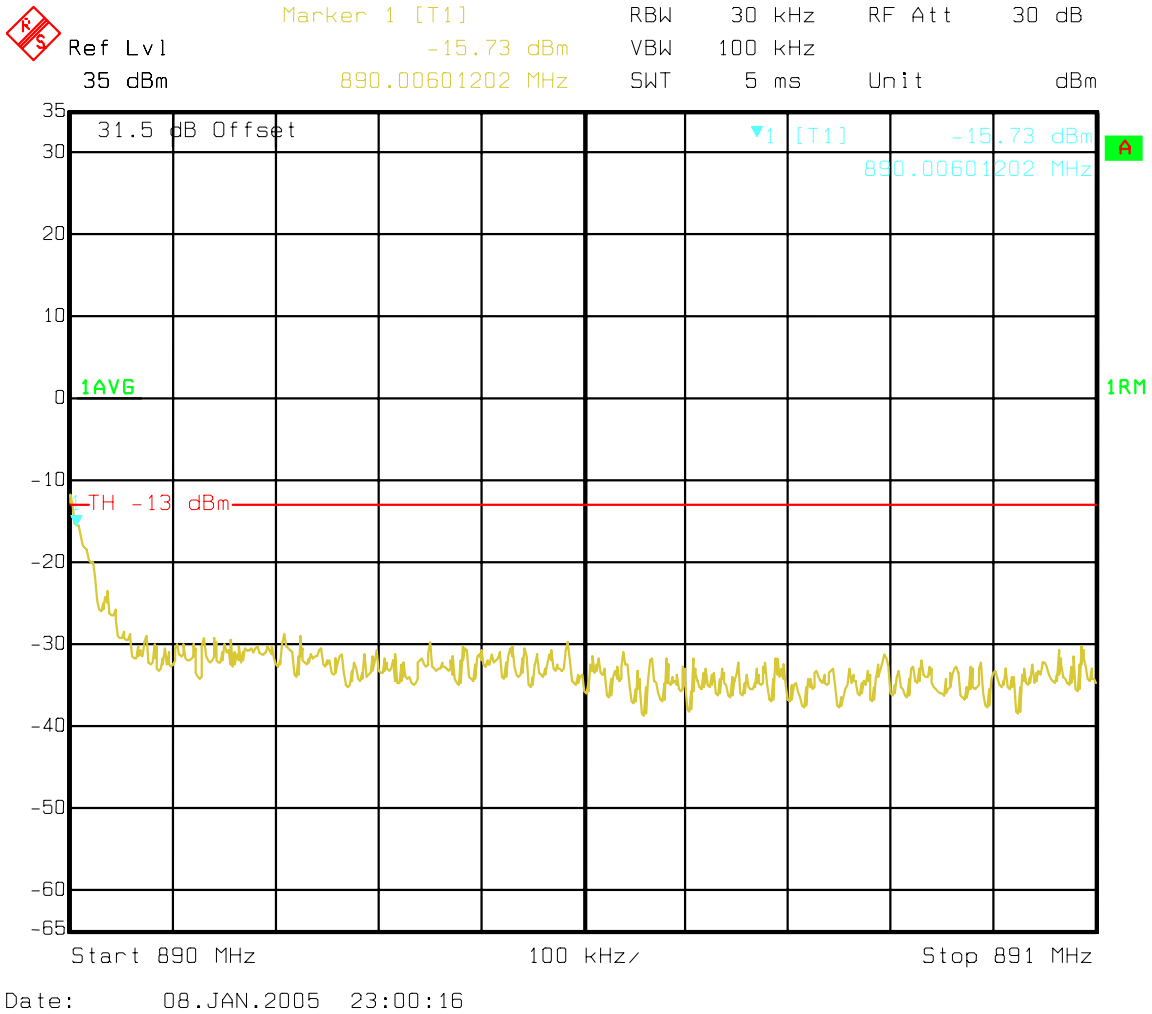


Figure 31 : Two Carriers - Ch 601, 642 Upper a Band adjacent 1 MHz band emissions 890-891 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

Ch 601, 642 Upper B Band adjacent to outside edge 25.0 kHz band Channel power

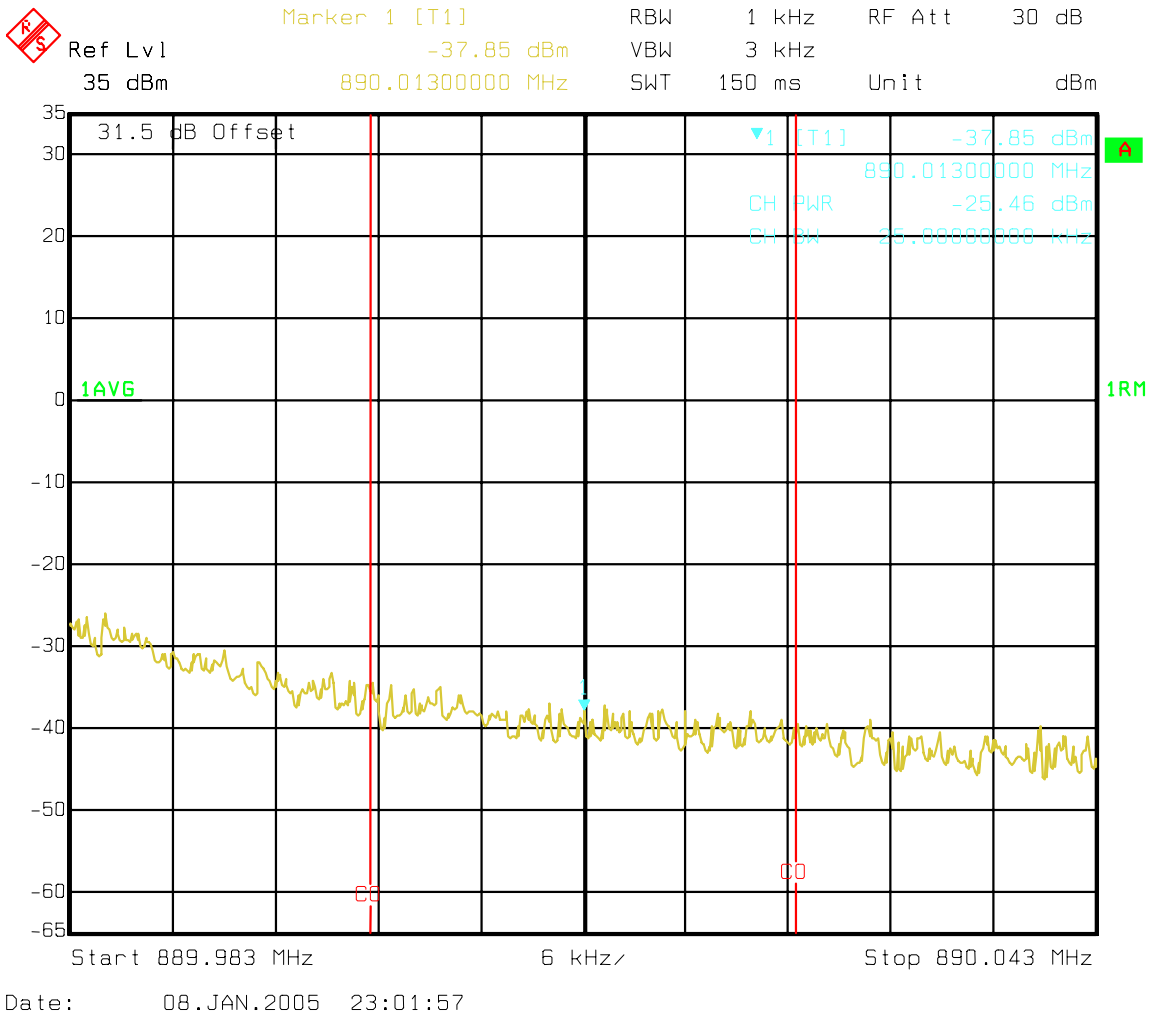


Figure 32 : Two Carriers - Ch 601, 642 Upper A Band adjacent to outside edge 25.0 kHz band Channel power

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 358, 399

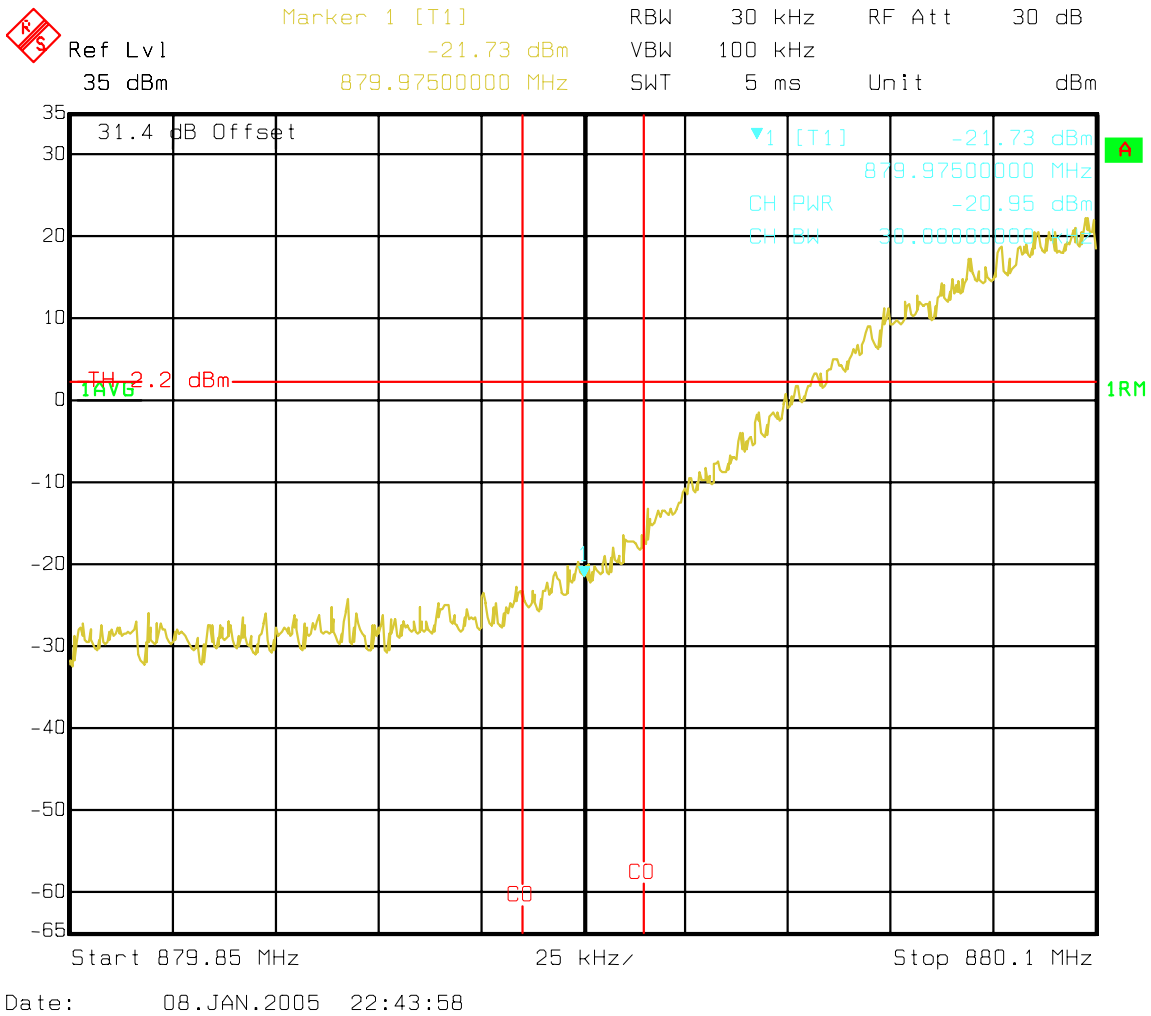


Figure 33 : Two Carriers - Industry Canada Lower 750 kHz offset 30 kHz Chan Power Ch 358, 399

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 358, 399

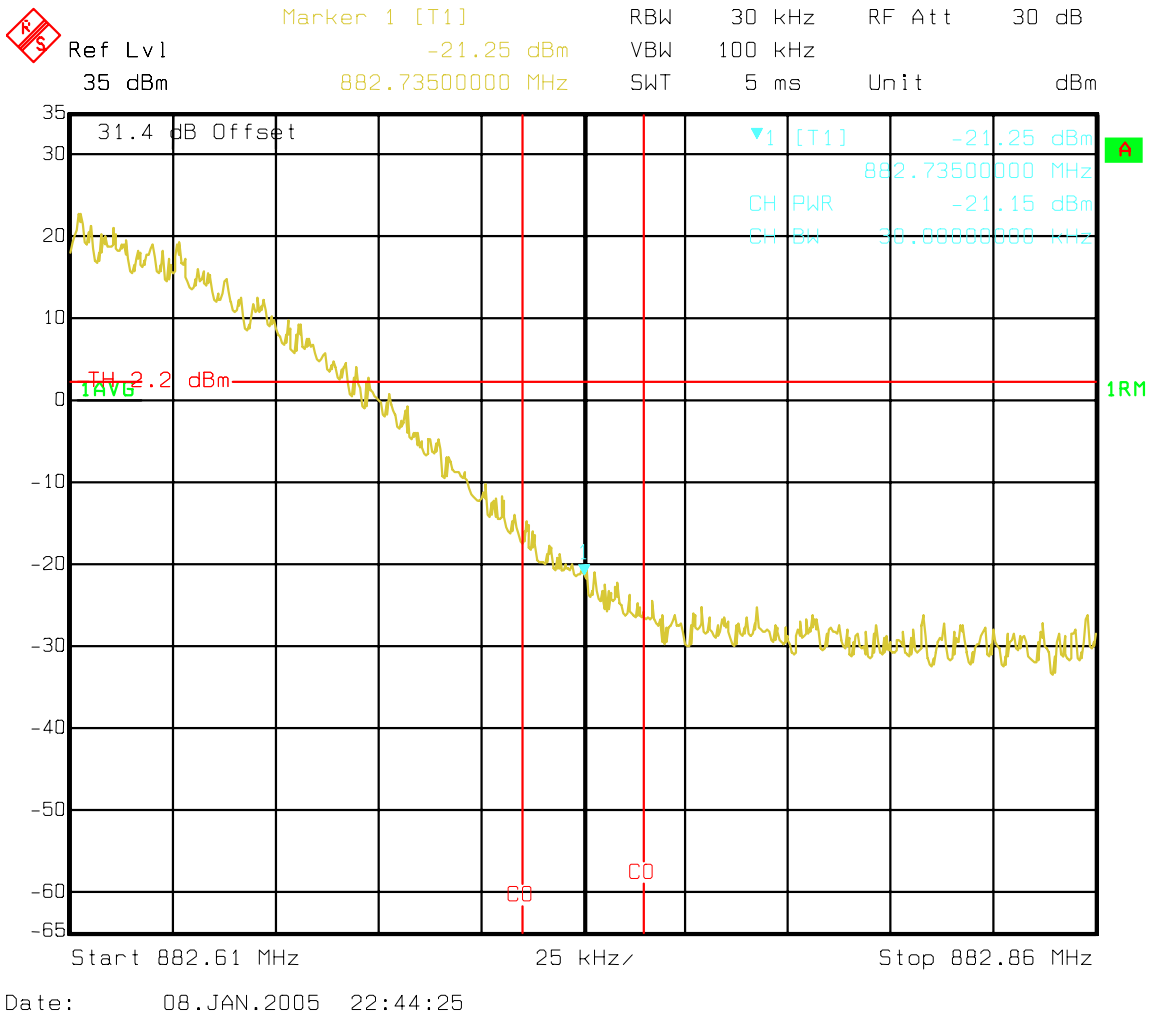


Figure 34 : Two Carriers - Industry Canada Upper 750 kHz offset 30 kHz Chan Power Ch 358, 399

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 358, 399

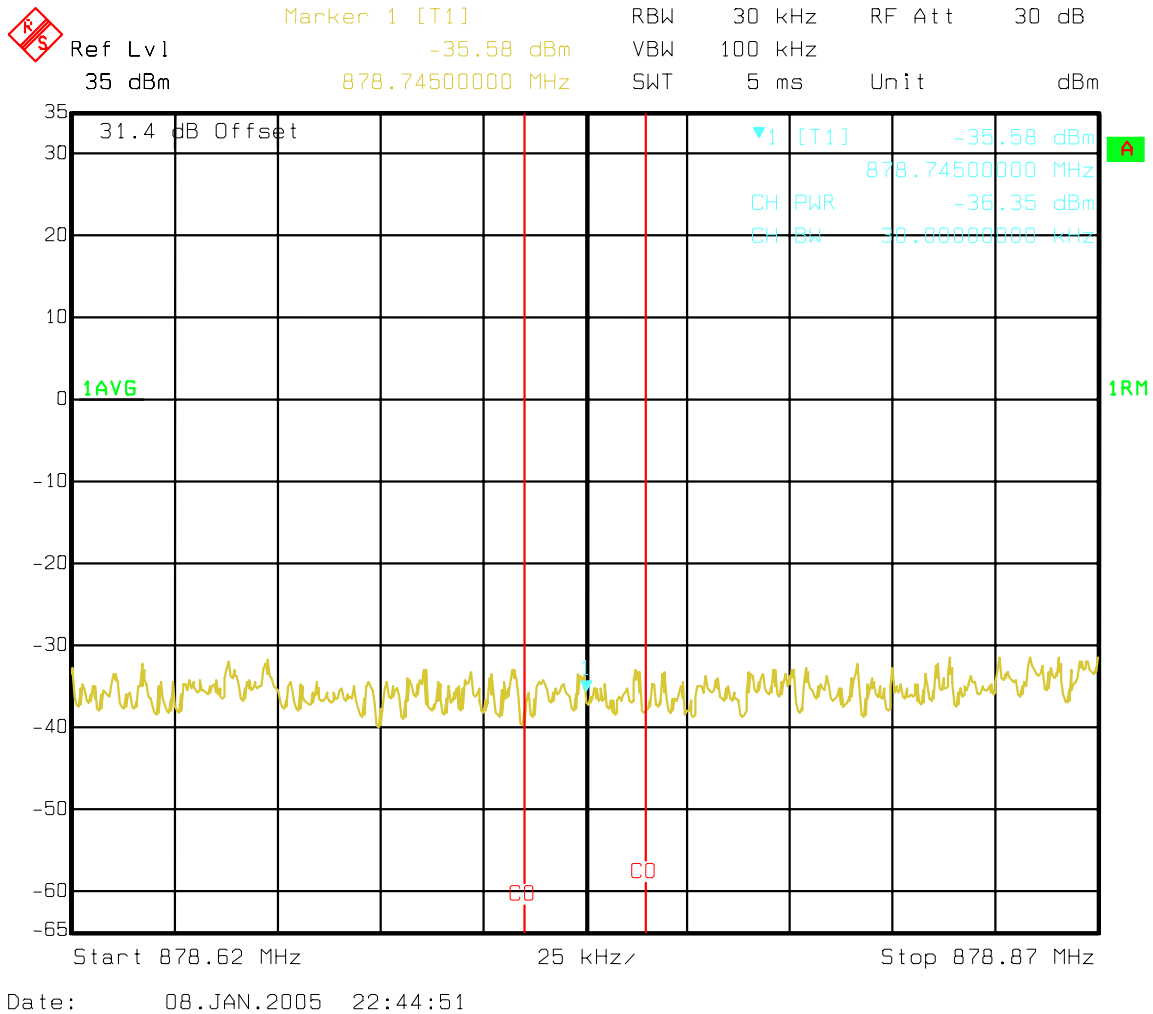


Figure 35 : Two Carriers - Industry Canada 1.98 MHz offset Lower 30 kHz Chan Power Ch 358, 399

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 358, 399

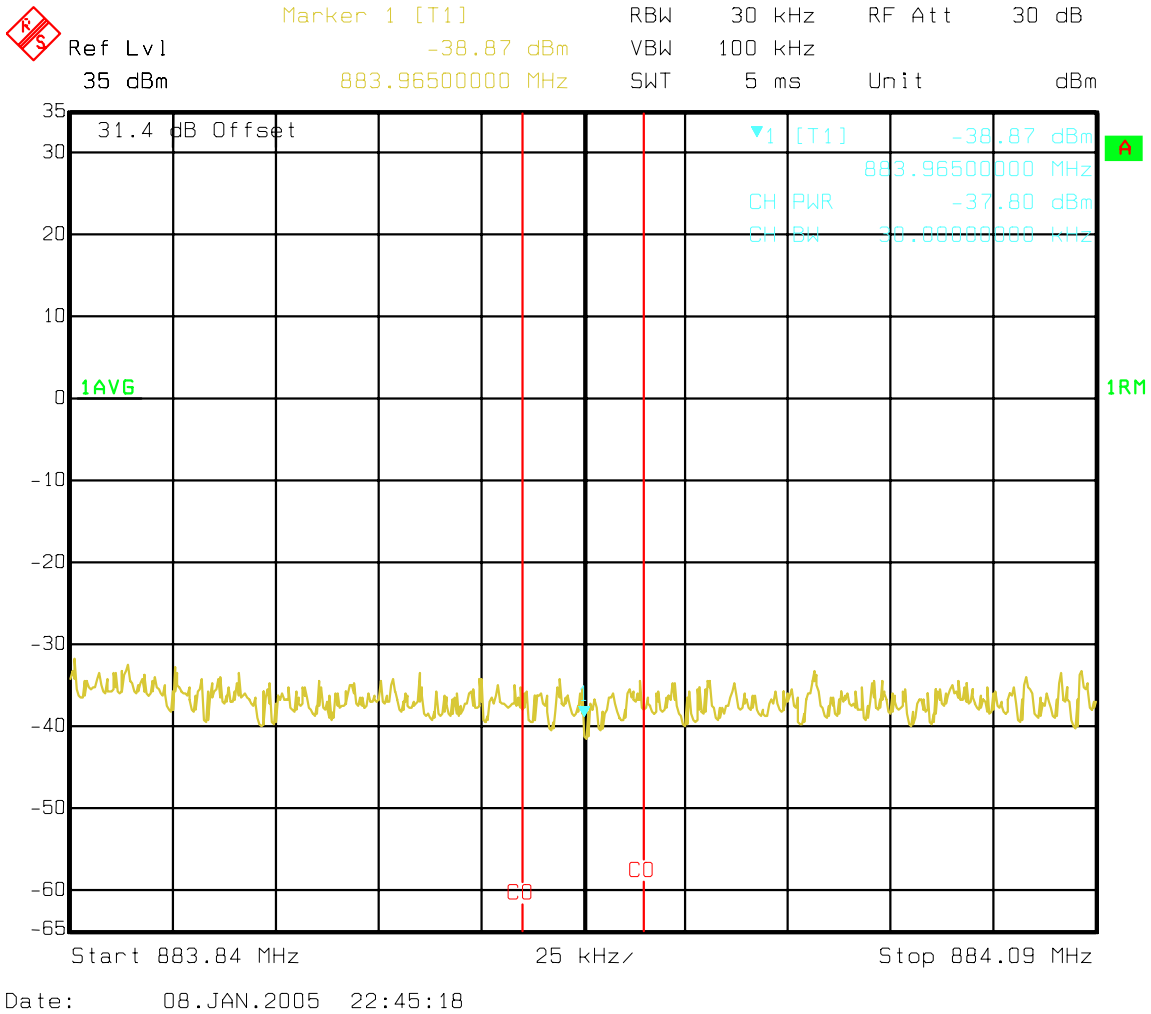


Figure 36 : Two Carriers - Industry Canada 1.98 MHz offset Upper 30 kHz Chan Power Ch 358, 399

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 10kHz-400 MHz

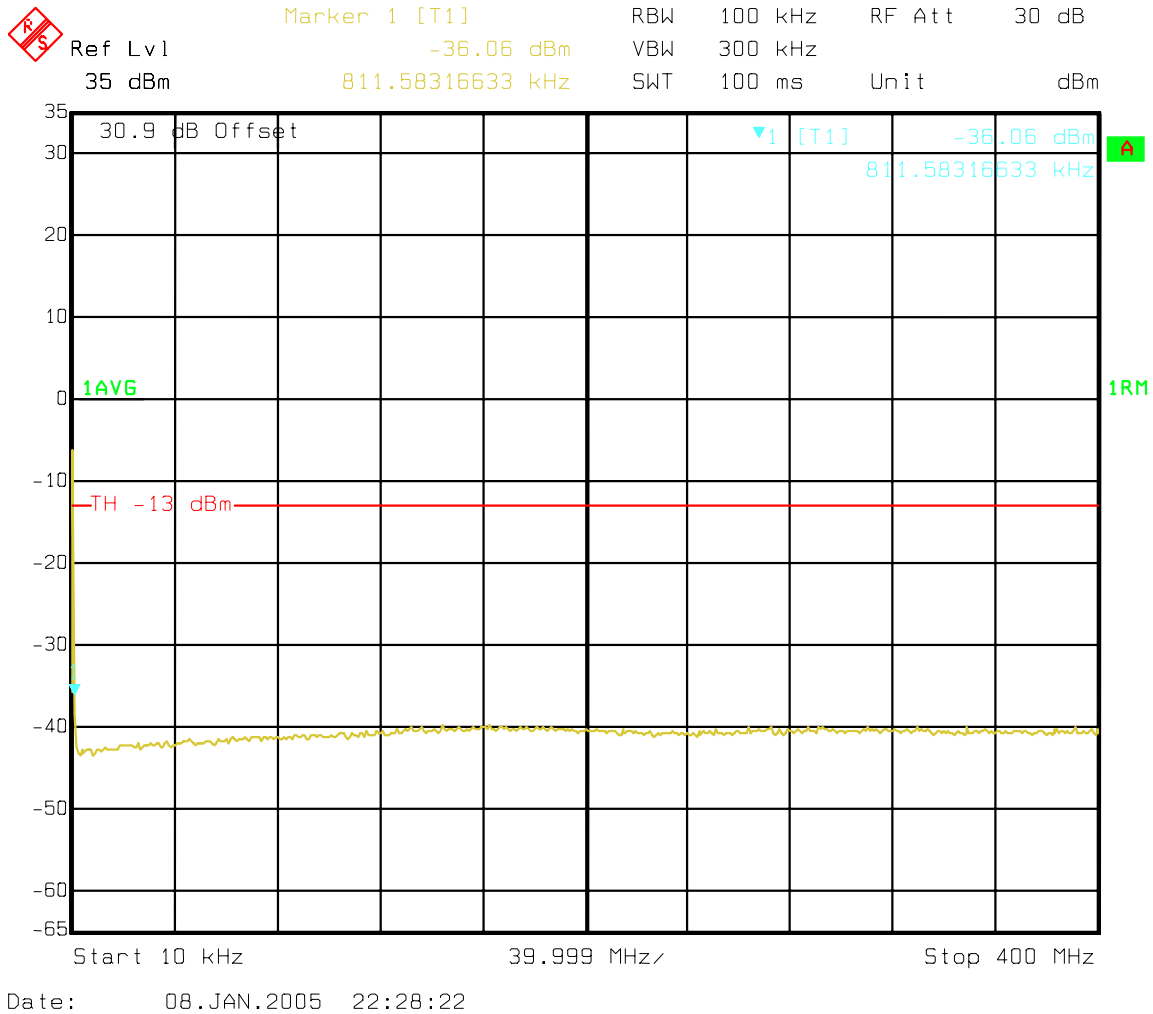


Figure 37 : Two Carriers - B Band IS95 Spurious emissions 10kHz-400 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 400 MHz to Lower 1 MHz Band Edge

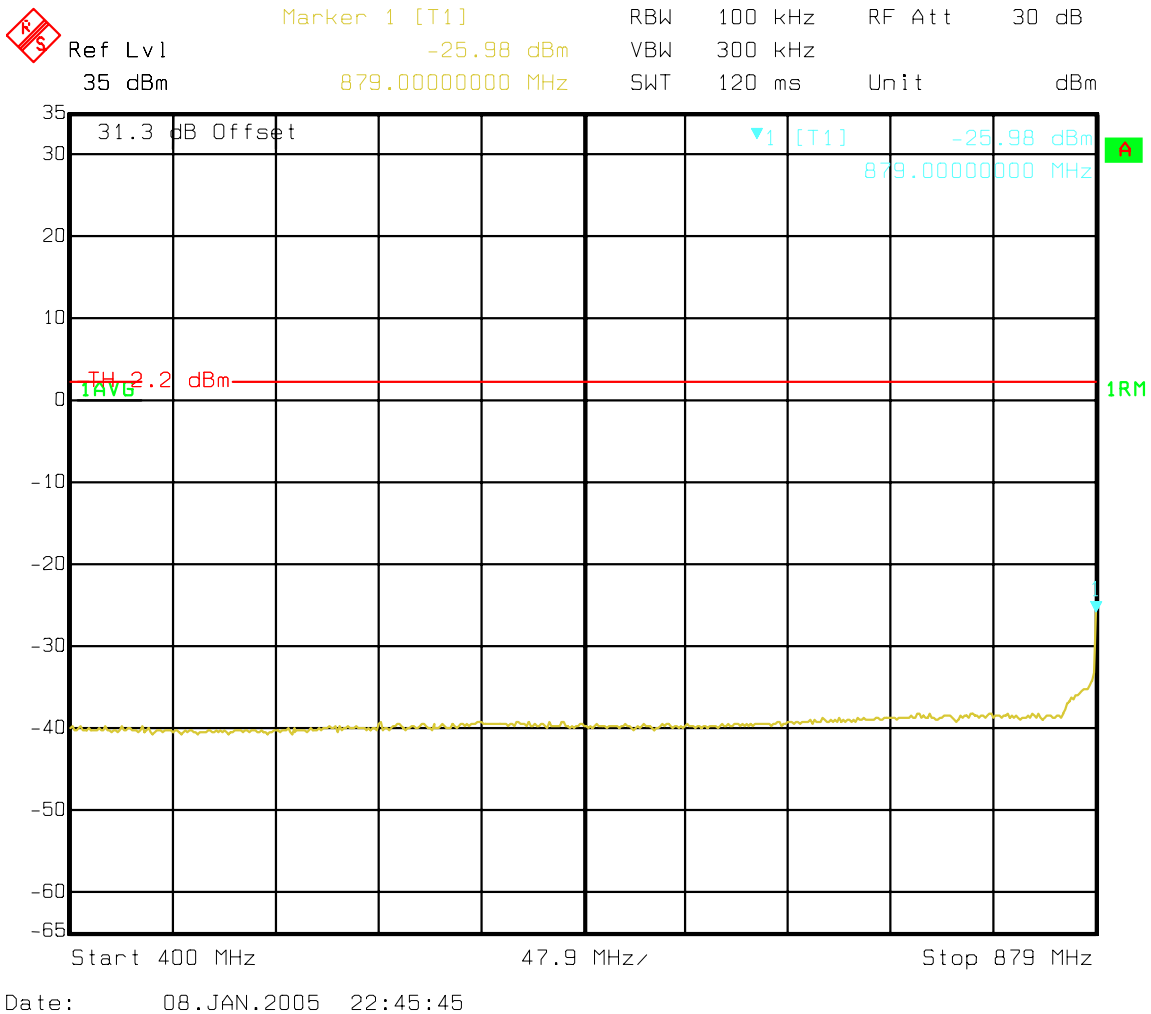


Figure 38 : Two Carriers - B Band IS95 Spurious emissions 400 MHz to Lower 1 MHz Band Edge

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions Upper 1 MHz Band Edge to 1 GHz

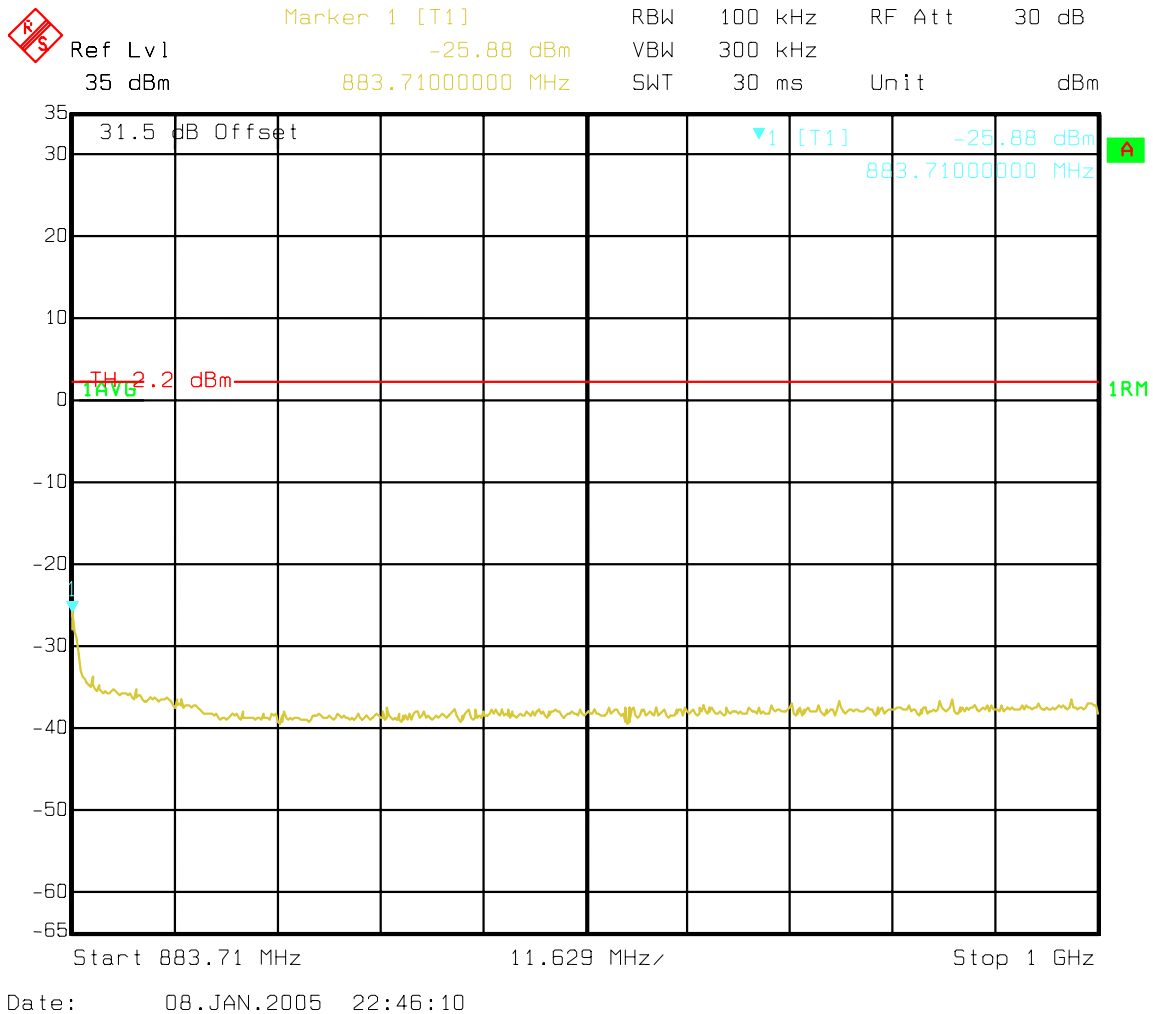


Figure 39 : Two Carriers - B Band IS95 Spurious emissions Upper 1 MHz Band Edge to 1 GHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 400-1000 MHz

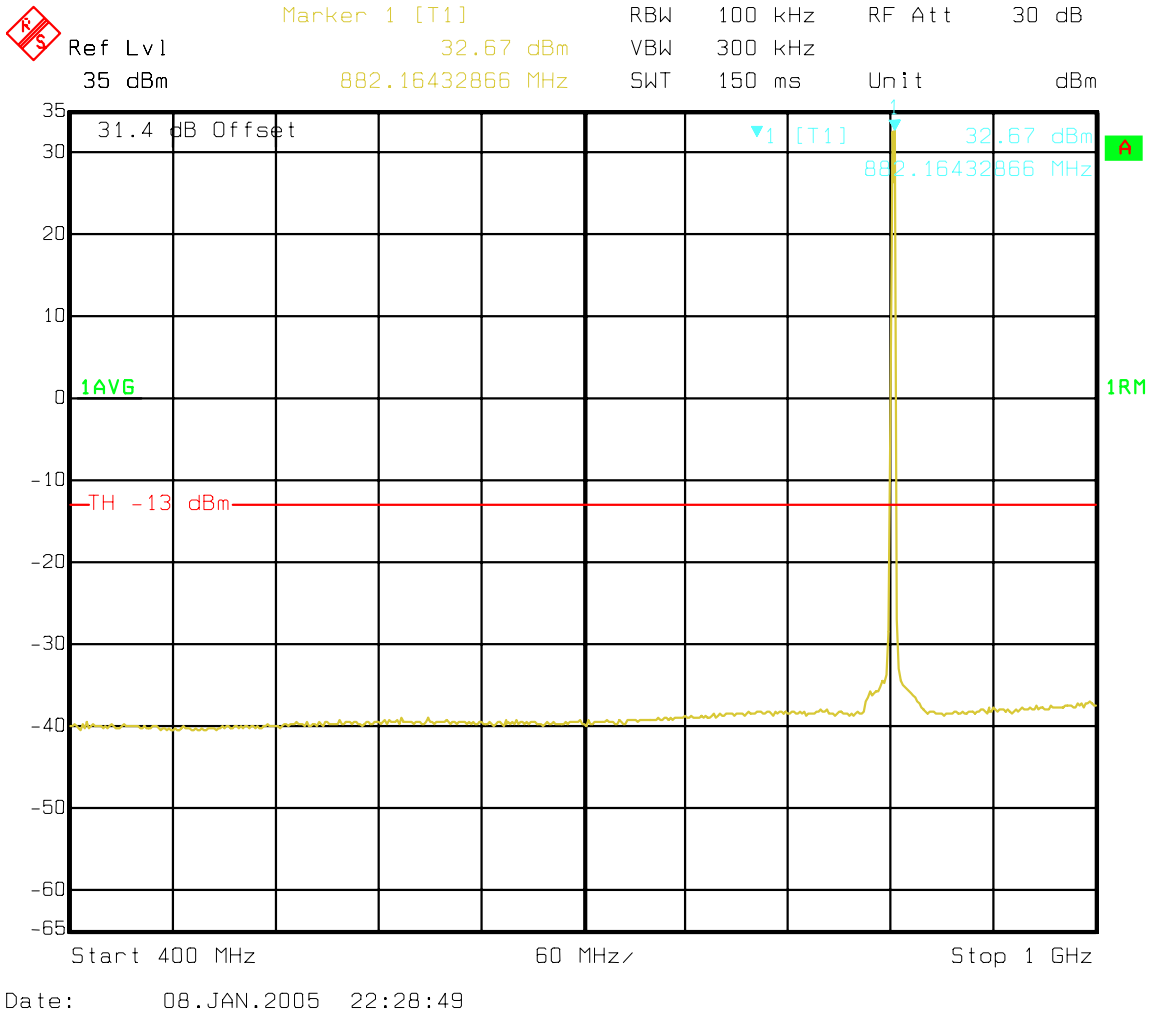


Figure 40 : Two Carriers - B Band IS95 Spurious emissions 400-1000 MHz

**Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz
OPTIMIZED RADIO MODULE Ant. Port band B IS95**

B Band IS95 Spurious emissions 1000-2000 MHz

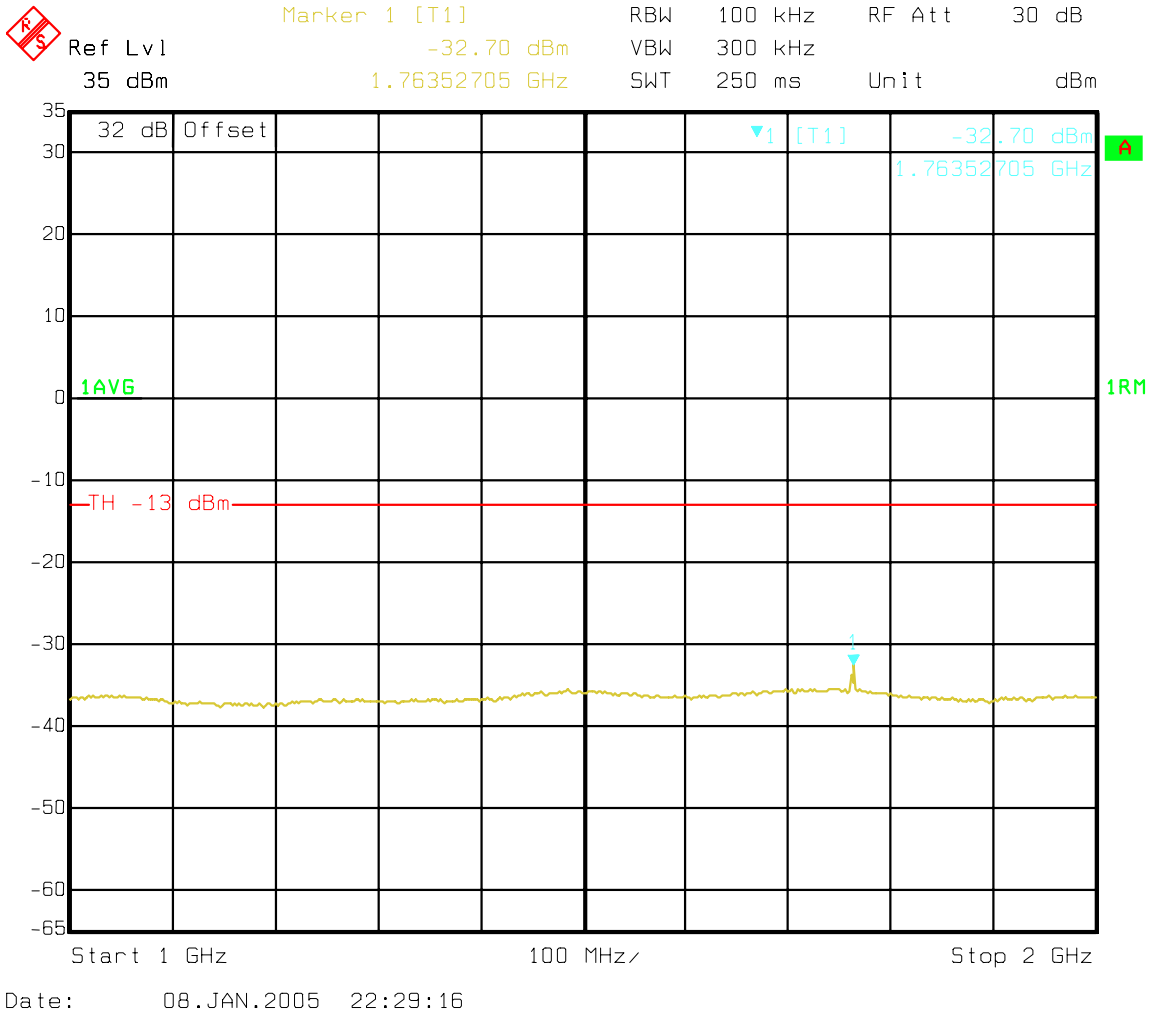


Figure 41 : Two Carriers - B Band IS95 Spurious emissions 1000-2000 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 2000-3000 MHz

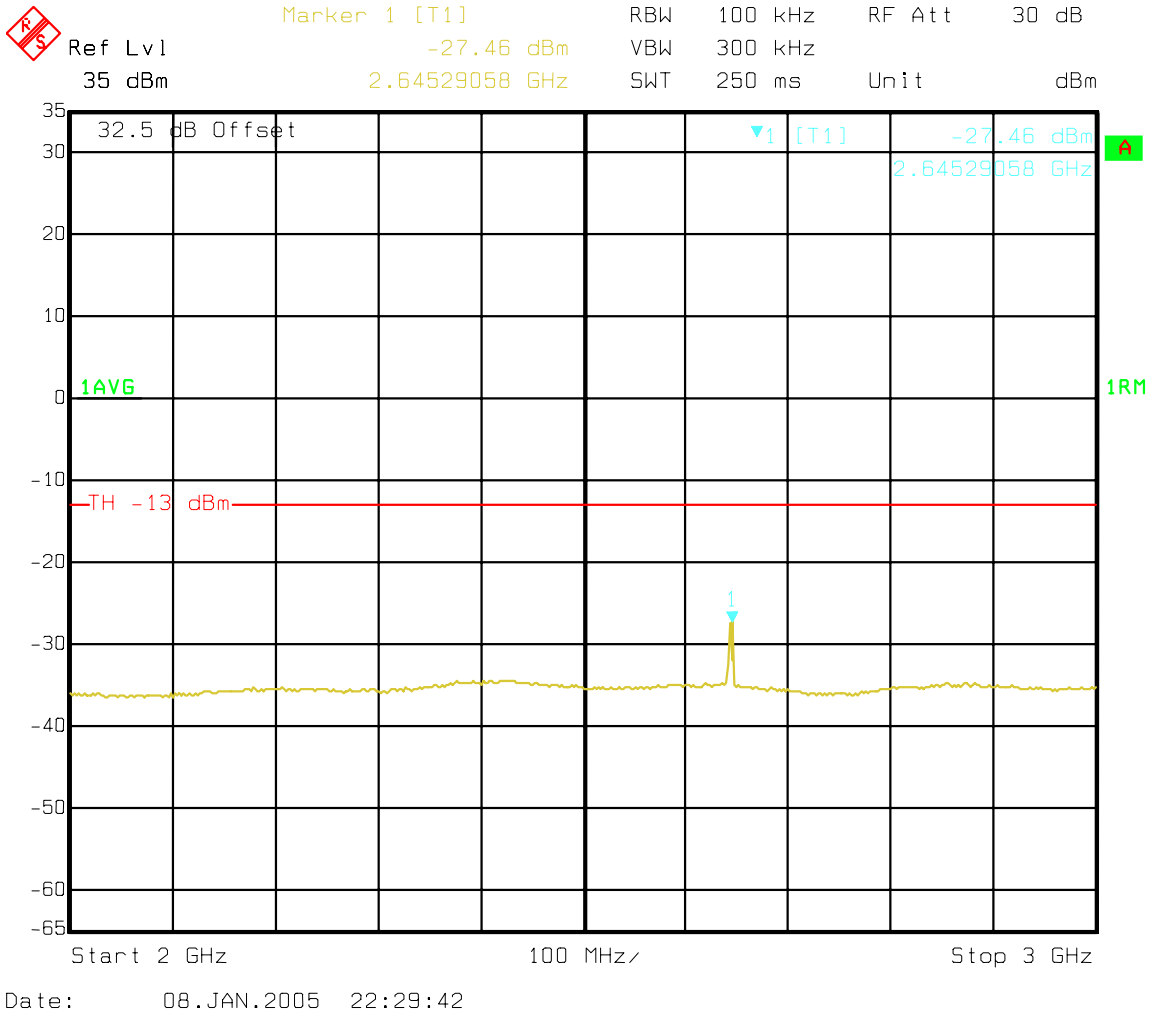


Figure 42 : Two Carriers - B Band IS95 Spurious emissions 2000-3000 MHz

**Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz
OPTIMIZED RADIO MODULE Ant. Port band B IS95**

B Band IS95 Spurious emissions 3000-4000 MHz

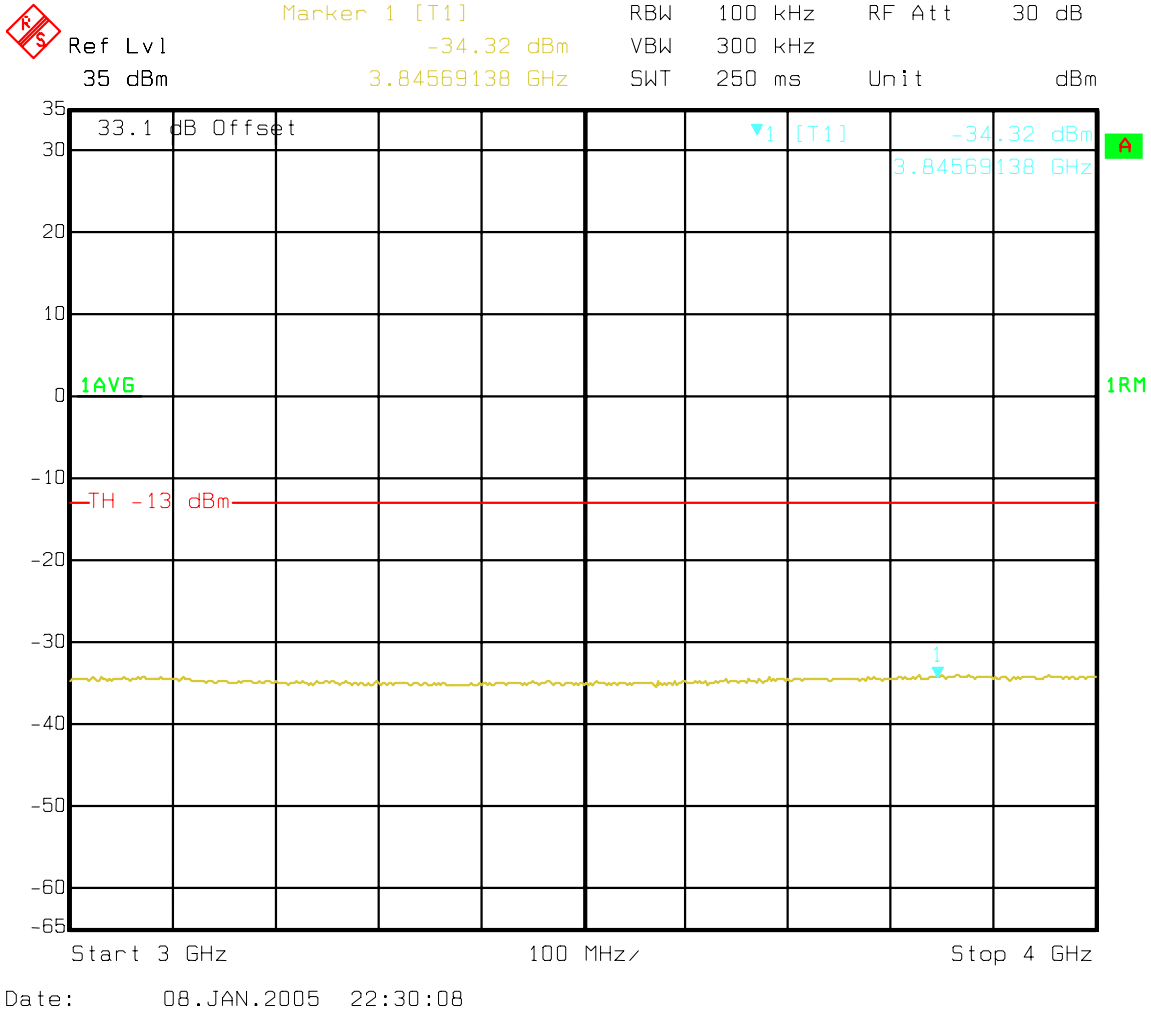


Figure 43 : Two Carriers - B Band IS95 Spurious emissions 3000-4000 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 4000-5000 MHz

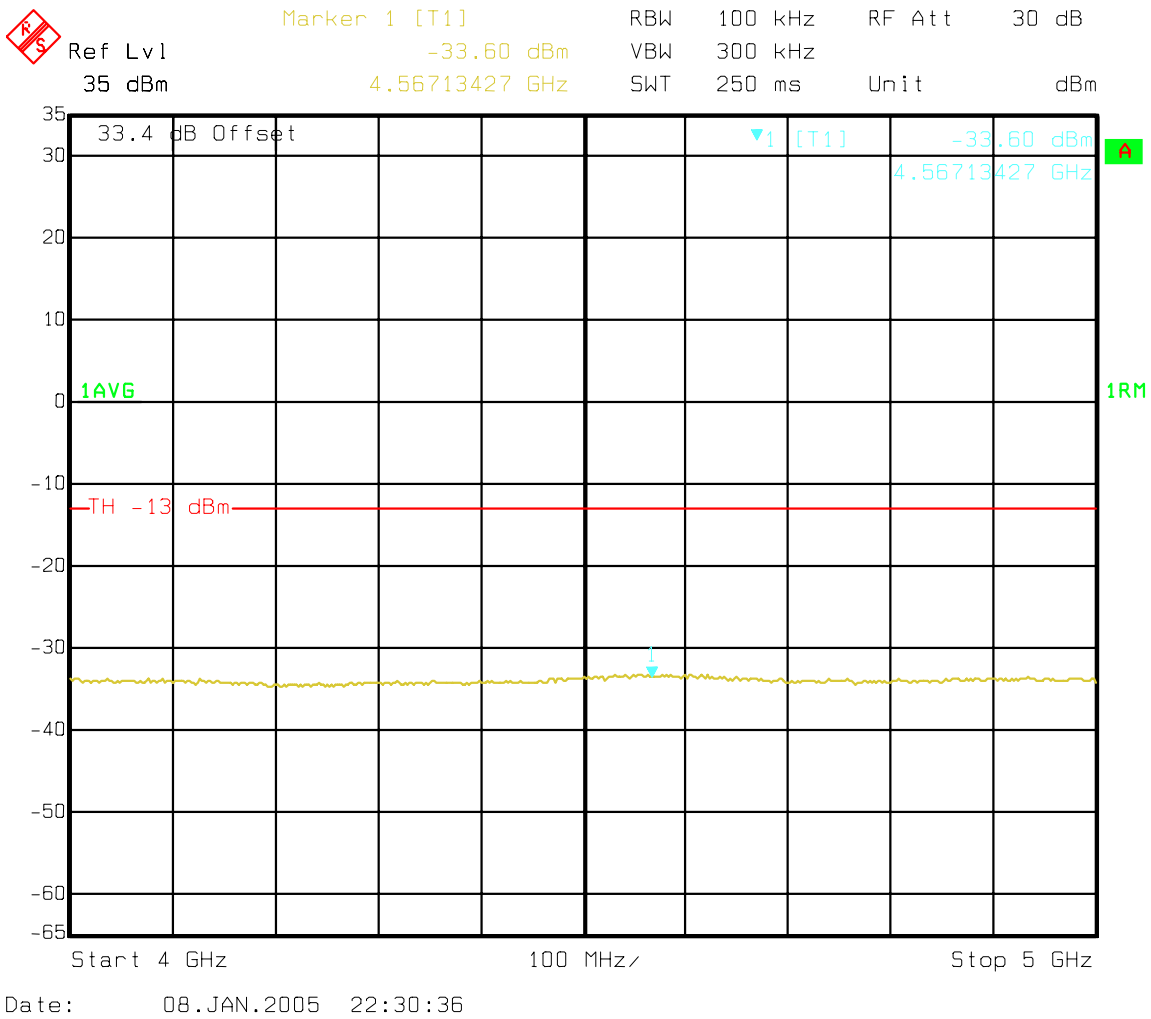


Figure 44 : Two Carriers - B Band IS95 Spurious emissions 4000-5000 MHz

**Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz
OPTIMIZED RADIO MODULE Ant. Port band B IS95**

B Band IS95 Spurious emissions 5000-6000 MHz

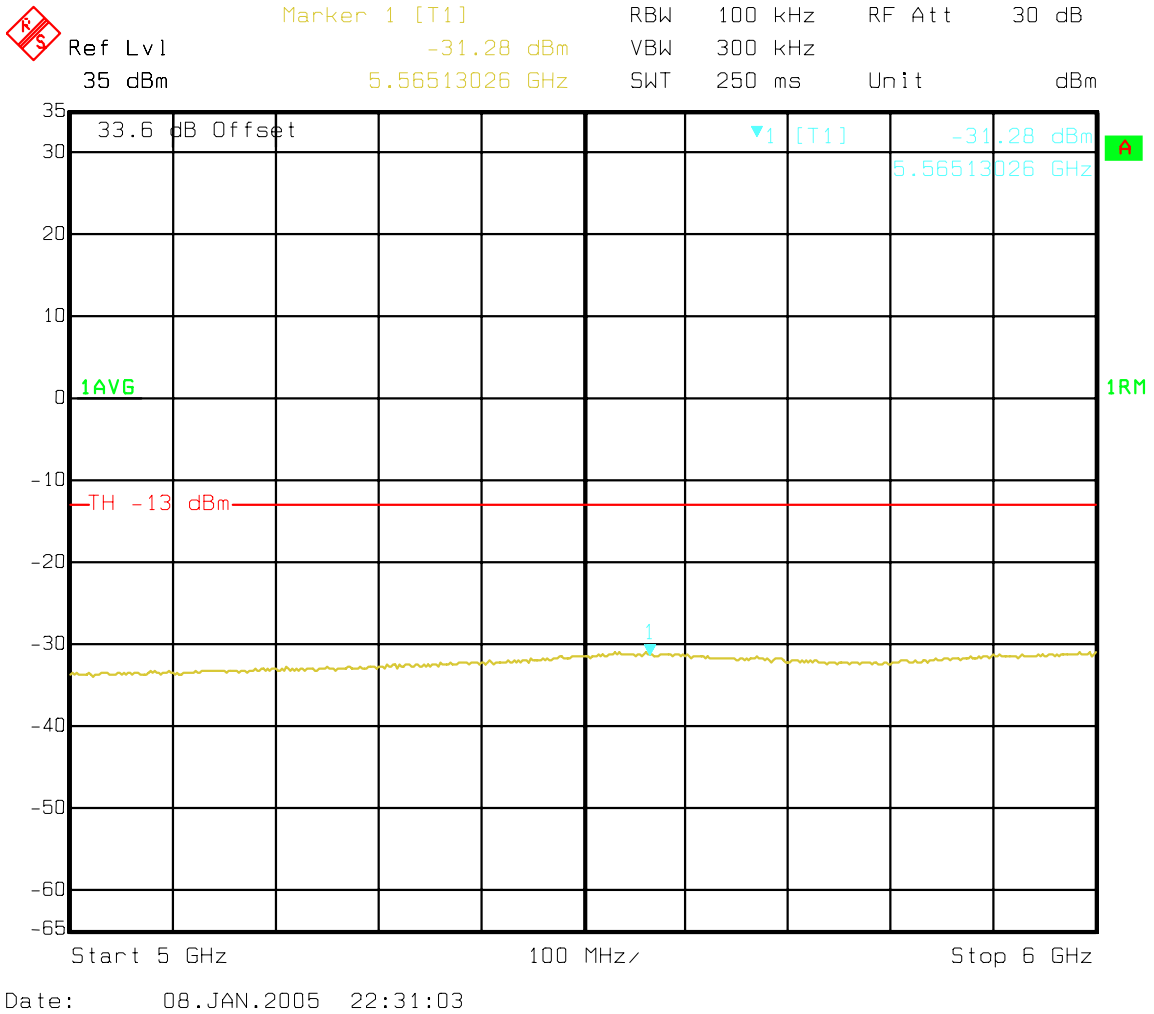


Figure 45 : Two Carriers - B Band IS95 Spurious emissions 5000-6000 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 6000-7000 MHz

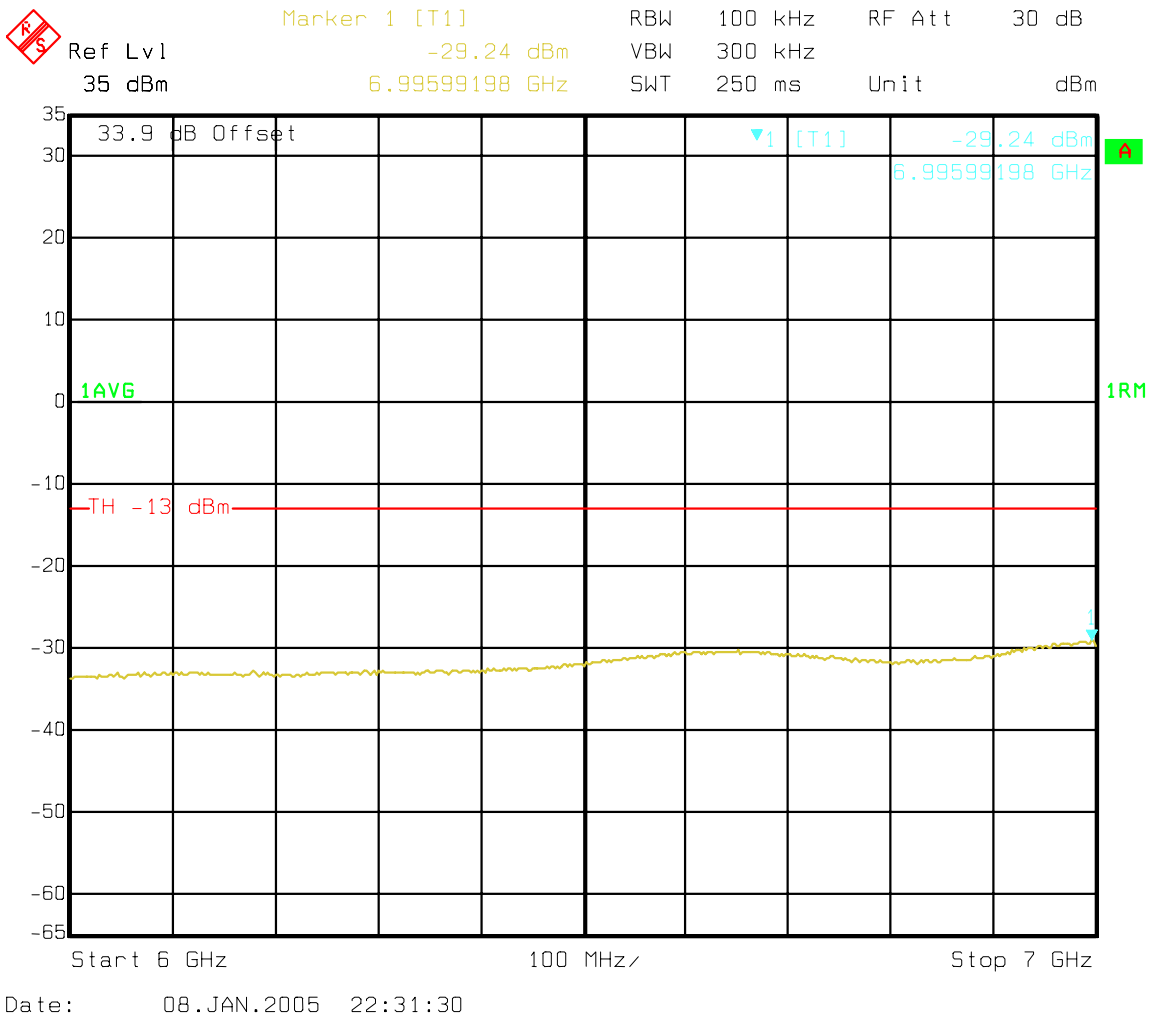


Figure 46 : Two Carriers - B Band IS95 Spurious emissions 6000-7000 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 7000-8000 MHz

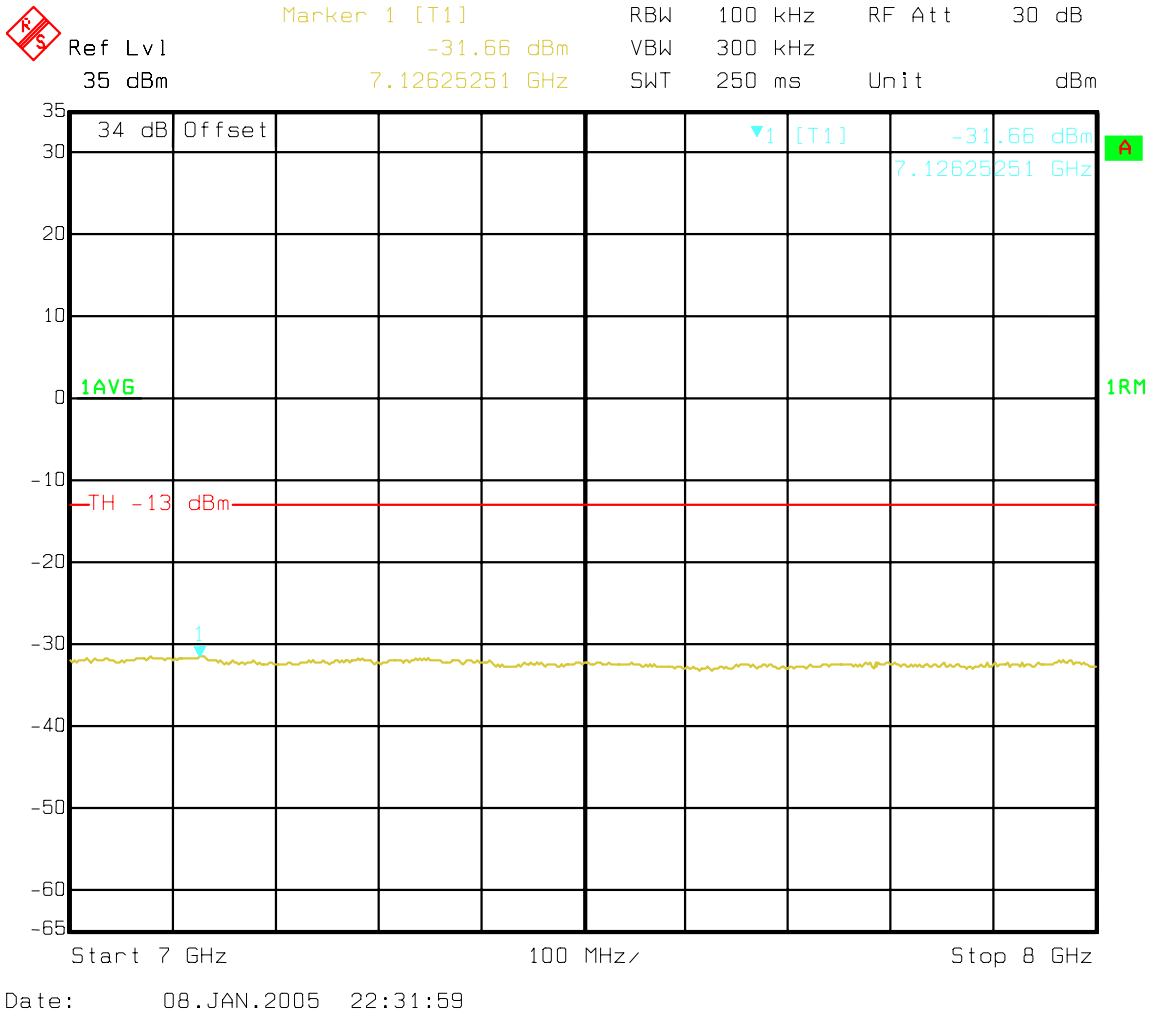


Figure 47 : Two Carriers - B Band IS95 Spurious emissions 7000-8000 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 8000-9000 MHz

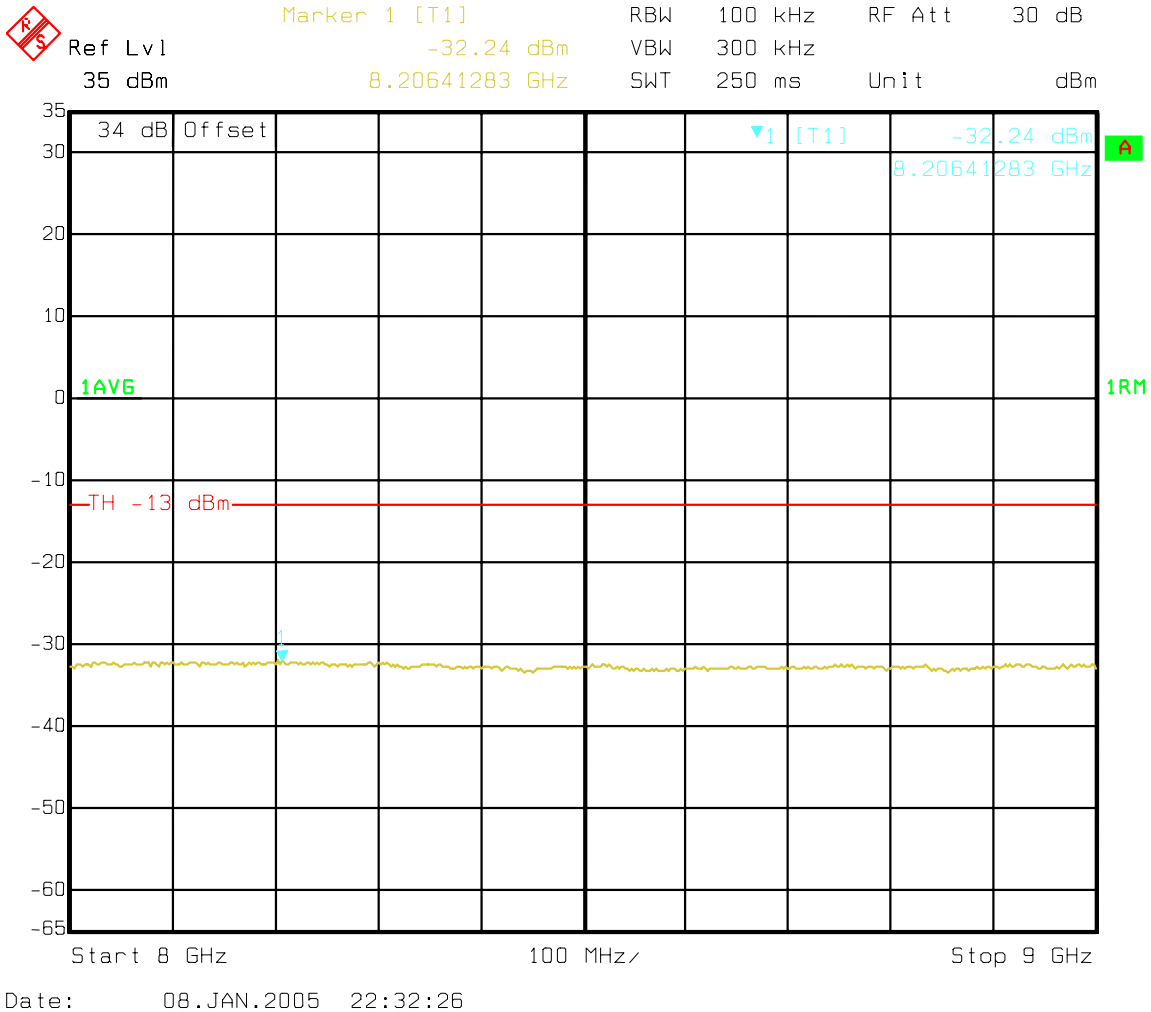


Figure 48 : Two Carriers - B Band IS95 Spurious emissions 8000-9000 MHz

Two Carriers 358, 399 and 601, 642 Spurious Emissions at the 800 MHz Optimized Radio Module Ant. Port band B IS95

B Band IS95 Spurious emissions 9000-10000 MHz

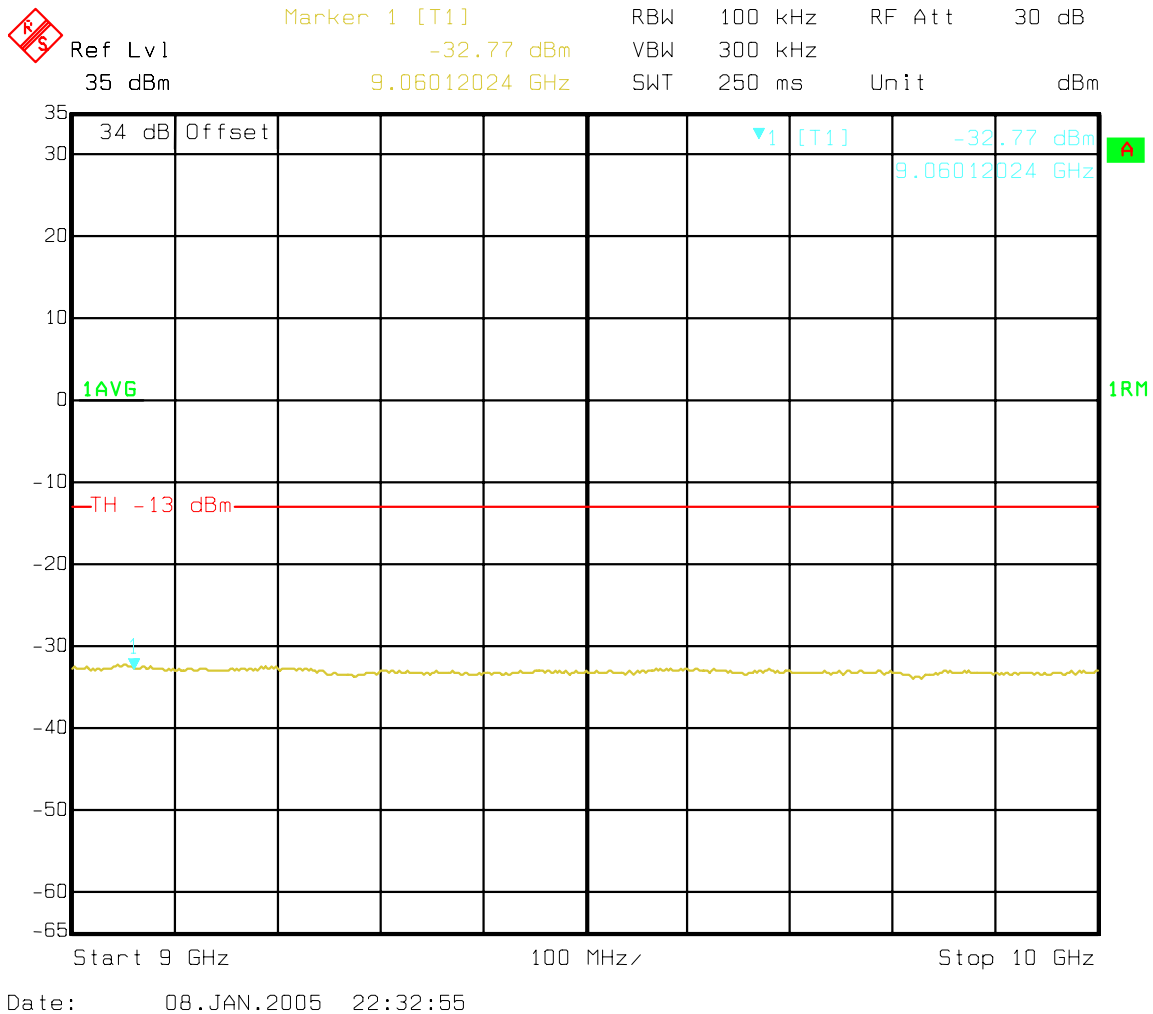


Figure 49 : Two Carriers - B Band IS95 Spurious emissions 9000-10000 MHz