

RADIATED DISTURBANCE :

Limit :

Class B of FCC standard regulation CFR 47 part 15 subpart B for radiated emission limit (§15.109 class B device) for unintentional radiator and (§15.209 class B device) for intentional radiator

General measurement conditions.

Conforms to ANSI C63.4.


Diagram in 0° position, angles are positives in the reverse clock wise.

Equipment under test.

- Front view



- Rear view

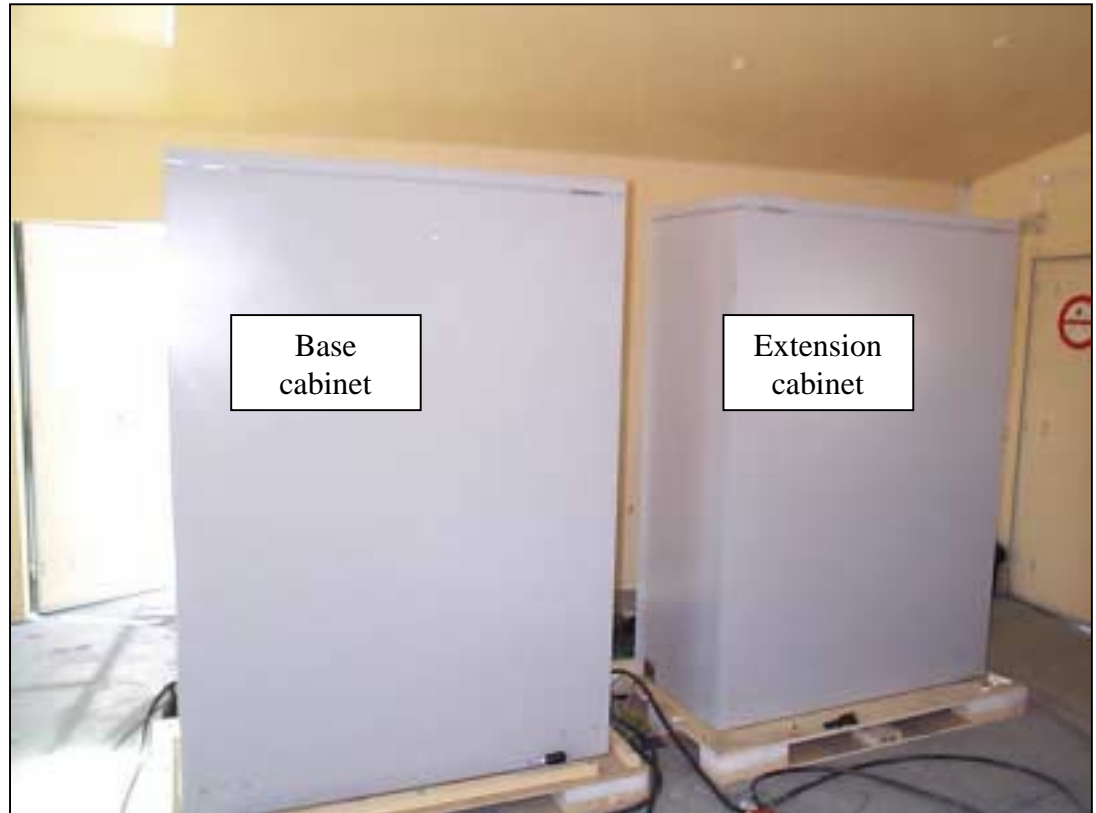

Method of measurement.

Method of measurement and test installation according to Section 8 of the ANSI C63.4 measurement standard.

Measurement are done at 10m in a free area.

We try to obtain a maximum at all frequencies by moving the product orientation and antenna polarisation. The height of the antenna can vary from 1 m to 4 m.

Test equipment used :

APPARATUS	MANUFACTURER	REFERENCE	SERIAL NUMBER	Date of verification
Free field open area test site				Jul-02
Receiver	Rohde & Schwarz	ESI 7	834638/007	Dec-01
Bilog antenna	CHASE	CBL-6112	2434	Nov-01