



TEST REPORT

**CFR 47 Part 15
and CFR 47 Part 24**

UMTS 1900 Indoor 2 iBTS with iModules.

N°149028DK

The reproduction of this document is authorised only if integral. Any partial reproduction must be authorised by GYL Technologies. This document results of test applied on one sample. It doesn't prejudge of conformity of all products to the tested sample.

Technical control: O.ROY	GYL technologies Parc d'activités de Lanserre 21, rue de la Fuye 49610 Juigné sur Loire Tel. : 02.41.57.57.40 - Fax : 02.41.45.25.77	Quality Control: L.MONTIEL
--------------------------	--	----------------------------



Summary

1	GENERAL INFORMATION.....	3
1.1	APPLICANT:.....	3
1.2	MANUFACTURER:.....	3
1.3	APPLICANT REPRESENTATIVE:.....	3
1.4	TEST DATE:.....	3
1.5	TEST SITE:.....	3
2	INTRODUCTION.....	4
3	MEASUREMENT EQUIPMENT LIST.....	4
4	TESTED SYSTEM DETAILS.....	5
5	EQUIPMENT DESCRIPTION.....	5
5.1	PRODUCT TYPE:.....	5
5.2	AUXILIARY EQUIPMENT:.....	5
5.3	PRODUCT PICTURES:.....	6
5.4	PRODUCT COMPOSITION.....	8
6	EXERCISING TEST CONDITIONS.....	9
6.1	CHANNELS TEST CONFIGURATION:.....	9
6.2	EUT EXERCISING SOFTWARE.....	9
7	CONFORMANCE STATEMENT.....	10
7.1	STANDARDS REFERENCED FOR THIS REPORT.....	10
7.2	JUSTIFICATION.....	10
8	INTERPRETATION AND REMARKS:.....	10
8.1	IMPORTANT REMARK:.....	10
9	TEST ACCORDING TO CFR 47 PART 15 CLASS B.....	11
9.1	REFERENCE DOCUMENTATION:.....	11
9.2	CONDUCTED EMISSIONS MEASUREMENTS.....	11
9.3	RADIATED EMISSIONS MEASUREMENTS.....	11
9.4	RESULTS (§ 15.109 class B):.....	14
9.5	INTERPRETATION AND REMARKS:.....	16
9.6	PRE-SCAN MEASUREMENT TO IDENTIFY SPURIOUS EMISSIONS FROM EUT.....	17
10	TEST ACCORDING TO CFR 47 PART 24 SUBPART E.....	19
10.1	REFERENCE DOCUMENTATION:.....	19
10.2	RADIATED DISTURBANCE:.....	19
10.3	INTERPRETATION AND REMARKS:.....	21
APPENDIXES A1 TO A20		



1 GENERAL INFORMATION

1.1 APPLICANT:

**SANMINA SCI
46 Rue Pierre Curie
78376 PLAISIR - FRANCE**

1.2 MANUFACTURER:

**NORTEL NETWORKS
38, rue Paul Cézanne
78928 Guyancourt Yvelines – France**

1.3 APPLICANT REPRESENTATIVE:

Marc CANCOUET

1.4 TEST DATE:

August 26 to August 27, 2003

1.5 TEST SITE:

GYL Technologies
Parc d'activités de Lanserre
49610 Juigné sur Loire – France
FCC registration Number: 90469



EMC TEST REPORT

The 22 pages of this report are not sharable

FCC registration # 90469

Written by : O. ROY

August 28, 2003

Identification : 149028DK

2 INTRODUCTION

The following test report for a Base Station Transmitter is written in accordance with Part 15 and 24 of the Federal Communications Commissions. The Equipment Under Test (EUT) was the UMTS 1900 Indoor 2 iBTS with iModules. The test results reported in this document relate only to the item that was tested.

All measurements contained in this Application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions of 2001. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. These are explained in this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

All radiated and conducted emissions measurements were performed manually at GYL TECHNOLOGIES. The radiated emissions measurements required by the rules were performed on the three to ten meters, open field, test site maintained by GYL Technologies Parc d'activités de Lanserre, 49610 Juigné sur Loire , France. Complete description and site attenuation measurement data have been placed on file with the Federal Communications Commission.

The power line conducted emission measurements were performed in a shielded enclosure also located at the Parc d'activités de Lanserre, 49610 Juigné sur Loire, France facility

3 MEASUREMENT EQUIPMENT LIST

PART TYPE	MANUFACTURER	MODEL	SERIAL NUMBER	CALIBRATION DATE
RECEIVERS				
Receiver	Rohde & Schwarz	ESI 7	M02020	Mar-03
Spectrum analyzer	Rohde & Schwarz	FSEM 30	M02021	Dec-02
ARTIFICIAL MAINS NETWORKS				
LISN (50 μ H / 5/50 Ω)	Rohde & Schwarz	ESH2-Z5	M02034	Oct-02
ANTENNAS				
Bilog (30-2000MHz)	CHASE	CBL-6112	M02031	Nov-02
Horn (1 to 18GHz)	EMCO	3161-01	M01138	



4 TESTED SYSTEM DETAILS

The equipment tested is a **Base Transceiver Station for Universal Mobile Telecommunications System** also considered as an Information Technology Equipment. The equipment provides Personal Communications Services in the 1930 – 1990 MHz frequency band.

5 EQUIPMENT DESCRIPTION

5.1 PRODUCT TYPE:

UMTS 1900 Indoor 2 iBTS with iModules (STSR 3D Configuration):
and converter +24V/-48V

5.1.1 Equipment Release Status:

iTRM 1900 (all) :	D1 with derogation AC 03 06 046.
iCCM board (all) :	D2
iCEM 128 :	1*D1 & 3*D2
GPSAM :	D7
MCPA 1900 (all) :	D2
DDM 1900 (all) :	D1
ICU :	D5
MCA :	D1
INTERCO :	D1
DIGITAL SHELF :	D2
LPPCM :	P1
External Alarm kit :	D2
Rack Delta 24VDC/48VDC converter :	02
Converters (all) :	00

5.2 AUXILIARY EQUIPMENT:

Attenuators and 50 ohms load

5.3 PRODUCT PICTURES:

Front view



Rear view



24V to - 48 V converter front and rear views





EMC TEST REPORT

The 22 pages of this report are not sharable

FCC registration # 90469

Written by : O. ROY

August 28, 2003

Identification : 149028DK

5.4 PRODUCT COMPOSITION

The table given here under gives the features details of the equipment under test

ARTICLE	PEC code	Release	Serial number	Comments
iTRM 1900	NTUM17BA	D1 - DER AC 03 06 046	CDN200324005	136.147.33.128
iTRM 1900	NTUM17BA	D1 - DER AC 03 06 046	CDN200324003	136.147.33.129
iTRM 1900	NTUM17BA	D1 - DER AC 03 06 046	CDN200326006	136.147.33.138
iCCM shelf	NTUM26AA	D1	CDN200247007	
iCCM board	NTUM25BA	D2	SLR200247007	136.147.32.149
iCCM shelf	NTUM26AA	D1	CDN200242001	
iCCM board 4	NTUM25BA	D2	SLR20024100	136.147.32.132
iCEM	NTUM00DA	D1	CDN200308012	128 136.147.33.74
iCEM	NTUM00DA	D2	CDN200316008	128 136.147.33.87
iCEM	NTUM00DA	D2	CDN200316019	128 136.147.33.92
iCEM	NTUM00DA	D2	CDN200316016	128 136.147.33.95
GPSAM	NTUM24AA	D7	NNTM7503PHK7	
MCPA 1900	NTUM30PA	D2	PWWT03D97J86	Firmware 1.16
MCPA 1900	NTUM30PA	D2	PWWT03D9DJTN	Firmware 1.16
MCPA 1900	NTUM30PA	D2	PWWT03D9DJV6	Firmware 1.16
MCPA 1900	NTUM30PA	D2	PWWT03D97J8D	Firmware 1.16
MCPA 1900	NTUM30PA	D2	PWWT03D97J81	Firmware 1.16
MCPA 1900	NTUM30PA	D2	PWWT03D9L74Y	Firmware 1.16
DDM 1900	NTUM42AA	D1	FORM01426047	
DDM 1900	NTUM42AA	D1	FORM01428020	
DDM 1900	NTUM42AA	D1	FORM01426048	
ICU	NTBY58AA	D5	SNMNGG0002G8	
INTERCO	NTBY76AA	D1	SNMN7500AUF8	
DIGITAL SHELF	NTBY72CA	D2	SNMN7500AS4G	
MCA	NTBY90AA	D1	SNMN7500AOO6	
LPPCM	NTBY14BA	P1	SNMN7500979P	
External alarm kit	NTBY98AA	D2	SNMN75007DFG	
Rack Delta 24VDC/48VDC converter	NTBY51AA	02	K5032900049	Wrong release on label
Converter 24/48	NTBY5101	00	MG032500005	
Converter 24/48	NTBY5101	00	MG031700280	No Nortel label
Converter 24/48	NTBY5101	00	MG031700284	No Nortel label
Converter 24/48	NTBY5101	00	MG031700242	No Nortel label
2 fillers converter	NTBY5102	S0		



6 EXERCISING TEST CONDITIONS

Measurements are done in transmitter mode (all transmitters at maximum power 45 watts).
Installation diagram and cables list on appendix C9 and C13

6.1 CHANNELS TEST CONFIGURATION:

TRM	CHANNEL #	Definition
2	B	TRM 2 output on PA 1 and 6 transmitting at 1932.4 MHz and 46.5 dBm
3	M	TRM 3 output on PA 2 and 3 transmitting at 1960 MHz and 46.5 dBm
9	T	TRM 9 output on PA 4 and 5 transmitting at 1987.6 MHz and 46.5 dBm

6.2 EUT EXERCISING SOFTWARE

The EUT was provided with the software to continuously transmit during testing. The carrier was also checked to verify that the information was being transmitted.

- Modules software version : V03E3.0E01.4
- PI bench : v03d0402
- Visual TRM : v03d0402 with a modification : the file for channelizers configuration "TX_umts.chz" delivered with Visual TRM was modified by the file "TX_umts.chz" delivered with PI Bench v03d0402.
- Visual BBS for iCEM : V03D3.2_E04



7 CONFORMANCE STATEMENT

7.1 STANDARDS REFERENCED FOR THIS REPORT

PART 2: 1999	Frequency allocations and Radio Treaty Matters General Rules and Regulations
PART 15: 2002	Radio frequency devices
ANSI C63.4-2001	Standard format measurements/technical report personal computer and peripherals
PART 24 Subpart E" (2000)	Broadband Personal communications services

7.2 JUSTIFICATION

As mentioned in paragraph 5 of this report, the equipment is an information technology equipment providing public mobiles services and Personal Communication Services and as it may be installed in residential commercial or light industry areas the following sub clause of the standard mentioned above are

- Part 15.107 and 15.109 (subpart B) for respectively conducted and radiated emission.
- Part 24.238 (subpart E) for broadband PCS emission limits

8 Interpretation and remarks:

This equipment complies with the rules of the FCC.

8.1 IMPORTANT REMARK:

Since no emissions were detected in the pre-scan measurement, substitution method was not performed on UMTS 1900 Indoor 2 iBTS with iModules

The EUT Plot on page 22 show measured noise floor levels detected while testing the UMTS 1900 Indoor 2 iBTS with iModules



9 TEST ACCORDING TO CFR 47 Part 15 Class B

9.1 REFERENCE DOCUMENTATION:

FCC part 15 (Sub part B) §15.107 and 15.109 of 2002

9.2 CONDUCTED EMISSIONS MEASUREMENTS

As the Base station is +24V/-48V DC powered by an In-house DC powering station the measurements regarding conducted emissions are not performed

9.3 RADIATED EMISSIONS MEASUREMENTS

Before final measurements of radiated emissions were made on the open-field three/ten meter range; the EUT was pre-scanned in the semi anechoic at one meter distance. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained. As Part 24 radiated requirements was tested in conjunction with the Part 15 testing. The spectrum was searched to identify emissions. A complete scan of the applicable spectrum was completed (up to 10th harmonic of fundamental). The transmitters were then turned off, with the rest of the equipment powered on. A complete scan of the spectrum was done and referred to as "ambient" without the transmitter keyed on. Emissions emanating from the transmitter were identified from comparing these two scans. The identified emissions (from the transmitter) were measured and the levels recorded with the transmitter keyed on at full rated power output.

Final radiated emissions measurements were made, as outlined in Section 8 of the ANSI C63.4 measurement standard, on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.1 meter above the ground plane. The iBTS was tested to the applicable limits of the FCC rules. The measurement distance between the center of the measurement antenna and the equipment under test is 10 meters (or less for frequencies above 1 GHz .At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. The range of the frequency spectrum to be investigated is specified in FCC Part 15. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Summary of settings

ESI 7 EMI TEST RECEIVER IN RECEIVER MODE	
Peak measurement time	5 ms
step size	40 KHz
Preamplifier	ON
Preselector	ON
Resolution, Band With	120 kHz
Final Quasi Peak measurement time	1 s minimum
Final average measurement time	1 second

All readings are quasi-peak unless stated otherwise.

9.3.1 Test Set up
24V version



-48V version

**48 to 24V Converters
not connected during
testing**






9.4 RESULTS (§ 15.109 class B):

The following data table lists the most significant emission frequencies, measured level, correction factor (includes cable and antenna corrections), corrected reading and the limit. The highest peaks are measured in quasi-peak detection mode at 10 meters distance, except for emissions radiated above 1 GHz where an average detector with 1 MHz resolution bandwidth was used.

Results for the 24 V version

F (MHz)	PK (dBµV/m)	QP (dBµV/m)	Margin (dB)	Pol	H (cm)	Angle (degrees)	Corr. Fact (dB)	RBW (kHz)	Comments
31,649	27,12	23,55	-6,45	V	101	198	17,88	120	
34,782	32,33	26,65	-3,35	V	111	40	16,47		
35,997	32,10	23,77	-6,23	V	103	45	15,89		
37,831	27,81	23,12	-6,88	V	102	9	13,74		
48,871	23,82	19,85	-10,15	V	102	65	9,49		
54,044	20,95	16,86	-13,14	V	99	229	8,69		
54,830	19,37	14,33	-15,67	V	102	240	8,62		
58,685	22,13	18,51	-11,49	V	250	96	8,27		
72,568	20,55	18,04	-11,96	V	187	363	7,61		
1277,958	38,16	35,91		V	212	58	30,76		
F (MHz)	PK (dBµV/m)	Average (dBµV/m)	Margin (dB)	Pol	H (cm)	Angle (degrees)	Corr. Fact (dB)	RBW (kHz)	Comments
1277,958	38,16	31,4	-8,60	V	212	58	30,76	1 MHz	Average

Champ électrique (dBµV/m) rayonné en fonction de la fréquence (Hz)

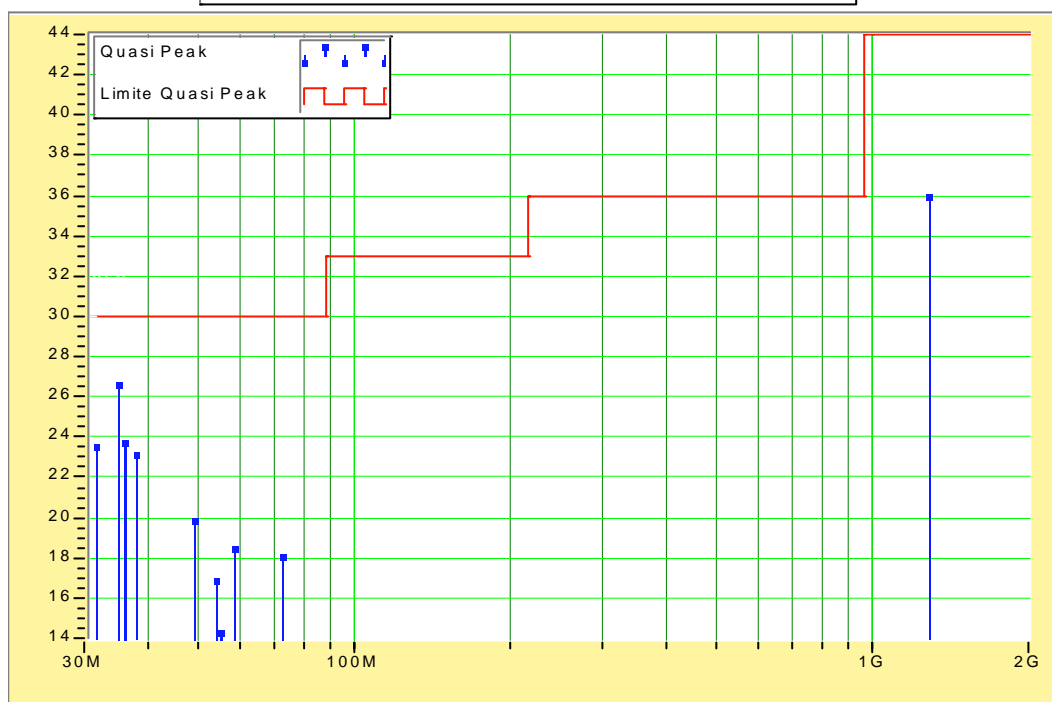



EMC TEST REPORT

The 22 pages of this report are not sharable

FCC registration # 90469


Written by : O. ROY

August 28, 2003

Identification : 149028DK

Results for the -48 V version

F (MHz)	PK (dB μ V/m)	QP (dB μ V/m)	Margin (dB)	Pol	H (cm)	Angle (degrees)	Corr. Fact (dB)	RBW (kHz)	Comments
31,649	17,12	13,55	-16,45	V	110	12	17,88	120	
34,782	13,36	12,56	-17,44	V	105	07	16,47		
35,997	12,32	11,86	-18,14	V	101	45	14,46		
37,831	17,81	13,50	-16,50	V	105	5	13,74		
48,871	13,82	09,05	-20,95	V	104	23	9,49		
54,044	10,95	08,86	-21,14	V	102	111	8,69		
54,830	09,37	08,33	-21,67	V	104	110	8,62		
58,685	12,13	08,02	-21,98	V	110	105	8,27		
72,578	18,52	10,98	-19,02	V	202	180	7,52		
1277,958	38,16	36,91		V	212	58	30,76		
F (MHz)	PK (dB μ V/m)	Average (dB μ V/m)	Margin (dB)	Pol	H (cm)	Angle (degrees)	Corr. Fact (dB)	RBW (kHz)	Comments
1277,958	38,16	31,4	-8,60	V	212	58	30,76	1 MHz	Average

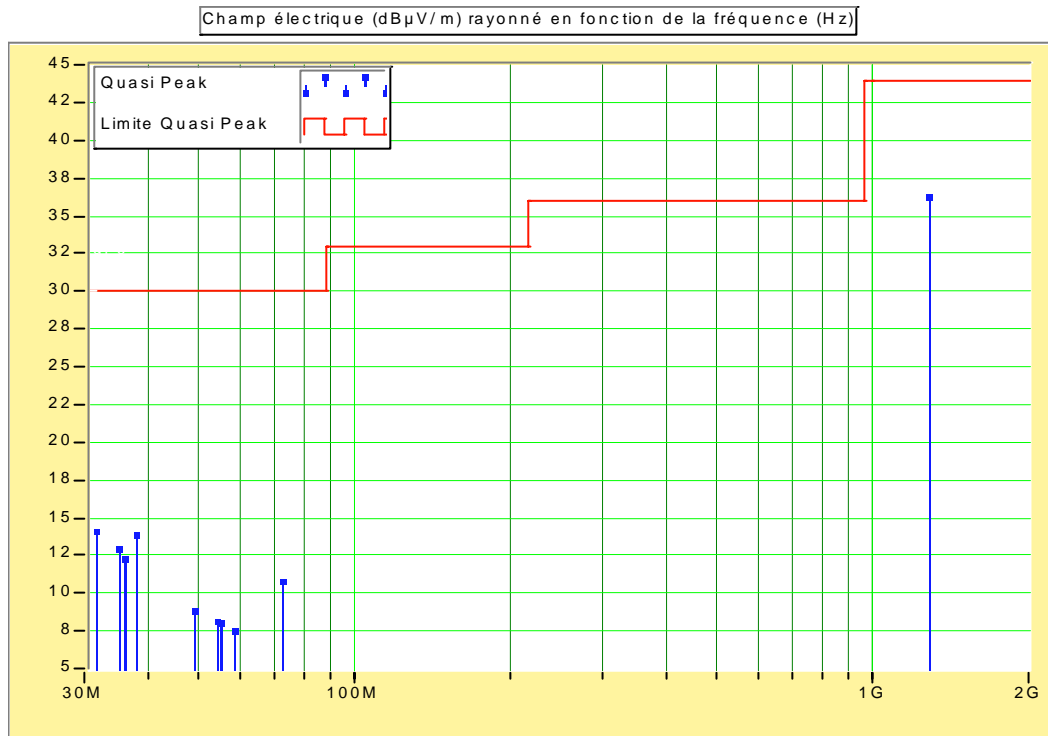



EMC TEST REPORT

The 22 pages of this report are not sharable

FCC registration # 90469

Written by : O. ROY

August 28, 2003

Identification : 149028DK

For indicative level

F (MHz)	AV (dB μ V/m)	Pol	H (cm)	A (degrees)	Corr. fact (dB)	RBW (kHz)	Comments
1932.400	82	V	103	137	32.83	1000	transmitter
1960.000	74	V	103	221	32.66	1000	transmitter
1987.600	78	V	246	266	32.48	1000	transmitter

Only one spurious signal was found at 1277,958 MHz. No other spurious signal found between 1.3GHZ and 20 GHZ

9.5 INTERPRETATION AND REMARKS:

The equipment complies with the §15.109 requirements
--



9.6 PRE-SCAN MEASUREMENT TO IDENTIFY SPURIOUS EMISSIONS FROM EUT at D = 1m:

Pre-scan measurements was performed in the worst case conditions, that means the 24 to -48V converter was connected and operational

F (MHz)	PK (dBμV/m)	Margin (dB)	Pol	H (cm)	Angle (degrees)	Corr. Fact. (dB)	Comments
31,649	25,19	-14,81	V	100	90	16,15	
34,782	34,22	-5,78	V	100	0	14,93	
35,997	27,66	-12,34	H	100	0	14,46	
36,197	25,13	-14,87	H	100	90	14,38	
37,831	32,42	-7,58	V	100	90	13,74	
48,871	22,23	-17,77	H	100	0	9,49	
54,044	17,07	-22,93	V	100	90	8,69	
54,830	22,34	-17,66	V	100	90	8,62	
58,685	21,26	-18,74	V	100	90	8,27	
72,567	21,88	-18,12	V	100	90	7,52	
72,578	21,60	-18,40	V	100	90	7,52	
1277,958	42,07	-11,93	V	100	90	30,76	
1607,959	35,10	-18,90	H	100	0	33,53	
1838,336	35,26	-18,74	V	100	0	35,27	
1847,781	35,36	-18,64	V	100	90	35,37	
1859,625	35,49	-18,51	V	100	0	35,50	
1873,867	35,04	-18,96	V	100	0	35,65	
1879,114	35,10	-18,90	H	100	90	35,71	
1882,163	35,13	-18,87	H	100	90	35,74	
1883,562	39,45	-14,55	H	100	0	35,76	
1890,408	36,90	-17,10	V	100	0	35,83	
1892,957	36,40	-17,60	V	100	0	35,86	
1898,204	35,30	-18,70	V	100	0	35,91	
1929,837	35,84	-18,16	V	100	90	35,65	transmitters
1933,785	35,22	-18,78	V	100	90	35,62	
1946,978	35,12	-18,88	H	100	0	35,49	
1949,377	35,09	-18,91	H	100	0	35,47	
1954,474	74,39	20,39	H	100	0	35,42	
1956,023	62,55	8,55	H	100	90	35,41	
1956,273	68,17	14,17	V	100	0	35,41	
1958,922	82,91	28,91	V	100	0	35,38	
1960,071	85,37	31,37	H	100	0	35,37	
1960,771	82,09	28,09	H	100	90	35,37	
1964,169	65,04	11,04	H	100	90	35,33	
1965,268	76,15	22,15	H	100	0	35,32	



EMC TEST REPORT

The 22 pages of this report are not sharable


FCC registration # 90469

Written by : O. ROY

August 28, 2003

Identification : 149028DK

Champ électrique (dB μ V/m) rayonné en fonction de la fréquence (Hz)

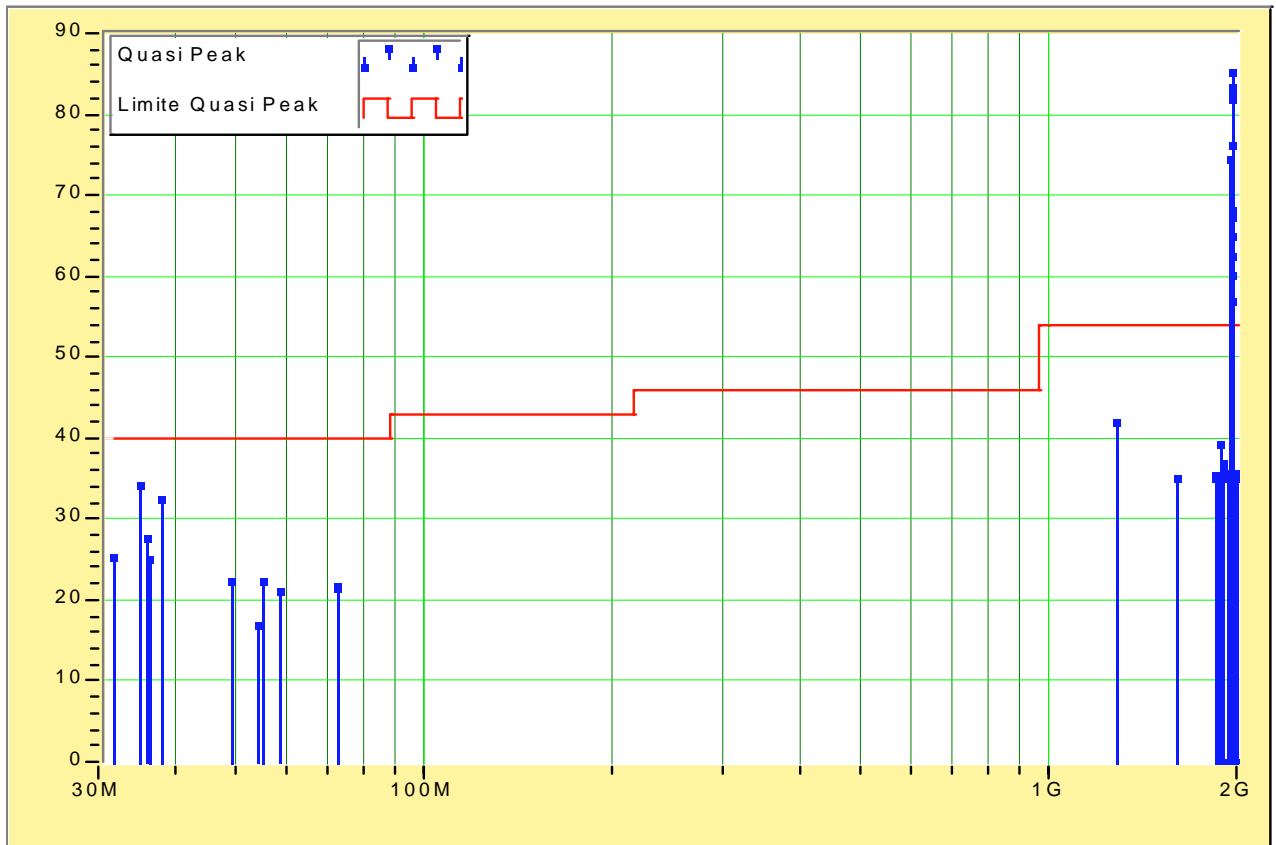

10 TEST ACCORDING TO CFR 47 Part 24 subpart E

Tests performed by Olivier ROY at GYL Technologies laboratories, in August 26 and 27, 2003.

10.1 REFERENCE DOCUMENTATION:

CFR 47 part 24 subpart E (§ 24.238) of 2000

10.2 RADIATED DISTURBANCE:

10.2.1 General measurement conditions.

Conforms to Section 8 of the ANSI C63.4 measurement standard.

Diagram in 0° position, angles are positives in the reverse clock wise.

Equipment under test set up:



10.2.2 Method of measurement.

Measurements are done at 10m in an open area test site and maximum at all frequencies is analyzed by moving the product orientation and antenna polarization. The height of the antenna can vary from 1 m to 4 m. As a spurious emission was detected above 1 GHz a 1meter measurement was performed Measurements are done in transmitter mode (all transmitters at maximum power 45Watts)



EMC TEST REPORT

The 22 pages of this report are not sharable

FCC registration # 90469

Written by : O. ROY

August 28, 2003


Identification : 149028DK

10.2.3 RESULTS (§24.238) for both configurations:

Measurement at transmitters' frequencies for indicative level (peak values)

Transmitters output connected to resistive 50 ohms loads

FREQUENCY (MHz)	Measure (dBµV)	AF A	Loss cable B	Correc. Factor A+B	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1 932.4	38.1	27.9	2	29.9	68	93.9	-25.9
1 960.0	44.1	27.9	2	29.9	74	93.9	-19.9
1 987.6	53.1	27.9	2	29.9	83	93.9	-10.9

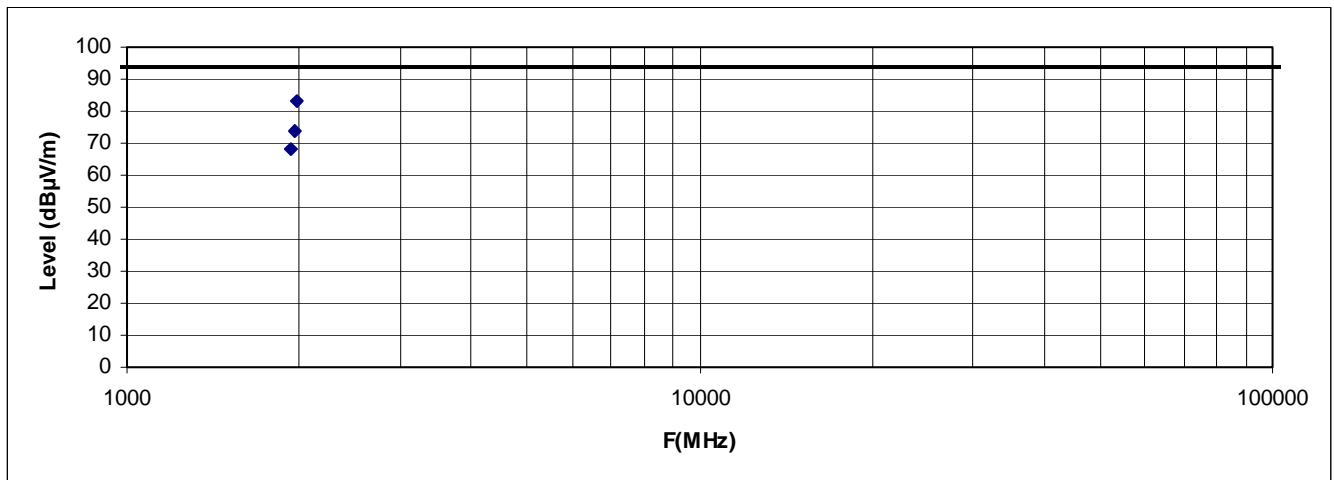



EMC TEST REPORT

The 22 pages of this report are not sharable

FCC registration # 90469

Written by : O. ROY

August 28, 2003


Identification : 149028DK

10.2.4 Spurious emissions measurement (peak values) at D=1m

The measurement instrumentation has a resolution bandwidth of 10 kHz up to 10 MHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100 kHz was used. Outside this bandwidth, all emissions shall be attenuated at least 26 dB below the transmitter power.

Only one spurious emission in horizontal polarization found which level upper to noise level in 1 MHz bandwidth (harmonics transmitters' frequencies under noise level)

FREQUENCY (MHz)	Measure (dBµV)	AF A	Loss cable B	Correc. Factor A+B	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1277.9	20.5	27.9	2	29.9	50.39	93.9	-43.5

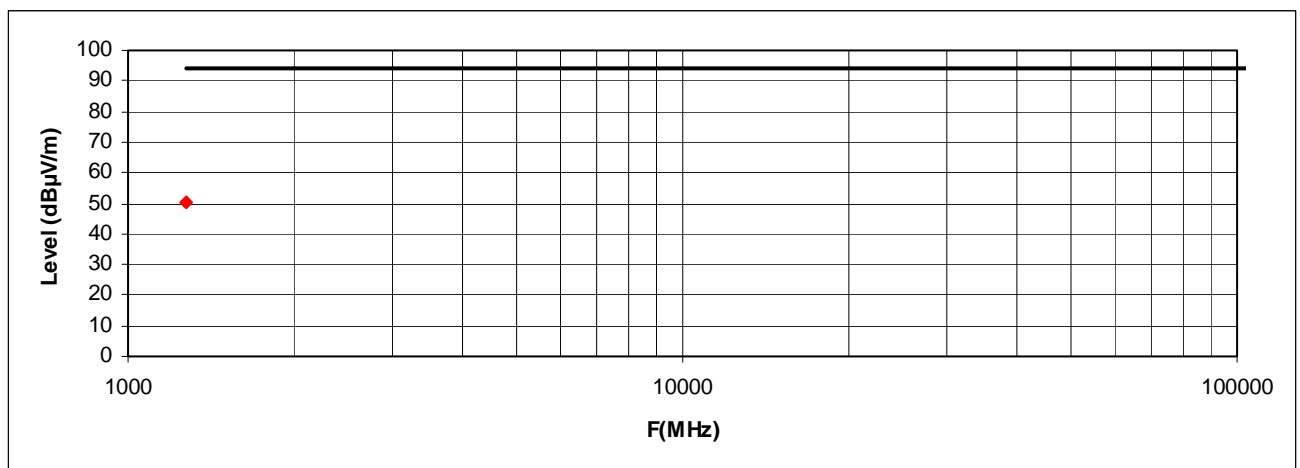

10.3 INTERPRETATION AND REMARKS:

The equipment complies with the §24.238 requirements



EMC TEST REPORT

The 22 pages of this report are not sharable

FCC registration # 90469

Written by : O. ROY

August 28, 2003

Identification : 149028DK

Spectrum of noise level from 1GHz to 20GHz including loss cable and antenna factors


Legend:

Yellow curve represents the peak measurement in max hold mode

Blue curve represents the peak measurement in sweeping mode

Green curve represents the average measurements

	RBW	1 MHz	RF Att	0 dB
Ref Lvl	VBW	1 MHz		
97 dB μ V	SWT	100 ms	Unit	dB μ V

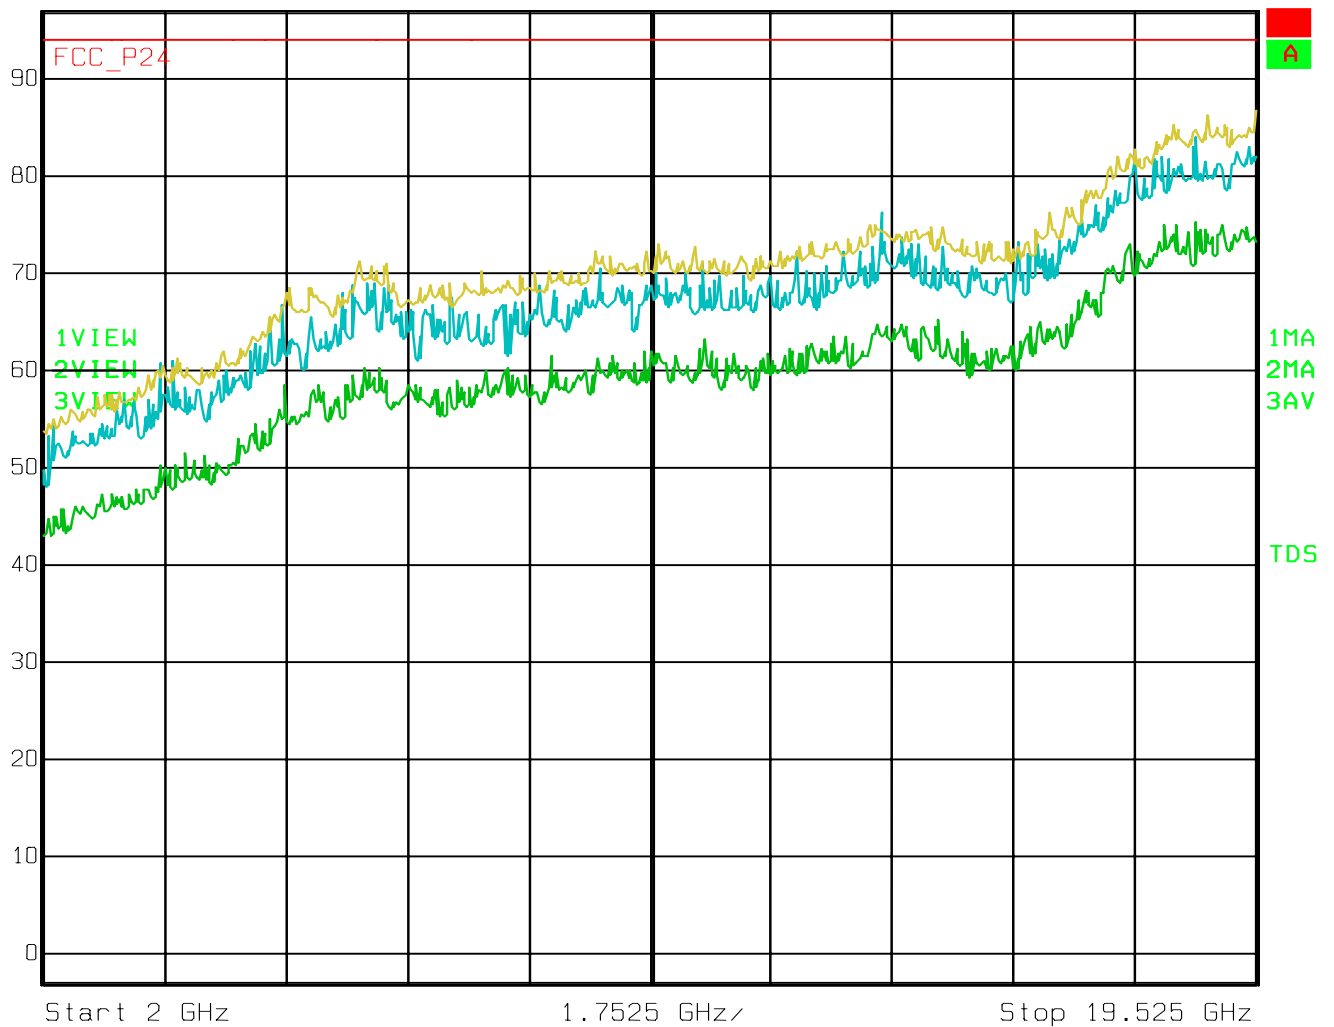



EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

Reference: PLN-T-030390-6G1
Version: A
Status: Approved
Date: 17/07/2003

Product Name: UMTS 1900 Indoor 2 iBTS 24V & UMTS 1900 Outdoor iBTS
Frequency: UMTS-1900
Discipline: EMC

Author: Marc CANCOUËT
Verified by: Patrick GALOPIN
Approved by: Christian CHANSARD

Copyright© 2002 SANMINA-SCI, All Rights Reserved

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

PUBLICATION HISTORY

VERSION	DATE	AUTHOR	MODIFICATION
A	17/07/2003	M. CANCOUËT	Creation of the document

*This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form.
A SANMINA-SCI formal written agreement is required for any partial copy of this document.*

CONTENTS

1.	INTRODUCTION	4
2.	RELATED DOCUMENTS	5
2.1.	APPLICABLES DOCUMENTS	5
2.2.	REFERENCE DOCUMENTS	5
3.	REQUIREMENTS BEFORE EMC ASSESSMENT	6
3.1.	UMTS 1900 INDOOR 2 IBTS 24V HARDWARE TECHNICAL STATUS	6
3.2.	LIST OF KITS & CABLES	7
3.2.1	LIST OF KITS.....	7
3.2.2	LIST OF CABLES	7
3.3.	SOFTWARE NEEDS FOR UMTS 1900 INDOOR 2 IBTS	7
3.4.	UMTS 1900 OUTDOOR I-BTS HARDWARE TECHNICAL STATUS.....	8
3.5.	LIST OF KITS & CABLES	9
3.5.1	LIST OF KITS.....	9
3.5.2	LIST OF CABLES	9
3.6.	SOFTWARE NEEDS FOR IBTS UMTS 1900 OUTDOOR IBTS.....	9
4.	TEST PLAN SUMMARY	10
4.1.	TESTS MATRIX FOR I-MODULES INTRODUCTION ON UMTS 1900 INDOOR 2 IBTS. 10	10
4.2.	TESTS MATRIX FOR INTRODUCTION ON UMTS 1900 OUTDOR IBTS	11
4.3.	TEST DESCRIPTION OF THE RADIATED EMISSION	12
4.3.1.1	CONDUCTED EMISSIONS	15
4.4.	UMTS 1900 IBTS EMISSION TESTS CONFIGURATIONS.....	16
5.	CONCLUSION	16
ABBREVIATIONS AND DEFINITIONS		17
5.1.	ABBREVIATIONS.....	17
5.2.	DEFINITIONS.....	19

*This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form.
A SANMINA-SCI formal written agreement is required for any partial copy of this document.*

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

1. INTRODUCTION

The purpose of this document is to present the plan for the EMC qualification of the i-modules introduction on UMTS 1900 Indoor 2 iBTS 24V & UMTS 1900 Outdoor iBTS used for the US Market. The conformity with the test program presented below will be used to demonstrate the compliance of the i-modules on UMTS 1900 Indoor 2 iBTS 24V & UMTS 1900 Outdoor iBTS with the Electromagnetic Compatibility applicable standard.

The UMTS 1900 Indoor 2 iBTS 24V is a UMTS 1900 Indoor 2 iBTS with a -48V/+24V converter, tests realized on this product will cover also the UMTS 1900 Indoor 2 iBTS powered en -48 V.

For North America, applicable standard for EMC Base stations are the FCC part 15 Class B and the FCC Part 24.

This document applies to:

Product: UMTS 1900 Indoor 2 iBTS 24V
Manufacturer: NORTEL NETWORKS
Frequencies: 1930 – 1990 MHz

Configuration: STSR3D
Option: PCM lightening protection kit
 External alarm module
 Kit 24V

And

Product: UMTS 1900 Outdoor 2 iBTS
Manufacturer: NORTEL NETWORKS
Frequencies: 1930 – 1990 MHz

Configuration: STSR3D
Option: PCM lightening protection kit
 External alarm module

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

2. RELATED DOCUMENTS

2.1. APPLICABLES DOCUMENTS

[A1]	47CFR Part 2	FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations - Frequency allocations and radio treaty matters; general rules and regulations - dated 10/1/01
[A2]	47 CFR Part 15 08/20/02	FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations – Radio frequency devices – dated 08/20/02
[A3]	47 CFR Part 24	FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations - Personal communications services - dated 10/1/01

2.2. REFERENCE DOCUMENTS

[R1]	UMT/BTS/DD/390	Requirements specification for a phase II 600 mm UMTS indoor cabinet.
[R2]	UMT/BTS/DD/389	Requirements specification: DC electrical distribution system for a phase II 600 mm UMTS Indoor cabinet.
[R3]	UMT/BTS/DD/388	Requirements specification: Indoor iBTS 600 phase II indoor cooling unit.
[R4]	PLN-V-030355-6G1	1900 MHz UMTS PI Qualification Plan
[R5]	UMT/BTS/DD/0017	E-Mobility iBTS Platform / UMTS Product Specification
[R6]	UMT/COM/DD/001	UMTS Product Overview
[R7]	UMT/DCL/DD/002	IBTS Reference Manual
[R8]	UMT/BTS/DD/0110	IBTS UMTS Outdoor Modular Structure
[R9]	UMT/ICM/DD/001	IBTS Outdoor Site Specification – V01.02
[R10]	UMT/BTS/DD/091	Digital cabling requirements for Mark II outdoor BTS
[R11]	UMT/BTS/DD/092	Radio cabling requirements for Mark II outdoor BTS

*This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form.
A SANMINA-SCI formal written agreement is required for any partial copy of this document.*

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

3. REQUIREMENTS BEFORE EMC ASSESSMENT

3.1. UMTS 1900 INDOOR 2 IBTS 24V HARDWARE TECHNICAL STATUS

Details on the technical status of the system will be available in the document, supplied by Nortel Networks during the commissioning & acceptance phase form for UMTS 1900 Indoor 2 iBTS 24V with the i-modules.

The following table presents the hardware status of the Nortel Networks UMTS 1900 Indoor 2 iBTS 24V during the i-modules introduction phase.

Modules Designation		Supplier
Indoor wired CABINET	NTBY06AA	SANMINA
Digital Shelf	NTBY72CA	
Interco Panel	NTBY76AA	
CEM module	NTUM00AA	NORTEL
TRM module	NTUM10EA	NORTEL
CCM module	NTGY25AA	NORTEL
GPSAM module	NTUM24AA	NORTEL
MCPA	NTUM30PA	POWERWAVE
DDM	NTUM42AA	FOREM / COMDEV
PCM external cable 100 Ω	NTBY60TA	
EA Cable	NTBY6102	
MCA	NTBY90AA	
ICU	NTBY58AA	SANMINA
Kit 24 V (+24V/-55V converter)	NTBY51AA	DELTA
LPPCM	NTBY14BA	
EAM lightning protection	NTBY98AA	
TMA Kits	NTUM35AA	
iCCM module (Board)	NTUM25BA	NORTEL
(Shelf)	NTUM26AA	
iTRM module	NTUM17AA	NORTEL
iCEM 64 module	NTUM00CA	NORTEL
iCEM 128 module	NTUM00DA	

This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form. A SANMINA-SCI formal written agreement is required for any partial copy of this document.

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

3.2. LIST OF KITS & CABLES

3.2.1 LIST OF KITS

In fact, protections modules are optional but can be used to protect the PCM links & the Alarms links. These modules are made only with passive components and then are not critical modules for the system.

Kits are the following :

- Kits: PCM lightning protection (NTBY61QA)
- EAM lightning protection (NTBY98AA)

The TMA Kits (NTUM32AA, NTUM32BA, NTUM34AA) as ancillary equipments already comply with FCC standard, and are under the responsibility of the OEM supplier.

3.2.2 LIST OF CABLES

The following ports of the UMTS 1900 Indoor 2 iBTS 24V were available and connected :

- lub port (telecom port) : cable referenced NTBY60TA 25 meters 100Ω. This cable has been looped in order to transmit TX signals on RX ones.
- Alarms externs ports: cable referenced NTBY6102 25 meters. 1 cable has been looped and the other cable has been in open circuit.
- Radio port (signal port) : 6 RF cables RADIALL SHF9TD – DC-2GHz – Insertion loss < 5.5 dB at 2 GHz (15 meters). Attenuators and loads have also been used on RF links.
- DC port : Lab cable (about 10 meters).

3.3. SOFTWARE NEEDS FOR UMTS 1900 INDOOR 2 IBTS

As the objective is to perform the FCC marking on the UMTS 1900 Indoor 2 iBTS 24V with i-modules, we need to use performance criteria as defined in the EMC applicable standard for UMTS project.

Consequently, for emissions, we have to configured the equipment with the power amplifiers set at their maximum rated level, and looped back the lub link in order to generate activity inside this cable.

If one of the above functionality is not available for the testing phase, we will not be able to perform the FCC marking based on the tests realized.

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

3.4. UMTS 1900 OUTDOOR I-BTS HARDWARE TECHNICAL STATUS

Details on the technical status of the system will be available in the document, supplied by Nortel Networks during the commissioning & acceptance phase form for UMTS 1900 Outdoor iBTS with the i-modules.

The following table presents the hardware status of the Nortel Networks UMTS 1900 Outdoor iBTS during the i-modules introduction phase.

Modules Designation		Supplier
Outdoor precabled CABINET with Batteries	NTUM70AA	SANMINA
Digital shelf –48V/AV	NTUM20AA	NORTEL
Interco	NTUM60AA	NORTEL
CEM alpha	NTUM00AA	NORTEL
	FBBC NTUM01AA	NORTEL
	RBBC NTUM02AA	NORTEL
TRM	NTUM10AA	NORTEL
	RTRX NTUM11AA	NORTEL
	DTRX NTUM12AA	NORTEL
CCM module	NTGY25AA	NORTEL
	AXE NTGY26AA	NORTEL
	BRIC NTGY27AA	NORTEL
GPSAM	NTUM24AA	NORTEL
MCPA	NTUM30PA	POWERWAVE
DDM	NTUM42AA	FOREM
Rectifier Shelf	NTUM87AA	MITRA / CHEROKEE
Rectifier Control board SPCM	NTUM85AA	MITRA / CHEROKEE
Rectifier	NTUM86AA NTUM86AB	MITRA / CHEROKEE
Filtering Box Slipt phase	NTUM90BA	SANMINA
LPPCM	NTBY98BA	
EAM lightning protection	NTBY98AA	
TMA Kits	NTUM35AA	
PCM external cable 100 Ω	NTQG41HA	
iDACS	NTUM80AA	LIEBERT

This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form. A SANMINA-SCI formal written agreement is required for any partial copy of this document.

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

Battery	NTUM92AA	HAWKER
User ICO	NTUM37AA	SANMINA
MCA	NTUM7200	SANMINA
AC Main	NTUM39AA	SANMINA
iCCM module (Board)	NTUM25BA	NORTEL
(Shelf)	NTUM26AA	
iTRM module	NTUM17AA	NORTEL
iCEM 64 module	NTUM00CA	NORTEL
iCEM 128 module	NTUM00DA	

3.5. LIST OF KITS & CABLES

3.5.1 LIST OF KITS

In fact, protections modules are optional but can be used to protect the PCM links & the Alarms links. These modules are made only with passive components and then are not critical modules for the system.

Kits are the following :

- Kits: PCM lightning protection (NTUM98BA)
- EAM lightning protection (NTUM98AA)

The TMA Kit (NTUM35AA) as ancillary equipment already comply with FCC standard, and is under the responsibility of the OEM supplier.

3.5.2 LIST OF CABLES

The following ports of the UMTS 1900 Outdoor iBTS were available and connected :

- lub port (telecom port) : cable referenced NTQG41HA 25 meters 100Ω. This cable has been looped in order to transmit TX signals on RX ones.
- Alarms externs ports: cable referenced NTUM41JA 25 meters. 1 cable has been looped and the other cable has been in open circuit.
- Radio port (signal port) : 6 RF cables RADIALL SHF9TD – DC-2GHz – Insertion loss < 5.5 dB at 2 GHz (15 meters). Attenuators and loads have also been used on RF links.
- DC port : Lab cable (about 10 meters).

3.6. SOFTWARE NEEDS FOR IBTS UMTS 1900 OUTDOOR IBTS

As the objective is to perform the FCC marking on the UMTS 1900 Outdoor iBTS with i-modules, we need to use performance criteria as defined in the EMC applicable standard for UMTS project. Consequently, for emissions, we have to configured the equipment with the power amplifiers set at their maximum rated level, and looped back the lub link in order to generate activity inside this cable.

If one of the above functionality is not available for the testing phase, we will not be able to perform the FCC marking based on the tests realized.

*This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form.
A SANMINA-SCI formal written agreement is required for any partial copy of this document.*

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

4. TEST PLAN SUMMARY

4.1. TESTS MATRIX FOR I-MODULES INTRODUCTION ON UMTS 1900 INDOOR 2 IBTS

The following table lists the tests to be done, the severity level to apply, the configuration to test and comment when necessary.

	Test case	Application	Standard	Test requirement	Performance criteria	Comment
	Emission tests					
1	Radiated emissions	Enclosure of iBTS Indoor	FCC Part 15 § 15.109	30MHz – 18 GHz	Class B	This EMC test is realized with the normal configuration.
2	Radiated emissions	Enclosure of iBTS Indoor	FCC Part 24 § 24.238	30 MHz – 20GHz	The spurious emissions must be attenuated by at least $43 + 10 \text{Log}(P)$ P = Transmitter rated Power in Watts	This EMC test is realized with the normal configuration.

*This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form.
A SANMINA-SCI formal written agreement is required for any partial copy of this document.*

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

4.2. TESTS MATRIX FOR INTRODUCTION ON UMTS 1900 OUTDOOR IBTS

The following table lists the tests to be done, the severity level to apply, the configuration to test and comment when necessary.

	Test case	Application	Standard	Test requirement	Performance criteria	Comment
	Emission tests					
1	Radiated emissions	Enclosure of iBTS Indoor	FCC Part 15 § 15.109	30MHz – 18 GHz	Class B	This EMC test is realized with the normal configuration.
2	Radiated emissions	Enclosure of iBTS Indoor	FCC Part 24 § 24.238	30 MHz – 20GHz	The spurious emissions must be attenuated by at least $43 + 10 \text{Log}(P)$ P = Transmitter rated Power in Watts	This EMC test is realized with the normal configuration.
3	Conducted emissions	AC Power	FCC Part 15	150 kHz – 30 MHz	Class B	This EMC test is realized in Split phase AC Power

*This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form.
A SANMINA-SCI formal written agreement is required for any partial copy of this document.*

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

4.3. TEST DESCRIPTION OF THE RADIATED EMISSION

Standard Coverage : FCC Part 15.109, FCC Part 24.238

Intend :

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonics and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of 2.989, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open filed measurements (e.g., a broadcast transmitter installed in a building) measurements will be acceptable of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
- (b) The measurements specified in paragraph (a) of this section shall be made for the following equipment :
- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
 - (2) All equipment operating on frequencies higher than 25 MHz.
 - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
 - (4) Other types of equipment as required, when deemed necessary by the Commission.

Test Procedure :

Radiated emission measurement procedures shall be performed as outlined in Section 8 of the ANSI C63.4 measurement standard. The iBTS will be tested to the applicable limits of the FCC rules. For radiated emission measurements the measurement distance between the center of the measurement antenna and the equipment under test shall be 3 meters (or less for frequencies above 1 GHz). In order to maximize all emission levels from the equipment, the emissions will be searched with the receive antenna at varied height levels. The equipment shall also be rotated a full 360 degrees on the turntable with the receive antenna at varying height levels (1 to 4 meters). Tests shall be made with the antenna positioned in both the horizontal and vertical planes of polarization. The iBTS shall be placed on the turntable as per ANSI C63.4 measurement procedures. Please see the Part 15 test plan as Part 24 radiated requirements will be tested in conjunction with the Part 15 testing. The spectrum shall be searched to identify emissions. A complete scan of the applicable spectrum shall be completed (up to 10th harmonic of fundamental). The transmitter shall then be turned off, with the rest of the equipment powered on. A complete scan of the spectrum shall be done and referred to as "ambient" without the transmitter keyed on. Emissions emanating from the transmitter shall be identified from comparing these two scans. The identified emissions (from the transmitter) shall be measured and the levels recorded with the transmitter keyed on at full rated power output.

Important remark :

Substitution measurements must be made on all detected emissions given that the limits for the FCC are given in power measurements. If no emissions are detected, measurements should be made et the noise floor levels for each of the transmitter harmonic frequencies and a statement should be placed in the test report indicating that no emissions were detected.

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

The equipment was configured as shown in the next figure.

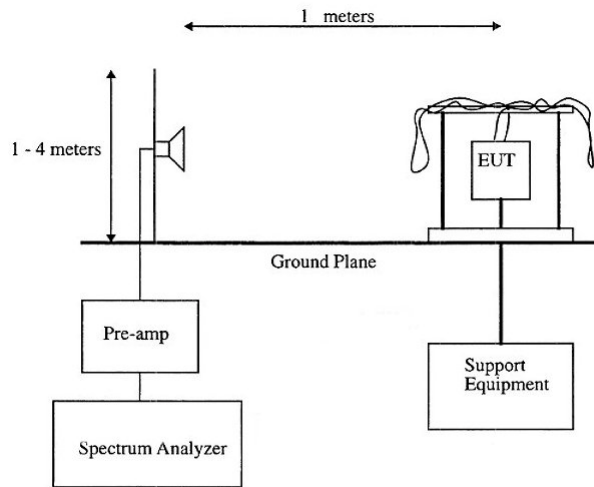


Figure 7 : Test configuration for Radiated Spurious emissions

Limits for radiated emissions from FCC Part 24.

Frequency range	Minimum requirement (e.r.p.)/Reference Bandwidth
30 MHz ≤ f < 20 GHz	The spurious emissions must be attenuated by at least 43 + 10 Log(P) P = Transmitter rated Power in Watts

Limits for radiated emissions (FCC Part 15 class B)

Frequency range MHz	Distance m	Electric fields	
		μV/m	dBμV/m
30-88	3	100	40
88-216	3	150	43.5
216-960	3	200	46
>960	3	500	54

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

Measurements were made according to the procedures outline in ANSI C63.4
 The emissions were investigated up to the tenth harmonic of the fundamental emission (20 GHz).

The measured level of the emissions was recorded and compared to the limit.
 The reference level for spurious radiation was taken with reference to an ideal dipole antenna excited by the rated output power according to the following relationship :

$$E(V/m) = \frac{1}{R(m)} * \sqrt{30 * P_t * G}$$

Where,

- E = Field Strength in Volts/meter,
- R = Measurement distance in meters,
- P_t = Transmitter Rated Power in Watts (30 Watts or 45 Watts),
- G = Gain of ideal Dipole (linear)

Therefore :

$$E(V/m) = \sqrt{30 * 30 * 1.64}$$

E = 38.42 V/m = 151.69 dBμV/m

The spurious emissions must be attenuated by at least 43 + 10*Log(30) = 57.7 dB.

Therefore the field strength limit at 1 meters is :

E = 151.69 dBμV/m – 57.7 dB = 93.9 dBμV/m

Or

$$E(V/m) = \sqrt{30 * 45 * 1.64}$$

E = 47V/m = 153.44 dBμV/m

The spurious emissions must be attenuated by at least 43 + 10*Log(45) = 59.5dB.

Therefore the field strength limit at 1 meters is :

E = 153.44 dBμV/m – 59.5 dB = 93.9 dBμV/m

Spectrum Analyzer setting during measurements shall be as following :

Receiver Setting	Pre-Scan (to identify spurious emissions from EUT)	Final Measurements
Detector Type	Peak	Quasi-Peak (CISPR)
Mode	Max Hold	Not Applicable
Bandwidth	100 kHz or 1 MHz (for > 1GHz)	120 kHz*
Amplitude Range	60 dB	20 dB
Measurement Time	Not Applicable	> 1s
Observation Time	Not Applicable	> 15s
Step size	Continuous sweep	Not Applicable
Sweep Time	Coupled	Not Applicable
Measuring Distance	3m for 30 MHz - 1GHz 1m for 1GHz - 20GHz	10m for 30 MHz - 1GHz 1m for 1GHz - 20GHz

*This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form.
 A SANMINA-SCI formal written agreement is required for any partial copy of this document.*

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

Pass / Fail criteria :

- For 30 MHz to 1 GHz :
 Measurement distance : **10 m**
 Limit : [30 MHz-88 MHz] **30 dB μ V/m**
 [88 MHz-216 MHz] **33.5 dB μ V/m**
 [216 MHz-960 MHz] **36 dB μ V/m**
 Above 960 MHz **43.5 dB μ V/m**

- For 1 GHz to 20 GHz :
 Measurement distance : 1 m
 Limit : **93.9 dB μ V/m**

Limits for radiated emissions from FCC Part 24.

Frequency range	Minimum requirement (e.r.p.)/Reference Bandwidth
30 MHz \leq f < 20 GHz	The spurious emissions must be attenuated by at least 43 + 10 Log(P) P = Transmitter rated Power in Watts

Limits for radiated emissions (FCC Part 15 class B)

Frequency range MHz	Distance m	Electric fields	
		μ V/m	dB μ V/m
30-88	3	100	40
88-216	3	150	43.5
216-960	3	200	46
>960	3	500	54

4.3.1.1 CONDUCTED EMISSIONS

Limits for conducted emissions (FCC Part 15 class B)

Frequency range	Quasi-peak	Average
> 0,15-0,5 MHz	66 - 56 dB μ V	56 - 46 dB μ V
> 0.5- 5 MHz	56 dB μ V	46 dB μ V
> 5-30 MHz	60 dB μ V	50 dB μ V
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

4.4. UMTS 1900 IBTS EMISSION TESTS CONFIGURATIONS

The iBTS will be configured with the maximum hardware activation in order to simulate the worst case. The hardware configuration will then be equivalent to a STSR3D.

For a functional point of view, the test configuration shall be as close to the normal intended use and the base station shall transmit with the maximum power declared by Nortel with all the transmitters active. So the 6 MCPA have to transmit a UMTS radio signal at the maximum power for these configurations, (45W for Indoor) & (30W for Outdoor). The iBTS will be configured to transmit a radio signal corresponding to test model 2 (according to the 3 GPP standard) on all the MCPA. One carrier per MCPA is expected.

Following the software, we can activate the RF links as follow:

- TRM 2 output on PA 1 and 6 transmitting at 1932.4 MHz and 46.5 dBm for Indoor , 44.7dBm for Outdoor.
- TRM 3 output on PA 2 and 3 transmitting at 1960 MHz and 46.5 dBm for Indoor, 44.7dBm for Outdoor.
- TRM 9 output on PA 4 and 5 transmitting at 1987.6 MHz and 46.5 dBm for Indoor , 44.7dBm for Outdoor.

In the same time, some data are looped back on the lub link (external cable with TX and RX looped back together).

All the input/output ports will be connected to representative cables and load. The nominal external cables shall be supplied to Sanmina EMC team before the tests.

Internal protection module is optional but can be used to protect the Alarm links. This module is made only with passive components and then are not critical modules for the system. Nevertheless, this optional module will be used in the system for the emissions tests.

External protection module is optional but can be used to protect the PCM links. This module is made only with passive components and then are not critical modules for the system. Nevertheless, this optional module will be used in the system for the emission tests.

For the UMTS Indoor 2 iBTS, we used converter Kit 24 V (NTBY51AA), this optional module is used for some configuration for US market.

5. CONCLUSION

The tests presented in this document, if compliant with the EMC standard, will allow determining the compliance of the i-modules on UMTS 1900 Indoor 2 iBTS 24V & of the UMTS 1900 Outdoor iBTS with the FCC standards.

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

6. ABBREVIATIONS AND DEFINITIONS

6.1. ABBREVIATIONS

The following abbreviations are relevant to this document.

Abbreviation	Explanation
3GPP	Third Generation Partnership Project
3- ϕ	Three Phase
A	Ampere
AC	Alternating Current
AMN	Artificial Mains Network
ATM	Asynchronous Transfer Mode
BIP	Breaker Interface Panel
BLER	Block Error Ratio
BS	Base Station
BTS	Base station Transceiver System
CB	Circuit Breaker
CCM	Core Control Module
CE	Compliance Europe
CEM	Channel Element Module
CPICH	Common Pilot Channel
CPC	Common Product Code
CPU	Central Processing Unit
CRC	Cyclic Redundancy Check
dB	Decibel
dBm	Power unit (in Decibels) referenced to 1 mW
dB μ V	Voltage unit (in Decibels) referenced to 1 μ V
dB μ V/m	Field Strength unit (in Decibels) referenced to 1 μ V/m.
DC	Direct Current
DDM	Dual Duplexer Module
DPCH	Dedicated Physical Channel
EFT	Electrical Fast Transients
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
EN	European Norms
ESD	Electrostatic Discharge
EUT	Equipment Under Test
f	Frequency
f _c	Chip frequency in IS-95 standard. f _c = 1.2288MHz
FCC	Federal Communications Commission
FDD	Frequency Division Duplexing
GHz	Gigahertz
GPS	Global Positioning System
GPSAM	Global Positioning System Alarm Module
HSSL	High Speed Serial Links
HW	Hardware (also H/W)
Hz	Hertz

*This confidential document is the property of SANMINA-SCI, it must not be copied or circulated except in its entirety form.
A SANMINA-SCI formal written agreement is required for any partial copy of this document.*

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

iaw	In Accordance With
iBTS	Internet Base station Transceiver System
IEC	International Electrotechnical Commission
I/O	Input/Output
ITU	International Telecommunications Union
kHz	Kilohertz
kV	Kilovolt
LISN	Line Impedance Stabilization Network
m	Meter
MCPA	Multichannel Power Amplifier (also PA).
MHz	Megahertz
mm	Millimeter
mW	Milliwatt
N/A	Not Applicable
OEM	Original Equipment Manufacturer
PA	Power Amplifier
PCB	Printed Circuit Board
PCCPCH	Primary Common Control Physical Channel
PEC	Procurement Engineering Code
PFM	Power Filter Module
PI	Product Integrity
PICH	Page Indication Channel
PP and G	Power Protection and Ground
RF	Radio Frequency
R&TTE	Radio and Telecommunications Equipment
SF	Spreading Factor
STSR	Sector Transmit Sector Receive
TBT	Test Bench Tools
TDD	Time Division Duplexing
TMA	Tower Masthead Antenna
TRM	Transmit Receive Module
ULC	Unlimited Liability Corporation
UMTS	Universal Mobile Telecommunications System
μV	Microvolts
V	Volts
VAC	Volts AC
VDC	Volts DC
W	Watt

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

6.2. DEFINITIONS

The following are definitions of terms used throughout this test plan.

Ancillary Equipment - Equipment (apparatus), used in connection with a receiver, transmitter or transceiver is considered as an ancillary equipment (apparatus) if:

- the equipment is intended for use in conjunction with a receiver, transmitter or transceiver to provide additional operational and/or control features to the radio equipment, (e.g. to extend control to another position or location); and
- the equipment cannot be used on a stand alone basis to provide user functions independently of a receiver, transmitter or transceiver; and
- the receiver, transmitter or transceiver to which it is connected, is capable of providing some intended operation such as transmitting and/or receiving without the ancillary equipment (i.e. it is not a sub-unit of the main equipment essential to the main equipment basic functions).

Base Station Equipment - Radio and/or ancillary equipment intended for operation at a fixed location and powered directly or indirectly (e.g. via an AC/DC converter or power supply) by AC mains network, or an extended local DC mains network.

BLER - BLER is block error ratio. The BLER calculation shall be based on evaluating the CRC on each transport block.

Continuous phenomena (continuous disturbance) - Electromagnetic disturbance, the effects of which on a particular device or equipment cannot be resolved into a succession of distinct effects (IEC 60050-161).

Radio communications equipment - Telecommunications equipment, which includes one or more transmitters and/or receivers and/or parts thereof for use in a fixed, mobile or portable application. It can be operated with ancillary equipment but if so, is not dependent on it for basic functionality.

Port - A particular interface, of the specified equipment (apparatus), with the electromagnetic environment. For example, any connection point on equipment intended for connection of cables to or from that equipment is considered as a port (see Figure 2-1).

Signal and control - Port which carries information or control signals, excluding antenna ports.

Spurious Emission – Emissions on a frequency, or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products but exclude out-of band emissions.

Effective Radiated Power (ERP) – The product of the power supplied to the antenna and its gain relative to a half-wave dipole in a given direction.

Equivalent Isotropically Radiated Power (e.i.r.p.) – The product of the power supplied to the antenna and the antenna gain in a given direction relative to an isotropic antenna.

Mean power (of a radio transmitter) – The average power supplied to the antenna transmission line by a transmitter during an interval of time sufficiently long compared with the lowest frequency encountered in the modulation taken under normal operating conditions.

EMC Test Plan for introduction of i-modules on UMTS 1900 MHz product

Telecommunication port - Ports, which are intended to be connected to telecommunication networks (e.g. public switched telecommunication networks, integrated services digital networks), local area networks (e.g. Ethernet, Token Ring) and similar networks.

Transient phenomena - Pertaining to or designating a phenomena or a quantity, which varies between two consecutive steady states during a time interval short, compared with the time-scale of interest (IEC 60050-161).

fc -Chip frequency in IS-95 standard. $f_c = 1.2288\text{MHz}$

NodeB - A logical node responsible for radio transmission/reception in one or more cells to/from the User Equipment.

Iub - Interface between a Node B and an RNC.

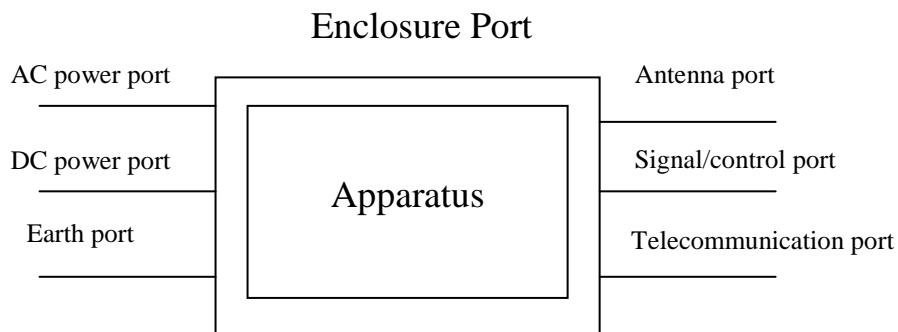


Figure 1: Examples of Ports.

END OF DOCUMENT