

**Test Report No. 7191020377-EEC11/07**  
dated 03 Jan 2012



PSB Singapore

**Note:** This report is issued subject to the Testing and Certification Regulations of the TÜV SÜD Group and the General Terms and Conditions of Business of TÜV SÜD PSB Pte Ltd. In addition, this report is governed by the terms set out within this report.

**Choose certainty.  
Add value.**

FORMAL REPORT ON TESTING IN ACCORDANCE WITH  
47 CFR FCC Parts 15B & C & E: 2011  
OF A  
**ACTIVE SUBWOOFER**  
[ Models : SB-HWA550 & SB-HWA350 ]  
[ FCC ID : ACJ-11AR1201 ]

**TEST FACILITY** TÜV SÜD PSB Pte Ltd,  
Electrical & Electronics Centre (EEC), Product Services,  
No. 1 Science Park Drive, Singapore 118221

**FCC REG. NO.** 99142 (3m and 10m Semi-Anechoic Chamber, Science Park)

**IND. CANADA REG. NO.** 2932I-1 (3m and 10m Semi-Anechoic Chamber, Science Park)

**PREPARED FOR** Panasonic AVC Networks (S) Pte Ltd  
202, Bedok South Avenue 1,  
Singapore 469332

Tel : (+65) 6240 1891 Fax : (+65) 6245 8804

**QUOTATION NUMBER** 219140675

**JOB NUMBER** 7191020377

**TEST PERIOD** 14 Nov 2011 – 03 Jan 2012

**PREPARED BY**


**APPROVED BY**

Quek Keng Huat  
Associate Engineer

Lim Cher Hwee  
Assistance Vice President



Laboratory:  
TÜV SÜD PSB Pte. Ltd.  
No.1 Science Park Drive  
Singapore 118221



LA-2007-0380-A  
LA-2007-0381-F  
LA-2007-0382-B  
LA-2007-0383-G  
LA-2007-0384-G  
LA-2007-0385-E  
LA-2007-0386-C  
LA-2010-0464-D

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

Phone : +65-6885 1333  
Fax : +65-6776 8670  
E-mail: testing@tuv-sud-psb.sg  
www.tuv-sud-psb.sg  
Co. Reg : 199002667R

Regional Head Office:  
TÜV SÜD Asia Pacific Pte. Ltd.  
3 Science Park Drive, #04-01/05  
The Franklin, Singapore 118223  
**TUV®**



---

**TABLE OF CONTENTS**

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING EQUIPMENT DESCRIPTION


EUT OPERATING CONDITIONS

MAXIMUM CONDUCTED OUTPUT POWER TEST

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

ANNEX B - FCC LABEL & POSITION

ANNEX C - USER MANUAL, TECHNICAL DESCRIPTION,  
BLOCK & CIRCUIT DIAGRAMS

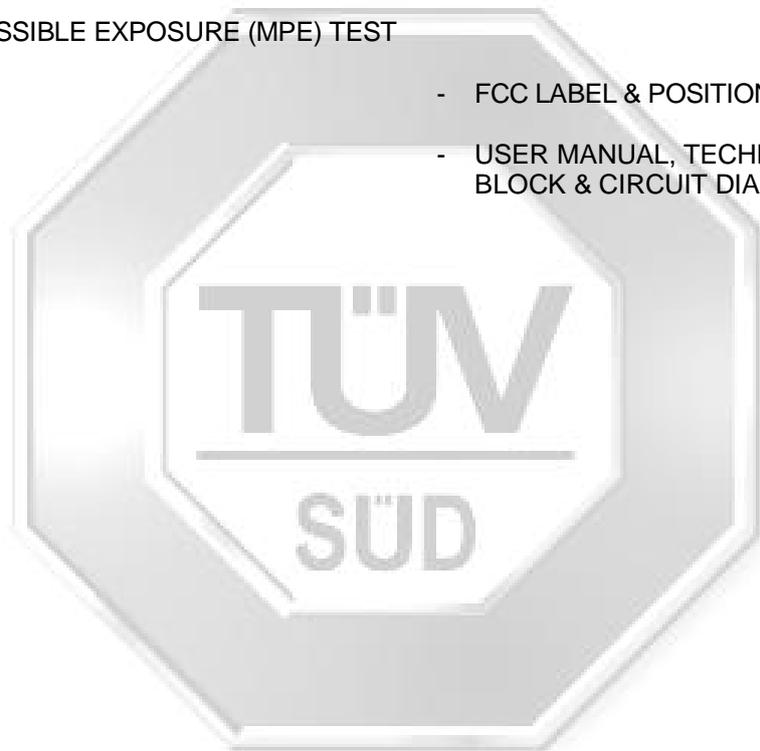



**TEST SUMMARY**

The product was tested in accordance with the customer's specifications.

**Test Results Summary**

Test Standard	Description	Pass / Fail
47 CFR FCC Part 15: 2011		
15.247(b)(3), 15.407(a)	Maximum Conducted Output Power	Pass
1.1310	Maximum Permissible Exposure	Pass





TEST SUMMARY

Notes

- Three channels as listed below, which respectively represent the lower, middle and upper channels of the Equipment Under Test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
<u>Lower Band (5150GHz – 5250GHz)</u>	
Channel 0	5.180
Channel 2	5.220
Channel 3	5.240

<u>Upper Band (5725GHz – 5825GHz)</u>	
Channel 4	5.745
Channel 6	5.785
Channel 8	5.825

- The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
- All test measurement procedures are according to ANSI C63.4: 2003.
- The maximum measured RF power of the Equipment Under Test (SB-HWA550) is 14.4dBm.
- The EUT was tested in continuous transmission mode; ie 0dB duty cycle.
- Panasonic AVC Networks Singapore Pte Ltd declared that the models **SC-HTB550, SC-HTB450, SC-HTB350 & SC-HTB351** are using the same RF module and identical in term of components, circuitry design, PCB layouts and mechanical structures. The model **SC-HTB550** is the worst case model among the declared models in view of RF and EMC performance. Shall the model **SC-HTB550** passes the RF and EMC test, the declared models **SC-HTB450, SC-HTB350 & SC-HTB351** are deemed to meet the same requirements. See below tables for the differences:

	Basic model	Similar model	Similar model	Similar model	Similar model
	SC-HTB550 US	SC-HTB550 Canada	SC-HTB450 Canada	SC-HTB350 US	SC-HTB351 US
Main Unit	SU-HTB550	SU-HTB550	SU-HTB450	SU-HTB350	SU-HTB350
HDMI Input	Yes (2X)	Yes (2X)	Yes (2X)	No	No
HDMI Output	Yes	Yes	Yes	No	No
Analog Input	No	No	No	Yes (Stereo)	Yes (Stereo)
Function Indicator	8 LEDS	8 LEDS	8 LEDS	7 LEDS	7 LEDS
Active Subwoofer	SB-HWA550	SB-HWA550	SB-HWA450	SB-HWA350	SB-HWA350
Wooden Box	Glossy	Glossy	Matt	Matt	Matt
Front Speaker	SB-HTB550	SB-HTB550	SB-HTB350	SB-HTB350	SB-HTB350
Metal Mesh	Anodizing	Anodizing	ED Coating	ED Coating	ED Coating



TEST SUMMARY

Notes (Continued)


MAIN UNIT NAME PLATE



ACTIVE SUBWOOFER NAME PLATE

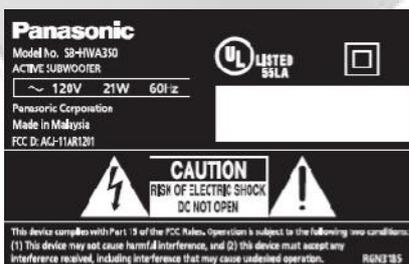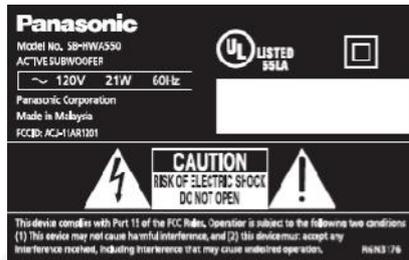

SPEAKER NAME PLATE

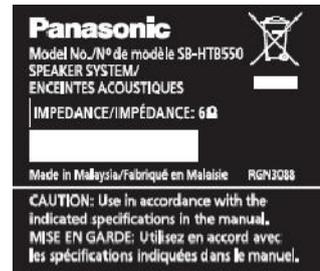

Modifications

No modifications were made.



**PRODUCT DESCRIPTION**

Description : The Equipment Under Test (EUT) is an **ACTIVE SUBWOOFER**.

Applicant : Panasonic AVC Networks (S) Pte Ltd  
202, Bedok South Avenue 1,  
Singapore 469332

Manufacturer : Panasonic Corporation  
1006, Oaza Kadoma, Kadoma-City,  
Osaka 571 8501, Japan

Factor(ies) : Panasonic AVC Networks Johor Malaysia Sdn Bhd  
IE, PLO 460, Jalan Bandar, 81700  
Pasir Gudang, Johor, Malaysia

Model Number : SB-HWA550 & SB-HWA350

FCC ID : ACJ-11AR1201

Serial Number : Nil

Microprocessor : Avnera AV7621

Operating / Transmitting Frequency : 5.180GHz (lower channel) to 5.825GHz (upper channel)  
9 channels.

Clock / Oscillator Frequency : 16MHz

Modulation :  $\pi/4$  DQPSK / OFDM

Antenna Gain : 2.0 dBi

Port / Connectors : Nil

Rated Input Power : 120V 60Hz

Accessories : Nil



**SUPPORTING DESCRIPTION DESCRIPTION**

<b>Equipment Description (Including Brand Name)</b>	<b>Model, Serial &amp; FCC ID Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
Panasonic Speaker System	M/N: SB-HTB550 S/N: TN1JA001008 FCC ID: DoC	2.00m unshielded speaker cable
Lenovo Laptop	M/N: R400 S/N: L3-ALB2G 09/03 FCC ID: DoC	1.80m unshielded power cable
Lenovo AC Adapter (Laptop)	M/N: PA-1650-161 S/N: 11S92P1158Z1 FCC ID: DoC	2.00m unshielded power cable
Avena TX Module Jig	M/N: AVTF123-01A S/N: Nil FCC ID: DoC	1.00m unshielded USB cable
Avena RX Module Jig	M/N: AVTF123-02A S/N: Nil FCC ID: DoC	1.00m unshielded USB cable
Antel Electronics Co., Ltd. AC Adapter (Avena Jig)	M/N: SF-789 S/N: Nil FCC ID: DoC	1.00m unshielded power cable
JVC DVD Player	M/N: XV-N680 S/N: 124R1026 FCC ID: DoC	1.00m unshielded power cable 1.00m unshielded HDMI cable



**EUT OPERATING CONDITIONS**

**47 CFR FCC Part 15**

- 1. RF Conducted Spurious Emissions**
- 2. Maximum Permissible Exposure**

The EUT was exercised by operating in maximum continuous transmission in test mode, i.e transmitting at lower, middle and upper channels respectively at one time.





**MAXIMUM CONDUCTED OUTPUT POWER TEST**

**47 CFR FCC Parts 15.247(b)(3) and 15.407(a) Maximum Conducted Output Power Limits**

The EUT shows compliance to the requirement of 15.247(b)(3) for band 5.725GHz – 5.850GHz, which states the maximum peak power of the EUT employing digital modulation shall not exceed 1W (30dBm).

The EUT shows compliance to the requirements of 15.407(a), which states the maximum conducted output power of the EUT shall not exceed the lesser of the following:

Frequency Range (GHz)	Limit Values
5.15 – 5.25	50mW or 4dBm + 10logB*
5.725 – 5.825	1000mW or 17dBm + 10logB*

\* whichever is the lower limit and B refers to the 26dB emission bandwidth in MHz.

**47 CFR FCC Parts 15.247(b)(3) and 15.407(a) Maximum Peak Power Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
Boonton RF Power Meter	4532	72901	24 Mar 2012
Boonton Power Sensor	56218-S/1	1417	24 Mar 2012


**47 CFR FCC Parts 15.247(b)(3) and 15.407(a) Maximum Conducted Output Power Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the power meter via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Parts 15.247(b)(3) and 15.407(a) Maximum Conducted Output Power Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at Channel 0 (5.180GHz).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The Equivalent Isotropic Radiated Power (EIRP) of the EUT was computed by adding its antenna gain to the measured maximum conducted output power.
4. The steps 2 to 3 were repeated with the transmitting frequency was set to Channel 2 (5.220GHz), Channel 3 (5.240GHz), Channel 4 (5.745GHz), Channel 6 (5.785GHz) and Channel 8 (5.825GHz) respectively.

**MAXIMUM PEAK POWER TEST**

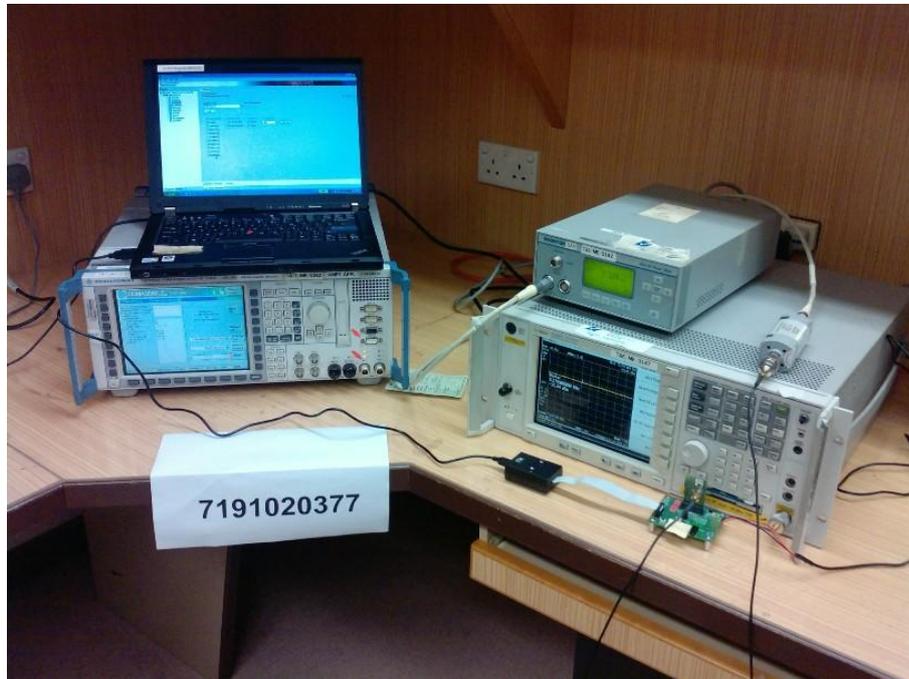

**Maximum Peak Power Test Setup**





**MAXIMUM CONDUCTED OUTPUT POWER TEST**

**47 CFR FCC Parts 15.247(b)(3) and 15.407(a) Maximum Conducted Output Power Results**

Test Input Power	110V 60Hz	Temperature	23°C
Antenna Gain	2.0 dBi	Relative Humidity	60%
Model	SB-HWA550	Atmospheric Pressure	1030mbar
Antenna	0	Tested By	Chelmin Li

Channel	Channel Frequency (GHz)	Maximum Peak Power (mW)	Maximum EIRP (mW)	Limit (mW)
0	5.180	27.750	43.981	50
2	5.220	23.084	36.586	50
3	5.240	24.170	38.307	50
4	5.745	23.272	51.844	1000
6	5.785	22.633	41.726	1000
8	5.825	23.260	51.666	1000

Test Input Power	110V 60Hz	Temperature	23°C
Antenna Gain	2.0 dBi	Relative Humidity	60%
Model	SB-HWA550	Atmospheric Pressure	1030mbar
Antenna	1	Tested By	Chelmin Li

Channel	Channel Frequency (GHz)	Maximum Peak Power (mW)	Maximum EIRP (mW)	Limit (mW)
0	5.180	27.343	43.336	50
2	5.220	23.128	36.656	50
3	5.240	24.919	39.494	50
4	5.745	26.221	41.558	1000
6	5.785	26.245	41.596	1000
8	5.825	25.989	41.190	1000



**MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST**

**47 CFR FCC Part 1.1310 Maximum Permissible Exposure (MPE) Limits**

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (min)
0.3 - 1.34	614	1.63	100 <sup>Note 2</sup>	30
1.34 - 30	824 / f	2.19 / f	180 / f <sup>2</sup> <sup>Note 2</sup>	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30
Notes				
1. f = frequency in MHz				
2. Plane wave equivalent power density				

**47 CFR FCC Part 1.1310 Maximum Permissible Exposure Computation**

The power density at 20cm distance was computed from the following formula:

$$S = (30GP) / (377d^2)$$

where

- S = Power density in W/m<sup>2</sup>
- P = 0.02775 W
- d = Test distance at 0.2m
- G = Numerical isotropic gain, 1.59 (2.0dBi)

Substituting the relevant parameters into the formula:

$$S = [(30GP) / 377d^2]$$

$$= 0.0875 \text{ W/m}^2$$

$$= 0.0088 \text{ mW/cm}^2$$


∴ The power density of the EUT at 20cm distance is 0.0088 mW/cm<sup>2</sup> based on the above computation and found to be lower than the power density limit of 1.0mW/cm<sup>2</sup>.



Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011

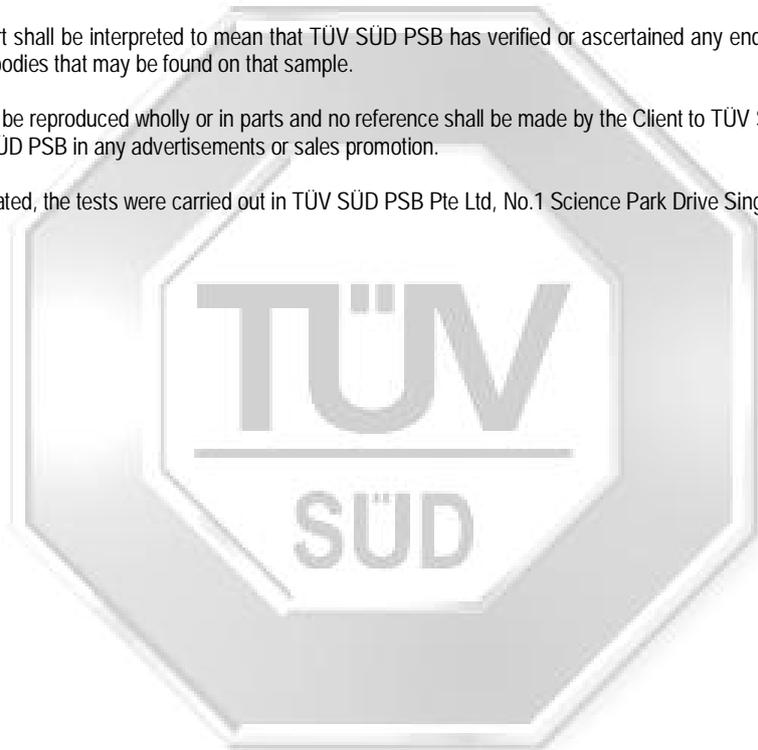




## FCC LABEL & POSITION

## ANNEX B

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

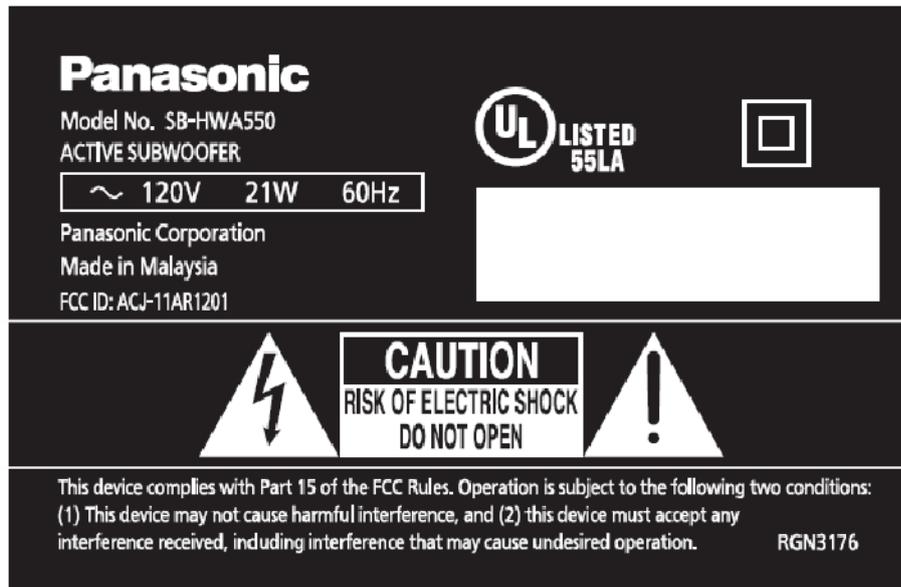

Sample Label



Physical Location of FCC Label on EUT



**USER MANUAL TECHNICAL DESCRIPTION BLOCK  
& CIRCUIT DIAGRAM**

---

**ANNEX C**

