

Report on the Radio Testing of:

Bluetooth Module

Model(s): RSNE041B1

In accordance with
47 CFR FCC Part 15C

Panasonic AVC Networks Singapore
202 Bedok South Avenue 1
Singapore 469332



PSB Singapore

Add value.
Inspire trust.

COMMERCIAL-IN-CONFIDENCE

Document Number: 7191189243-EEC18/03 | Issue: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Foo Kai Maun	03 Sep 2018	
Authorised Signatory	Quek Keng Huat	31 Aug 2018	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD PSB document control rules.

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with the mentioned standard(s).



LA-2007-0380-A
LA-2007-0381-F
LA-2007-0382-B
LA-2007-0383-G

LA-2007-0384-G
LA-2007-0385-E
LA-2007-0386-C
LA-2010-0464-D

The results reported herein have been performed in accordance with the terms of accreditation under the Singapore Accreditation Council. Inspections/Calibrations/Tests marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our inspection body/laboratory.

Laboratory:
TÜV SÜD PSB Pte. Ltd.
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: enquiries@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg : 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
1 Science Park Drive, #02-01
Singapore 118221
TUV[®]

Page 1 of 65



Contents

1	Report Summary	3
1.1	Report Modification Record.....	3
1.2	Introduction.....	4
1.3	Brief Summary of Results.....	5
1.4	Product Information.....	7
1.5	Test Facilities Registrations.....	8
1.6	Supporting Equipment.....	9
2	Test Details	10
2.1	Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement).....	10
2.2	Spectrum Bandwidth (6db Bandwidth Measurement).....	15
2.3	Maximum Peak Power	19
2.4	RF Conducted Spurious Emissions (Non-Restricted Bands).....	21
2.5	RF Conducted Spurious Emissions (Restricted Bands)	26
2.6	Band Edge Compliance (Conducted).....	39
2.7	Band Edge Compliance (Radiated)	42
2.8	Peak Power Spectral Density.....	47
2.9	Maximum Permissible Exposure (MPE).....	51
3	Photographs	52
4	Test Equipment	60
5	Measurement Uncertainty	62
6	Annex A – FCC Label and Position	63
	End of the Test Report	65



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	03 Sep 2018





1.2 Introduction

Applicant	:	Panasonic AVC Networks Singapore 202, Bedok South Avenue 1, Singapore 469332
Manufacturer	:	Panasonic Corporation 1006, Oaza Kadoma, Kadoma-City, Osaka 571 8501, Japan
Factory	:	Panasonic AVC Networks Johor Malaysia Sdn Bhd IE, PLO 460, Jalan Bandar, 81700 Pasir Gudang, Johor, Malaysia
Model Number(s)	:	RSNE041B1
Serial Number(s)	:	Nil
Number of Samples Tested	:	1
Test Sample(s) Condition	:	Good
Quotation Reference	:	5111822
Test Specification/Issue/Date	:	FCC 47 CFR Part 15C
Test Sample(s) Received Date	:	12 Jul 2018
Start of Test	:	12 Jul 2018
Finish of Test	:	15 Aug 2018

1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with specifications as shown below.

Specification Clause	Test Description	Result	Comments/Base Standard
47 CFR FCC Part 15			
15.107(a), 15.207	Conducted Emissions	Not Applicable *See Note 4	ANSI C63.4: 2014 ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)	Pass	ANSI C63.4: 2014 ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.247(a)(2)	Spectrum Bandwidth (6dB Bandwidth Measurement)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.247(b)(3)	Maximum Peak Power	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.247(d)	RF Conducted Spurious Emissions (Non-Restricted Bands)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.247(d)	RF Conducted Spurious Emissions (Restricted Bands)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.247(d)	Band Edge Compliance (Conducted)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.247(d)	Band Edge Compliance (Radiated)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.247(e)	Peak Power Spectral Density	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
15.35(c)	Duty Cycle Factor Computation	Not Applicable *See Note 5	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V04: 2017
2.1091	Maximum Permissible Exposure	Pass	

Notes

1. All the measurements in section 15.247 were done based on conducted measurements except Band Edge Compliance (Radiated) test.
2. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
3. The maximum measured RF power of the Equipment Under Test is 8.9dBm.
4. The Equipment Under Test (EUT) is a DC operated device and contains no provision for public utility connections.
5. The EUT was operated in continuous transmission, ie 100% duty cycle.



1.4 Product Information

1.4.1 Technical Description

Description	:	The Equipment Under Test(s) (EUT(s)) is a Bluetooth Module .
Microprocessor	:	CSR8811
Operating Frequency	:	2.402GHz – 2.480GHz
Clock / Oscillator Frequency	:	26MHz
Modulation	:	GFSK, Gaussian Frequency Shift Keying
Antenna Gain	:	2.0 dBi
Port / Connectors	:	Nil
Rated Power	:	3.3Vdc 500mA
Accessories	:	Nil

1.4.2 Test Configuration and Modes of Operation

Mode(s)	Description								
Maximum RF power transmission	<p>The EUT was exercised in the mode, transmitting at lower, middle and upper channels as shown below one at a time with all supported modulation schemes were evaluated. For Band Edge Compliance, only lower and upper channels were evaluated.</p> <table border="1"> <thead> <tr> <th><u>Transmit Channel</u></th> <th><u>Frequency (GHz)</u></th> </tr> </thead> <tbody> <tr> <td>Channel 0 (Lower Channel)</td> <td>2.402</td> </tr> <tr> <td>Channel 19 (Middle Channel)</td> <td>2.440</td> </tr> <tr> <td>Channel 39 (upper Channel)</td> <td>2.480</td> </tr> </tbody> </table>	<u>Transmit Channel</u>	<u>Frequency (GHz)</u>	Channel 0 (Lower Channel)	2.402	Channel 19 (Middle Channel)	2.440	Channel 39 (upper Channel)	2.480
<u>Transmit Channel</u>	<u>Frequency (GHz)</u>								
Channel 0 (Lower Channel)	2.402								
Channel 19 (Middle Channel)	2.440								
Channel 39 (upper Channel)	2.480								


1.5 Test Facilities Registrations

Requirements	Registration Numbers
FCC	994109 (Test Firm Registration Number) SG0002 (Designation Number)
ISED	<u>Science Park</u> 2932I-1 (3m and 10m Semi-Anechoic Chamber) <u>International Business Park</u> 2932N-1 (10m Semi-Anechoic Chamber)
VCCI	<u>Science Park</u> R-1335 (10m ANC), G-29 (10m ANC) C-2306 (C.E @ Lab 3) T-1471 (Telecom Ports @ Lab 3) <u>International Business Park</u> R-3324 (10m ANC), G-203 (10mANC) C-4933 (C.E @ CEIBP) T-2403 (Telecom Ports @ CEIBP)
BSMI	SL2-IS-E-6001R [CNS-13803 (ISM Equipment)] SL2-IN-E-6001R [CNS-13438 (IT Equipment)] SL2-R1/R2-E-6001R [CNS-13439 (Broadcast Receivers)] SL2-A1-E-6001R [CNS-13783-1 (Household Appliances)] SL2-L1-E-6001R [CNS-14115 (Lighting Equipment)]
SABS	SABS/A-LAB/0029/2018



1.6 Supporting Equipment

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Fujitsu LifeBook	M/N: S6410 S/N: R7Y00054 FCC ID: DoC	Nil
Fujitsu AC Adapter	M/N: CP293662-01 S/N: 06919569A FCC ID: DoC	1.80m unshielded power cable
CSR (Cambridge Silicon Radio) Development Board	M/N: CNS10020V3A S/N: 416499 FCC ID: Nil	2.00m unshielded USB cable

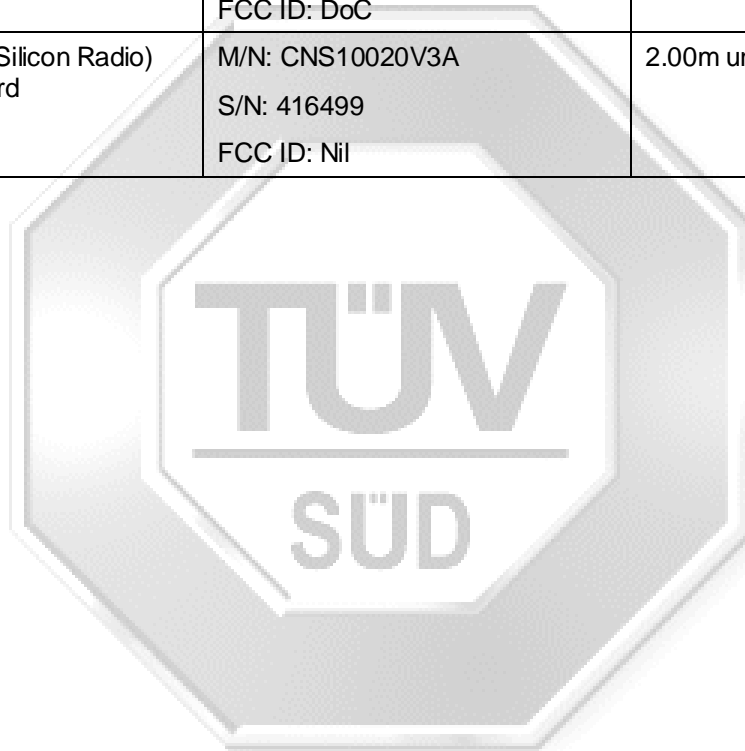

2 Test Details

2.1 Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)

2.1.1 Test Limits

Frequency Range (MHz)	Quasi-Peak Limit Values (dBµV/m)
0.009 - 0.490 *	20 log [2400 / F (kHz)] @ 300m
0.490 - 1.705	20 log [24000 / F (kHz)] @ 30m
1.705 - 30.0	30.0 @ 30m
30 – 88	40.0 @ 3m
88 – 216	43.5 @ 3m
216 – 960	46.0 @ 3m
Above 960 *	54.0 @ 3m

* For frequency bands 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

Restricted Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6
13.36 - 13.41			



2.1.2 Test Setup

- 2.1.2.1 The EUT and supporting equipment were set up in accordance with the requirements of the standard as shown in the setup photos.
- 2.1.2.2 The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
- 2.1.2.3 The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

2.1.3 Test Method

- 2.1.3.1 The EUT was switched on and allowed to warm up to its normal operating condition.
- 2.1.3.2 A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
- 2.1.3.3 The test was carried out at the selected frequency points obtained from the pre-scan. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission
- 2.1.3.4 A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point in range of 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, both Peak and Average measurements were carried out.
- 2.1.3.5 The measurements were repeated for the next frequency point, until all selected frequency points were measured.
- 2.1.3.6 The frequency range covered was from the lowest radio frequency signal generated from the EUT, without going below 9kHz to 10th harmonics of the EUT fundamental frequency, using the loop antenna for frequency below 30MHz, Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

Sample Calculation Example

At 300 MHz

Q-P limit = 46.0 dB μ V/m

Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB
Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V/m
(Calibrated level including antenna factors & cable losses)

Therefore, Q-P margin = 46.0 - 40.0 = 6.0

i.e. 6.0 dB below Q-P limit

2.2.5 Test Results

Test Input Power	3Vdc	Temperature	24°C
Test Distance	3m (<30MHz) 3m (≥30MHz – 25GHz)	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin
		Test Date	17 Jul 2018

Spurious Emissions ranging from 9kHz – 30MHz (for 9kHz – 90kHz, 110kHz – 490kHz) *See Note 2 & 3

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Spurious Emissions ranging from 9kHz – 30MHz *See Note 2 & 3

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel (Worst)
496.8230	35.4	46.0	10.6	300	357	H	39
666.3340	33.2	46.0	12.8	399	0	V	39
707.3950	32.0	46.0	14.0	101	58	H	39
834.8800	34.7	46.0	11.3	300	92	H	39
844.2390	35.3	46.0	10.7	200	309	V	39
848.7960	33.1	46.0	12.9	300	273	H	39

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
2.1888	60.2	74.0	13.8	51.7	54.0	2.3	110	293	V	0
2.9977	50.2	74.0	23.8	37.1	54.0	16.9	101	34	V	0
3.6000	51.4	74.0	22.6	51.0	54.0	3.0	169	360	V	0
4.3791	47.6	74.0	26.4	43.2	54.0	10.8	399	193	H	0
4.5067	50.0	74.0	24.0	38.9	54.0	15.1	101	34	V	0
6.0029	47.7	74.0	26.3	38.9	54.0	15.1	200	109	V	0

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.3188	47.7	74.0	26.3	37.2	54.0	16.8	101	338	V	19
2.9977	42.5	74.0	31.5	38.7	54.0	15.3	101	86	V	19
3.5999	52.4	74.0	21.6	50.8	54.0	3.2	101	23	H	19
4.8734	51.4	74.0	22.6	48.7	54.0	5.3	300	216	H	19
7.3235	52.7	74.0	21.3	46.5	54.0	7.5	300	174	H	19
17.7257	56.7	74.0	17.3	45.0	54.0	9.0	399	67	V	19


Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.3188	45.8	74.0	28.2	36.8	54.0	17.2	101	343	V	39
1.3471	47.0	74.0	27.0	36.5	54.0	17.5	101	0	V	39
3.5999	52.0	74.0	22.0	51.3	54.0	2.7	300	302	V	39
4.9554	51.2	74.0	22.8	47.6	54.0	6.4	300	216	H	39
7.4420	55.7	74.0	18.3	50.7	54.0	3.3	300	157	H	39
17.7621	56.6	74.0	17.4	45.0	54.0	9.0	300	218	V	39



Notes

1.	All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2.	"--" indicates no emissions were found and shows compliance to the limits
3.	The measurement was done at 3m. The measured results were extrapolated to the specified test limits as specified in § 15.209 (a) based on 40dB/decade.
4.	Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
5.	A "positive margin" indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative margin" indicates a FAIL.
6.	EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings: <u>30MHz - 1GHz</u> RBW: 120kHz VBW: 1MHz <u>>1GHz</u> RBW: 1MHz VBW: 3MHz
7.	The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
8.	The channel in the table refers to the transmit channel of the EUT.

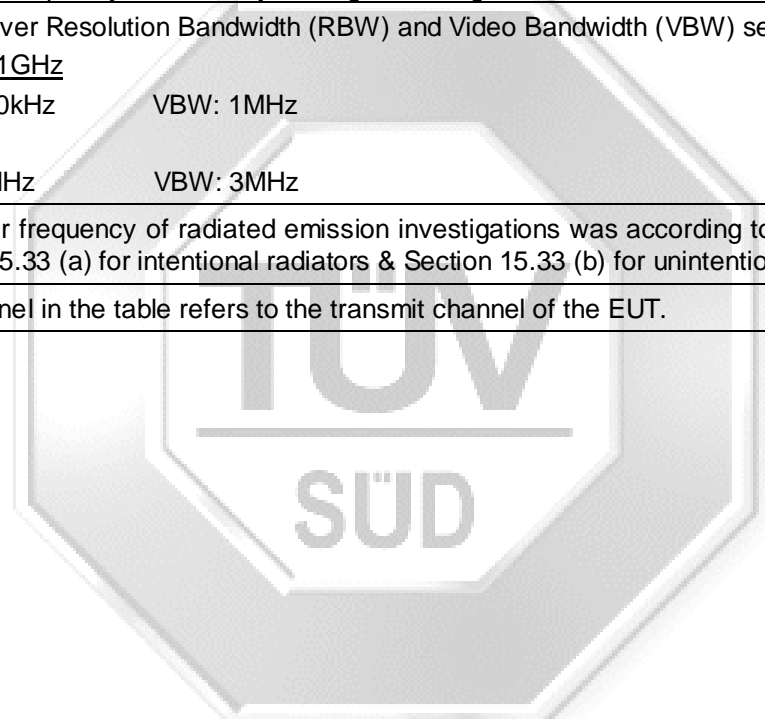

2.2 Spectrum Bandwidth (6db Bandwidth Measurement)

2.2.1 Test Limits

The EUT shows compliance to the requirements of this section, which states that the minimum bandwidth of the EUT employing digital modulation techniques shall be at least 500kHz.

2.2.2 Test Setup

2.2.2.1 The EUT and supporting equipment were set up as shown in the set up photo.

2.2.2.2 The power supply for the EUT was connected to a filtered mains.

2.2.2.3 The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.

2.2.2.4 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 3 times of RBW.

2.2.2.5 All other supporting equipment were powered separately from another filtered mains.

2.2.3 Test Method

2.2.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at lower channel.

2.2.3.2 The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 6dB bandwidth of the transmitting frequency.

2.2.3.3 The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.

2.2.3.4 The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 6dB peak frequency at lower (f_L) and upper (f_H) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.

2.2.3.5 The 6dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies, $|f_H - f_L|$.

2.2.3.6 The measurements were repeated if the EUT supports more than one modulation and data rate.

2.2.3.7 The measurements were repeated with the transmitting frequency was set to middle and upper channel respectively.




2.2.4 Test Results

Test Input Power	3.3Vdc	Temperature	24°C
Attached Plots	1 – 3	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	13 Jul 2018

Channel	Channel Frequency (GHz)	6dB Bandwidth (MHz) <small>*See Note 1</small>	Limit (kHz)
Lower	2.402	0.698	≥ 500
Middle	2.440	0.696	≥ 500
Upper	2.480	0.688	≥ 500


Notes

1.	Only the largest measured bandwidths were reported. Refer to plots for all measured bandwidth.
----	--

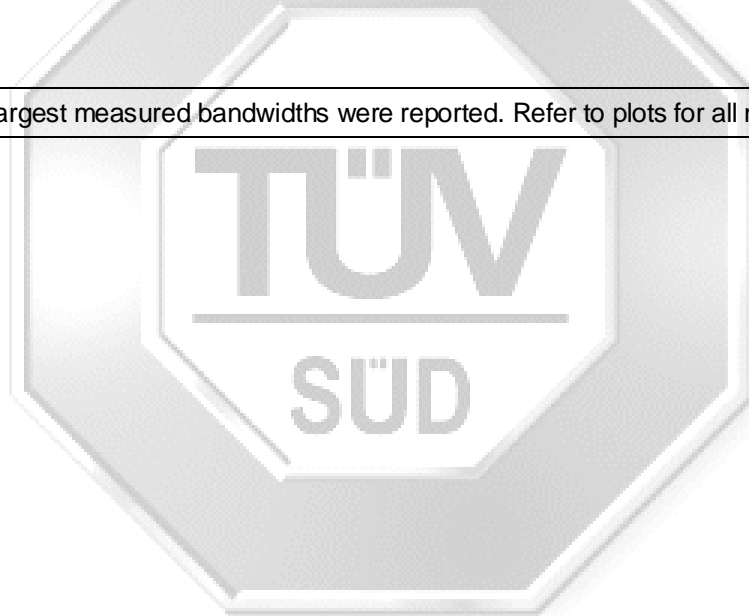




Spectrum Bandwidth (6dB Bandwidth Measurement) Plots

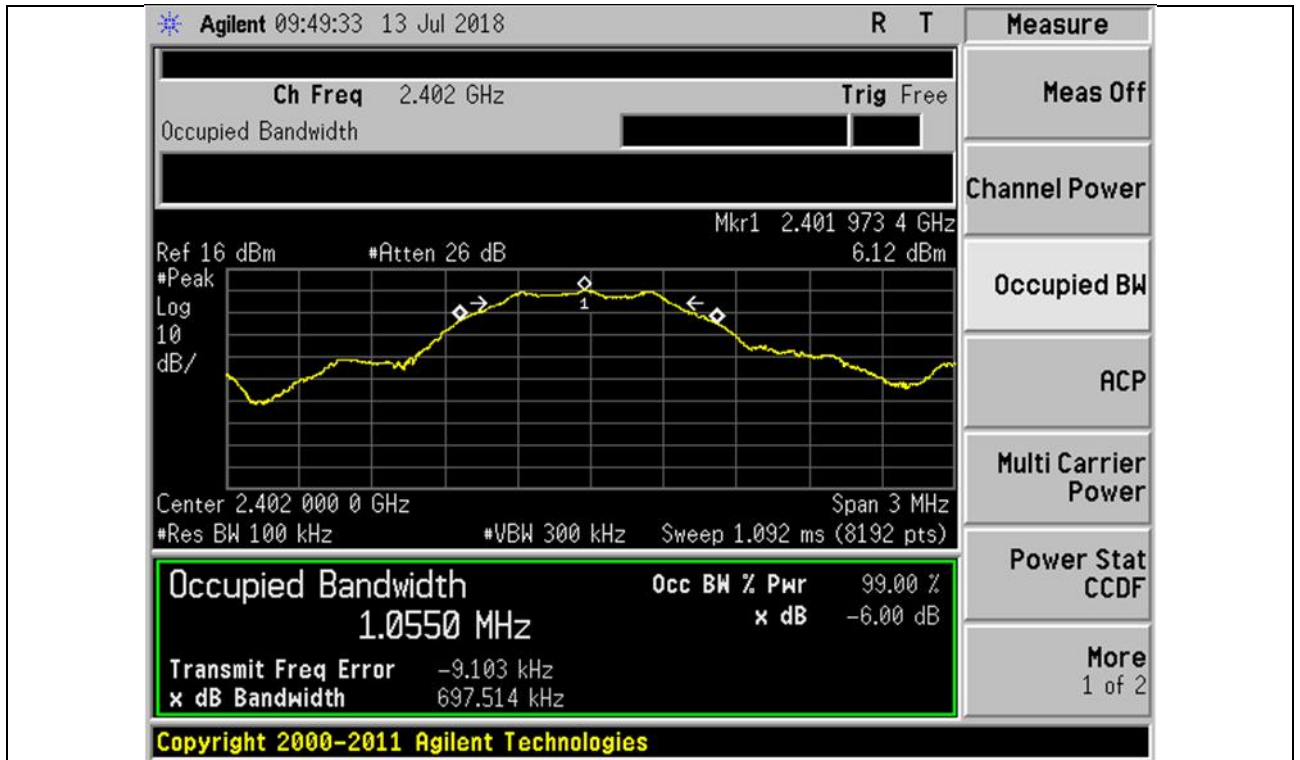


Plot 1 – Lower Channel

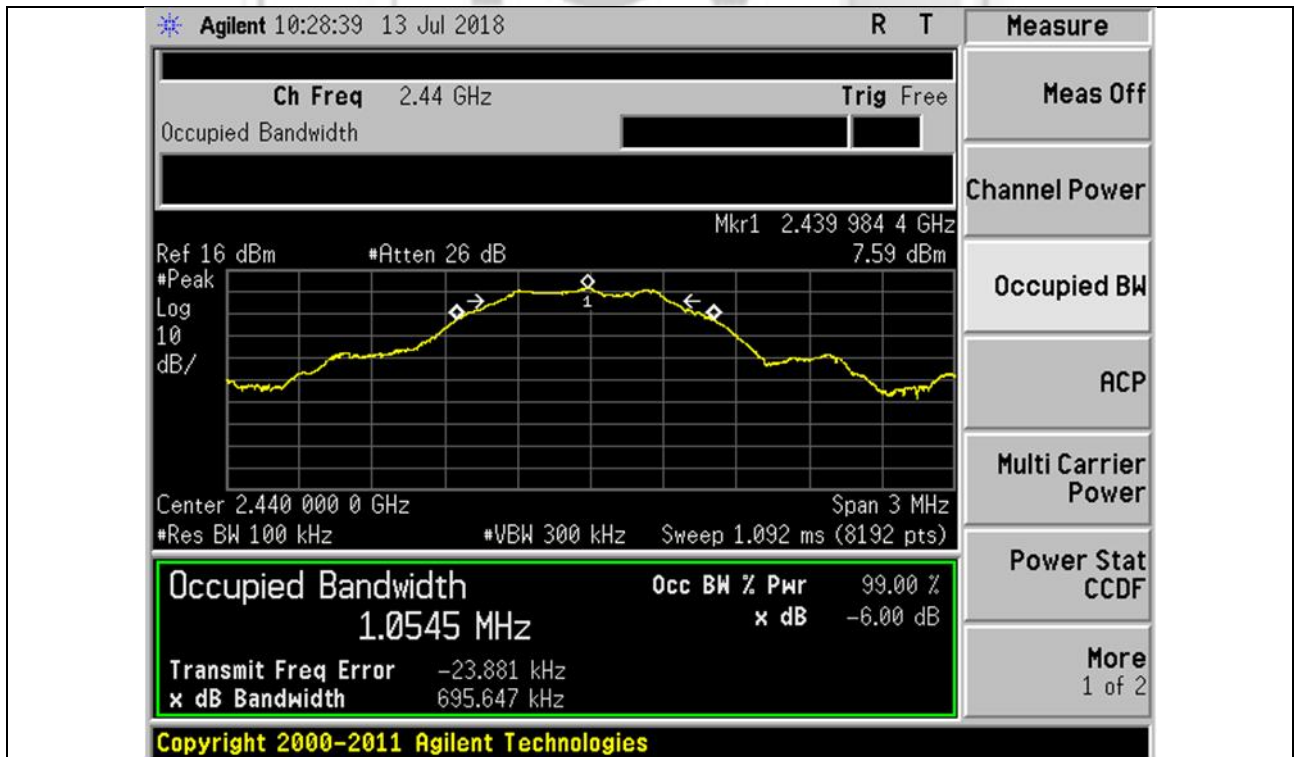

Plot 2 – Middle Channel

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots

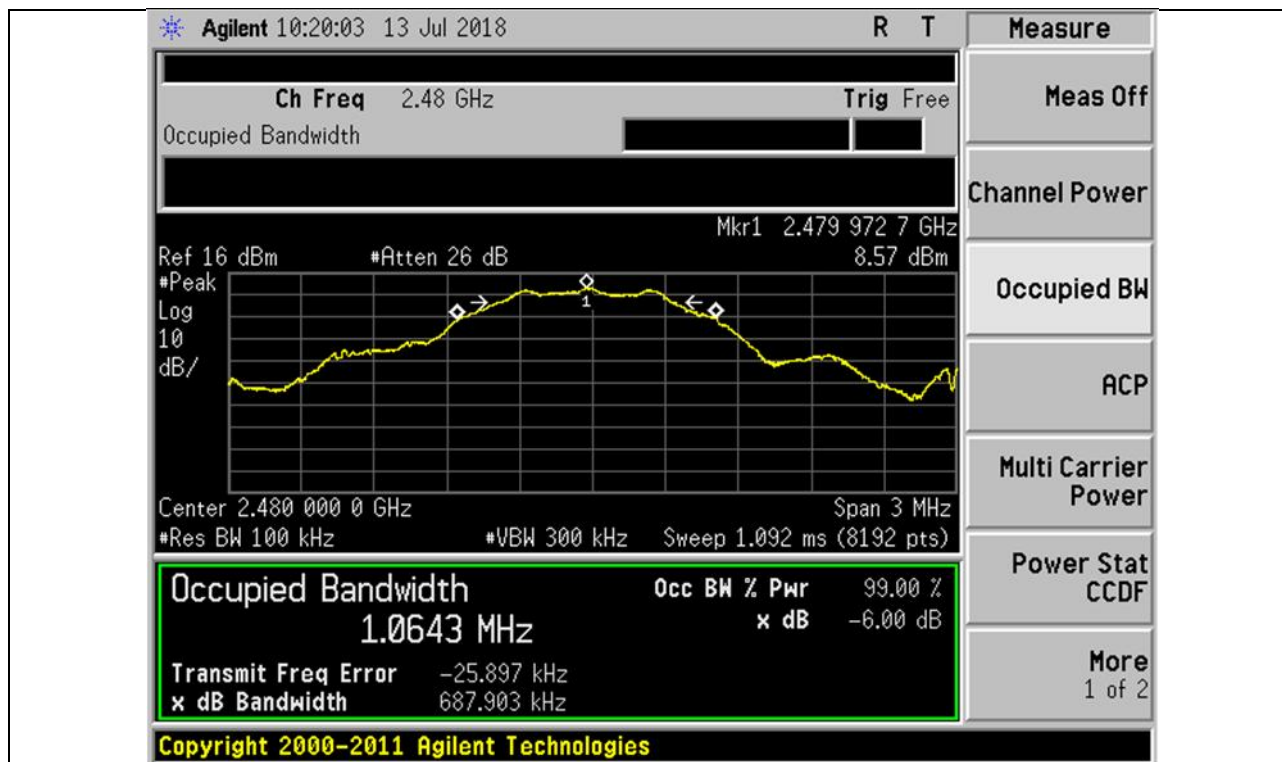

Plot 3 – Upper Channel

2.3 Maximum Peak Power

2.3.1 Test Limits

The EUT shows compliance to the requirements of this section, which states the maximum peak power of the EUT employing digital modulation shall not exceed 1W (30dBm).

2.3.2 Test Setup

- 2.3.2.1 The EUT and supporting equipment were set up as shown in the setup photo.
- 2.3.2.2 The power supply for the EUT was connected to a filtered mains.
- 2.3.2.3 The RF antenna connector was connected to a power meter.
- 2.3.2.4 All other supporting equipment were powered separately from another filtered mains.

2.3.3 Test Method

- 2.3.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at lower channel.
- 2.3.3.2 The maximum peak power of the transmitting frequency was detected and recorded.
- 2.3.3.3 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.3.3.4 The measurement was repeated with the transmitting frequency was set to middle channel and upper channel respectively.




2.3.4 Test Results

Test Input Power	3.3Vdc	Temperature	24°C
Antenna Gain	2.0 dBi	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	13 Jul 2018

Channel	Channel Frequency (GHz)	Maximum Peak Power (W) <small>*See Note 1</small>	Limit (W)
Lower	2.402	0.0045	1.0
Middle	2.440	0.0061	1.0
Upper	2.480	0.0077	1.0

Notes

1.	Only the highest measured peak power were reported.
----	---

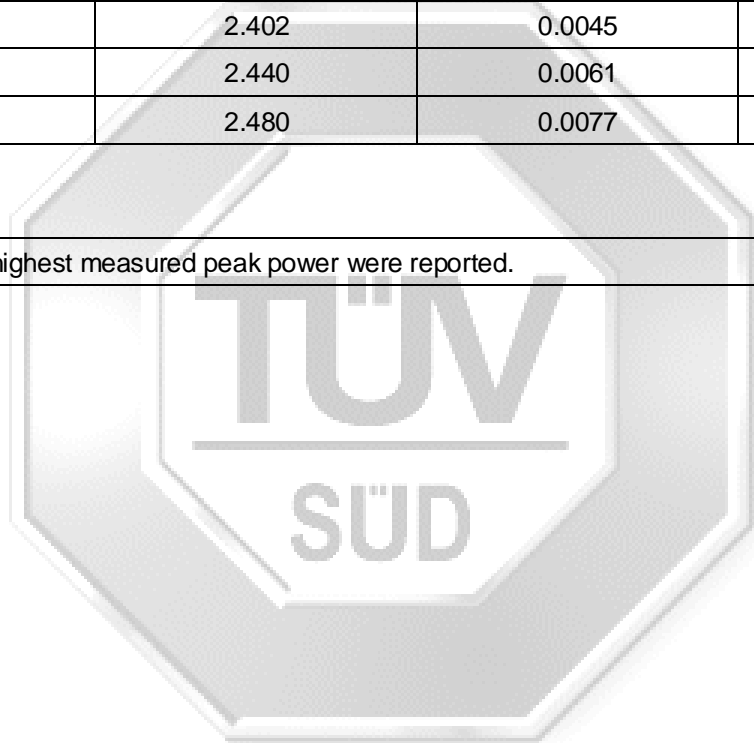

2.4 RF Conducted Spurious Emissions (Non-Restricted Bands)

2.4.1 Test Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

2.4.2 Test Setup

2.4.2.1 The EUT and supporting equipment were set up as shown in the setup photo.

2.4.2.2 The power supply for the EUT was connected to a filtered mains.

2.4.2.3 The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.

2.4.2.4 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 3 times of RBW.

2.4.2.5 All other supporting equipment were powered separately from another filtered mains.

2.4.3 Test Method

2.4.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, with transmitting frequency at lower channel.

2.4.3.2 The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.

2.4.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.

2.4.3.4 The measurements were repeated with frequency span was set from 10GHz to 25GHz.

2.4.3.5 The measurements were repeated if the EUT supports more than one modulation and data rate.

2.4.3.6 The measurements were repeated with the transmitting frequency was set to middle channel and upper channel respectively.



2.4.4 Test Results


Test Input Power	3.3Vdc	Temperature	24°C
Attached Plots	4 – 9	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	13 Jul 2018

All spurious signals found were below the specified limit. Please refer to the attached plots.






RF Conducted Spurious Emissions (Non-Restricted Bands) Plots

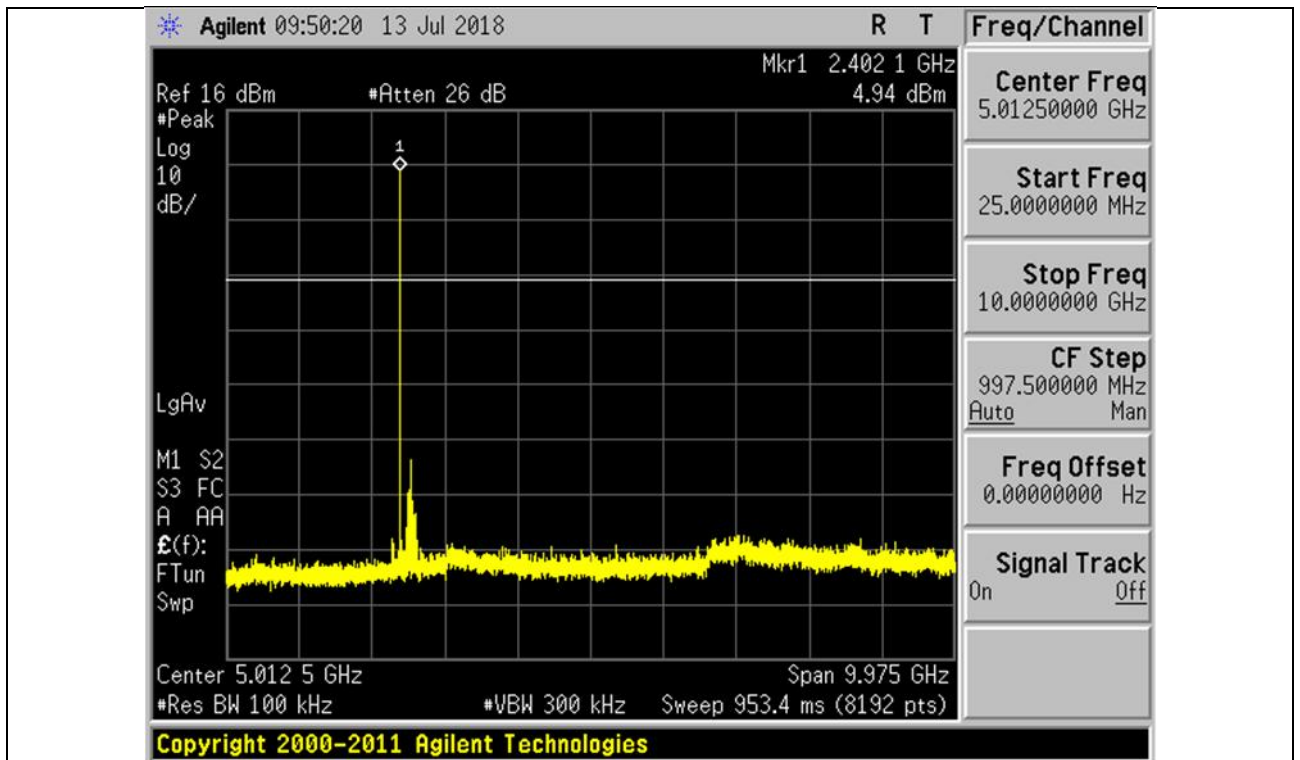


Plot 4 – Lower Channel

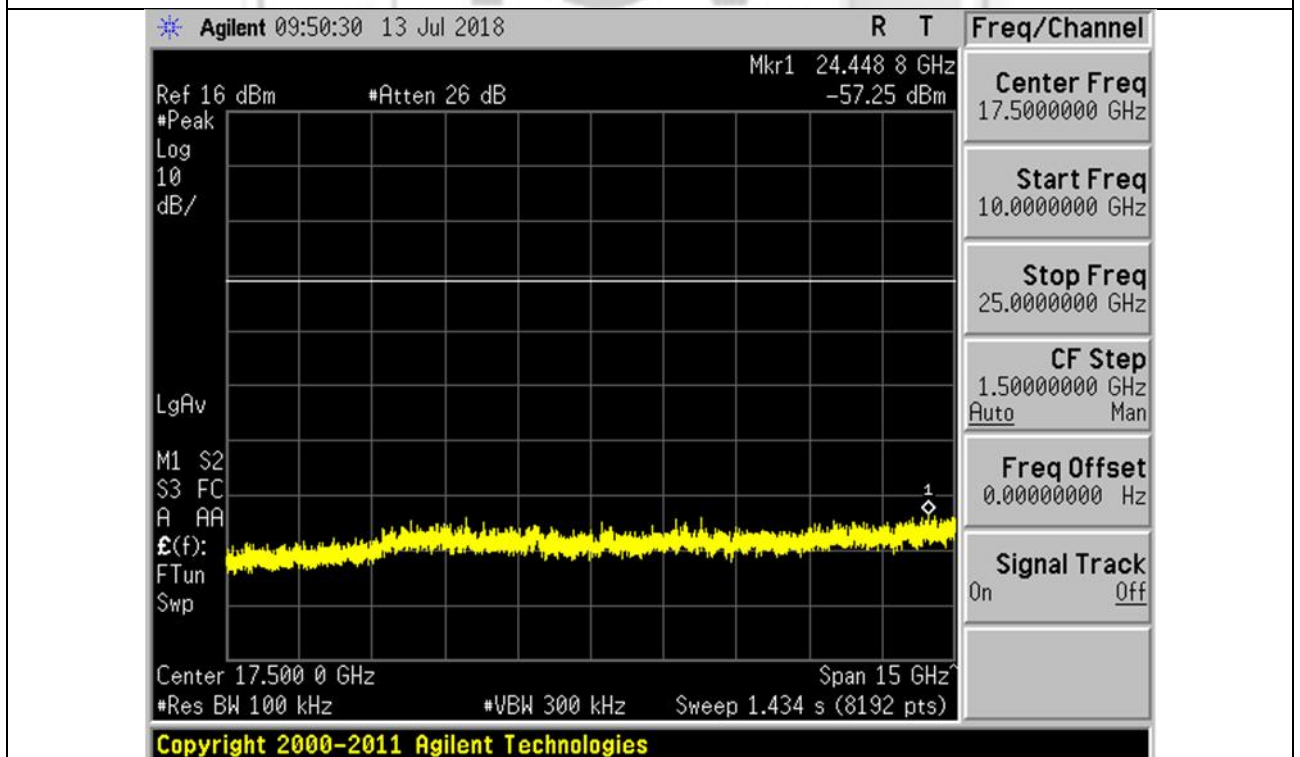


Plot 5 – Lower Channel

RF Conducted Spurious Emissions (Non-Restricted Bands) Plots

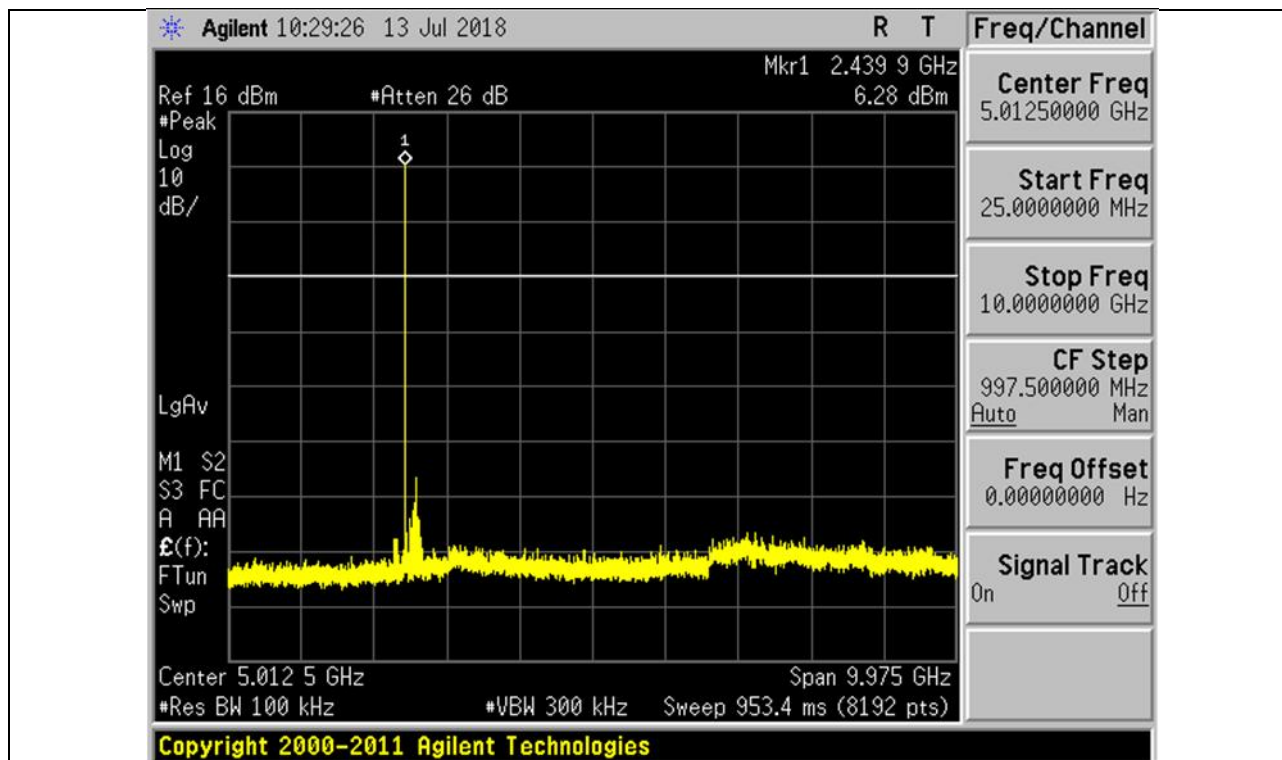


Plot 6 – Middle Channel

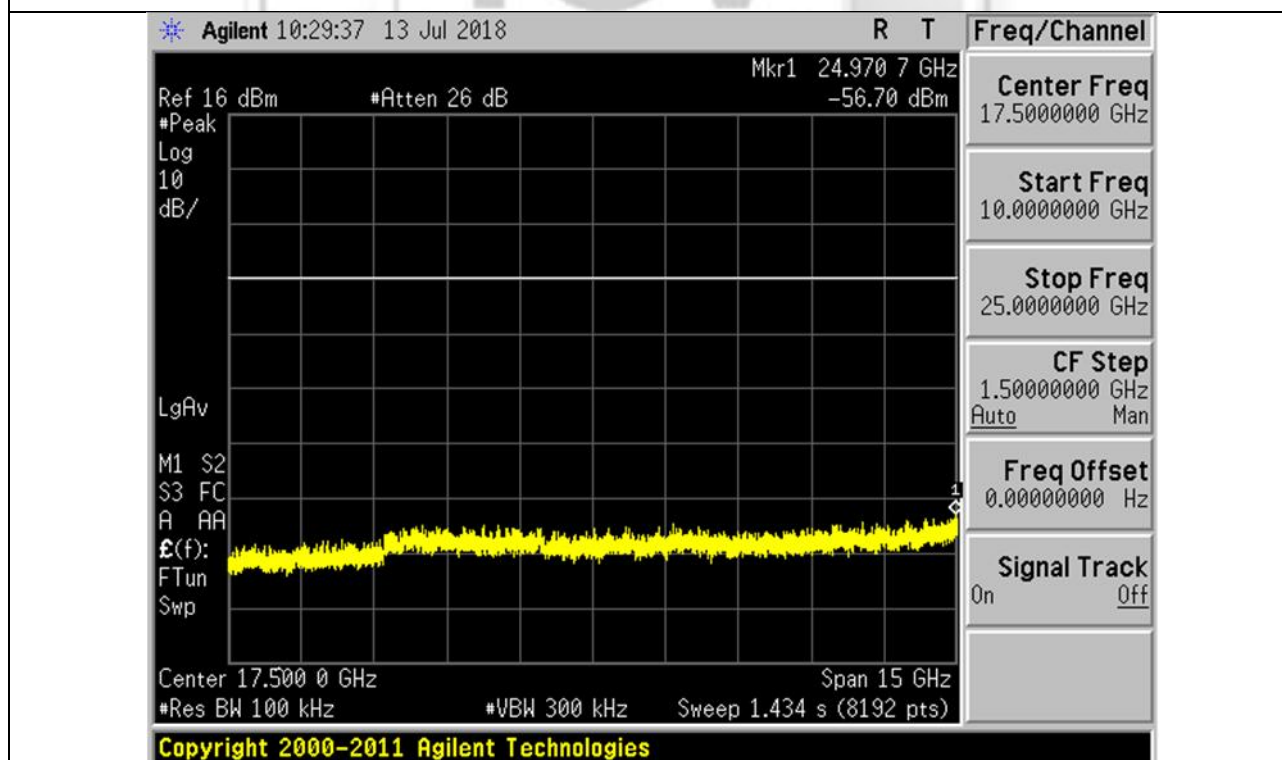


Plot 7 – Middle Channel



RF Conducted Spurious Emissions (Non-Restricted Bands) Plots

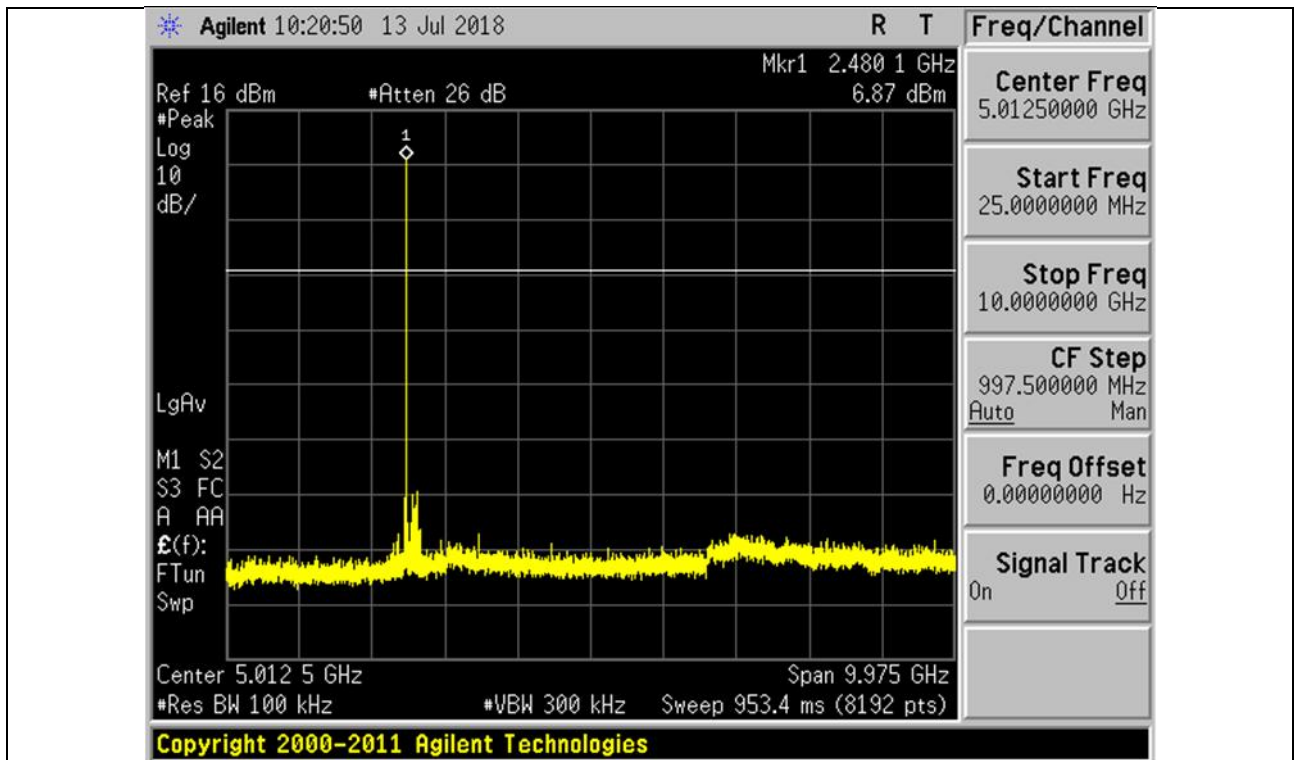

Plot 8 – Upper Channel

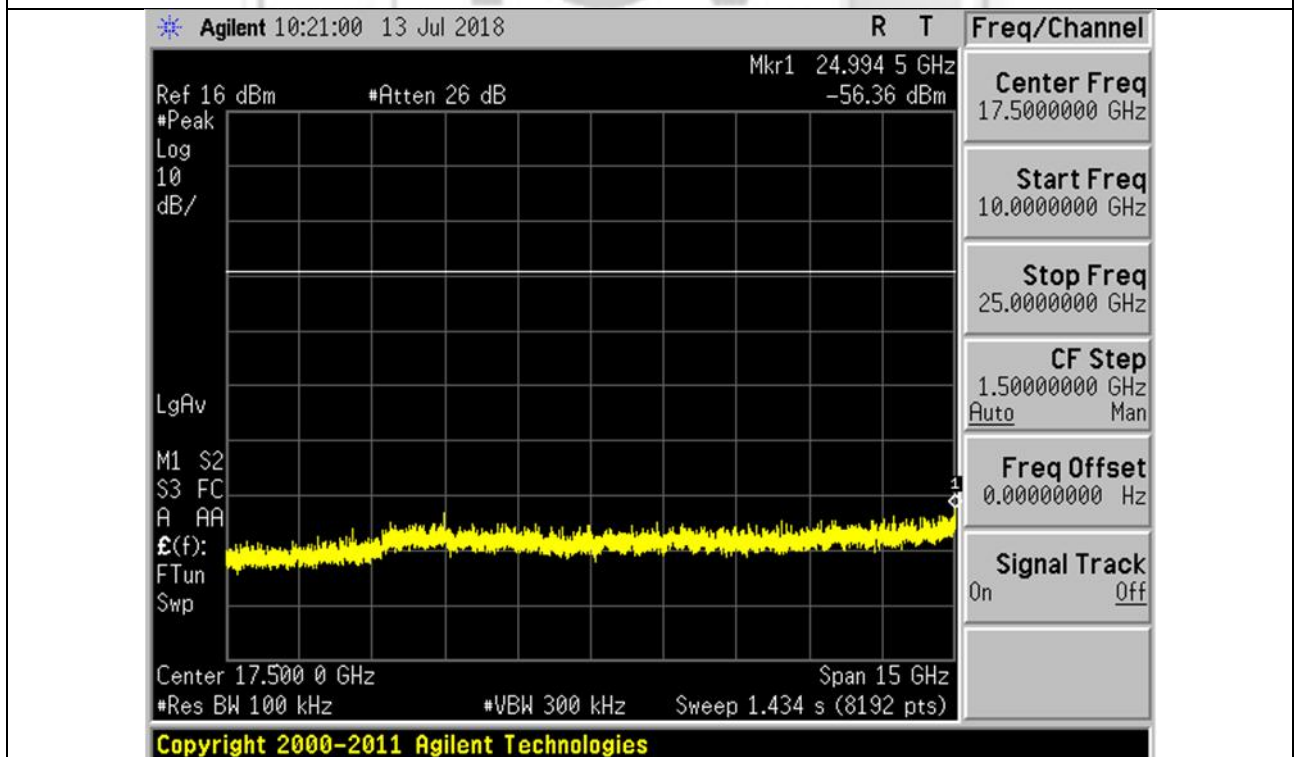

Plot 9 – Upper Channel



2.5 RF Conducted Spurious Emissions (Restricted Bands)

2.5.1 Test Limits

The EUT shows compliance to the requirements of this section, which states that emissions which fall in the restricted bands must comply with the radiated emission limits specified in the table below:

Frequency Range (MHz)	EIRP (dBm)	Radiated Emissions (dBµV/m)
0.009 – 0.490	-6.7 – (-41.4) **	67.6 – 20logF* @ 300m **
0.490 – 1.705	-41.4 – (-52.3) **	87.6 – 20logF* @ 30m **
1.705 – 30	-45.7	29.5 @ 30m
30 - 88	-55.2	40.0 @ 3m
88 - 216	-51.7	43.5 @ 3m
216 - 960	-49.2	46.0 @ 3m
>960	-41.2 ***	54.0 @ 3m ***
* F is frequency in kHz.		
** Decreasing linearly with the logarithm of the frequency.		
*** Above 1GHz, a peak limit of 20dB above the average limit does apply.		

47 CFR FCC Part 15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6
13.36 - 13.41			

2.5.2 Test Setup

- 2.5.2.1 The EUT and supporting equipment were set up as shown in the setup photo.
- 2.5.2.2 The power supply for the EUT was connected to a filtered mains.
- 2.5.2.3 The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
- 2.5.2.4 The resolution bandwidth (RBW) of the spectrum analyser was set to the following settings. The video bandwidth (VBW) was set to at least three times of the RBW.

Frequency (MHz)	RBW (kHz)
0.009 – 0.150	0.2
0.150 – 30.0	9.0
30.0 - 1000	100.0
> 1000	1000.0

- 2.5.2.5 The detector of the spectrum analyser was set to peak detection mode.
- 2.5.2.6 All other supporting equipment were powered separately from another filtered mains.


2.5.3 Test Method

Measurement in the range 9kHz – 1000MHz

- 2.5.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, with the transmitting frequency was set to lower channel.
- 2.5.3.2 The start and stop frequencies of the spectrum analyser were set according to the supported RBW.
- 2.5.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected. The antenna gain of the EUT was added to the captured spurious emissions.
- 2.5.3.4 No further measurement was required if all the captured emissions complied to the limits. Else, the spectrum analyser was set to zoom to the captured emission with the detector of the spectrum analyser was set to quasi-peak. The emission level of the captured frequency was measured.
- 2.5.3.5 The measurements were repeated until all the captured emissions which exceeding the limits were measured.
- 2.5.3.6 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.5.3.7 The measurements were repeated with the transmitting frequency was set to middle and upper channel respectively

Measurement above 1000MHz

- 2.5.3.8 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, with the transmitting frequency was set to lower channel.
- 2.5.3.9 The start and stop frequencies of the spectrum analyser were set according to the supported frequency band of the set RBW with the number of points in a sweep was set to equal or greater than 2 times of the ratio of span over RBW.
- 2.5.3.10 The detector of the spectrum analyser was set to power average (RMS) mode with the sweep time was set to equal or greater than 10 times of the product of number of measurement points in a sweep and transmission symbol time.
- 2.5.3.11 The spectrum analyser was then allowed to capture any spurious emissions within a single sweep. The peak marker function of the spectrum analyser was used to locate the highest power level. The antenna gain of the EUT was added to the captured spurious emissions.
- 2.5.3.12 The measurements were repeated until all the required frequency bands were measured.
- 2.5.3.13 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.5.3.14 The measurements were repeated with the transmitting frequency was set to middle and upper channel respectively.
- 2.5.3.15 The measurements were repeated with the detector of the spectrum analyser was set to peak detecting mode. The sweep time was set to auto coupler.

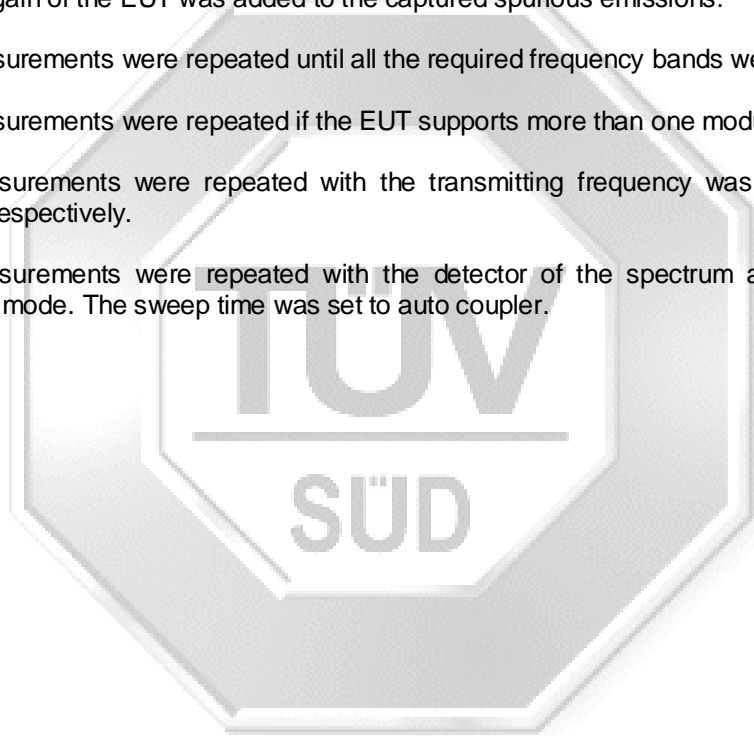



2.5.4 Test Results


Test Input Power	3.3Vdc	Temperature	24°C
Attached Plots	10 – 27 (Peak)	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	12 Jul 2018

All spurious signals found were below the specified limit. Please refer to the attached plots.






RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

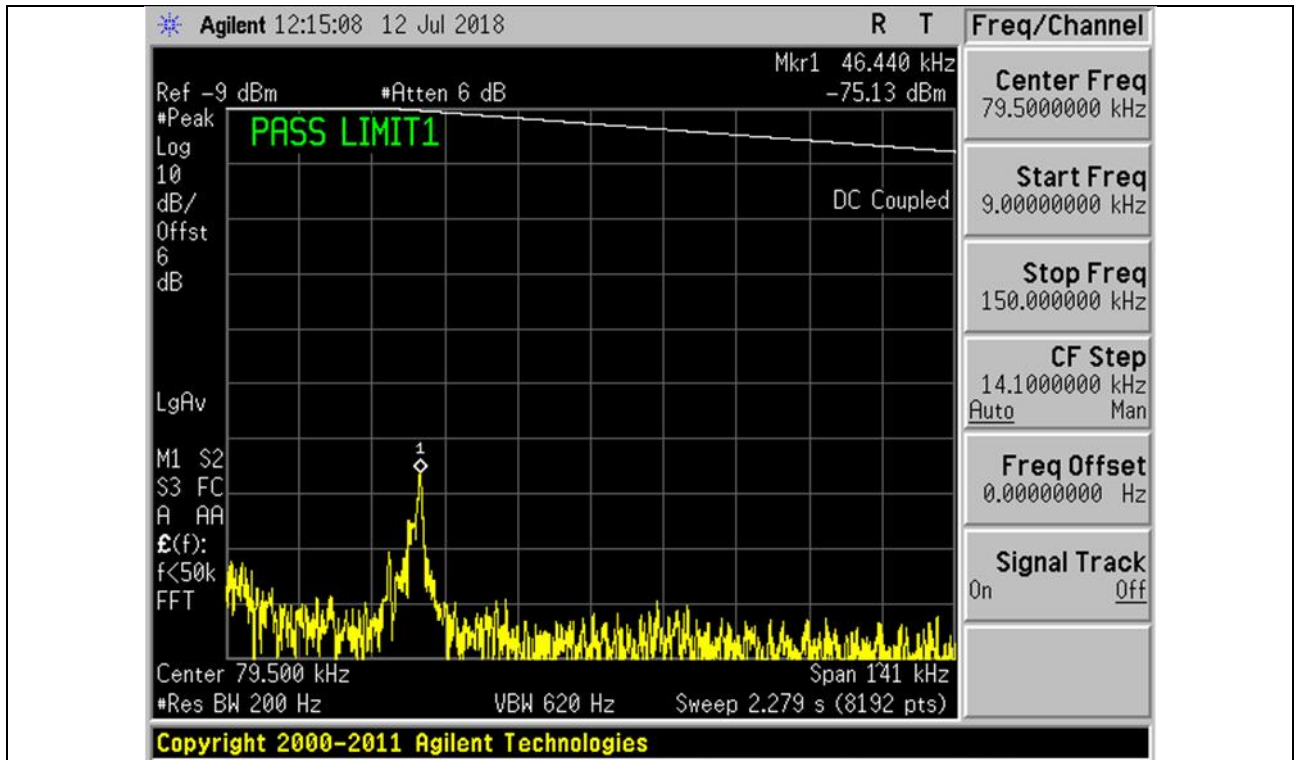


Plot 10 – Lower Channel

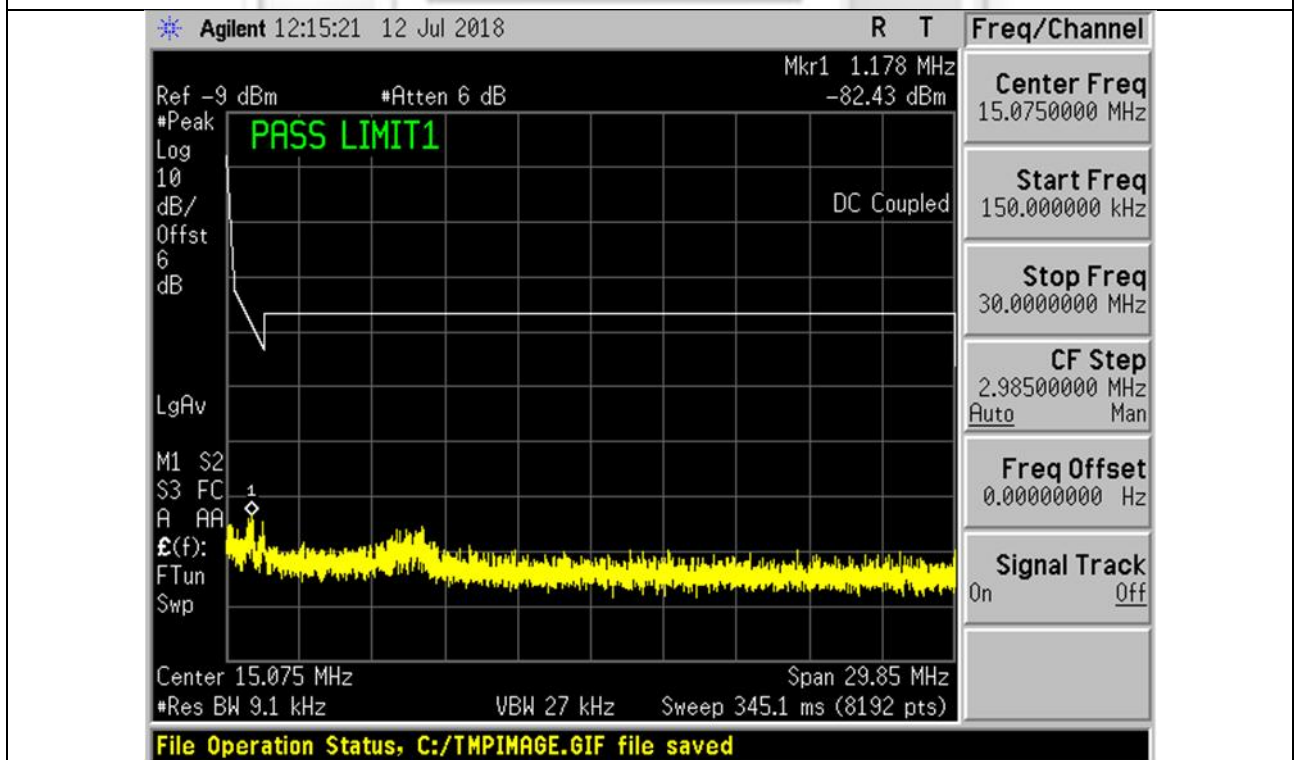


Plot 11 – Lower Channel



RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

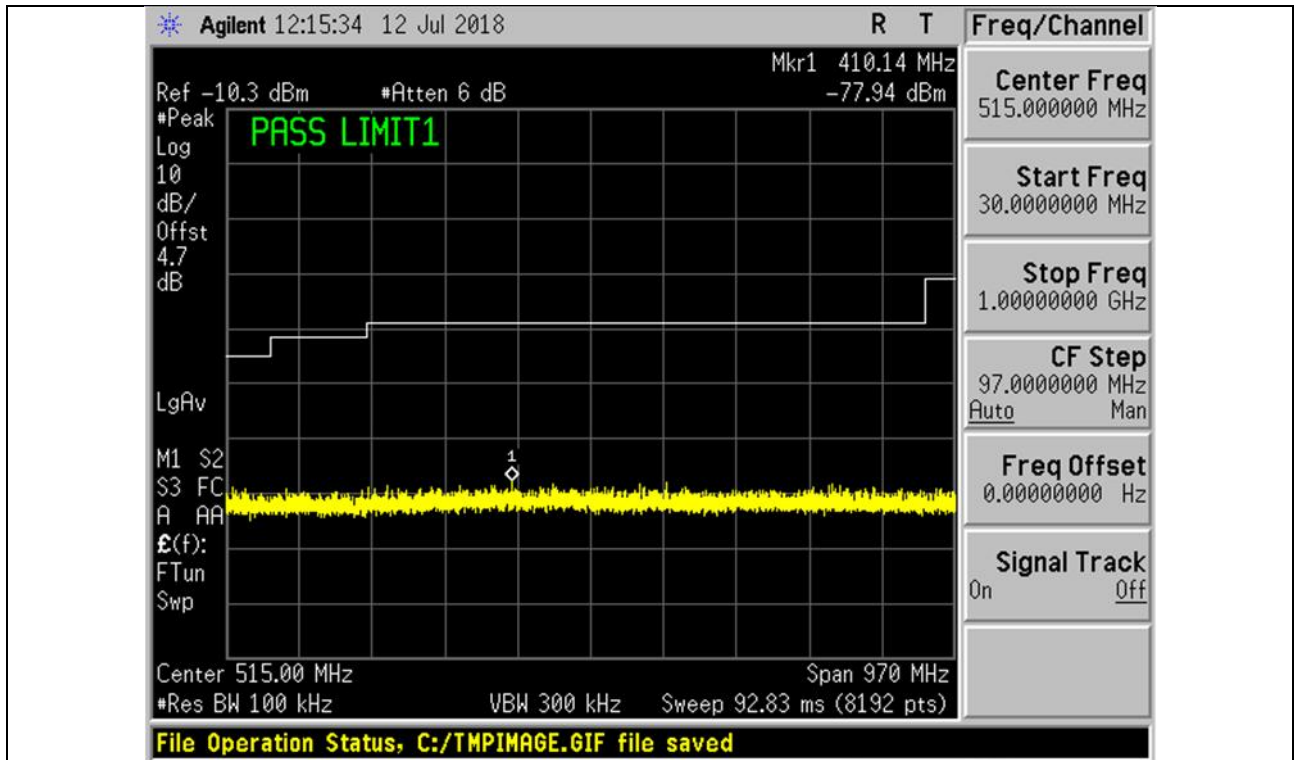


Plot 12 – Lower Channel

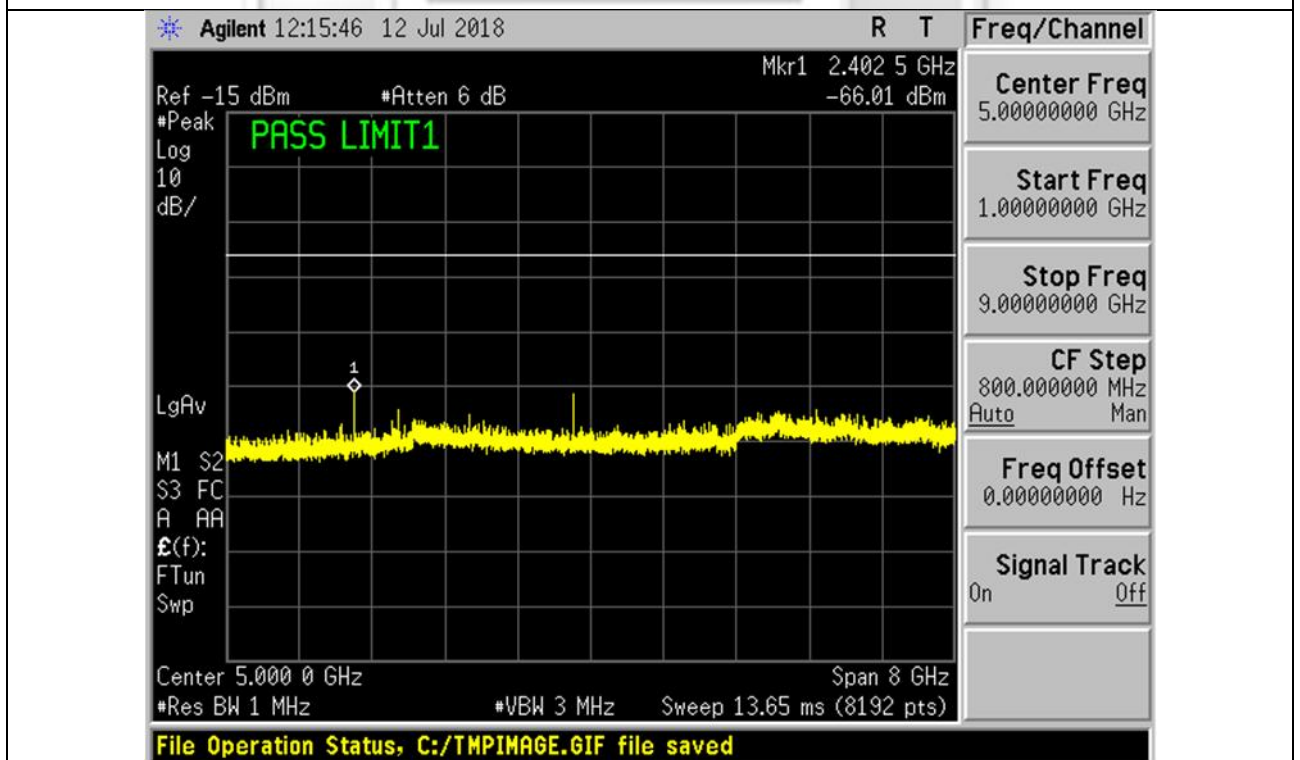


Plot 13 – Lower Channel



RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

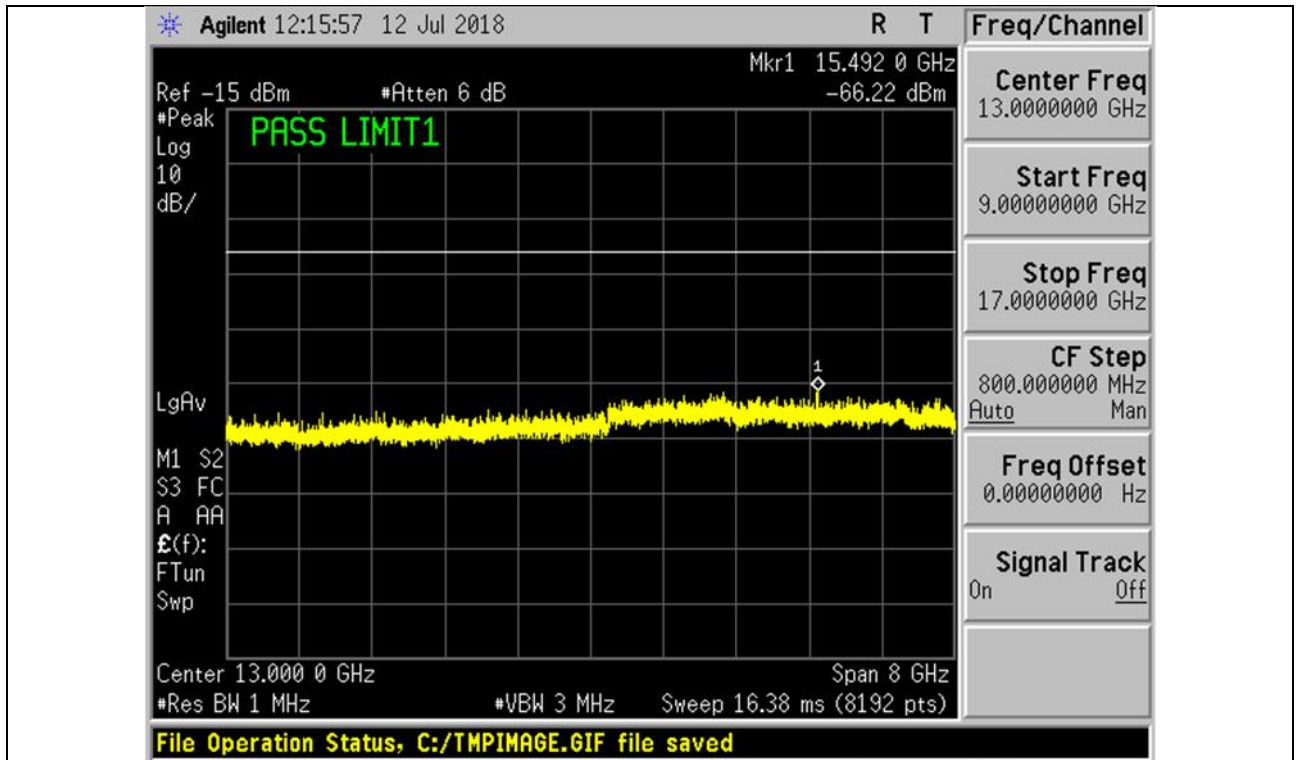


Plot 14 – Lower Channel

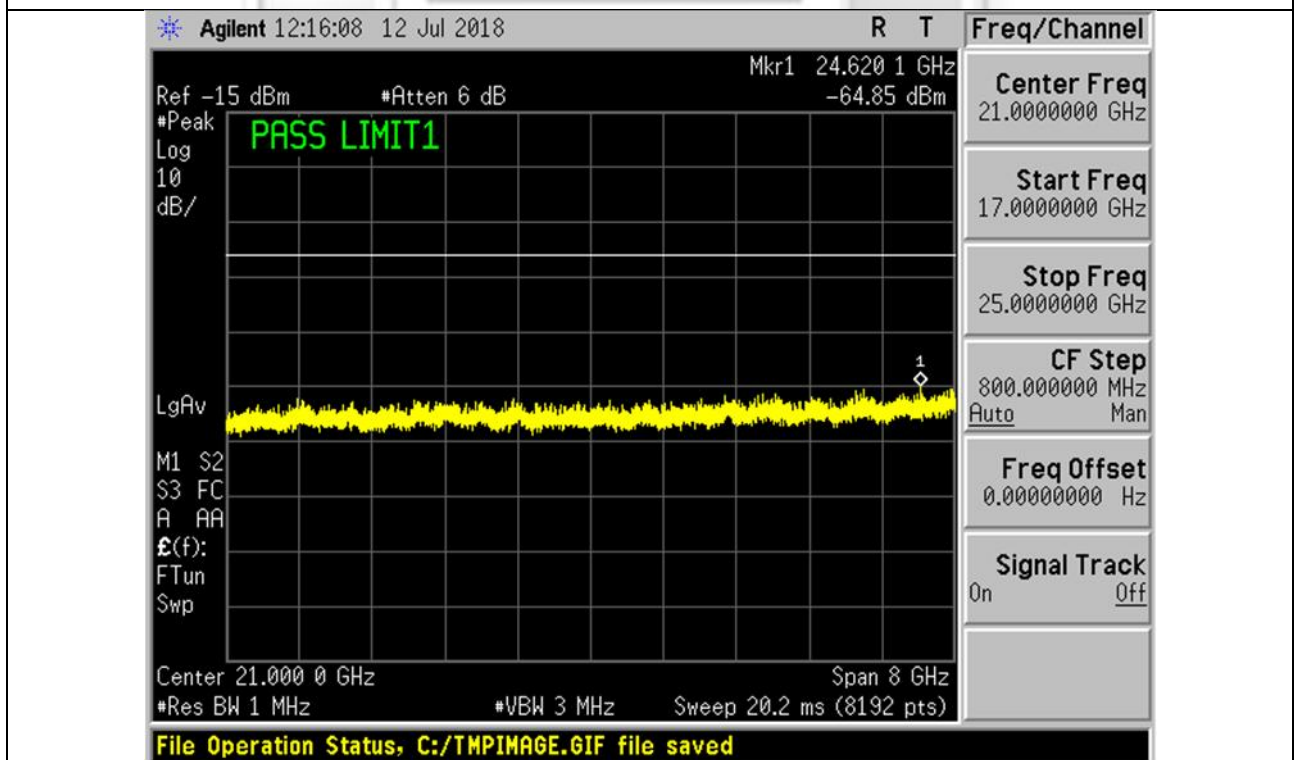


Plot 15 – Lower Channel



RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

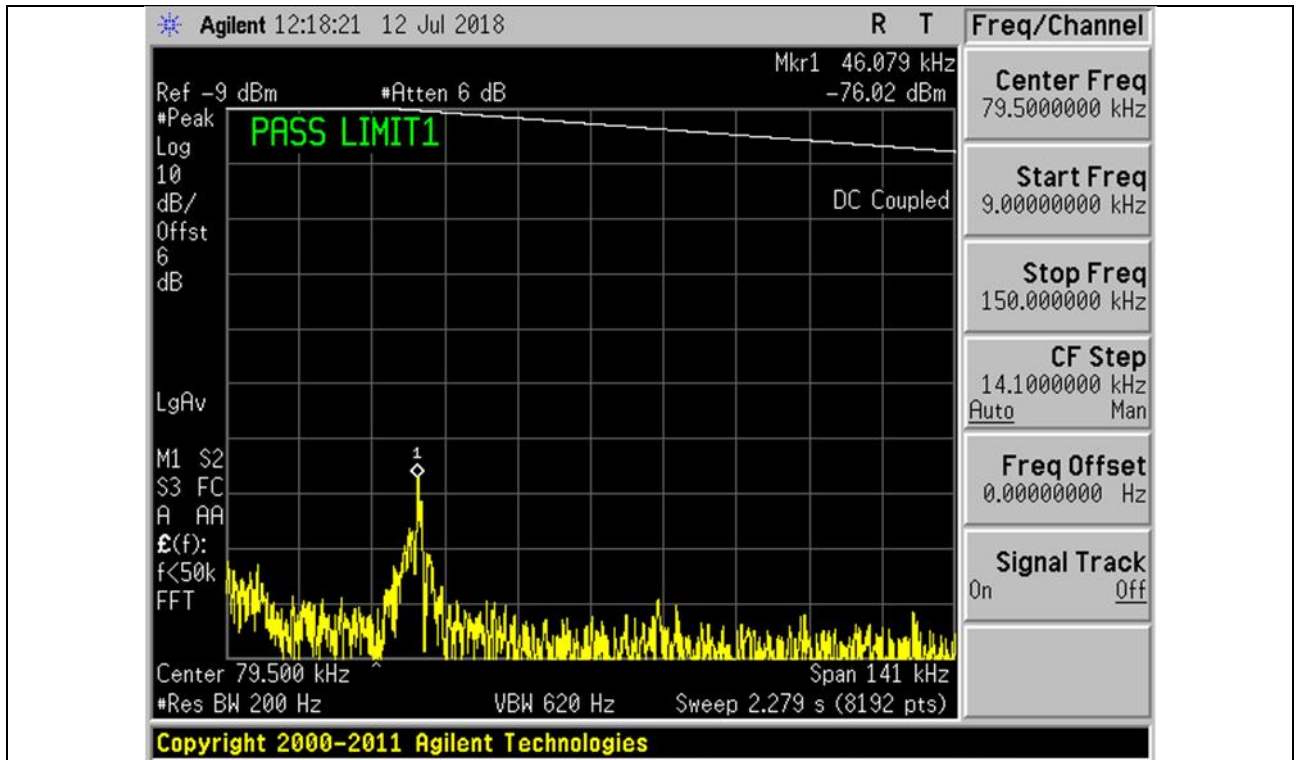


Plot 16 – Middle Channel

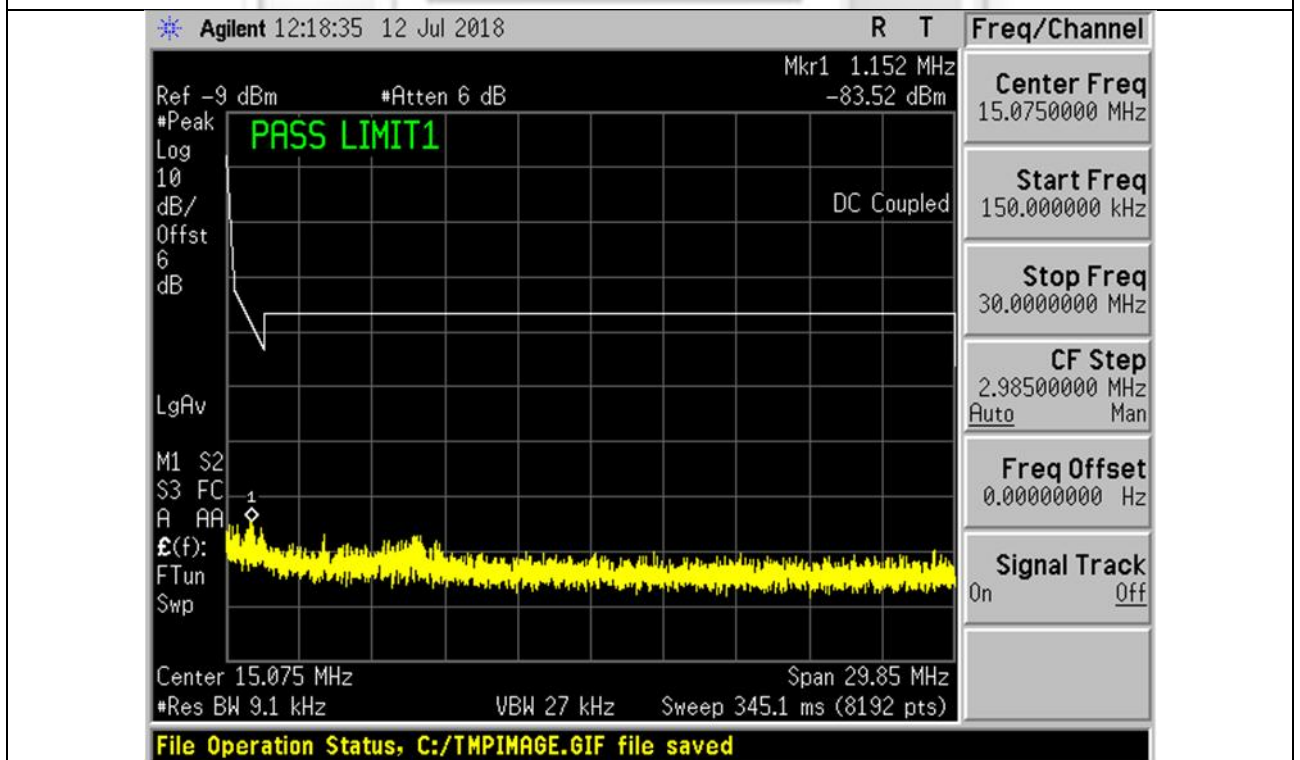


Plot 17 – Middle Channel



RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

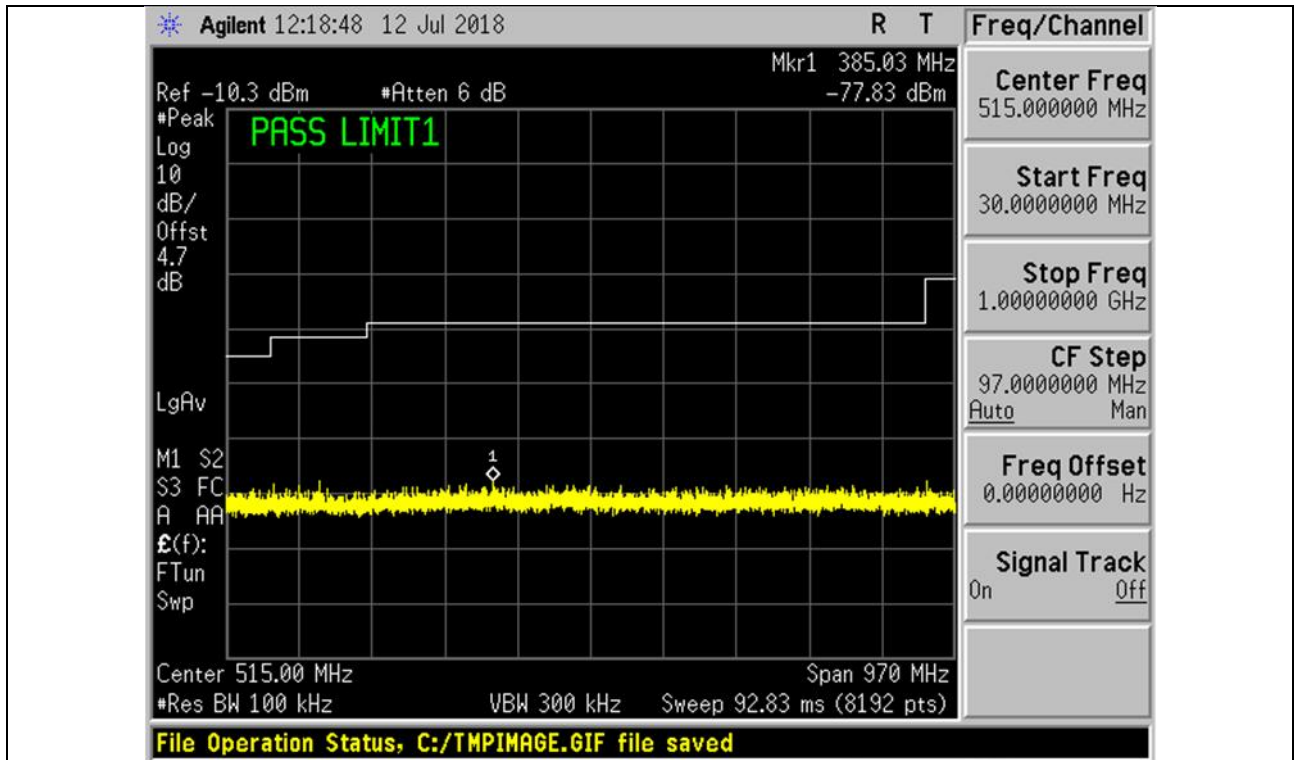


Plot 18 – Middle Channel

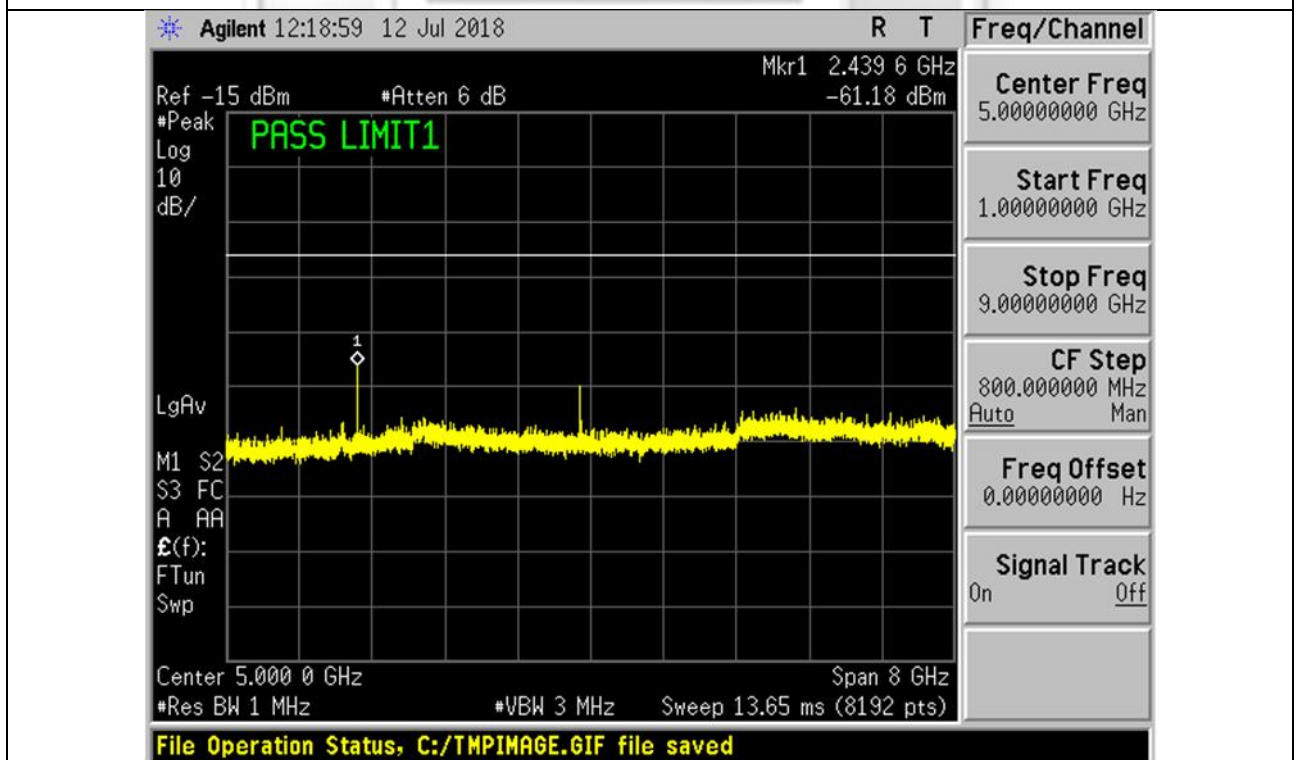


Plot 19 – Middle Channel



RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

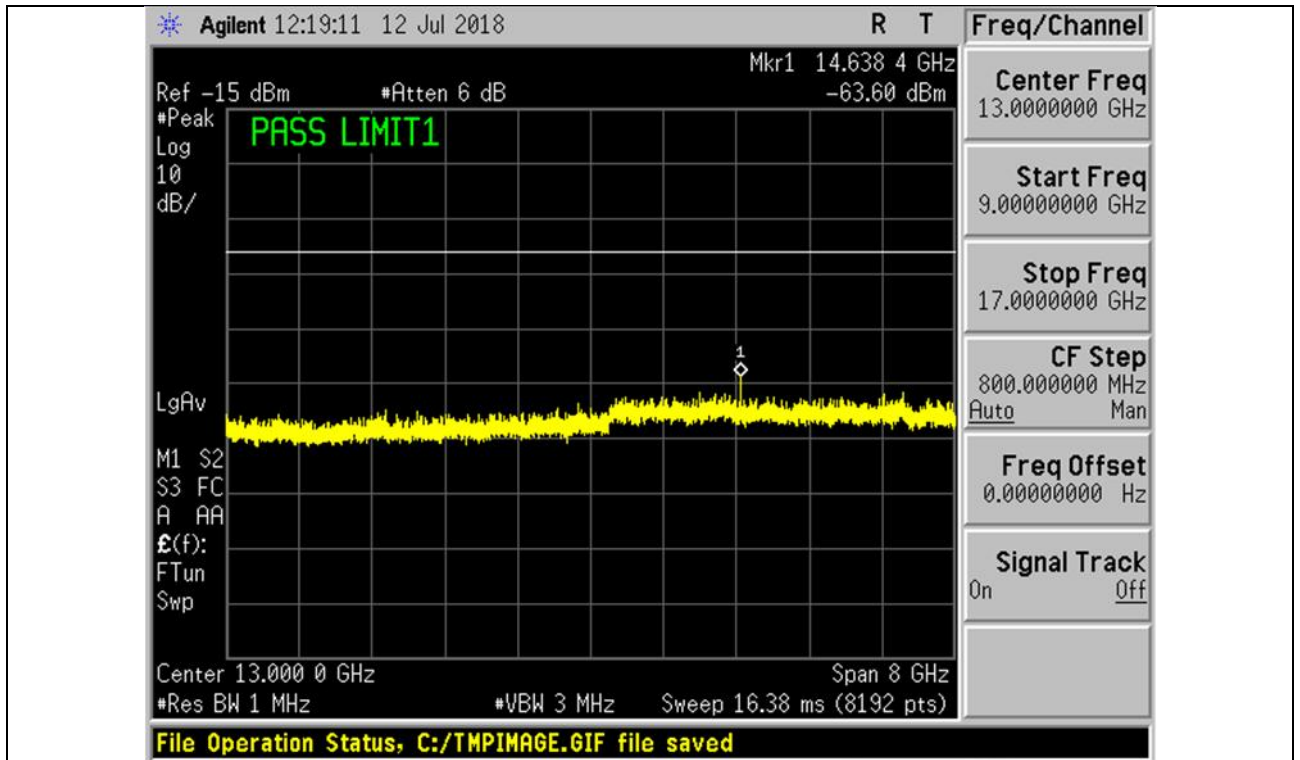


Plot 20 – Middle Channel

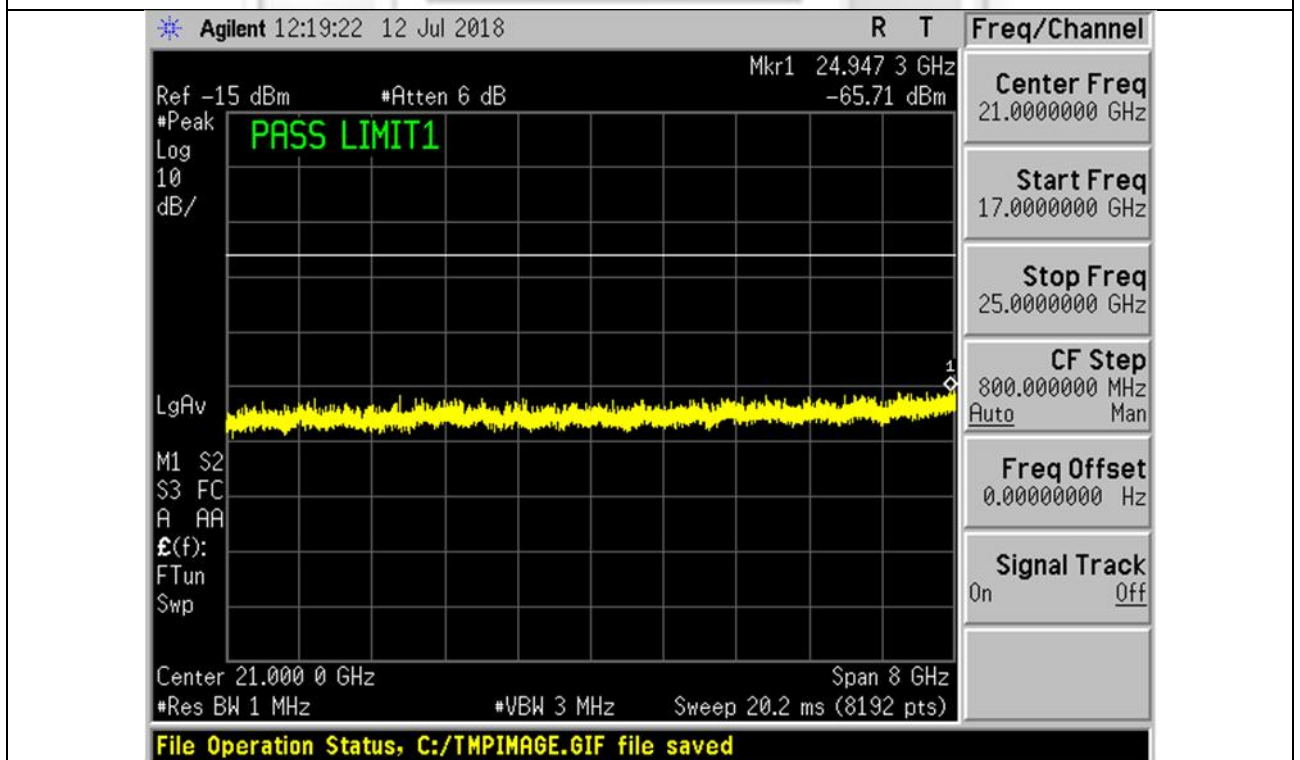


Plot 21 – Middle Channel



RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

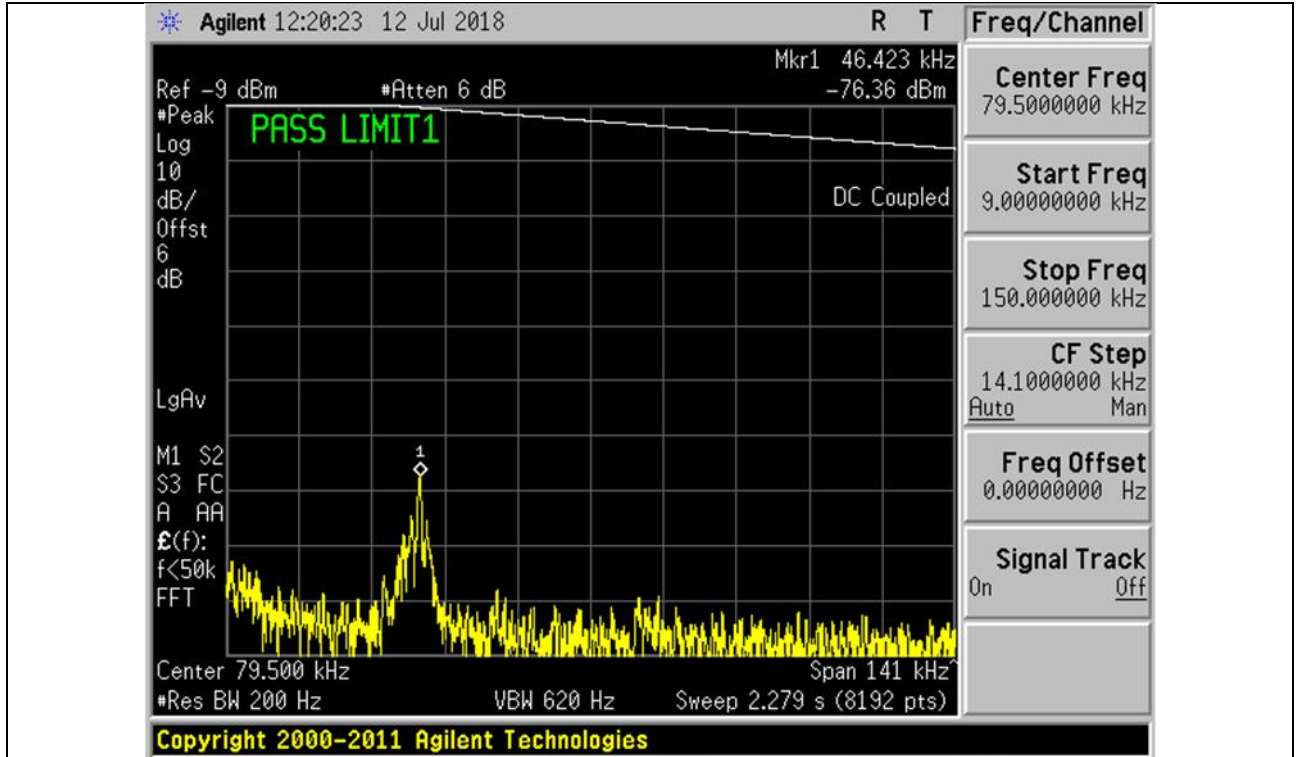


Plot 22 – Upper Channel

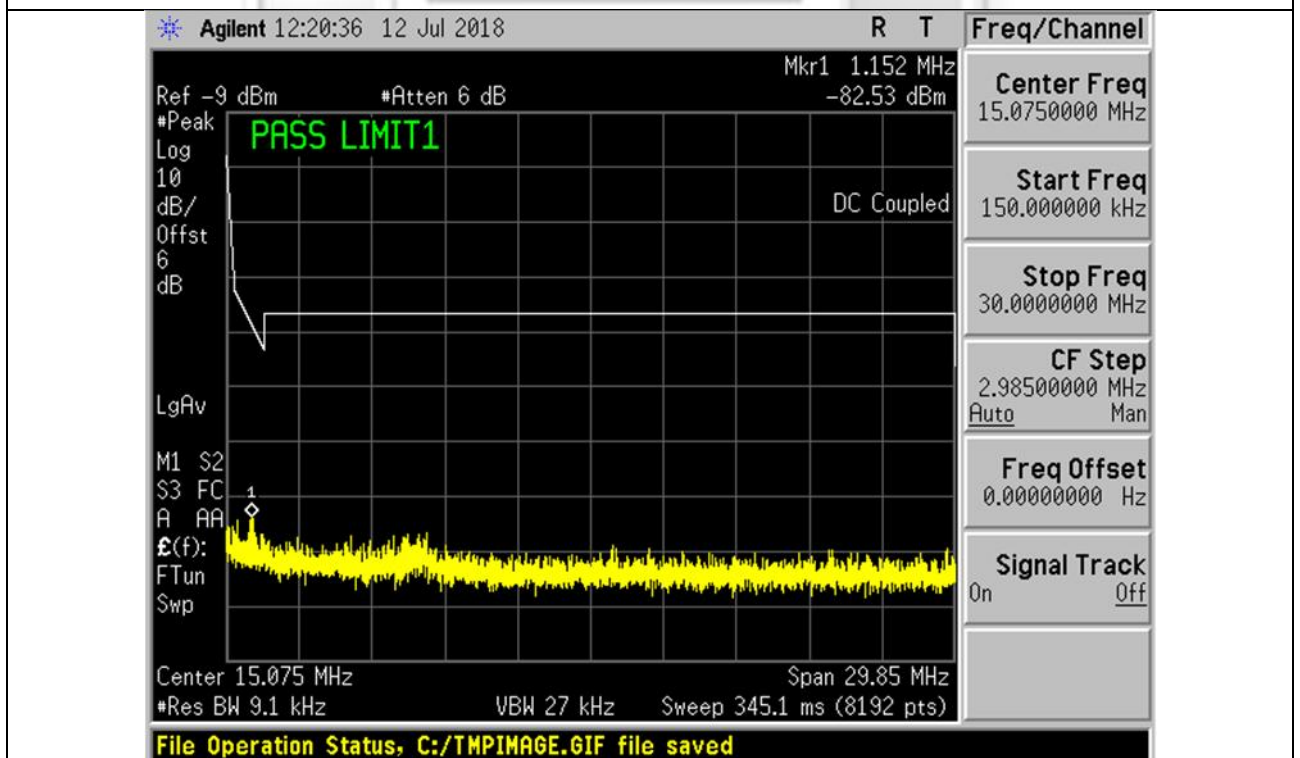


Plot 23 – Upper Channel



RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

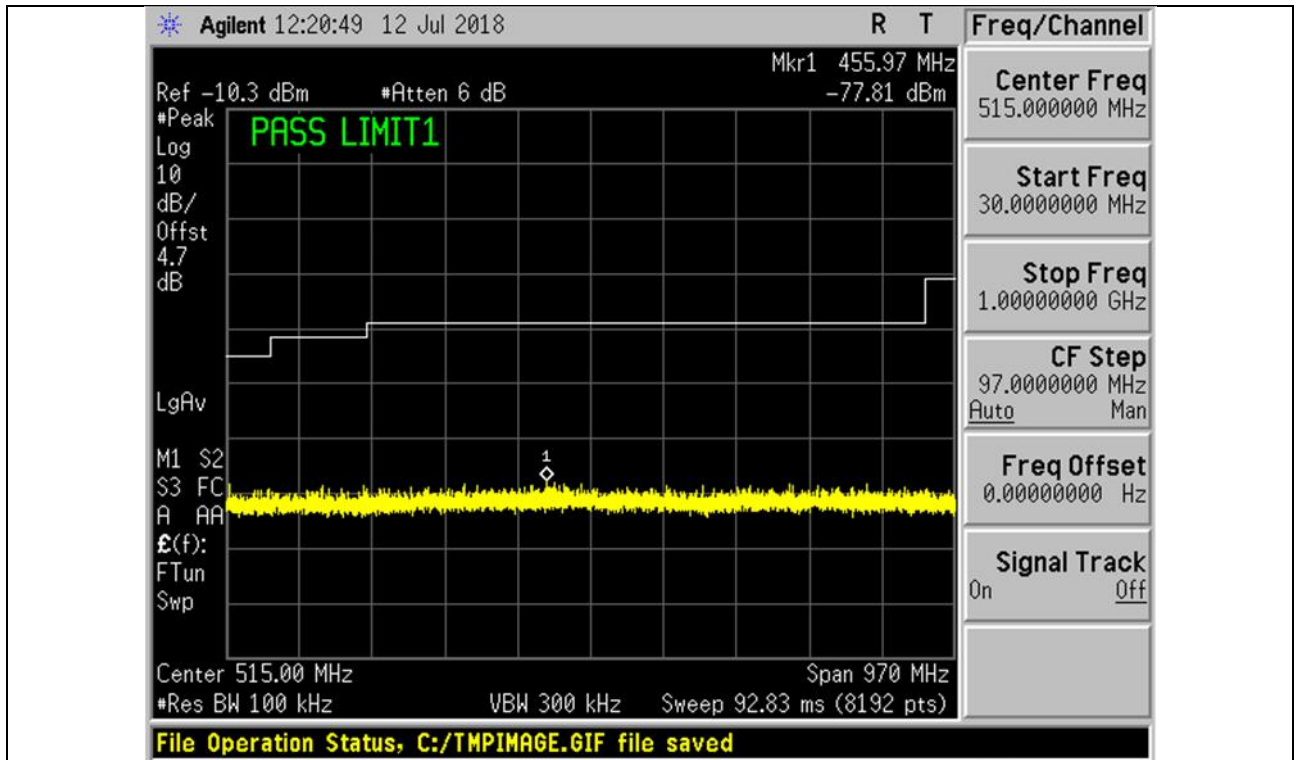


Plot 24 – Upper Channel

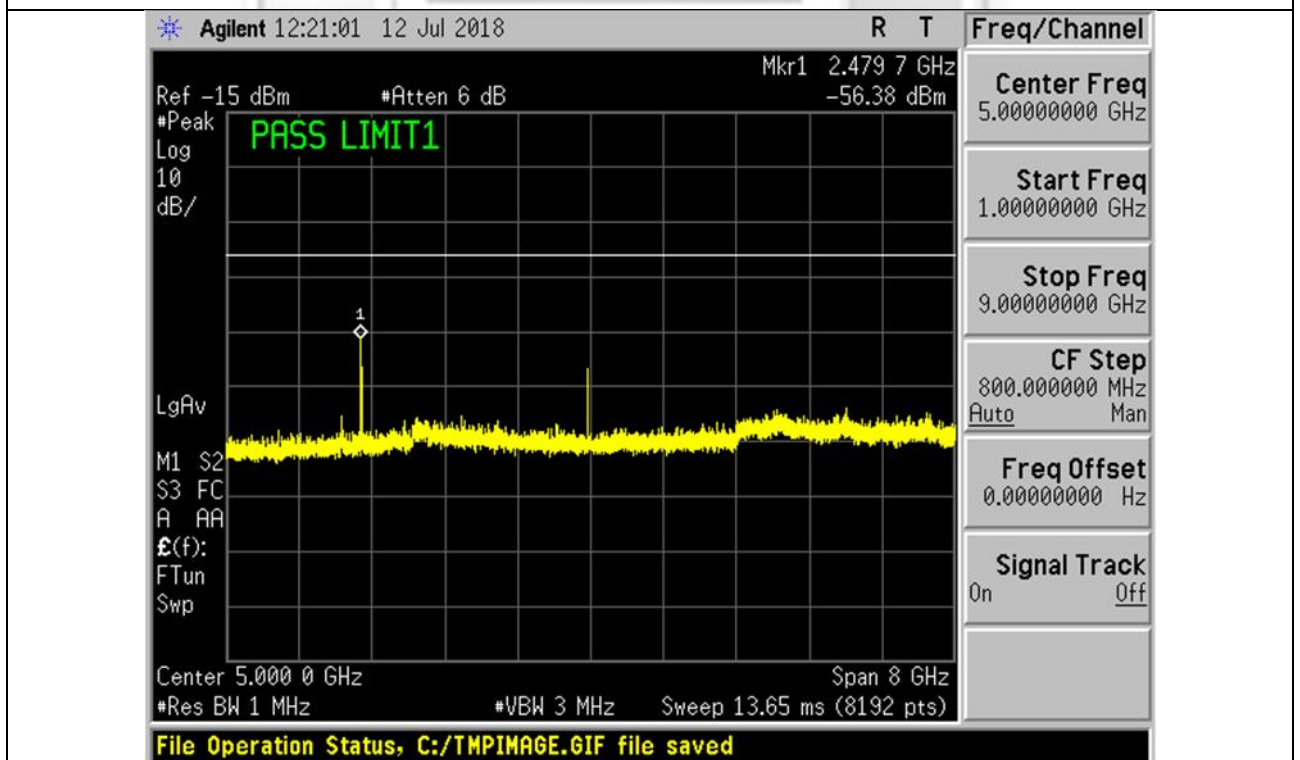


Plot 25 – Upper Channel



RF Conducted Spurious Emissions (Restricted Bands) Plots – Peak

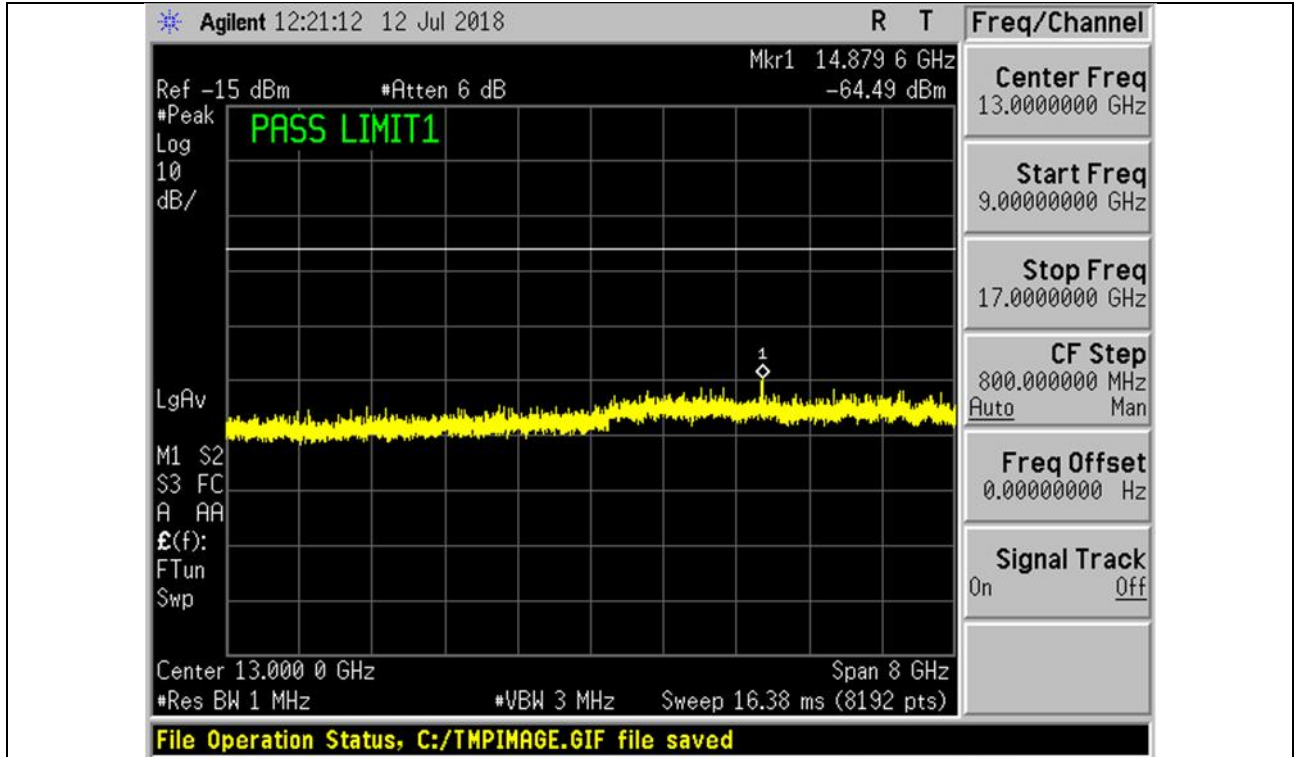

Plot 26 – Upper Channel

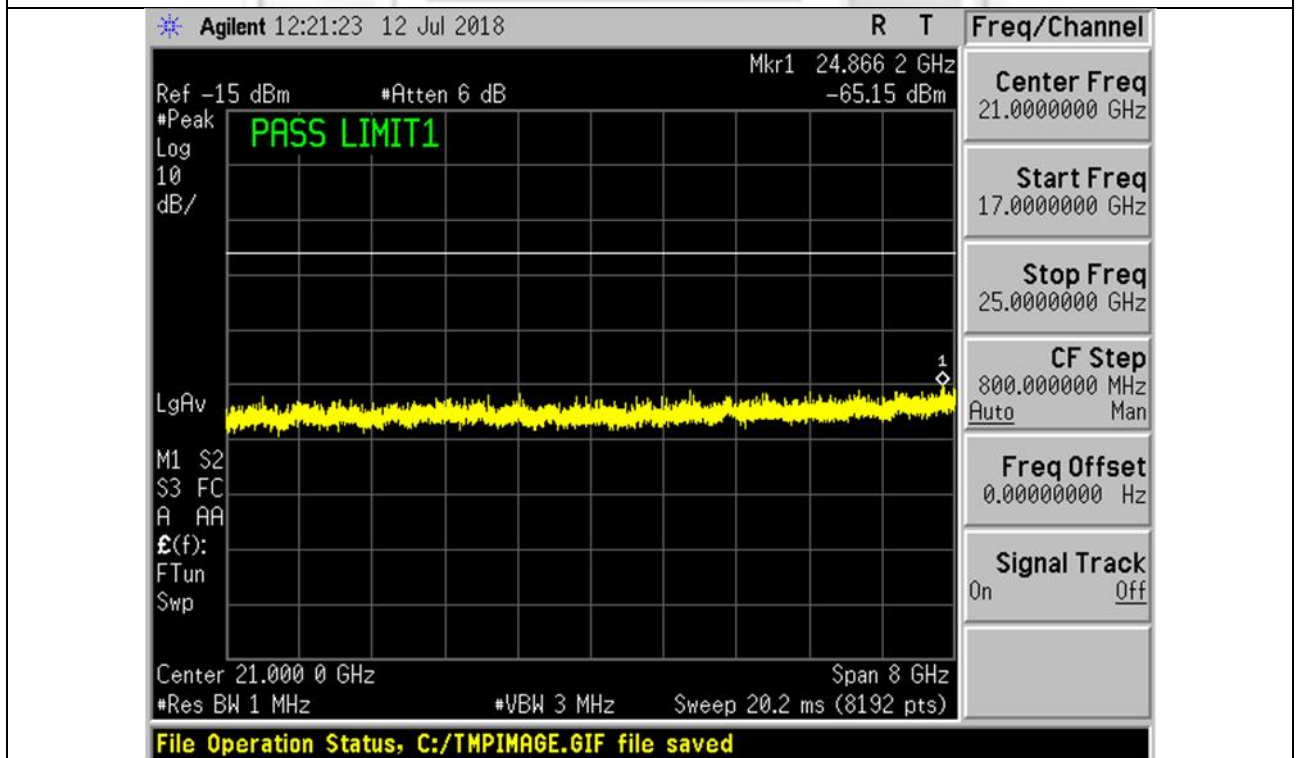

Plot 27 – Upper Channel

2.6 Band Edge Compliance (Conducted)

2.6.1 Test Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

2.6.2 Test Setup

2.6.2.1 The EUT and supporting equipment were set up as shown in the setup photo.

2.6.2.2 The power supply for the EUT was connected to a filtered mains.

2.6.2.3 The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.

2.6.2.4 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.

2.6.2.5 All other supporting equipment were powered separately from another filtered mains.

2.6.3 Test Method

2.6.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode.

2.6.3.2 The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge (within 2MHz of the band edge).

2.6.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.

2.6.3.4 The measurements were repeated if the EUT supports more than one modulation and data rate.

2.6.3.5 The measurements were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.




2.6.4 Test Results

Test Input Power	3.3Vdc	Temperature	24°C
Attached Plots	28 – 29	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	13 Jul 2018


No significant signal was found and they were below the specified limit.



Band Edge Compliance (Conducted) Plots

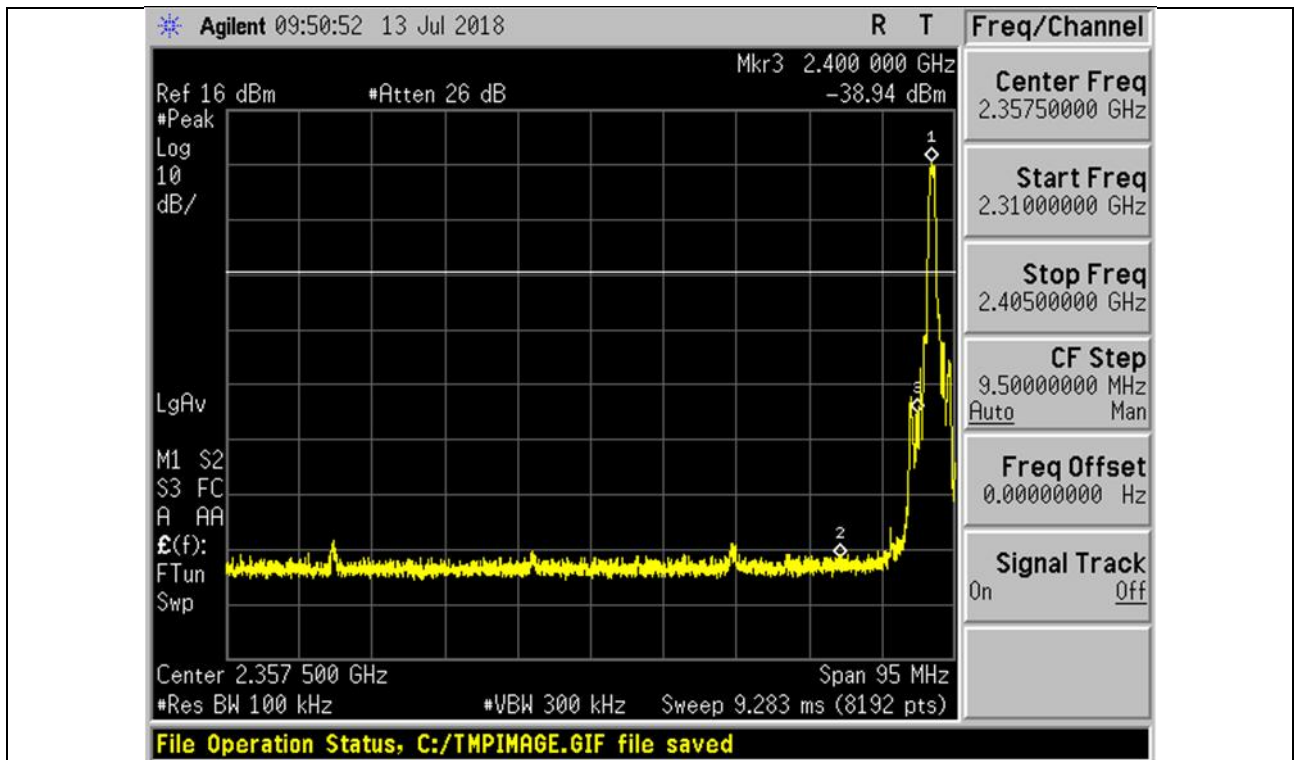

Plot 28 – Lower Band Edge at 2.400GHz

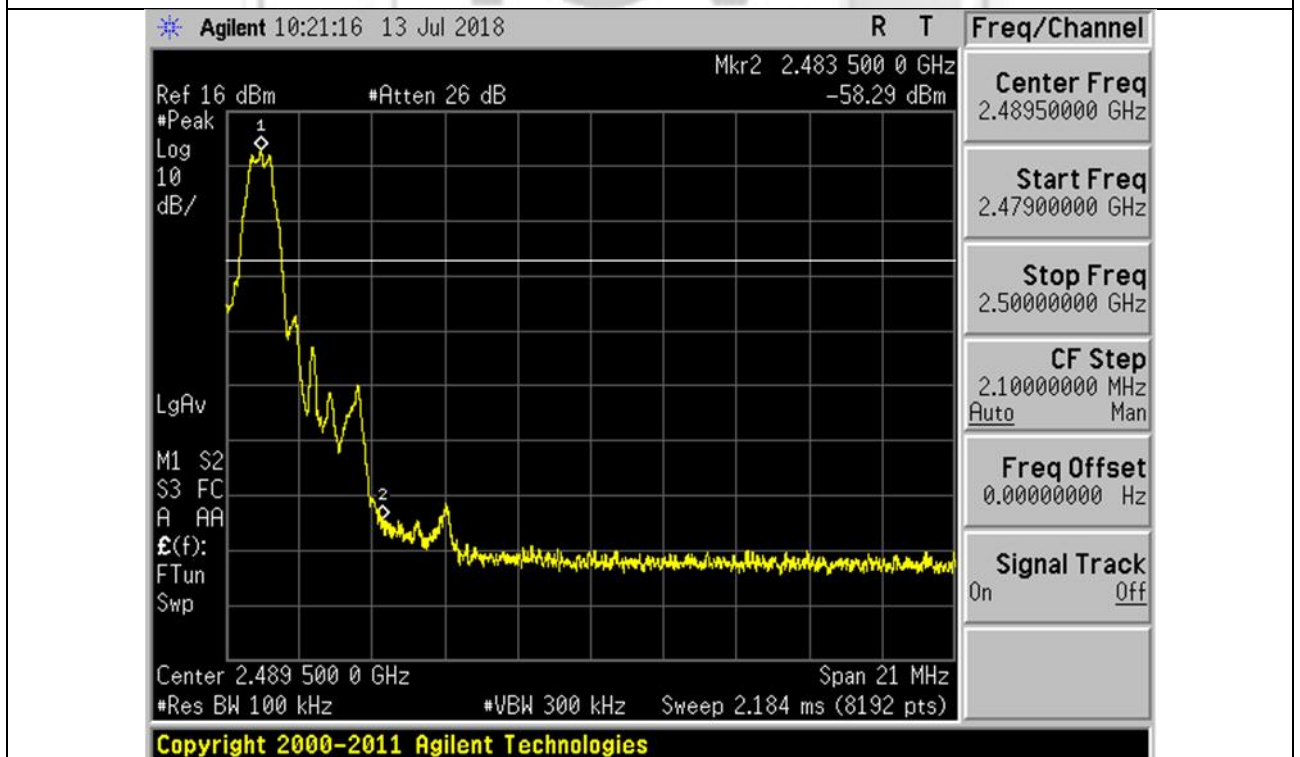

Plot 29 – Upper Band Edge at 2.4835GHz

2.7 Band Edge Compliance (Radiated)

2.7.1 Test Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

2.7.2 Test Setup

2.7.2.1 The EUT and supporting equipment were set up as shown in the setup photo.

2.7.2.2 The power supply for the EUT was connected to a filtered mains.

2.7.2.3 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:

- a. Peak Plot:
RBW = 1MHz, VBW = 3RBW
- b. Average Plot
RBW = 1MHz, VBW = 10Hz

2.7.2.4 All other supporting equipment were powered separately from another filtered mains.

2.7.3 Test Method

2.7.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode.

2.7.3.2 The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.

2.7.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.

2.7.3.4 The measurements were repeated if the EUT supports more than one modulation and data rate.

2.7.3.5 The measurements were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.




2.7.4 Test Results

Test Input Power	3.3Vdc	Temperature	24°C
Attached Plots	30 – 35	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin
		Test Date	01 Aug 2018


No significant signal was found and they were below the specified limit.



Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge)

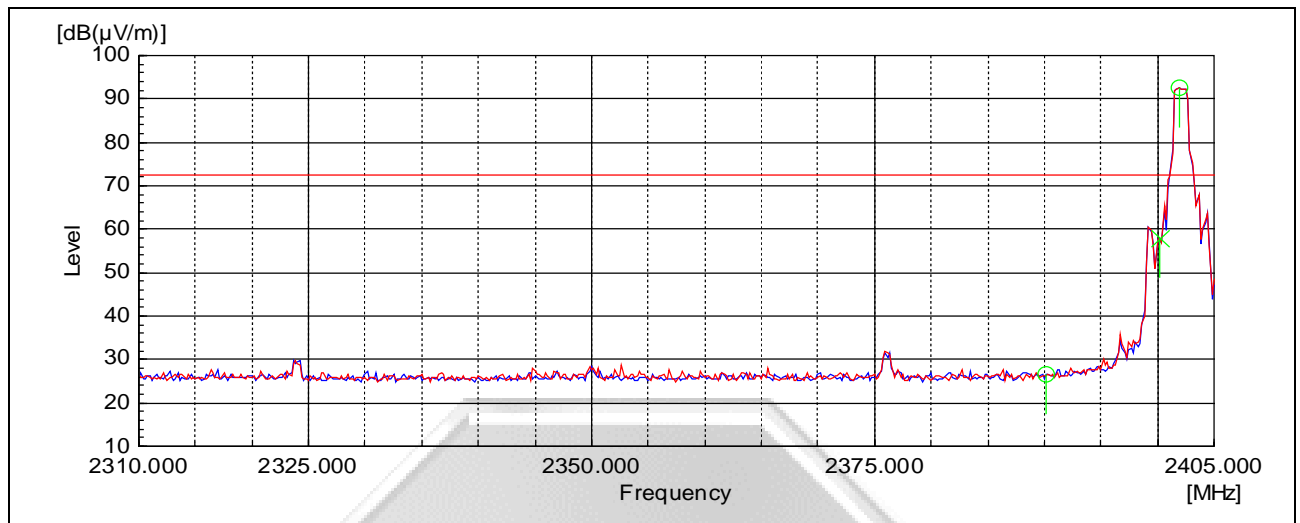


Plot 30 – Lower Band Edge at 2.4000GHz

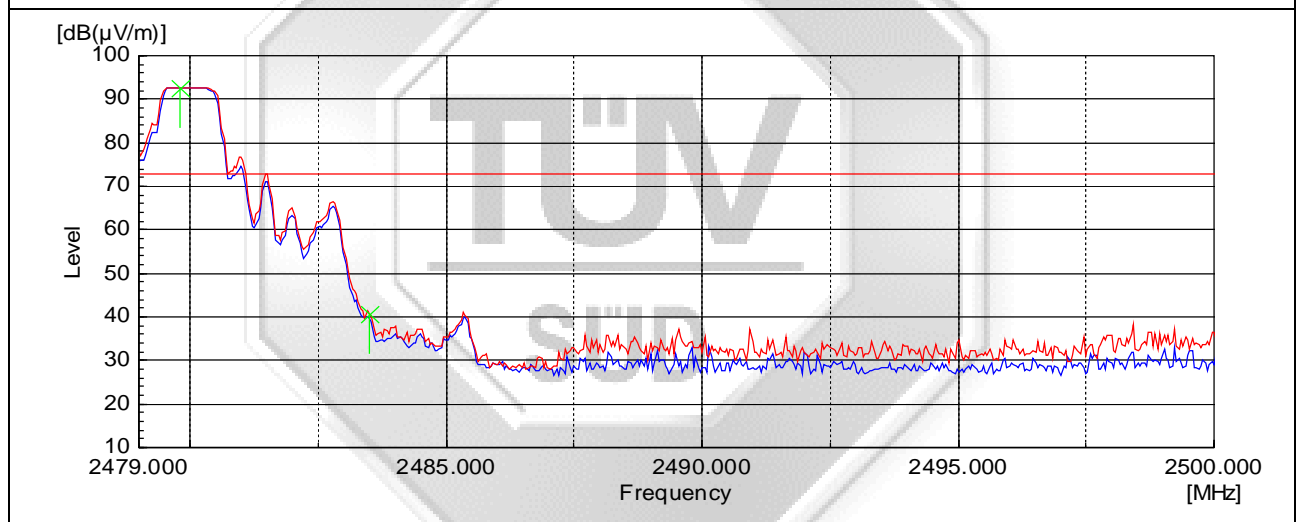


Plot 31 – Upper Band Edge at 2.4835GHz

Band Edge Compliance (Radiated) Plots (Restricted Band)

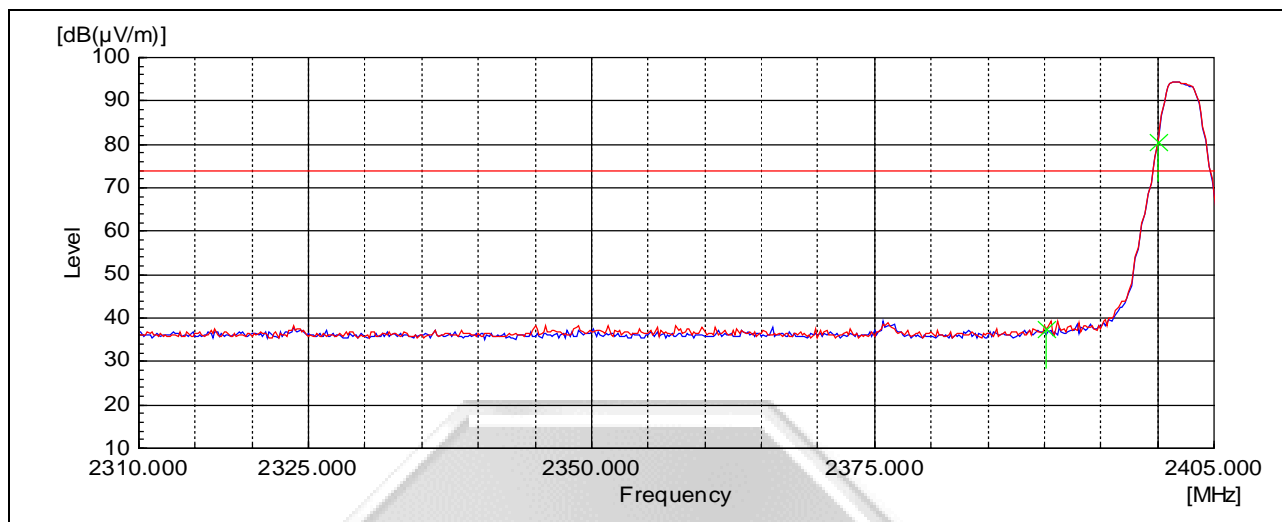


Plot 32 – Peak Plot at Lower Band Edge at 2.4000GHz

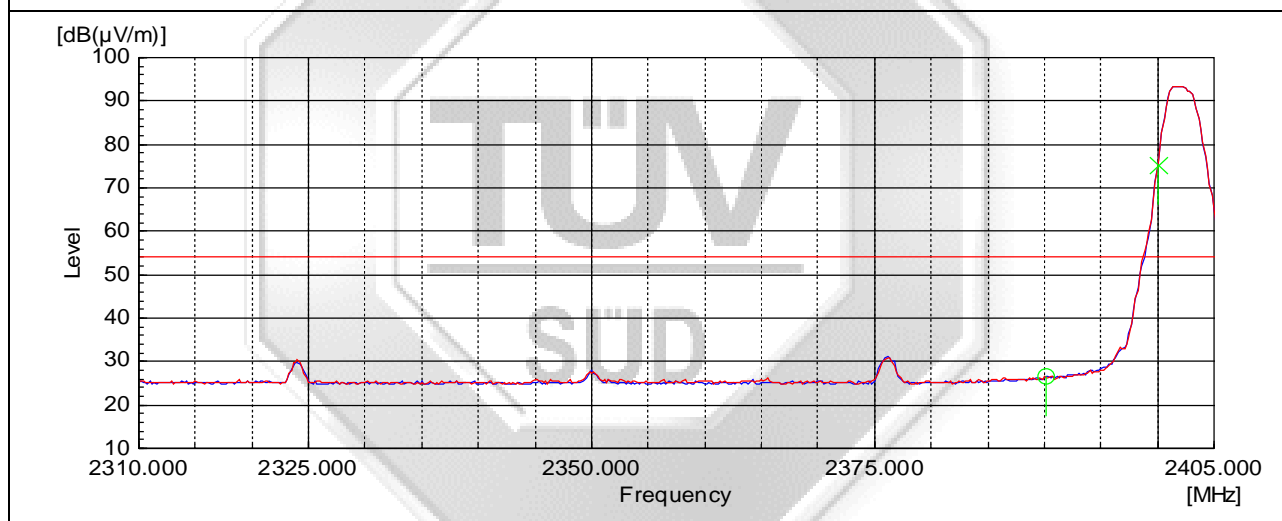


Plot 33 – Average Plot at Lower Band Edge at 2.4000GHz

Band Edge Compliance (Radiated) Plots (Restricted Band)

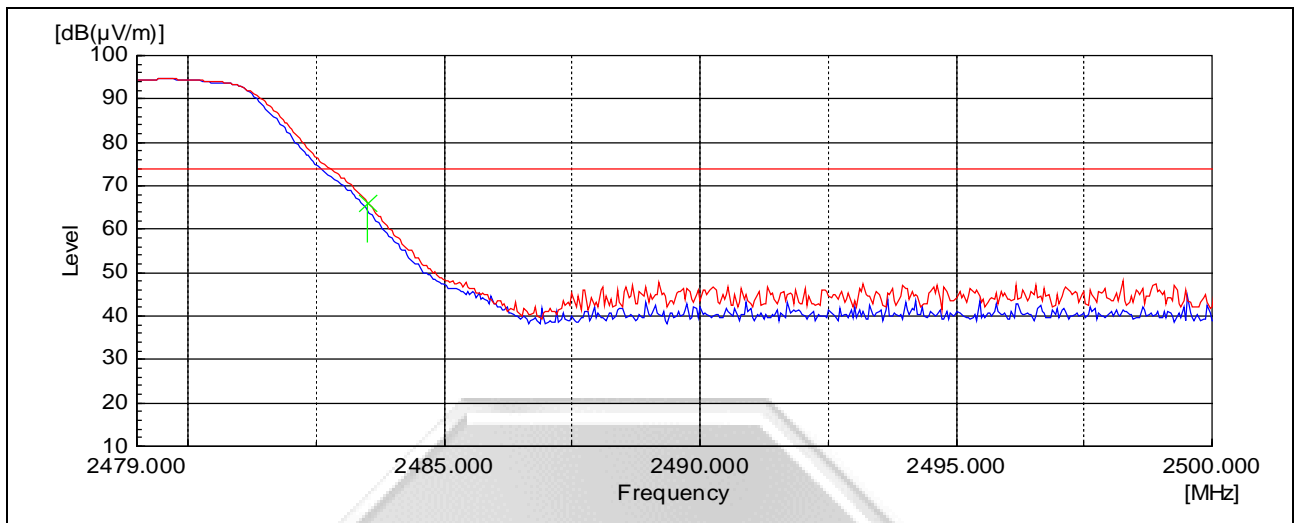

Plot 34 – Peak Plot at Upper Band Edge at 2.4835GHz

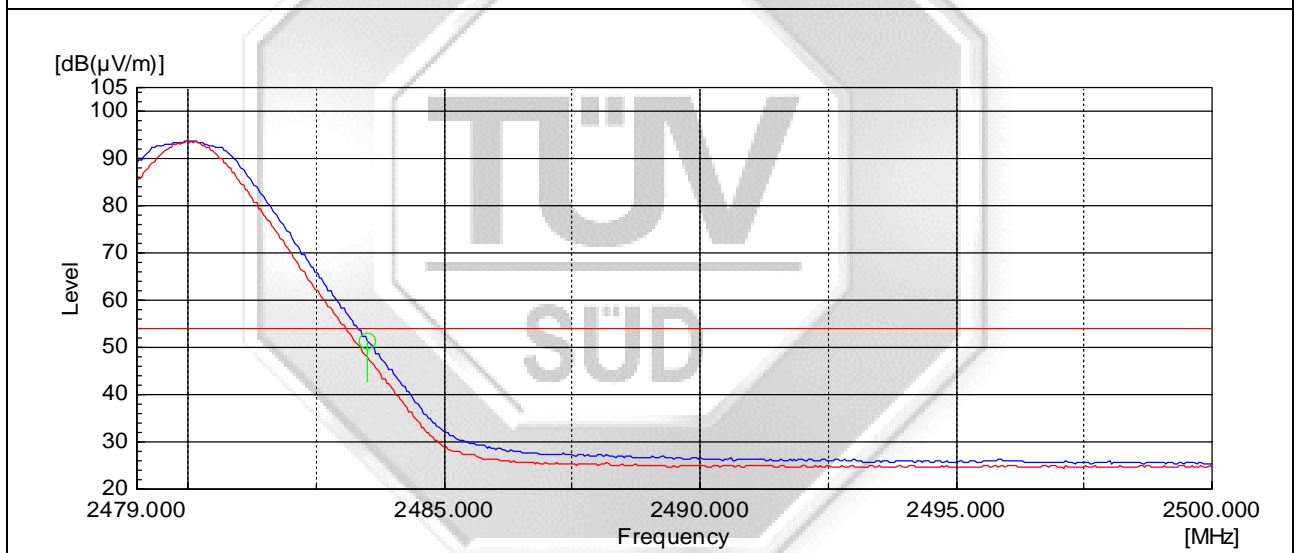

Plot 35 – Average Plot at Upper Band Edge at 2.4835GHz

2.8 Peak Power Spectral Density

2.8.1 Test Limits

The EUT shows compliance to the requirements of this section, which states the peak power spectral density conducted from the intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

2.8.2 Test Setup

2.8.2.1 The EUT and supporting equipment were set up as shown in the setup photo.

2.8.2.2 The power supply for the EUT was connected to a filtered mains.

2.8.2.3 The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.

2.8.2.4 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were set to the following:
RBW = 3kHz
VBW = 3RBW
Span = 1.5 times the channel bandwidth (6dB Bandwidth)
Sweep time = auto couple

2.8.2.5 All other supporting equipment were powered separately from another filtered mains.

2.8.3 Test Method

2.8.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at lower channel.

2.8.3.2 The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser.

2.8.3.3 The peak power density of the transmitting frequency was plotted and recorded.

2.8.3.4 The measurements were repeated if the EUT supports more than one modulation and data rate.

2.8.3.5 The measurement was repeated with the transmitting frequency was set to middle channel and upper channel respectively.




2.8.4 Test Results

Test Input Power	3.3Vdc	Temperature	24°C
Attached Plots	36 – 38	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	13 Jul 2018


Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW) <small>*See Note 1</small>	Limit (mW)
Lower	2.402	0.119	6.3
Middle	2.440	0.170	6.3
Upper	2.480	0.208	6.3

Notes


1.	Only the highest measured peak power spectral density was reported. Refer to plots for all measured peak power spectral density.
----	--

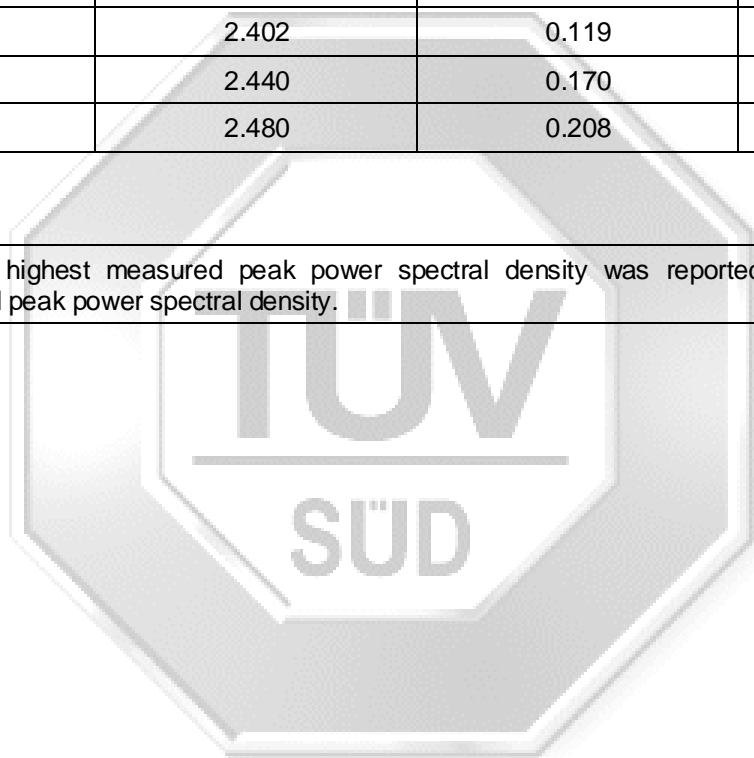

Peak Power Spectral Density Plots

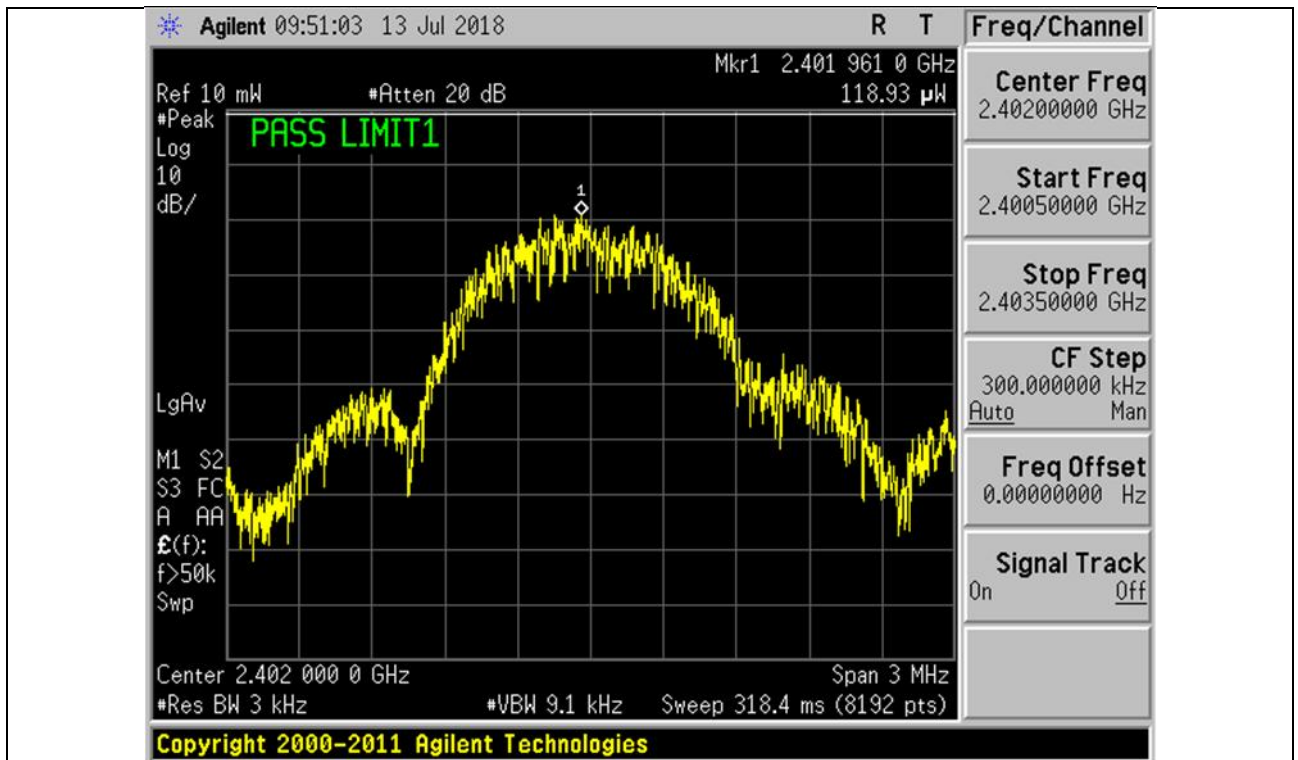


Plot 36 – Lower Channel

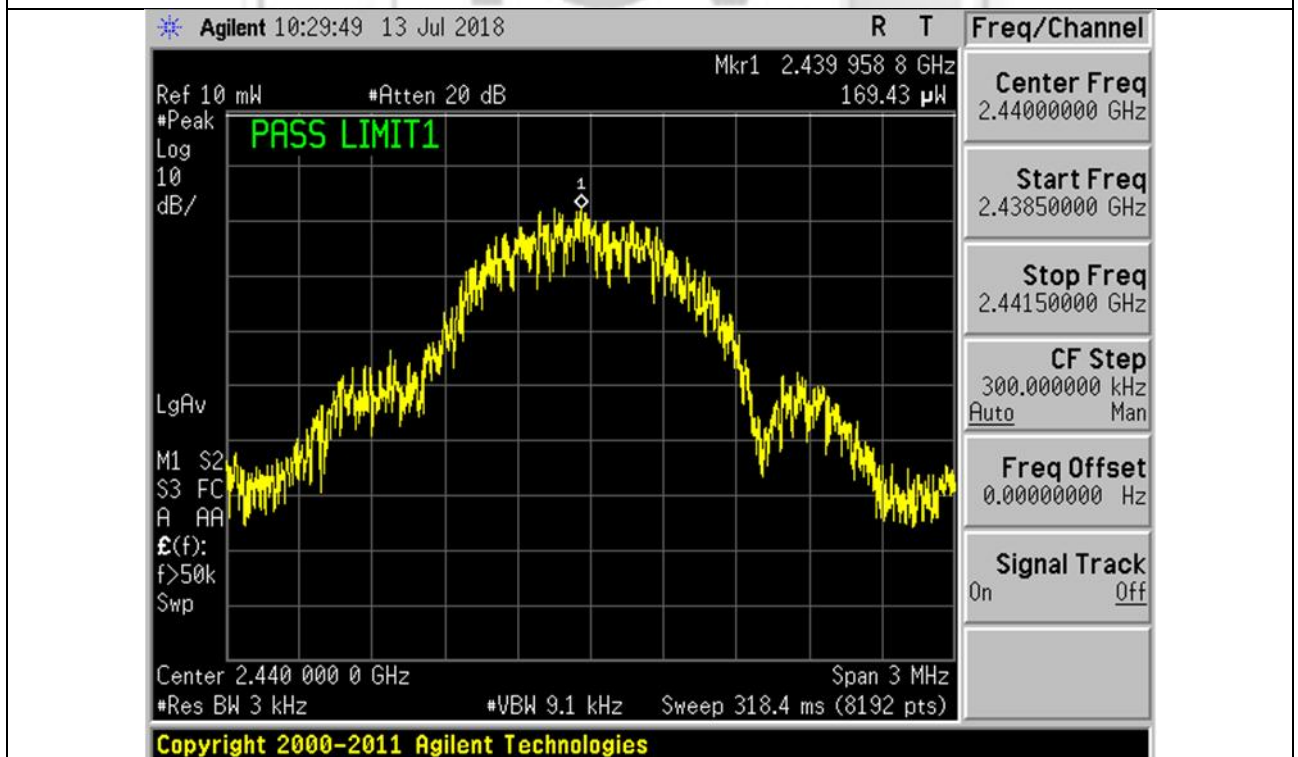

Plot 37 – Middle Channel

Peak Power Spectral Density Plots

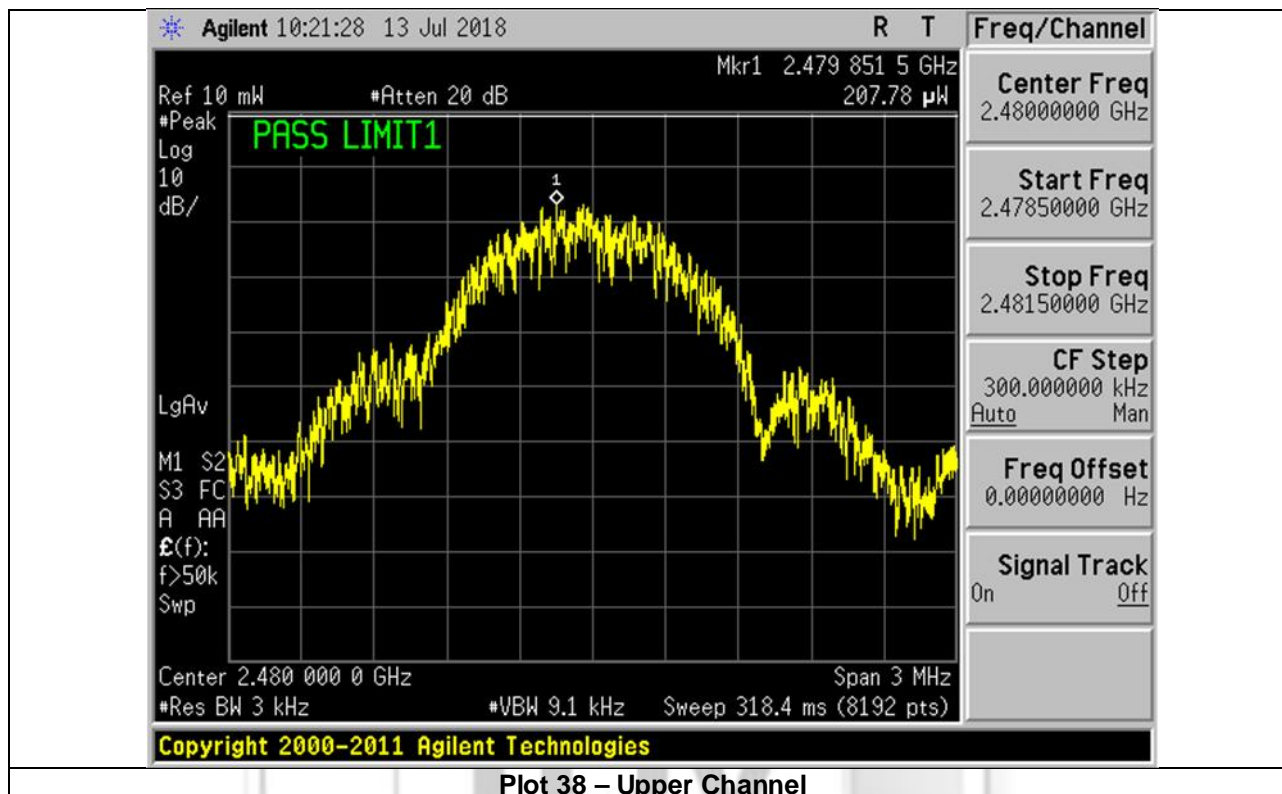

Plot 38 – Upper Channel

2.9 Maximum Permissible Exposure (MPE)

2.9.1 Test Limits

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (min)
0.3 - 1.34	614	1.63	100 ^{Note 2}	30
1.34 - 30	824 / f	2.19 / f	180 / f ² ^{Note 2}	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30
Notes				
1.	f = frequency in MHz			
2.	Plane wave equivalent power density			

Maximum Permissible Exposure Computation

The power density at 20cm distance was computed from the following formula:

$$S = (30GP) / (377d^2)$$

where

- S = Power density in W/m²
- P = 0.0077W
- d = Test distance at 0.2m
- G = Numerical isotropic gain, 1.58 (2.0dBi)

Substituting the relevant parameters into the formula:

$$\begin{aligned}
 S &= [(30GP) / 377d^2] \\
 &= 0.024 \text{ W/m}^2 \\
 &= 0.002 \text{ mW/cm}^2
 \end{aligned}$$


∴ The power density of the EUT at 20cm distance is 0.002mW/cm² based on the above computation and found to be lower than the power density limit of 1.0mW/cm².

3 Photographs

TEST SETUP (30MHz to 1GHz)



Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement) Test Setup (Front View)

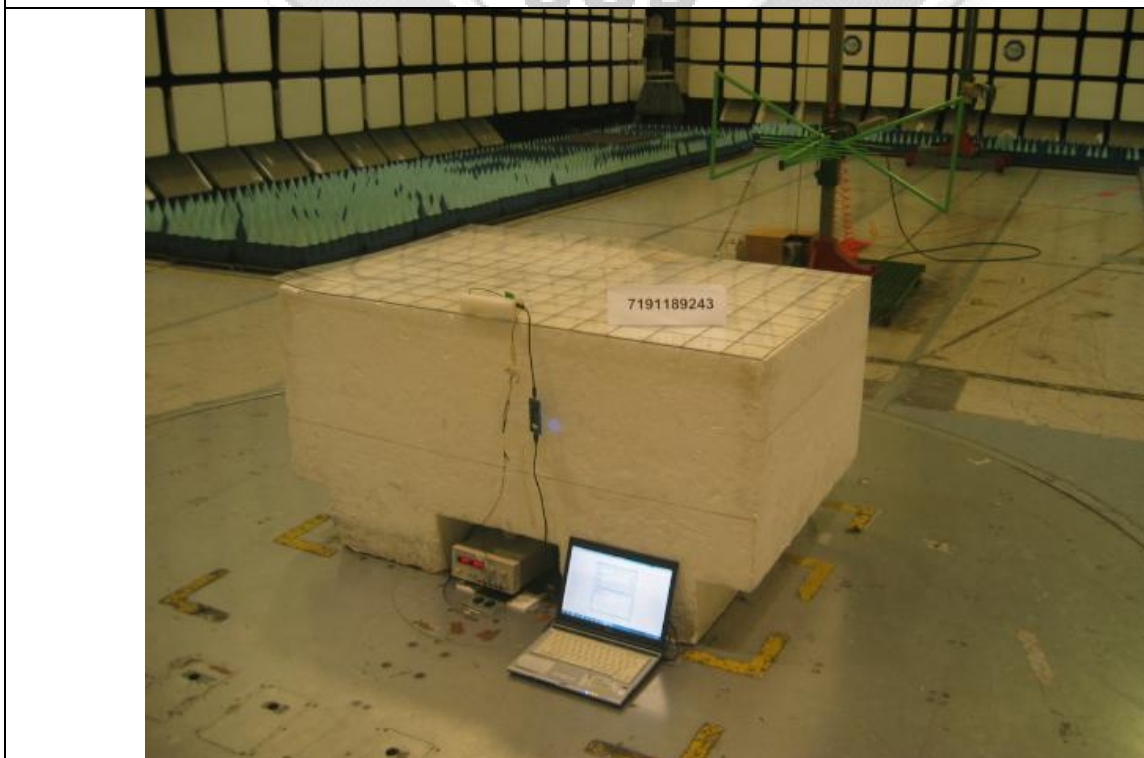


Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement) Test Setup (Rear View)

TEST SETUP (Above 1GHz)




Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement) Test Setup (Front View)

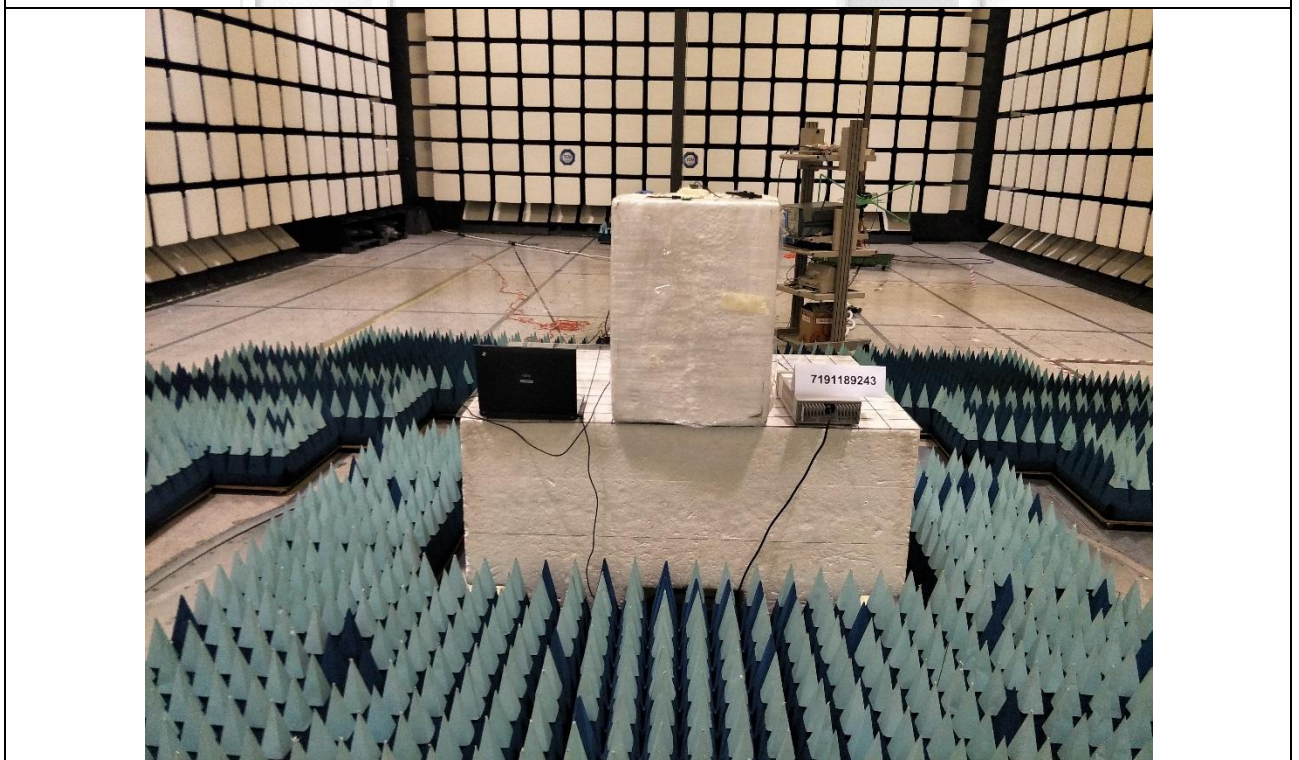

Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement) Test Setup (Rear View)

TEST SETUP

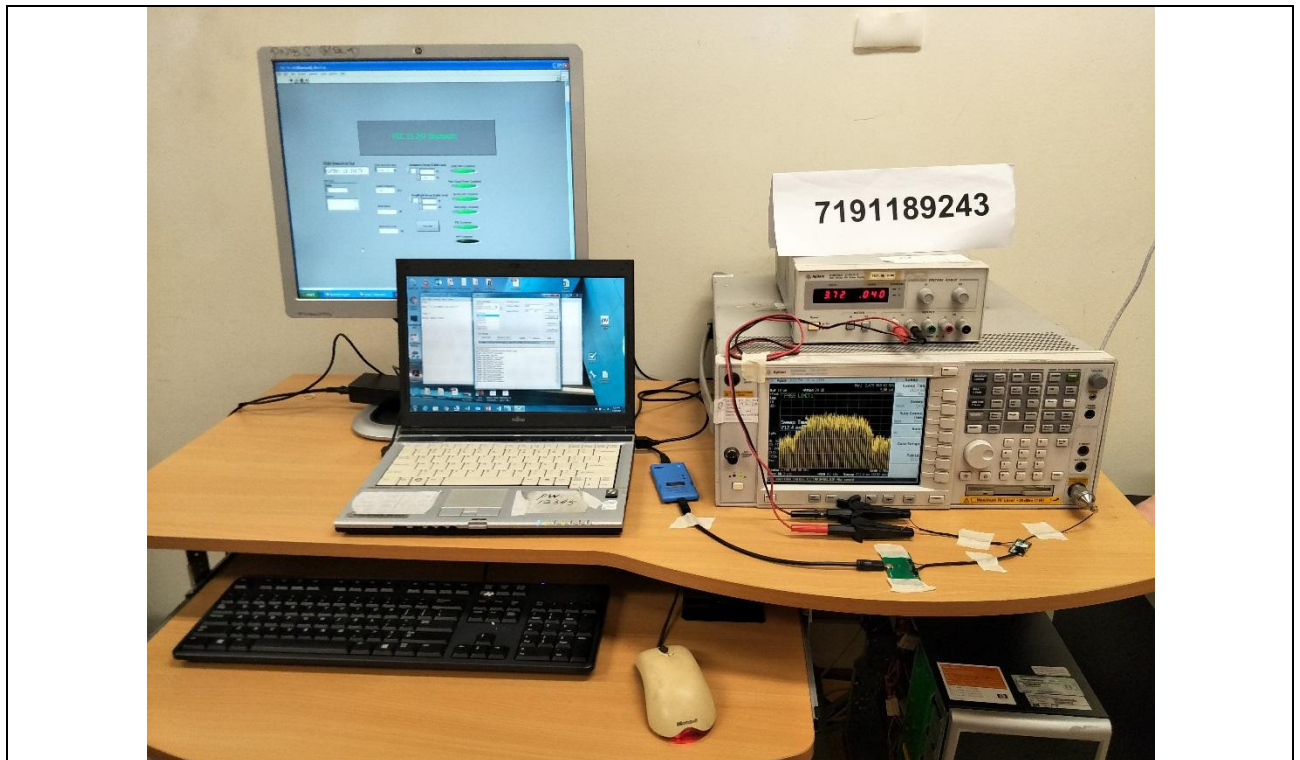


Spectrum Bandwidth (6db Bandwidth Measurement) Test Setup




Maximum Peak Power Test Setup

TEST SETUP

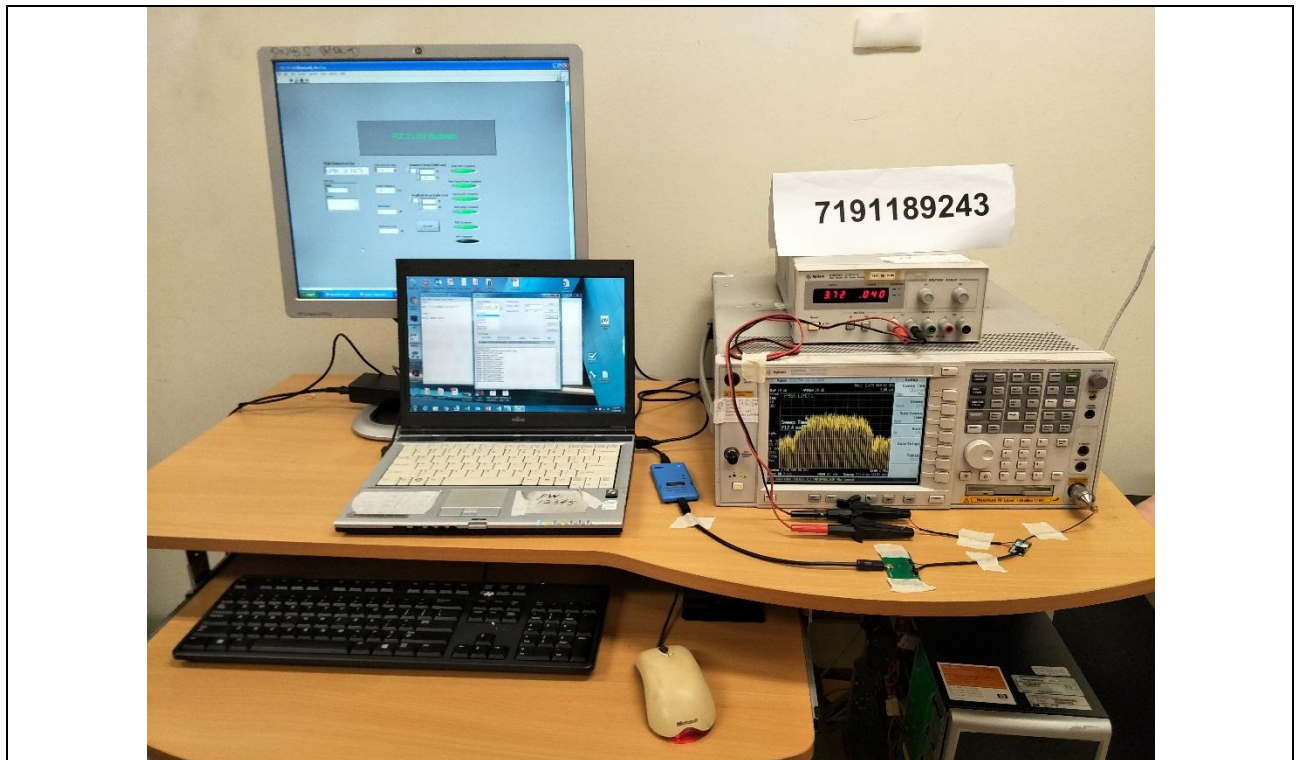


RF Conducted Spurious Emissions (Non-Restricted Bands) Test Setup

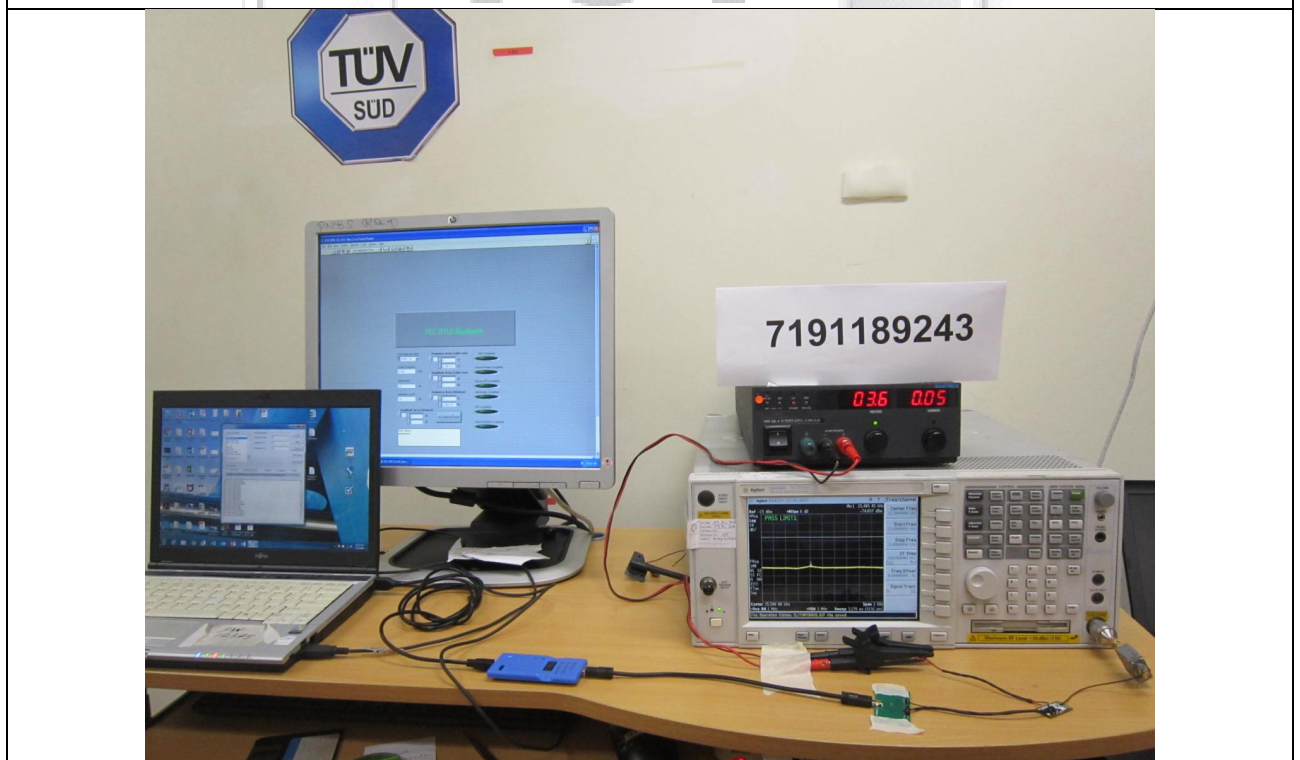


RF Conducted Spurious Emissions (Restricted Bands) Test Setup

TEST SETUP

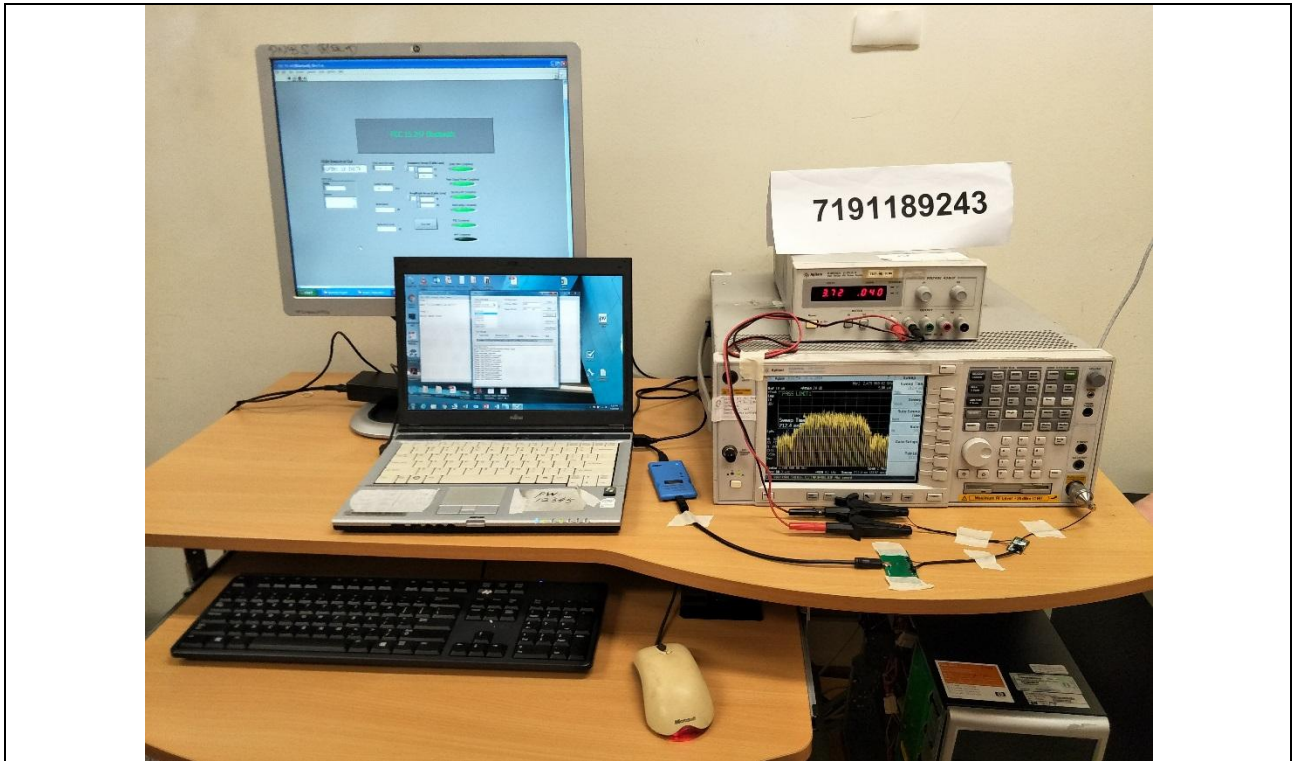


Band Edge Compliance (Conducted) Test Setup

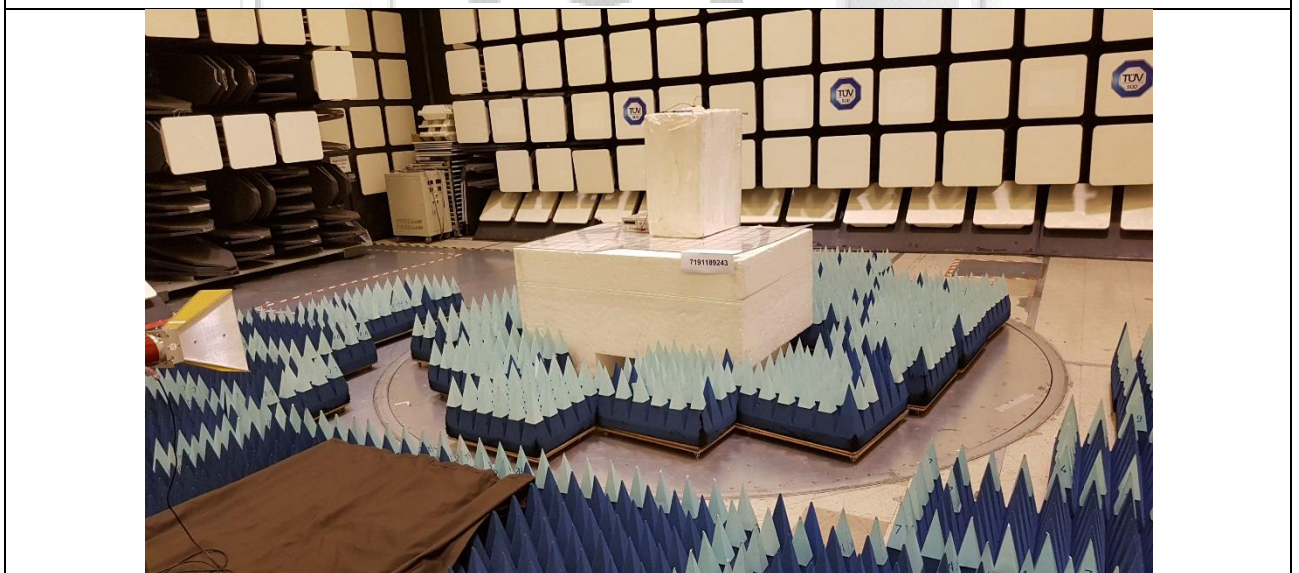


Band Edge Compliance (Radiated) Test Setup


TEST SETUP

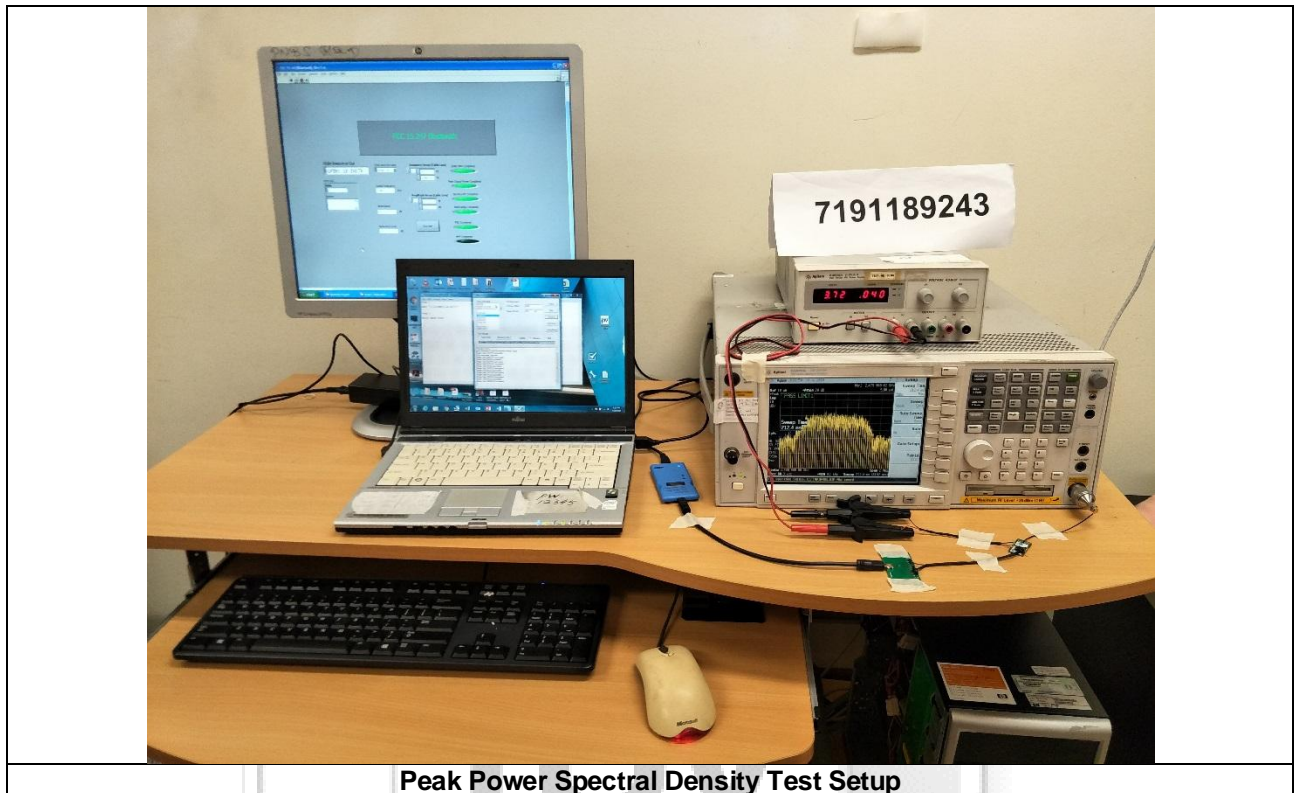


Peak Power Spectral Density Test Setup

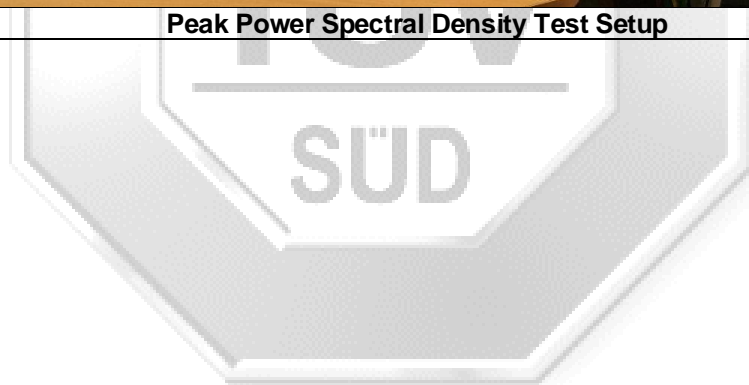

EUT PHOTOGRAPHS

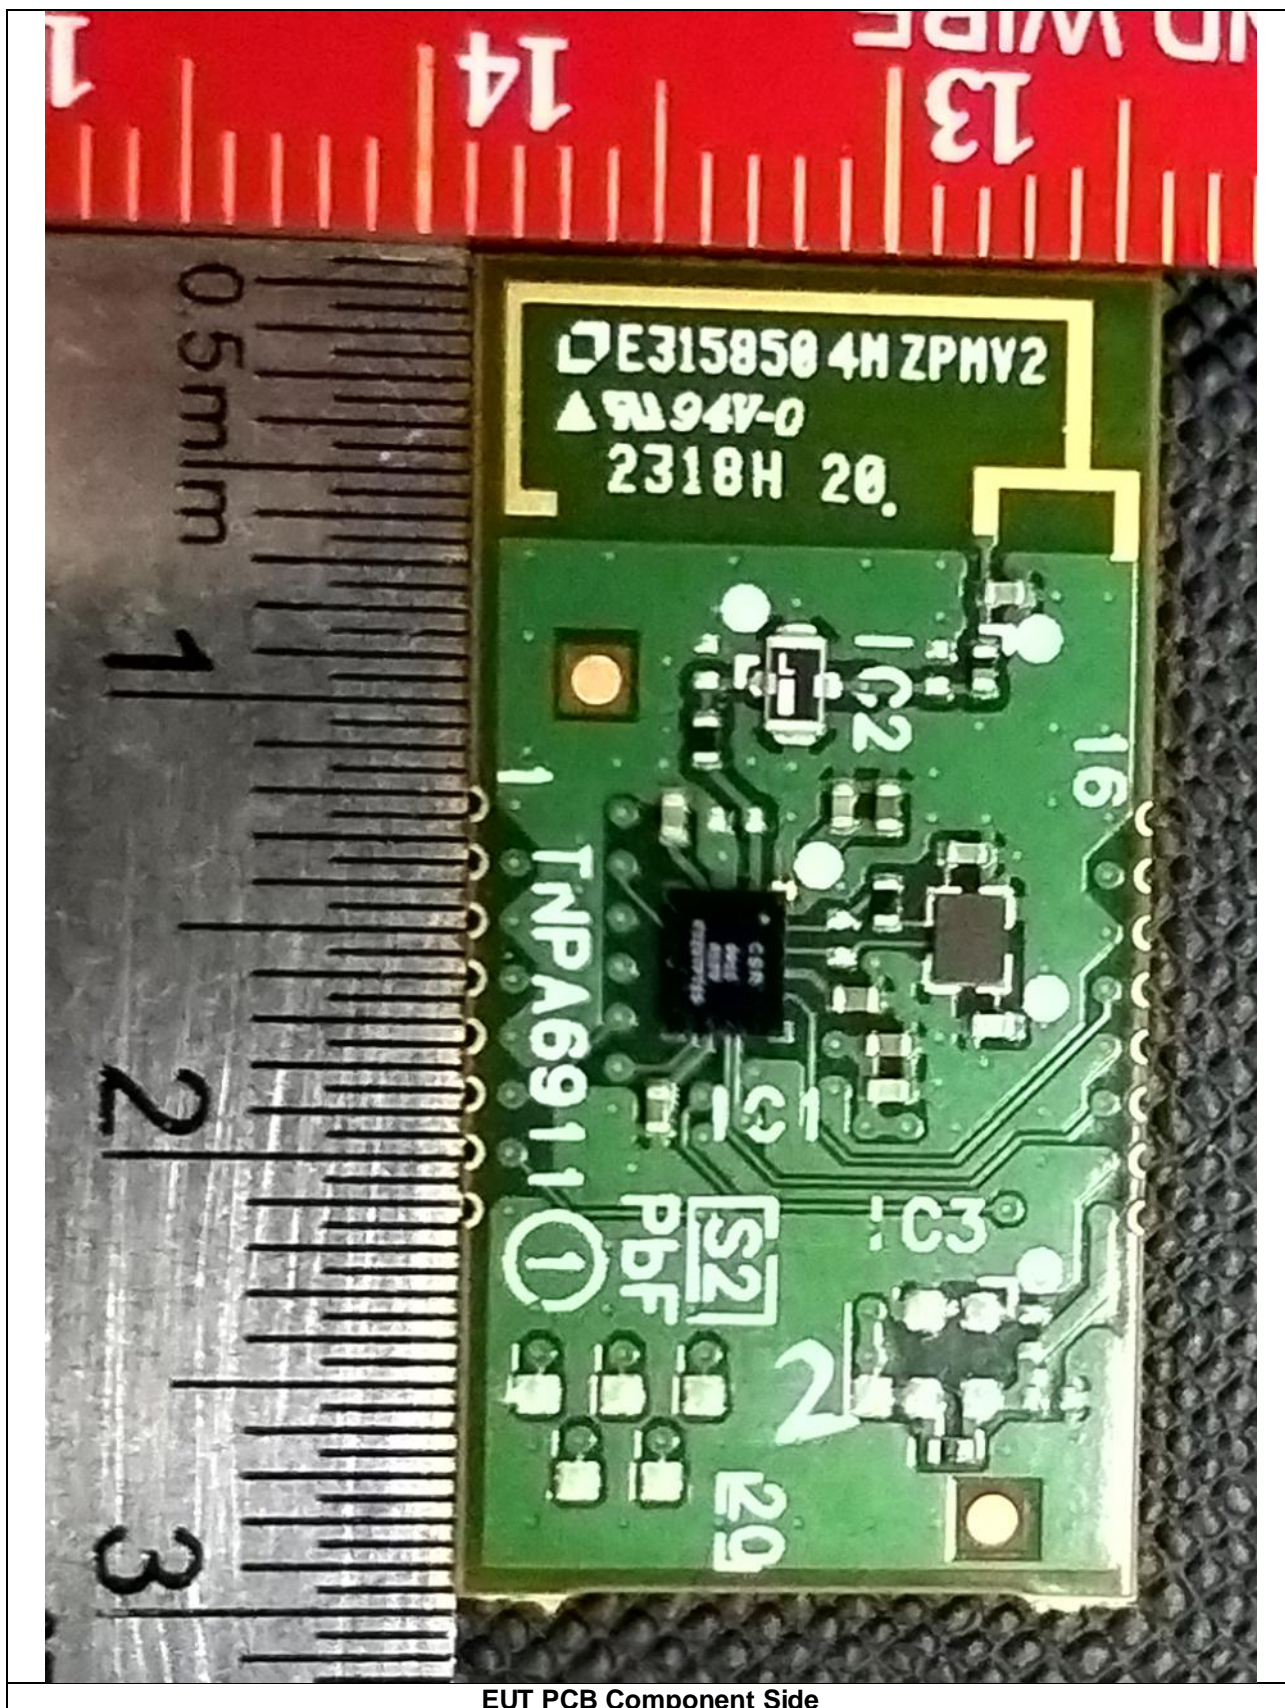

EUT PHOTOGRAPHS

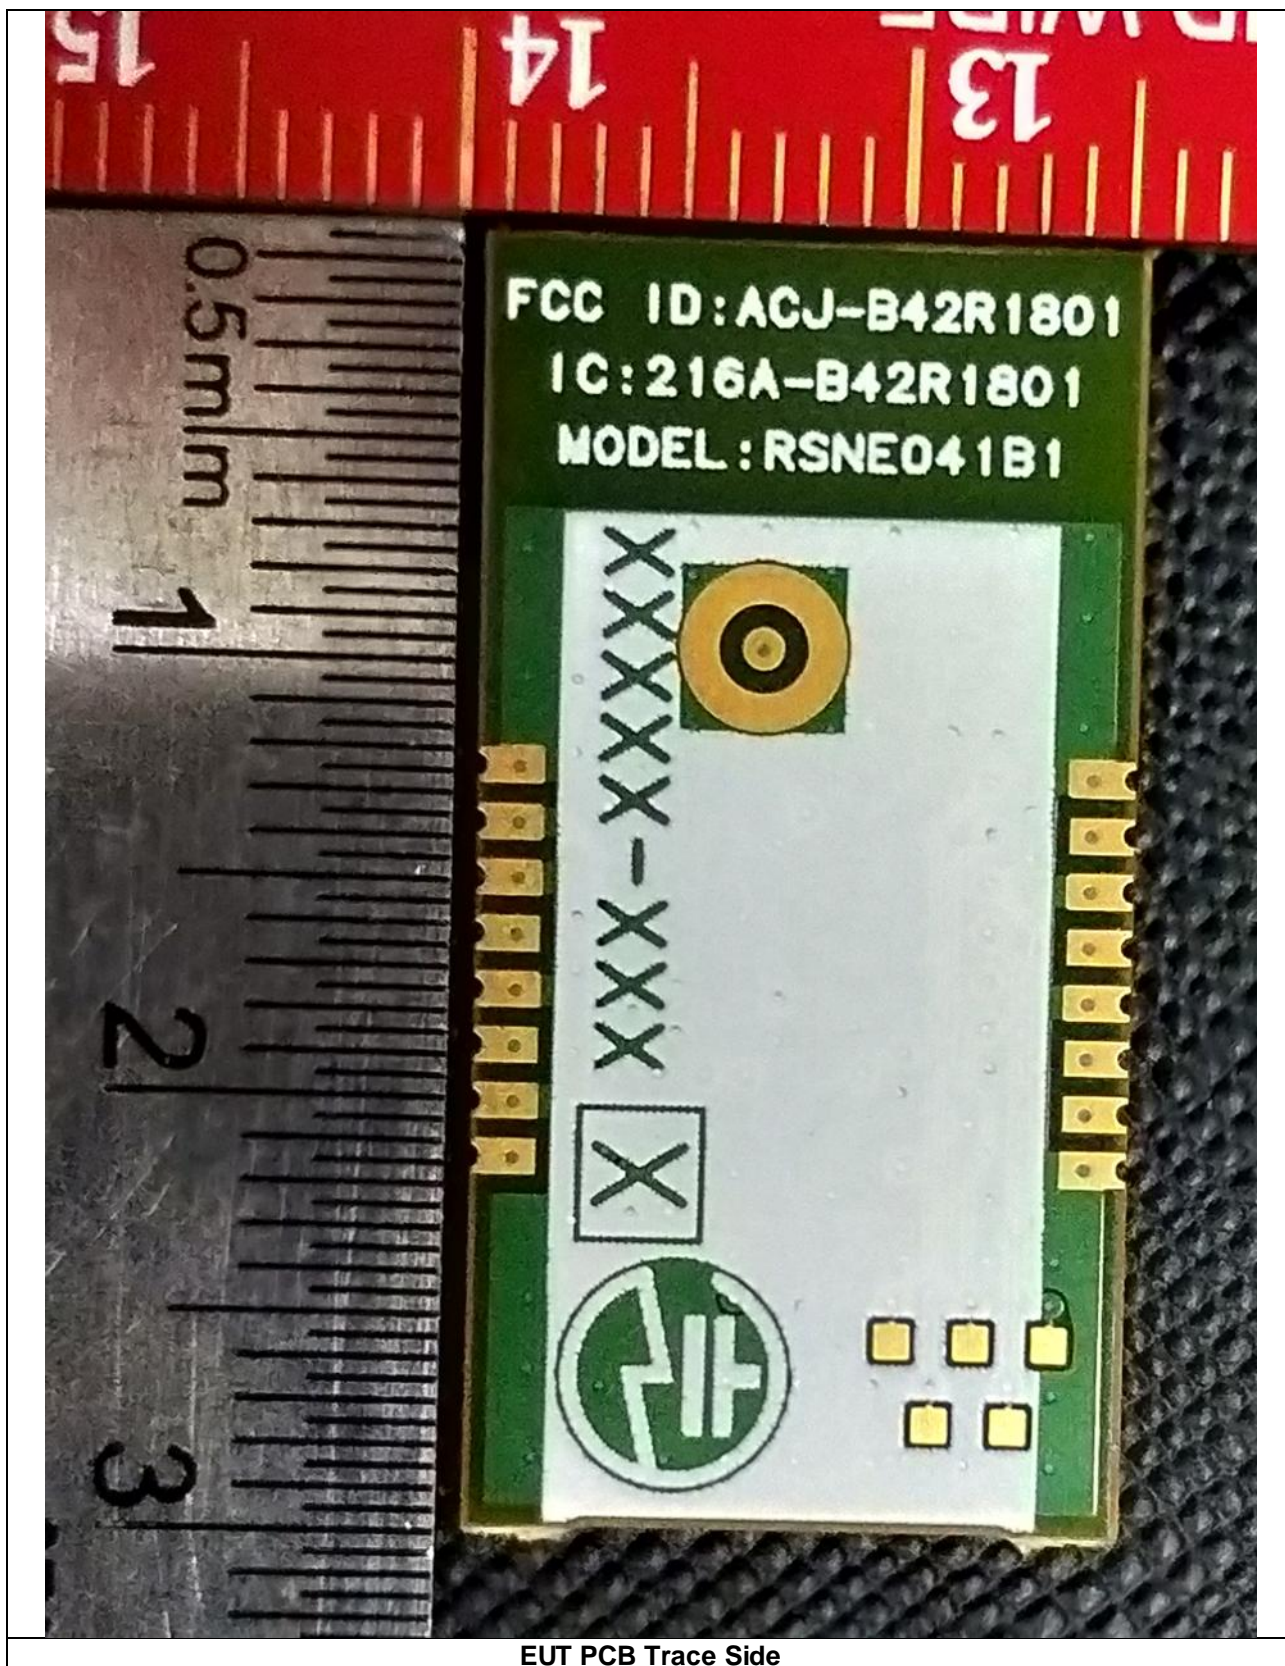

EUT PCB Trace Side

4 Test Equipment

Instrument	Model	S/No	Cal Due Date
<i>Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)</i>			
R&S Test Receiver – ES11	ES140	100010	25 Oct 2018
EMCO Loop Antenna	6502	134413	28 Oct 2018
Schaffner Bilog Antenna (30MHz - 2GHz)	CBL6112B	2597	20 Feb 2019
TDK-RF Horn Antenna	HRN-0118	130256	22 Feb 2019
ETS Horn Antenna (18GHz - 40GHz)	3116	0004-2474	15 Nov 2018
Com-Power Preamplifier (1MHz - 1GHz)	PAM-103	441058	22 Sep 2018
R&S Preamplifier (1GHz - 18GHz)	SCU18	102191	09 Mar 2019
Agilent Preamplifier(1GHz - 26.5GHz) (PA18)	8449D	3008A02305	02 Oct 2018
Toyo Preamplifier (26.5GHz - 40GHz)	HAP26-40W	00000005	15 Nov 2018
Micro-tronics Bandstop Filter (2.4GHz)	BRM50701-02	007	13 Feb 2019
<i>Spectrum Bandwidth (6dB Bandwidth Measurement)</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor
<i>Maximum Peak Power</i>			
Boonton Electronics RF Power Meter	4532	72901	27 Feb 2019
Boonton Electronics Peak Power Sensor	56218-S/1	1417	27 Feb 2019
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor
<i>RF Conducted Spurious Emissions (Non-Restricted Bands)</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor
<i>RF Conducted Spurious Emissions (Restricted Bands)</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
Xantrex DC Power Supply	XHR 150-4	33778	Output Monitor
Micro-tronics Bandstop Filter (2.4GHz)	BRM50701-02	007	13 Feb 2019
<i>Band Edge Compliance (Conducted)</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor



Instrument	Model	S/No	Cal Due Date
<i>Band Edge Compliance (Radiated)</i>			
R&S Test Receiver – ES11	ES140	100010	25 Oct 2018
TDK-RF Horn Antenna	HRN-0118	130256	22 Feb 2019
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	09 Mar 2019
<i>Peak Power Spectral Density</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor





5 Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2.

Test Name	Measurement Uncertainty
Conducted Emissions	9kHz to 30MHz, ± 2.1 dB
Radiated Emissions	30MHz to 1GHz, ± 3.8 dB >1GHz to 40GHz, ± 4.5 dB
Maximum Permissible Exposure	0.1MHz – 3GHz is $\pm 15.0\%$





Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011

