



Right Ear


CH00 (2402MHz) DH5(1 Mbps)- Duty Cycle

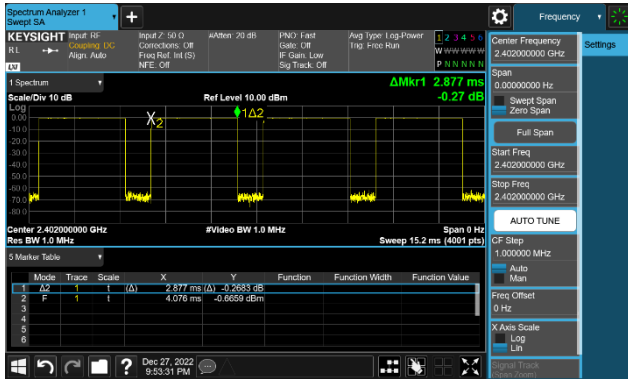


CH00 (2402MHz) DH5(1 Mbps)- Dwell time

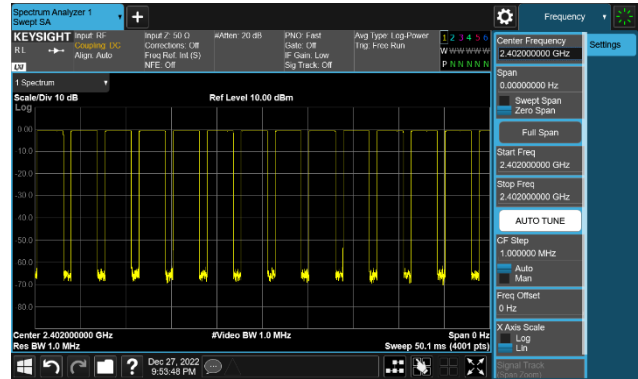


CH39 (2441MHz) DH5(1 Mbps)- Duty Cycle

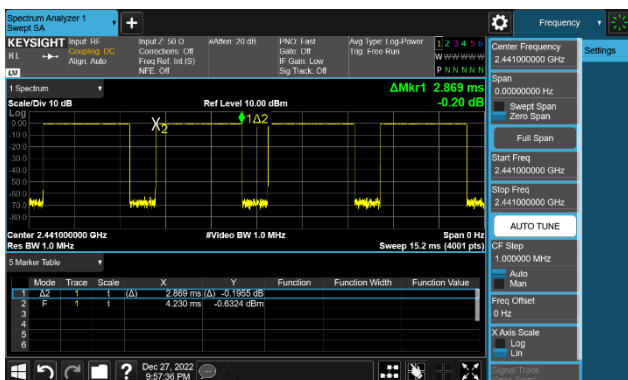


CH39 (2441MHz) DH5(1 Mbps)- Dwell time

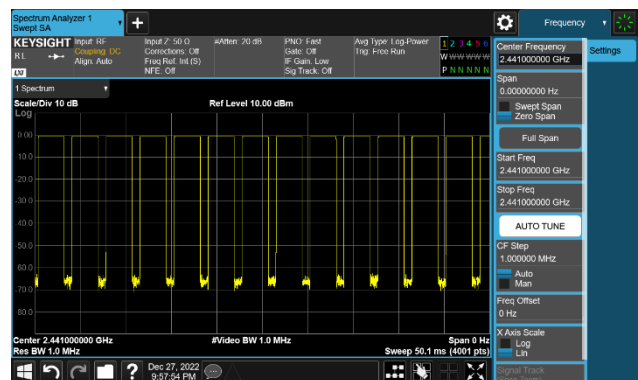

CH78 (2480MHz) DH5(1 Mbps)- Duty Cycle

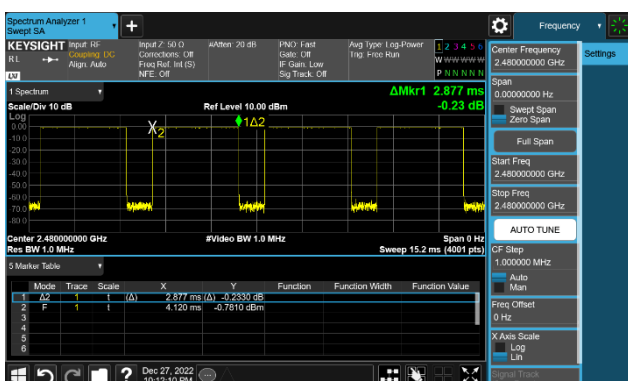


CH78 (2480MHz) DH5(1 Mbps)- Dwell time

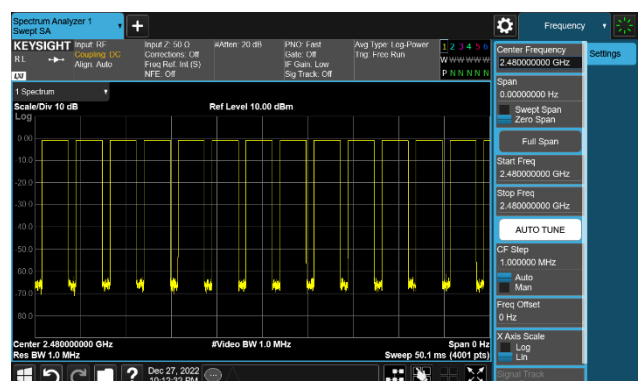


Right Ear


CH00 (2402MHz) 3-DH5(3 Mbps)- Duty Cycle

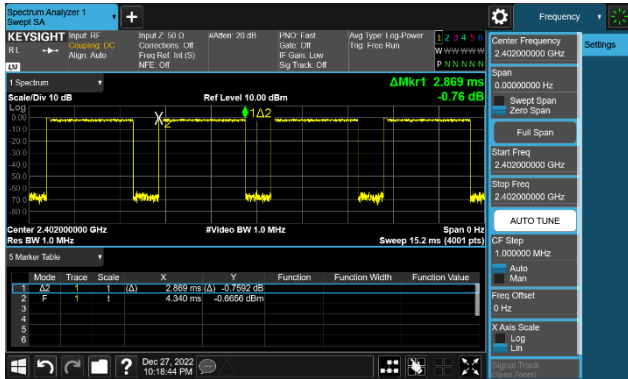


CH00 (2402MHz) 3-DH5(3 Mbps)- Dwell time

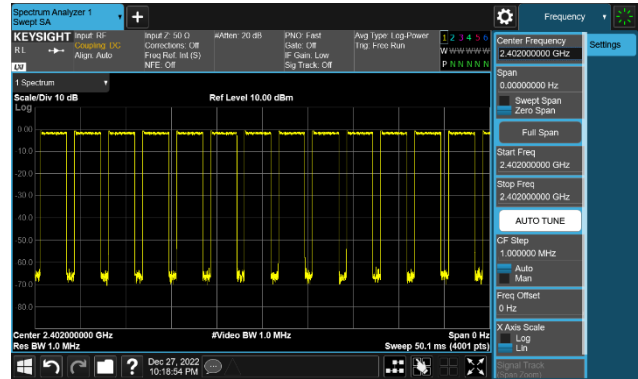


CH39 (2441MHz) 3-DH5(3 Mbps)- Duty Cycle

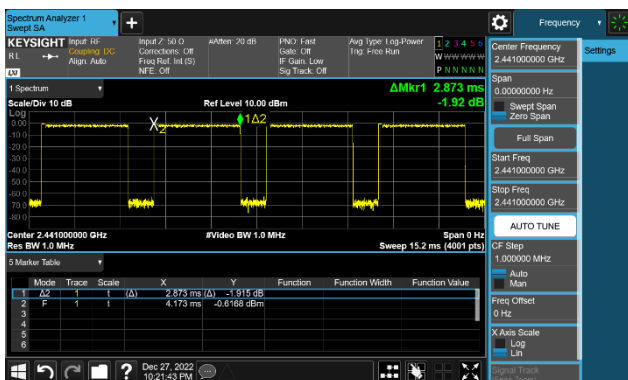


CH39 (2441MHz) 3-DH5(3 Mbps)- Dwell time

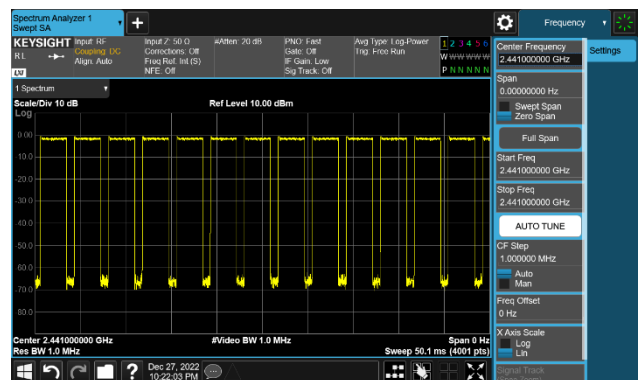

CH78 (2480MHz) 3-DH5(3 Mbps)- Duty Cycle

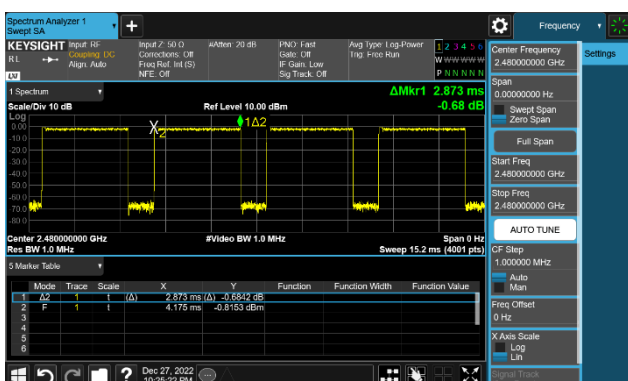

CH78 (2480MHz) 3-DH5(3 Mbps)- Dwell time

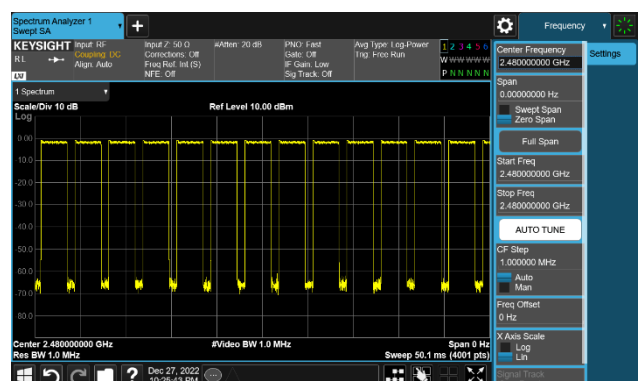

7.7. Out-of-Band Spurious Emissions Emissions Measurement

7.7.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.2. Test Procedure Used


ANSI C63.10-2013 - Section 7.8.8

7.7.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100 KHz
3. VBW \geq RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

7.7.4. Test Setup

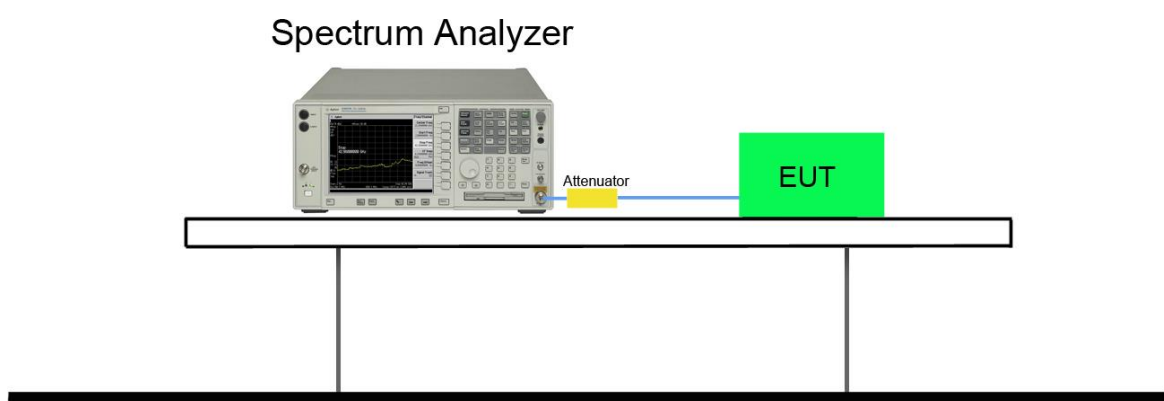


7.7.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
Left Ear				
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
Right Ear				
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

Left Ear


CH00 (2402MHz) DH5(1Mbps)

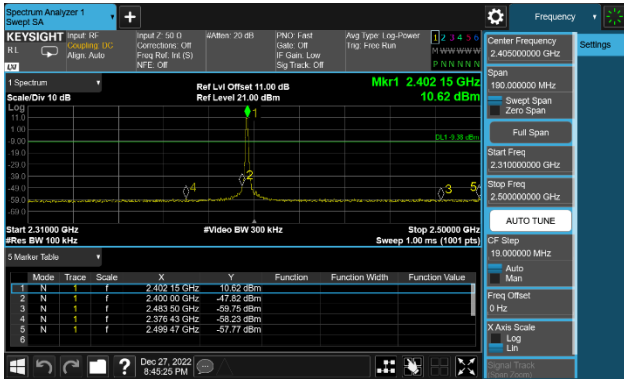


CH00 (2402MHz) DH5(1Mbps)

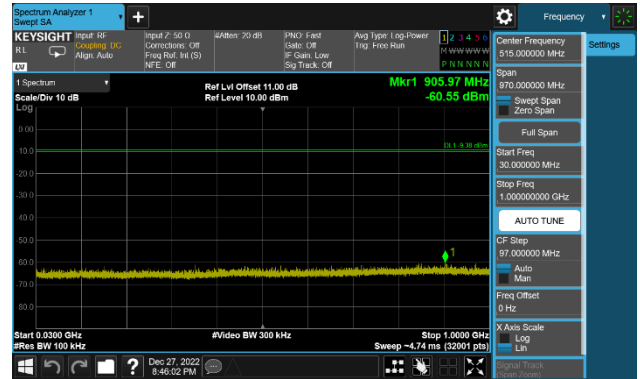


CH00 (2402MHz) DH5(1Mbps)

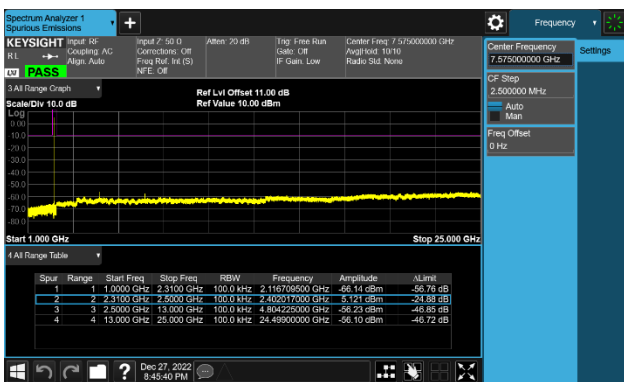


CH39 (2441MHz) DH5(1Mbps)

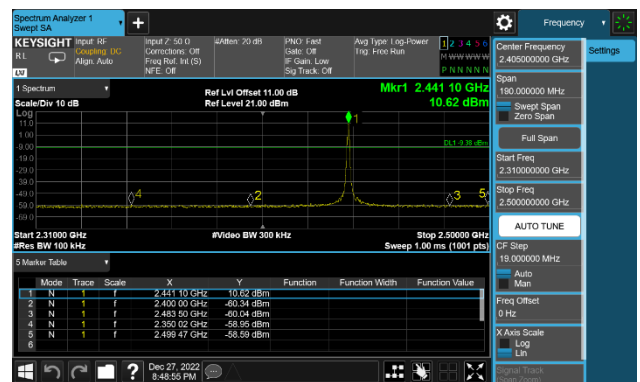


CH39 (2441MHz) DH5(1Mbps)

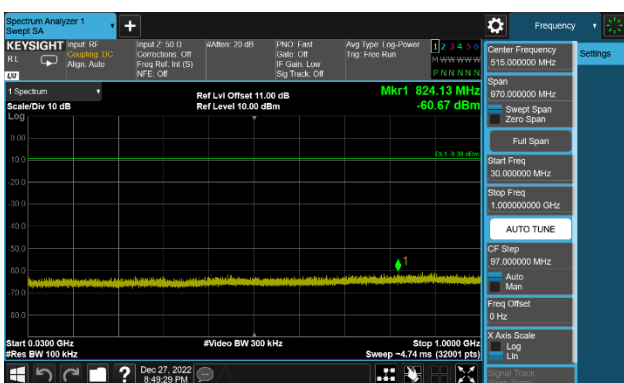


CH39 (2441MHz) DH5(1Mbps)

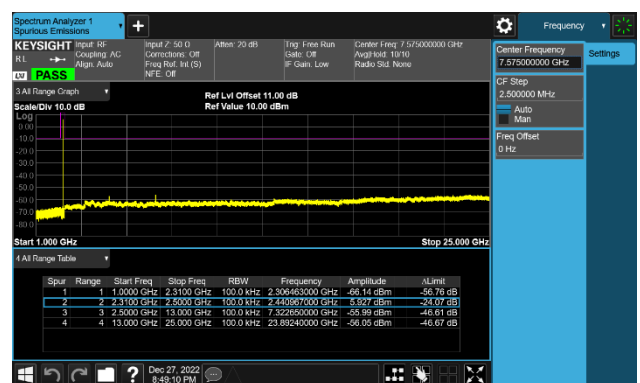


CH78 (2480MHz) DH5(1Mbps)

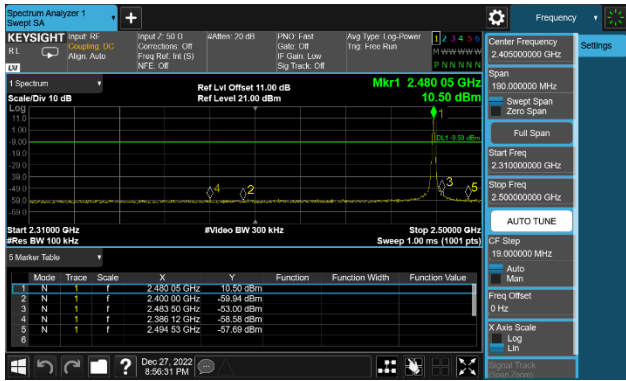


CH78 (2480MHz) DH5(1Mbps)

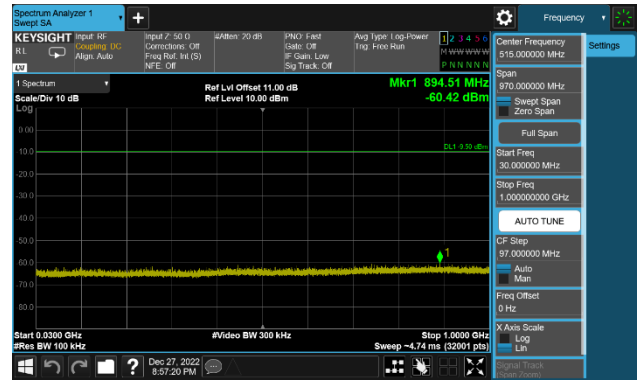


CH78 (2480MHz) DH5(1Mbps)

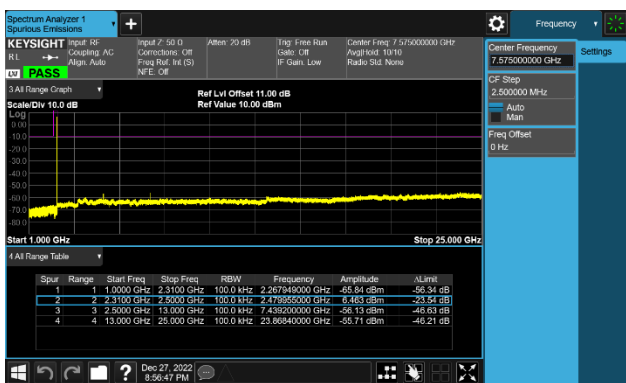


CH00 (2402MHz) 3-DH5(3Mbps)

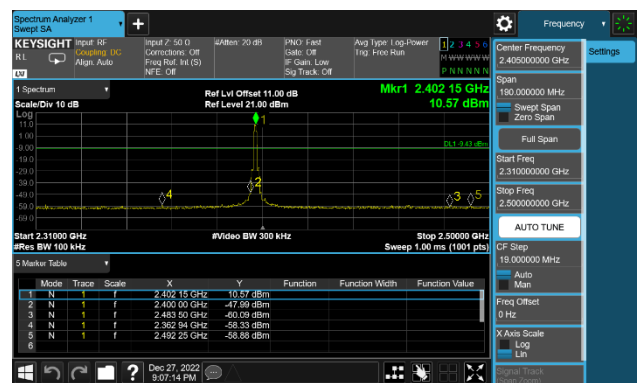


CH00 (2402MHz) 3-DH5(3Mbps)

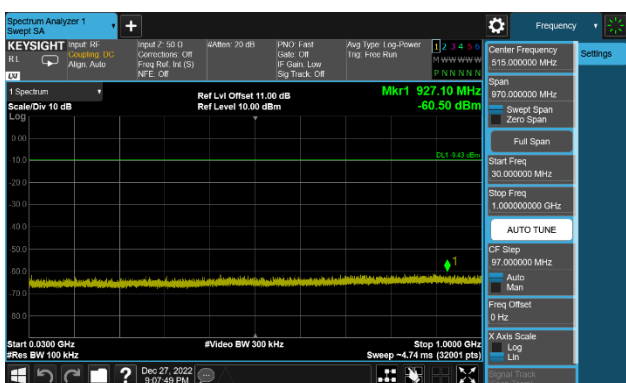


CH00 (2402MHz) 3-DH5(3Mbps)

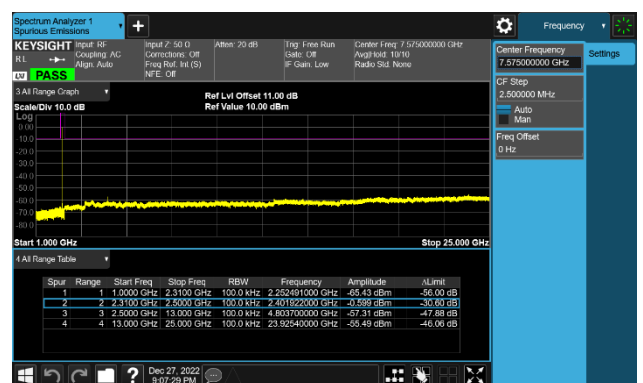


CH39 (2441MHz) 3-DH5(3Mbps)

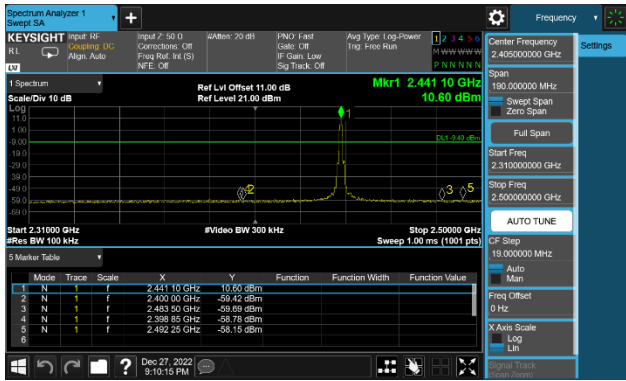


CH39 (2441MHz) 3-DH5(3Mbps)

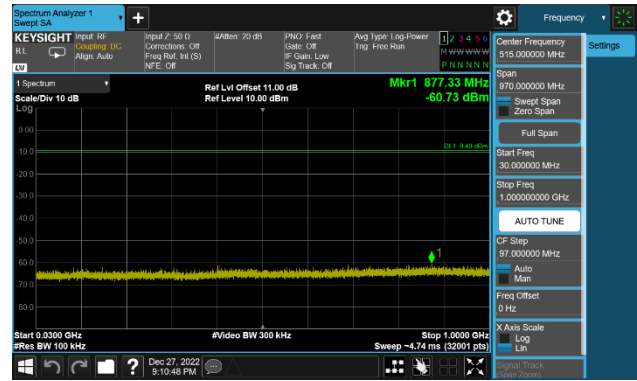


CH39 (2441MHz) 3-DH5(3Mbps)

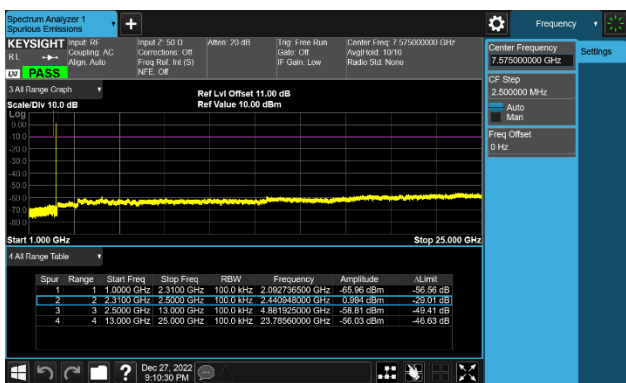


CH78 (2480MHz) 3-DH5(3Mbps)

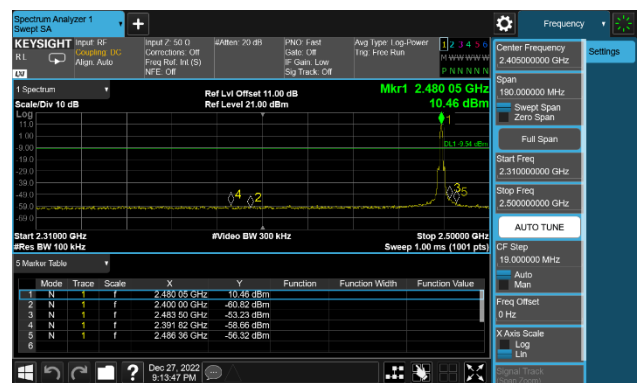

CH78 (2480MHz) 3-DH5(3Mbps)

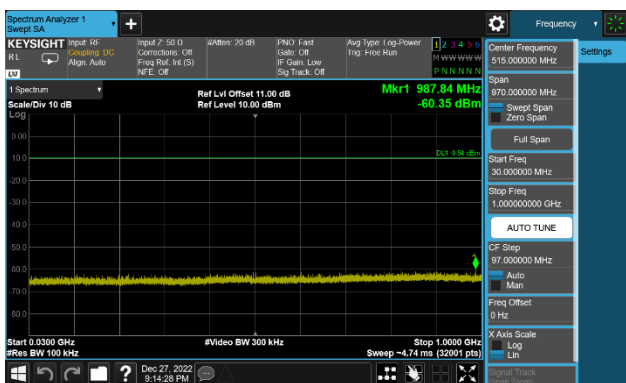


CH78 (2480MHz) 3-DH5(3Mbps)

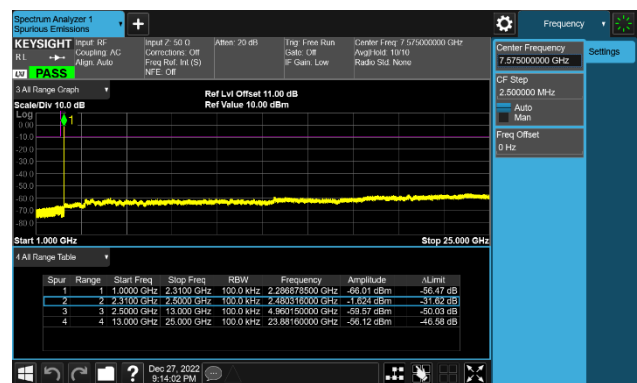


Right Ear


CH00 (2402MHz) DH5(1Mbps)

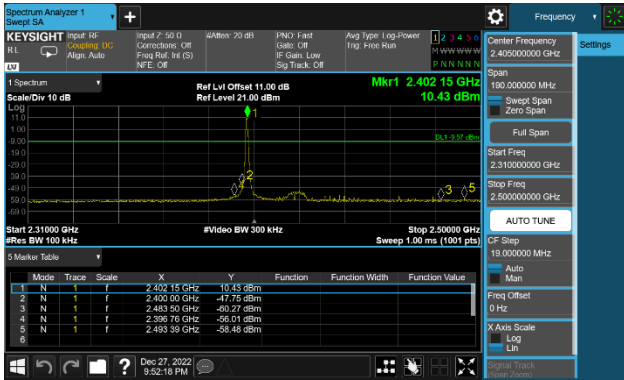


CH00 (2402MHz) DH5(1Mbps)

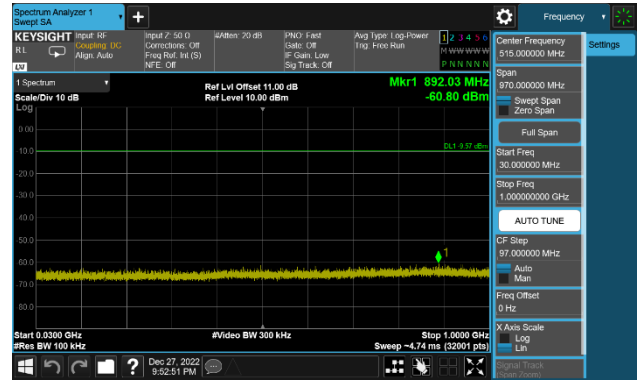


CH00 (2402MHz) DH5(1Mbps)

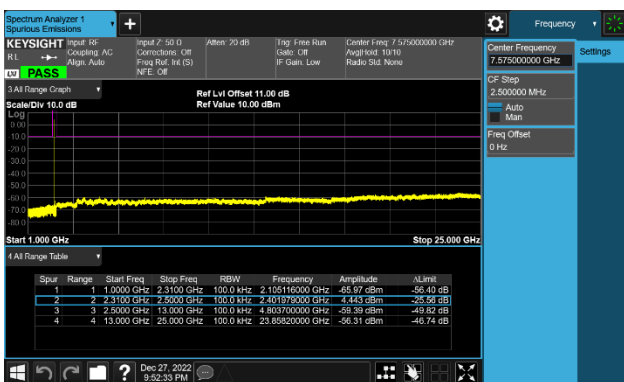


CH39 (2441MHz) DH5(1Mbps)

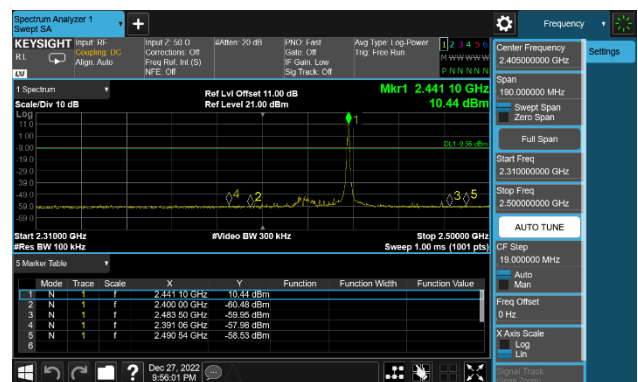


CH39 (2441MHz) DH5(1Mbps)

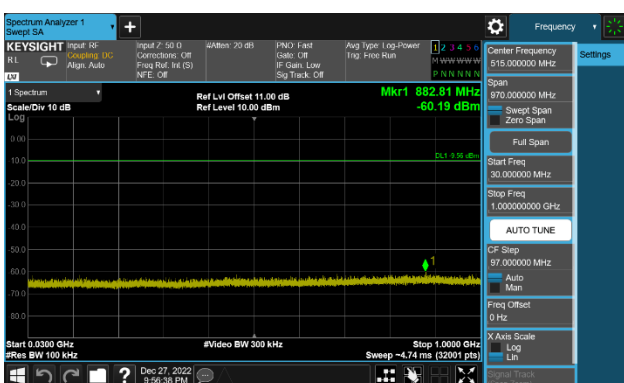


CH39 (2441MHz) DH5(1Mbps)

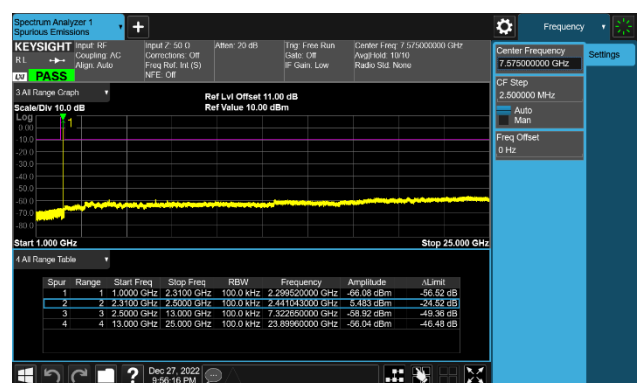


CH78 (2480MHz) DH5(1Mbps)

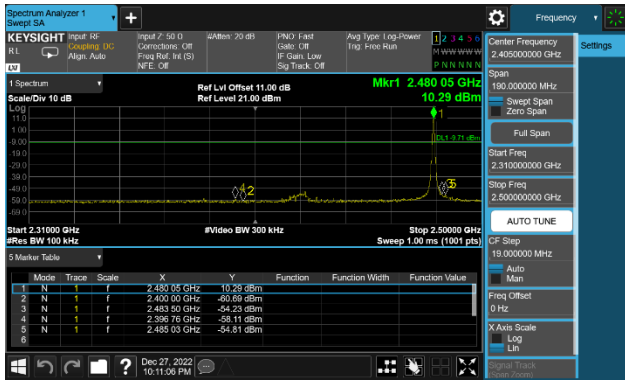

CH78 (2480MHz) DH5(1Mbps)

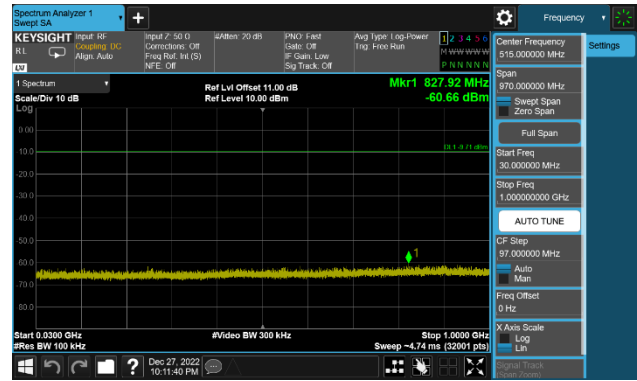


CH78 (2480MHz) DH5(1Mbps)

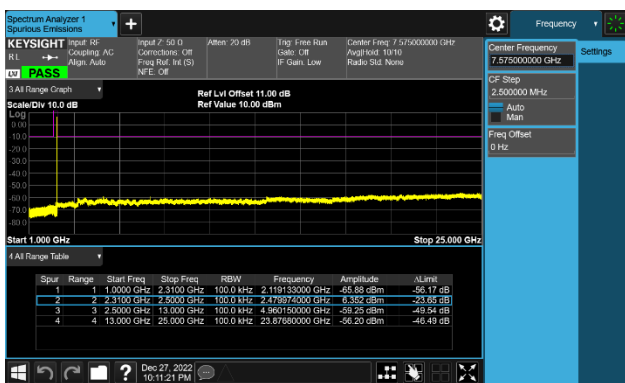


CH00 (2402MHz) 3-DH5(3Mbps)




CH00 (2402MHz) 3-DH5(3Mbps)

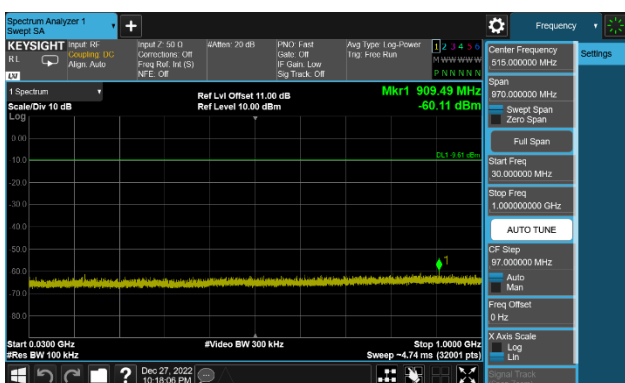


CH00 (2402MHz) 3-DH5(3Mbps)

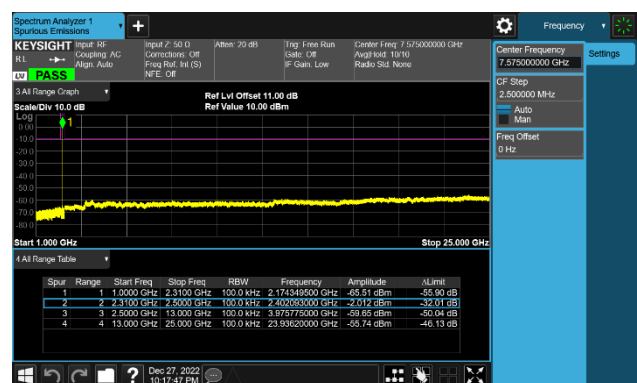


CH39 (2441MHz) 3-DH5(3Mbps)

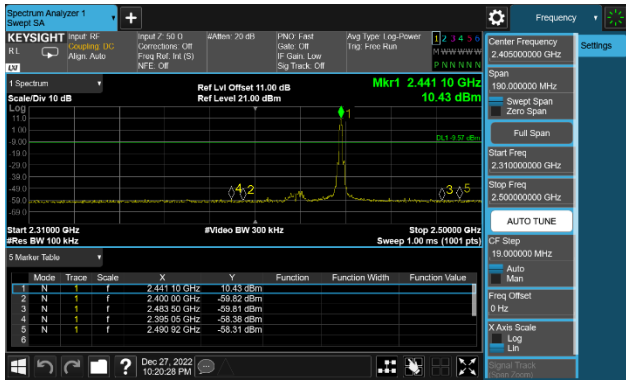


CH39 (2441MHz) 3-DH5(3Mbps)

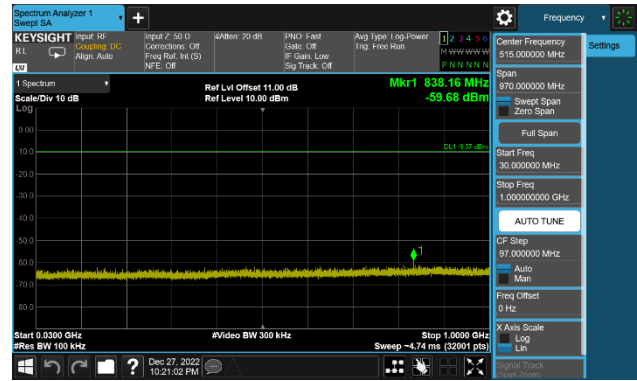


CH39 (2441MHz) 3-DH5(3Mbps)

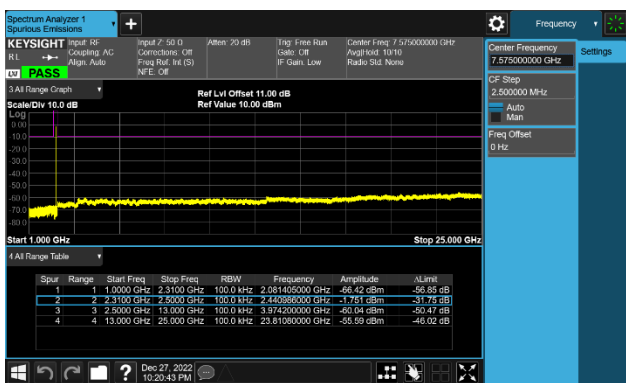


CH78 (2480MHz) 3-DH5(3Mbps)

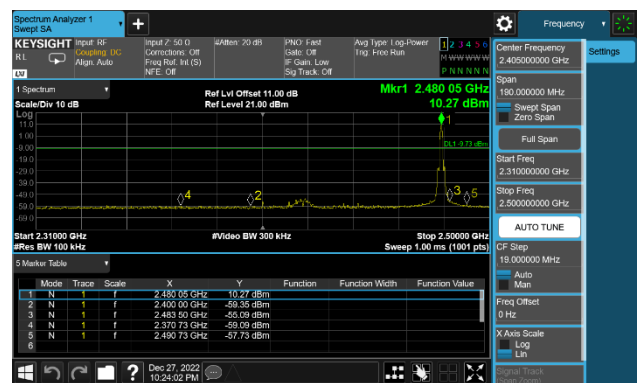

CH78 (2480MHz) 3-DH5(3Mbps)

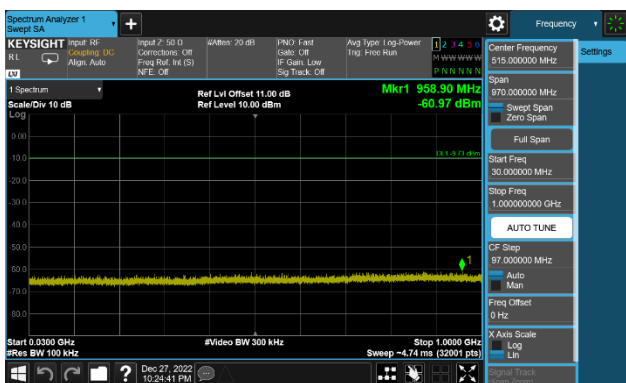



CH78 (2480MHz) 3-DH5(3Mbps)

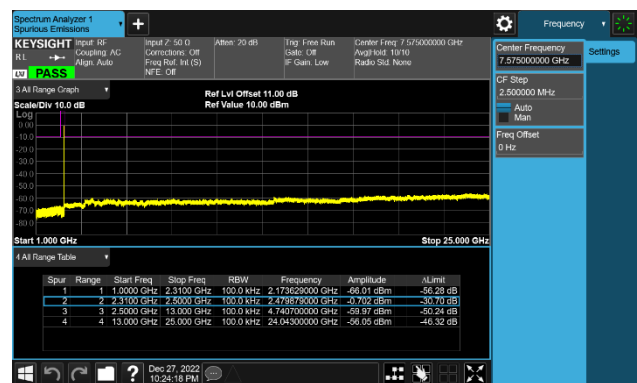

Band Edge With Hopping On_ Left Ear



CH00 (2402MHz) DH5(1Mbps)

CH78 (2480MHz) DH5(1Mbps)

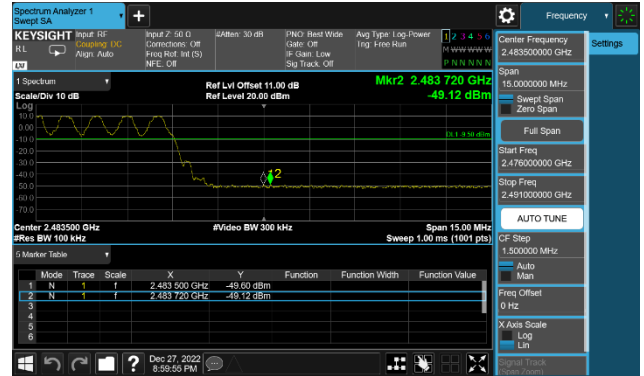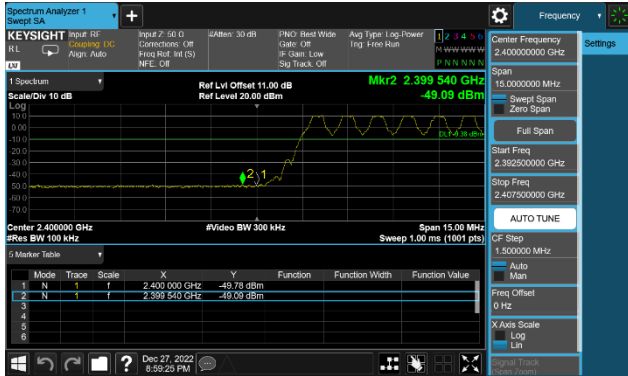

CH00 (2402MHz) 3-DH5(3Mbps)



CH78 (2480MHz) 3-DH5(3Mbps)

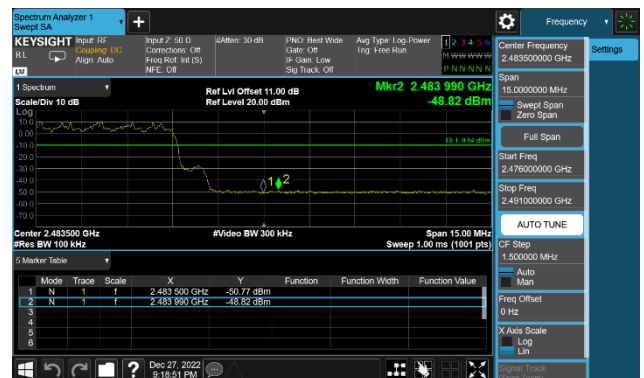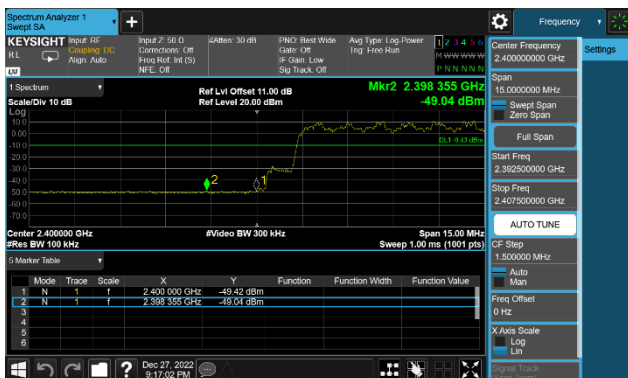

Band Edge With Hopping On_ Right Ear



CH00 (2402MHz) DH5(1Mbps)

CH78 (2480MHz) DH5(1Mbps)

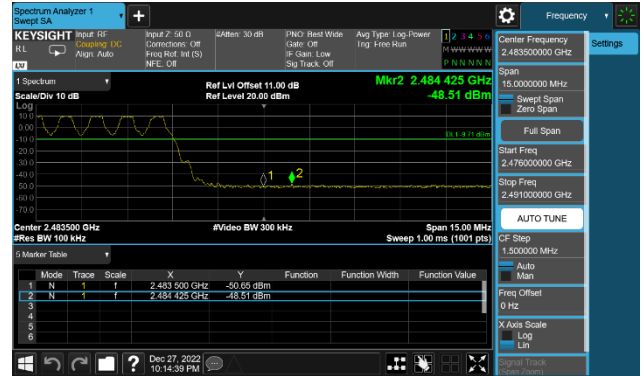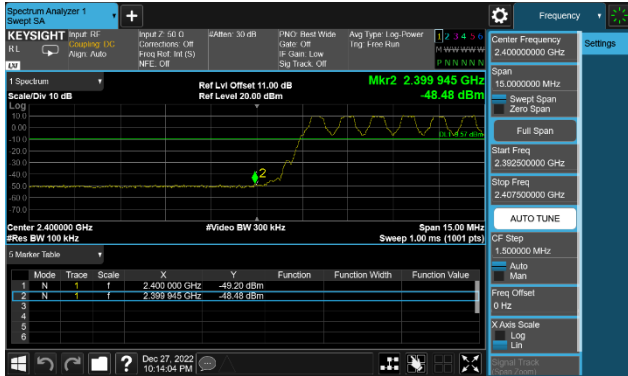

CH00 (2402MHz) 3-DH5(3Mbps)

CH78 (2480MHz) 3-DH5(3Mbps)

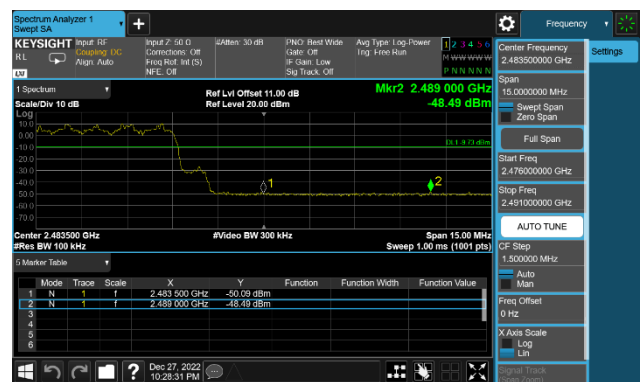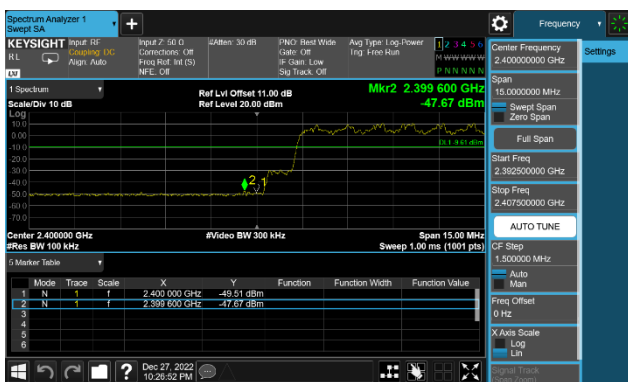

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.8.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

- Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 1MHz
- VBW $\geq 1/T$
- De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold
- Allow max hold to run for at least 50 times (1/duty cycle) traces

7.8.4. Test Setup


9kHz ~ 30MHz Test Setup:

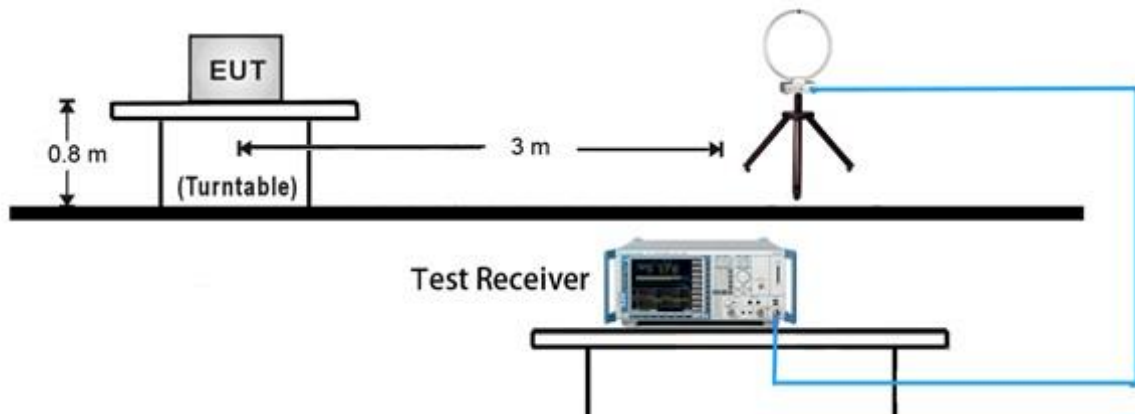


Note:

The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.


30MHz ~ 1GHz Test Setup:

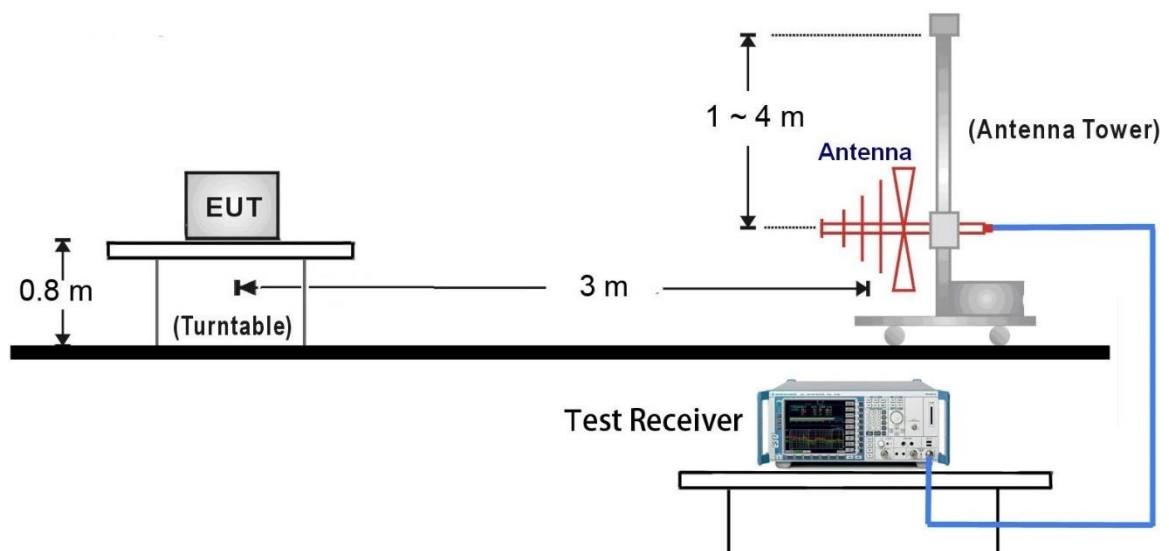

1GHz ~ 18GHz Test Setup:

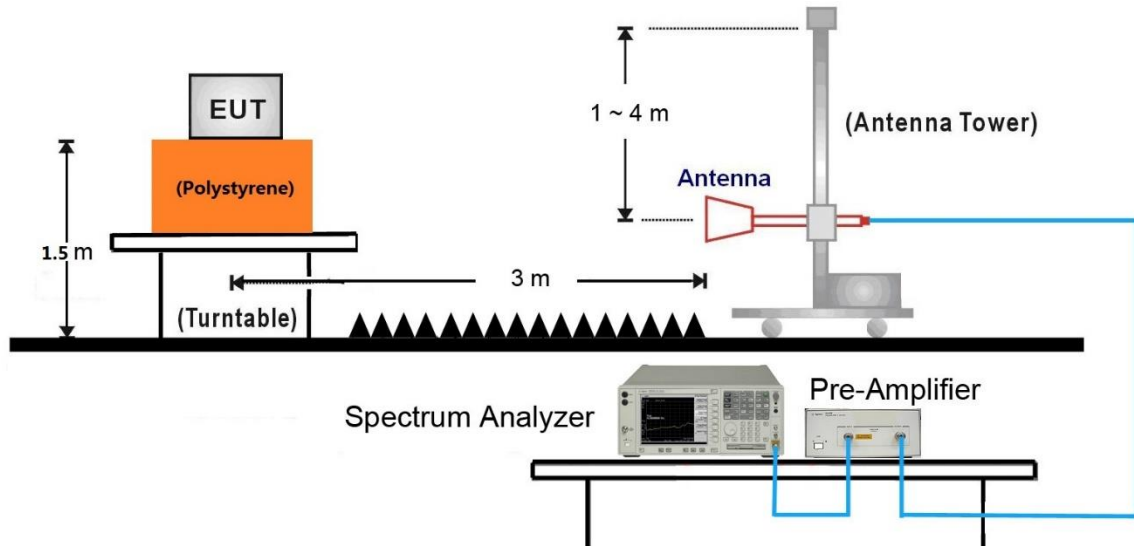


18GHz ~40GHz Test Setup:

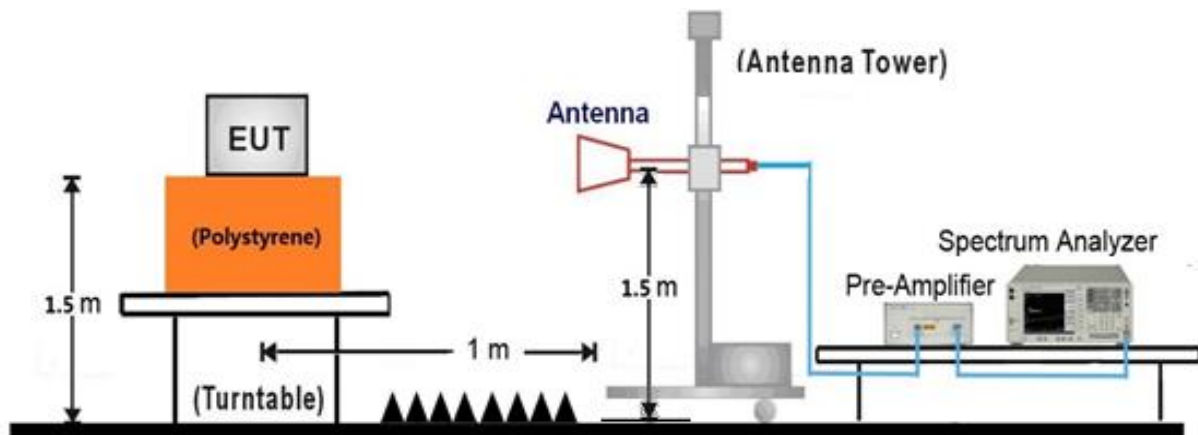

7.8.5. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	VULB 9162	Temp. / Humidity	24°C / 63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

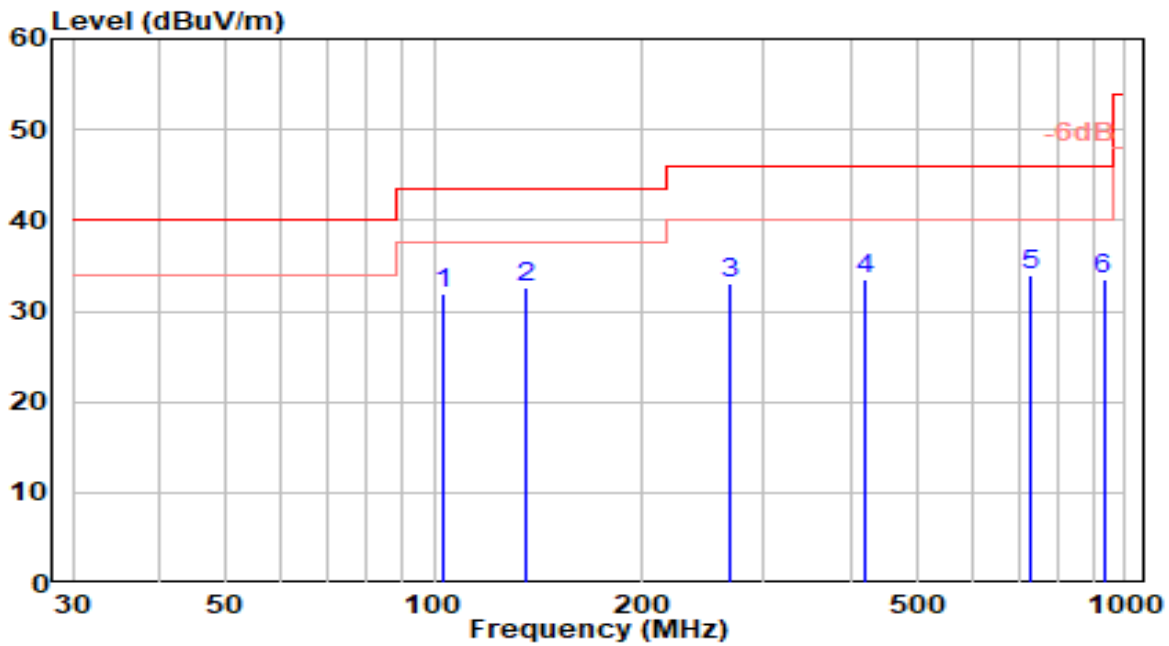


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	102.830	12.84	19.19	32.02	-11.48	43.50	100	123	QP
2	* 135.290	16.78	15.86	32.63	-10.87	43.50	200	316	QP
3	268.850	12.37	20.78	33.15	-12.85	46.00	150	82	QP
4	418.860	9.32	24.19	33.51	-12.49	46.00	100	2	QP
5	726.500	4.75	29.28	34.03	-11.97	46.00	100	146	QP
6	930.550	1.90	31.63	33.54	-12.46	46.00	100	25	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

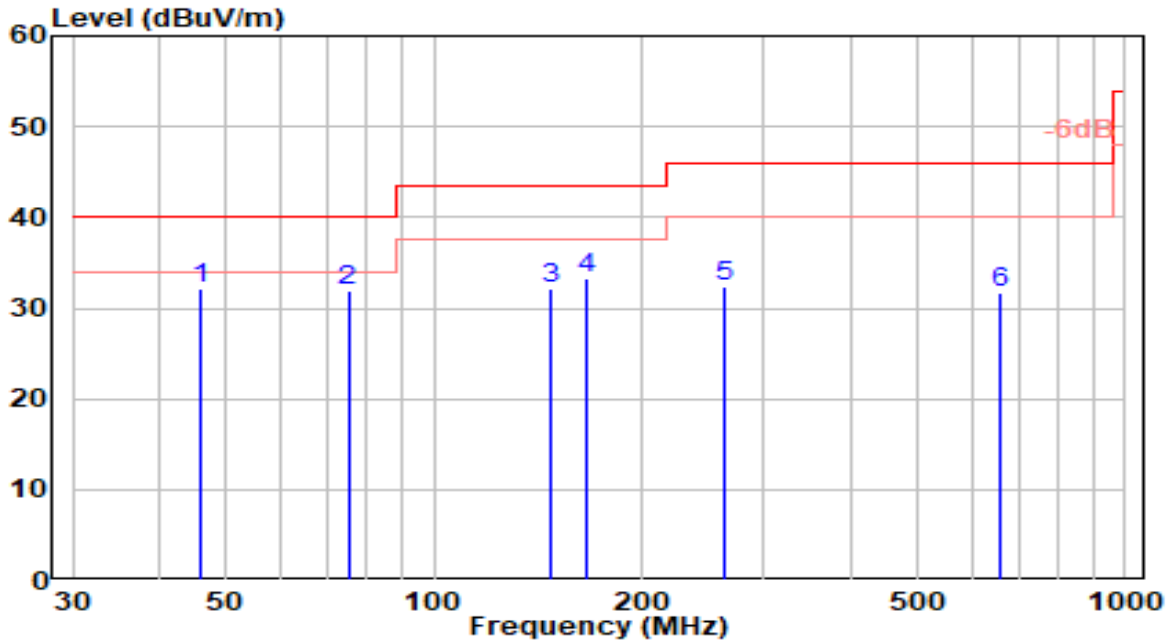


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	45.960	10.70	21.50	32.20	-7.80	40.00	100	82	QP
2		75.110	16.58	15.29	31.87	-8.13	40.00	150	130	QP
3		147.180	16.38	15.71	32.09	-11.41	43.50	100	96	QP
4		166.650	16.82	16.52	33.34	-10.16	43.50	150	105	QP
5		263.990	11.55	20.77	32.32	-13.68	46.00	200	178	QP
6		658.280	3.42	28.29	31.70	-14.30	46.00	200	84	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

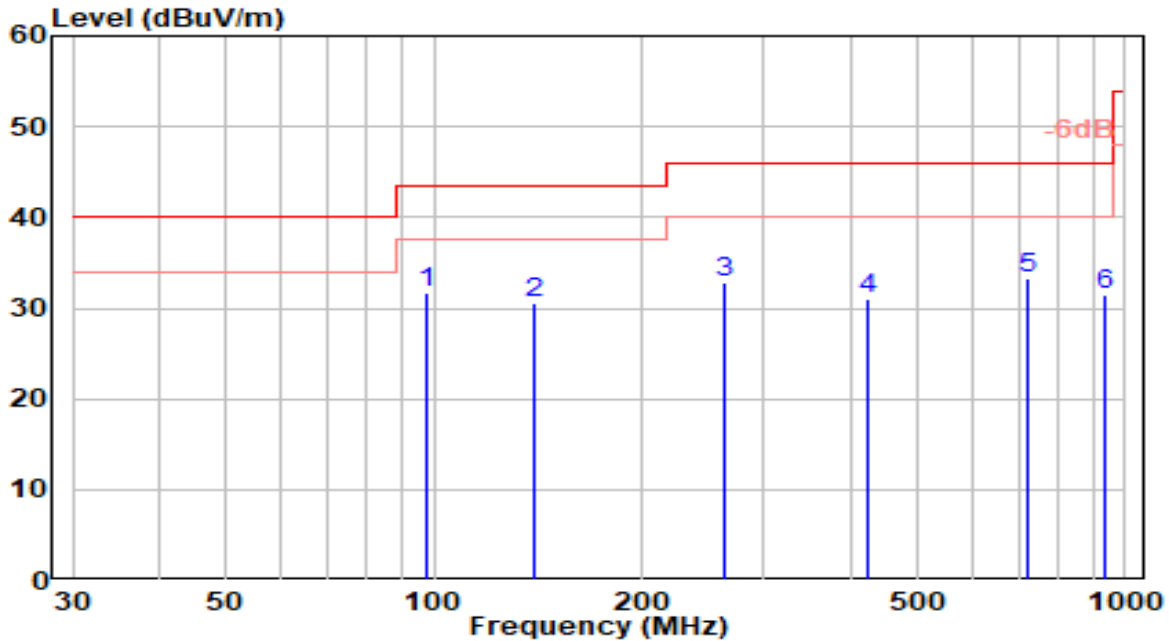


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 97.510	12.91	18.89	31.79	-11.71	43.50	100	95	QP
2	139.330	14.87	15.58	30.45	-13.05	43.50	150	288	QP
3	262.770	11.97	20.76	32.74	-13.26	46.00	100	54	QP
4	422.780	6.75	24.22	30.97	-15.03	46.00	200	334	QP
5	721.900	4.07	29.22	33.29	-12.71	46.00	150	118	QP
6	933.230	-0.24	31.63	31.40	-14.60	46.00	100	-3	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

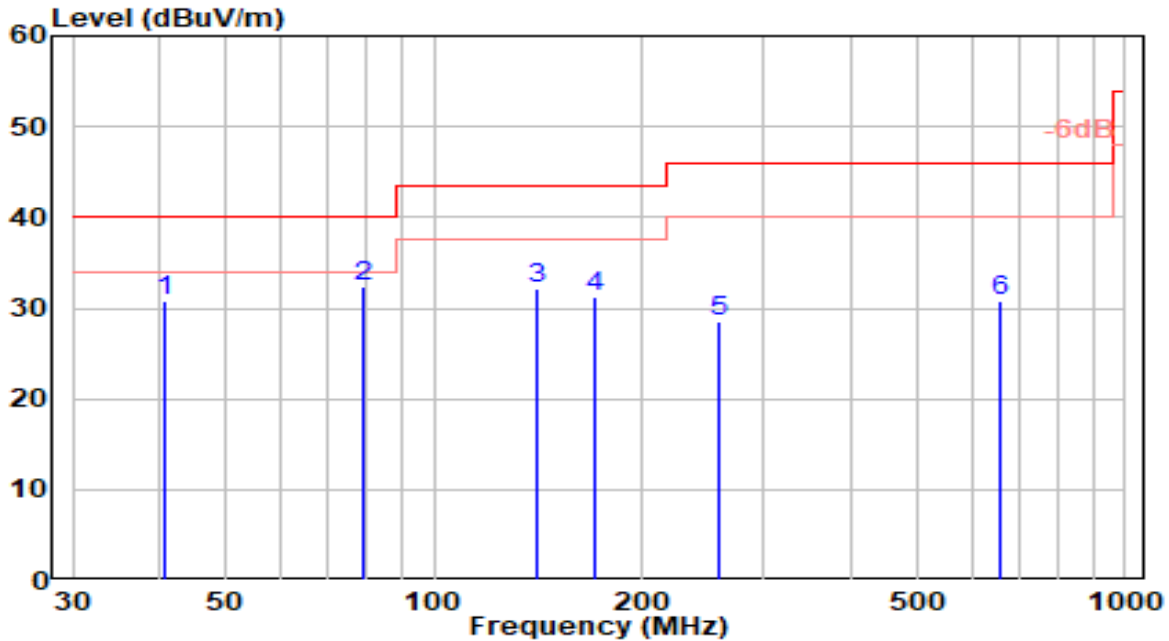


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	40.640	10.18	20.58	30.76	-9.24	40.00	200	68	QP
2	* 79.150	17.85	14.51	32.35	-7.65	40.00	100	116	QP
3	141.100	16.64	15.57	32.21	-11.29	43.50	150	82	QP
4	170.570	14.60	16.66	31.26	-12.24	43.50	100	91	QP
5	259.390	7.68	20.76	28.44	-17.56	46.00	200	164	QP
6	660.960	2.50	28.33	30.82	-15.18	46.00	200	70	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2023-01-13
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	BT_Left Ear+ Right Ear	Test Voltage	AC 120V/60Hz

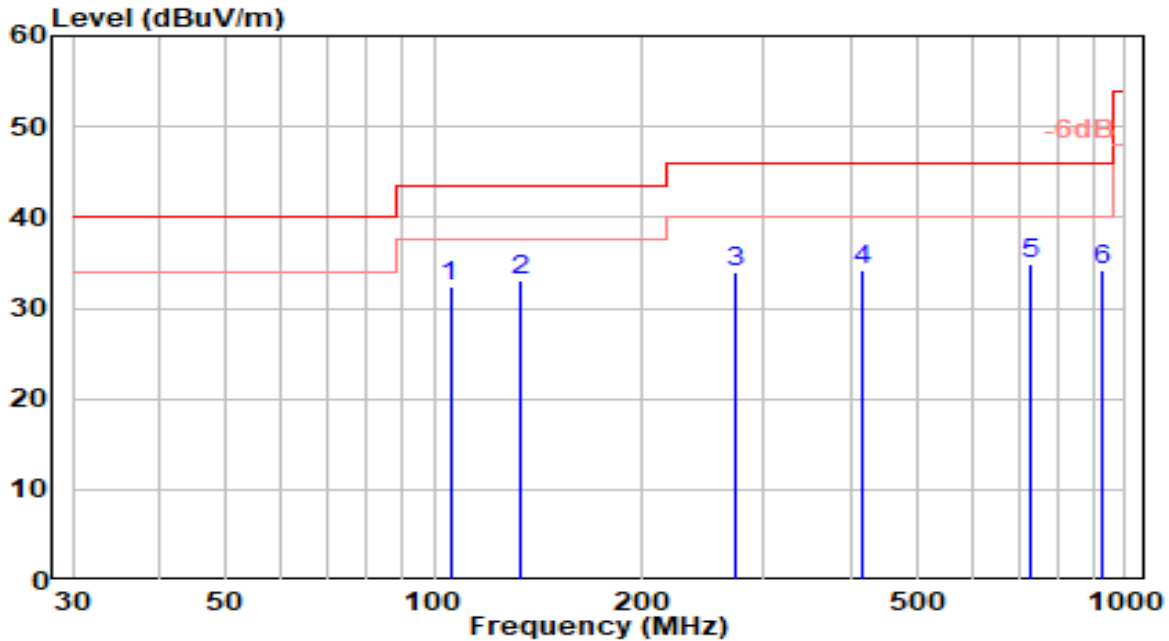


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	105.490	13.35	19.06	32.41	-11.09	43.50	100	137	QP
2	* 133.270	17.11	15.99	33.10	-10.40	43.50	150	330	QP
3	271.890	13.09	20.79	33.88	-12.12	46.00	200	96	QP
4	416.900	10.06	24.17	34.24	-11.76	46.00	100	16	QP
5	728.800	5.45	29.31	34.76	-11.24	46.00	100	160	QP
6	929.210	2.63	31.63	34.27	-11.73	46.00	200	39	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2023-01-13
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	BT_Left Ear+ Right Ear	Test Voltage	AC 120V/60Hz

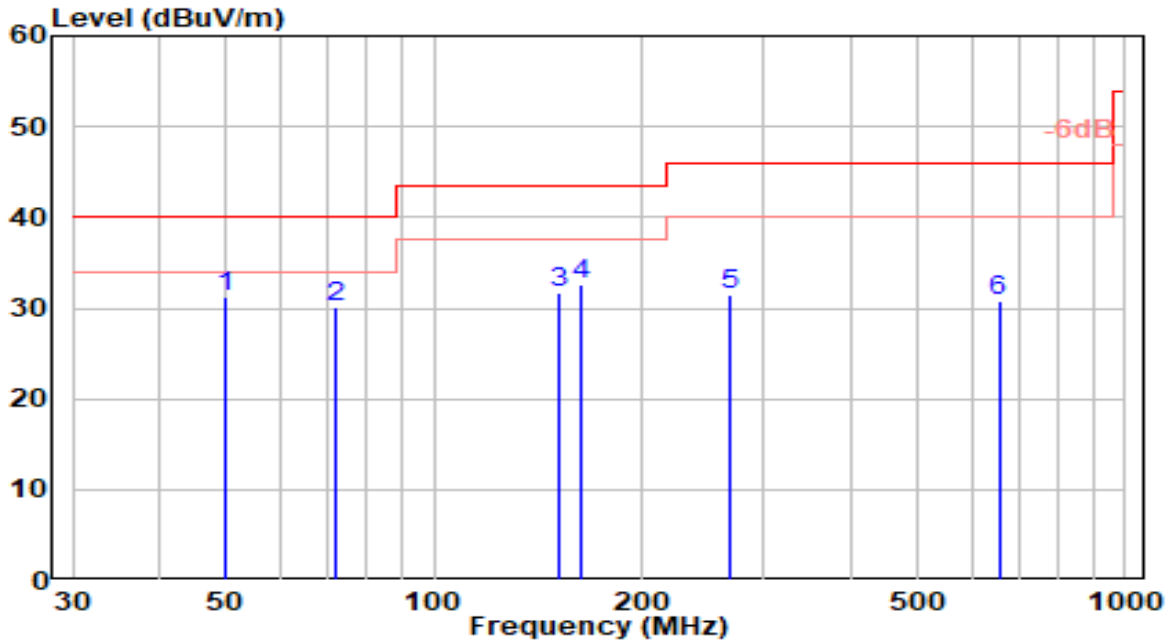


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 49.950	9.54	21.60	31.14	-8.86	40.00	100	110	QP
2	72.080	14.19	15.88	30.07	-9.93	40.00	150	158	QP
3	151.740	15.75	15.86	31.62	-11.88	43.50	100	124	QP
4	163.710	16.10	16.42	32.53	-10.97	43.50	150	133	QP
5	267.440	10.73	20.78	31.51	-14.49	46.00	200	206	QP
6	656.270	2.64	28.26	30.89	-15.11	46.00	200	112	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

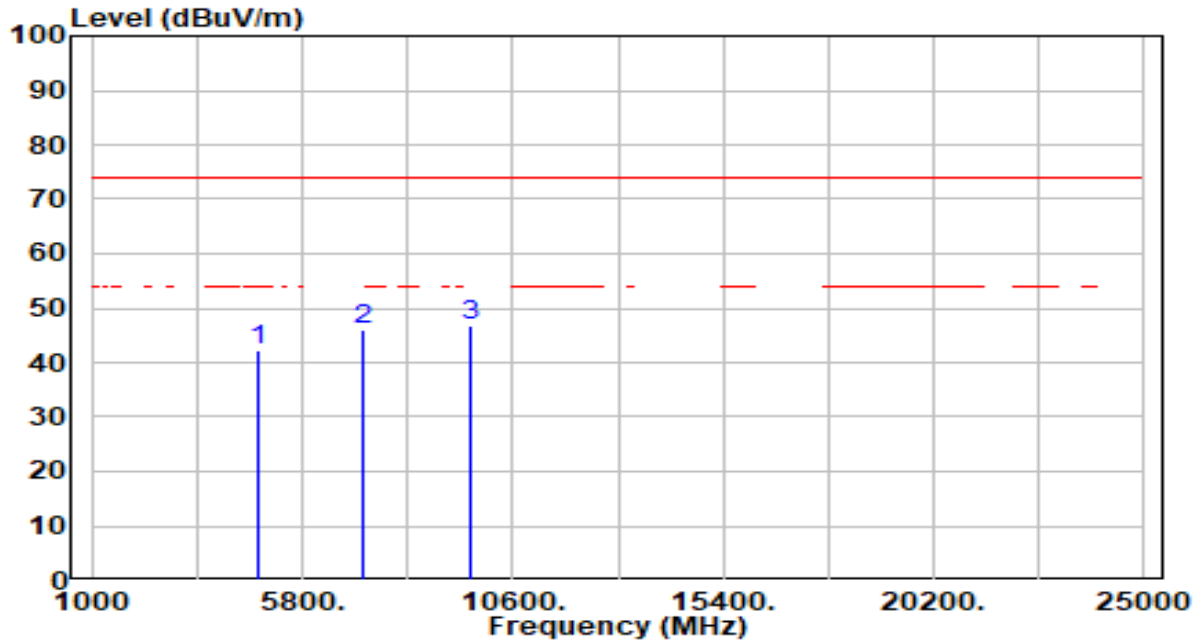


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	41.94	0.21	42.15	-31.85	74.00	100	50	Peak
2	7206.000	40.38	5.82	46.20	-27.80	74.00	100	0	Peak
3	* 9608.000	41.54	5.32	46.86	-27.14	74.00	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

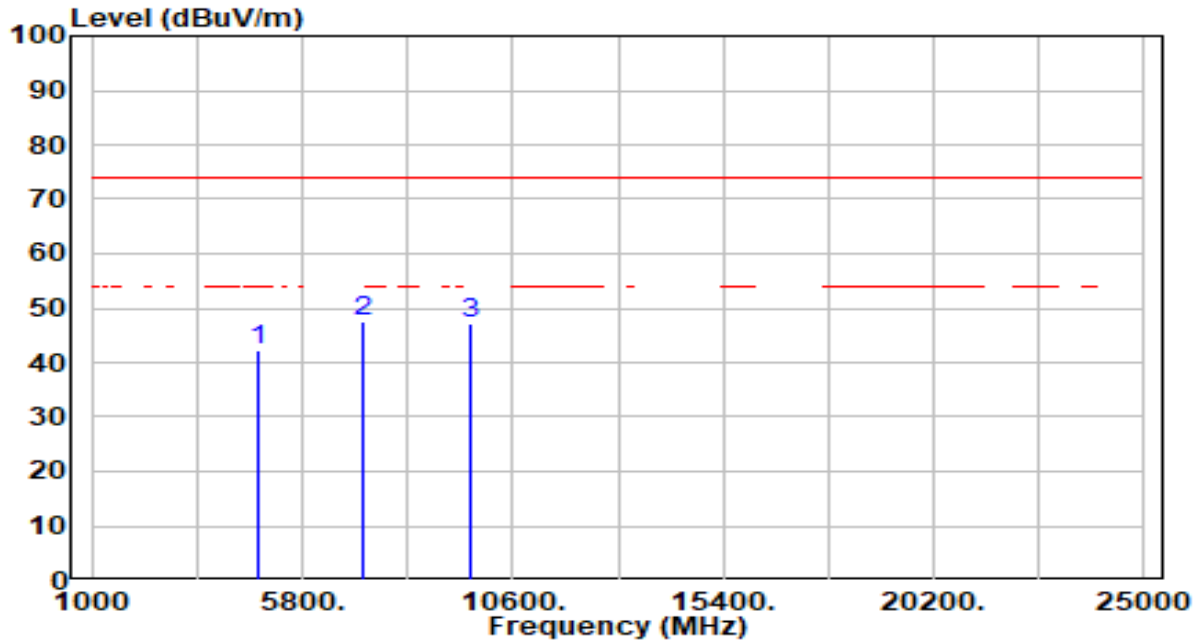


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	42.20	0.21	42.41	-31.59	74.00	100	142	Peak
2	* 7206.000	41.80	5.82	47.63	-26.37	74.00	100	0	Peak
3	9608.000	41.76	5.32	47.08	-26.92	74.00	100	151	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	By Notebook PC

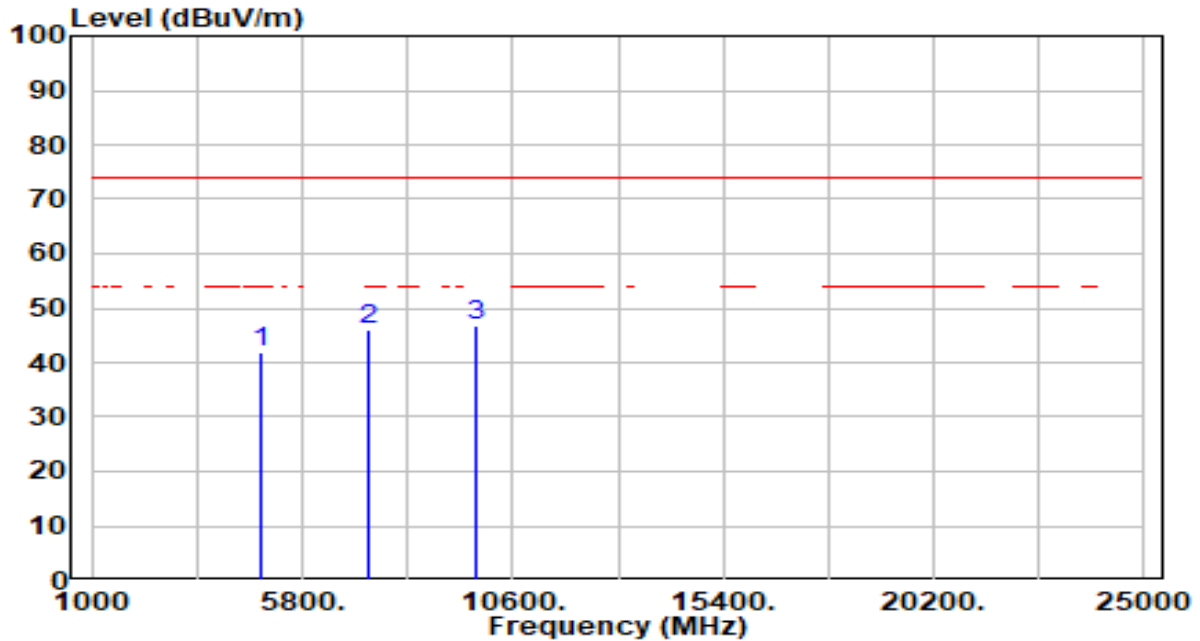


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	41.39	0.37	41.75	-32.25	74.00	300	160	Peak
2	7323.000	40.24	5.79	46.03	-27.97	74.00	200	34	Peak
3	* 9764.000	41.45	5.34	46.79	-27.21	74.00	300	109	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	By Notebook PC

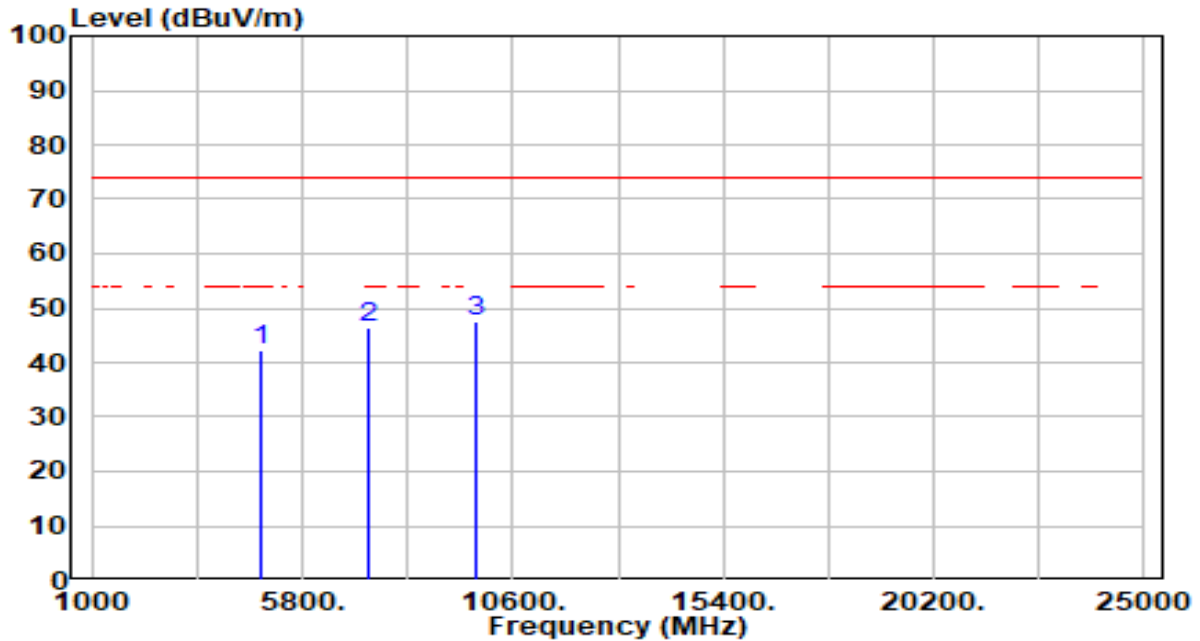


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	41.90	0.37	42.26	-31.74	74.00	200	72	Peak
2	7323.000	40.69	5.79	46.48	-27.52	74.00	200	231	Peak
3	* 9764.000	42.13	5.34	47.47	-26.53	74.00	300	65	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 78_Left Ear	Test Voltage	By Notebook PC

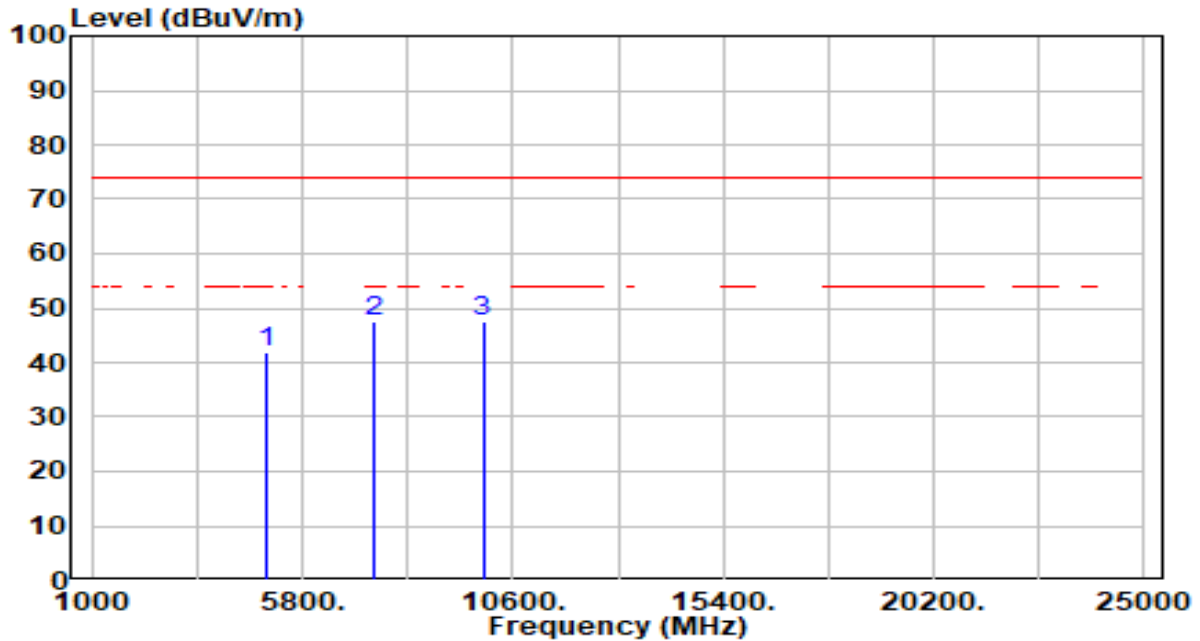


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	41.39	0.53	41.92	-32.08	74.00	100	205	Peak
2	7440.000	41.64	5.74	47.38	-26.62	74.00	100	157	Peak
3	* 9920.000	42.24	5.43	47.66	-26.34	74.00	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 78_Left Ear	Test Voltage	By Notebook PC

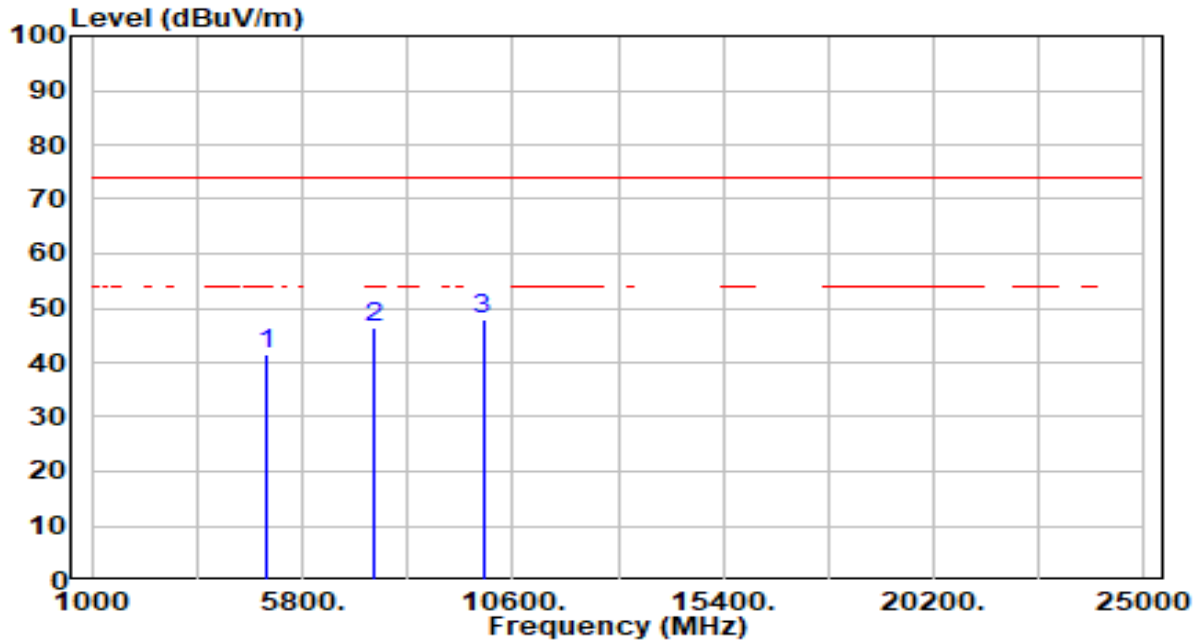


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	41.05	0.53	41.57	-32.43	74.00	100	83	Peak
2	7440.000	40.83	5.74	46.57	-27.43	74.00	100	95	Peak
3	* 9920.000	42.60	5.43	48.03	-25.97	74.00	100	180	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

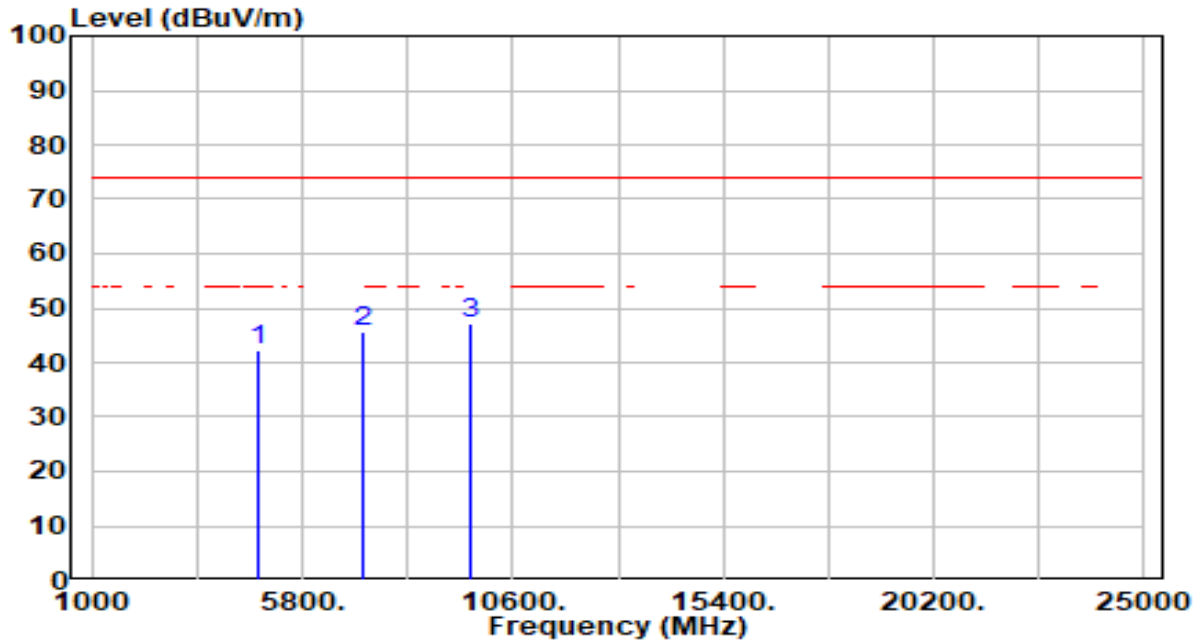


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	42.20	0.21	42.41	-31.59	74.00	100	57	Peak
2	7206.000	39.78	5.82	45.60	-28.40	74.00	100	7	Peak
3	* 9608.000	41.88	5.32	47.20	-26.80	74.00	100	287	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 0_Left Ear	Test Voltage	By Notebook PC

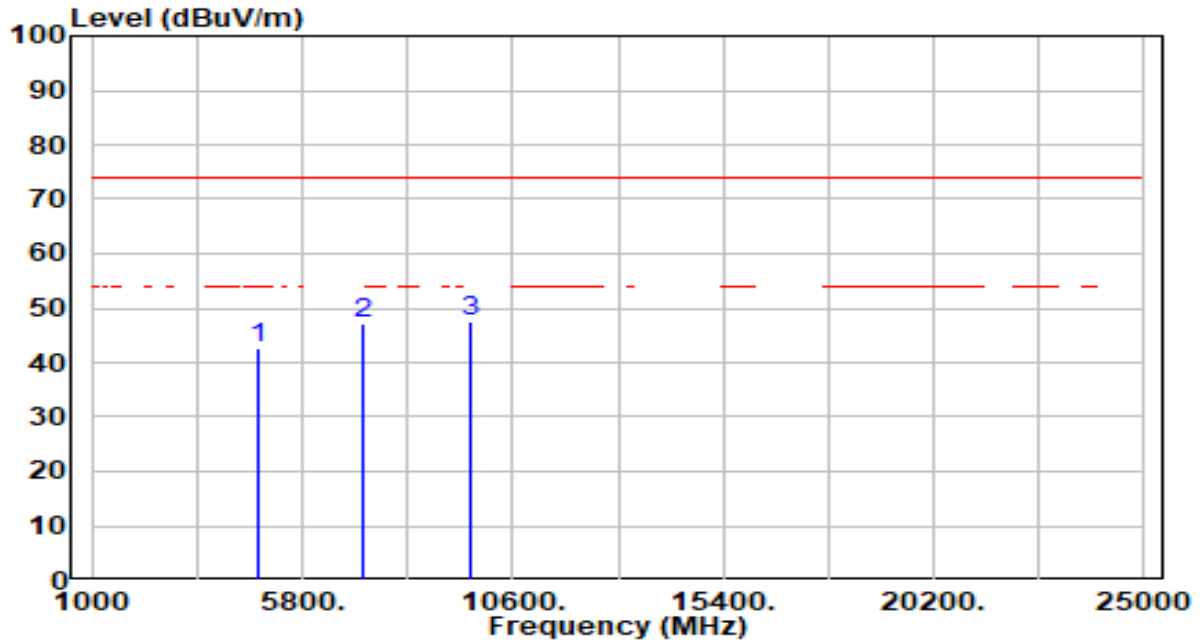


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	42.46	0.21	42.67	-31.33	74.00	100	149	Peak
2	7206.000	41.20	5.82	47.03	-26.97	74.00	100	7	Peak
3	* 9608.000	42.10	5.32	47.42	-26.58	74.00	100	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 39_Left Ear	Test Voltage	By Notebook PC

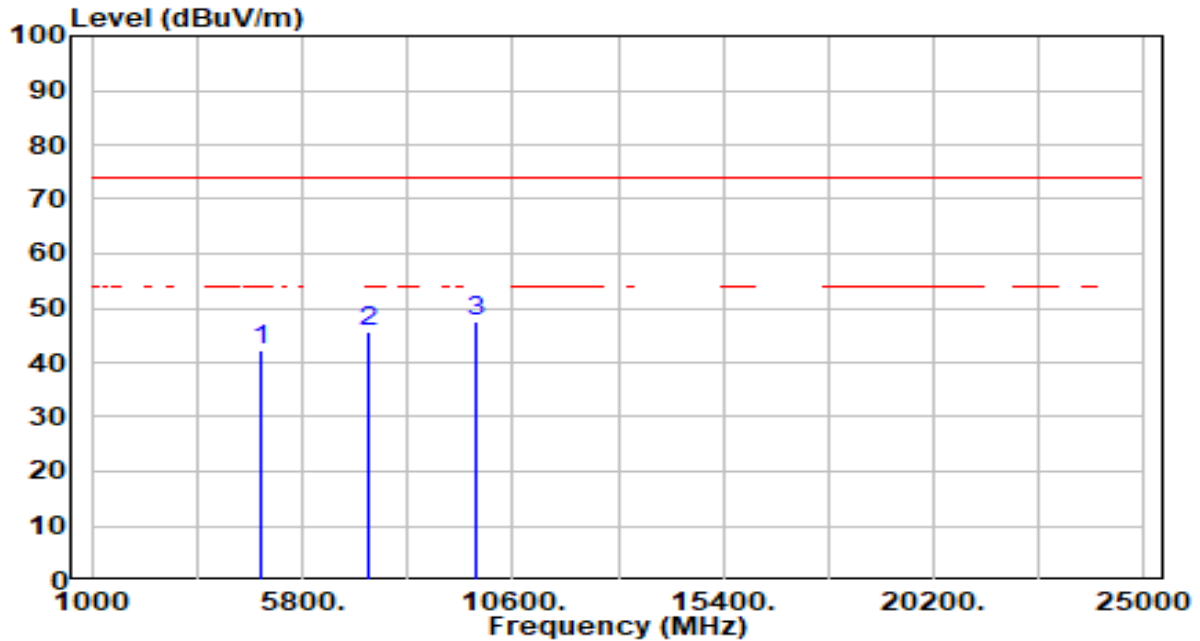


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	41.91	0.37	42.27	-31.73	74.00	100	182	Peak
2	7323.000	39.90	5.79	45.69	-28.31	74.00	100	56	Peak
3	* 9764.000	42.05	5.34	47.39	-26.61	74.00	100	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 39_Left Ear	Test Voltage	By Notebook PC

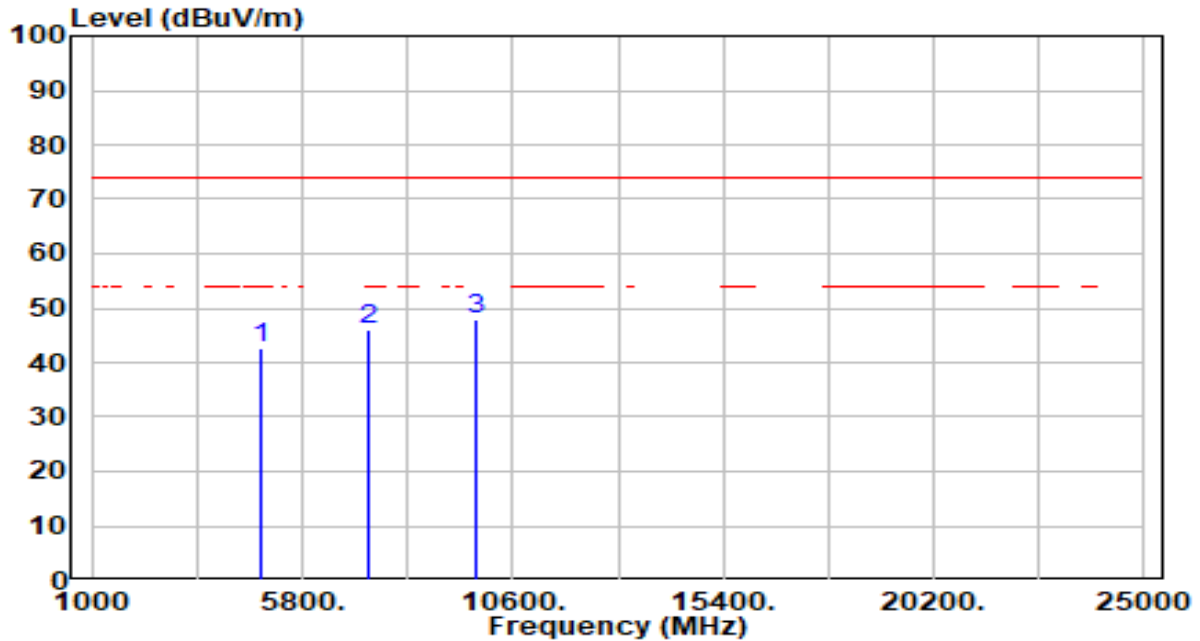


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	42.33	0.37	42.69	-31.31	74.00	200	87	Peak
2	7323.000	40.22	5.79	46.01	-27.99	74.00	200	246	Peak
3	* 9764.000	42.47	5.34	47.81	-26.19	74.00	300	80	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 78_Left Ear	Test Voltage	By Notebook PC

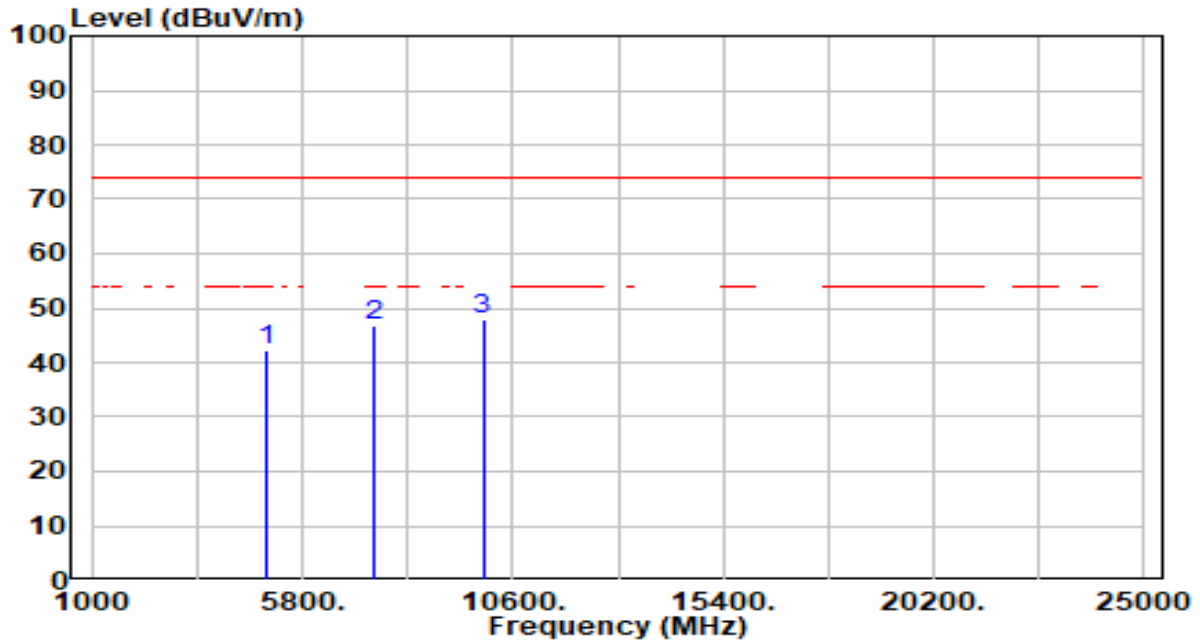


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	41.82	0.53	42.35	-31.65	74.00	100	220	Peak
2	7440.000	41.17	5.74	46.91	-27.09	74.00	100	172	Peak
3	* 9920.000	42.58	5.43	48.00	-26.00	74.00	100	80	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 78_Left Ear	Test Voltage	By Notebook PC

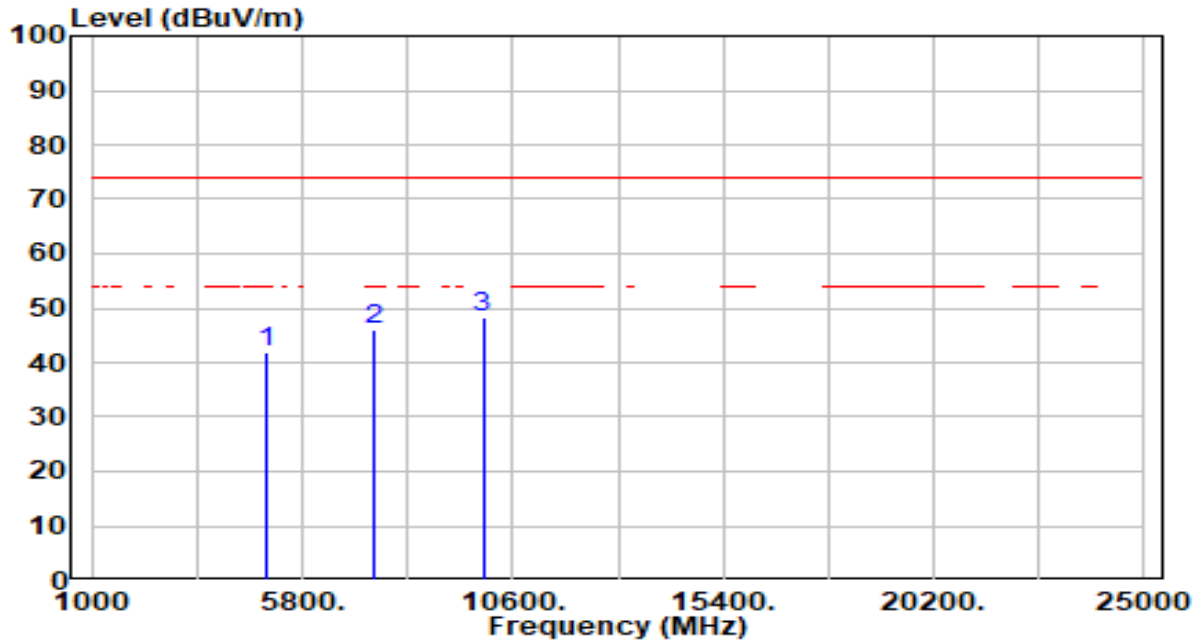


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	41.48	0.53	42.00	-32.00	74.00	100	98	Peak
2	7440.000	40.36	5.74	46.10	-27.90	74.00	100	110	Peak
3	* 9920.000	42.94	5.43	48.37	-25.63	74.00	100	195	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

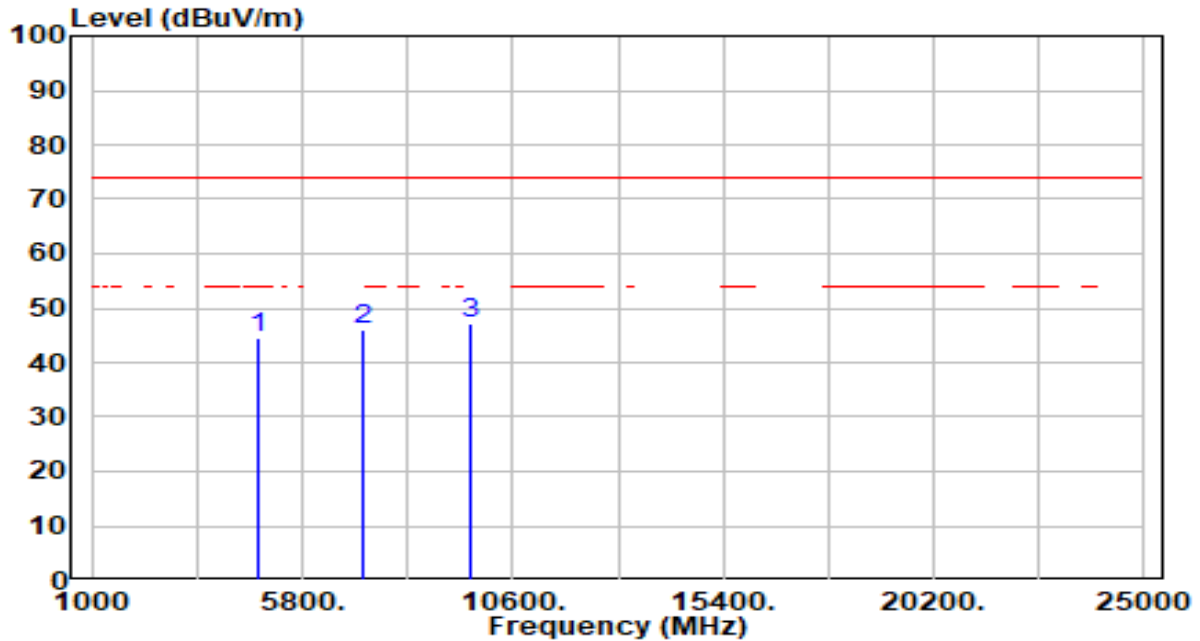


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	44.44	0.21	44.65	-29.35	74.00	100	178	Peak
2	7206.000	40.27	5.82	46.09	-27.91	74.00	100	360	Peak
3	* 9608.000	41.99	5.32	47.31	-26.69	74.00	100	57	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

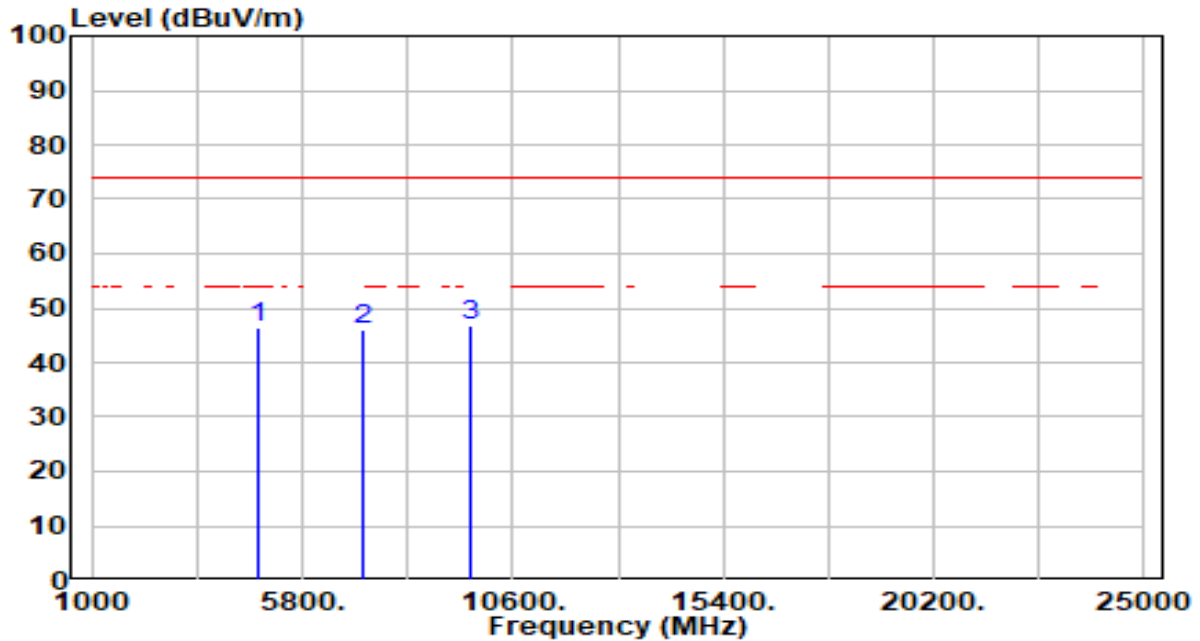


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	46.20	0.21	46.41	-27.59	74.00	200	251	Peak
2	7206.000	40.33	5.82	46.15	-27.85	74.00	200	283	Peak
3	* 9608.000	41.50	5.32	46.82	-27.18	74.00	300	246	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	By Notebook PC

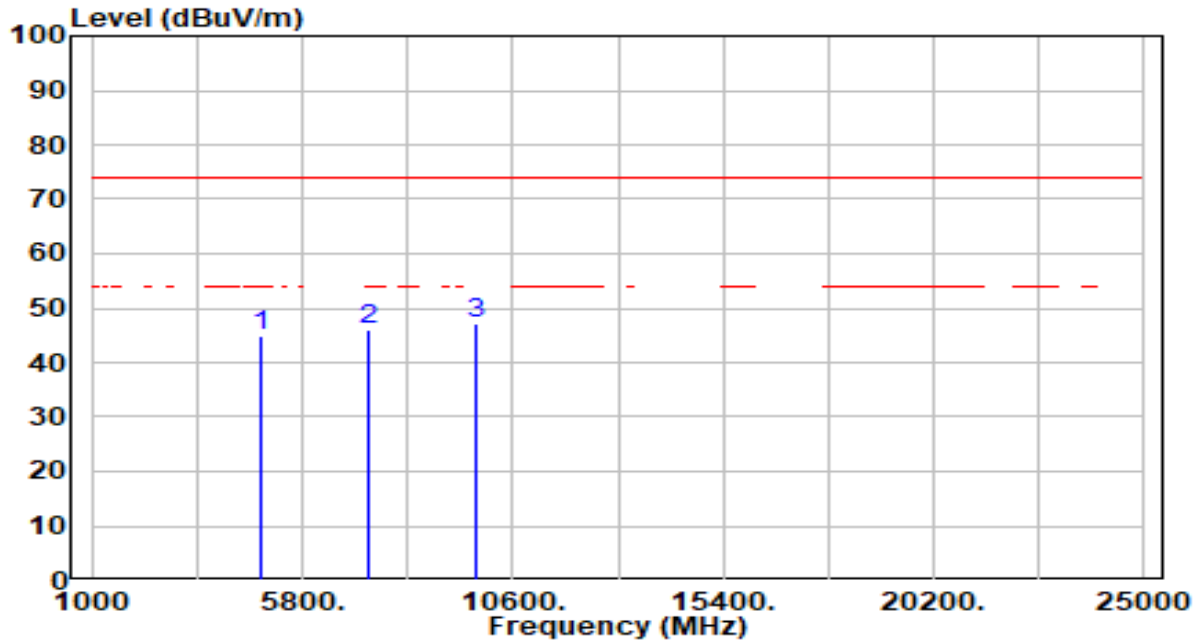


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	44.60	0.37	44.97	-29.03	74.00	100	360	Peak
2	7323.000	40.12	5.79	45.91	-28.09	74.00	100	360	Peak
3	* 9764.000	41.76	5.34	47.11	-26.89	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	By Notebook PC

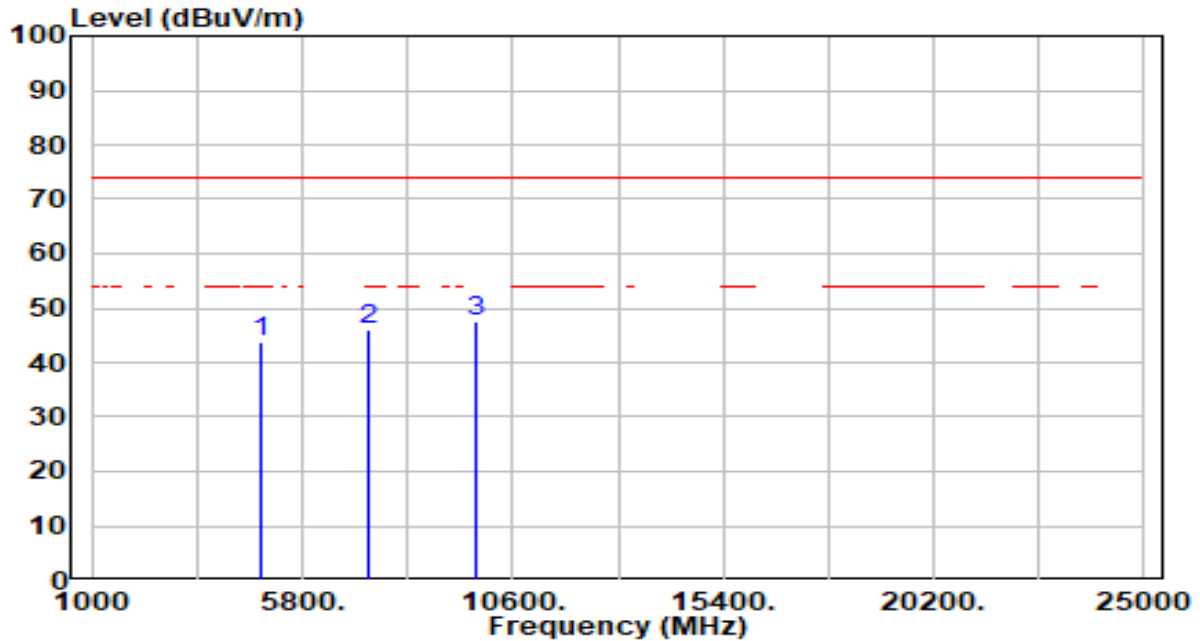


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	43.23	0.37	43.60	-30.40	74.00	100	215	Peak
2	7323.000	40.17	5.79	45.96	-28.04	74.00	100	331	Peak
3	* 9764.000	42.04	5.34	47.38	-26.62	74.00	100	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 78_Right Ear	Test Voltage	By Notebook PC

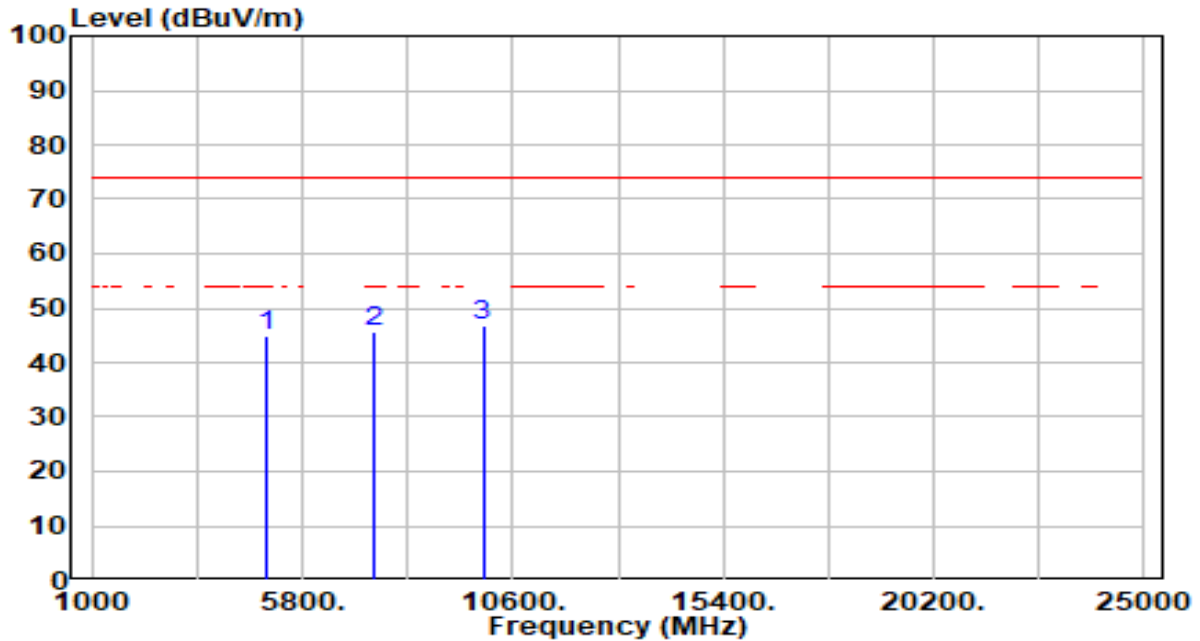


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	44.37	0.53	44.90	-29.10	74.00	100	11	Peak
2	7440.000	40.07	5.74	45.80	-28.20	74.00	100	8	Peak
3	* 9920.000	41.25	5.43	46.68	-27.32	74.00	100	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_DH5_CH 78_Right Ear	Test Voltage	By Notebook PC

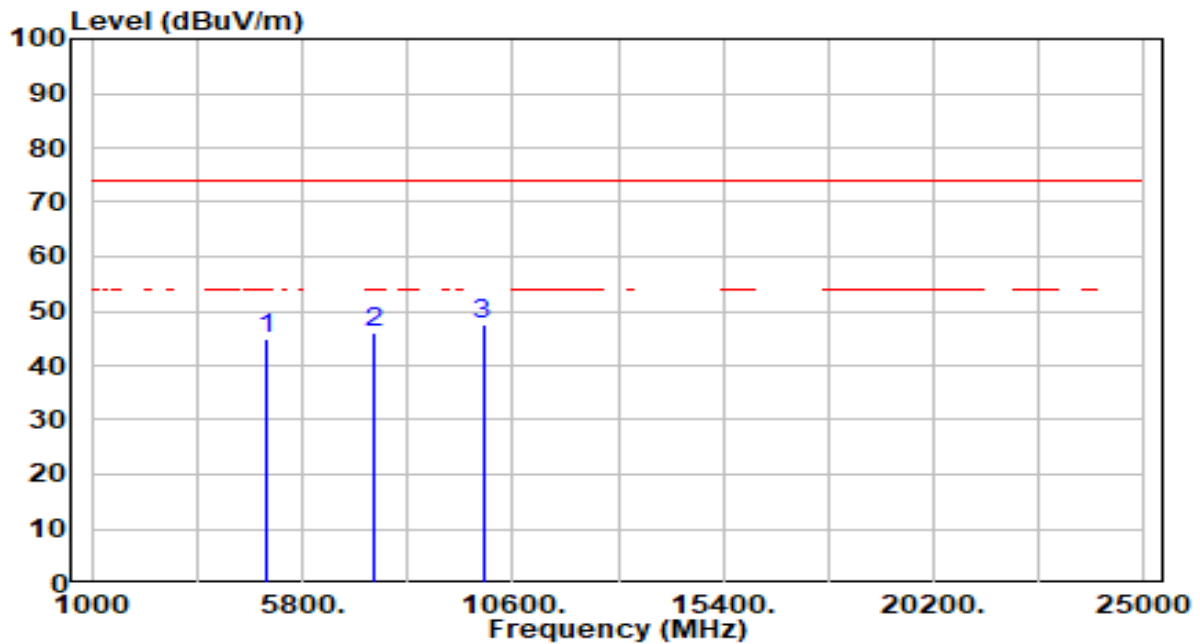


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	44.21	0.53	44.73	-29.27	74.00	100	217	Peak
2	7440.000	40.14	5.74	45.87	-28.13	74.00	100	360	Peak
3	* 9920.000	42.25	5.43	47.67	-26.33	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

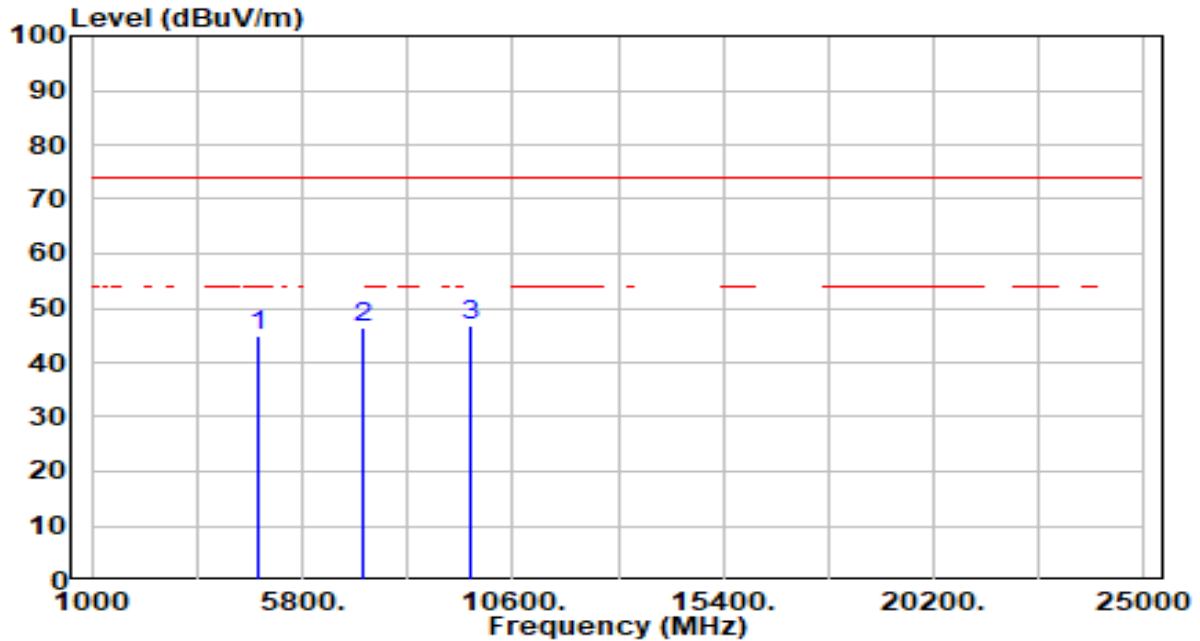


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	44.67	0.21	44.88	-29.12	74.00	100	12	Peak
2	7206.000	40.54	5.82	46.36	-27.64	74.00	100	262	Peak
3	* 9608.000	41.42	5.32	46.74	-27.26	74.00	100	338	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 0_Right Ear	Test Voltage	By Notebook PC

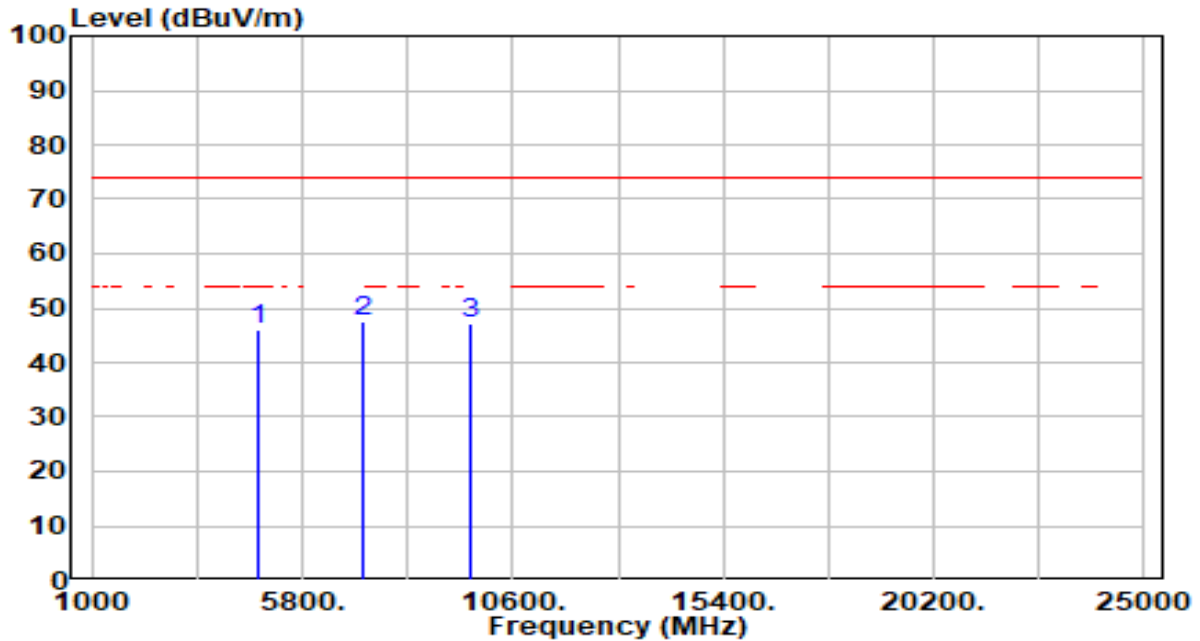


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	45.85	0.21	46.06	-27.94	74.00	100	337	Peak
2	* 7206.000	41.91	5.82	47.73	-26.27	74.00	100	319	Peak
3	9608.000	41.97	5.32	47.28	-26.72	74.00	100	12	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 39_Right Ear	Test Voltage	By Notebook PC

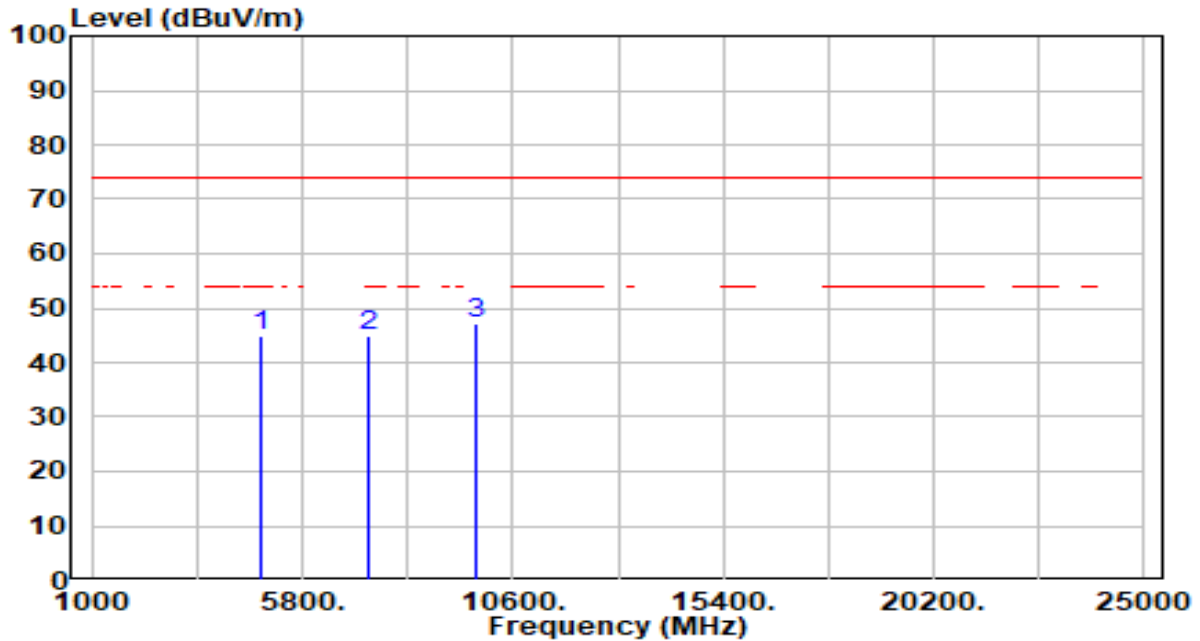


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	44.49	0.37	44.86	-29.14	74.00	100	14	Peak
2	7323.000	39.11	5.79	44.90	-29.10	74.00	100	199	Peak
3	* 9764.000	41.97	5.34	47.32	-26.68	74.00	100	294	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 39_Right Ear	Test Voltage	By Notebook PC

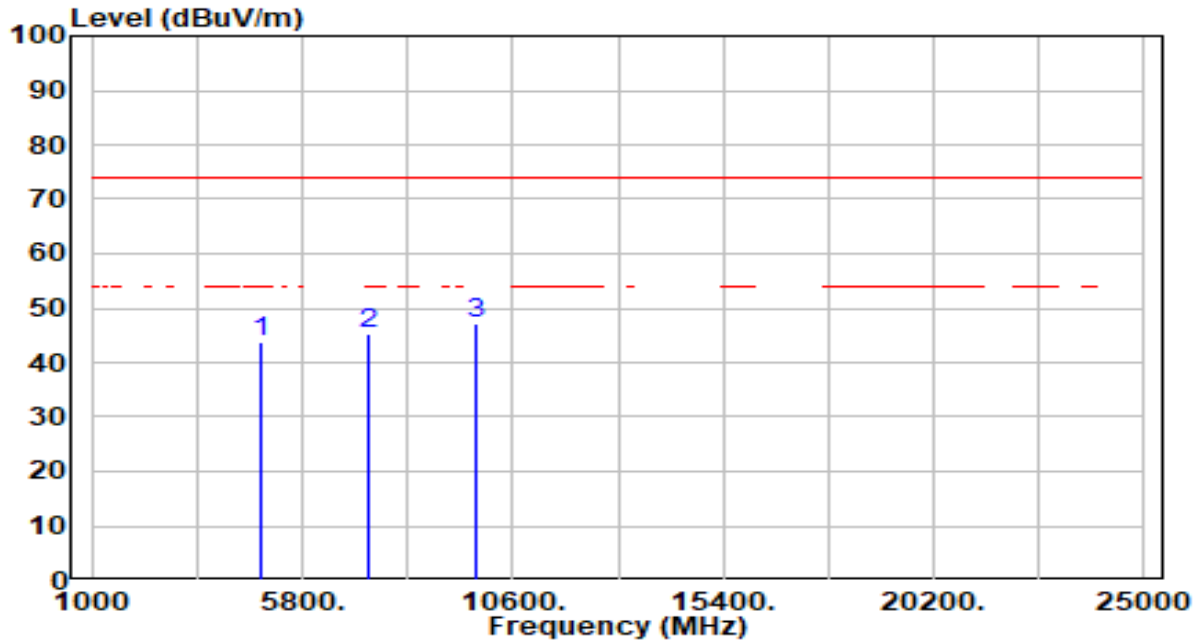


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	43.22	0.37	43.59	-30.41	74.00	100	271	Peak
2	7323.000	39.38	5.79	45.17	-28.83	74.00	100	304	Peak
3	* 9764.000	41.88	5.34	47.22	-26.78	74.00	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 78_Right Ear	Test Voltage	By Notebook PC

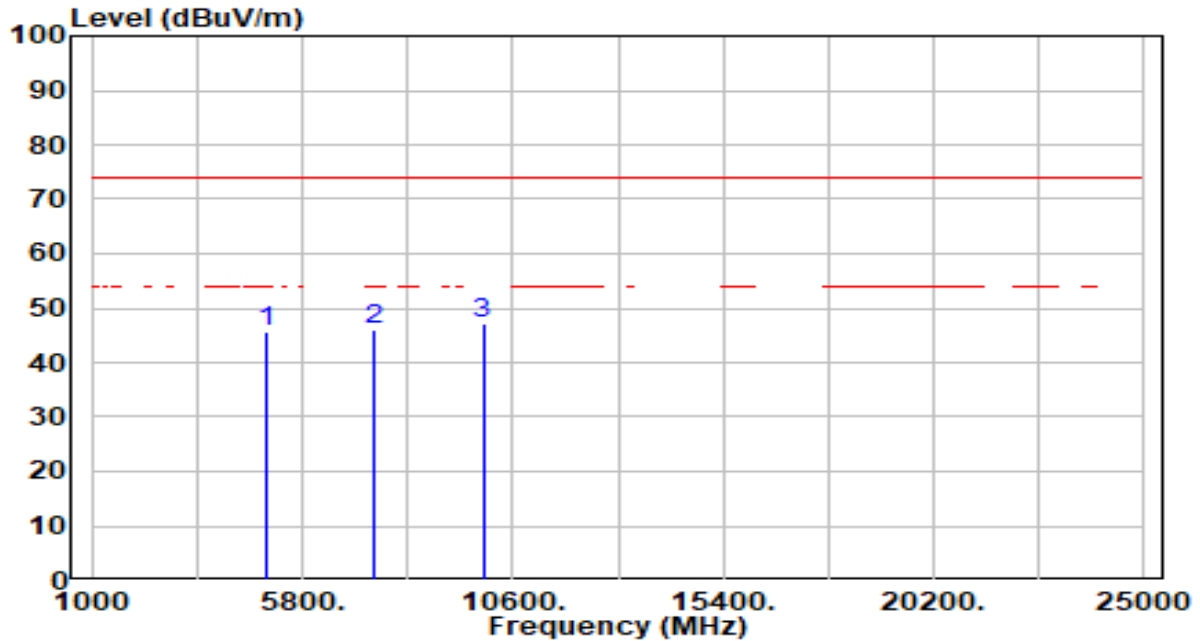


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	45.06	0.53	45.59	-28.41	74.00	100	29	Peak
2	7440.000	40.49	5.74	46.22	-27.78	74.00	100	72	Peak
3	* 9920.000	41.64	5.43	47.07	-26.93	74.00	100	312	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BT_TX_3DH5_CH 78_Right Ear	Test Voltage	By Notebook PC

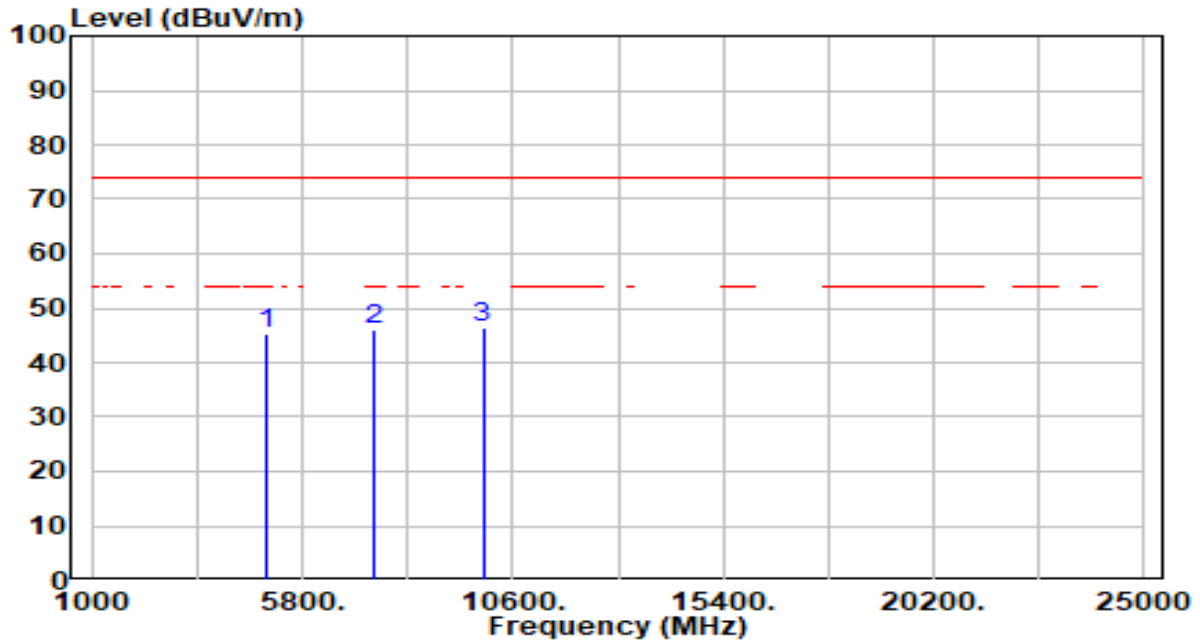


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	44.65	0.53	45.17	-28.83	74.00	100	224	Peak
2	7440.000	40.14	5.74	45.88	-28.12	74.00	100	159	Peak
3	* 9920.000	41.06	5.43	46.48	-27.52	74.00	100	233	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2023-01-13
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	BT _Left Ear + Right Ear	Test Voltage	AC 120V/60Hz

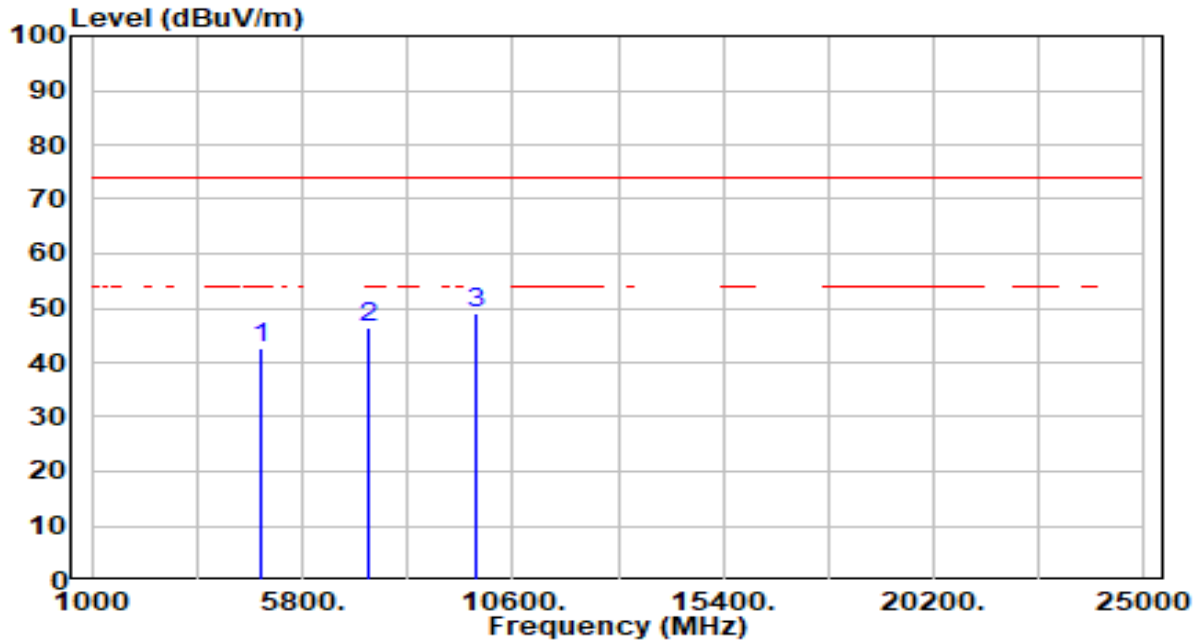


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	42.17	0.37	42.54	-31.46	74.00	100	196	Peak
2	7323.000	40.65	5.79	46.44	-27.56	74.00	100	70	Peak
3	* 9764.000	43.89	5.34	49.23	-24.77	74.00	100	145	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2023-01-13
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	BT _Left Ear + Right Ear	Test Voltage	AC 120V/60Hz

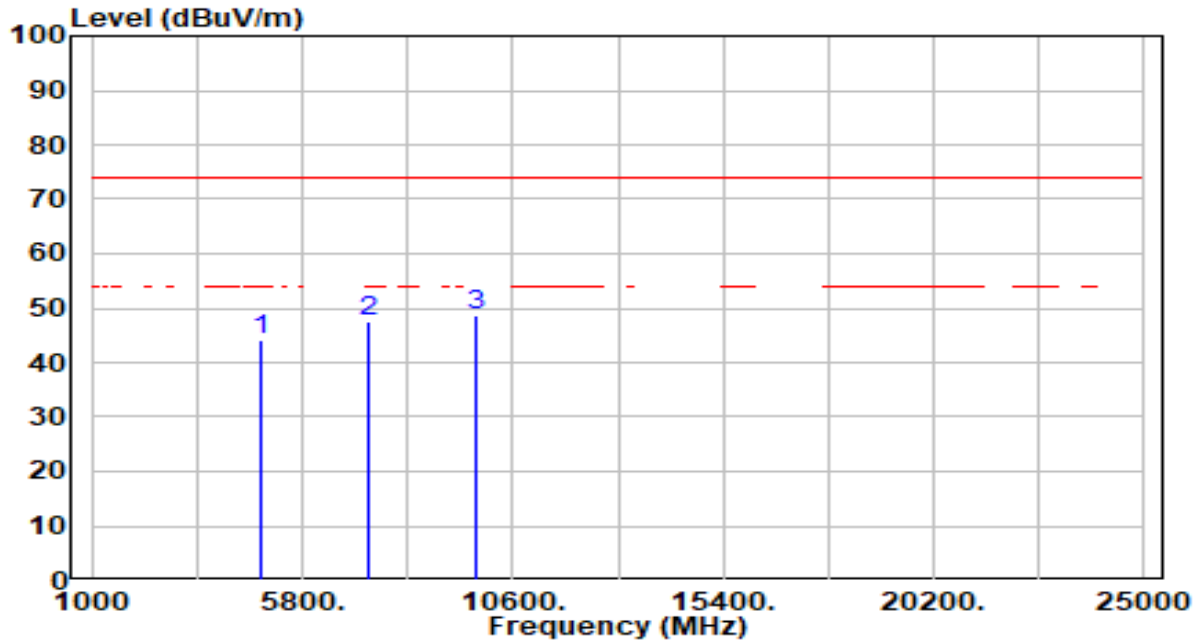

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	43.66	0.37	44.03	-29.97	74.00	200	87	Peak
2	7323.000	41.83	5.79	47.62	-26.38	74.00	200	246	Peak
3	* 9764.000	43.37	5.34	48.71	-25.29	74.00	300	80	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.9.3. Test Setting

Peak Field Strength Measurements

8. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
9. RBW = as specified in Table 1
10. VBW = 3 * RBW
11. Detector = peak
12. Sweep time = auto couple
13. Trace mode = max hold
14. Trace was allowed to stabilize