

Table 1 - RBW as a function of frequency


| Frequency | RBW |
|---------------|---------------|
| 9 ~ 150 kHz | 200 ~ 300 Hz |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz | 1 MHz |

Average Field Strength Measurements


9. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
10. RBW = 1MHz
11. VBW $\geq 1/T$
12. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
13. Detector = Peak
14. Sweep time = auto
15. Trace mode = max hold
16. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup

1GHz ~ 18GHz Test Setup:

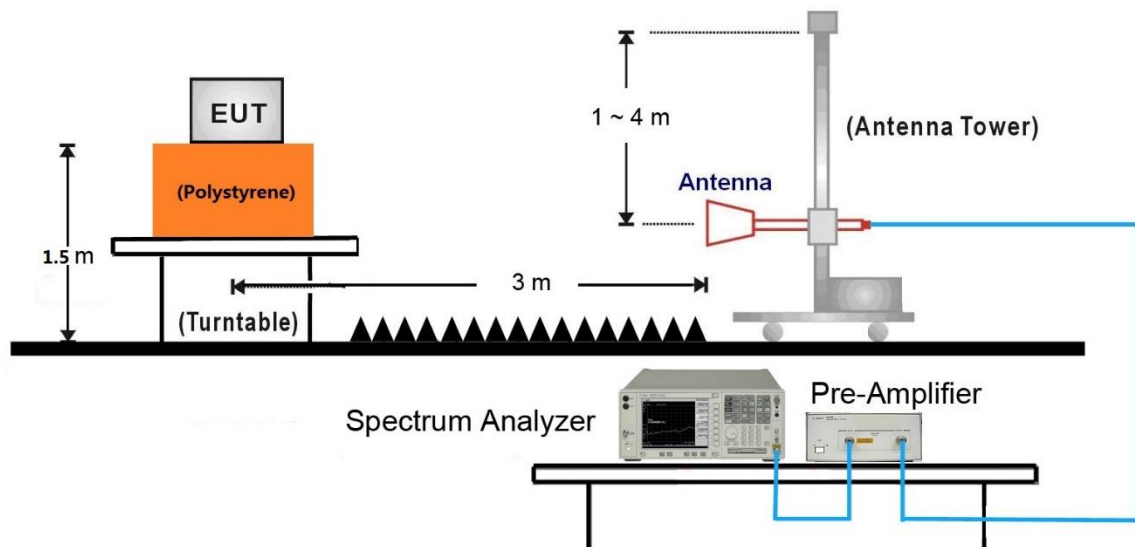


18GHz ~40GHz Test Setup:

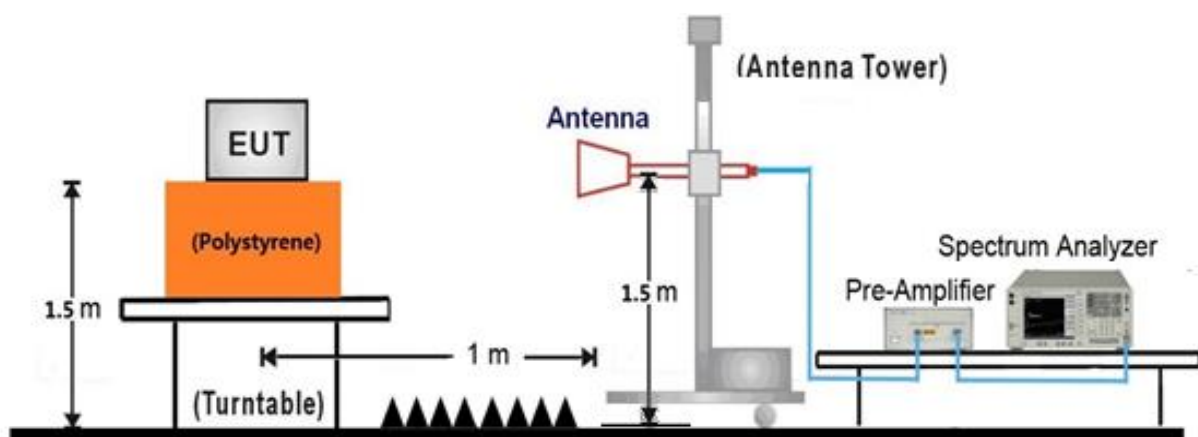

7.9.5. Test Result

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_DH5_CH 0_Left Ear | Test Voltage | By Notebook PC |

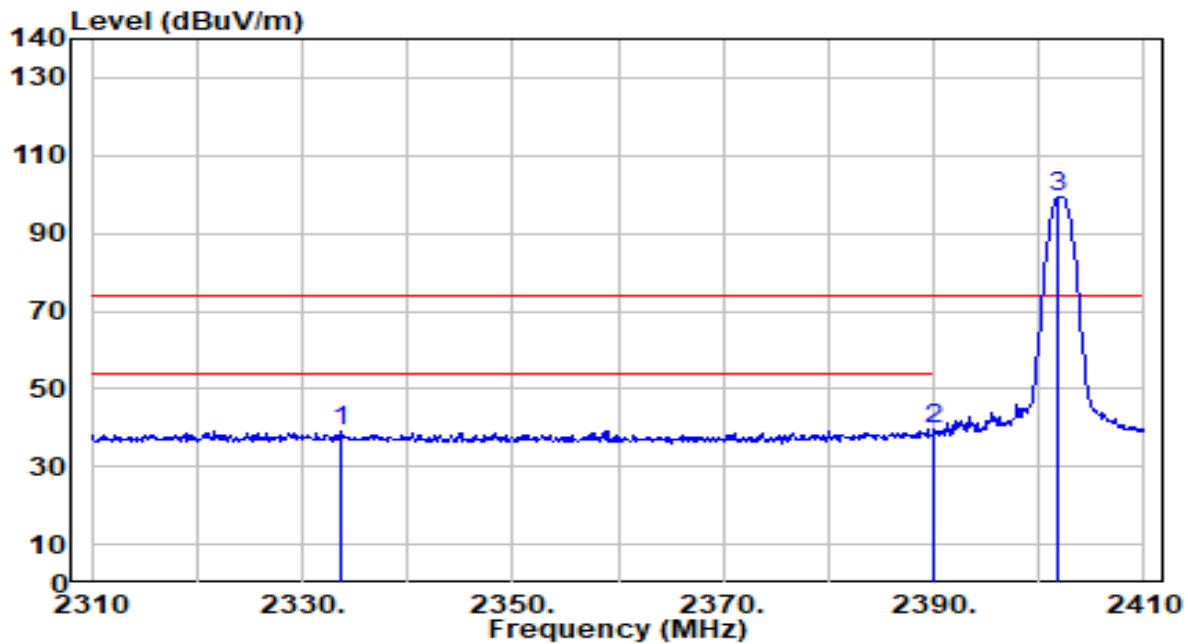


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2333.600 | 44.32 | -5.02 | 39.30 | -34.70 | 74.00 | 117 | 288 | Peak |
| 2 | * 2390.000 | 44.44 | -5.00 | 39.44 | -34.56 | 74.00 | 117 | 288 | Peak |
| 3 | 2401.900 | 104.43 | -4.99 | 99.44 | N/A | N/A | 117 | 288 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_DH5_CH 0_Left Ear | Test Voltage | By Notebook PC |

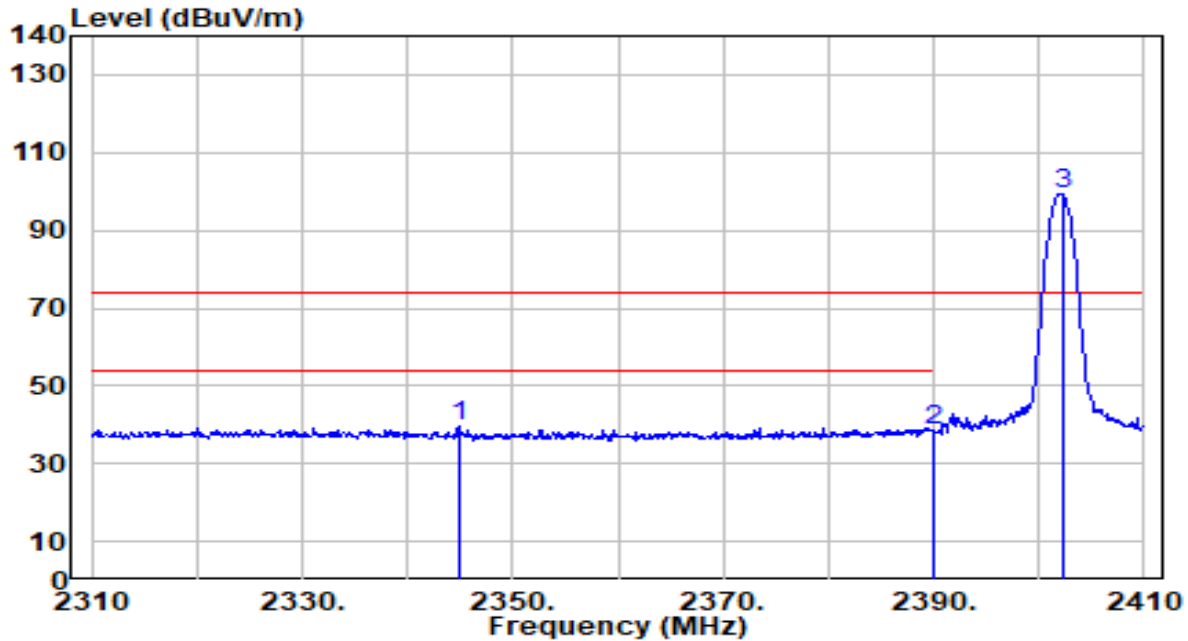


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2344.900 | 44.59 | -5.02 | 39.58 | -34.42 | 74.00 | 100 | 4 | Peak |
| 2 | 2390.000 | 43.68 | -5.00 | 38.68 | -35.32 | 74.00 | 100 | 4 | Peak |
| 3 | 2402.200 | 104.13 | -4.99 | 99.14 | N/A | N/A | 100 | 4 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_DH5_CH 78_Left Ear | Test Voltage | By Notebook PC |

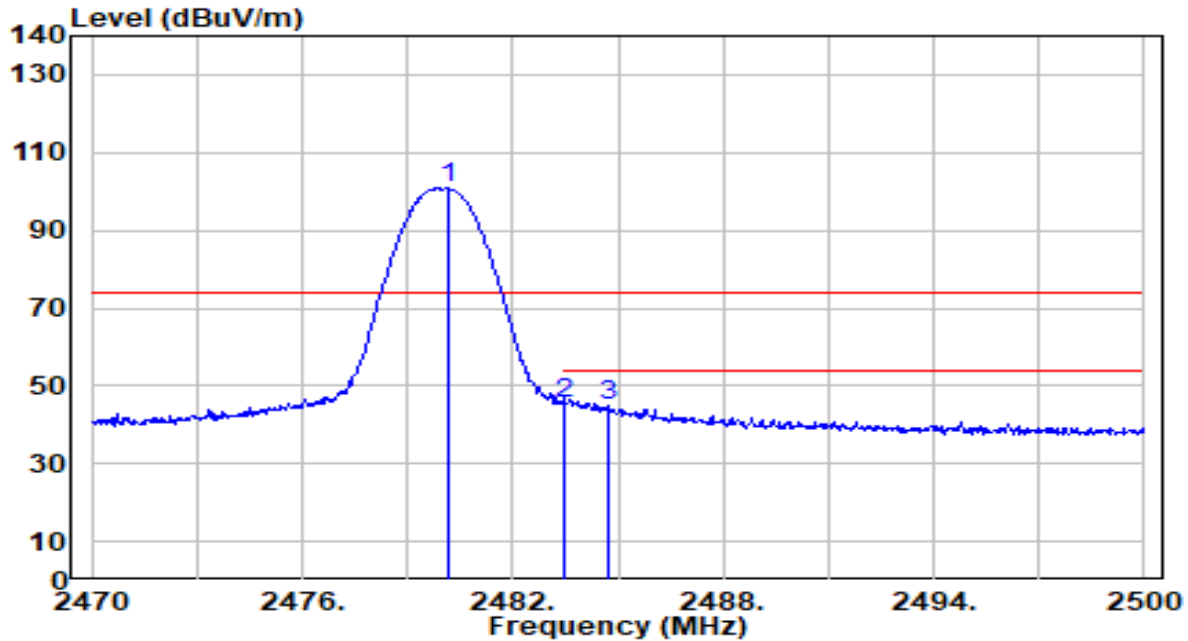


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2480.140 | 105.46 | -4.80 | 100.66 | N/A | N/A | 100 | 288 | Peak |
| 2 | * 2483.500 | 50.34 | -4.79 | 45.55 | -28.45 | 74.00 | 100 | 288 | Peak |
| 3 | 2484.730 | 49.50 | -4.79 | 44.71 | -29.29 | 74.00 | 100 | 288 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_DH5_CH 78_Left Ear | Test Voltage | By Notebook PC |

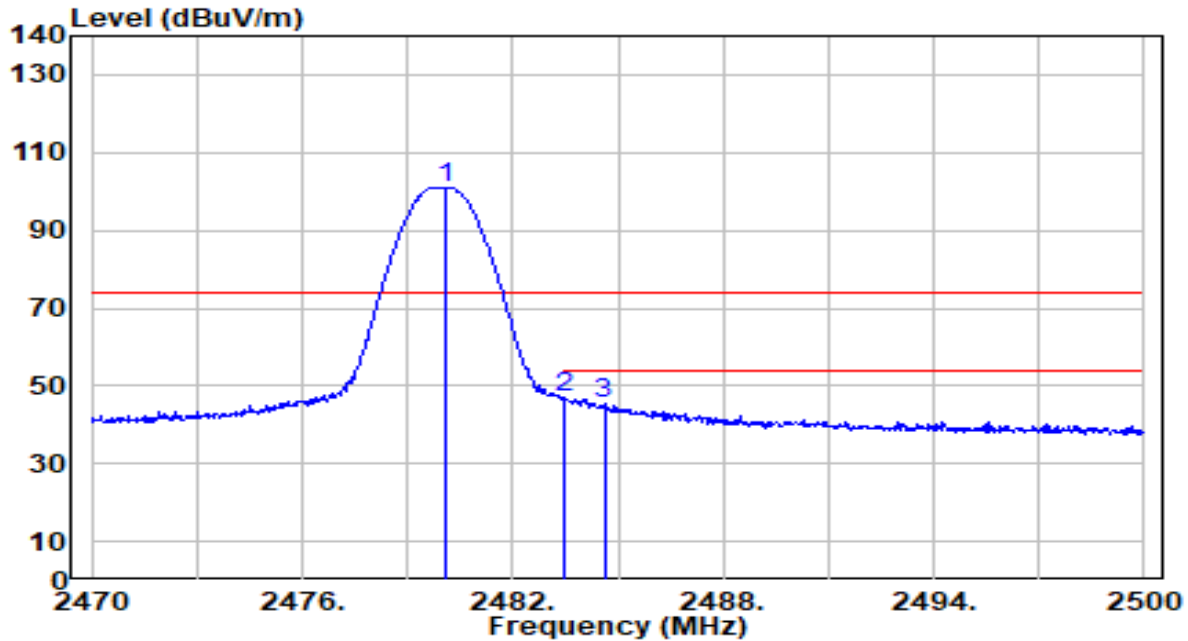


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2480.110 | 105.95 | -4.80 | 101.15 | N/A | N/A | 100 | 45 | Peak |
| 2 | * 2483.500 | 51.81 | -4.79 | 47.02 | -26.98 | 74.00 | 100 | 45 | Peak |
| 3 | 2484.610 | 50.03 | -4.79 | 45.25 | -28.75 | 74.00 | 100 | 45 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_3DH5_CH 0_Left Ear | Test Voltage | By Notebook PC |

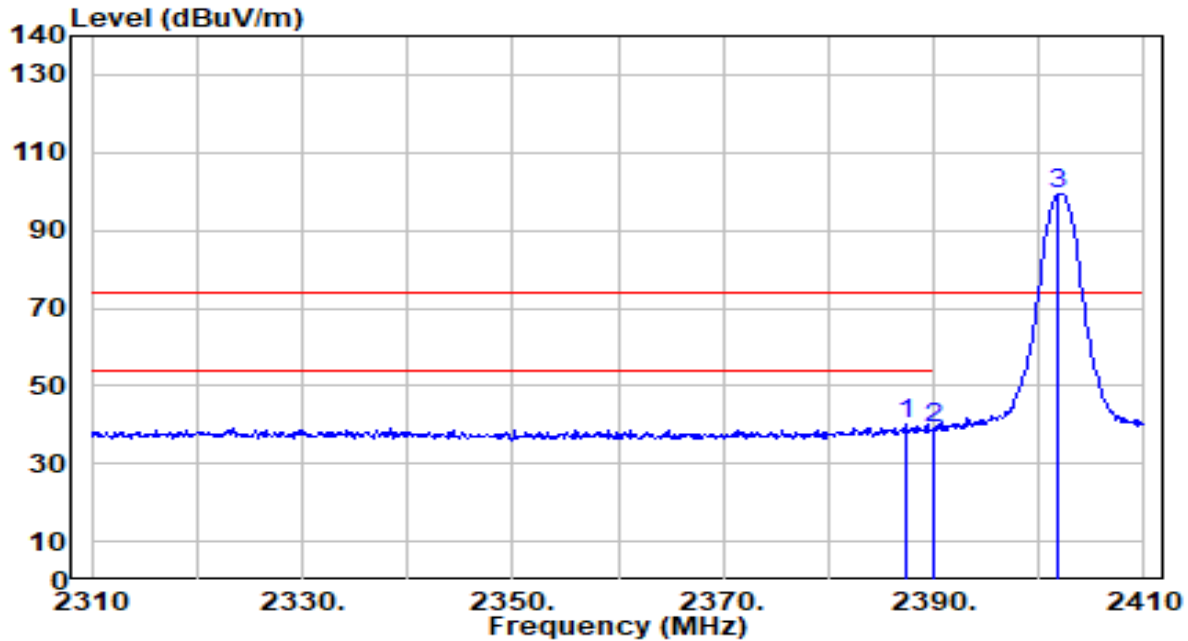


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2387.300 | 45.20 | -5.00 | 40.20 | -33.80 | 74.00 | 100 | 288 | Peak |
| 2 | 2390.000 | 44.23 | -5.00 | 39.23 | -34.77 | 74.00 | 100 | 288 | Peak |
| 3 | 2401.900 | 104.50 | -4.99 | 99.52 | N/A | N/A | 100 | 288 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_3DH5_CH 0_Left Ear | Test Voltage | By Notebook PC |

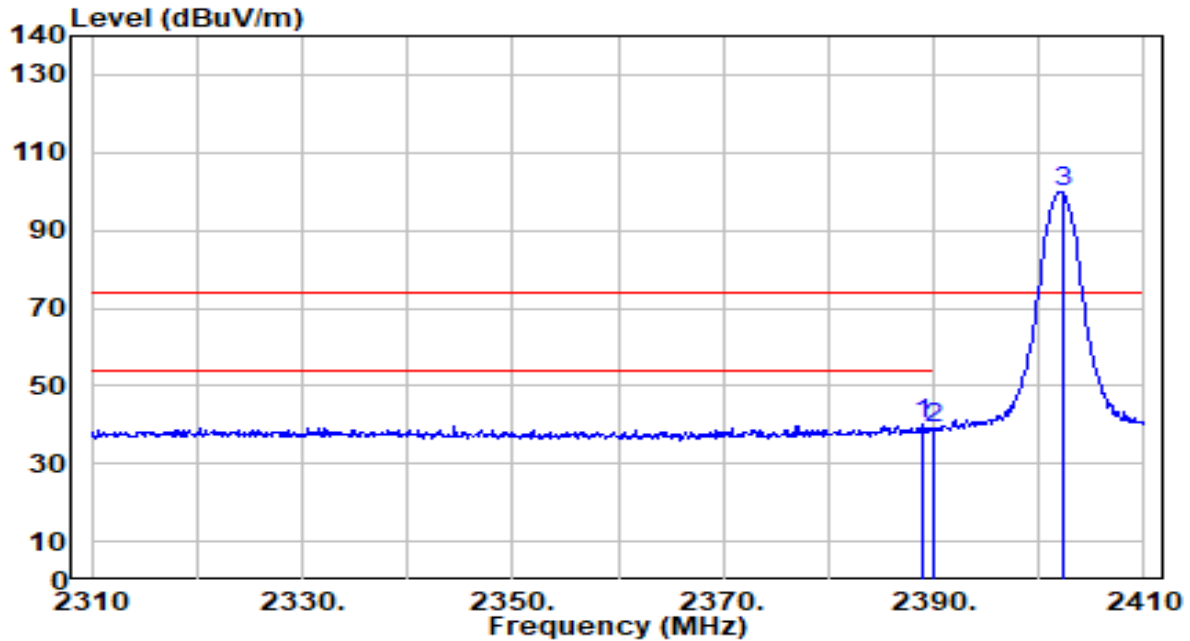


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2389.000 | 45.20 | -5.00 | 40.21 | -33.79 | 74.00 | 105 | 23 | Peak |
| 2 | | 2390.000 | 44.00 | -5.00 | 39.00 | -35.00 | 74.00 | 105 | 23 | Peak |
| 3 | | 2402.200 | 104.59 | -4.99 | 99.60 | N/A | N/A | 105 | 23 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_3DH5_CH 78_Left Ear | Test Voltage | By Notebook PC |

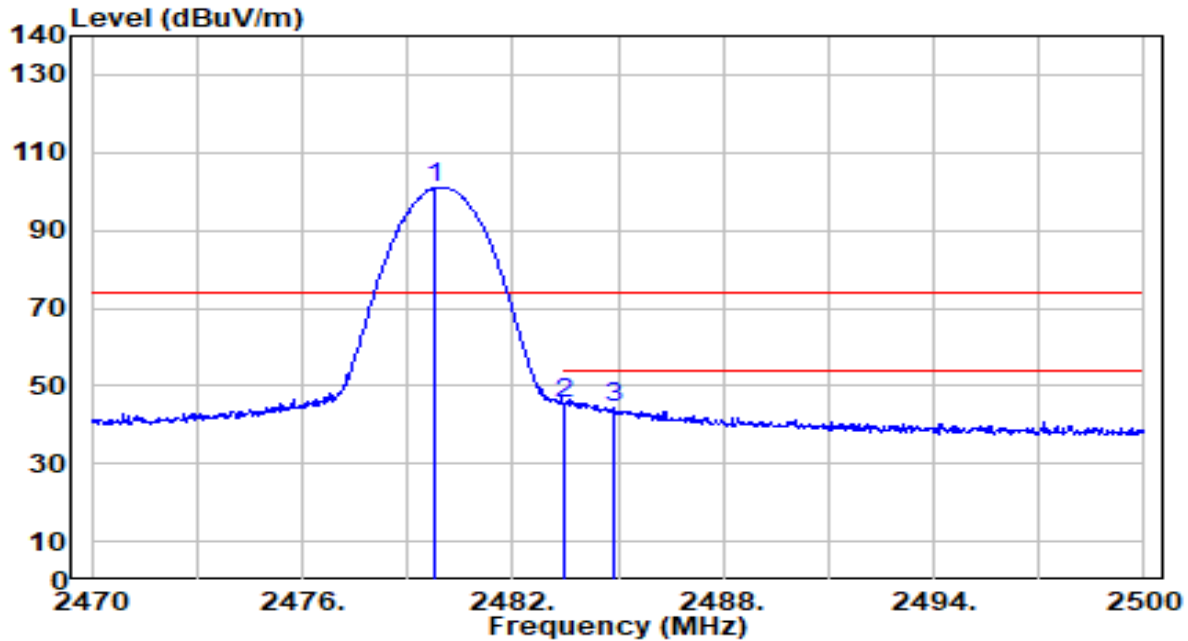


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2479.810 | 105.53 | -4.80 | 100.74 | N/A | N/A | 100 | 288 | Peak |
| 2 | * 2483.500 | 50.26 | -4.79 | 45.47 | -28.53 | 74.00 | 100 | 288 | Peak |
| 3 | 2484.850 | 49.28 | -4.79 | 44.49 | -29.51 | 74.00 | 100 | 288 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_3DH5_CH 78_Left Ear | Test Voltage | By Notebook PC |

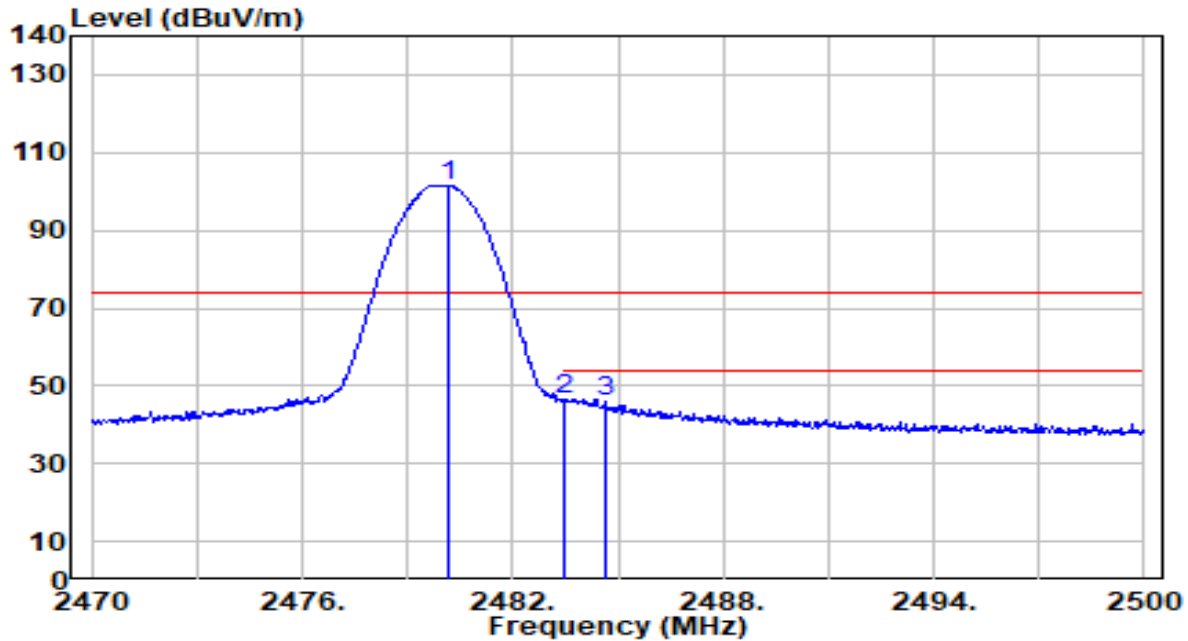


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2480.140 | 106.46 | -4.80 | 101.66 | N/A | N/A | 116 | 19 | Peak |
| 2 | * 2483.500 | 51.11 | -4.79 | 46.32 | -27.68 | 74.00 | 116 | 19 | Peak |
| 3 | 2484.640 | 50.83 | -4.79 | 46.04 | -27.96 | 74.00 | 116 | 19 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_DH5_CH 0_Right Ear | Test Voltage | By Notebook PC |

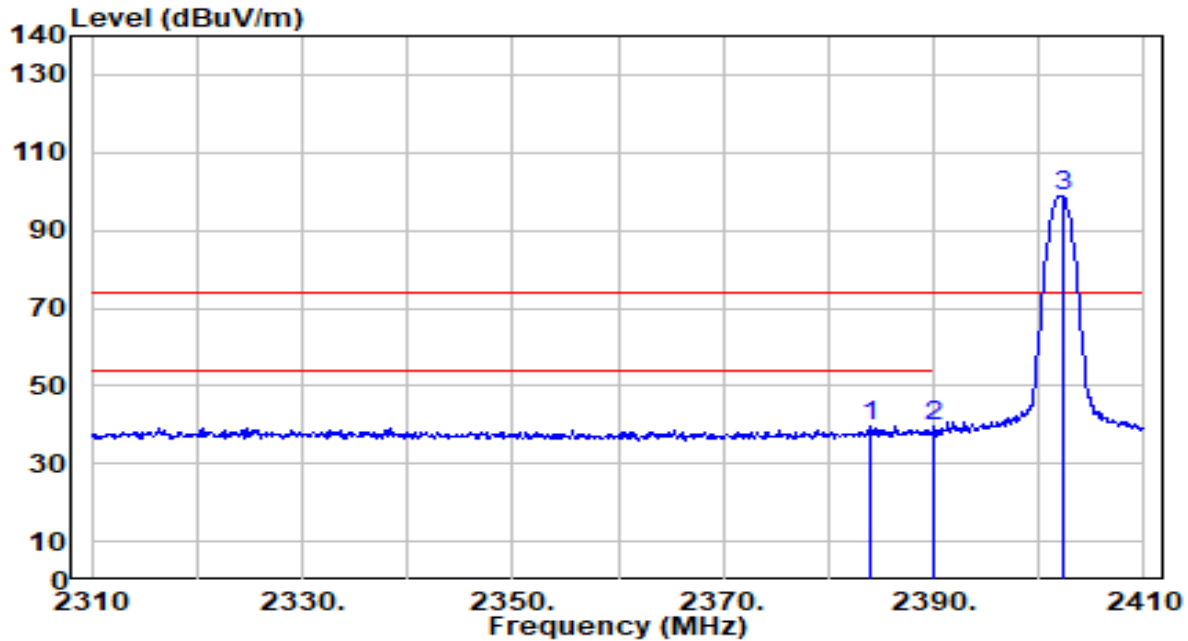


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2383.900 | 44.60 | -5.00 | 39.61 | -34.39 | 74.00 | 100 | 186 | Peak |
| 2 | 2390.000 | 44.39 | -5.00 | 39.39 | -34.61 | 74.00 | 100 | 186 | Peak |
| 3 | 2402.200 | 103.64 | -4.99 | 98.65 | N/A | N/A | 100 | 186 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_DH5_CH 0_Right Ear | Test Voltage | By Notebook PC |

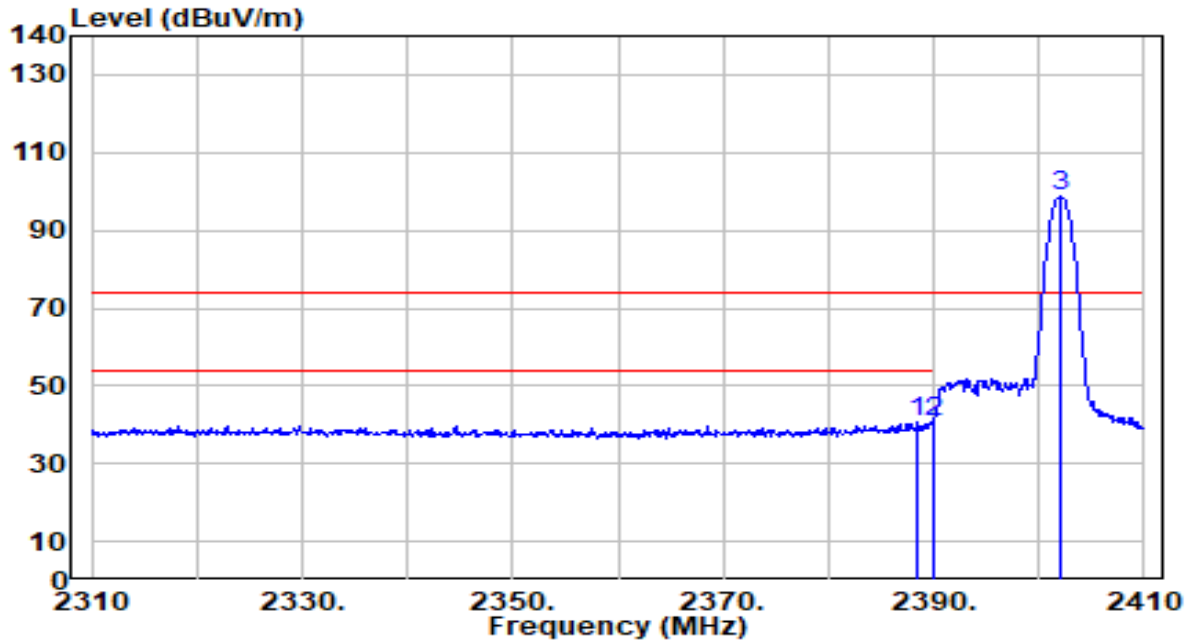


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2388.500 | 45.92 | -5.00 | 40.92 | -33.08 | 74.00 | 100 | 276 | Peak |
| 2 | | 2390.000 | 45.56 | -5.00 | 40.56 | -33.44 | 74.00 | 100 | 276 | Peak |
| 3 | | 2402.000 | 103.53 | -4.99 | 98.54 | N/A | N/A | 100 | 276 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_DH5_CH 78_Right Ear | Test Voltage | By Notebook PC |

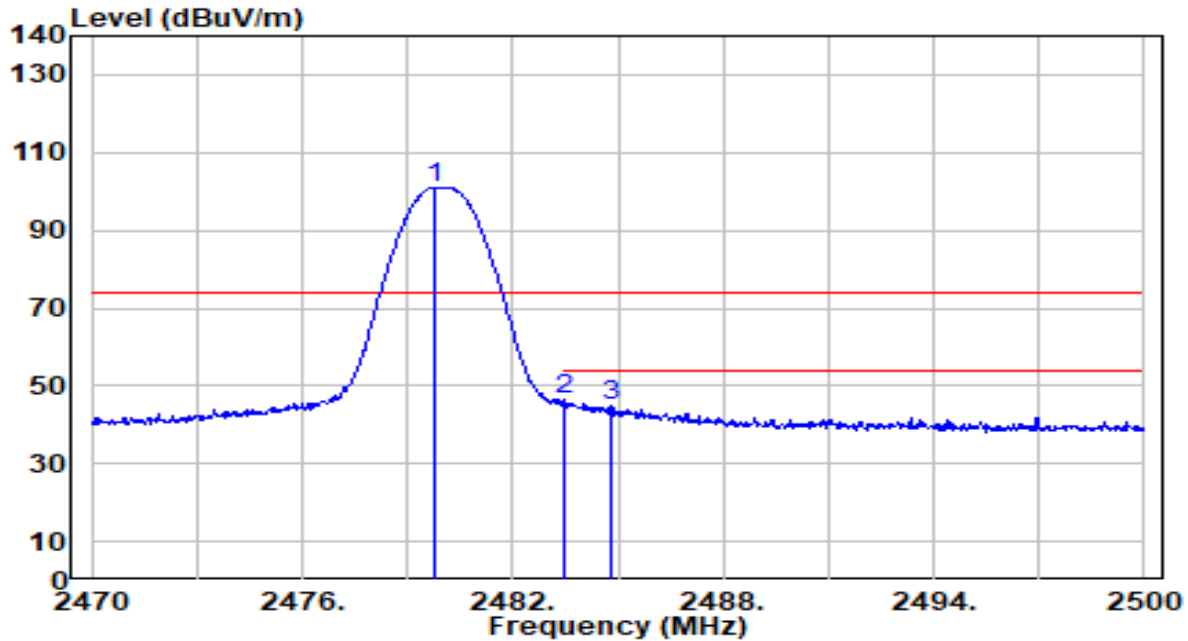


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2479.810 | 105.95 | -4.80 | 101.16 | N/A | N/A | 101 | 216 | Peak |
| 2 | * 2483.500 | 51.42 | -4.79 | 46.63 | -27.37 | 74.00 | 101 | 216 | Peak |
| 3 | 2484.790 | 49.55 | -4.79 | 44.76 | -29.24 | 74.00 | 101 | 216 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_DH5_CH 78_Right Ear | Test Voltage | By Notebook PC |

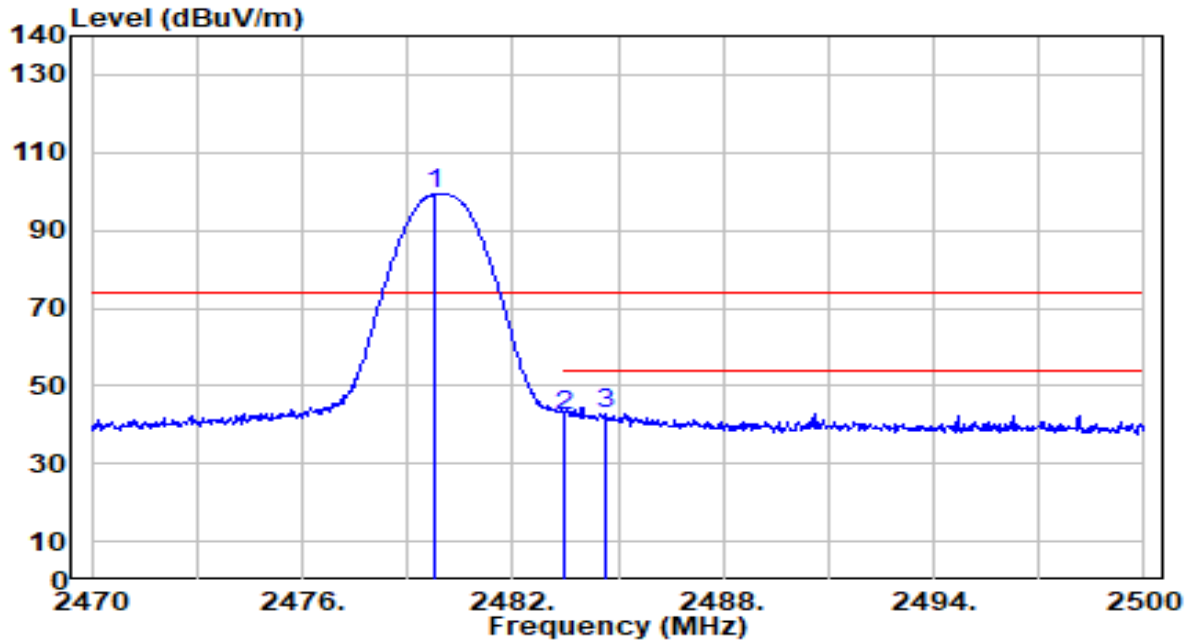


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2479.810 | 103.92 | -4.80 | 99.12 | N/A | N/A | 100 | 278 | Peak |
| 2 | 2483.500 | 47.32 | -4.79 | 42.53 | -31.47 | 74.00 | 100 | 278 | Peak |
| 3 | * 2484.640 | 47.76 | -4.79 | 42.98 | -31.02 | 74.00 | 100 | 278 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_3DH5_CH 0_Right Ear | Test Voltage | By Notebook PC |

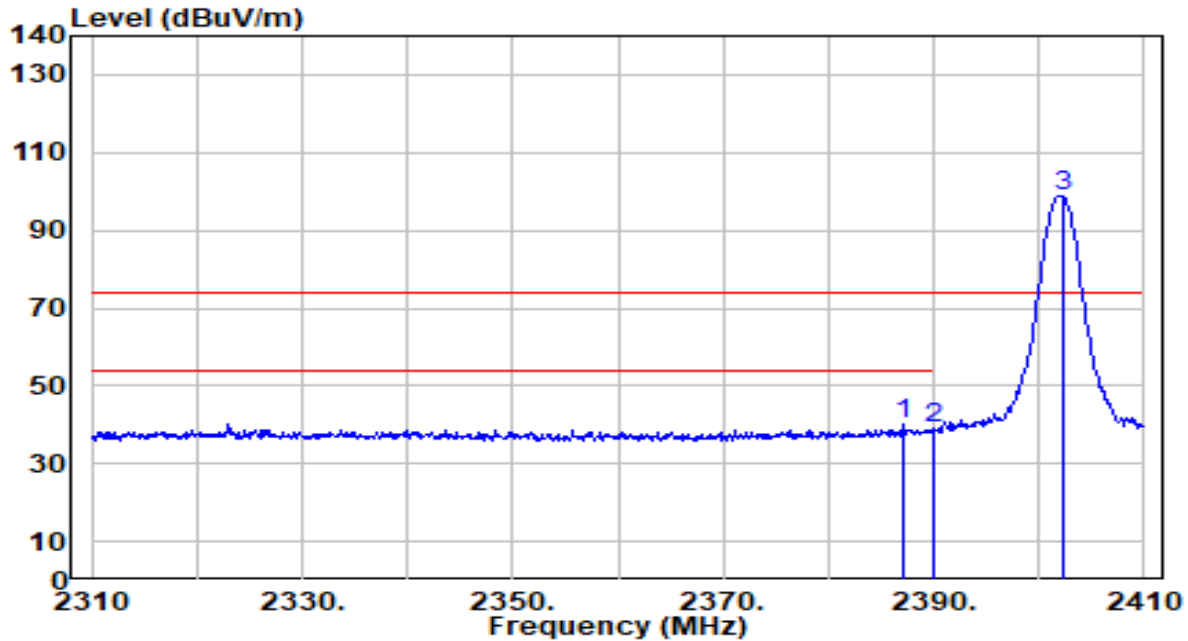


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2387.100 | 45.25 | -5.00 | 40.26 | -33.74 | 74.00 | 100 | 185 | Peak |
| 2 | 2390.000 | 44.00 | -5.00 | 39.00 | -35.00 | 74.00 | 100 | 185 | Peak |
| 3 | 2402.200 | 104.01 | -4.99 | 99.03 | N/A | N/A | 100 | 185 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_3DH5_CH 0_Right Ear | Test Voltage | By Notebook PC |

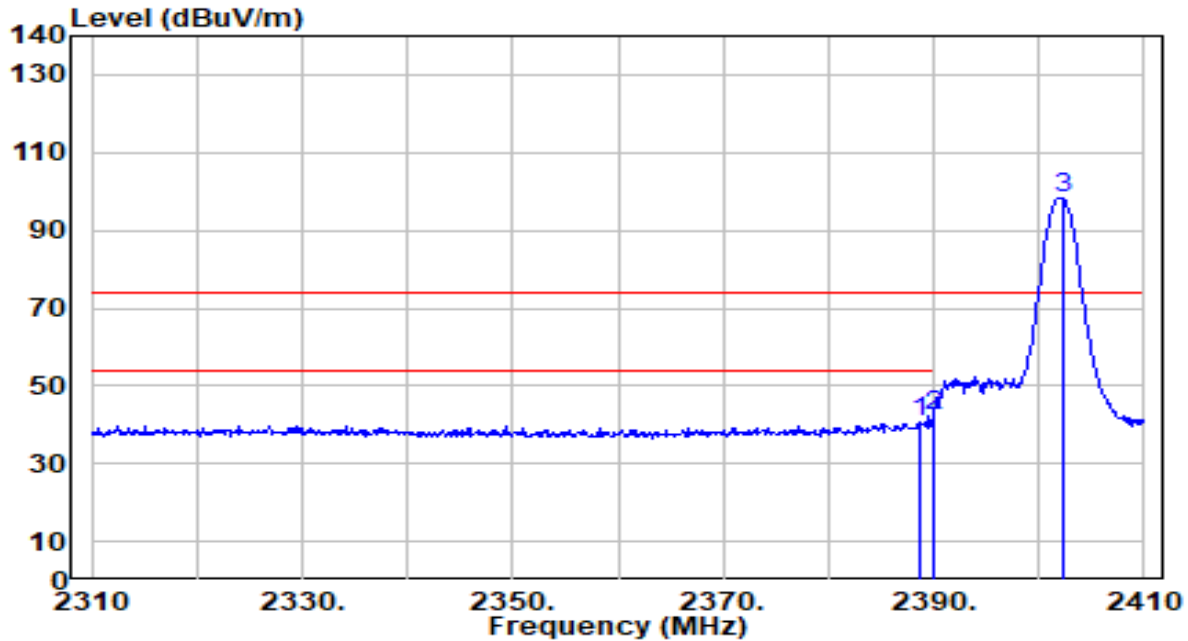


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.700 | 45.45 | -5.00 | 40.45 | -33.55 | 74.00 | 100 | 276 | Peak |
| 2 | * 2390.000 | 47.40 | -5.00 | 42.41 | -31.59 | 74.00 | 100 | 276 | Peak |
| 3 | 2402.200 | 103.41 | -4.99 | 98.42 | N/A | N/A | 100 | 276 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_3DH5_CH 78_Right Ear | Test Voltage | By Notebook PC |

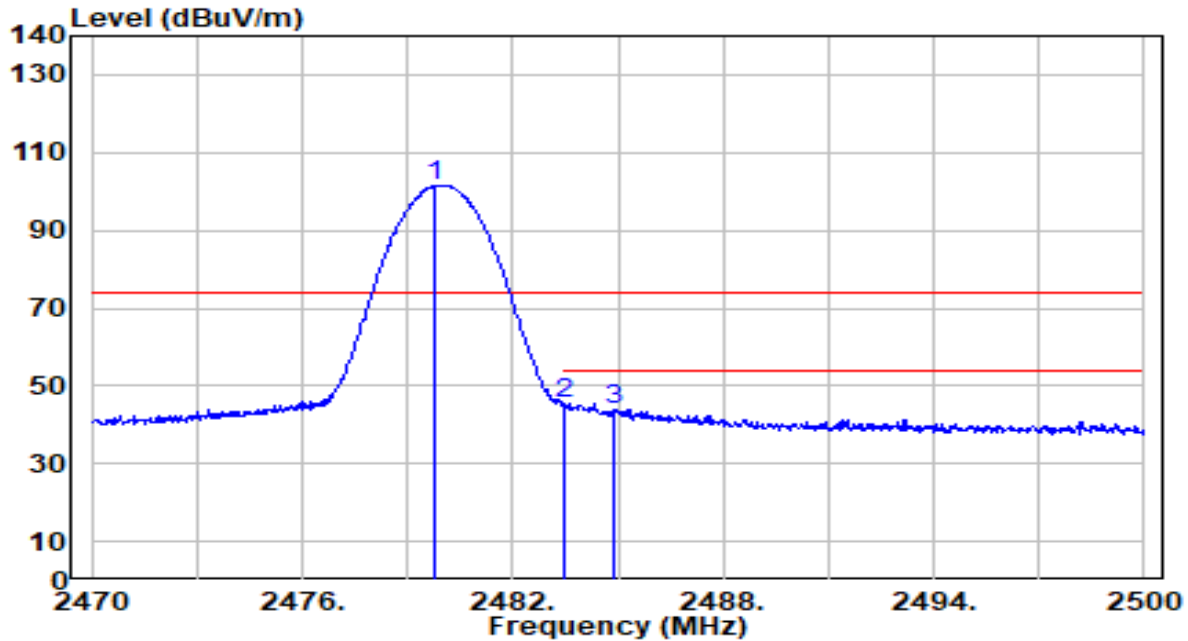


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2479.810 | 106.08 | -4.80 | 101.28 | N/A | N/A | 100 | 216 | Peak |
| 2 | * 2483.500 | 50.22 | -4.79 | 45.43 | -28.57 | 74.00 | 100 | 216 | Peak |
| 3 | 2484.850 | 48.57 | -4.79 | 43.78 | -30.22 | 74.00 | 100 | 216 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-----------------------------------|----------------------|----------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-27 |
| Factor | DRH18-E | Temp. / Humidity | 24°C /63% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | BT_TX_3DH5_CH 78_Right Ear | Test Voltage | By Notebook PC |

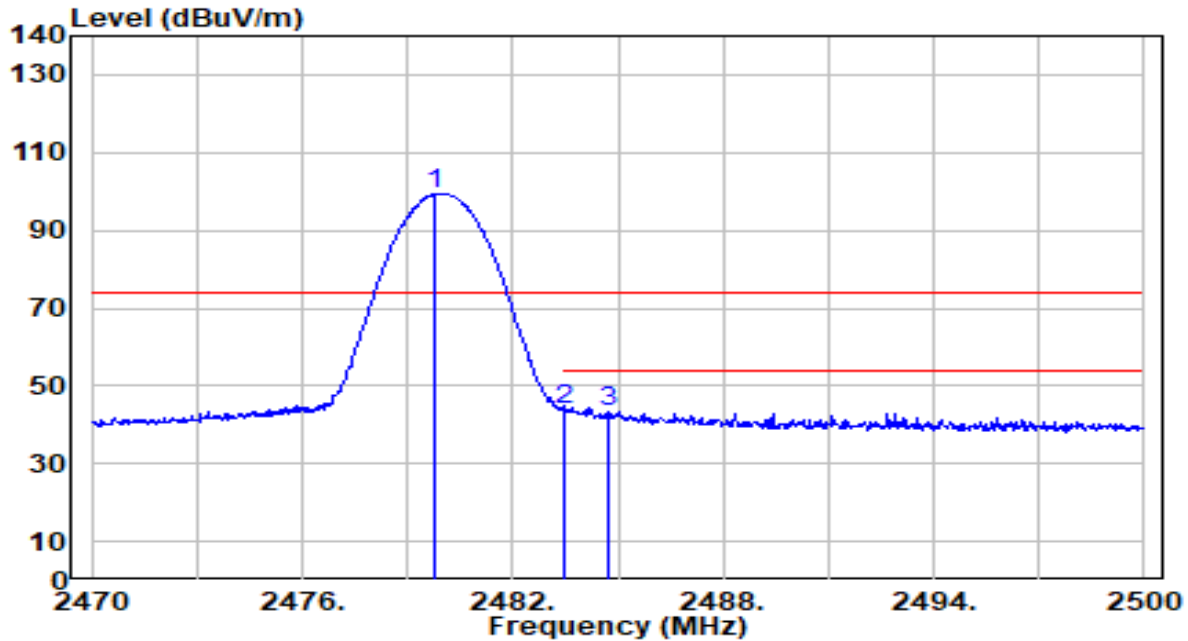

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2479.810 | 103.97 | -4.80 | 99.17 | N/A | N/A | 100 | 278 | Peak |
| 2 | * 2483.500 | 48.61 | -4.79 | 43.82 | -30.18 | 74.00 | 100 | 278 | Peak |
| 3 | 2484.700 | 47.92 | -4.79 | 43.13 | -30.87 | 74.00 | 100 | 278 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits | | |
|---------------------------------------------------------|-----------------|----------------------|
| Frequency (MHz) | QP (dB μ V) | Average (dB μ V) |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

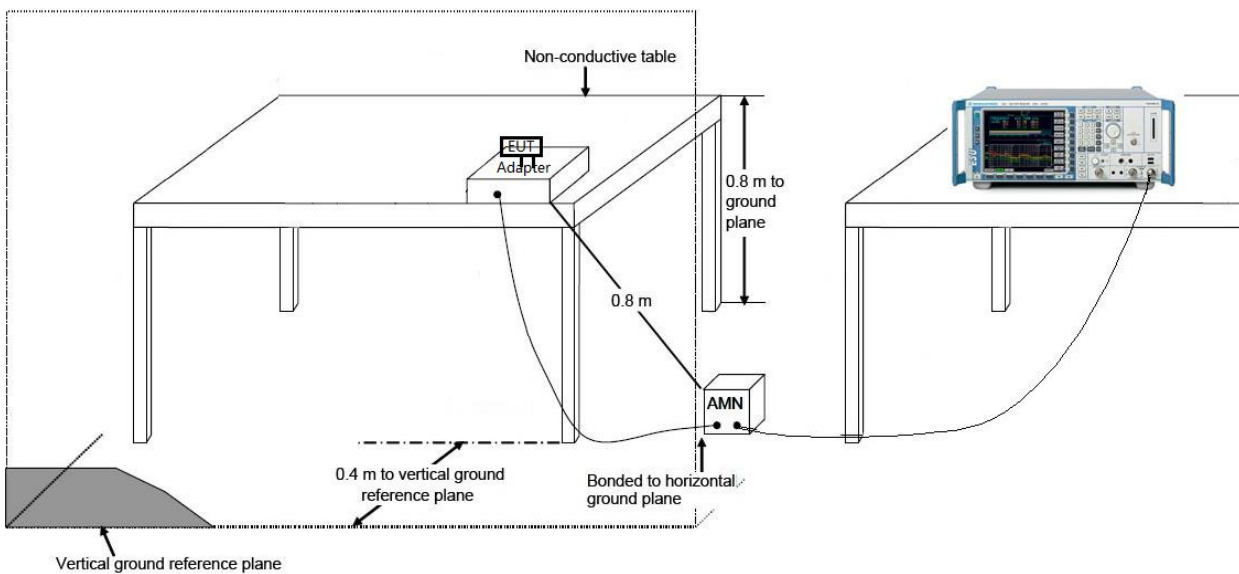

7.10.3. Test Result

| | | | |
|-----------|-----------------------------------|----------------------|--------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-28 |
| Factor | CE_ENV216-L1 (Filter ON) | Temp. / Humidity | 21.9°C /60% |
| Polarity | Line1 | Site / Test Engineer | SR2 / Amber |
| Test Mode | BT_TX_DH5_CH 39_Left Ear | Test Voltage | AC 120V/60Hz |

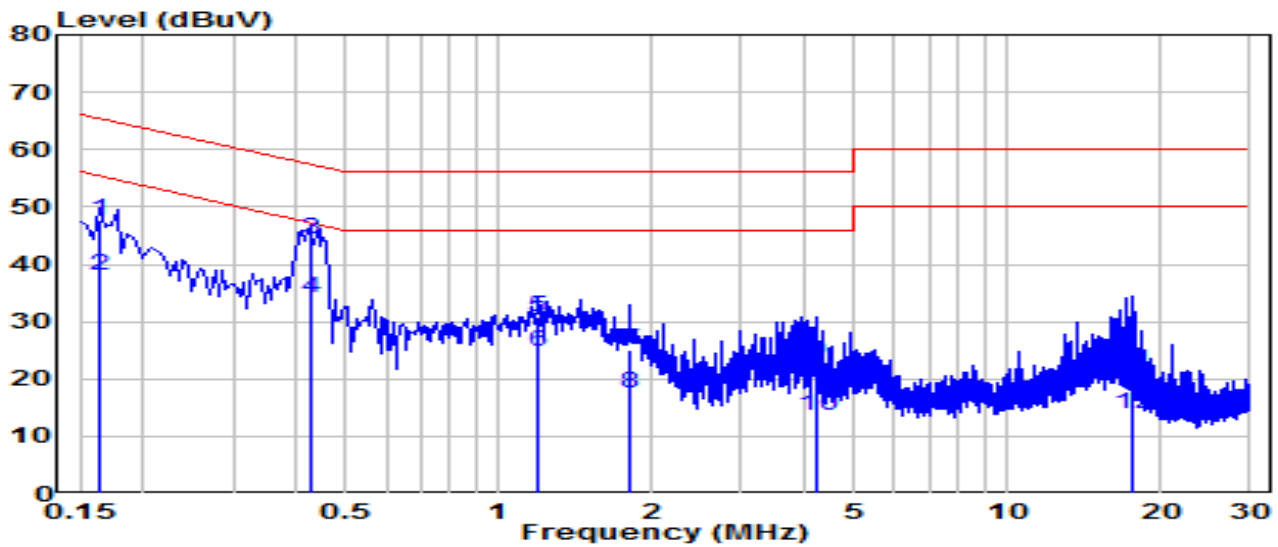


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV) | Margin (dB) | Limit (dBUV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.163 | 38.03 | 9.62 | 47.65 | -17.64 | 65.28 | QP |
| 2 | 0.163 | 28.55 | 9.62 | 38.17 | -17.12 | 55.28 | Average |
| 3 | * 0.424 | 34.78 | 9.64 | 44.42 | -12.94 | 57.36 | QP |
| 4 | * 0.424 | 24.58 | 9.64 | 34.22 | -13.14 | 47.36 | Average |
| 5 | 1.198 | 21.10 | 9.67 | 30.77 | -25.23 | 56.00 | QP |
| 6 | 1.198 | 15.08 | 9.67 | 24.75 | -21.25 | 46.00 | Average |
| 7 | 1.801 | 15.32 | 9.69 | 25.00 | -31.00 | 56.00 | QP |
| 8 | 1.801 | 7.93 | 9.69 | 17.61 | -28.39 | 46.00 | Average |
| 9 | 4.213 | 13.18 | 9.73 | 22.91 | -33.09 | 56.00 | QP |
| 10 | 4.213 | 3.90 | 9.73 | 13.63 | -32.37 | 46.00 | Average |
| 11 | 17.595 | 11.67 | 9.91 | 21.58 | -38.42 | 60.00 | QP |
| 12 | 17.595 | 3.86 | 9.91 | 13.77 | -36.23 | 50.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|-----------------------------------|----------------------|--------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-28 |
| Factor | CE_ENV216-N (Filter ON) | Temp. / Humidity | 21.9°C / 60% |
| Polarity | Neutral | Site / Test Engineer | SR2 / Amber |
| Test Mode | BT_TX_DH5_CH 39_Left Ear | Test Voltage | AC 120V/60Hz |

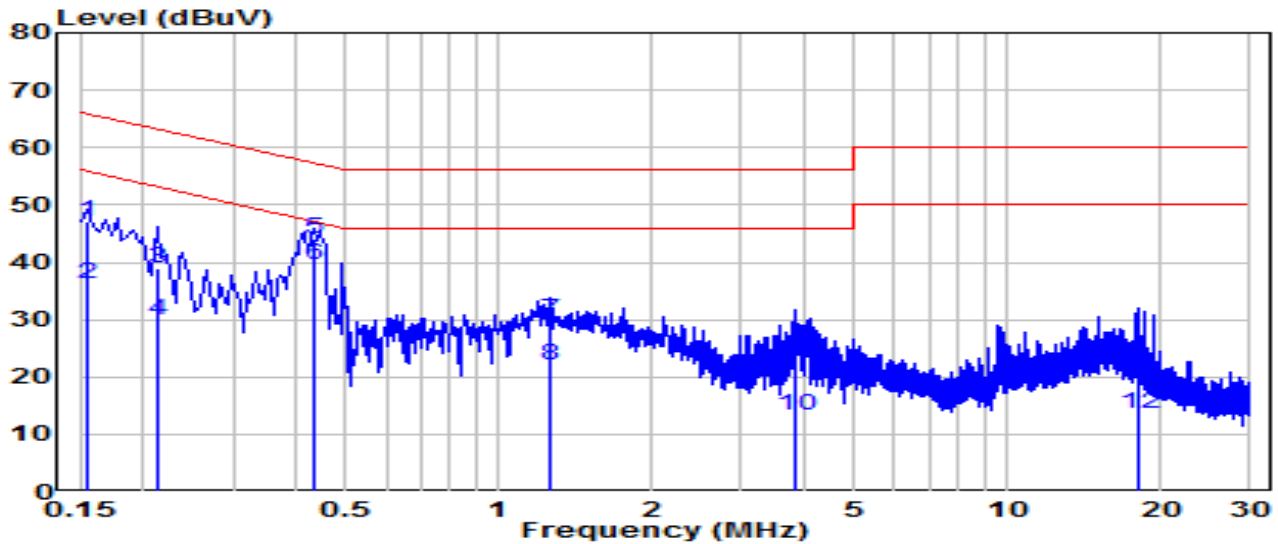


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.154 | 37.38 | 9.62 | 47.00 | -18.76 | 65.75 | QP |
| 2 | 0.154 | 26.49 | 9.62 | 36.11 | -19.65 | 55.75 | Average |
| 3 | 0.213 | 29.30 | 9.62 | 38.92 | -24.17 | 63.09 | QP |
| 4 | 0.213 | 20.26 | 9.62 | 29.88 | -23.21 | 53.09 | Average |
| 5 | * 0.433 | 34.47 | 9.64 | 44.10 | -13.08 | 57.19 | QP |
| 6 | * 0.433 | 29.82 | 9.64 | 39.46 | -7.72 | 47.19 | Average |
| 7 | 1.257 | 20.09 | 9.68 | 29.76 | -26.24 | 56.00 | QP |
| 8 | 1.257 | 12.44 | 9.68 | 22.12 | -23.88 | 46.00 | Average |
| 9 | 3.817 | 13.54 | 9.73 | 23.27 | -32.73 | 56.00 | QP |
| 10 | 3.817 | 3.55 | 9.73 | 13.28 | -32.72 | 46.00 | Average |
| 11 | 18.022 | 10.53 | 9.97 | 20.50 | -39.50 | 60.00 | QP |
| 12 | 18.022 | 3.58 | 9.97 | 13.55 | -36.45 | 50.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|-----------------------------------|----------------------|--------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-28 |
| Factor | CE_ENV216-L1 (Filter ON) | Temp. / Humidity | 21.9°C /60% |
| Polarity | Line1 | Site / Test Engineer | SR2 / Amber |
| Test Mode | BT_TX_DH5_CH 39_Left Ear | Test Voltage | AC 240V/60Hz |

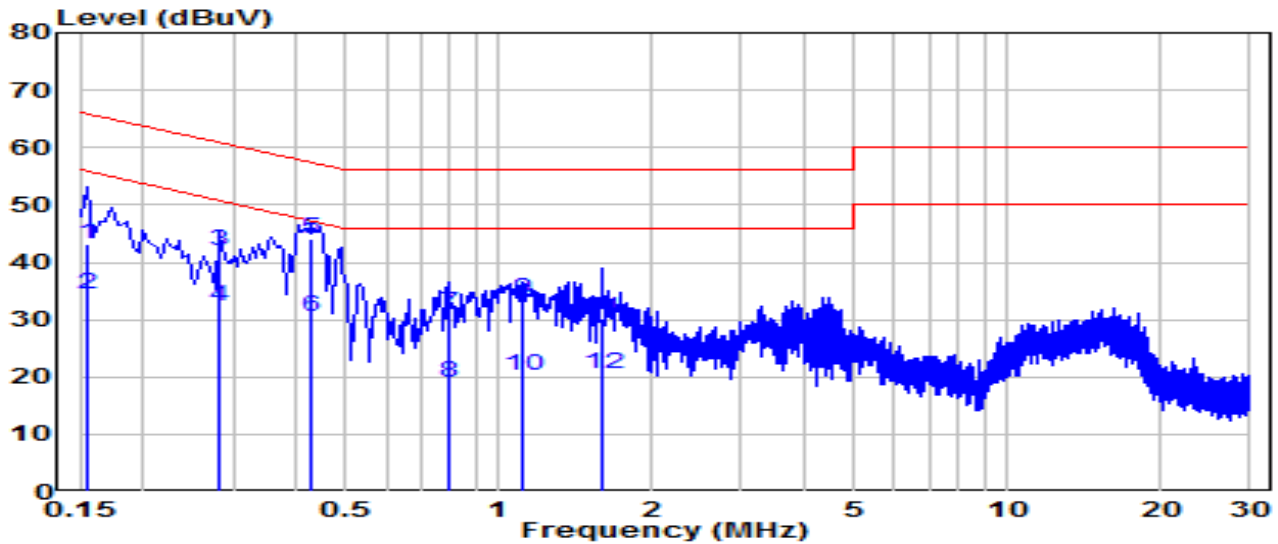


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.154 | 33.55 | 9.62 | 43.17 | -22.58 | 65.75 | QP |
| 2 | 0.154 | 24.93 | 9.62 | 34.55 | -21.20 | 55.75 | Average |
| 3 | 0.280 | 32.38 | 9.63 | 42.01 | -18.79 | 60.80 | QP |
| 4 | 0.280 | 22.58 | 9.63 | 32.20 | -18.60 | 50.80 | Average |
| 5 | * 0.424 | 34.55 | 9.64 | 44.19 | -13.17 | 57.36 | QP |
| 6 | * 0.424 | 20.97 | 9.64 | 30.61 | -16.75 | 47.36 | Average |
| 7 | 0.793 | 21.53 | 9.66 | 31.19 | -24.81 | 56.00 | QP |
| 8 | 0.793 | 9.34 | 9.66 | 19.00 | -27.00 | 46.00 | Average |
| 9 | 1.108 | 23.71 | 9.67 | 33.38 | -22.62 | 56.00 | QP |
| 10 | 1.108 | 10.44 | 9.67 | 20.11 | -25.89 | 46.00 | Average |
| 11 | 1.599 | 20.40 | 9.68 | 30.08 | -25.92 | 56.00 | QP |
| 12 | 1.599 | 10.91 | 9.68 | 20.60 | -25.40 | 46.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|-----------------------------------|----------------------|--------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-28 |
| Factor | CE_ENV216-N (Filter ON) | Temp. / Humidity | 21.9°C / 60% |
| Polarity | Neutral | Site / Test Engineer | SR2 / Amber |
| Test Mode | BT_TX_DH5_CH 39_Left Ear | Test Voltage | AC 240V/60Hz |

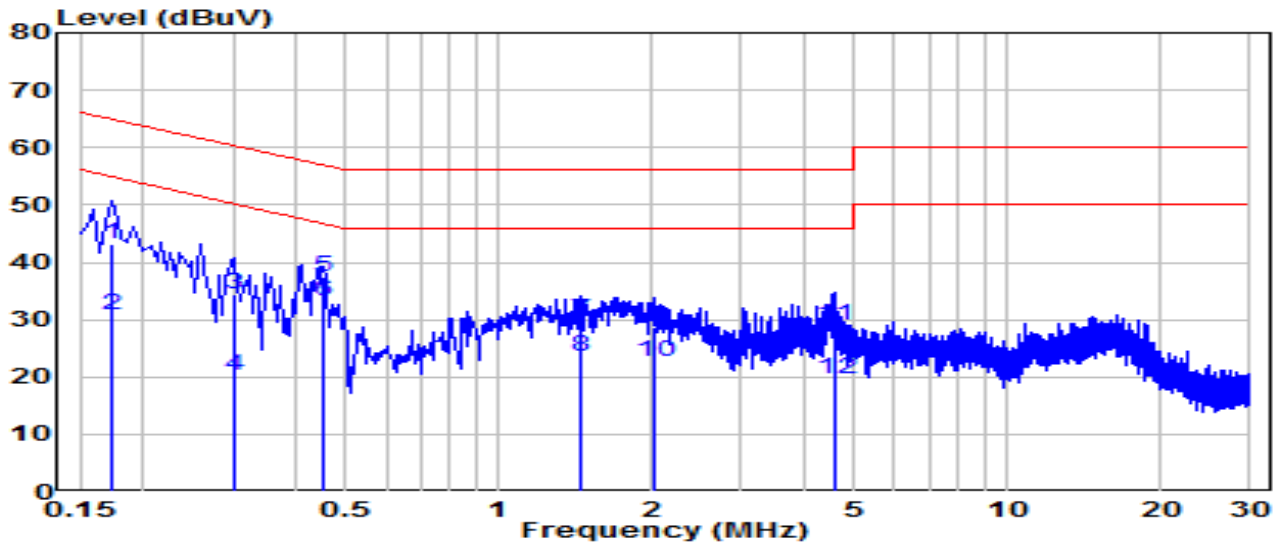


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.172 | 33.54 | 9.62 | 43.16 | -21.68 | 64.84 | QP |
| 2 | 0.172 | 21.13 | 9.62 | 30.75 | -24.09 | 54.84 | Average |
| 3 | 0.303 | 24.77 | 9.63 | 34.40 | -25.76 | 60.16 | QP |
| 4 | 0.303 | 10.74 | 9.63 | 20.37 | -29.79 | 50.16 | Average |
| 5 | * 0.451 | 27.66 | 9.64 | 37.30 | -19.55 | 56.85 | QP |
| 6 | * 0.451 | 23.68 | 9.64 | 33.32 | -13.53 | 46.85 | Average |
| 7 | 1.455 | 20.11 | 9.68 | 29.78 | -26.22 | 56.00 | QP |
| 8 | 1.455 | 13.74 | 9.68 | 23.42 | -22.58 | 46.00 | Average |
| 9 | 2.022 | 18.93 | 9.69 | 28.62 | -27.38 | 56.00 | QP |
| 10 | 2.022 | 13.05 | 9.69 | 22.74 | -23.26 | 46.00 | Average |
| 11 | 4.591 | 19.33 | 9.74 | 29.07 | -26.93 | 56.00 | QP |
| 12 | 4.591 | 9.79 | 9.74 | 19.53 | -26.47 | 46.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|-----------------------------------|----------------------|--------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-28 |
| Factor | CE_ENV216-L1 (Filter ON) | Temp. / Humidity | 21.9°C / 60% |
| Polarity | Line1 | Site / Test Engineer | SR2 / Amber |
| Test Mode | BT_TX_DH5_CH 39_Right Ear | Test Voltage | AC 120V/60Hz |

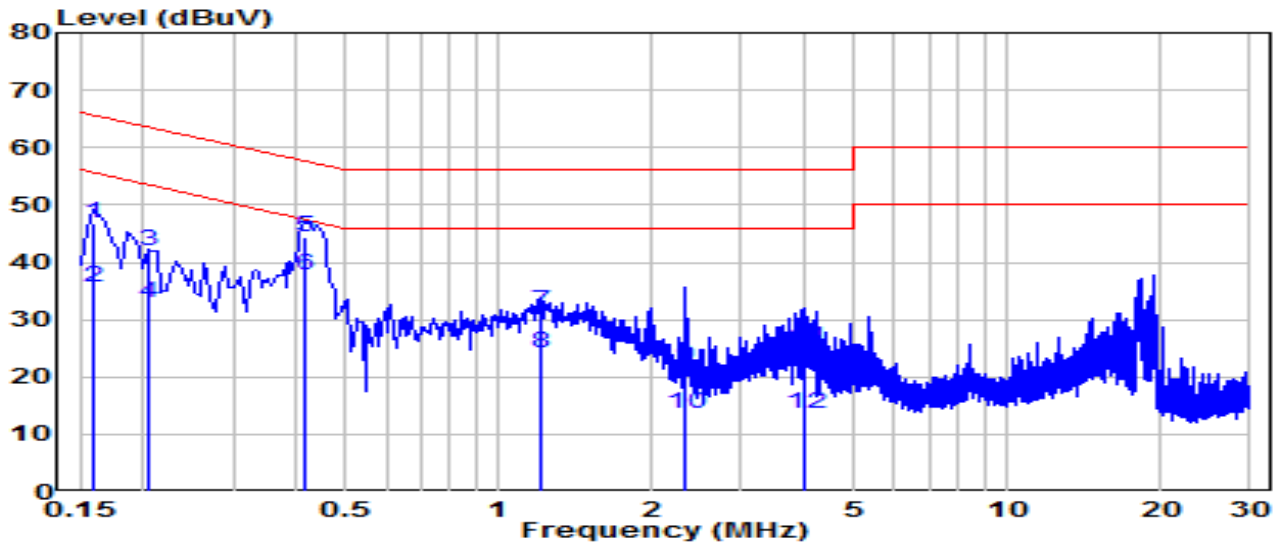


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV) | Margin (dB) | Limit (dBUV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.159 | 37.18 | 9.62 | 46.80 | -18.71 | 65.52 | QP |
| 2 | 0.159 | 26.15 | 9.62 | 35.77 | -19.74 | 55.52 | Average |
| 3 | 0.204 | 32.43 | 9.62 | 42.05 | -21.39 | 63.45 | QP |
| 4 | 0.204 | 23.35 | 9.62 | 32.98 | -20.47 | 53.45 | Average |
| 5 | * | 0.415 | 9.64 | 44.48 | -13.06 | 57.54 | QP |
| 6 | * | 0.415 | 9.64 | 37.60 | -9.94 | 47.54 | Average |
| 7 | 1.203 | 21.65 | 9.67 | 31.32 | -24.68 | 56.00 | QP |
| 8 | 1.203 | 14.50 | 9.67 | 24.18 | -21.82 | 46.00 | Average |
| 9 | 2.332 | 12.06 | 9.70 | 21.76 | -34.24 | 56.00 | QP |
| 10 | 2.332 | 3.87 | 9.70 | 13.57 | -32.43 | 46.00 | Average |
| 11 | 4.011 | 15.41 | 9.73 | 25.14 | -30.86 | 56.00 | QP |
| 12 | 4.011 | 3.83 | 9.73 | 13.56 | -32.44 | 46.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|-----------------------------------|----------------------|--------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-28 |
| Factor | CE_ENV216-N (Filter ON) | Temp. / Humidity | 21.9°C /60% |
| Polarity | Neutral | Site / Test Engineer | SR2 / Amber |
| Test Mode | BT_TX_DH5_CH 39_Right Ear | Test Voltage | AC 120V/60Hz |

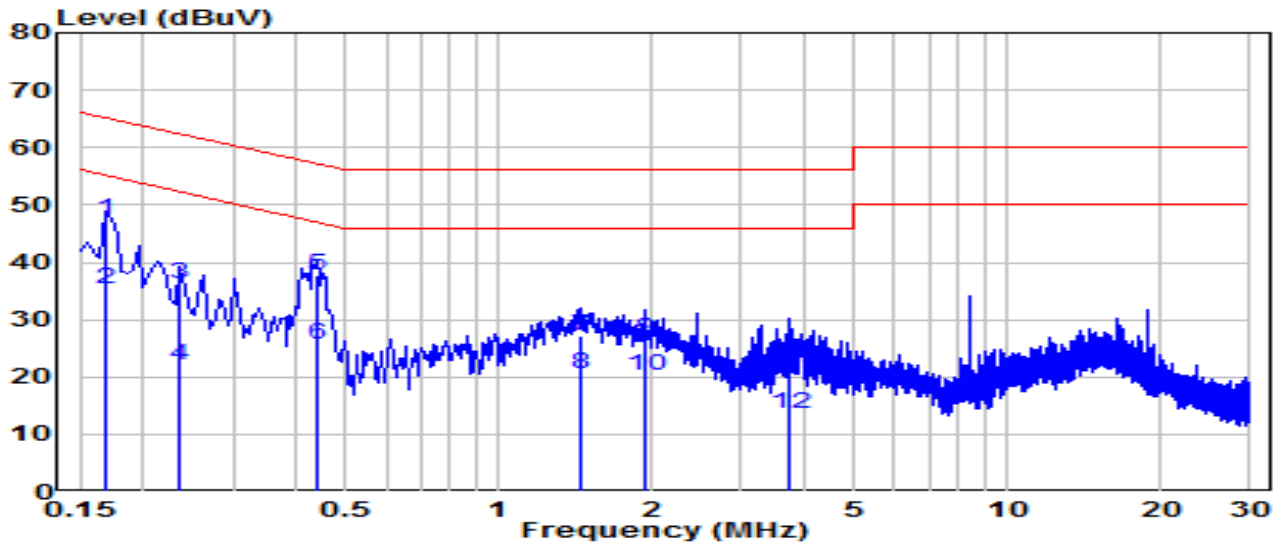


| No | | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | * | 0.168 | 37.86 | 9.62 | 47.49 | -17.57 | 65.06 | QP |
| 2 | * | 0.168 | 25.75 | 9.62 | 35.37 | -19.69 | 55.06 | Average |
| 3 | | 0.235 | 26.61 | 9.62 | 36.23 | -26.02 | 62.25 | QP |
| 4 | | 0.235 | 12.51 | 9.62 | 22.13 | -30.12 | 52.25 | Average |
| 5 | | 0.438 | 27.98 | 9.64 | 37.62 | -19.48 | 57.10 | QP |
| 6 | | 0.438 | 15.88 | 9.64 | 25.52 | -21.58 | 47.10 | Average |
| 7 | | 1.441 | 17.63 | 9.68 | 27.31 | -28.69 | 56.00 | QP |
| 8 | | 1.441 | 10.94 | 9.68 | 20.62 | -25.38 | 46.00 | Average |
| 9 | | 1.936 | 16.81 | 9.69 | 26.49 | -29.51 | 56.00 | QP |
| 10 | | 1.936 | 10.44 | 9.69 | 20.13 | -25.87 | 46.00 | Average |
| 11 | | 3.732 | 11.72 | 9.72 | 21.44 | -34.56 | 56.00 | QP |
| 12 | | 3.732 | 3.83 | 9.72 | 13.55 | -32.45 | 46.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|-----------------------------------|----------------------|--------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-28 |
| Factor | CE_ENV216-L1 (Filter ON) | Temp. / Humidity | 21.9°C /60% |
| Polarity | Line1 | Site / Test Engineer | SR2 / Amber |
| Test Mode | BT_TX_DH5_CH 39_Right Ear | Test Voltage | AC 240V/60Hz |

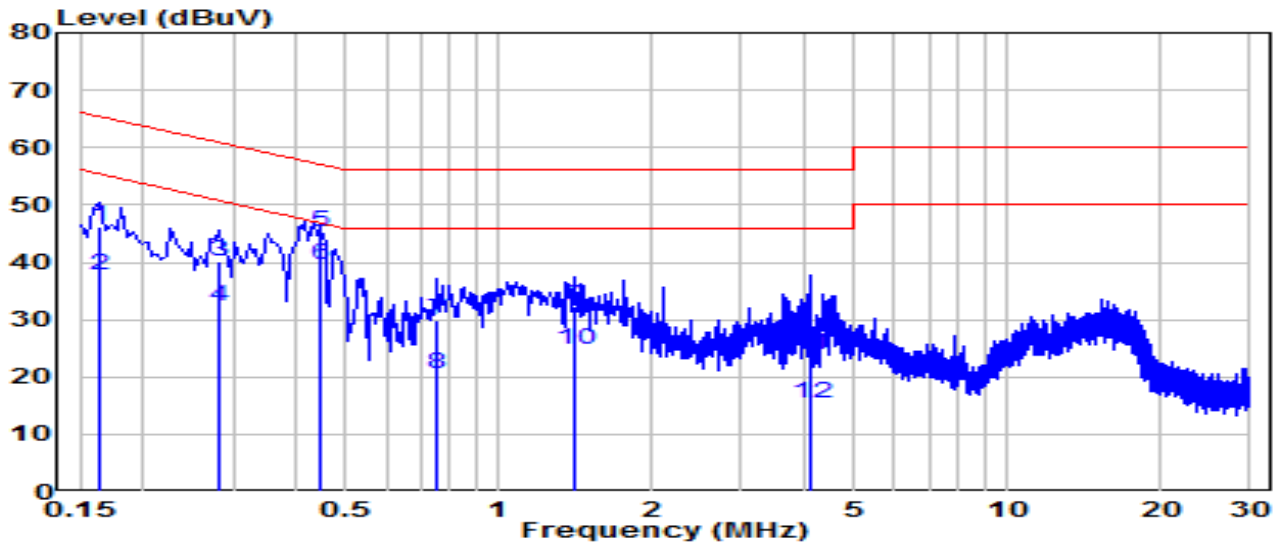


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV) | Margin (dB) | Limit (dBUV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.163 | 36.68 | 9.62 | 46.30 | -18.99 | 65.28 | QP |
| 2 | 0.163 | 28.21 | 9.62 | 37.83 | -17.45 | 55.28 | Average |
| 3 | 0.280 | 30.48 | 9.63 | 40.10 | -20.70 | 60.80 | QP |
| 4 | 0.280 | 22.69 | 9.63 | 32.32 | -18.48 | 50.80 | Average |
| 5 | * 0.442 | 35.78 | 9.64 | 45.42 | -11.60 | 57.02 | QP |
| 6 | * 0.442 | 29.92 | 9.64 | 39.55 | -7.46 | 47.02 | Average |
| 7 | 0.757 | 20.12 | 9.66 | 29.78 | -26.22 | 56.00 | QP |
| 8 | 0.757 | 10.96 | 9.66 | 20.62 | -25.38 | 46.00 | Average |
| 9 | 1.410 | 22.74 | 9.68 | 32.42 | -23.58 | 56.00 | QP |
| 10 | 1.410 | 15.14 | 9.68 | 24.82 | -21.18 | 46.00 | Average |
| 11 | 4.110 | 14.25 | 9.73 | 23.98 | -32.02 | 56.00 | QP |
| 12 | 4.110 | 5.70 | 9.73 | 15.43 | -30.57 | 46.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|-----------------------------------|----------------------|--------------|
| EUT | Digital Wireless Stereo Earphones | Date of Test | 2022-12-28 |
| Factor | CE_ENV216-N (Filter ON) | Temp. / Humidity | 21.9°C /60% |
| Polarity | Neutral | Site / Test Engineer | SR2 / Amber |
| Test Mode | BT_TX_DH5_CH 39_Right Ear | Test Voltage | AC 240V/60Hz |

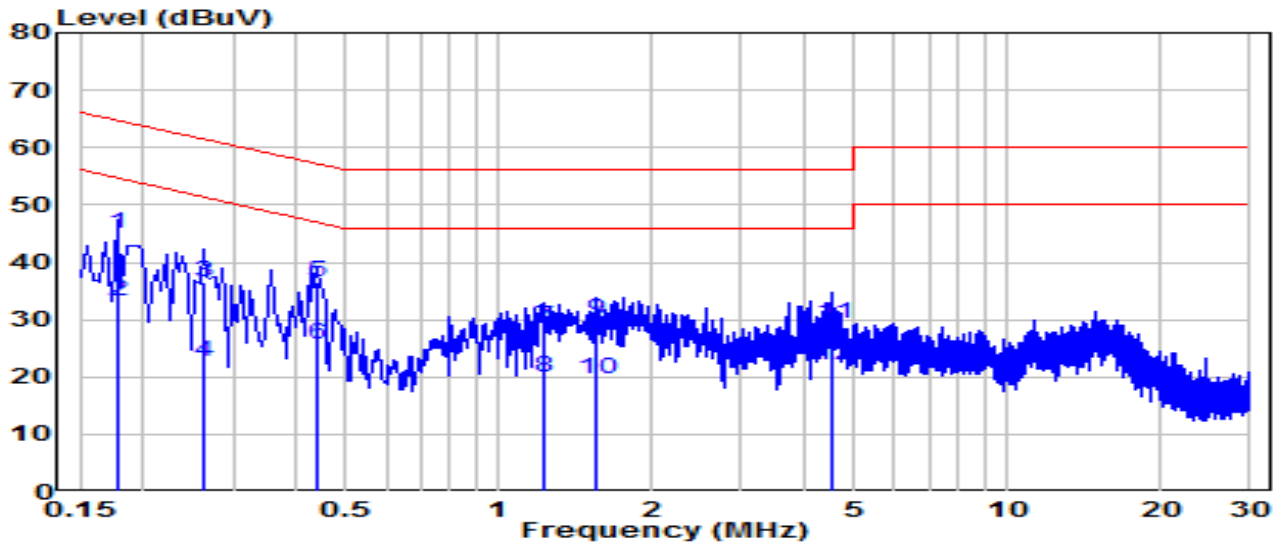

| No | | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | * | 0.177 | 35.30 | 9.62 | 44.92 | -19.70 | 64.63 | QP |
| 2 | * | 0.177 | 23.68 | 9.62 | 33.30 | -21.32 | 54.63 | Average |
| 3 | | 0.262 | 26.94 | 9.63 | 36.56 | -24.79 | 61.35 | QP |
| 4 | | 0.262 | 12.88 | 9.63 | 22.51 | -28.84 | 51.35 | Average |
| 5 | | 0.438 | 26.82 | 9.64 | 36.46 | -20.64 | 57.10 | QP |
| 6 | | 0.438 | 16.00 | 9.64 | 25.64 | -21.46 | 47.10 | Average |
| 7 | | 1.225 | 19.11 | 9.67 | 28.79 | -27.21 | 56.00 | QP |
| 8 | | 1.225 | 10.25 | 9.67 | 19.92 | -26.08 | 46.00 | Average |
| 9 | | 1.554 | 20.22 | 9.68 | 29.90 | -26.10 | 56.00 | QP |
| 10 | | 1.554 | 10.00 | 9.68 | 19.68 | -26.32 | 46.00 | Average |
| 11 | | 4.546 | 19.41 | 9.74 | 29.15 | -26.85 | 56.00 | QP |
| 12 | | 4.546 | 12.16 | 9.74 | 21.90 | -24.10 | 46.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Digital Wireless Stereo Earphones, FCC ID: ACJ-EAH-AZ40M2** is in compliance with Part 15C of the FCC Rules.

————— The End —————