




CH39 (2480MHz) LE(1Mbps)

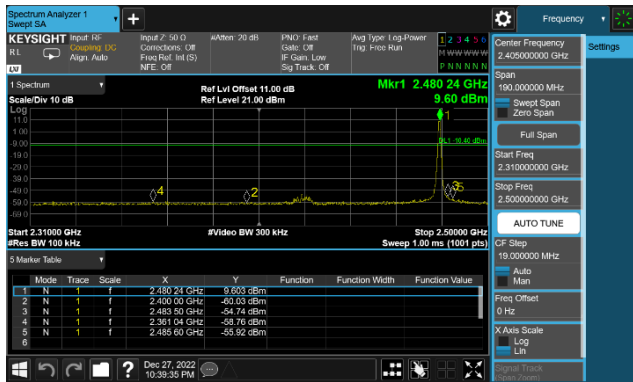


CH39 (2480MHz) LE(1Mbps)

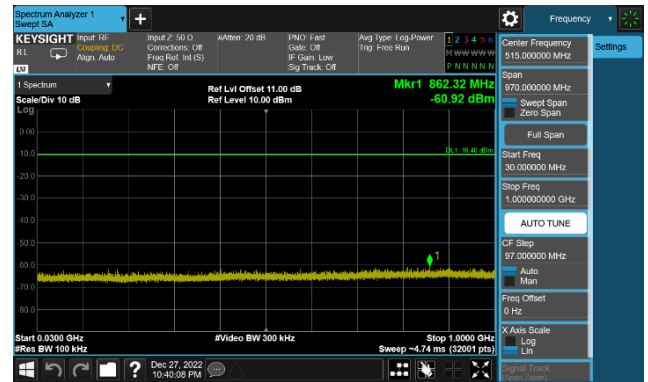


CH39 (2480MHz) LE(1Mbps)

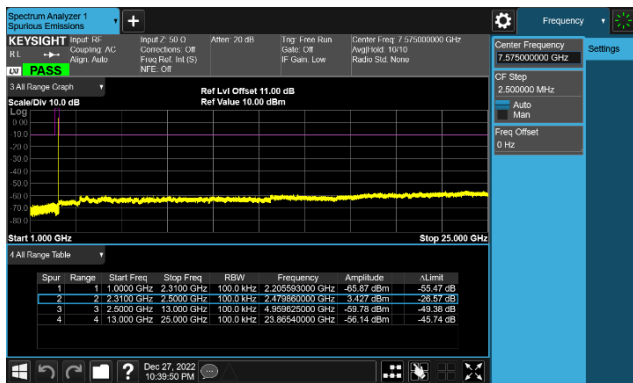


CH00 (2402MHz) LE(2Mbps)

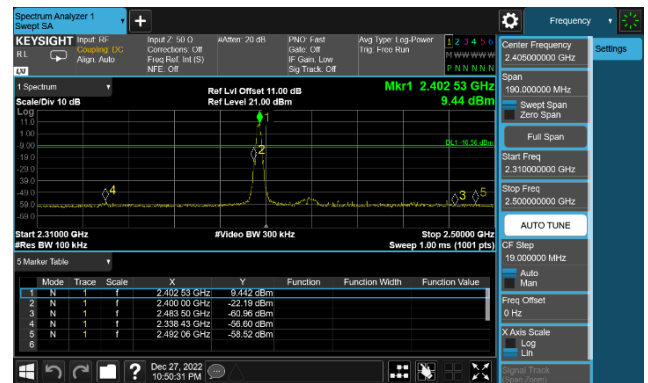


CH00 (2402MHz) LE(2Mbps)

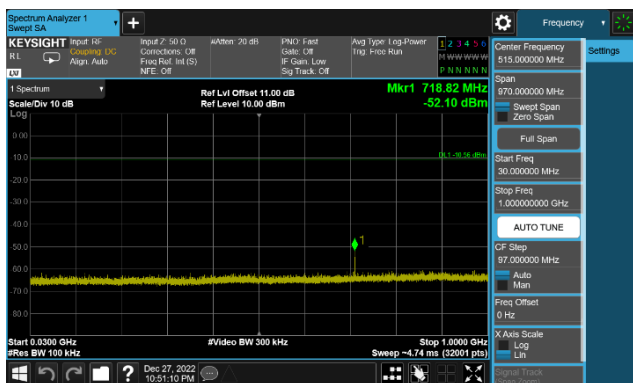


CH00 (2402MHz) LE(2Mbps)

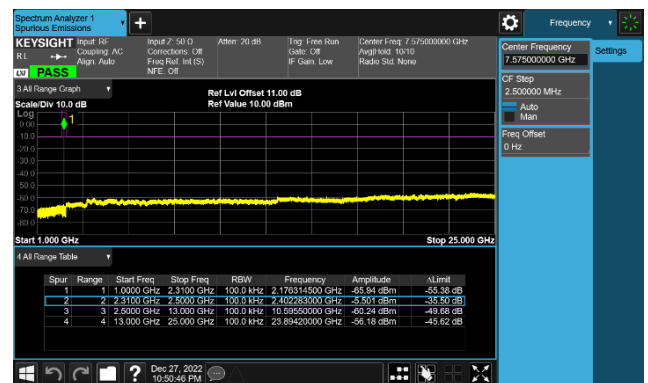


CH19 (2440MHz) LE(2Mbps)

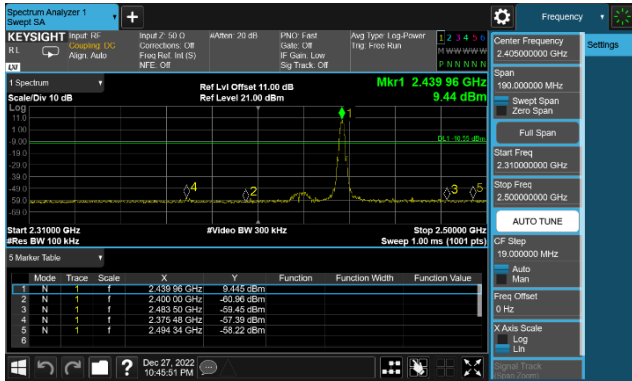


CH19 (2440MHz) LE(2Mbps)

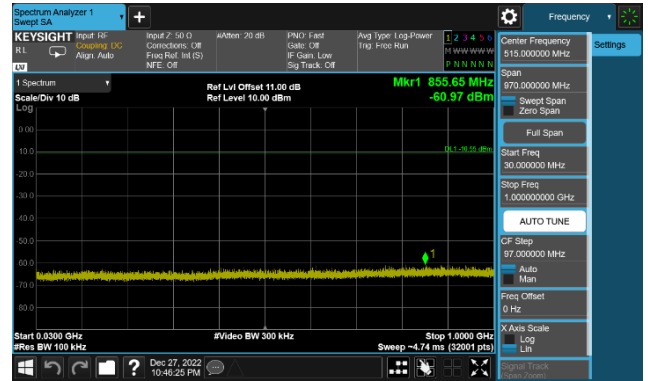


CH19 (2440MHz) LE(2Mbps)

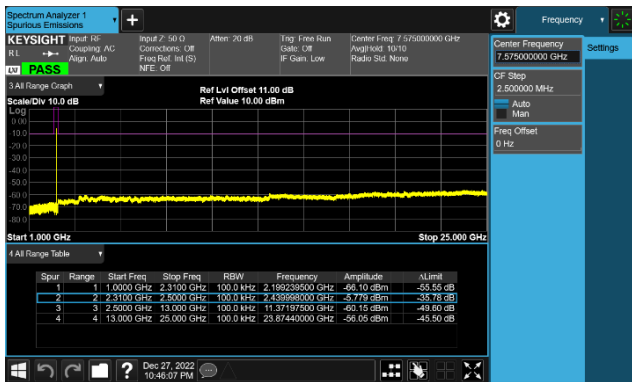


CH39 (2480MHz) LE(2Mbps)

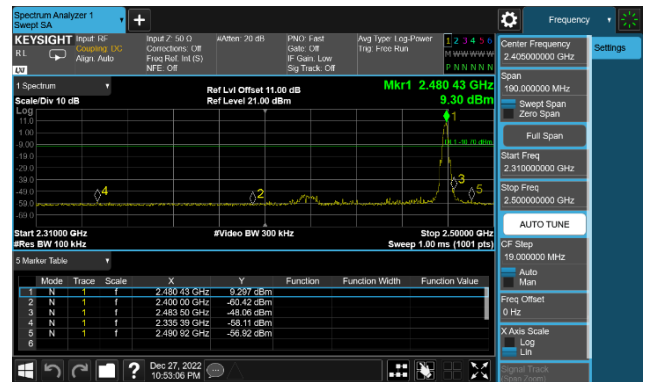

CH39 (2480MHz) LE(2Mbps)

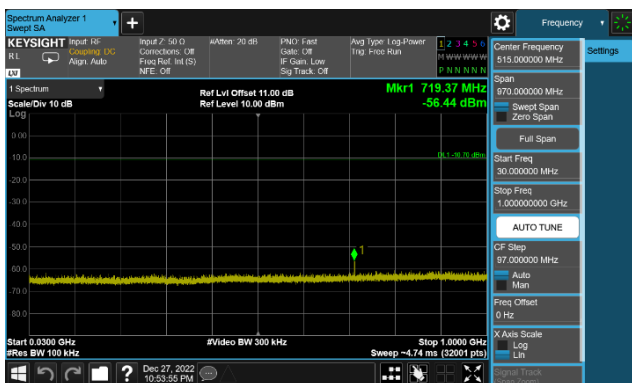

CH39 (2480MHz) LE(2Mbps)

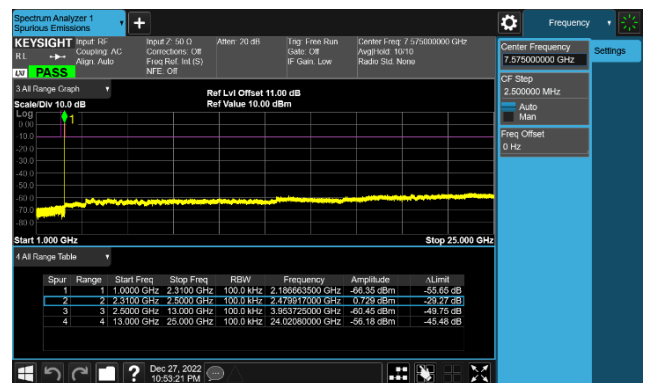

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

KDB 558074 D01v05- Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v05- Section 12.2.4 (peak power measurements)

KDB 558074 D01v05- Section 12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW \geq 1/T

4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode

5. Detector = Peak


6. Sweep time = auto

7. Trace mode = max hold

8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

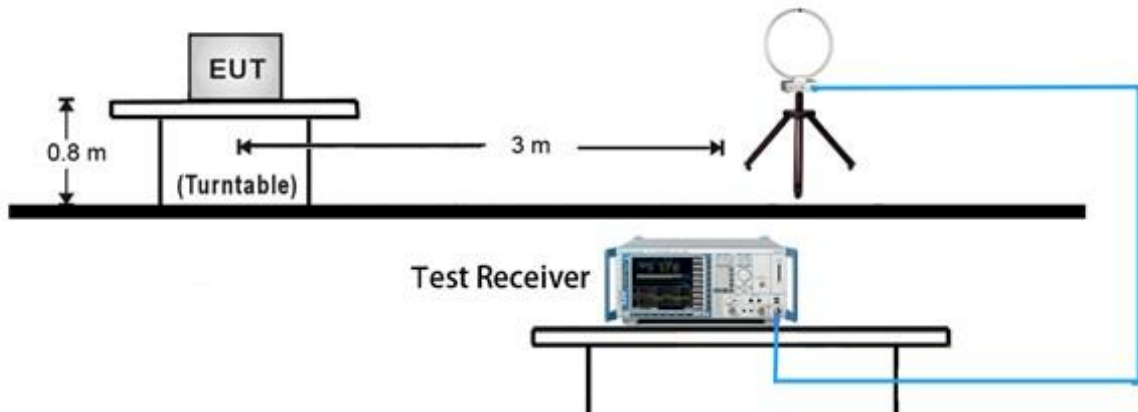


Note:

The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.


30MHz ~ 1GHz Test Setup:

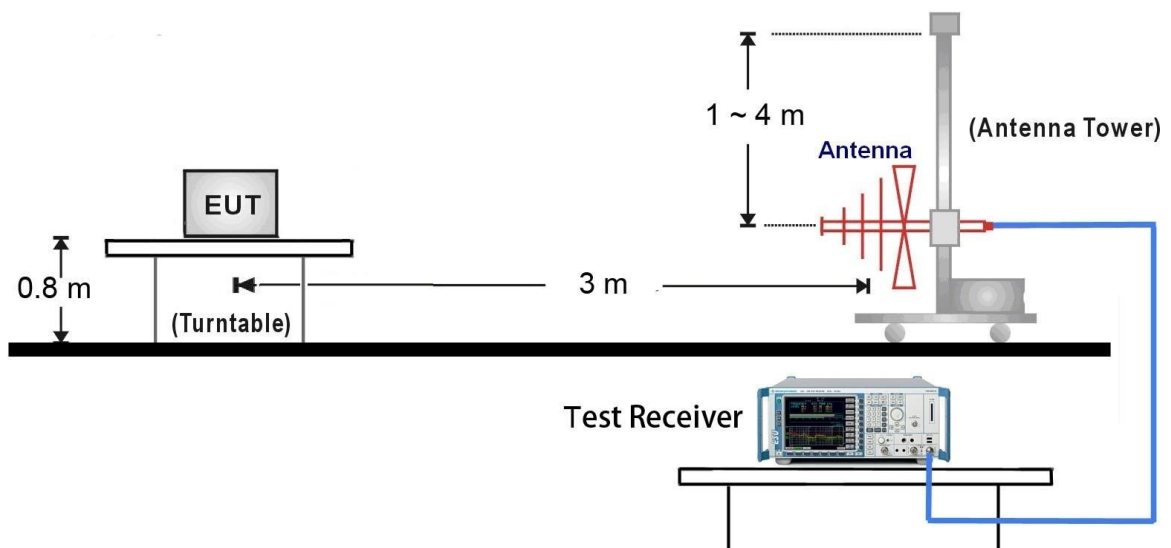

1GHz ~ 18GHz Test Setup:

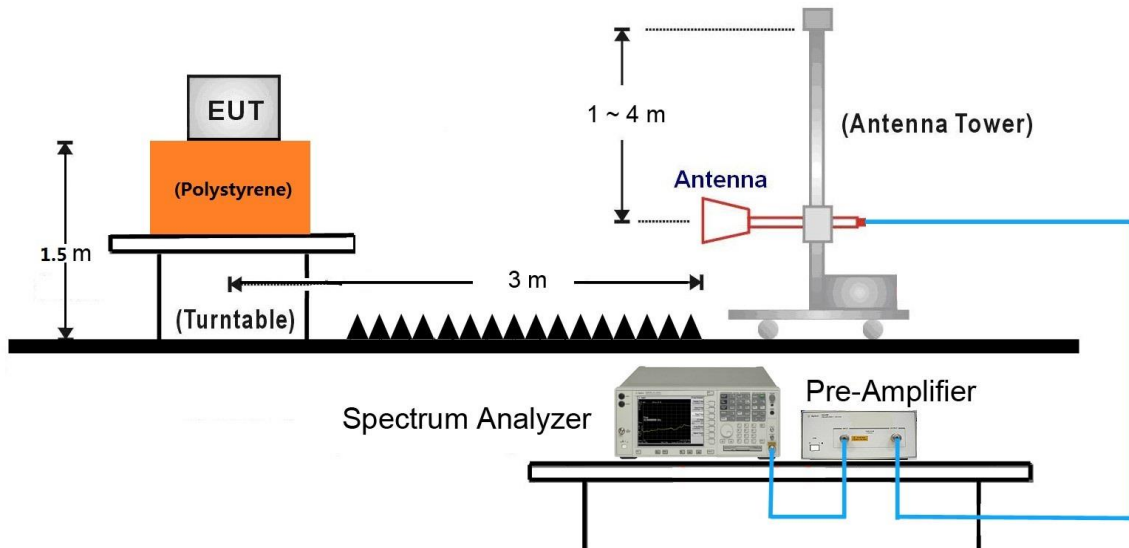


18GHz ~ 25GHz Test Setup:

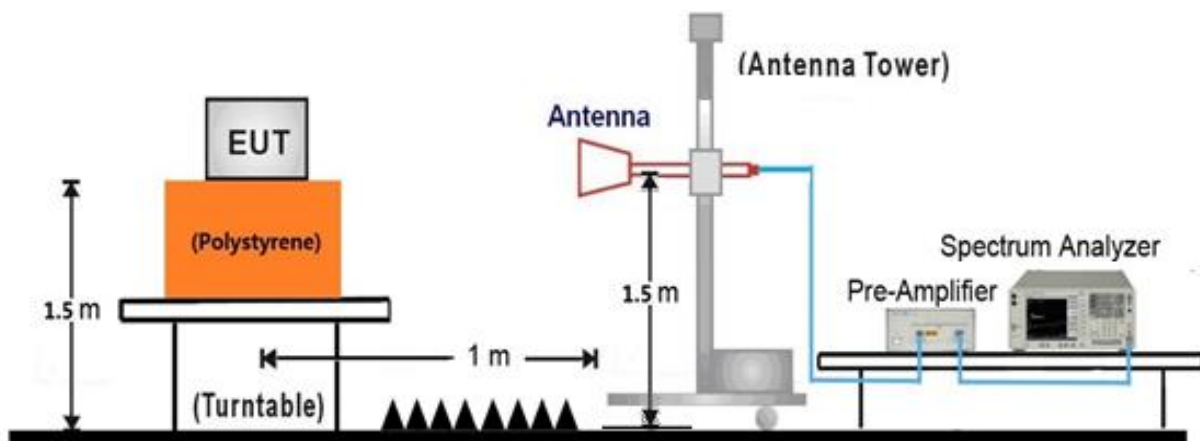

7.6.5. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	BLE_TX_1Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

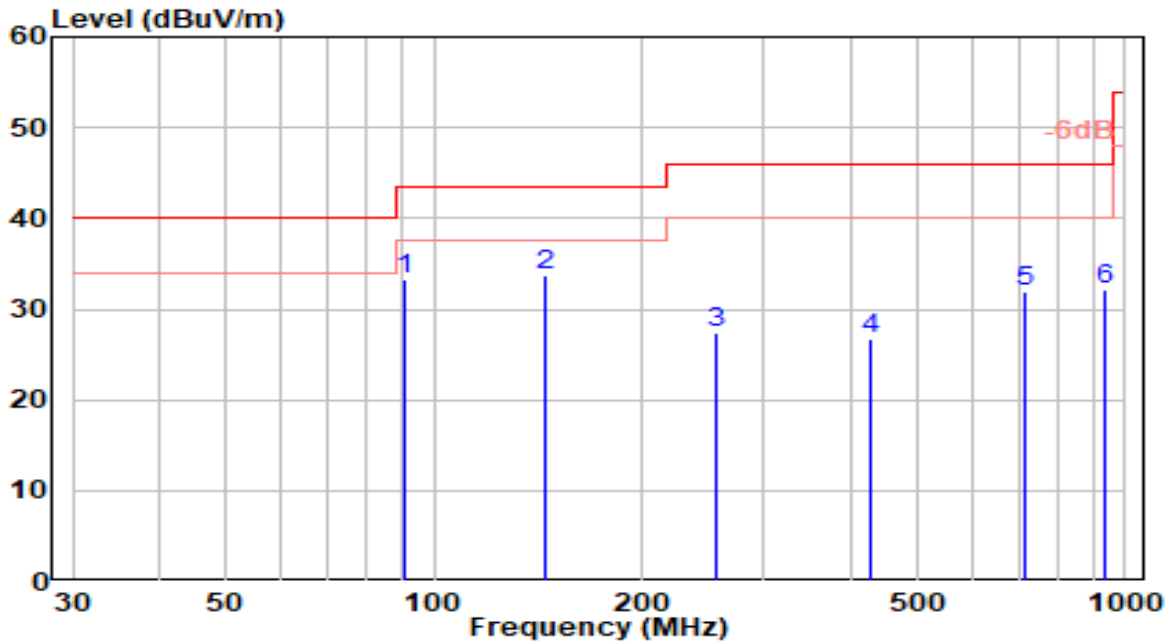


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	90.860	15.56	17.73	33.29	-10.21	43.50	100	45	QP
2	* 144.380	18.11	15.64	33.75	-9.75	43.50	200	253	QP
3	255.170	6.60	20.79	27.39	-18.61	46.00	150	19	QP
4	427.680	2.36	24.26	26.62	-19.38	46.00	200	299	QP
5	716.150	2.80	29.14	31.94	-14.06	46.00	150	83	QP
6	936.580	0.41	31.63	32.05	-13.95	46.00	100	322	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	BLE_TX_1Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

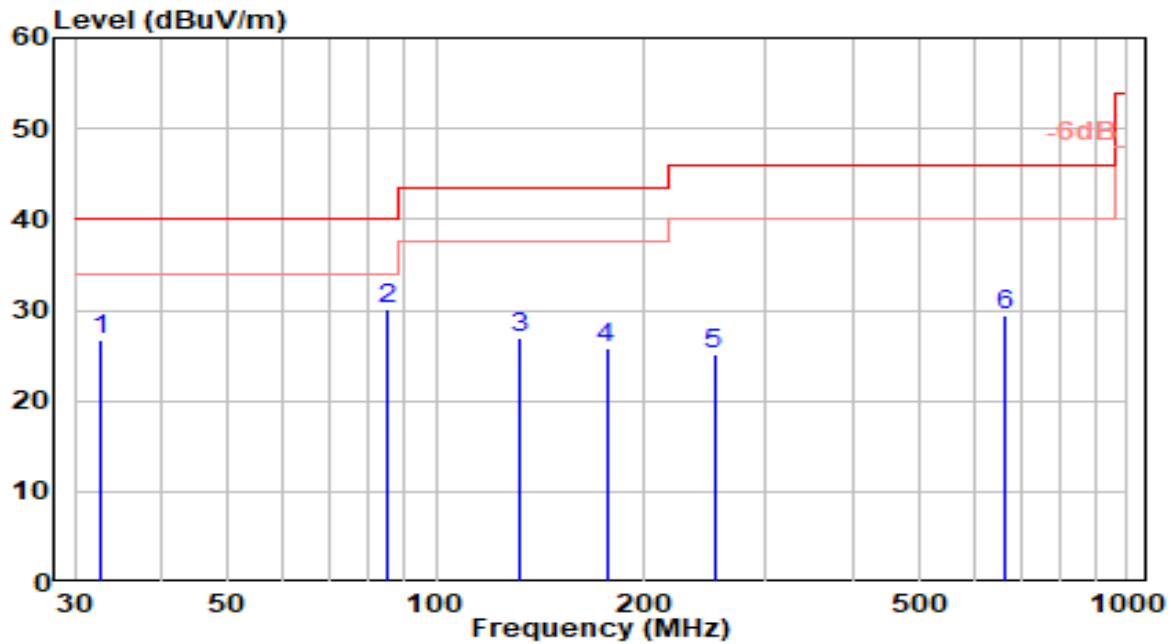


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	32.660	8.88	17.89	26.77	-13.23	40.00	100	12	QP
2	* 85.210	14.02	16.03	30.04	-9.96	40.00	200	60	QP
3	131.980	10.78	16.08	26.86	-16.64	43.50	100	26	QP
4	176.450	8.93	16.97	25.91	-17.59	43.50	200	35	QP
5	252.490	4.28	20.81	25.09	-20.91	46.00	150	108	QP
6	664.980	1.08	28.39	29.47	-16.53	46.00	200	14	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	BLE_TX_1Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

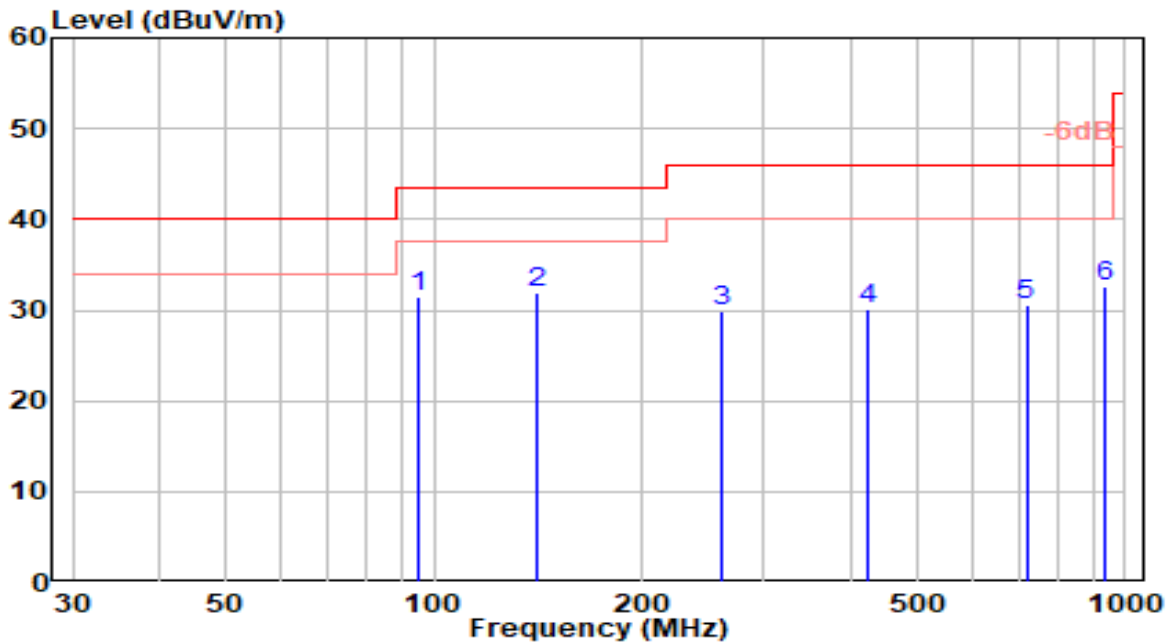


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	94.850	13.07	18.42	31.49	-12.01	43.50	150	74	QP
2	* 141.350	16.46	15.57	32.03	-11.47	43.50	200	267	QP
3	259.730	9.17	20.76	29.93	-16.07	46.00	200	33	QP
4	424.740	5.92	24.23	30.16	-15.84	46.00	200	313	QP
5	719.600	1.29	29.19	30.48	-15.52	46.00	150	97	QP
6	934.570	0.95	31.63	32.59	-13.41	46.00	100	336	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	BLE_TX_1Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

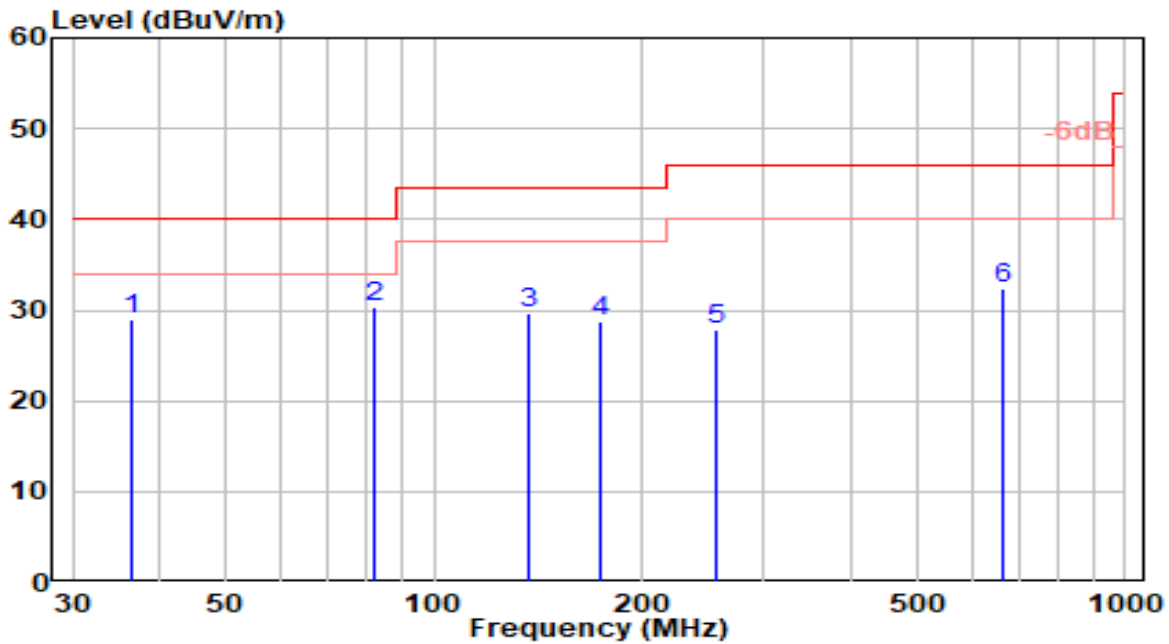


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	36.650	9.74	19.16	28.90	-11.10	40.00	200	40	QP
2	* 82.180	15.29	15.05	30.33	-9.67	40.00	100	88	QP
3	136.540	13.89	15.77	29.67	-13.83	43.50	150	54	QP
4	173.510	11.90	16.82	28.72	-14.78	43.50	100	63	QP
5	255.940	7.11	20.79	27.90	-18.10	46.00	150	136	QP
6	662.970	3.93	28.36	32.28	-13.72	46.00	200	42	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2023-01-13
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	BLE_TX_Left Ear + Right Ear	Test Voltage	AC 120V/60Hz

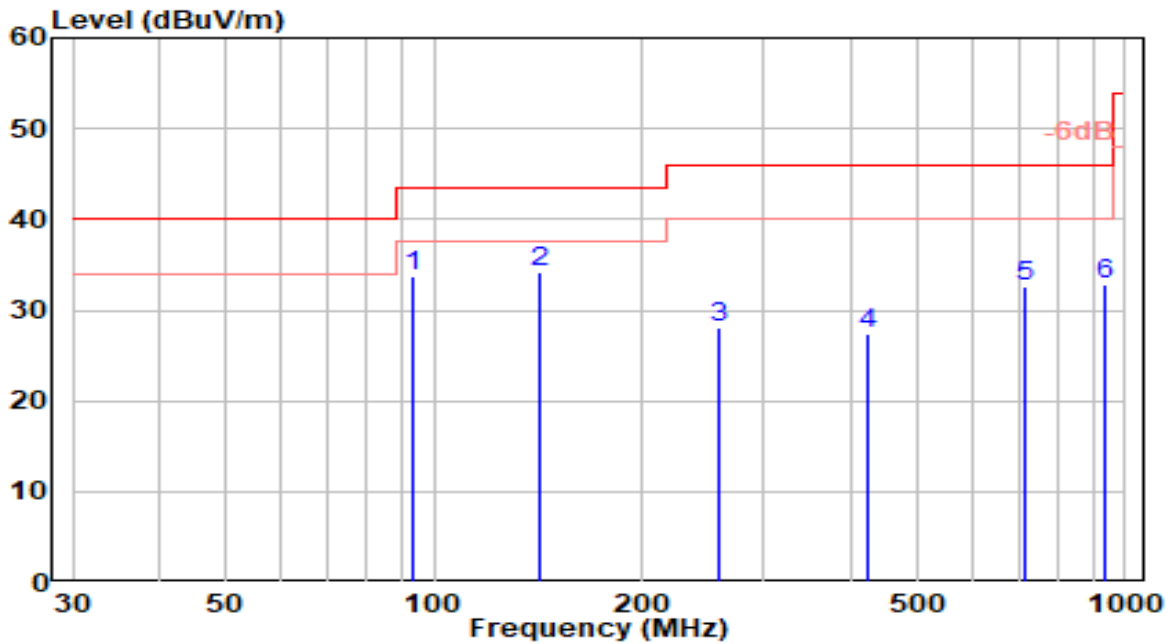


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	93.520	15.49	18.19	33.68	-9.82	43.50	150	59	QP
2	* 142.360	18.63	15.59	34.22	-9.28	43.50	200	267	QP
3	258.210	7.35	20.77	28.12	-17.88	46.00	100	33	QP
4	425.720	3.11	24.24	27.35	-18.65	46.00	100	313	QP
5	718.450	3.50	29.17	32.67	-13.33	46.00	150	97	QP
6	935.240	1.14	31.63	32.78	-13.22	46.00	100	336	QP

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2023-01-13
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	BLE_TX_Left Ear + Right Ear	Test Voltage	AC 120V/60Hz

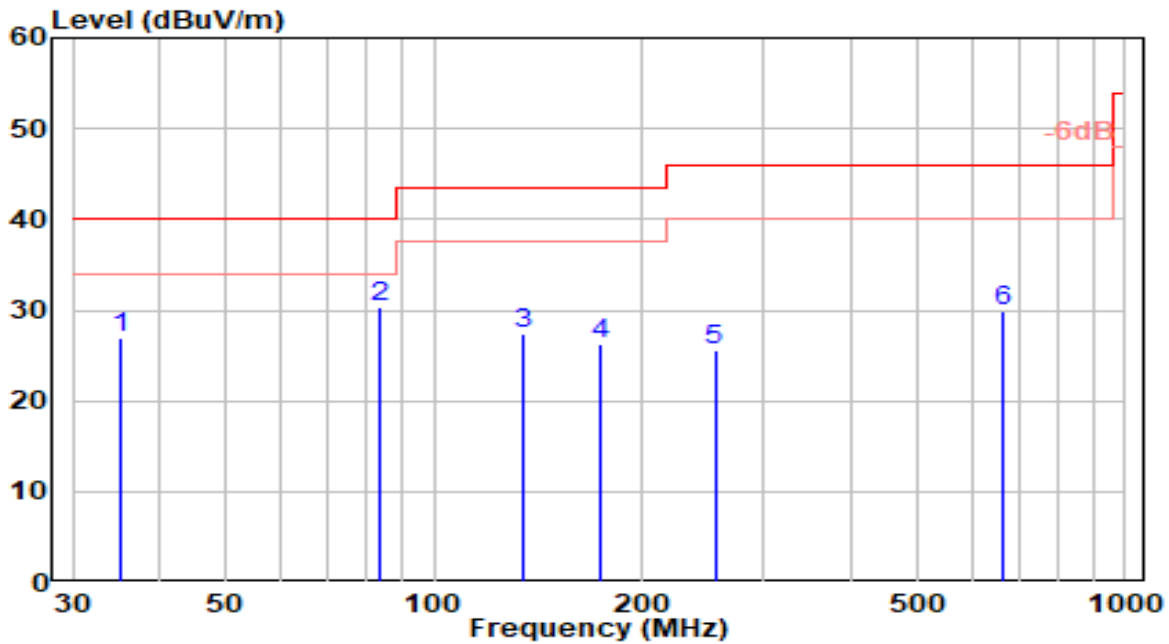


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	35.320	8.25	18.64	26.89	-13.11	40.00	200	26	QP
2	* 83.190	14.87	15.37	30.24	-9.76	40.00	150	74	QP
3	135.020	11.44	15.87	27.32	-16.18	43.50	100	40	QP
4	174.490	9.50	16.87	26.37	-17.13	43.50	200	49	QP
5	254.790	4.75	20.79	25.55	-20.45	46.00	150	122	QP
6	663.640	1.57	28.37	29.93	-16.07	46.00	200	28	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

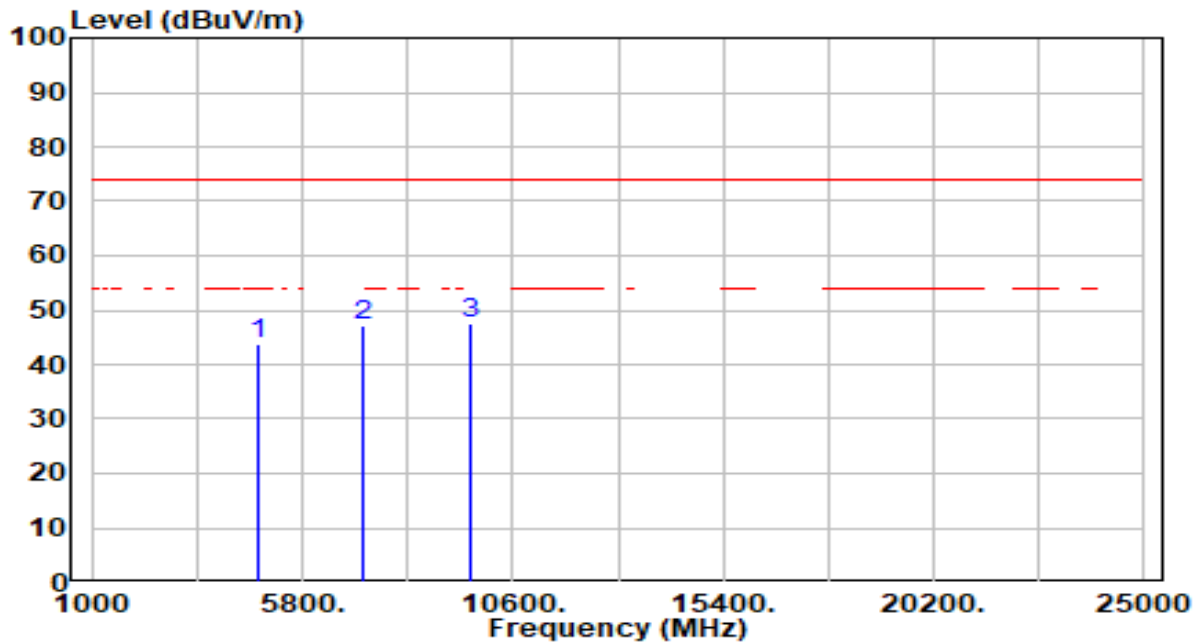


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	43.75	0.21	43.96	-30.04	74.00	300	196	Peak
2	7206.000	41.31	5.82	47.14	-26.86	74.00	300	8	Peak
3	* 9608.000	42.20	5.32	47.52	-26.48	74.00	300	134	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

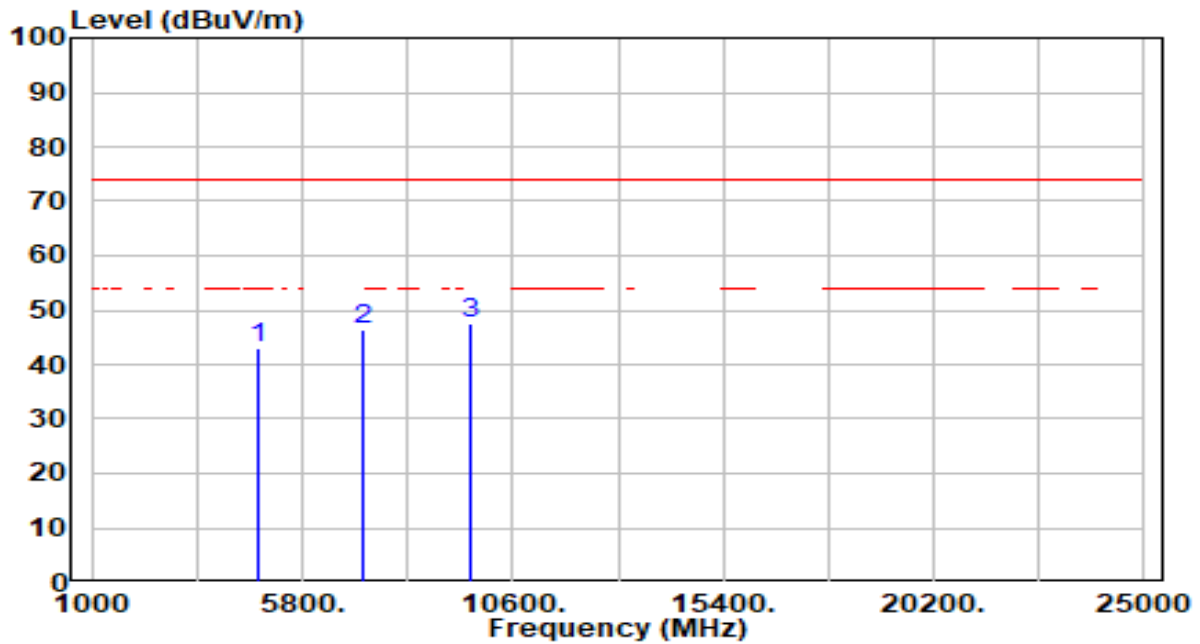


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	42.63	0.21	42.84	-31.16	74.00	300	88	Peak
2	7206.000	40.43	5.82	46.26	-27.74	74.00	200	86	Peak
3	* 9608.000	42.07	5.32	47.39	-26.61	74.00	300	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 19_Left Ear	Test Voltage	By Notebook PC

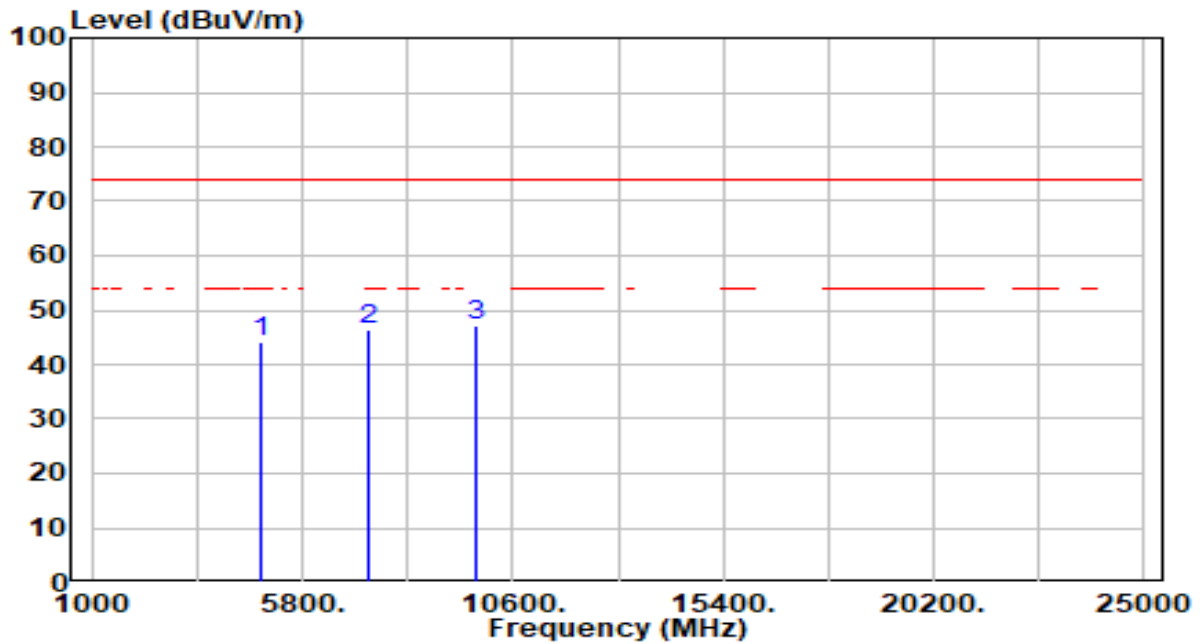


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	43.68	0.37	44.05	-29.95	74.00	300	108	Peak
2	7320.000	40.72	5.79	46.51	-27.49	74.00	300	31	Peak
3	* 9760.000	41.70	5.34	47.04	-26.96	74.00	300	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 19_Left Ear	Test Voltage	By Notebook PC

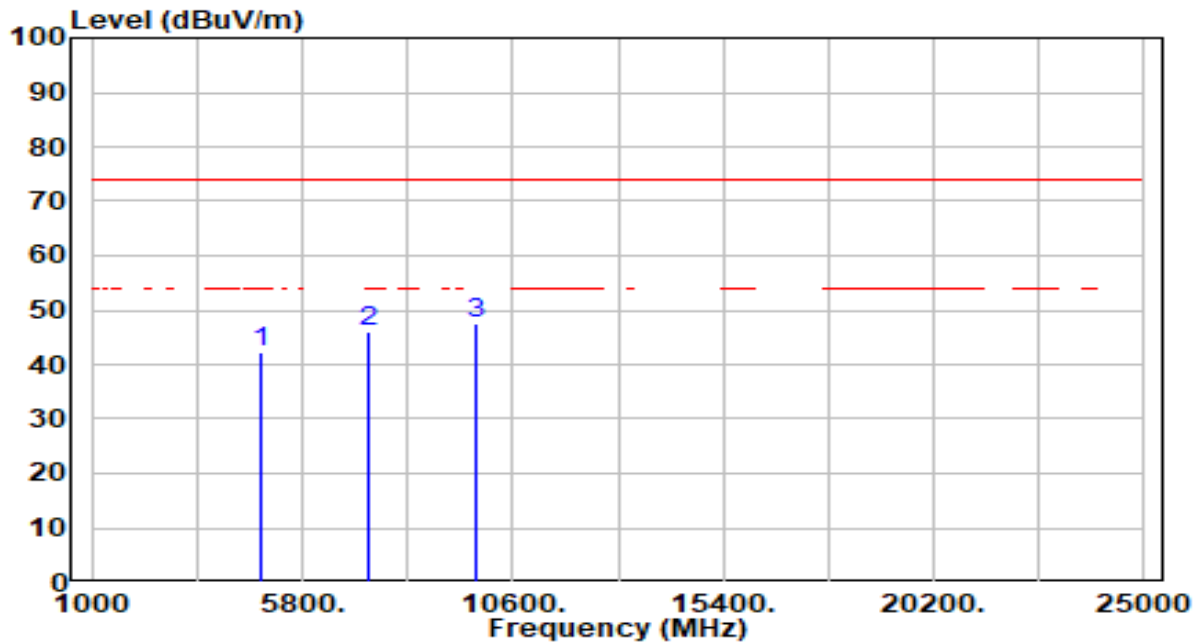


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	41.93	0.37	42.29	-31.71	74.00	300	360	Peak
2	7320.000	40.36	5.79	46.15	-27.85	74.00	300	309	Peak
3	* 9760.000	42.33	5.34	47.68	-26.32	74.00	300	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 39_Left Ear	Test Voltage	By Notebook PC

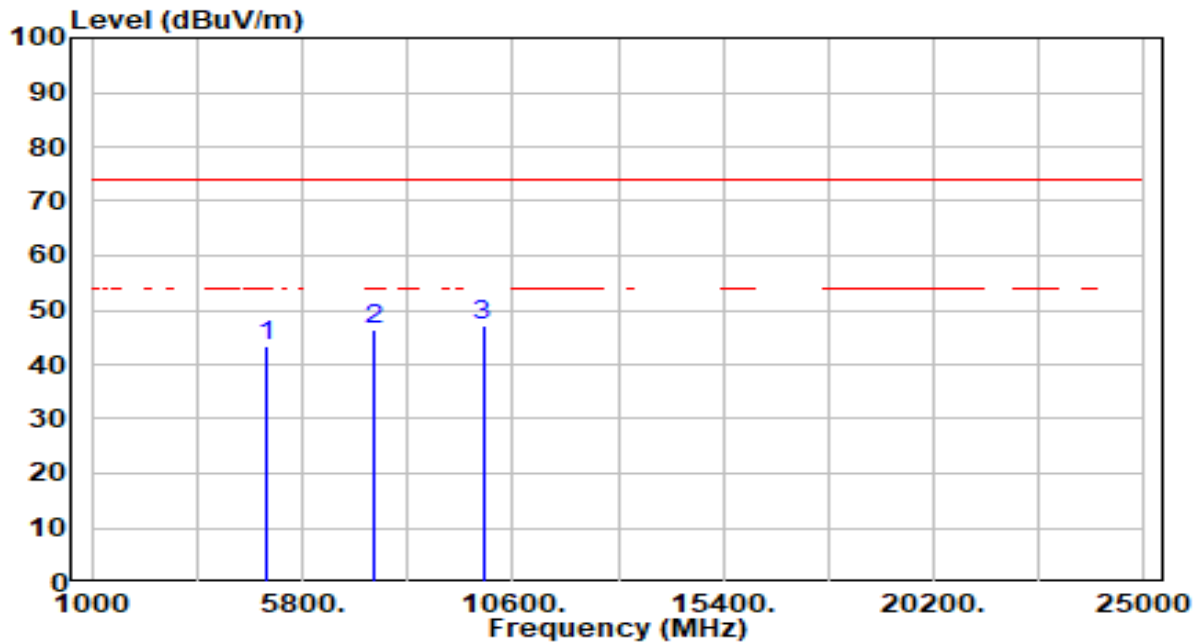


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	42.82	0.53	43.35	-30.65	74.00	300	131	Peak
2	7440.000	40.84	5.74	46.58	-27.42	74.00	300	0	Peak
3	* 9920.000	41.90	5.43	47.32	-26.68	74.00	300	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 39_Left Ear	Test Voltage	By Notebook PC

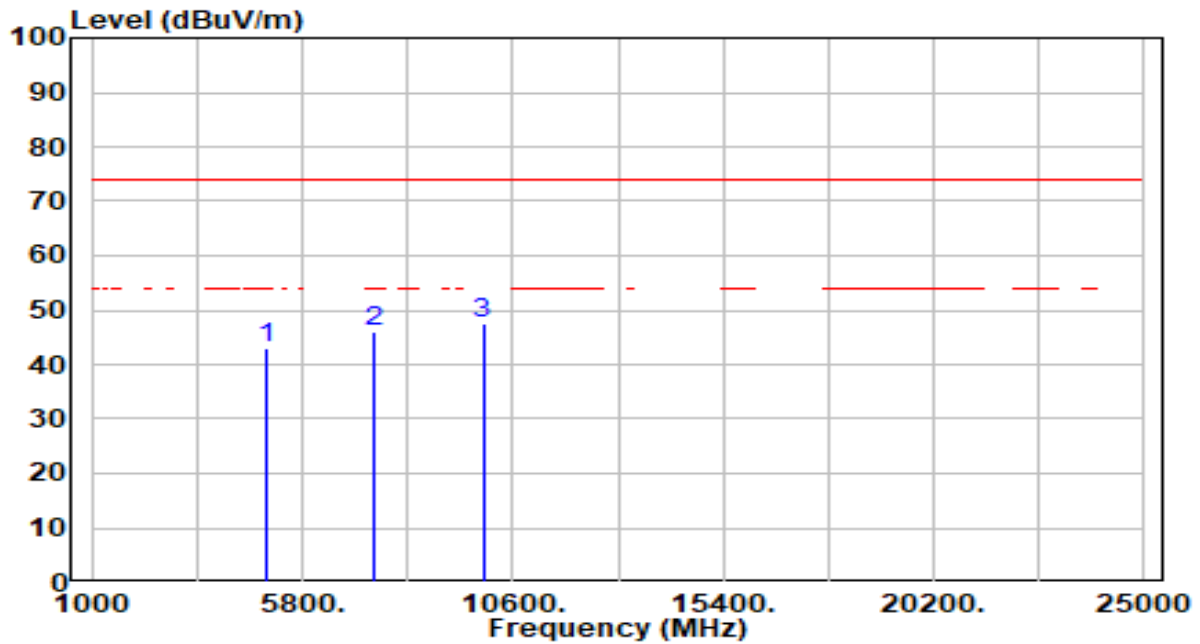


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	42.35	0.53	42.88	-31.12	74.00	300	252	Peak
2	7440.000	40.15	5.74	45.89	-28.11	74.00	300	14	Peak
3	* 9920.000	42.20	5.43	47.62	-26.38	74.00	300	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

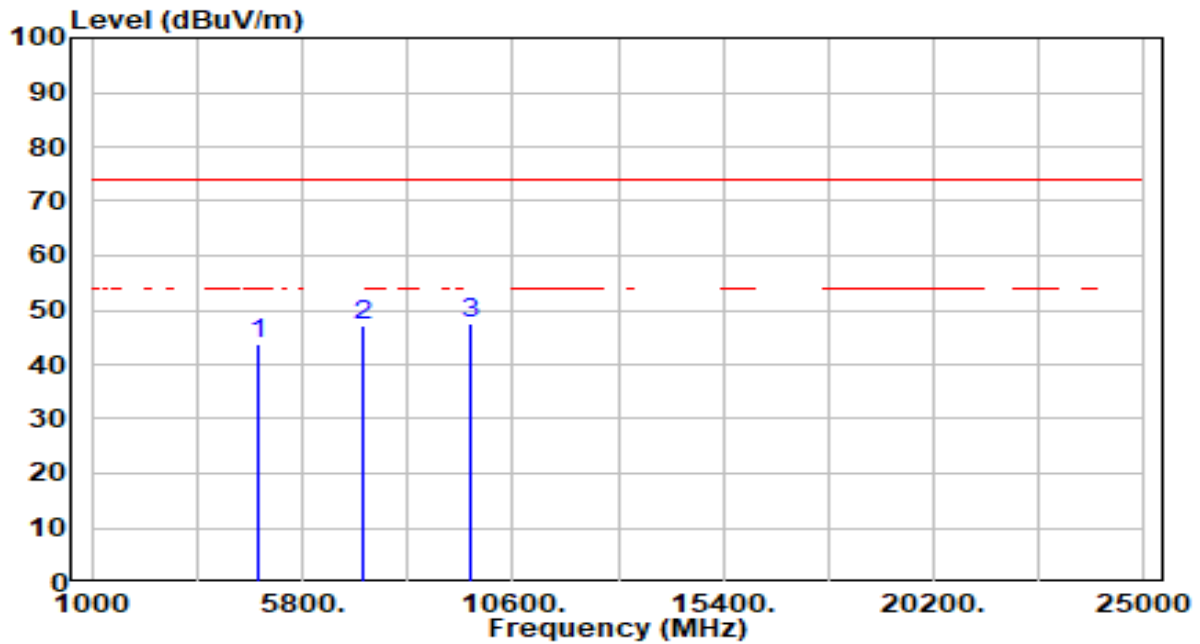


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	43.75	0.21	43.96	-30.04	74.00	300	196	Peak
2	7206.000	41.31	5.82	47.14	-26.86	74.00	300	8	Peak
3	* 9608.000	42.20	5.32	47.52	-26.48	74.00	300	134	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

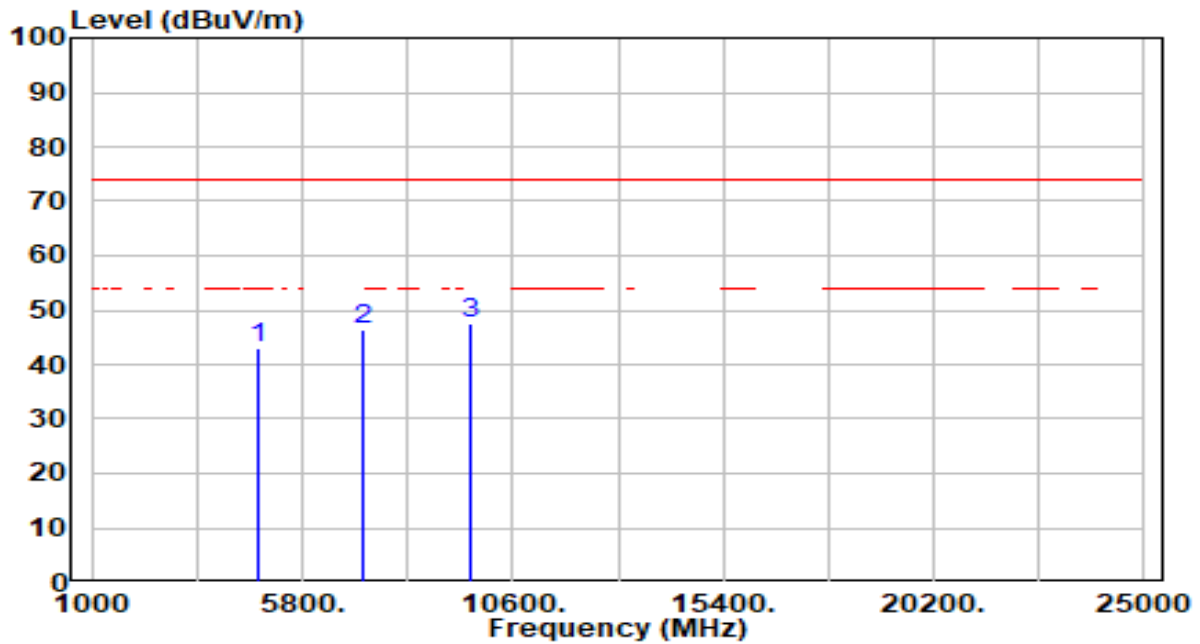


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	42.63	0.21	42.84	-31.16	74.00	300	88	Peak
2	7206.000	40.43	5.82	46.26	-27.74	74.00	200	86	Peak
3	* 9608.000	42.07	5.32	47.39	-26.61	74.00	300	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 19_Left Ear	Test Voltage	By Notebook PC

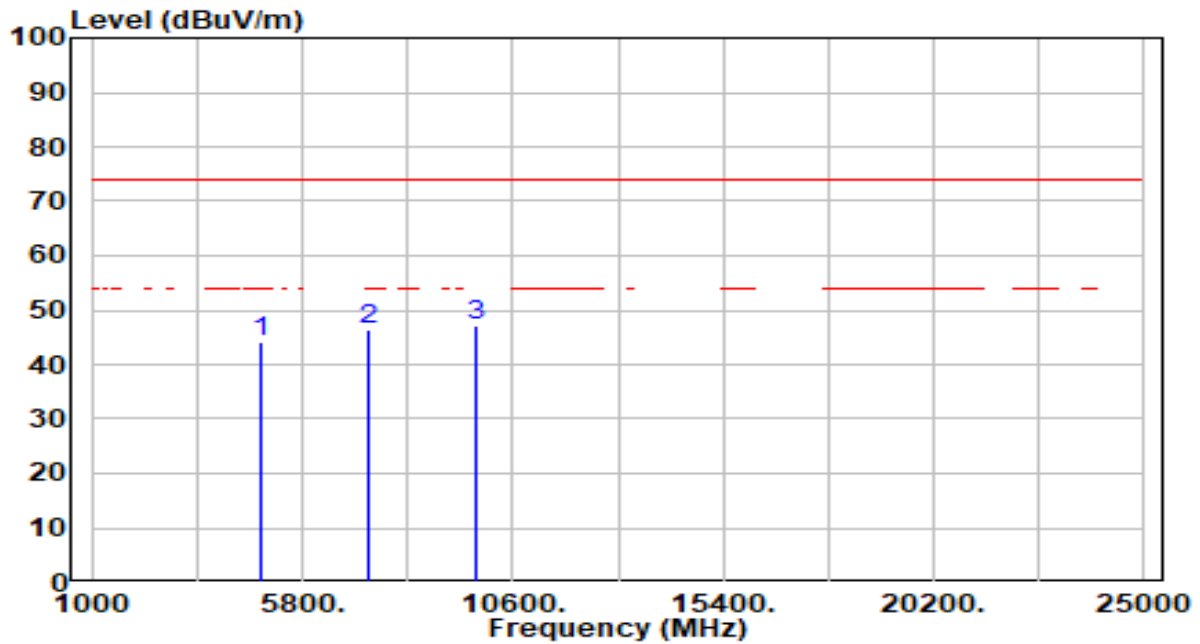


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	43.68	0.37	44.05	-29.95	74.00	300	108	Peak
2	7320.000	40.72	5.79	46.51	-27.49	74.00	300	31	Peak
3	* 9760.000	41.70	5.34	47.04	-26.96	74.00	300	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 19_Left Ear	Test Voltage	By Notebook PC

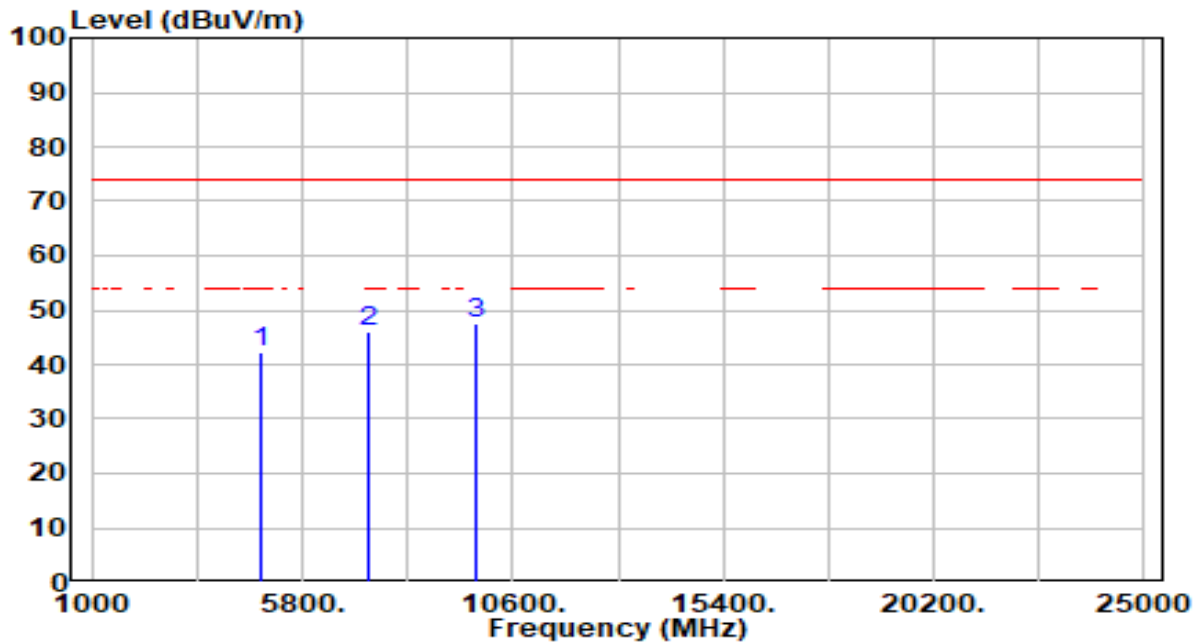


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	41.93	0.37	42.29	-31.71	74.00	300	360	Peak
2	7320.000	40.36	5.79	46.15	-27.85	74.00	300	309	Peak
3	* 9760.000	42.33	5.34	47.68	-26.32	74.00	300	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 39_Left Ear	Test Voltage	By Notebook PC

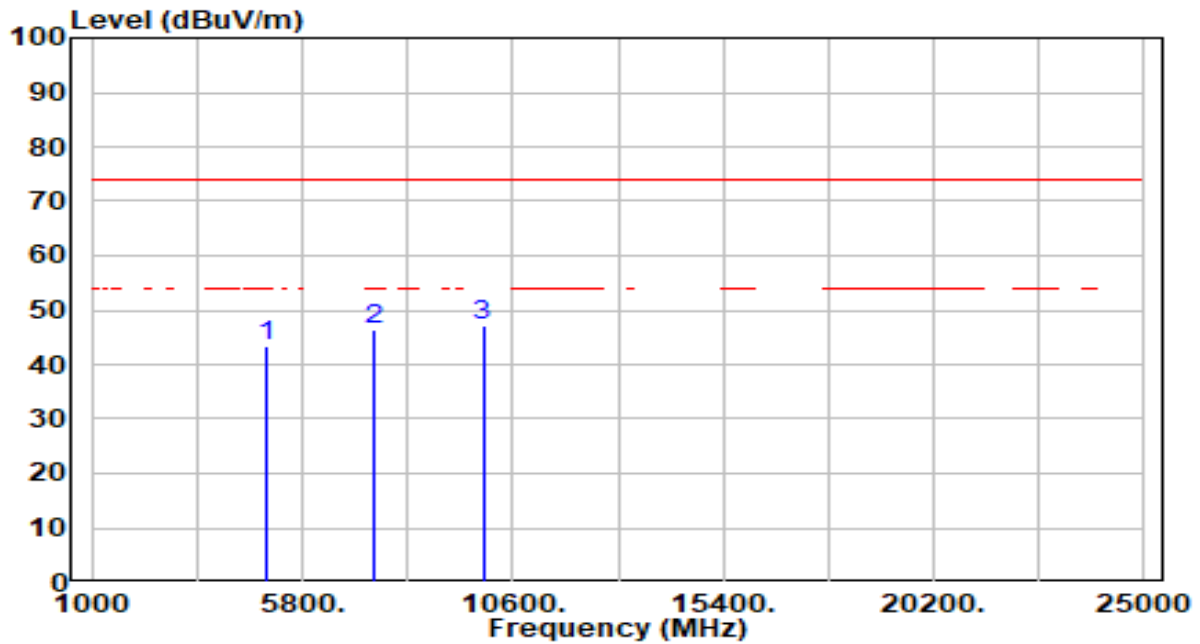


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	42.82	0.53	43.35	-30.65	74.00	300	131	Peak
2	7440.000	40.84	5.74	46.58	-27.42	74.00	300	0	Peak
3	* 9920.000	41.90	5.43	47.32	-26.68	74.00	300	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 39_Left Ear	Test Voltage	By Notebook PC

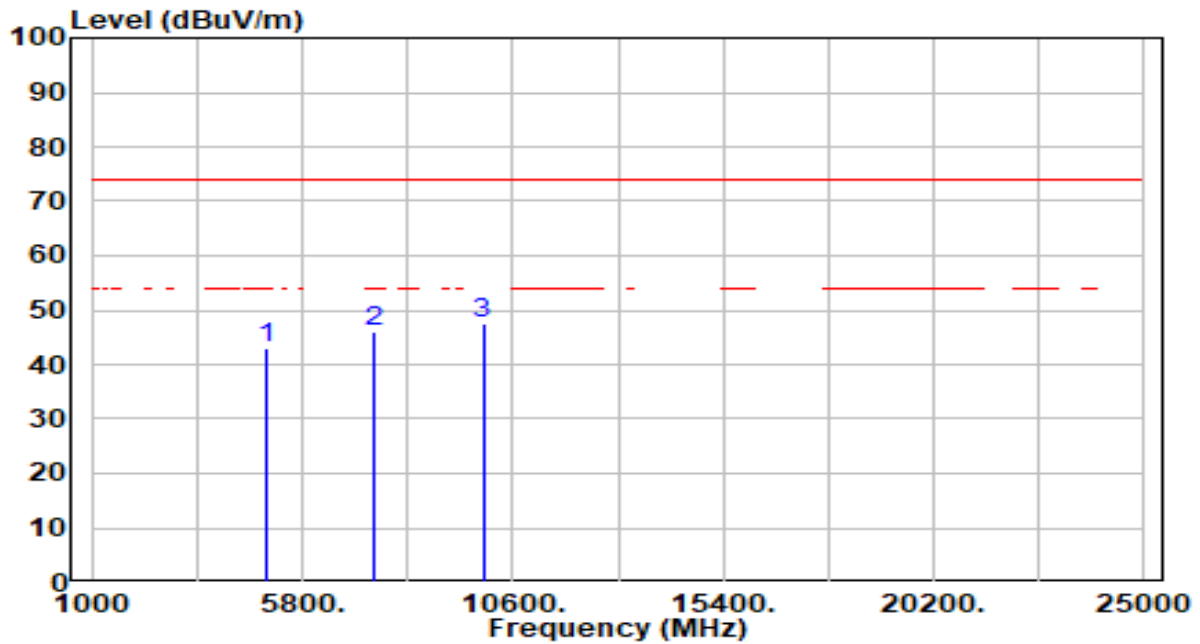


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	42.35	0.53	42.88	-31.12	74.00	300	252	Peak
2	7440.000	40.15	5.74	45.89	-28.11	74.00	300	14	Peak
3	* 9920.000	42.20	5.43	47.62	-26.38	74.00	300	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

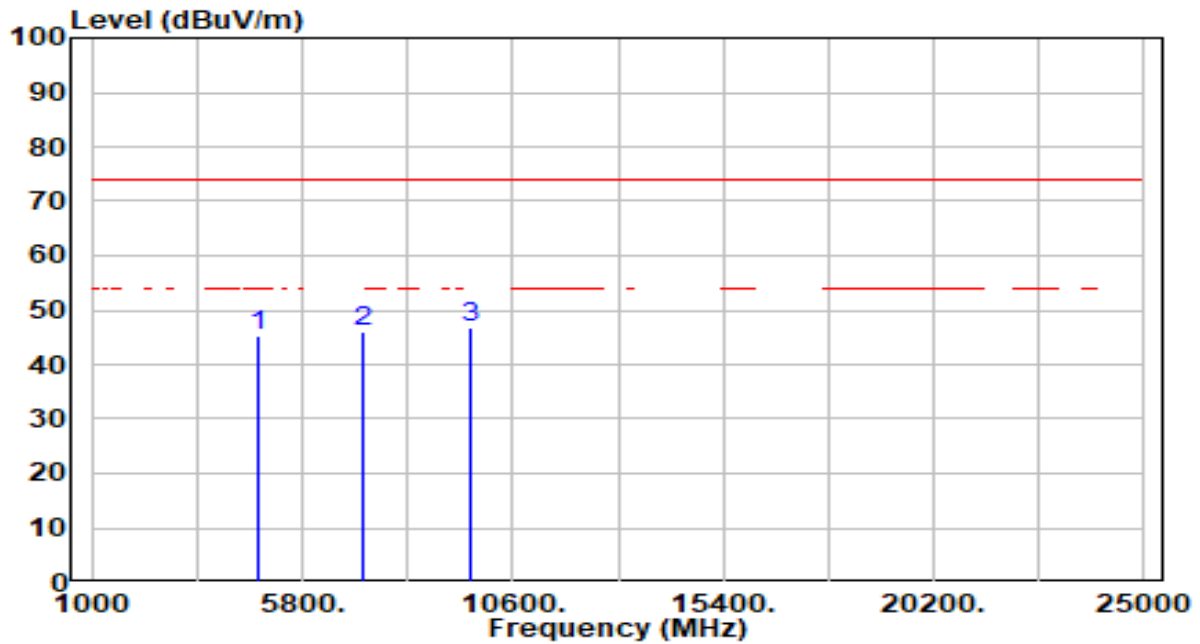


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	44.96	0.21	45.17	-28.83	74.00	100	30	Peak
2	7206.000	40.14	5.82	45.96	-28.04	74.00	100	300	Peak
3	* 9608.000	41.64	5.32	46.96	-27.04	74.00	100	33	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

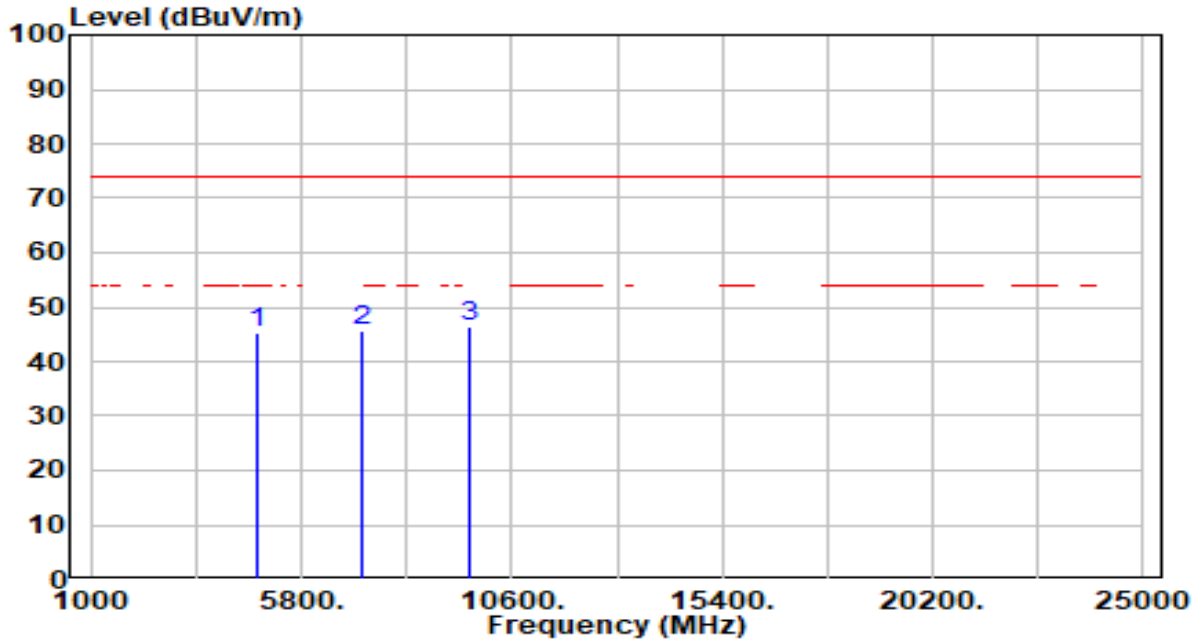


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	45.11	0.21	45.32	-28.68	74.00	100	334	Peak
2	7206.000	39.81	5.82	45.63	-28.37	74.00	100	292	Peak
3	* 9608.000	41.19	5.32	46.51	-27.49	74.00	100	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 19_Right Ear	Test Voltage	By Notebook PC

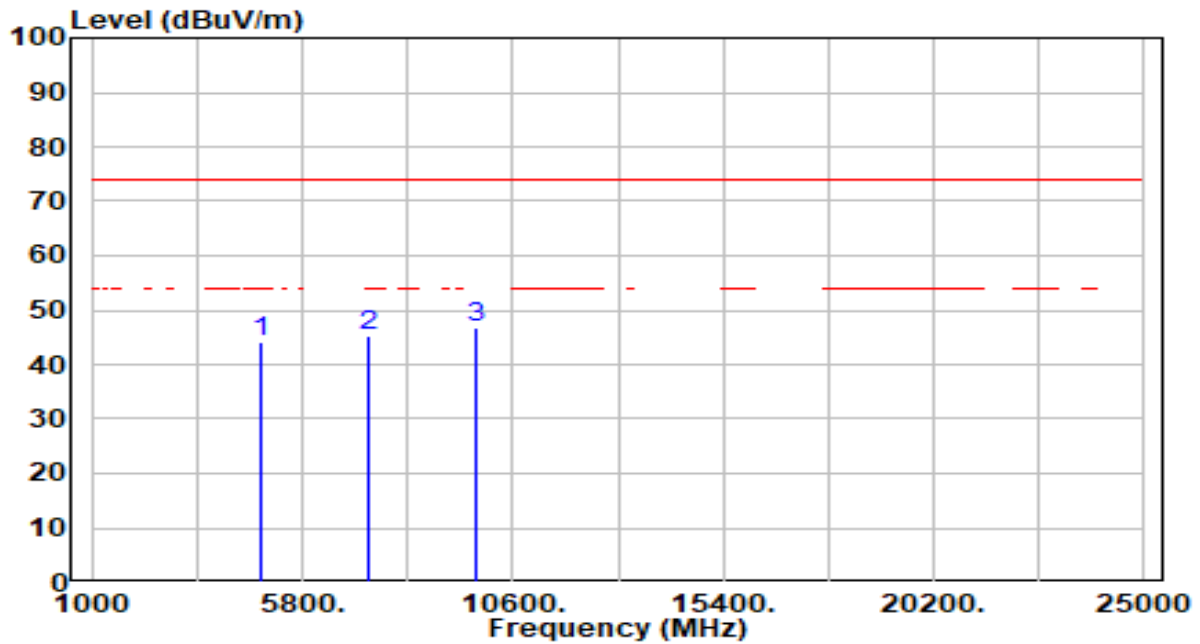


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	43.85	0.37	44.22	-29.78	74.00	100	0	Peak
2	7320.000	39.61	5.79	45.40	-28.60	74.00	100	101	Peak
3	* 9760.000	41.58	5.34	46.92	-27.08	74.00	100	59	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 19_Right Ear	Test Voltage	By Notebook PC

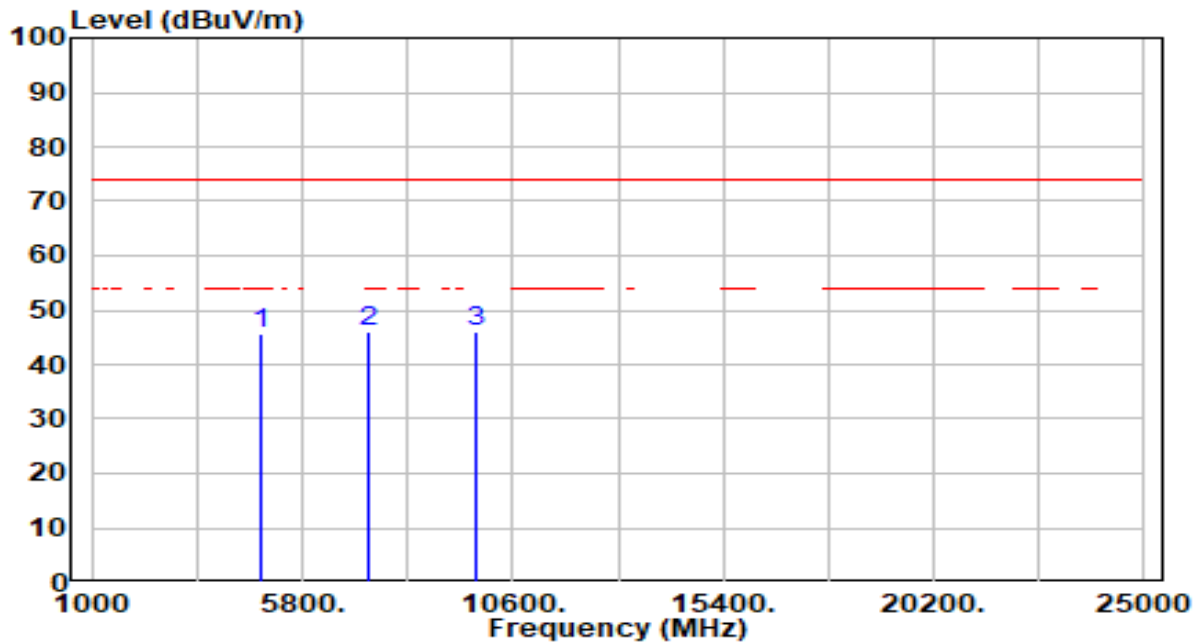


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	45.28	0.37	45.64	-28.36	74.00	100	215	Peak
2	7320.000	40.25	5.79	46.04	-27.96	74.00	100	328	Peak
3	* 9760.000	40.75	5.34	46.09	-27.91	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 39_Right Ear	Test Voltage	By Notebook PC

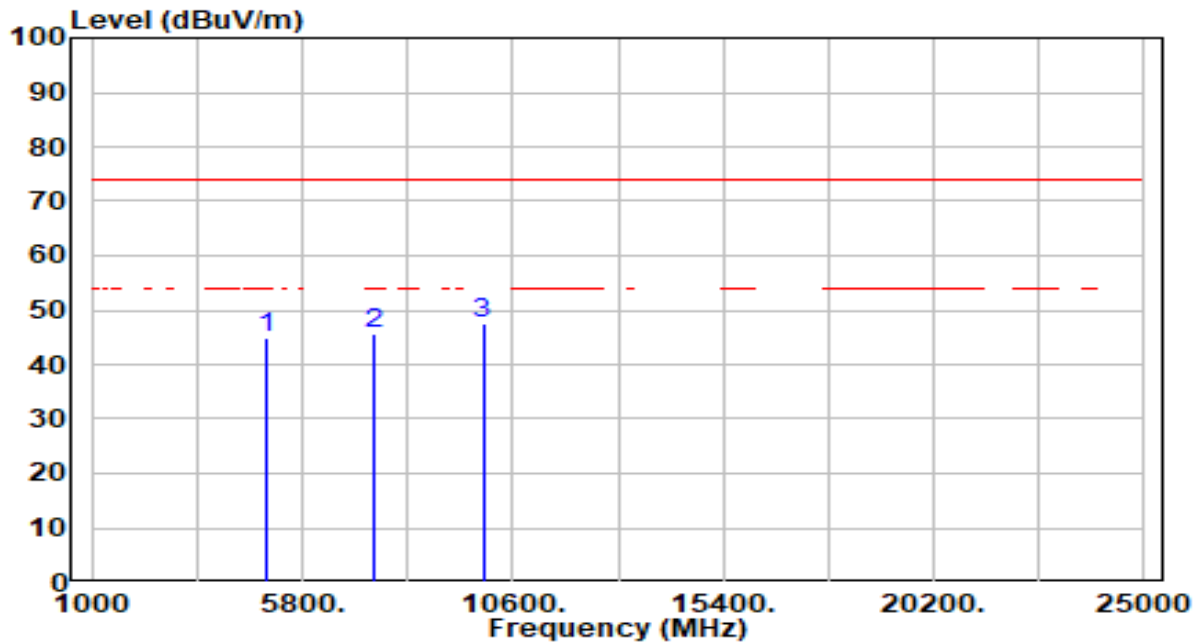


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	44.39	0.53	44.91	-29.09	74.00	100	0	Peak
2	7440.000	39.83	5.74	45.57	-28.43	74.00	100	316	Peak
3	* 9920.000	42.03	5.43	47.45	-26.55	74.00	100	191	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 39_Right Ear	Test Voltage	By Notebook PC

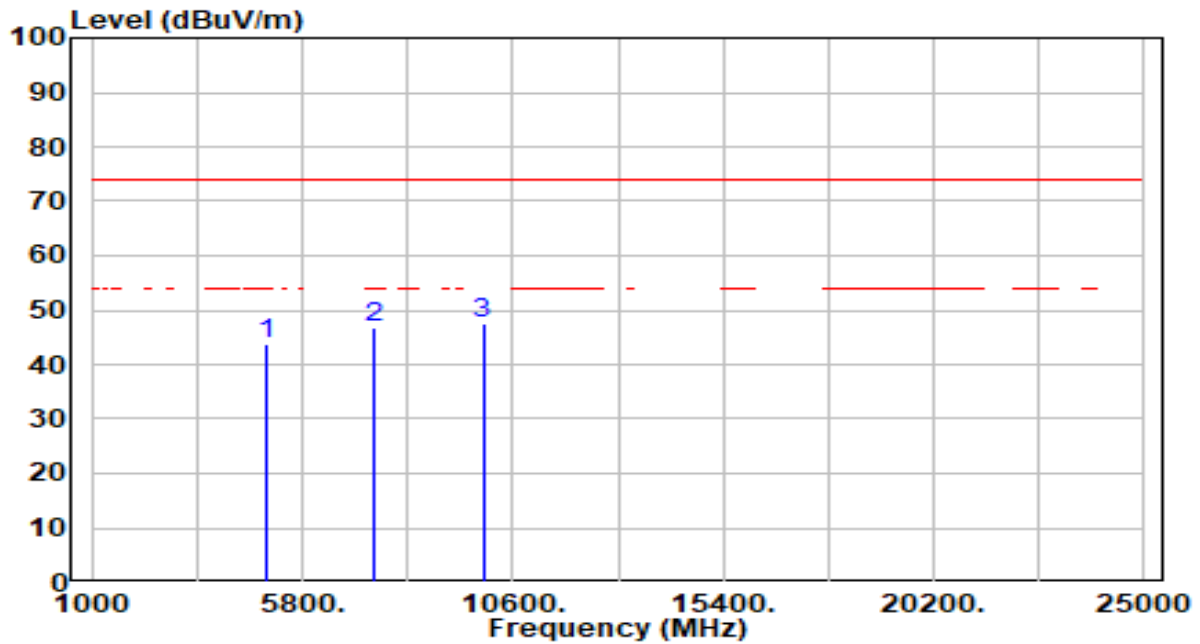


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	43.35	0.53	43.87	-30.13	74.00	100	227	Peak
2	7440.000	41.11	5.74	46.85	-27.15	74.00	100	52	Peak
3	* 9920.000	41.98	5.43	47.41	-26.59	74.00	100	84	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

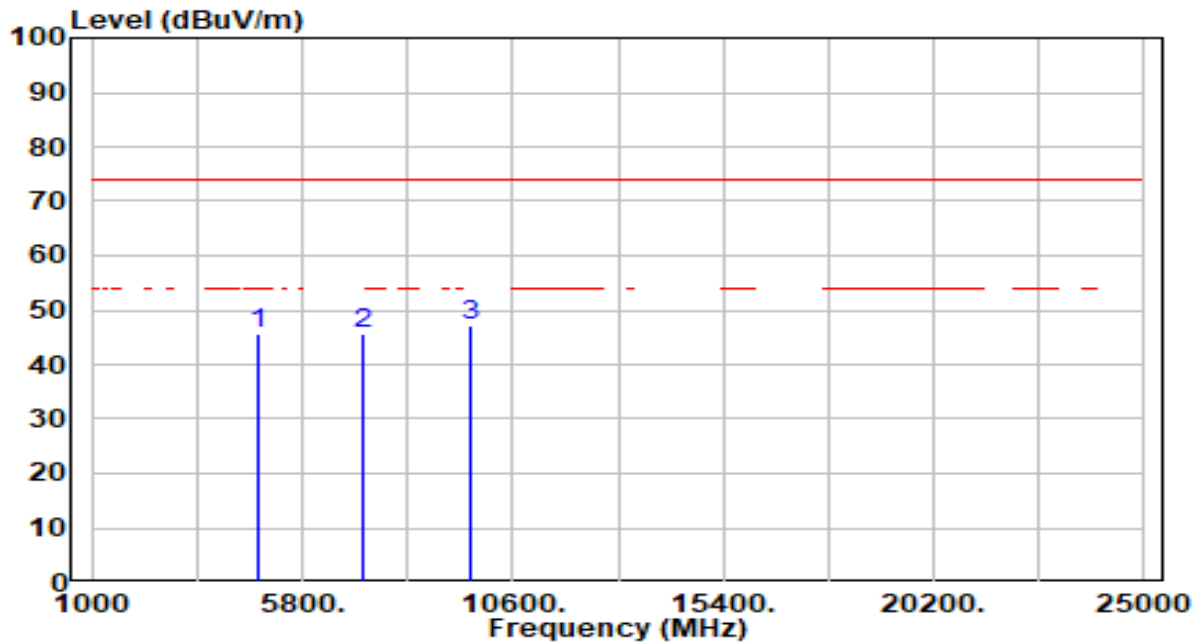


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	45.39	0.21	45.60	-28.40	74.00	100	45	Peak
2	7206.000	39.67	5.82	45.49	-28.51	74.00	100	315	Peak
3	* 9608.000	41.98	5.32	47.30	-26.70	74.00	100	48	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

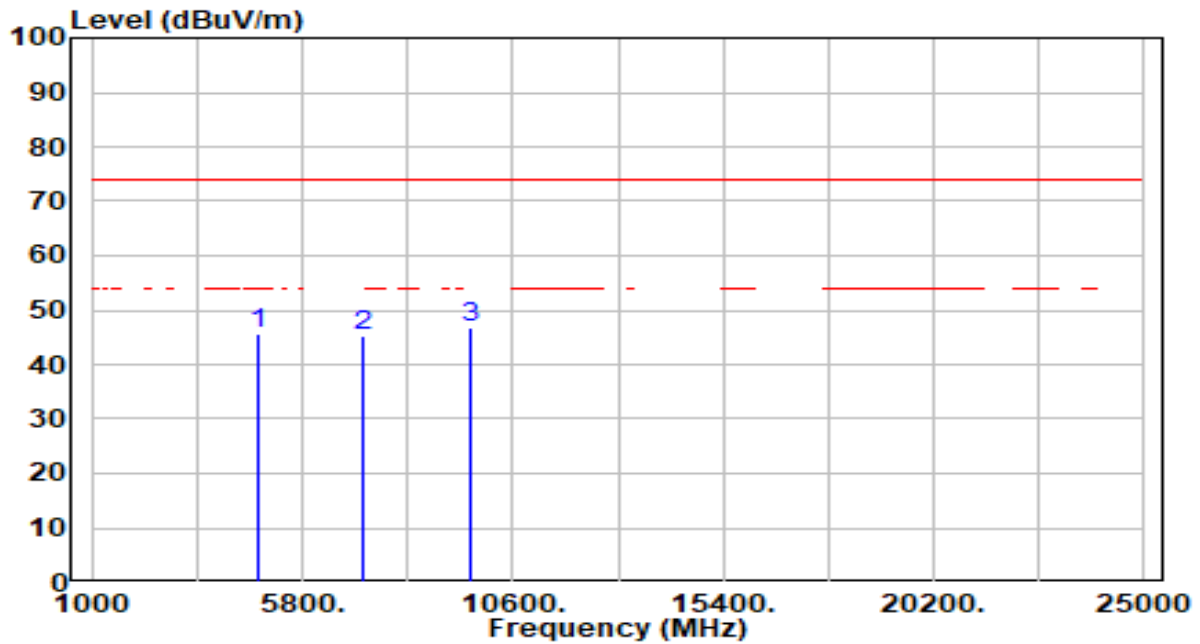


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	45.54	0.21	45.75	-28.25	74.00	100	349	Peak
2	7206.000	39.34	5.82	45.16	-28.84	74.00	100	307	Peak
3	* 9608.000	41.53	5.32	46.85	-27.15	74.00	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 19_Right Ear	Test Voltage	By Notebook PC

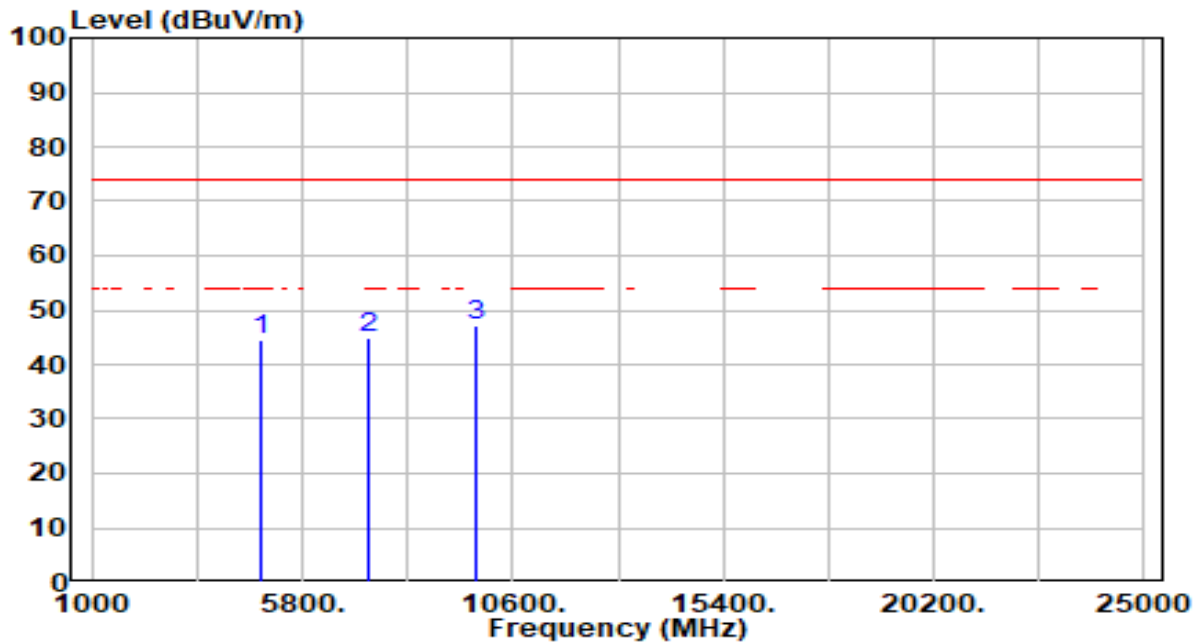


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	44.28	0.37	44.65	-29.35	74.00	100	15	Peak
2	7320.000	39.14	5.79	44.93	-29.07	74.00	100	116	Peak
3	* 9760.000	41.92	5.34	47.26	-26.74	74.00	100	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 19_Right Ear	Test Voltage	By Notebook PC

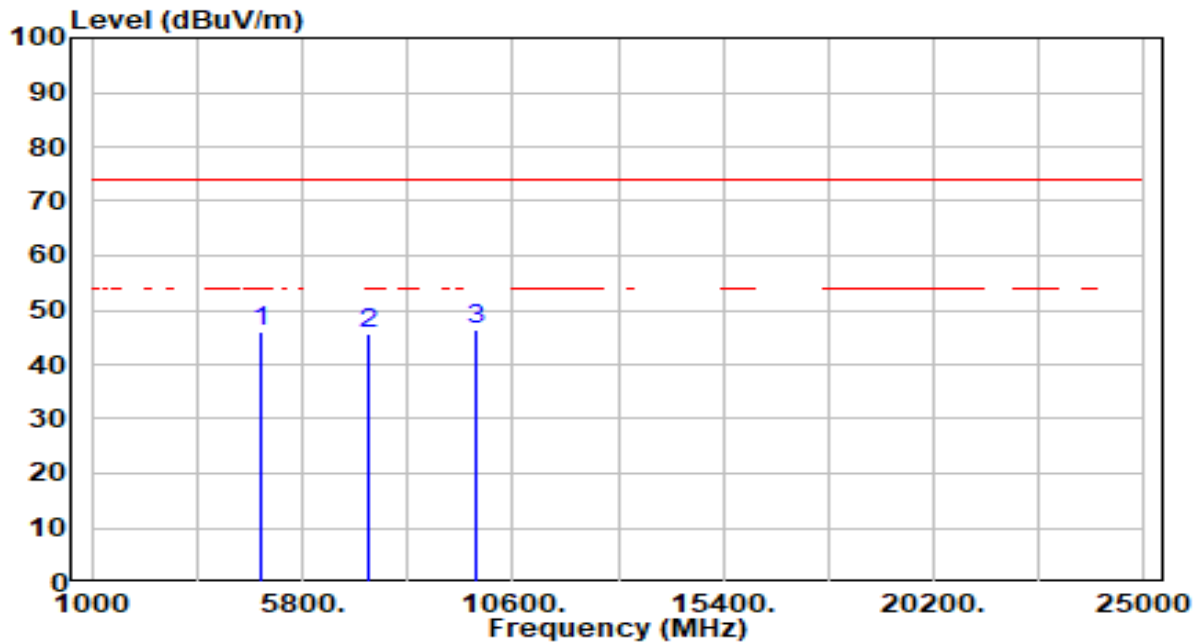


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	45.71	0.37	46.07	-27.93	74.00	100	230	Peak
2	7320.000	39.78	5.79	45.57	-28.43	74.00	100	343	Peak
3	* 9760.000	41.09	5.34	46.43	-27.57	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 39_Right Ear	Test Voltage	By Notebook PC

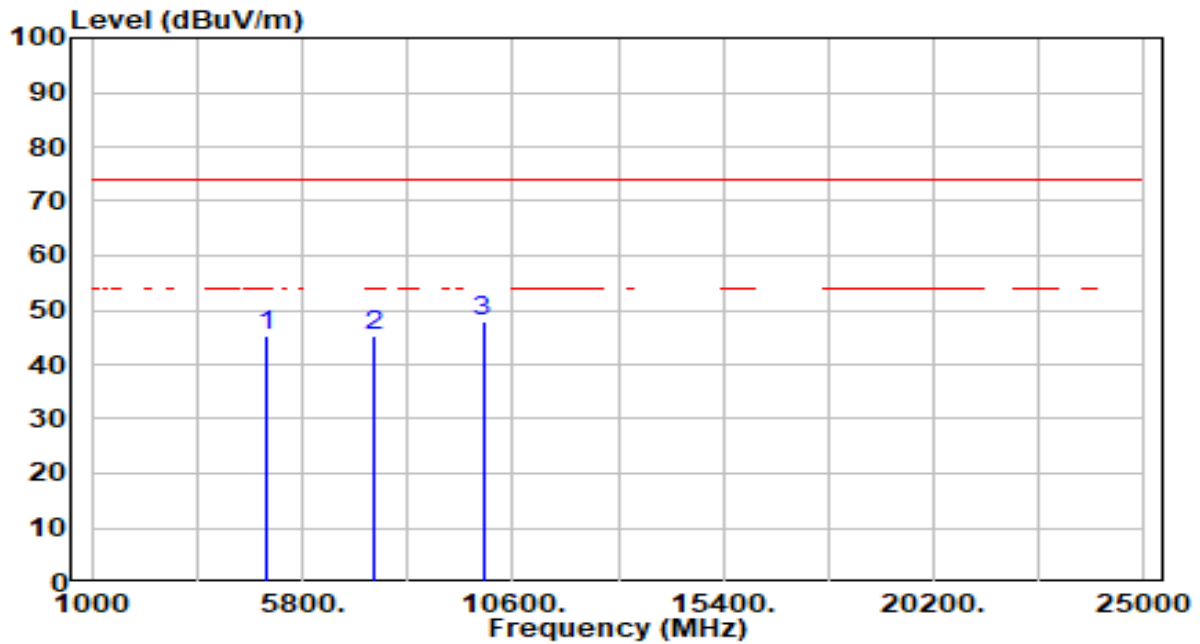


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	44.82	0.53	45.34	-28.66	74.00	100	15	Peak
2	7440.000	39.36	5.74	45.10	-28.90	74.00	100	331	Peak
3	* 9920.000	42.37	5.43	47.79	-26.21	74.00	100	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 39_Right Ear	Test Voltage	By Notebook PC

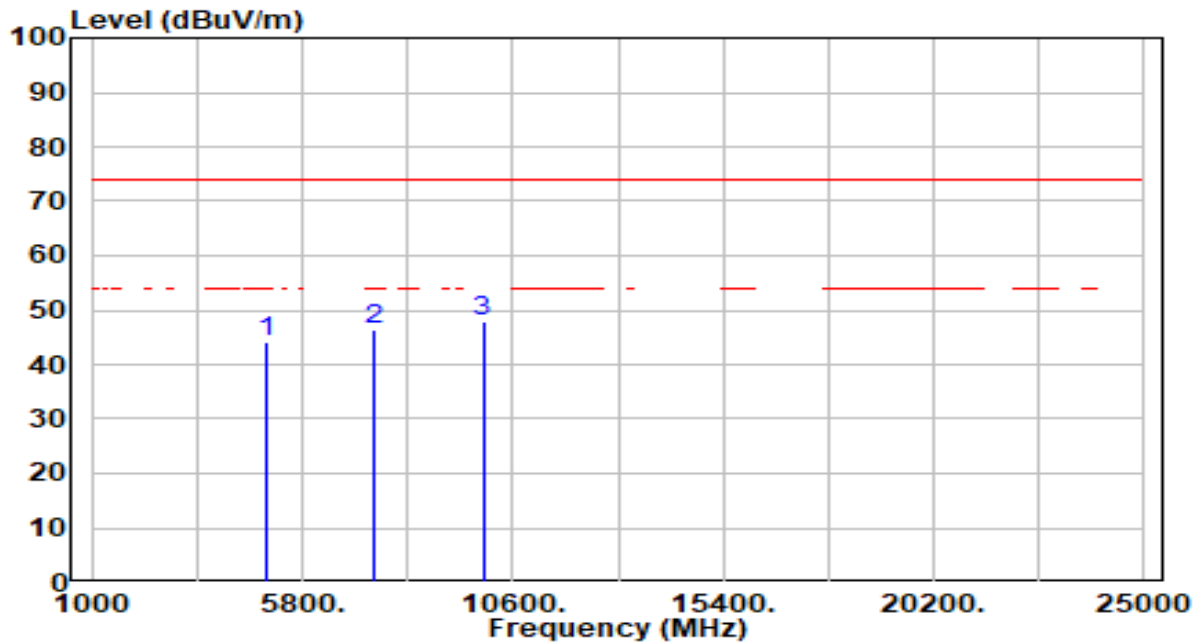


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	43.78	0.53	44.30	-29.70	74.00	100	242	Peak
2	7440.000	40.64	5.74	46.38	-27.62	74.00	100	67	Peak
3	* 9920.000	42.32	5.43	47.75	-26.25	74.00	100	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2023-01-13
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	BLE_TX_Left Ear + Right Ear	Test Voltage	AC 120V/60Hz

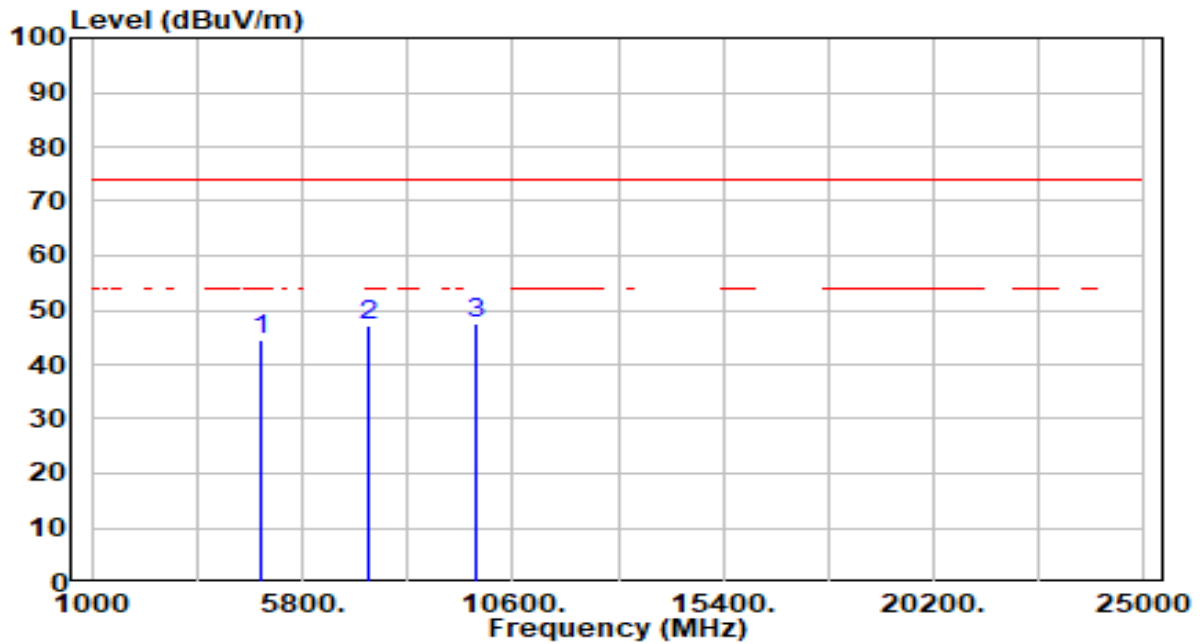


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	44.12	0.37	44.49	-29.51	74.00	300	122	Peak
2	7320.000	41.39	5.79	47.18	-26.82	74.00	300	45	Peak
3	* 9760.000	42.36	5.34	47.70	-26.30	74.00	300	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2023-01-13
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	BLE_TX_Left Ear + Right Ear	Test Voltage	AC 120V/60Hz

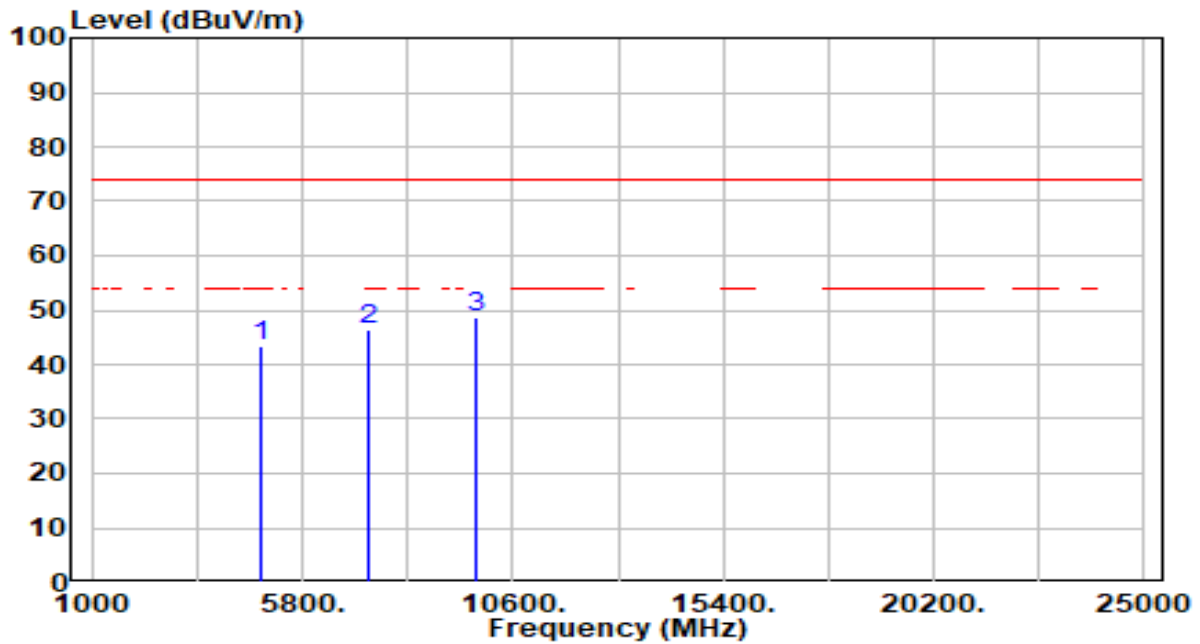

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4880.000	42.97	0.37	43.34	-30.66	74.00	300	21	Peak
2	7320.000	40.56	5.79	46.35	-27.65	74.00	300	330	Peak
3	* 9760.000	43.19	5.34	48.53	-25.47	74.00	300	81	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 18GHz Test Setup:

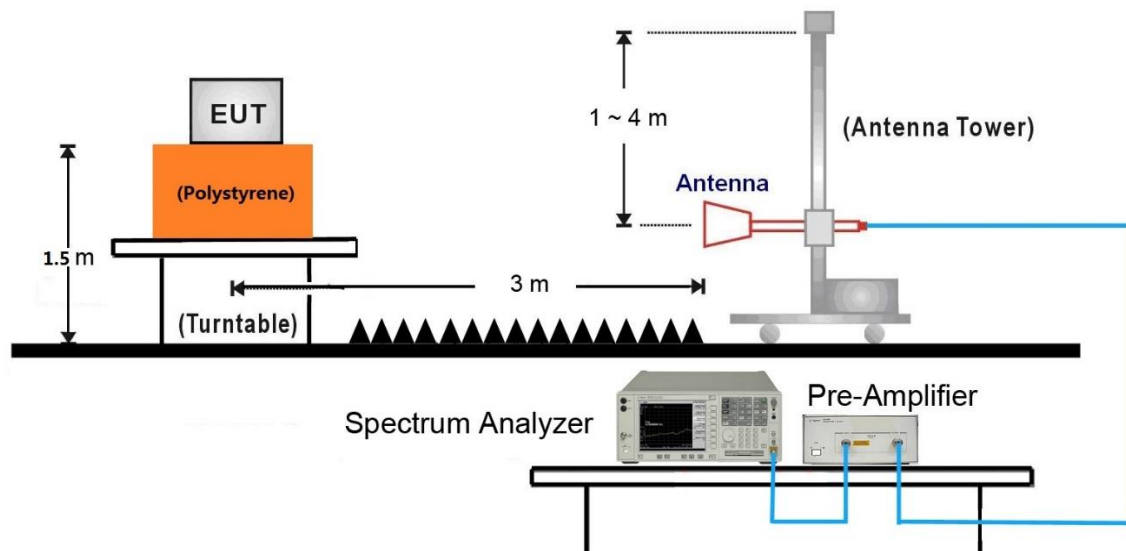

7.7.5. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

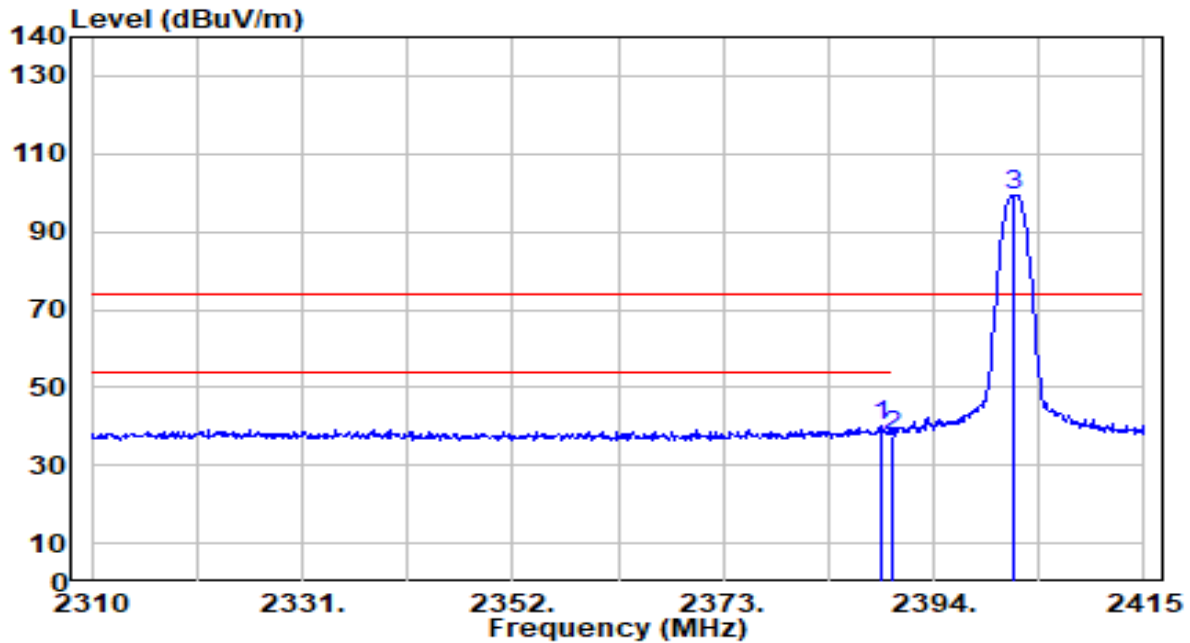


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.645	45.08	-5.00	40.09	-33.91	74.00	100	287	Peak
2	2390.000	42.72	-5.00	37.72	-36.28	74.00	100	287	Peak
3	2401.875	104.44	-4.99	99.45	N/A	N/A	100	287	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

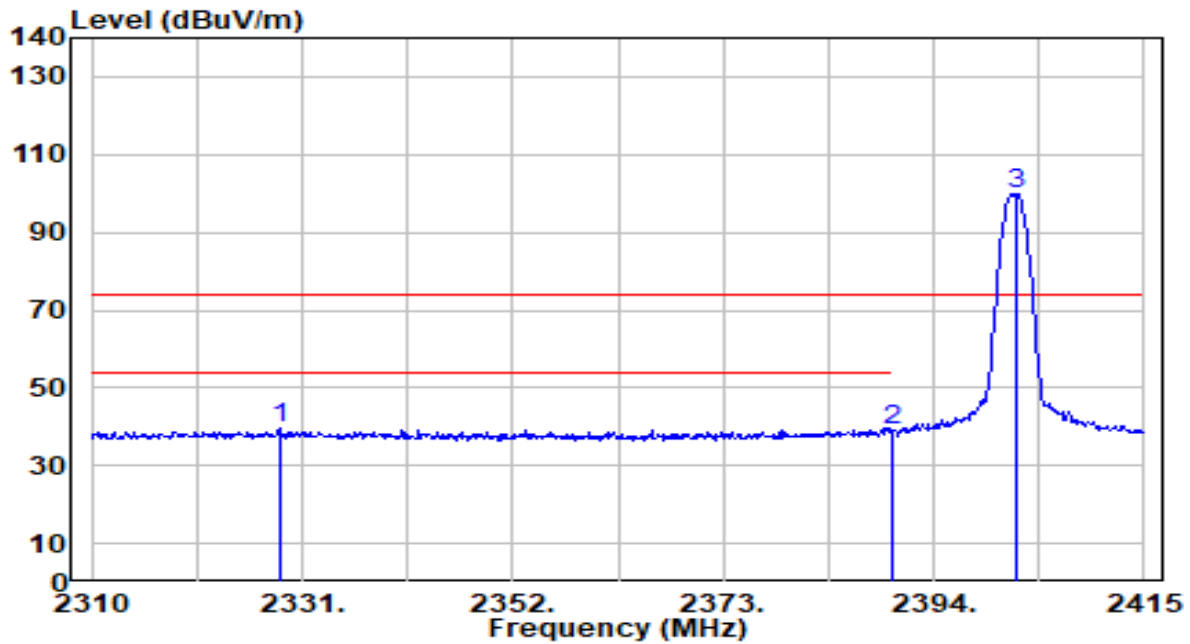


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2328.690	44.40	-5.02	39.38	-34.62	74.00	106	21	Peak
2	2390.000	44.08	-5.00	39.08	-34.92	74.00	106	21	Peak
3	2402.295	104.63	-4.99	99.64	N/A	N/A	106	21	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 39_Left Ear	Test Voltage	By Notebook PC

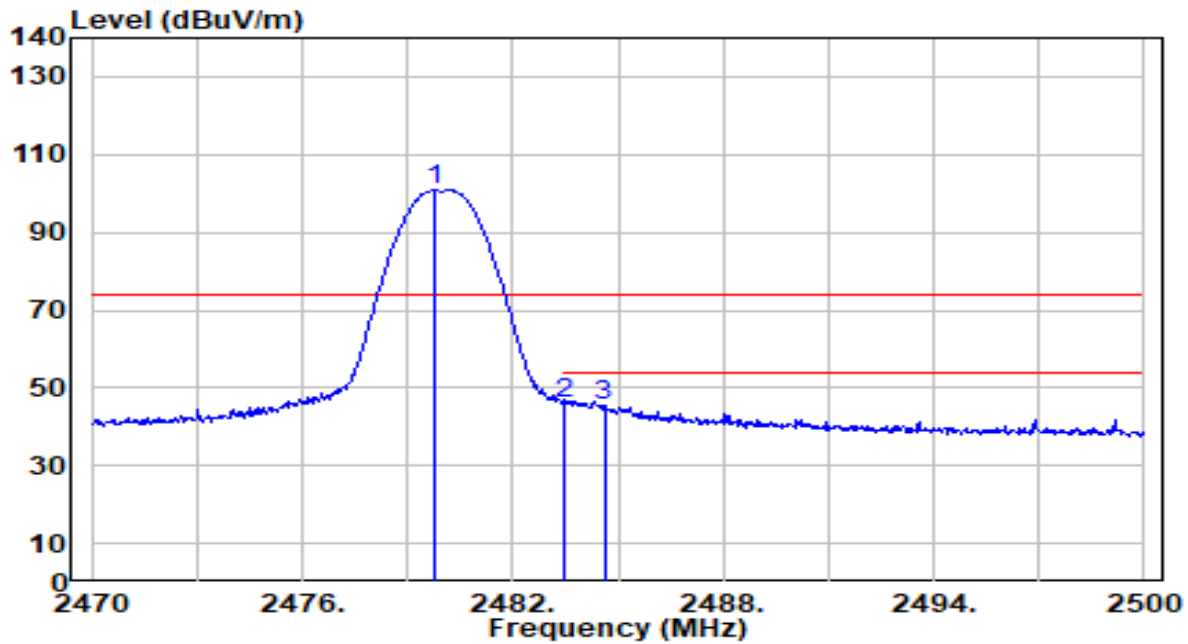


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.810	105.50	-4.80	100.70	N/A	N/A	100	288	Peak
2	* 2483.500	50.93	-4.79	46.14	-27.86	74.00	100	288	Peak
3	2484.610	50.14	-4.79	45.36	-28.64	74.00	100	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 39_Left Ear	Test Voltage	By Notebook PC

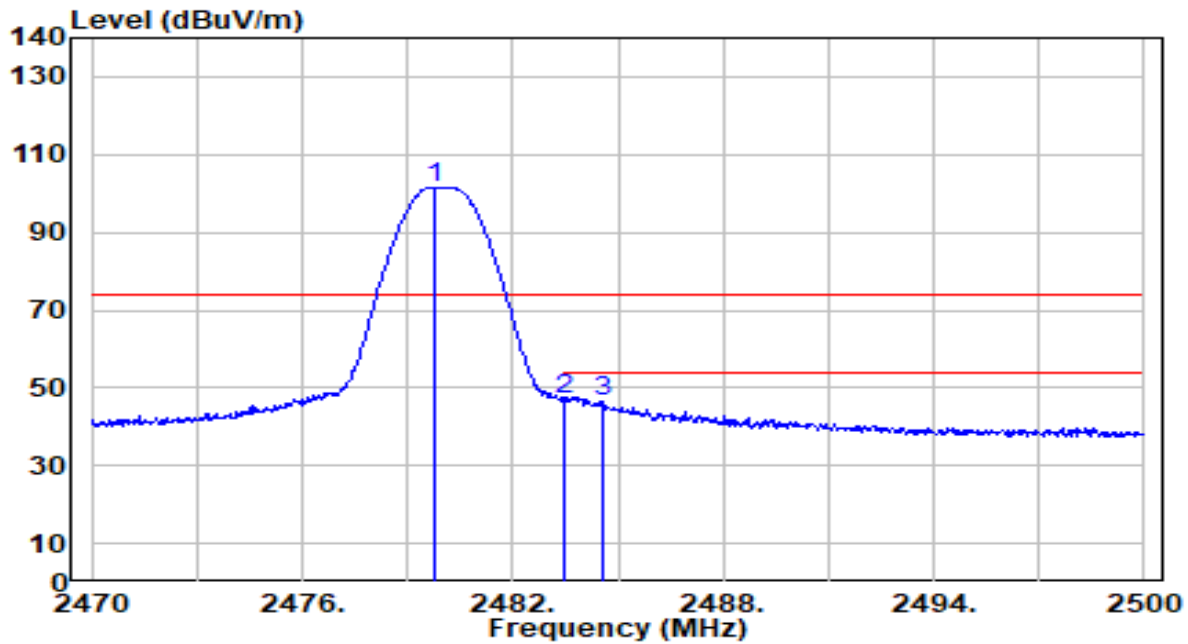


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.780	106.47	-4.80	101.67	N/A	N/A	116	19	Peak
2	* 2483.500	52.02	-4.79	47.23	-26.77	74.00	116	19	Peak
3	2484.550	51.02	-4.79	46.24	-27.76	74.00	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

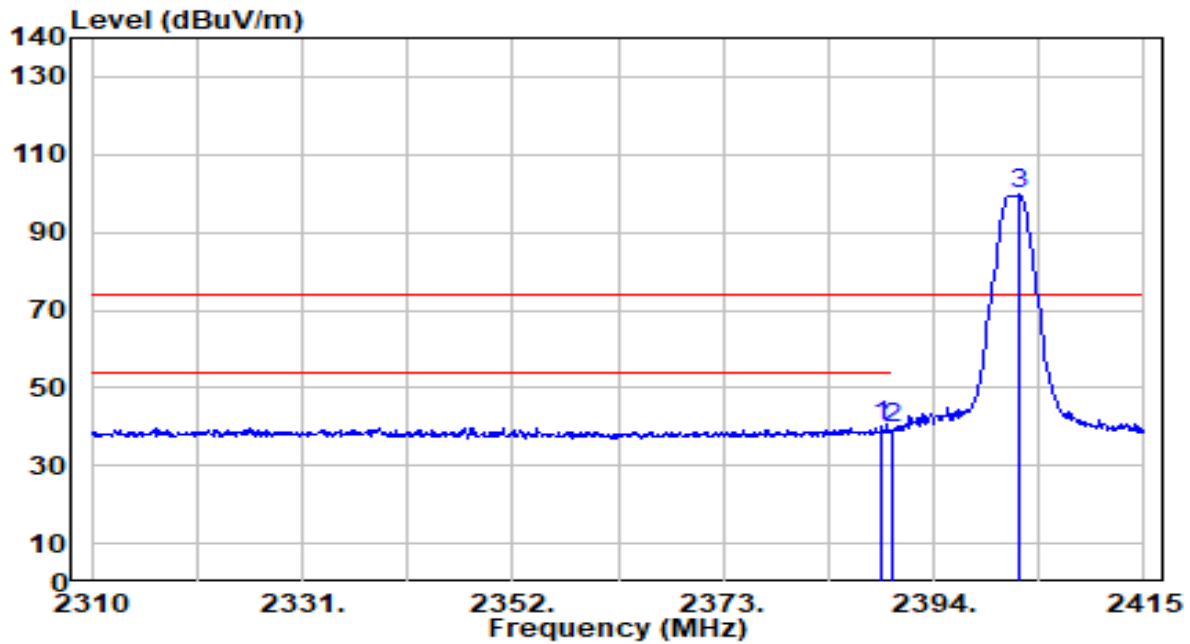


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.855	44.98	-5.00	39.98	-34.02	74.00	110	288	Peak
2	2390.000	44.57	-5.00	39.57	-34.43	74.00	110	288	Peak
3	2402.610	104.61	-4.99	99.62	N/A	N/A	110	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 0_Left Ear	Test Voltage	By Notebook PC

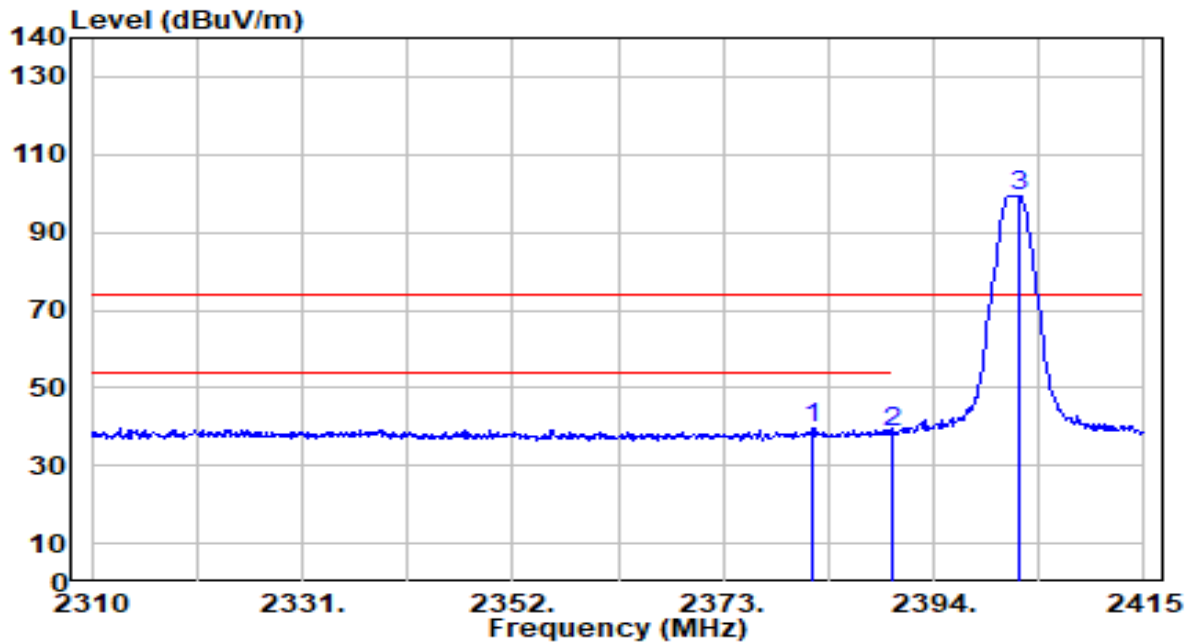


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2381.925	44.72	-5.00	39.72	-34.28	74.00	108	21	Peak
2	2390.000	43.76	-5.00	38.76	-35.24	74.00	108	21	Peak
3	2402.610	104.51	-4.99	99.52	N/A	N/A	108	21	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 39_Left Ear	Test Voltage	By Notebook PC

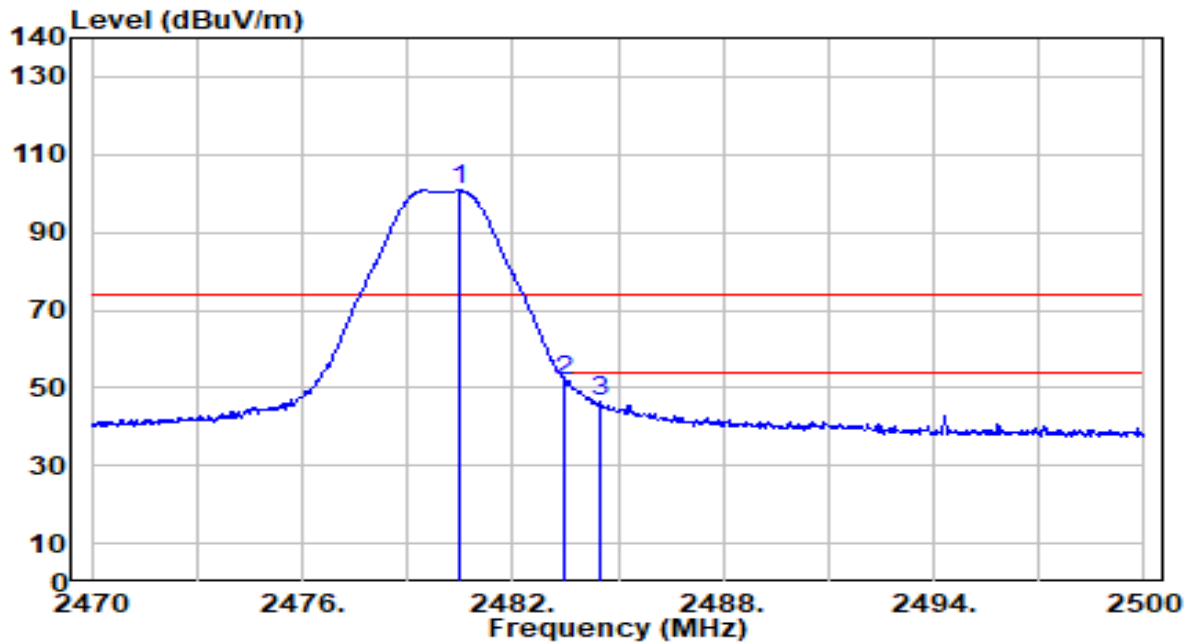


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.470	105.53	-4.80	100.74	N/A	N/A	100	289	Peak
2	* 2483.500	56.73	-4.79	51.94	-22.06	74.00	100	289	Peak
3	2484.520	51.49	-4.79	46.70	-27.30	74.00	100	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 39_Left Ear	Test Voltage	By Notebook PC

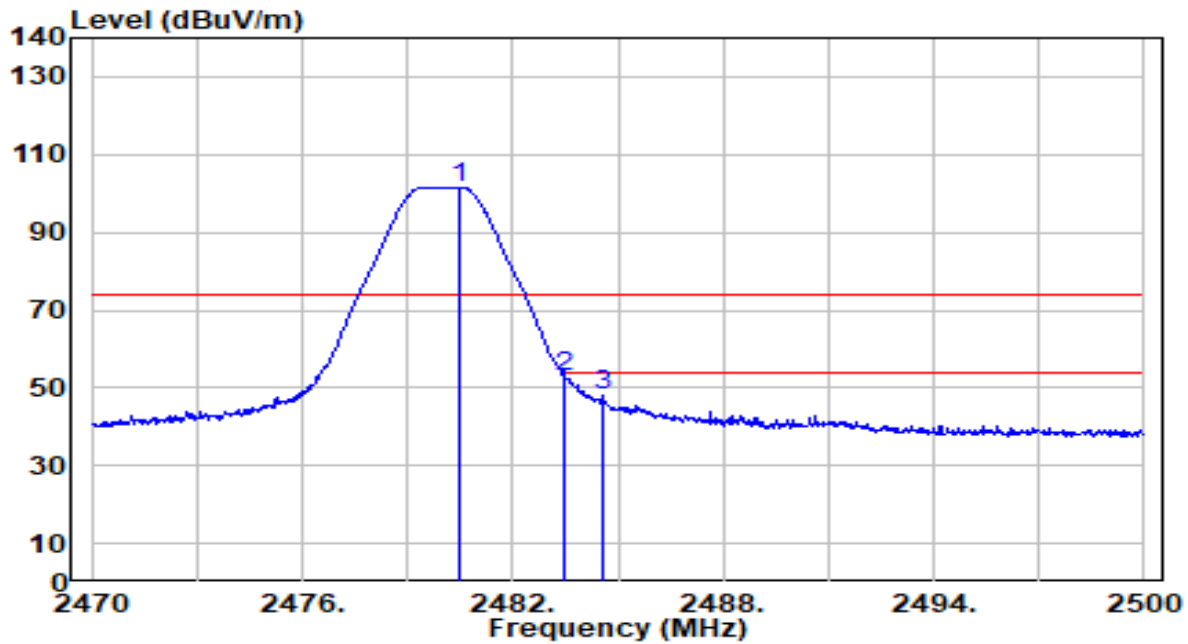


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.470	106.45	-4.80	101.66	N/A	N/A	116	20	Peak
2	* 2483.500	57.59	-4.79	52.80	-21.20	74.00	116	20	Peak
3	2484.550	52.86	-4.79	48.07	-25.93	74.00	116	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

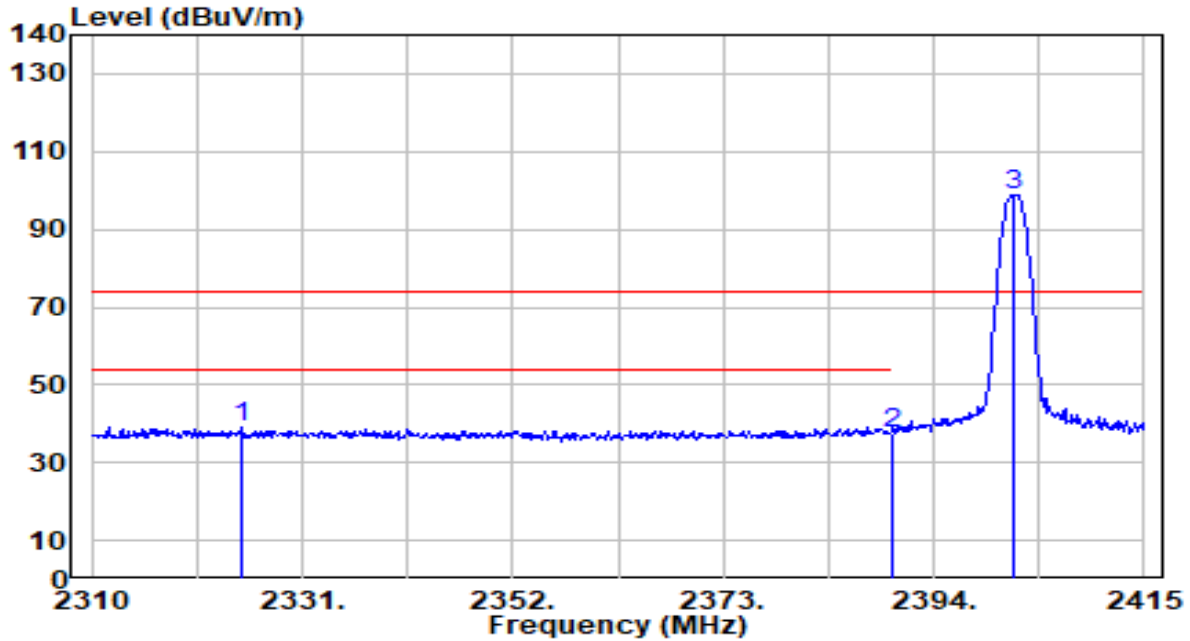


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2325.015	44.35	-5.02	39.32	-34.68	74.00	100	186	Peak
2	2390.000	42.63	-5.00	37.64	-36.36	74.00	100	186	Peak
3	2401.875	103.90	-4.99	98.91	N/A	N/A	100	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

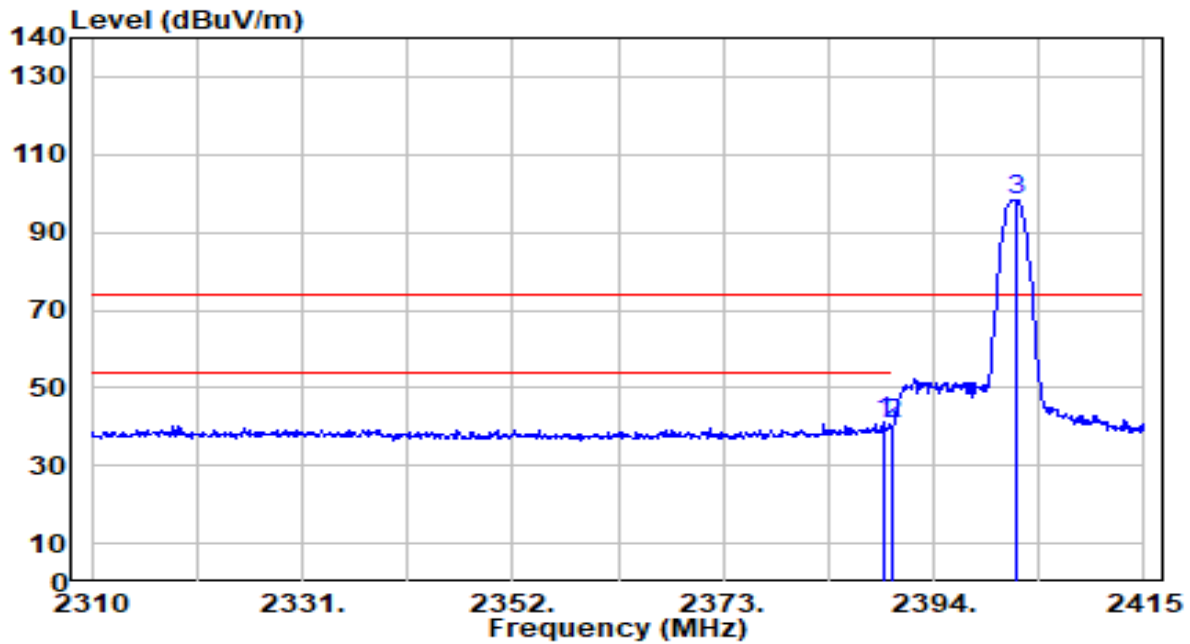


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.960	46.28	-5.00	41.28	-32.72	74.00	100	276	Peak
2		2390.000	45.73	-5.00	40.74	-33.26	74.00	100	276	Peak
3		2402.295	103.42	-4.99	98.44	N/A	N/A	100	276	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 39_Right Ear	Test Voltage	By Notebook PC

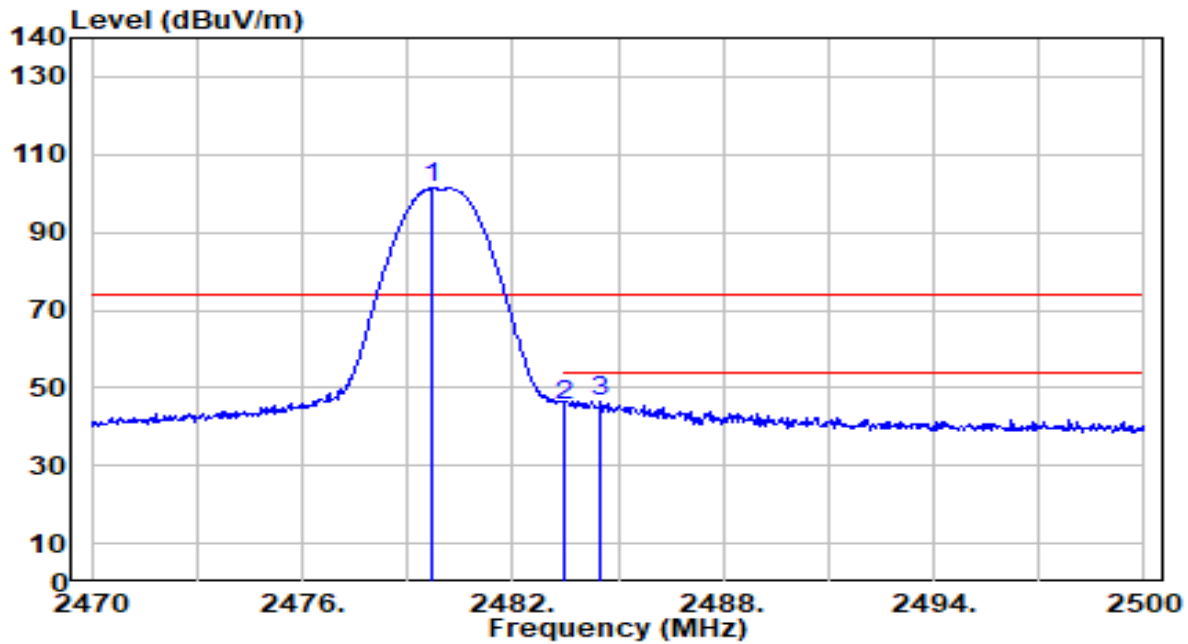


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.720	106.02	-4.80	101.22	N/A	N/A	101	217	Peak
2	2483.500	50.28	-4.79	45.49	-28.51	74.00	101	217	Peak
3	* 2484.520	51.17	-4.79	46.38	-27.62	74.00	101	217	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_1Mbps_CH 39_Right Ear	Test Voltage	By Notebook PC

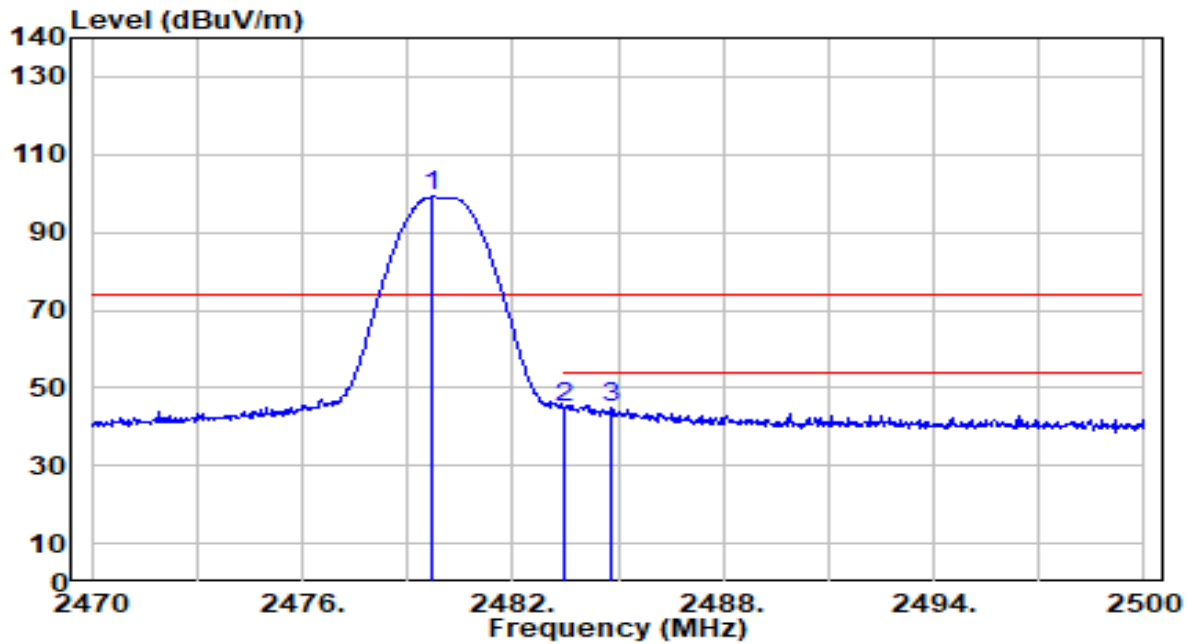


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.720	103.88	-4.80	99.08	N/A	N/A	100	278	Peak
2	* 2483.500	49.75	-4.79	44.96	-29.04	74.00	100	278	Peak
3	2484.790	49.66	-4.79	44.87	-29.13	74.00	100	278	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

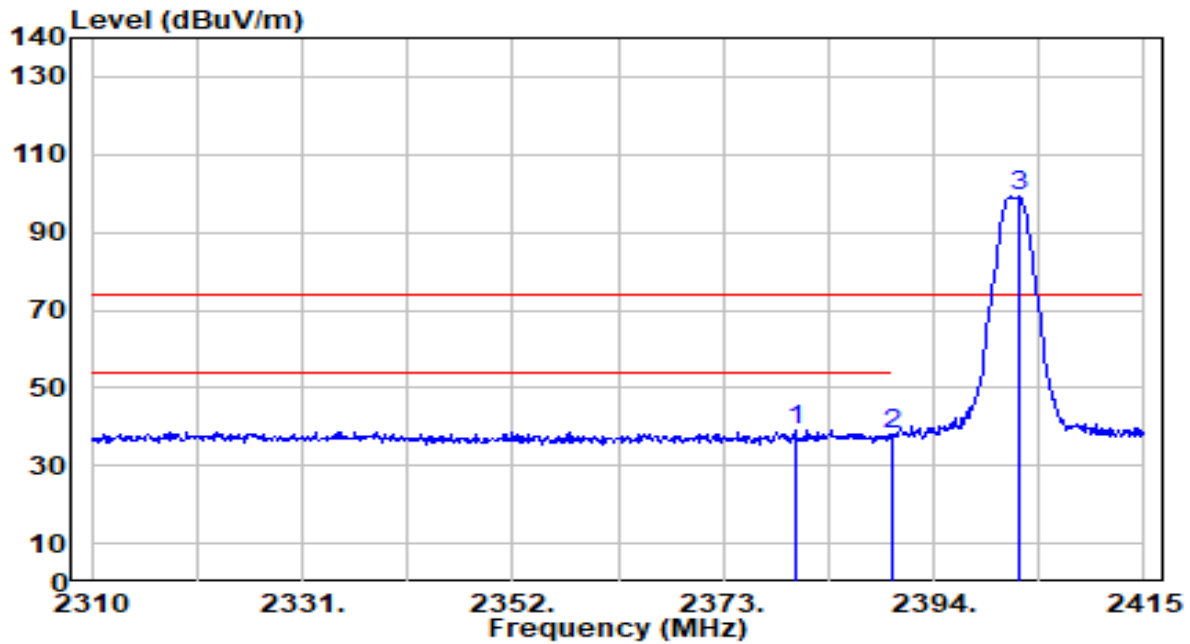


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2380.140	44.12	-5.00	39.12	-34.88	74.00	100	186	Peak
2	2390.000	42.79	-5.00	37.80	-36.20	74.00	100	186	Peak
3	2402.505	104.06	-4.99	99.08	N/A	N/A	100	186	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 0_Right Ear	Test Voltage	By Notebook PC

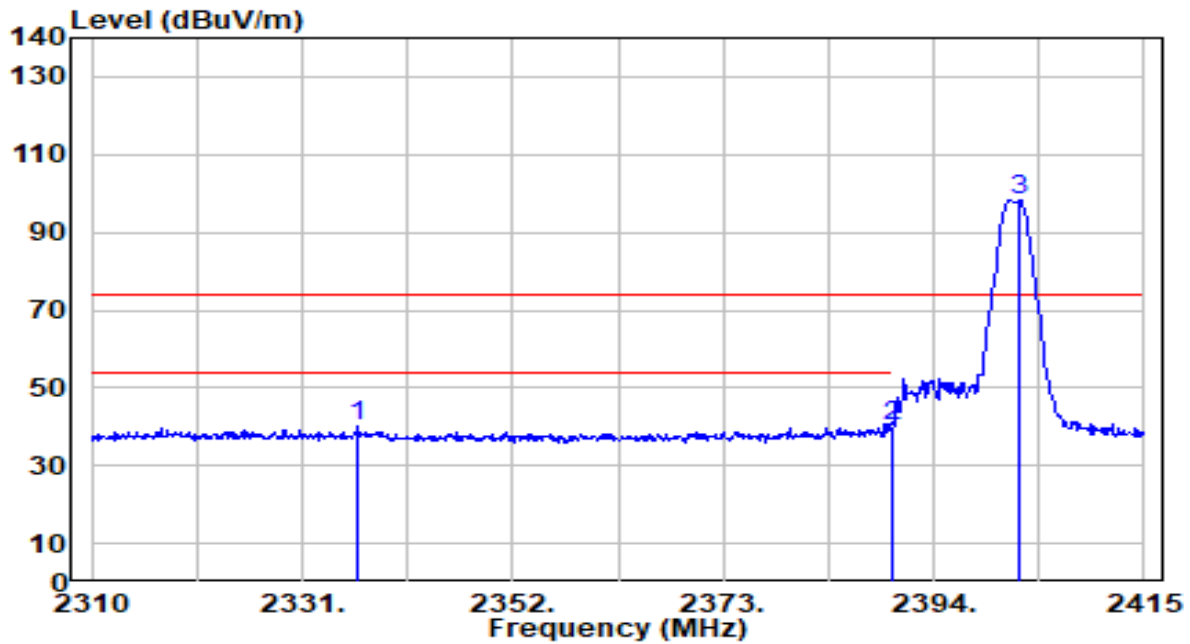


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2336.565	44.98	-5.02	39.96	-34.04	74.00	100	276	Peak
2	* 2390.000	45.35	-5.00	40.35	-33.65	74.00	100	276	Peak
3	2402.610	103.24	-4.99	98.26	N/A	N/A	100	276	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 39_Right Ear	Test Voltage	By Notebook PC

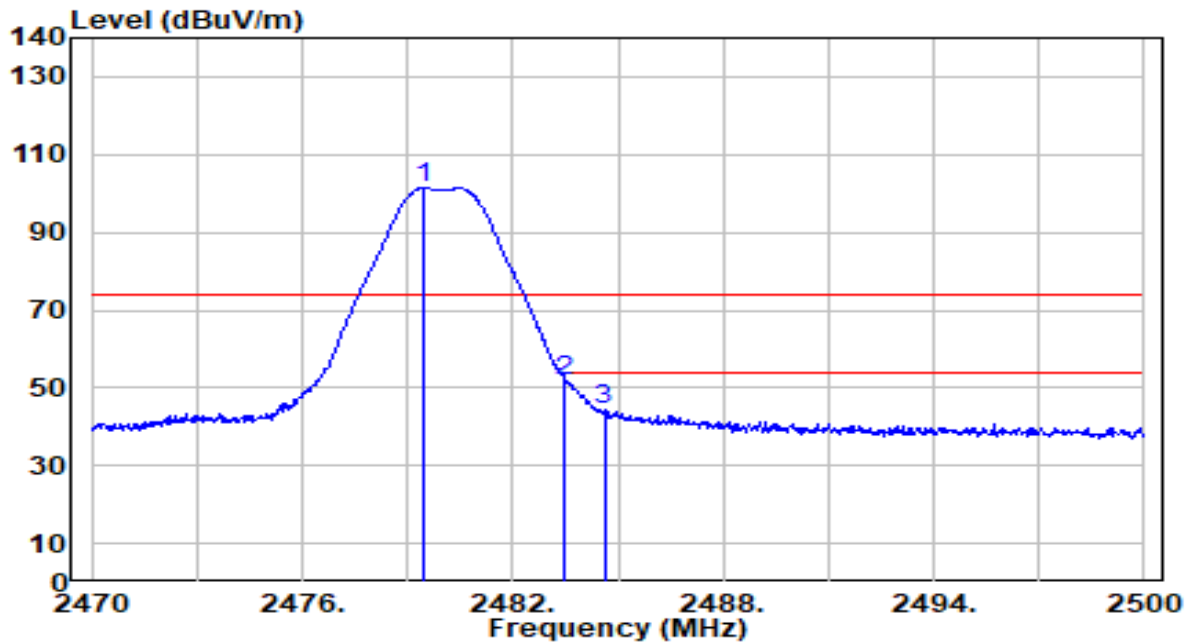


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.480	106.18	-4.80	101.38	N/A	N/A	101	217	Peak
2	* 2483.500	56.75	-4.79	51.96	-22.04	74.00	101	217	Peak
3	2484.610	48.95	-4.79	44.16	-29.84	74.00	101	217	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-27
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	BLE_TX_2Mbps_CH 39_Right Ear	Test Voltage	By Notebook PC

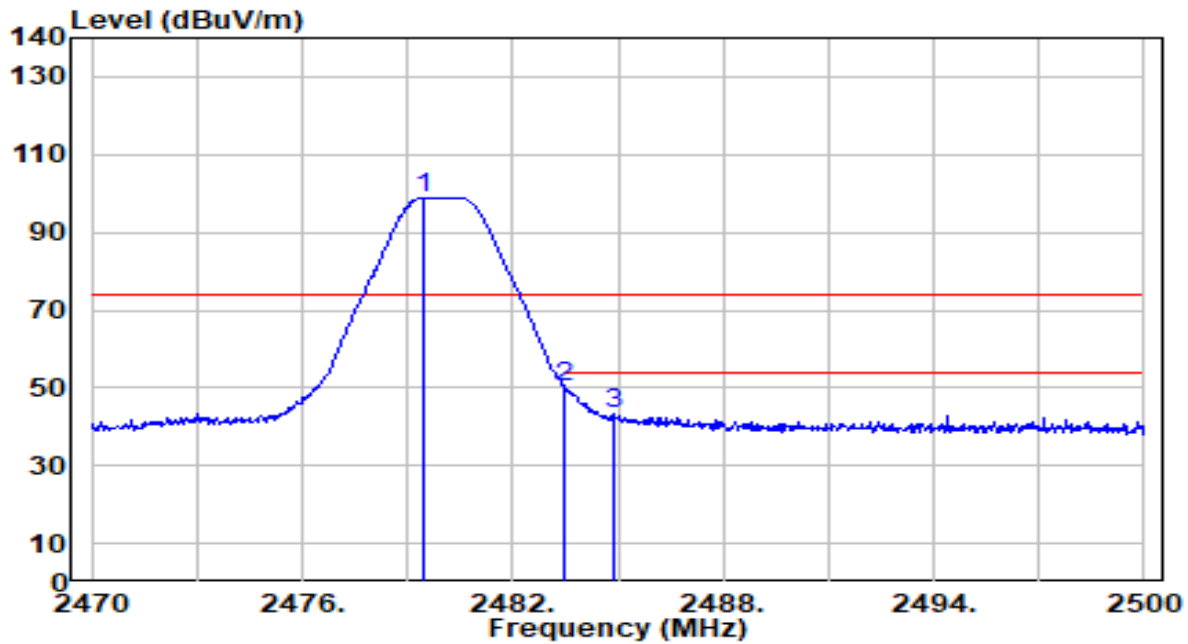

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.450	103.79	-4.80	98.99	N/A	N/A	100	278	Peak
2	* 2483.500	54.76	-4.79	49.97	-24.03	74.00	100	278	Peak
3	2484.850	48.10	-4.79	43.31	-30.69	74.00	100	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

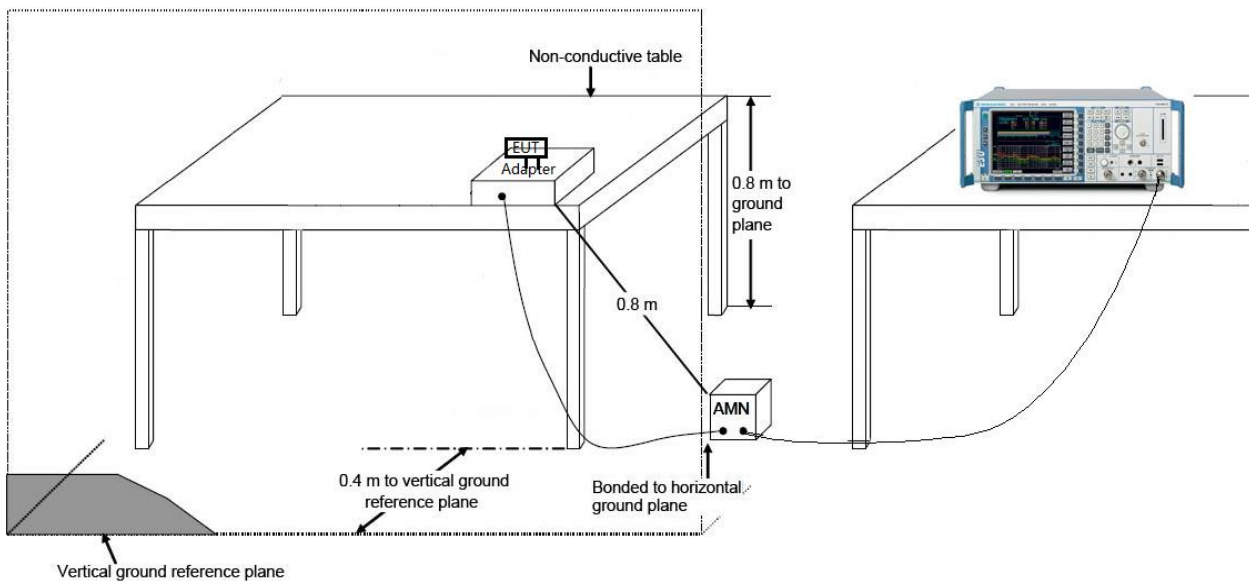

7.8.3. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	BLE_TX_1Mbps_CH 19_Left Ear	Test Voltage	AC 120V/60Hz

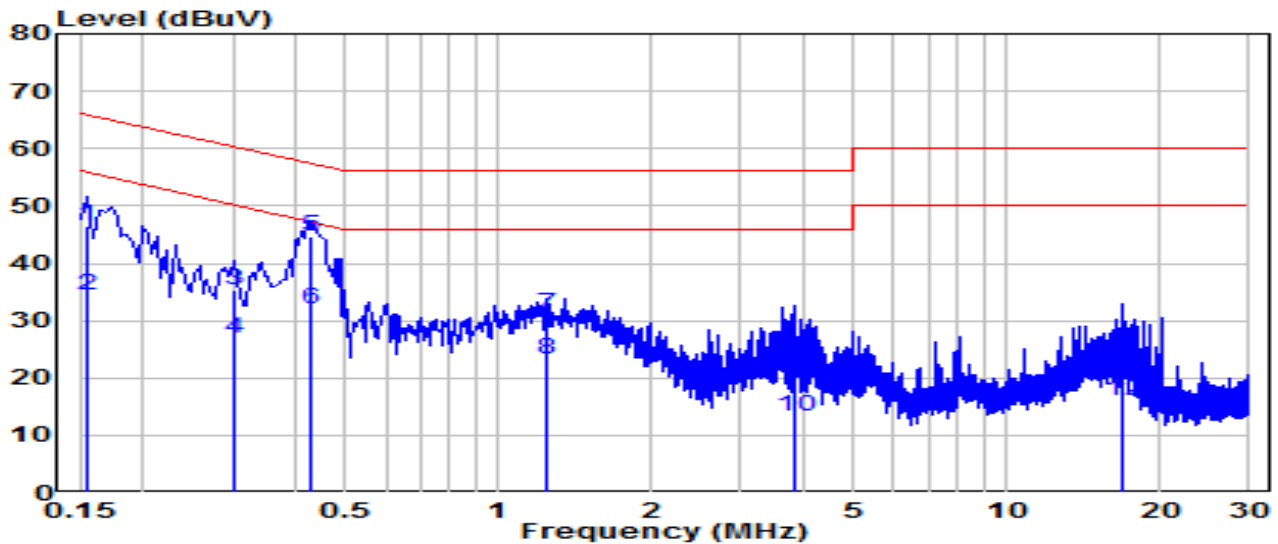


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	36.97	9.62	46.59	-19.17	65.75	QP
2	0.154	24.81	9.62	34.43	-21.32	55.75	Average
3	0.303	25.66	9.63	35.29	-24.87	60.16	QP
4	0.303	17.28	9.63	26.91	-23.25	50.16	Average
5	* 0.424	34.97	9.64	44.61	-12.75	57.36	QP
6	* 0.424	22.48	9.64	32.12	-15.24	47.36	Average
7	1.243	21.47	9.67	31.15	-24.85	56.00	QP
8	1.243	13.66	9.67	23.34	-22.66	46.00	Average
9	3.822	13.87	9.73	23.59	-32.41	56.00	QP
10	3.822	3.51	9.73	13.24	-32.76	46.00	Average
11	16.947	11.58	9.91	21.48	-38.52	60.00	QP
12	16.947	6.17	9.91	16.08	-33.92	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	BLE_TX_1Mbps_CH 19_Left Ear	Test Voltage	AC 120V/60Hz

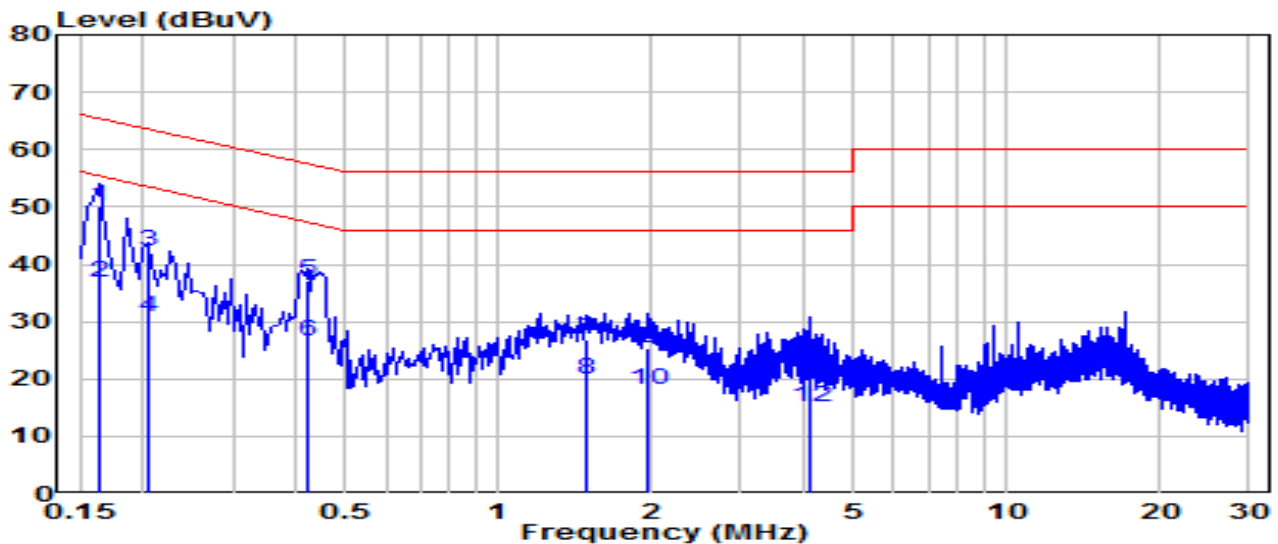


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.163	40.53	9.62	50.15	-15.14	65.28	QP
2	*	0.163	27.07	9.62	36.69	-18.60	55.28	Average
3		0.204	32.59	9.62	42.21	-21.24	63.45	QP
4		0.204	21.31	9.62	30.94	-22.51	53.45	Average
5		0.420	27.40	9.64	37.03	-20.42	57.45	QP
6		0.420	17.06	9.64	26.70	-20.75	47.45	Average
7		1.491	17.18	9.68	26.86	-29.14	56.00	QP
8		1.491	10.27	9.68	19.95	-26.05	46.00	Average
9		1.963	15.76	9.69	25.45	-30.55	56.00	QP
10		1.963	8.32	9.69	18.01	-27.99	46.00	Average
11		4.096	12.31	9.73	22.04	-33.96	56.00	QP
12		4.096	5.25	9.73	14.98	-31.02	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	BLE_TX_1Mbps_CH 19_Left Ear	Test Voltage	AC 240V/60Hz

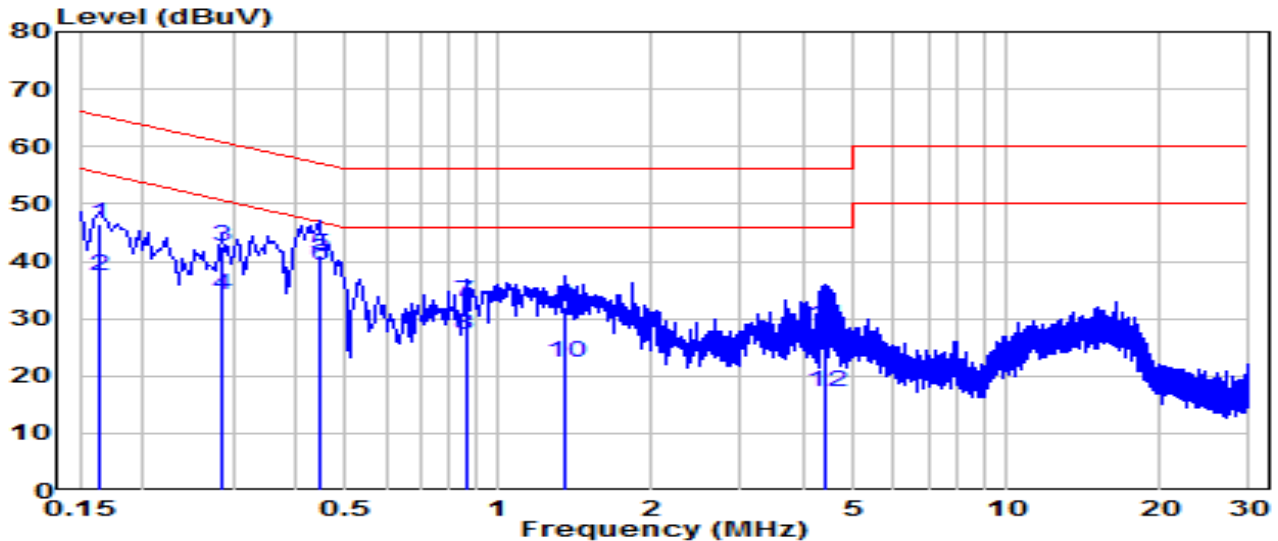


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	36.96	9.62	46.58	-18.71	65.28	QP
2	0.163	27.77	9.62	37.39	-17.90	55.28	Average
3	0.285	32.86	9.63	42.49	-18.18	60.67	QP
4	0.285	24.56	9.63	34.19	-16.48	50.67	Average
5	* 0.442	31.51	9.64	41.14	-15.87	57.02	QP
6	* 0.442	29.57	9.64	39.21	-7.80	47.02	Average
7	0.861	23.37	9.66	33.03	-22.97	56.00	QP
8	0.861	17.49	9.66	27.16	-18.84	46.00	Average
9	1.347	22.33	9.68	32.00	-24.00	56.00	QP
10	1.347	12.53	9.68	22.21	-23.79	46.00	Average
11	4.393	18.89	9.74	28.63	-27.37	56.00	QP
12	4.393	7.51	9.74	17.25	-28.75	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	BLE_TX_1Mbps_CH 19_Left Ear	Test Voltage	AC 240V/60Hz

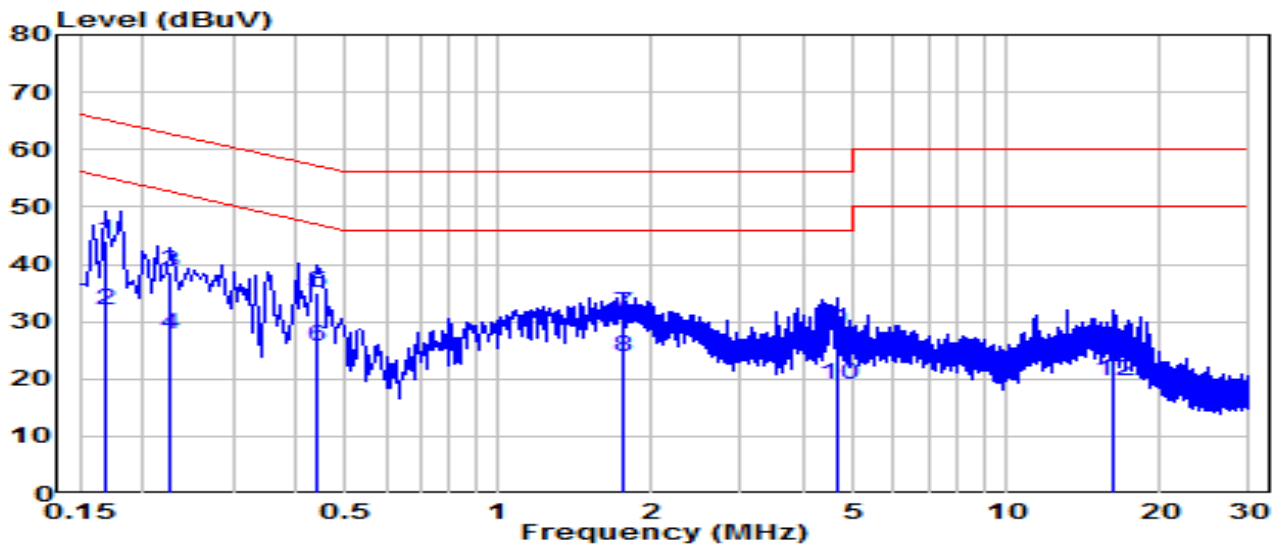


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.168	34.34	9.62	43.96	-21.10	65.06	QP
2	*	0.168	22.36	9.62	31.98	-23.08	55.06	Average
3		0.226	29.12	9.62	38.75	-23.83	62.58	QP
4		0.226	18.01	9.62	27.63	-24.94	52.58	Average
5		0.438	25.38	9.64	35.02	-22.08	57.10	QP
6		0.438	15.90	9.64	25.54	-21.56	47.10	Average
7		1.752	21.86	9.69	31.54	-24.46	56.00	QP
8		1.752	14.20	9.69	23.88	-22.12	46.00	Average
9		4.641	18.60	9.74	28.34	-27.66	56.00	QP
10		4.641	9.33	9.74	19.07	-26.93	46.00	Average
11		16.195	14.54	9.95	24.49	-35.51	60.00	QP
12		16.195	9.65	9.95	19.60	-30.40	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	BLE_TX_1Mbps_CH 19_Right Ear	Test Voltage	AC 120V/60Hz

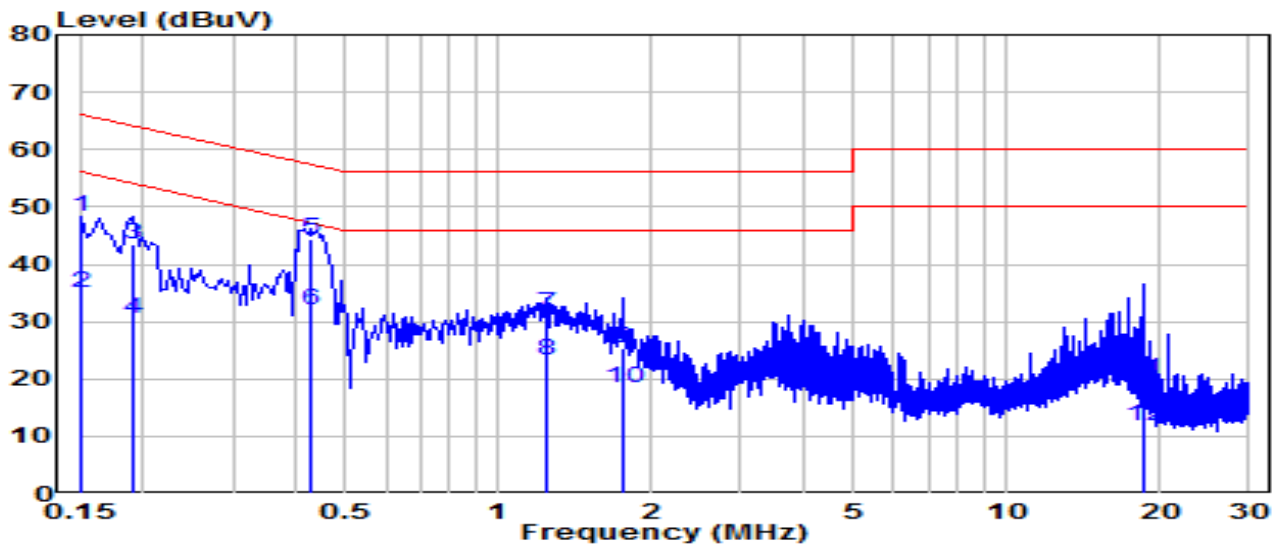


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	38.56	9.62	48.18	-17.82	66.00	QP
2	0.150	25.28	9.62	34.90	-21.10	56.00	Average
3	0.190	33.80	9.62	43.42	-20.59	64.01	QP
4	0.190	20.80	9.62	30.42	-23.59	54.01	Average
5	* 0.424	34.78	9.64	44.42	-12.94	57.36	QP
6	* 0.424	22.39	9.64	32.02	-15.34	47.36	Average
7	1.239	21.66	9.67	31.34	-24.66	56.00	QP
8	1.239	13.57	9.67	23.25	-22.75	46.00	Average
9	1.752	15.78	9.69	25.46	-30.54	56.00	QP
10	1.752	8.80	9.69	18.49	-27.51	46.00	Average
11	18.522	9.99	9.92	19.91	-40.09	60.00	QP
12	18.522	1.92	9.92	11.84	-38.16	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	BLE_TX_1Mbps_CH 19_Right Ear	Test Voltage	AC 120V/60Hz

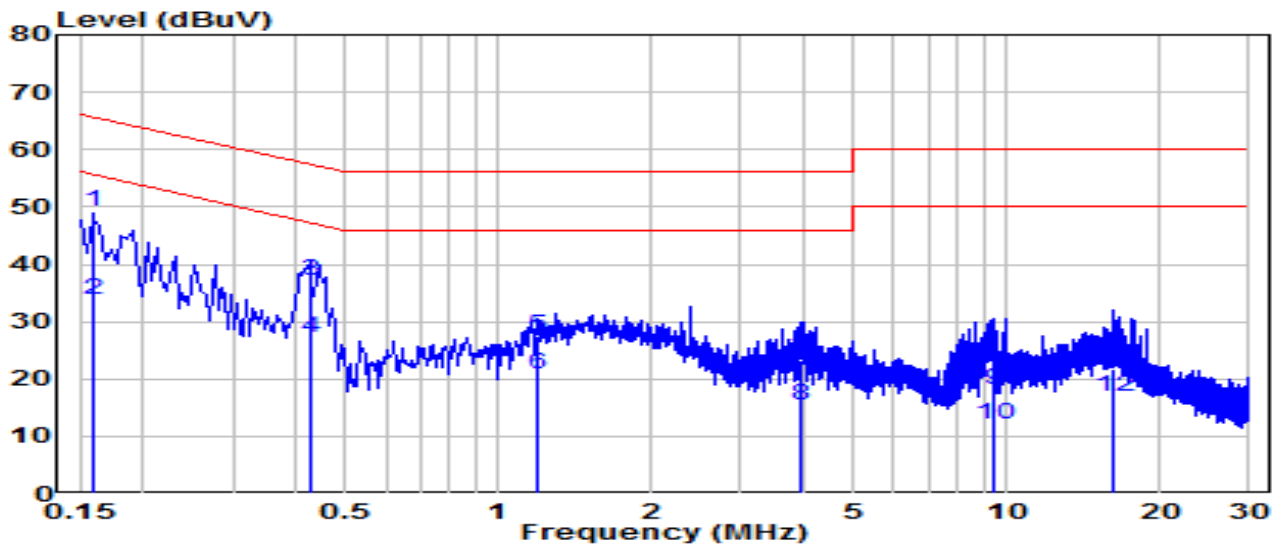


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.159	39.49	9.62	49.11	-16.41	65.52	QP
2	*	0.159	24.25	9.62	33.87	-21.65	55.52	Average
3		0.424	27.61	9.64	37.25	-20.11	57.36	QP
4		0.424	17.46	9.64	27.09	-20.27	47.36	Average
5		1.198	17.90	9.67	27.57	-28.43	56.00	QP
6		1.198	11.01	9.67	20.68	-25.32	46.00	Average
7		3.921	13.57	9.73	23.30	-32.70	56.00	QP
8		3.921	5.78	9.73	15.51	-30.49	46.00	Average
9		9.379	8.17	9.85	18.02	-41.98	60.00	QP
10		9.379	2.16	9.85	12.02	-37.98	50.00	Average
11		16.231	11.90	9.95	21.85	-38.15	60.00	QP
12		16.231	7.07	9.95	17.02	-32.98	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	BLE_TX_1Mbps_CH 19_Right Ear	Test Voltage	AC 240V/60Hz

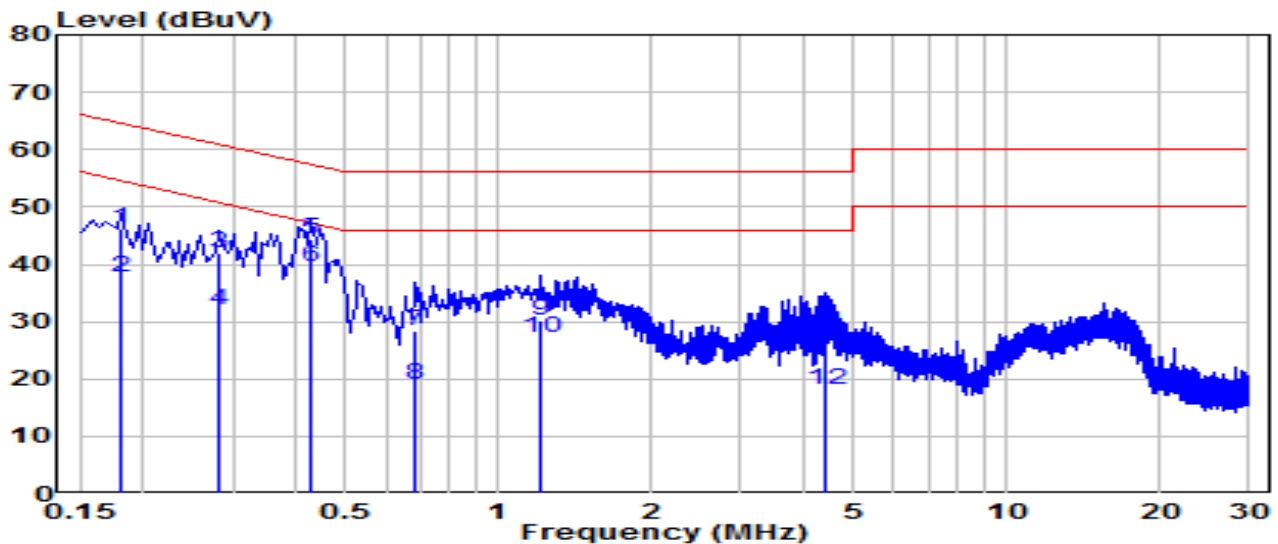


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.181	36.60	9.62	46.22	-18.20	64.42	QP
2	0.181	28.17	9.62	37.79	-16.62	54.42	Average
3	0.280	32.42	9.63	42.05	-18.75	60.80	QP
4	0.280	22.39	9.63	32.02	-18.78	50.80	Average
5	* 0.424	34.73	9.64	44.37	-12.99	57.36	QP
6	* 0.424	29.90	9.64	39.54	-7.82	47.36	Average
7	0.685	18.62	9.65	28.27	-27.73	56.00	QP
8	0.685	9.42	9.65	19.08	-26.92	46.00	Average
9	1.216	20.57	9.67	30.24	-25.76	56.00	QP
10	1.216	17.50	9.67	27.17	-18.83	46.00	Average
11	4.384	18.25	9.74	27.98	-28.02	56.00	QP
12	4.384	8.39	9.74	18.13	-27.87	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-12-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	BLE_TX_1Mbps_CH 19_Right Ear	Test Voltage	AC 240V/60Hz

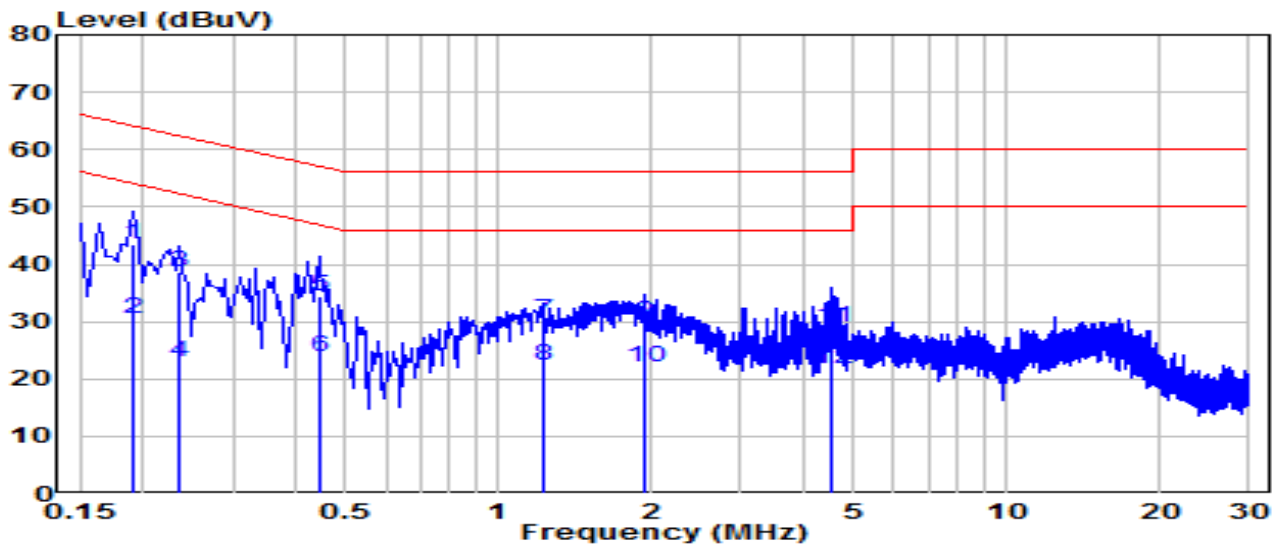

No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.190	33.84	9.62	43.47	-20.55	64.01	QP
2	*	0.190	20.77	9.62	30.39	-23.62	54.01	Average
3		0.235	29.06	9.62	38.68	-23.57	62.25	QP
4		0.235	13.41	9.62	23.04	-29.22	52.25	Average
5		0.442	24.78	9.64	34.42	-22.60	57.02	QP
6		0.442	14.18	9.64	23.82	-23.20	47.02	Average
7		1.221	20.47	9.67	30.14	-25.86	56.00	QP
8		1.221	12.75	9.67	22.42	-23.58	46.00	Average
9		1.932	20.11	9.69	29.79	-26.21	56.00	QP
10		1.932	12.48	9.69	22.17	-23.83	46.00	Average
11		4.546	19.28	9.74	29.01	-26.99	56.00	QP
12		4.546	12.09	9.74	21.83	-24.17	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Digital Wireless Stereo Earphones, FCC ID: ACJ-EAH-AZ40M2** is in compliance with Part 15C of the FCC Rules.

————— The End —————