


Right Ear


CH00 (2402MHz) DH5(1Mbps)




CH00 (2402MHz) DH5(1Mbps)

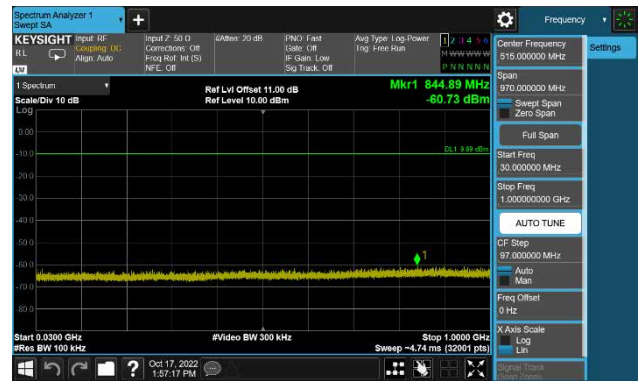


CH00 (2402MHz) DH5(1Mbps)

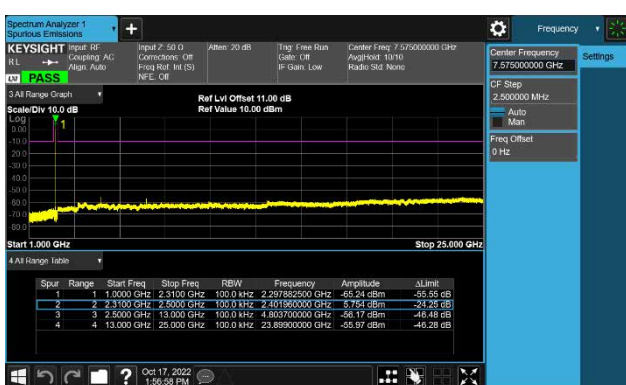


CH39 (2441MHz) DH5(1Mbps)

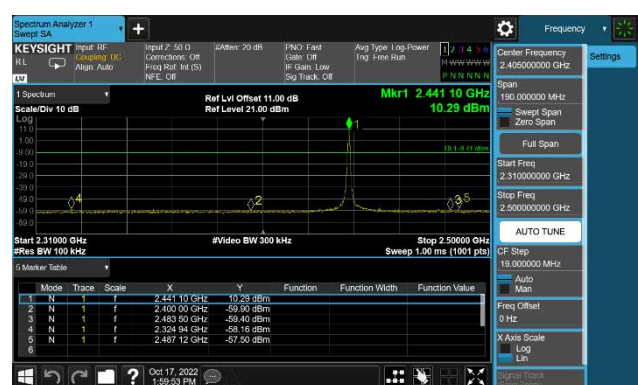



CH39 (2441MHz) DH5(1Mbps)

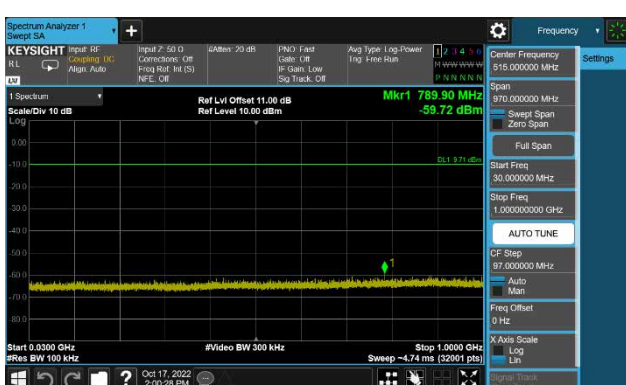

CH39 (2441MHz) DH5(1Mbps)

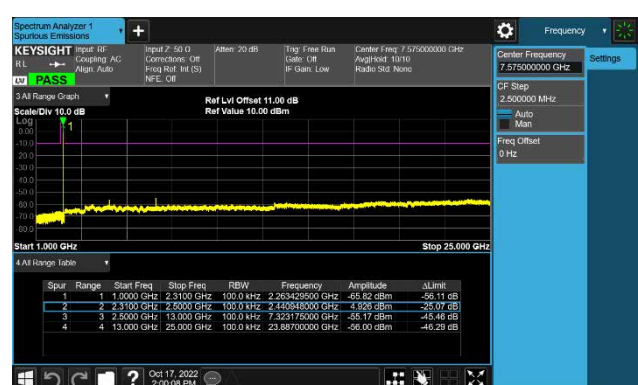

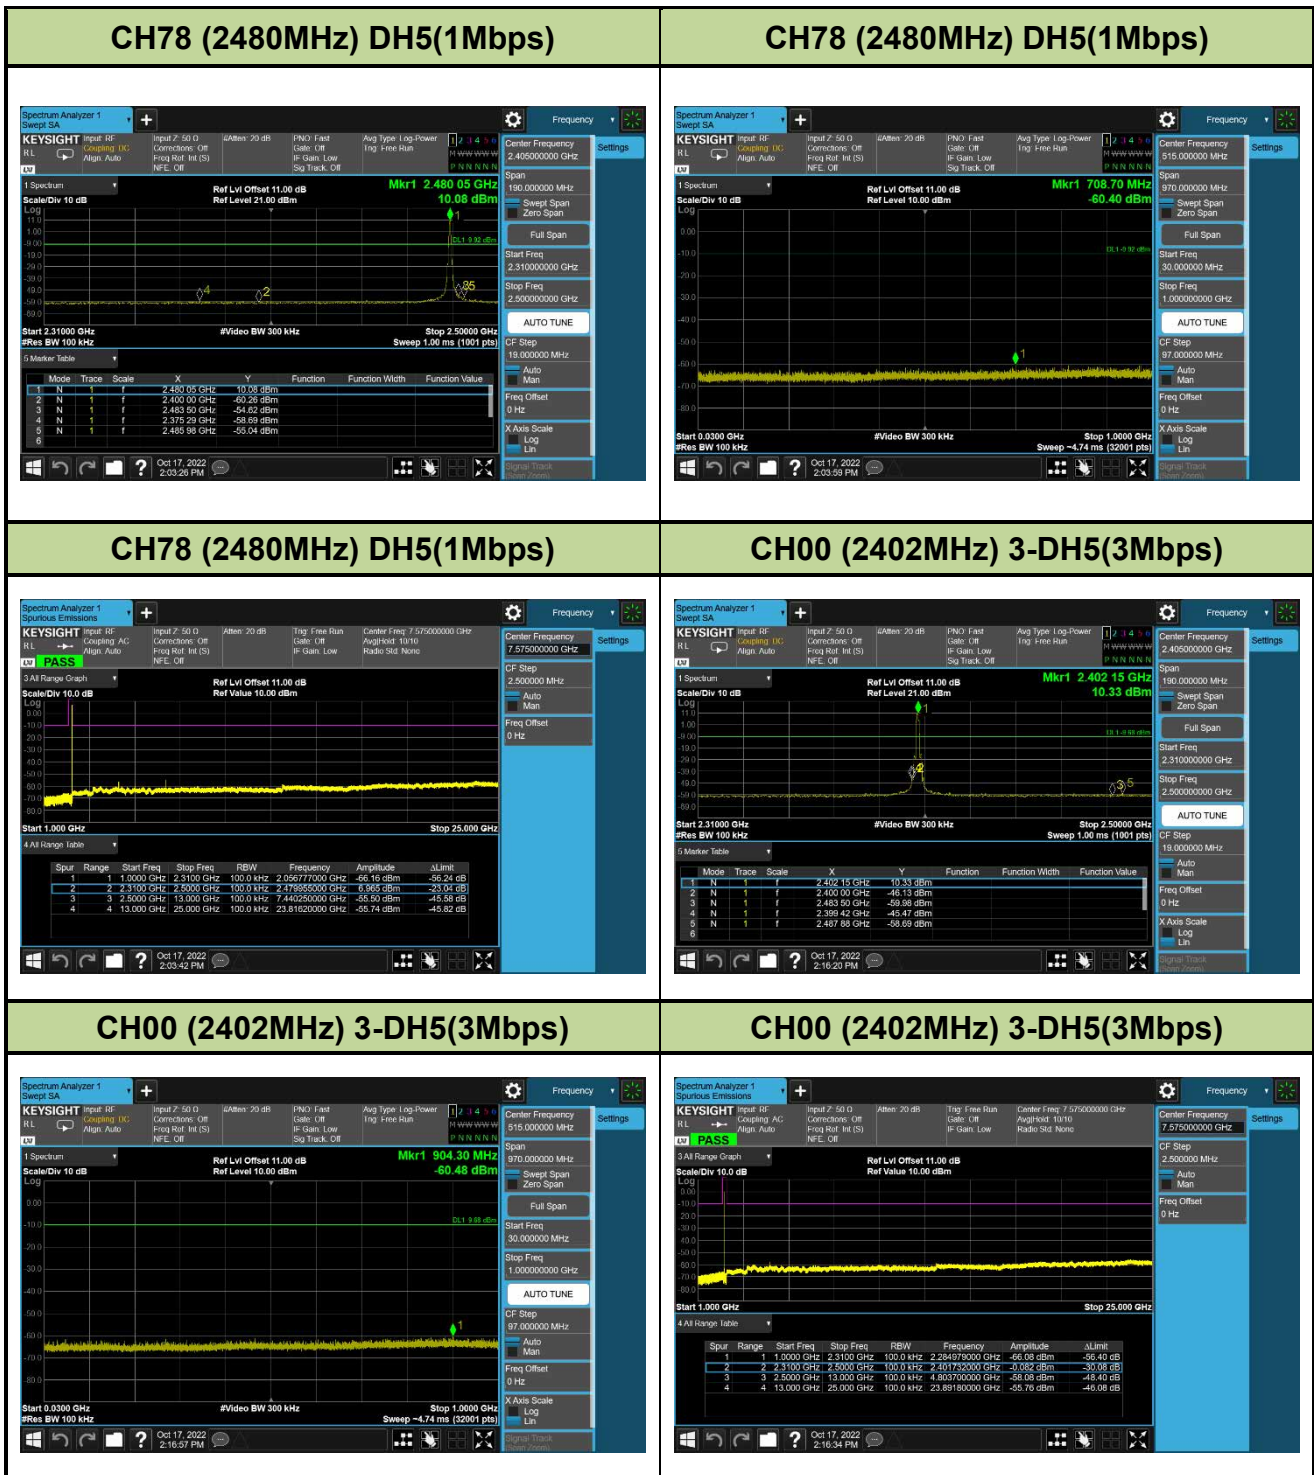


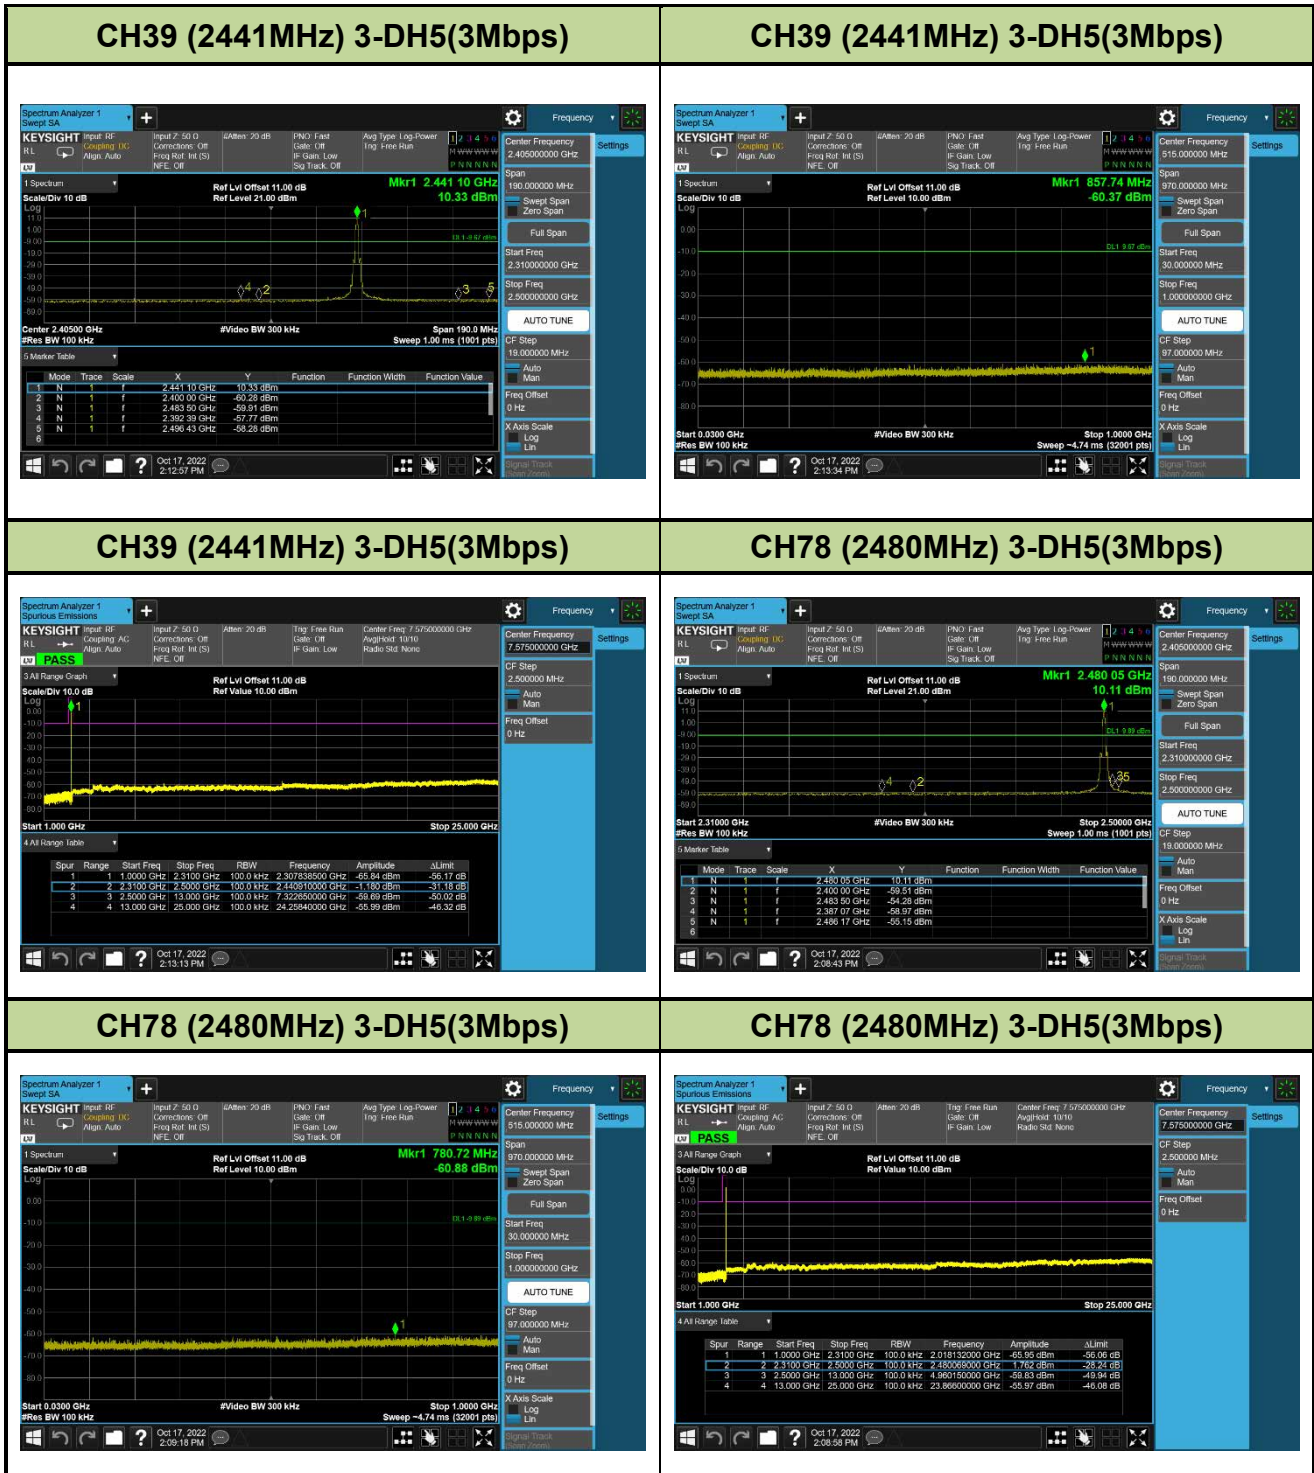

Band Edge With Hopping On_ Left Ear

CH00 (2402MHz) DH5(1Mbps)

CH78 (2480MHz) DH5(1Mbps)

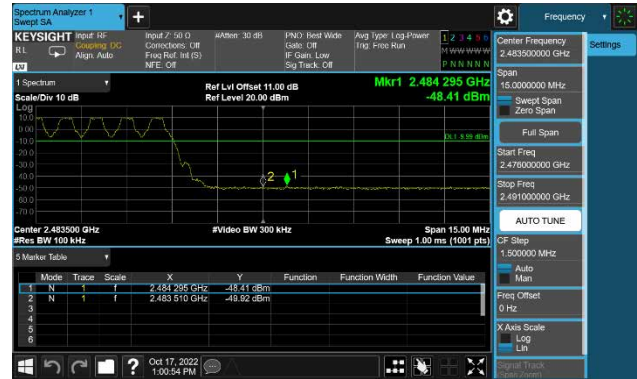

CH00 (2402MHz) 3-DH5(3Mbps)



CH78 (2480MHz) 3-DH5(3Mbps)



Band Edge With Hopping On_ Right Ear


CH00 (2402MHz) DH5(1Mbps)

CH78 (2480MHz) DH5(1Mbps)

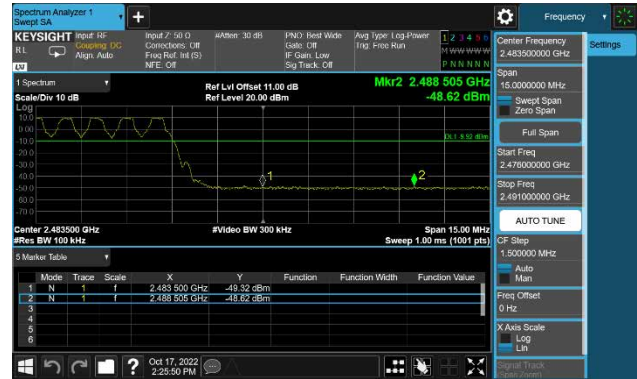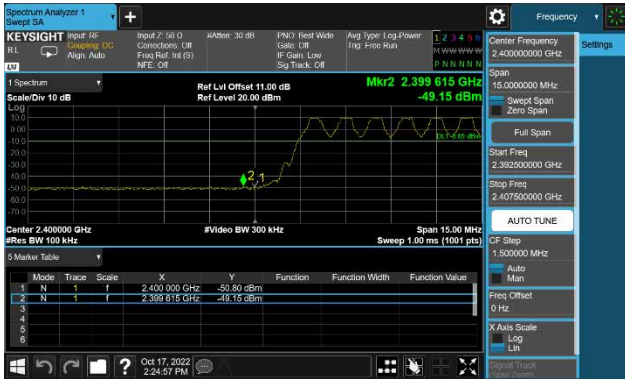

CH00 (2402MHz) 3-DH5(3Mbps)

CH78 (2480MHz) 3-DH5(3Mbps)

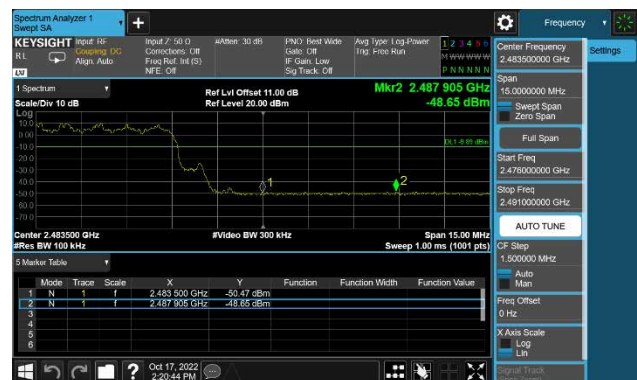

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.8.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

- Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 1MHz
- $VBW \geq 1/T$
- De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold
- Allow max hold to run for at least 50 times (1/duty cycle) traces

7.8.4. Test Setup


9kHz ~ 30MHz Test Setup:

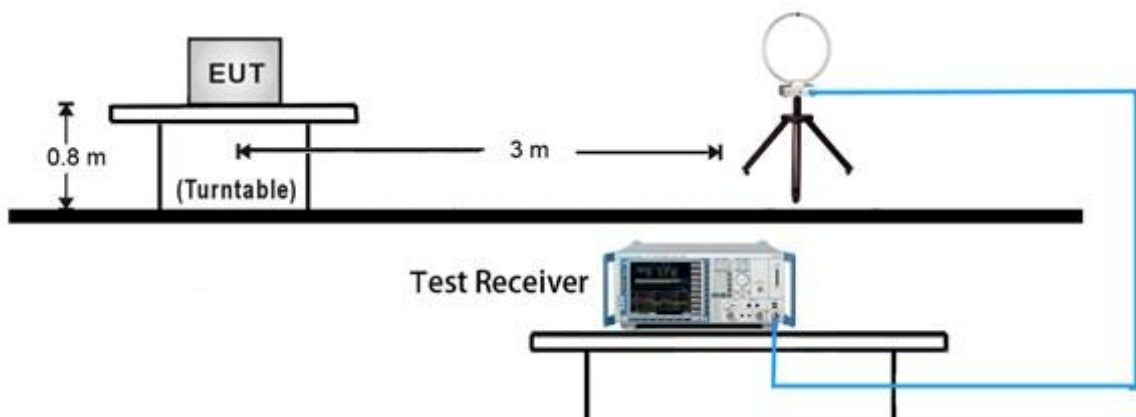


30MHz ~ 1GHz Test Setup:

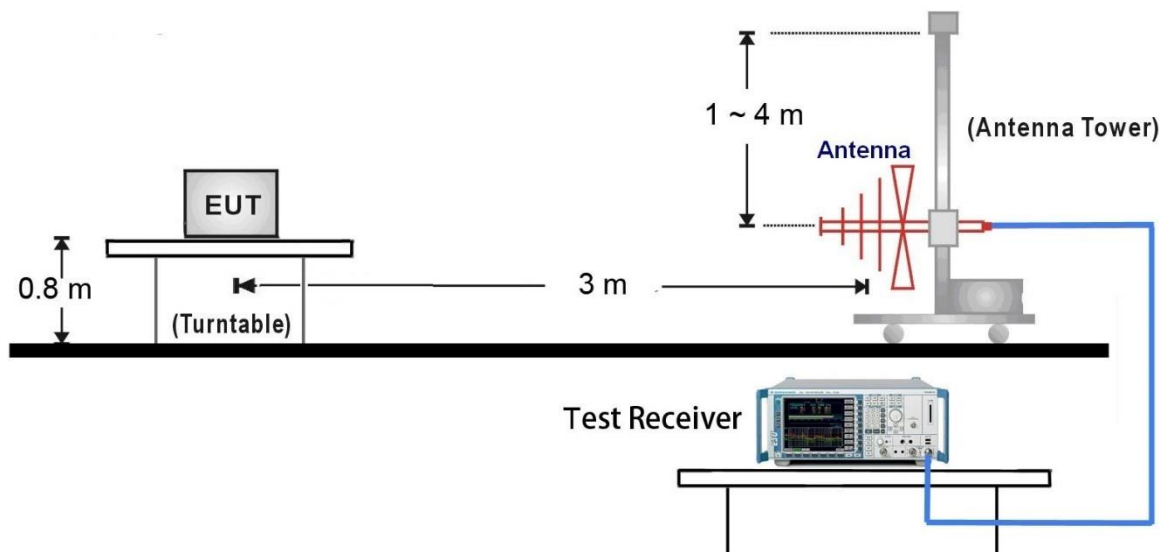

1GHz ~ 18GHz Test Setup:

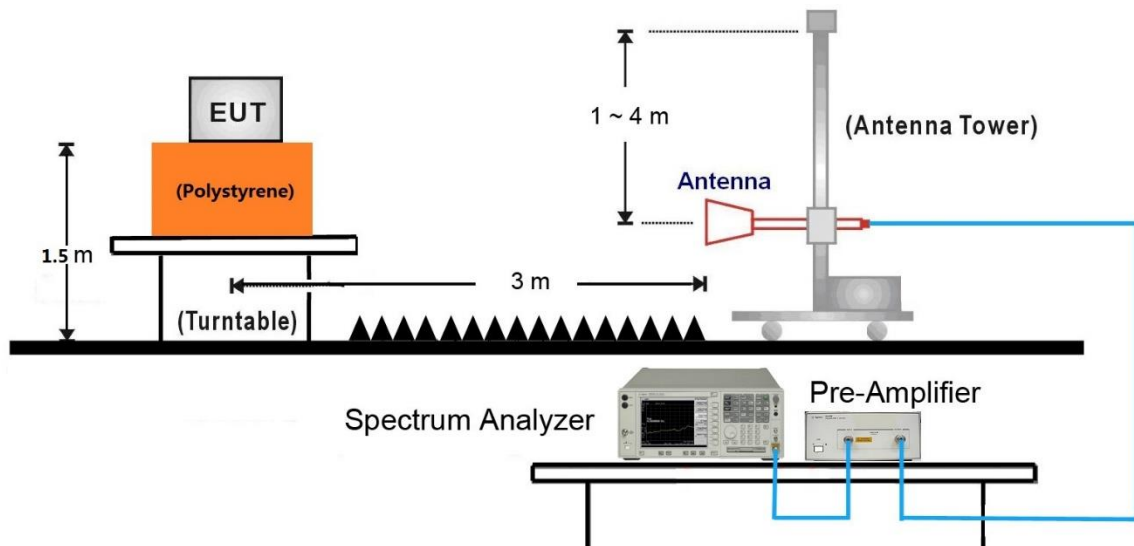


18GHz ~40GHz Test Setup:

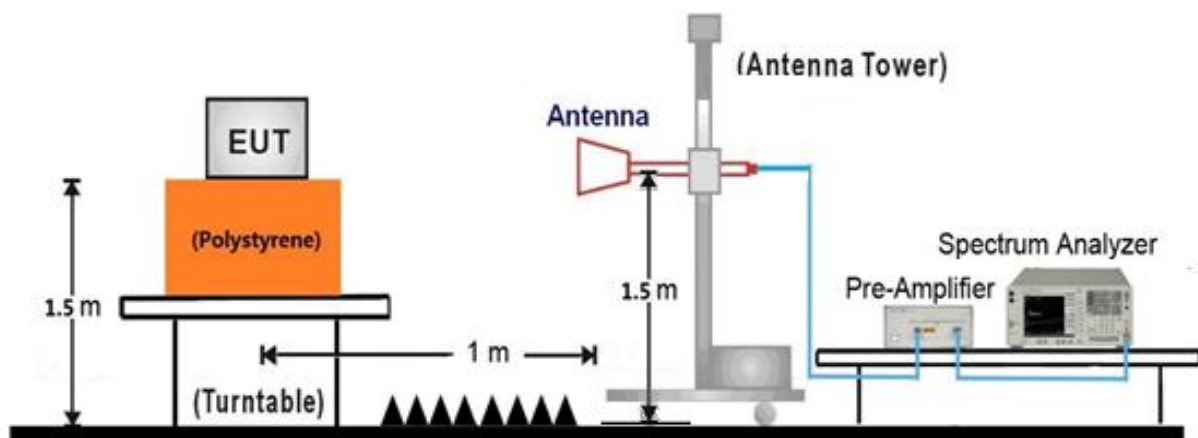

7.8.5. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	VULB 9162	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	By Battery

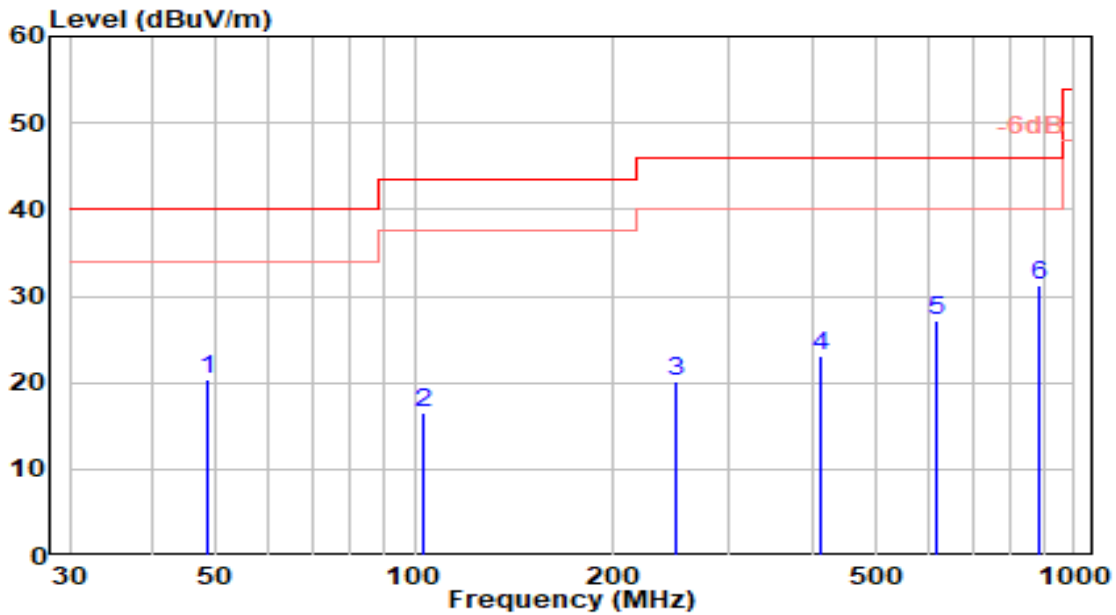


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	48.430	-1.20	21.56	20.36	-19.64	40.00	100	100	QP
2	102.750	-2.70	19.19	16.49	-27.01	43.50	100	320	QP
3	249.220	-0.72	20.79	20.07	-25.93	46.00	100	25	QP
4	414.120	-1.17	24.15	22.98	-23.02	46.00	100	50	QP
5	619.760	-0.68	27.88	27.20	-18.80	46.00	100	185	QP
6	* 882.630	-0.12	31.39	31.27	-14.73	46.00	100	25	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz)is that proximity to ambient noise ,which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	VULB 9162	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	By Battery

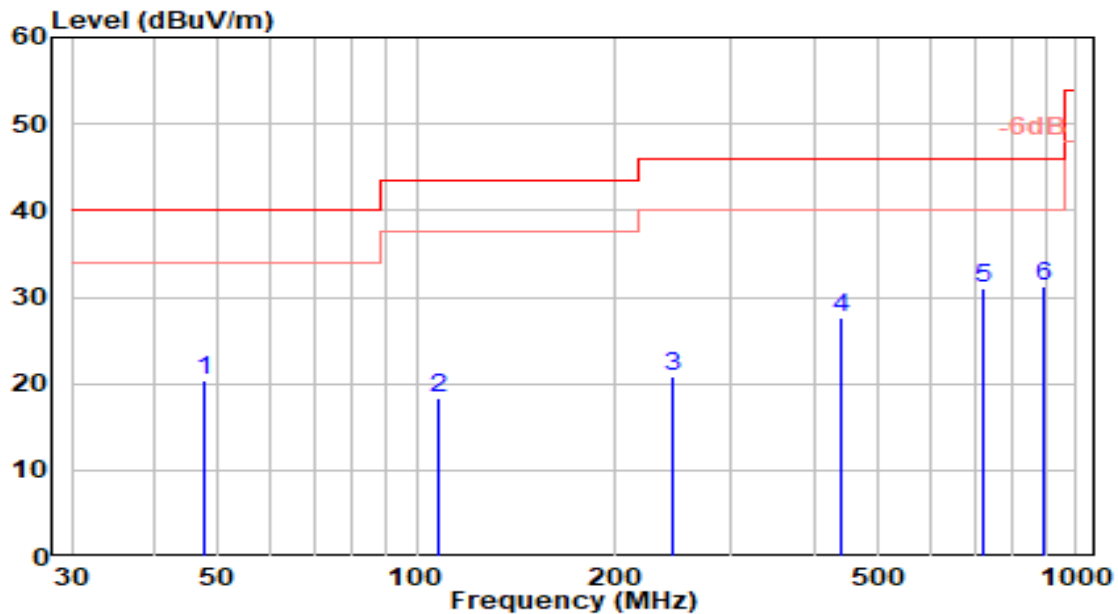


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	47.460	-1.17	21.54	20.36	-19.64	40.00	100	170	QP
2	107.600	-0.67	18.96	18.29	-25.21	43.50	100	25	QP
3	245.340	0.15	20.59	20.73	-25.27	46.00	100	35	QP
4	441.280	3.26	24.36	27.62	-18.38	46.00	100	190	QP
5	721.610	1.70	29.22	30.91	-15.09	46.00	100	175	QP
6	* 891.360	-0.20	31.51	31.32	-14.68	46.00	100	225	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz)is that proximity to ambient noise ,which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	VULB 9162	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	By Battery

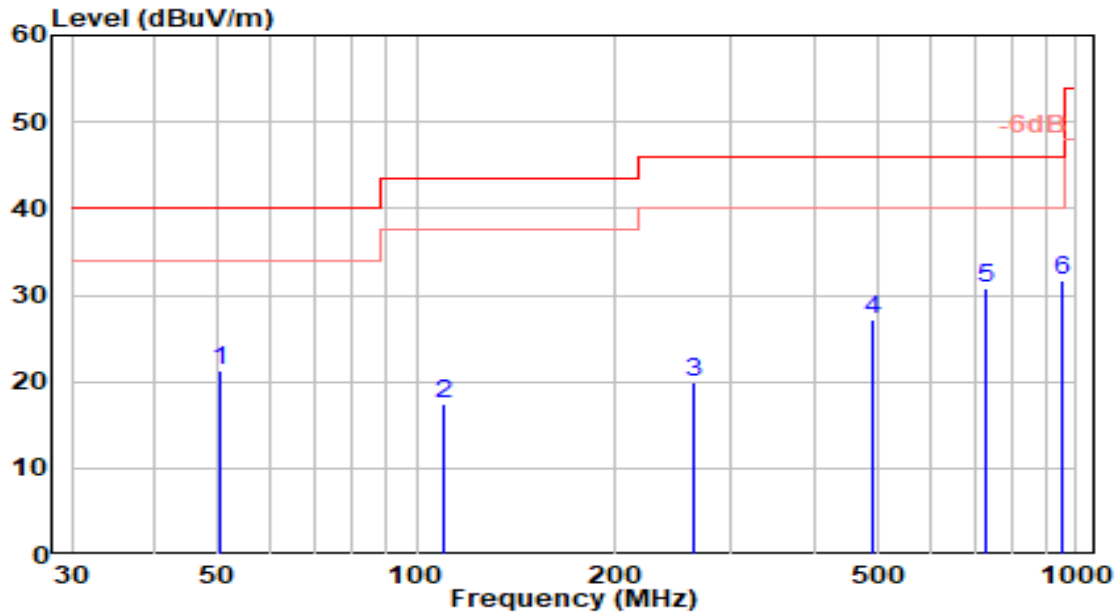


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	50.370	-0.32	21.54	21.22	-18.78	40.00	110	200	QP
2	109.540	-1.47	18.87	17.40	-26.10	43.50	100	110	QP
3	263.770	-0.92	20.77	19.84	-26.16	46.00	100	335	QP
4	491.720	1.62	25.51	27.13	-18.87	46.00	100	90	QP
5	731.310	1.43	29.35	30.78	-15.22	46.00	100	25	QP
6	* 951.500	0.16	31.64	31.81	-14.19	46.00	100	185	QP

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz)is that proximity to ambient noise ,which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	VULB 9162	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	By Battery

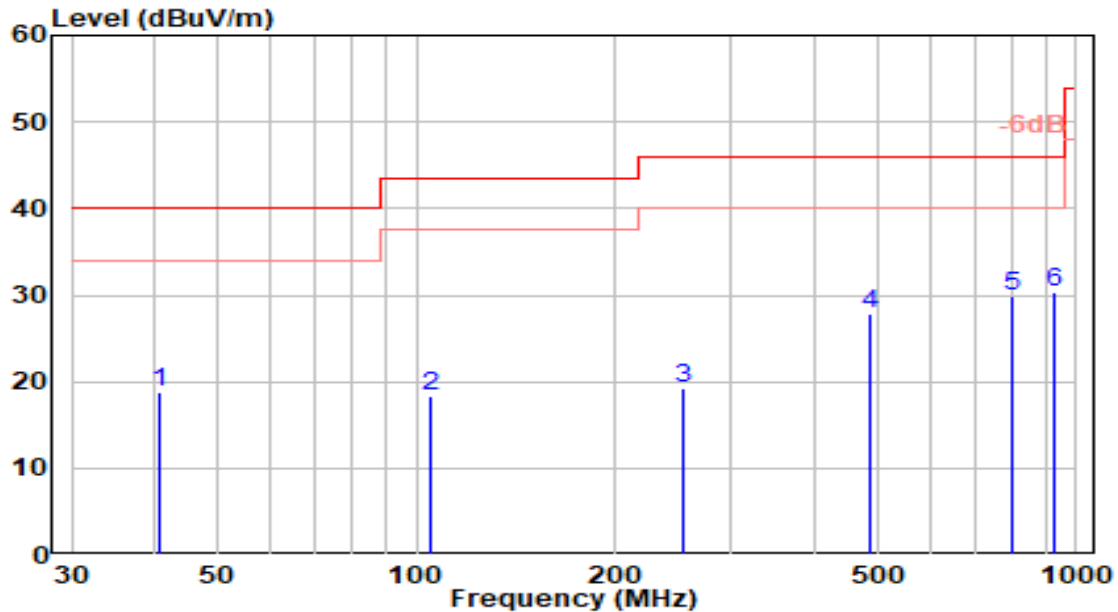


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	40.670	-1.88	20.59	18.71	-21.29	40.00	110	110	QP
2	104.690	-0.82	19.10	18.28	-25.22	43.50	100	250	QP
3	254.070	-1.60	20.80	19.20	-26.80	46.00	100	235	QP
4	484.930	2.49	25.33	27.82	-18.18	46.00	100	150	QP
5	797.270	0.05	29.87	29.92	-16.08	46.00	100	350	QP
6	* 923.370	-1.29	31.64	30.35	-15.65	46.00	110	125	QP

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz)is that proximity to ambient noise ,which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Battery

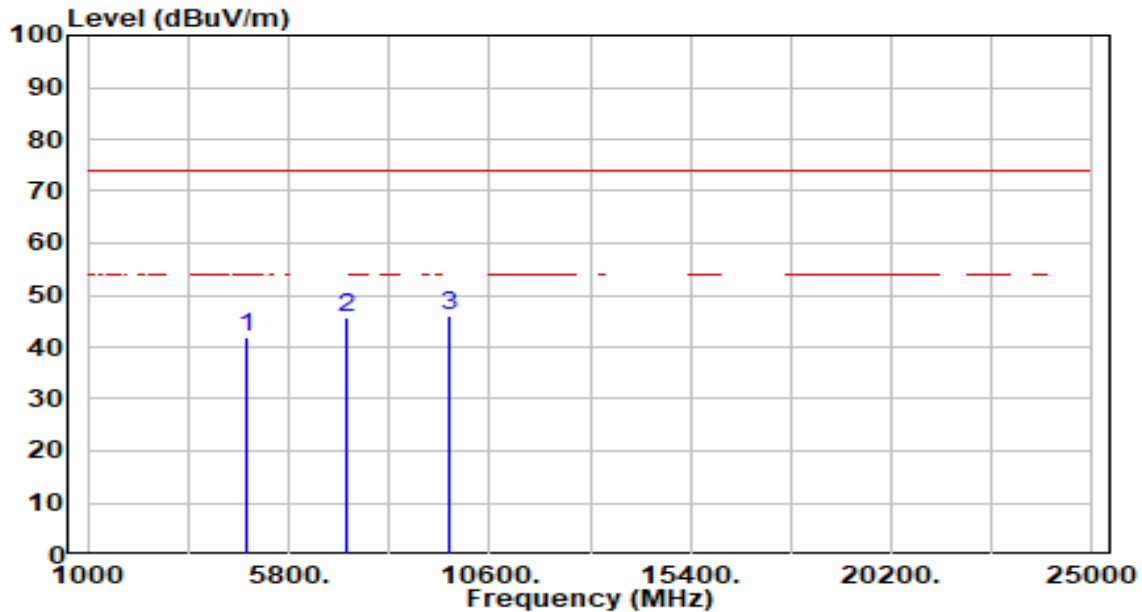


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	41.80	0.21	42.01	-31.99	74.00	100	360	Peak
2	7206.000	39.81	5.82	45.63	-28.37	74.00	100	360	Peak
3	* 9608.000	40.76	5.32	46.07	-27.93	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Battery

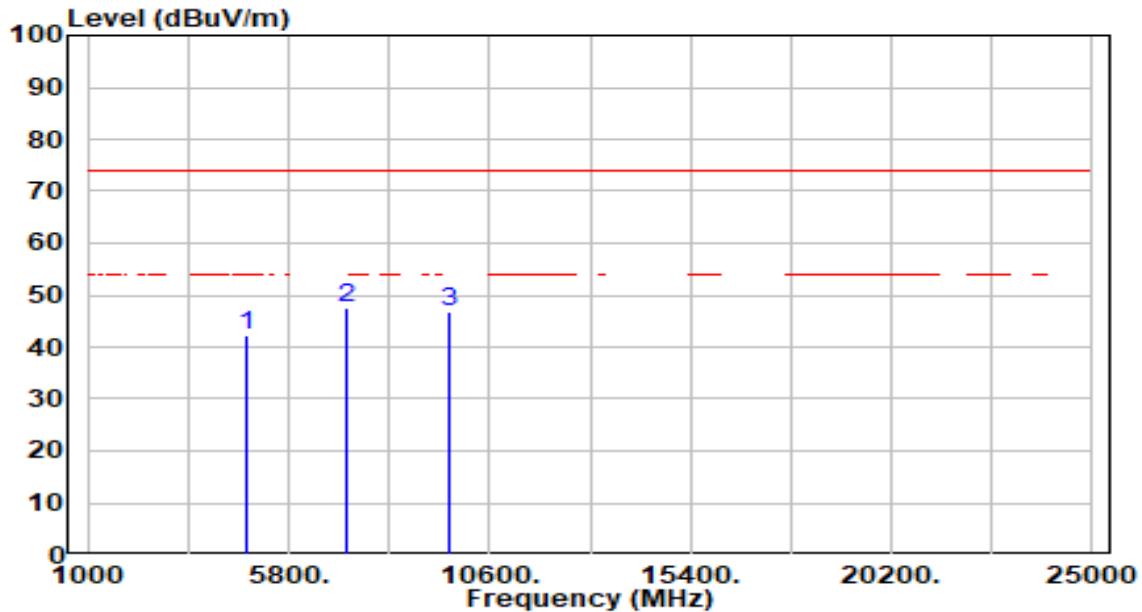


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	41.92	0.21	42.13	-31.87	74.00	100	360	Peak
2	* 7206.000	41.90	5.82	47.73	-26.27	74.00	100	360	Peak
3	9608.000	41.30	5.32	46.62	-27.38	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	By Battery

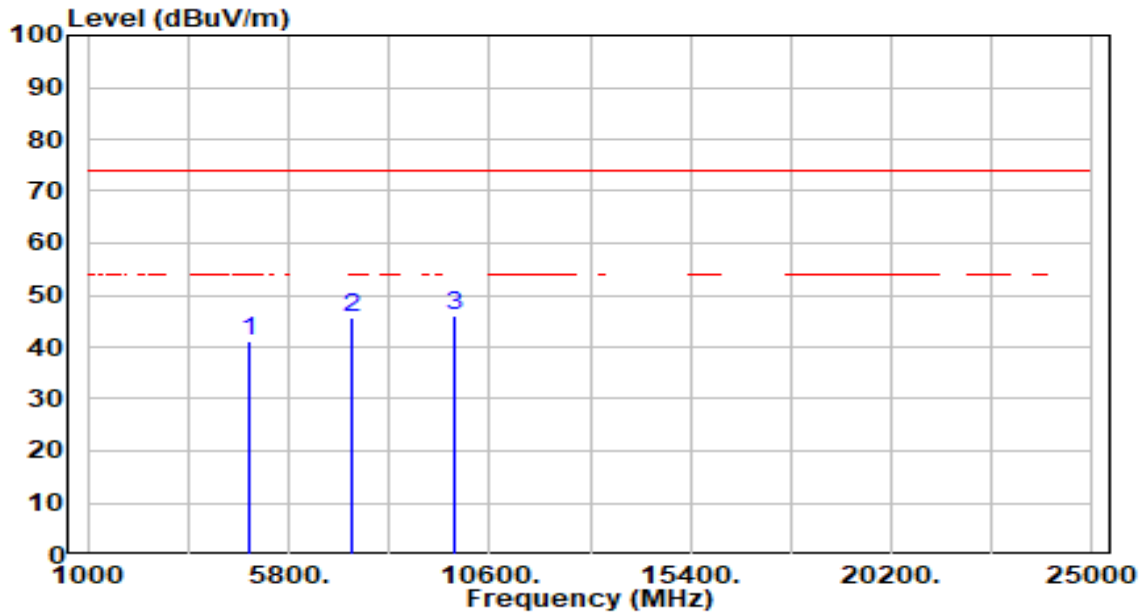


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	40.92	0.37	41.29	-32.71	74.00	100	360	Peak
2	7323.000	40.02	5.79	45.81	-28.19	74.00	100	360	Peak
3	* 9764.000	40.88	5.34	46.22	-27.78	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	By Battery

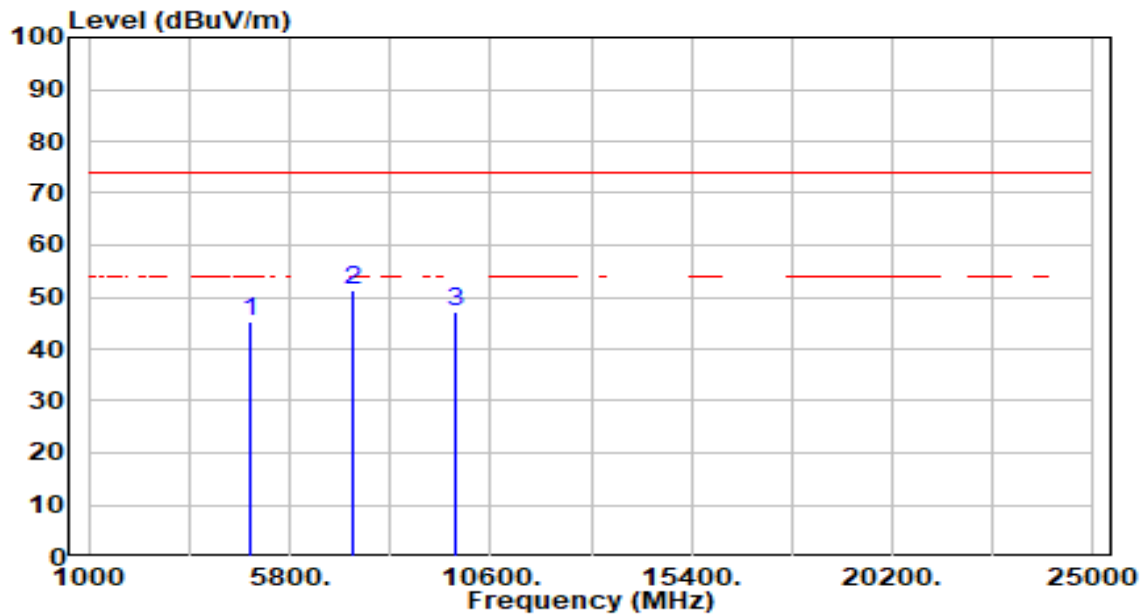


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	44.74	0.37	45.11	-28.89	74.00	100	360	Peak
2	* 7323.000	45.38	5.79	51.17	-22.83	74.00	100	360	Peak
3	9764.000	41.88	5.34	47.22	-26.78	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 78_Left Ear	Test Voltage	By Battery

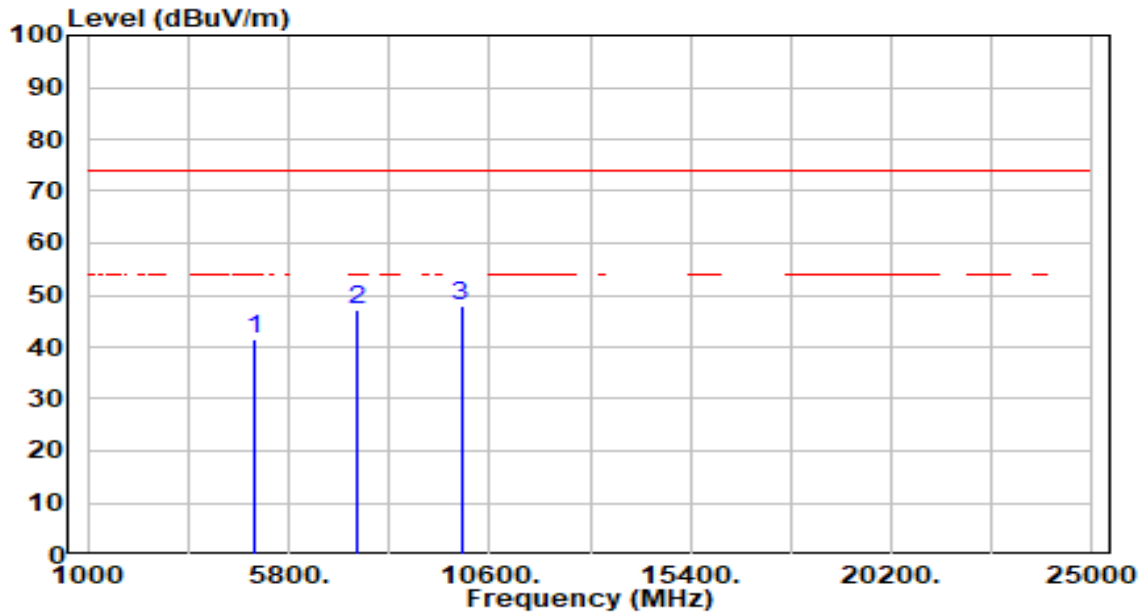


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	40.97	0.53	41.50	-32.50	74.00	100	360	Peak
2	7440.000	41.40	5.74	47.14	-26.86	74.00	100	360	Peak
3	* 9920.000	42.54	5.43	47.97	-26.03	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 78_Left Ear	Test Voltage	By Battery

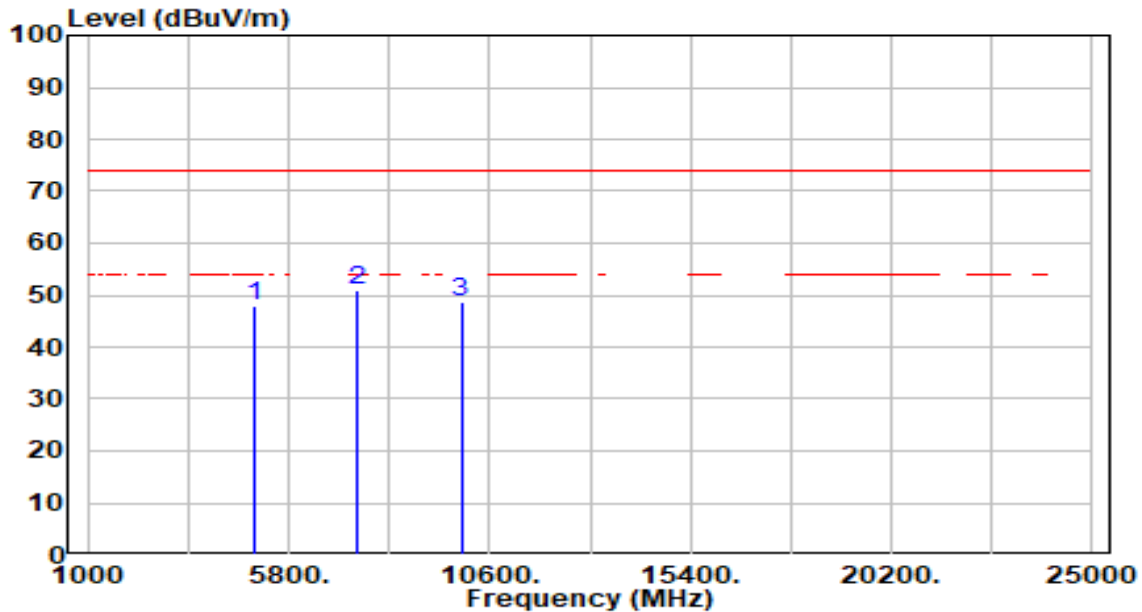


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	47.47	0.53	48.00	-26.00	74.00	100	360	Peak
2	* 7440.000	45.19	5.74	50.93	-23.07	74.00	100	360	Peak
3	9920.000	43.11	5.43	48.54	-25.46	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 0_Left Ear	Test Voltage	By Battery

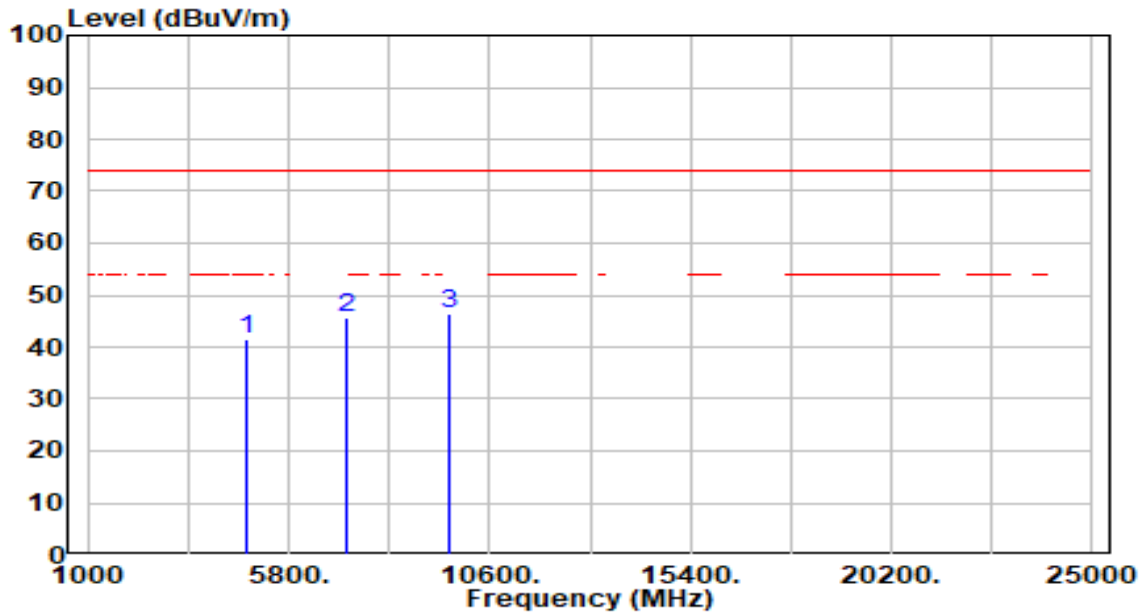


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	41.22	0.21	41.43	-32.57	74.00	100	360	Peak
2	7206.000	39.99	5.82	45.81	-28.19	74.00	100	360	Peak
3	* 9608.000	41.14	5.32	46.46	-27.54	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 0_Left Ear	Test Voltage	By Battery

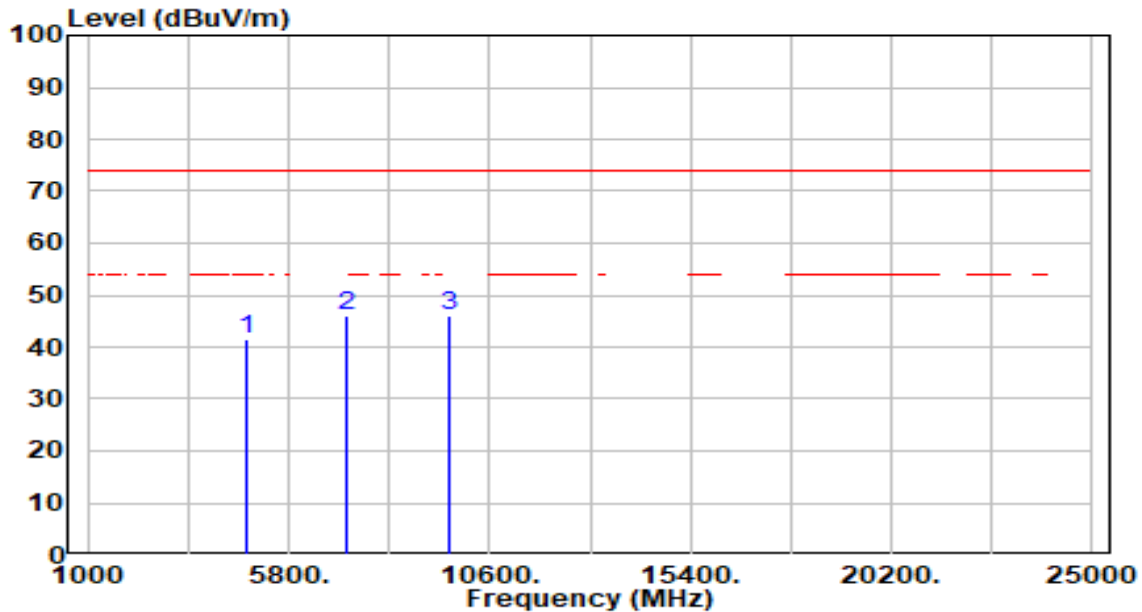


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	41.38	0.21	41.59	-32.41	74.00	100	360	Peak
2	7206.000	40.25	5.82	46.07	-27.93	74.00	100	360	Peak
3	* 9608.000	40.82	5.32	46.14	-27.86	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 39_Left Ear	Test Voltage	By Battery

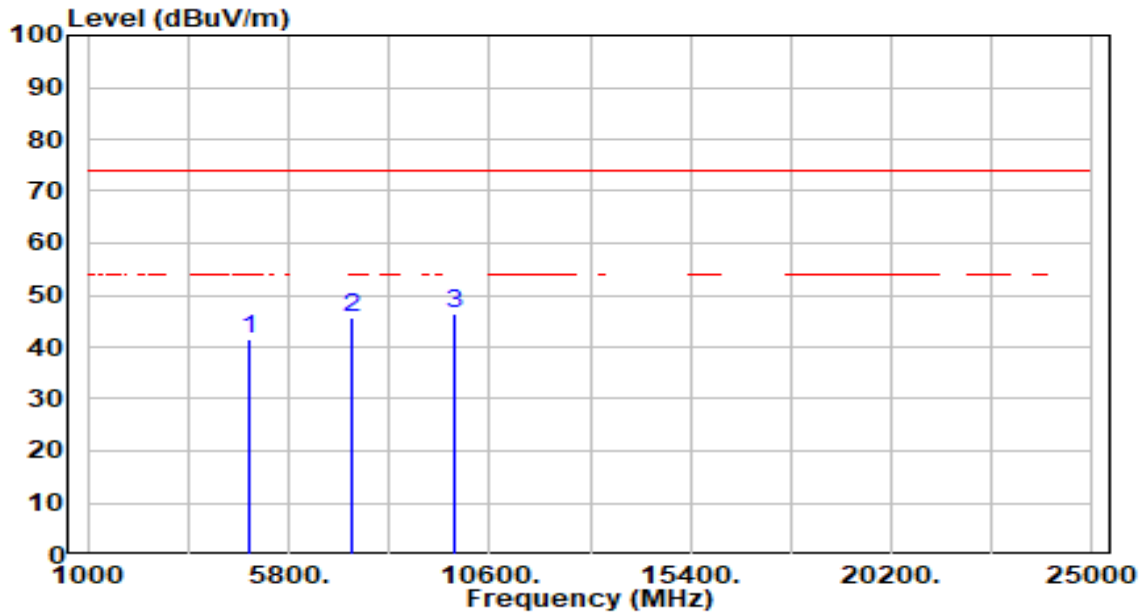


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	41.19	0.37	41.56	-32.44	74.00	100	360	Peak
2	7323.000	39.81	5.79	45.60	-28.40	74.00	100	360	Peak
3	* 9764.000	41.02	5.34	46.37	-27.63	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 39_Left Ear	Test Voltage	By Battery

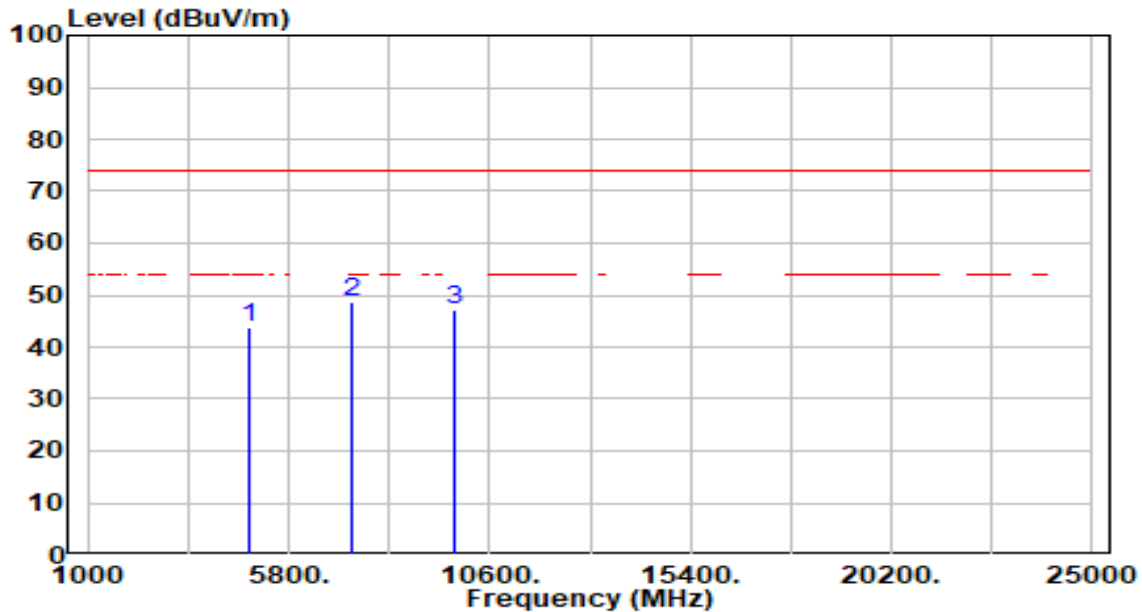


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	43.37	0.37	43.74	-30.26	74.00	100	360	Peak
2	* 7323.000	42.81	5.79	48.60	-25.40	74.00	100	360	Peak
3	9764.000	41.72	5.34	47.06	-26.94	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 78_Left Ear	Test Voltage	By Battery

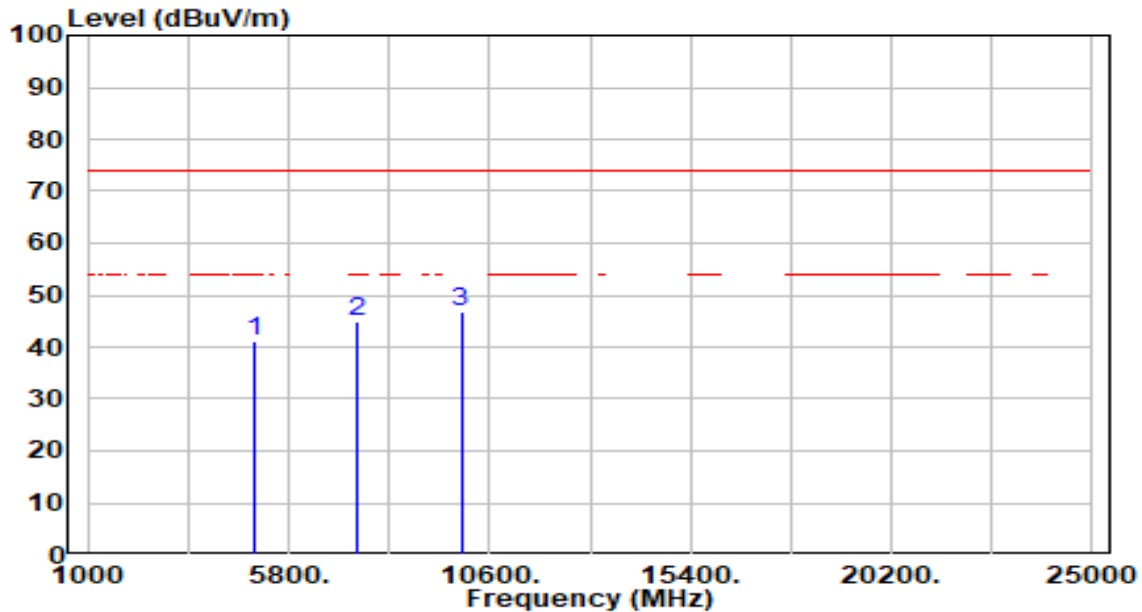


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	40.60	0.53	41.13	-32.87	74.00	100	360	Peak
2	7440.000	39.34	5.74	45.08	-28.92	74.00	100	360	Peak
3	* 9920.000	41.40	5.43	46.82	-27.18	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 78_Left Ear	Test Voltage	By Battery

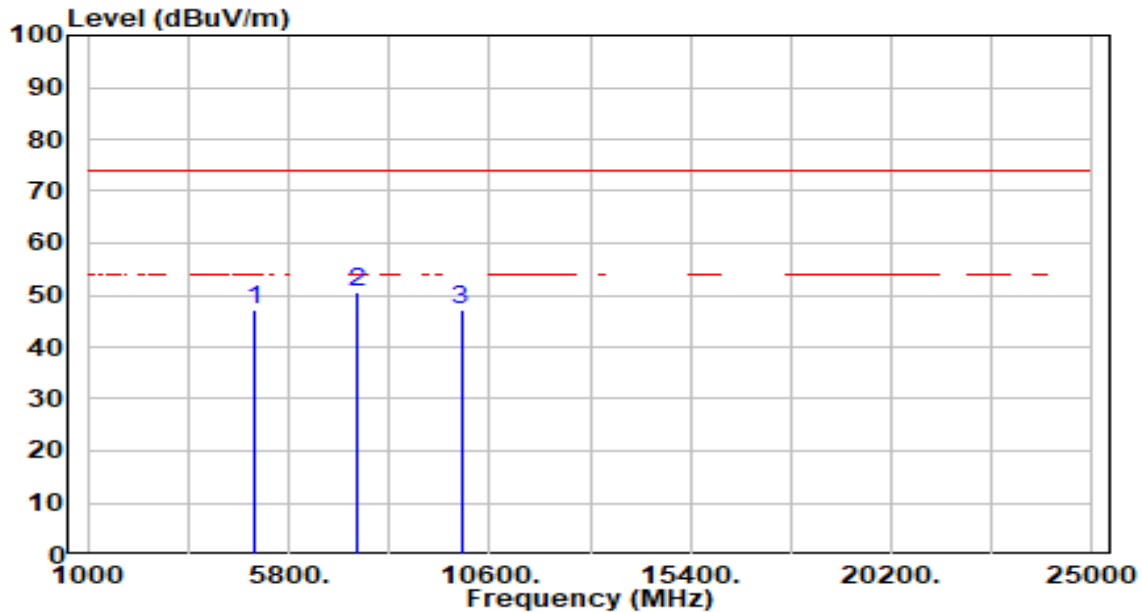


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	46.69	0.53	47.22	-26.78	74.00	100	360	Peak
2	* 7440.000	44.69	5.74	50.42	-23.58	74.00	100	360	Peak
3	9920.000	41.77	5.43	47.19	-26.81	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Battery

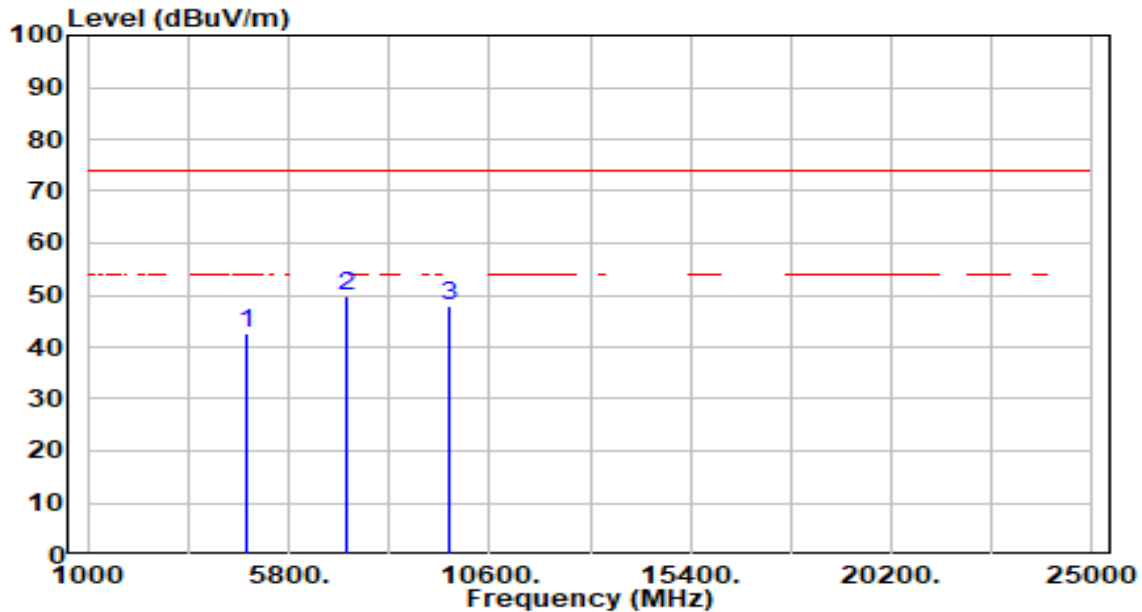


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	42.41	0.21	42.62	-31.38	74.00	100	360	Peak
2	* 7206.000	43.95	5.82	49.77	-24.23	74.00	100	360	Peak
3	9608.000	42.69	5.32	48.01	-25.99	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Battery

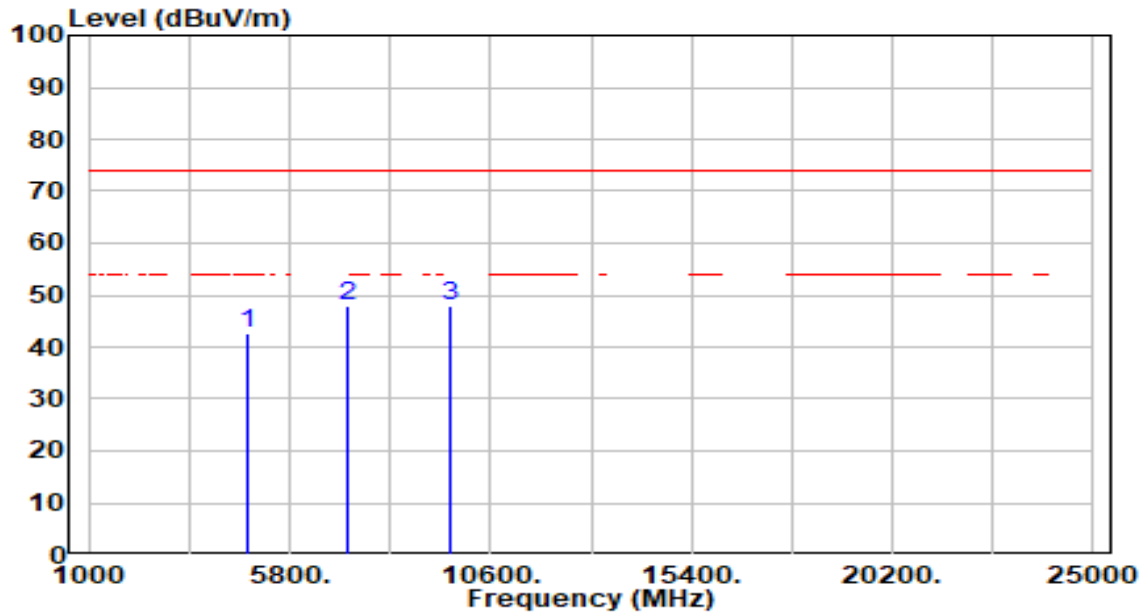


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	42.48	0.21	42.69	-31.31	74.00	100	360	Peak
2	* 7206.000	42.26	5.82	48.08	-25.92	74.00	100	360	Peak
3	9608.000	42.75	5.32	48.07	-25.93	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	By Battery

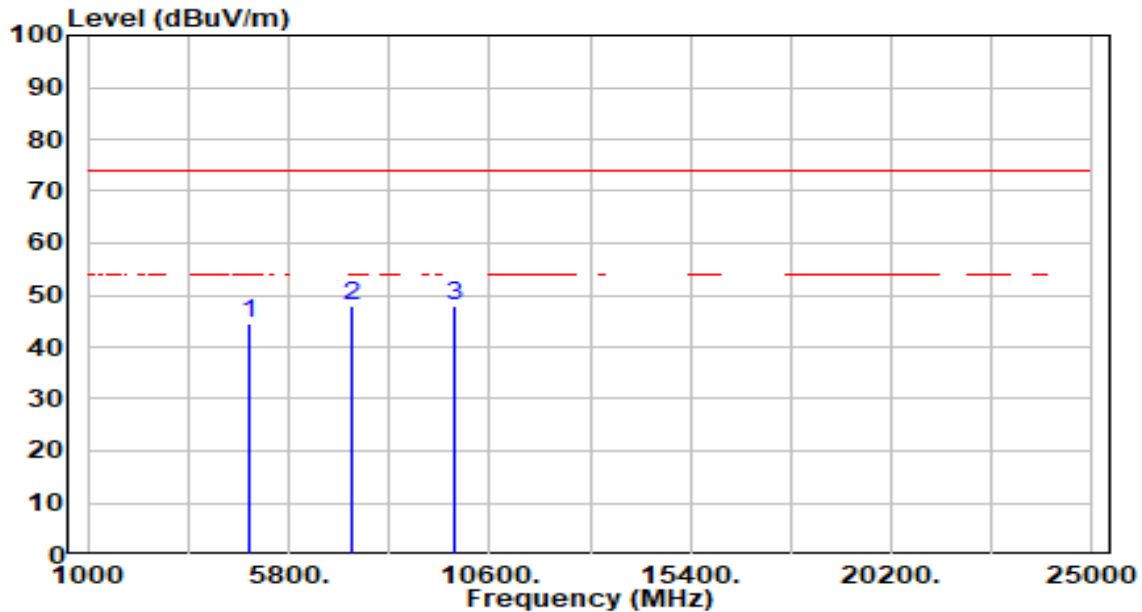


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	44.20	0.37	44.57	-29.43	74.00	100	360	Peak
2	* 7323.000	42.31	5.79	48.10	-25.90	74.00	100	360	Peak
3	9764.000	42.68	5.34	48.02	-25.98	74.00	100	360	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	By Battery

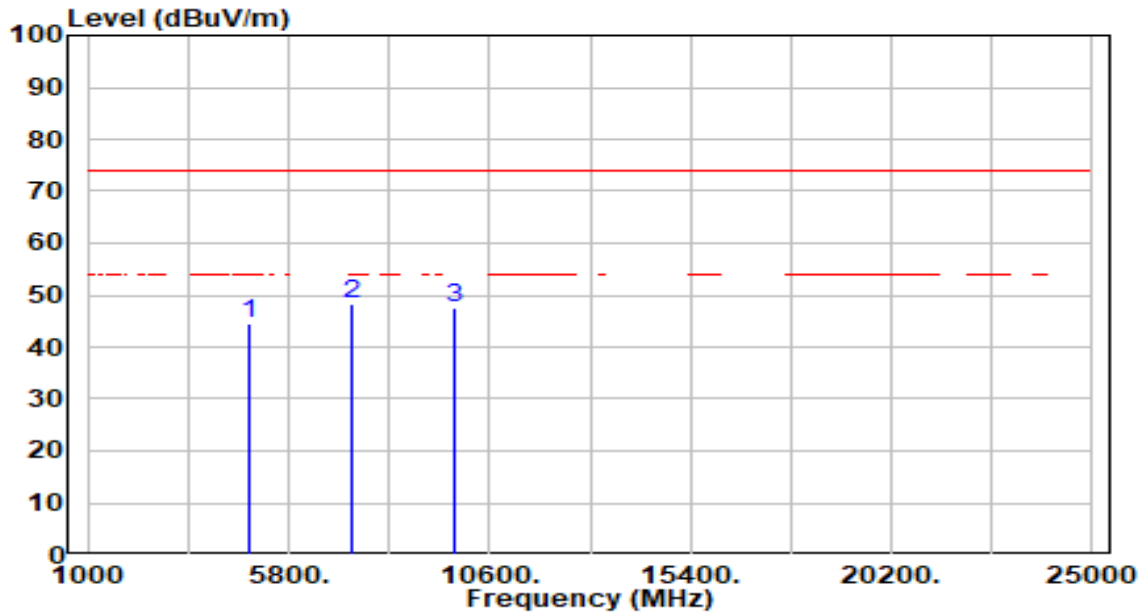


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	44.33	0.37	44.70	-29.30	74.00	100	360	Peak
2	* 7323.000	42.64	5.79	48.43	-25.57	74.00	100	360	Peak
3	9764.000	42.31	5.34	47.65	-26.35	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 78_Right Ear	Test Voltage	By Battery

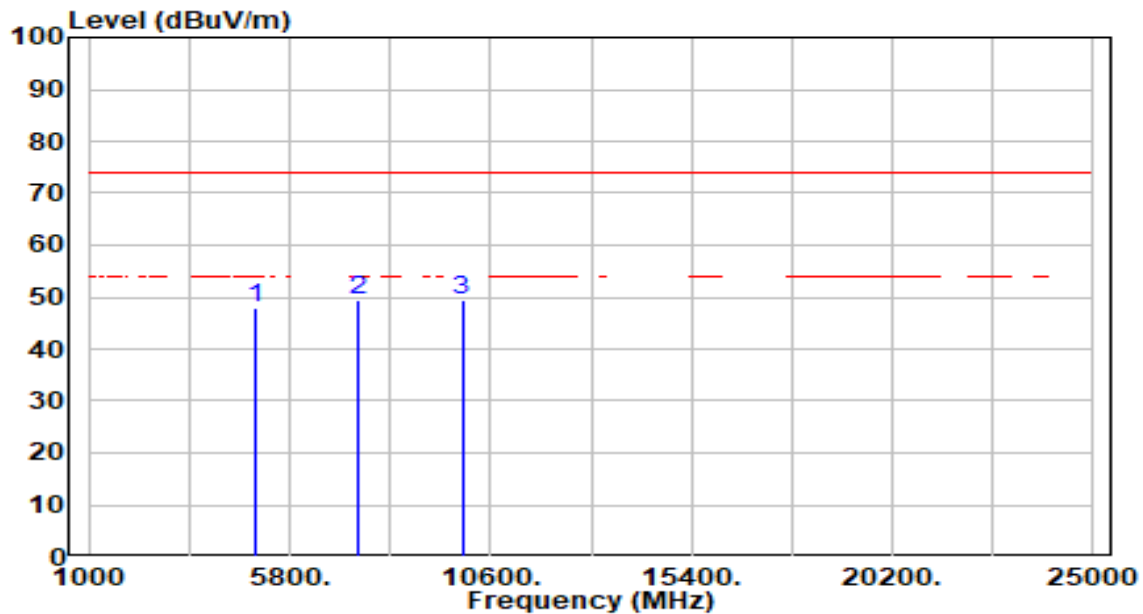


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	47.39	0.53	47.92	-26.08	74.00	100	360	Peak
2	* 7440.000	43.81	5.74	49.54	-24.46	74.00	100	360	Peak
3	9920.000	44.08	5.43	49.50	-24.50	74.00	100	360	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 78_Right Ear	Test Voltage	By Battery

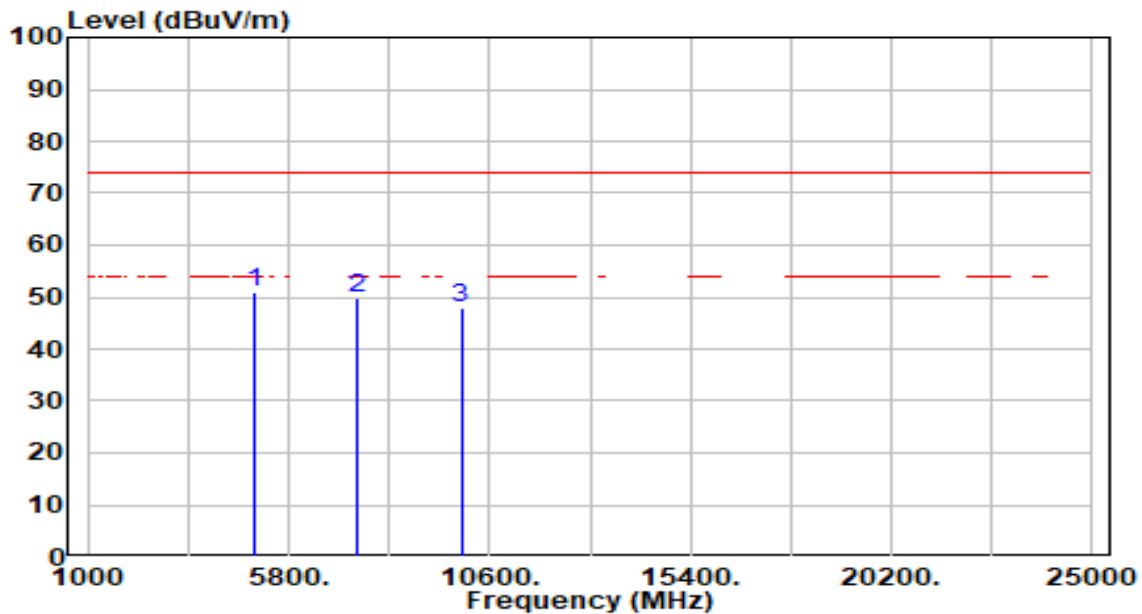


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4960.000	50.33	0.53	50.86	-23.14	74.00	100	360	Peak
2	7440.000	44.24	5.74	49.97	-24.03	74.00	100	360	Peak
3	9920.000	42.45	5.43	47.88	-26.12	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 0_Right Ear	Test Voltage	By Battery

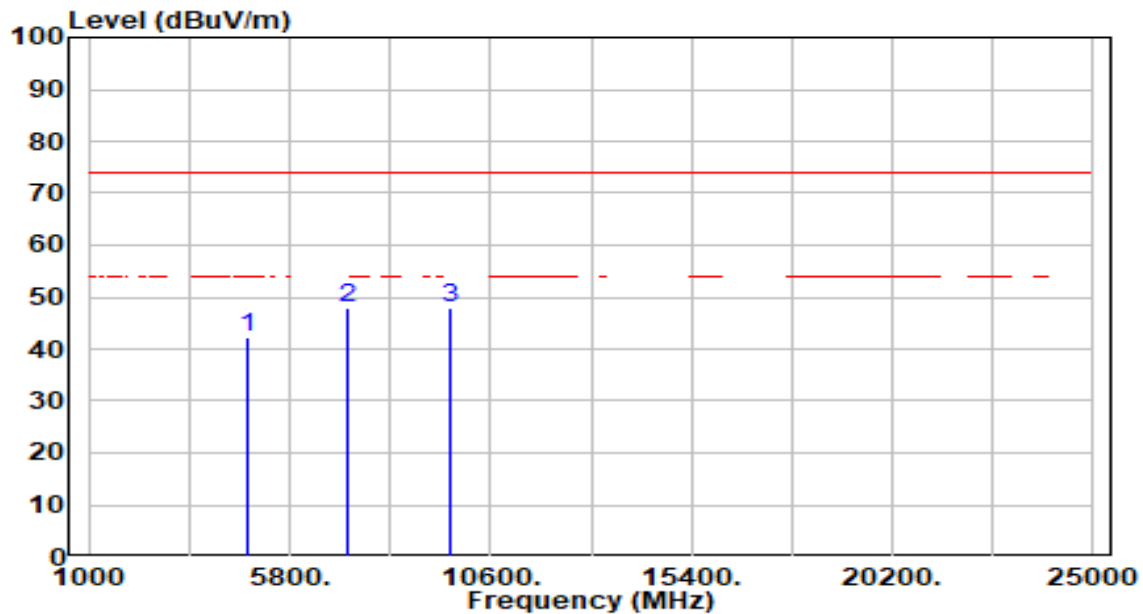


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	41.98	0.21	42.19	-31.81	74.00	100	360	Peak
2	7206.000	42.13	5.82	47.95	-26.05	74.00	100	360	Peak
3	* 9608.000	42.72	5.32	48.04	-25.96	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 0_Right Ear	Test Voltage	By Battery

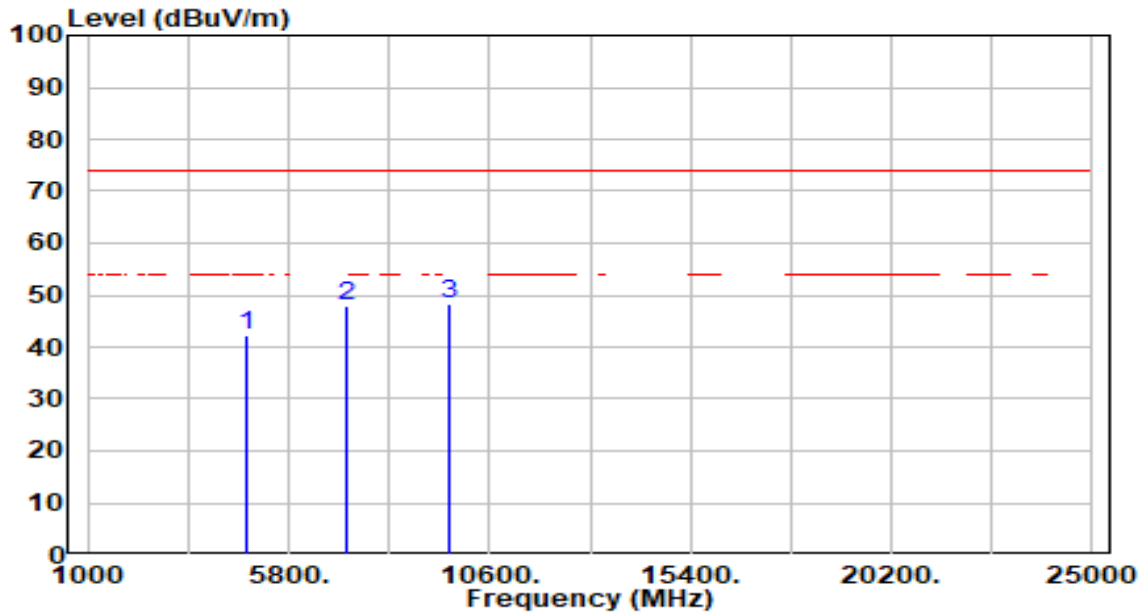


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4804.000	42.05	0.21	42.26	-31.74	74.00	100	360	Peak
2	7206.000	42.04	5.82	47.86	-26.14	74.00	100	360	Peak
3	* 9608.000	42.92	5.32	48.23	-25.77	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 39_Right Ear	Test Voltage	By Battery

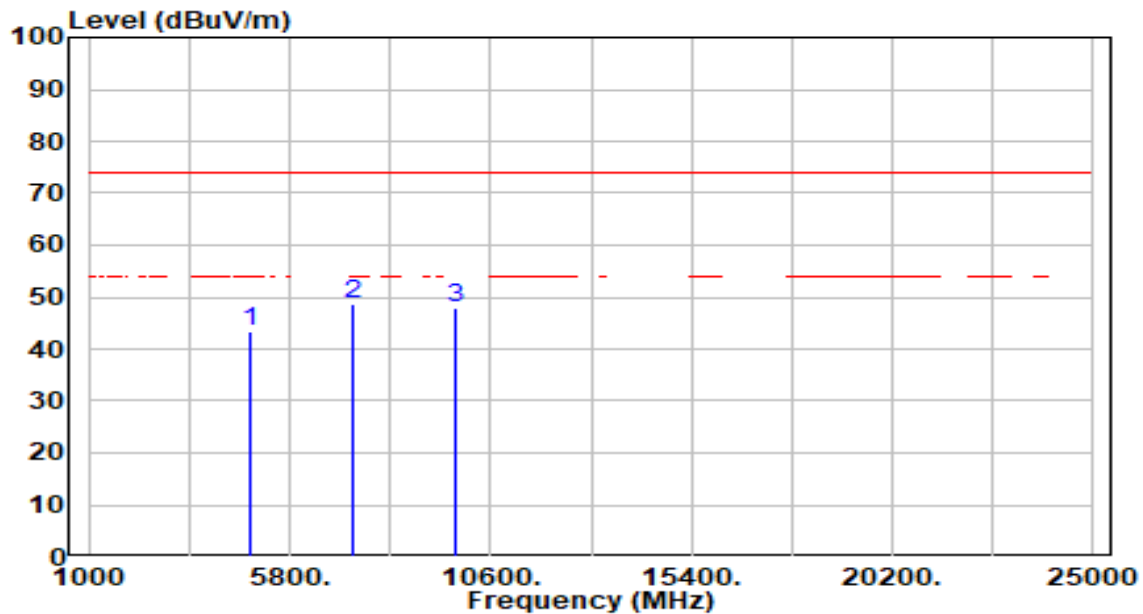


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	42.86	0.37	43.23	-30.77	74.00	100	360	Peak
2	* 7323.000	42.78	5.79	48.57	-25.43	74.00	100	360	Peak
3	9764.000	42.69	5.34	48.03	-25.97	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 39_Right Ear	Test Voltage	By Battery

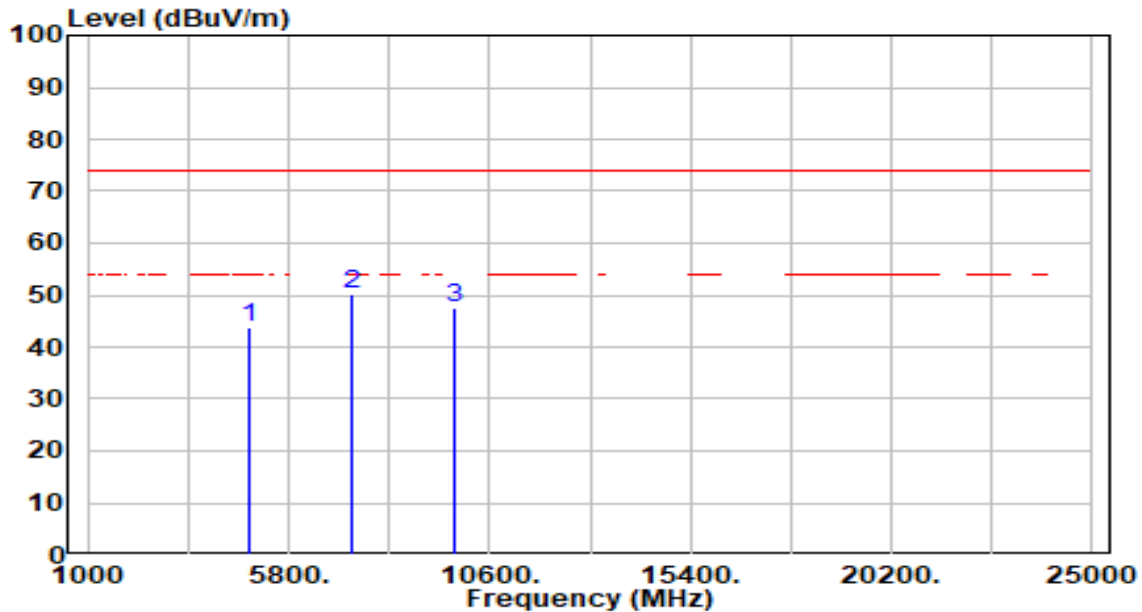


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4882.000	43.39	0.37	43.76	-30.24	74.00	100	360	Peak
2	* 7323.000	44.26	5.79	50.05	-23.95	74.00	100	360	Peak
3	9764.000	42.25	5.34	47.59	-26.41	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 78_Right Ear	Test Voltage	By Battery

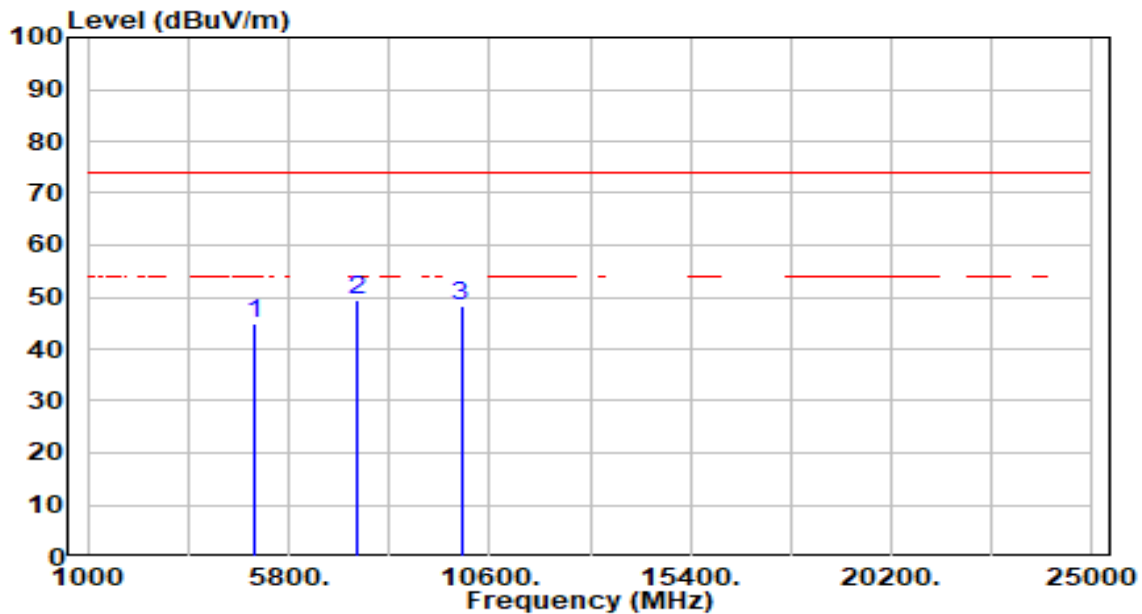


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4960.000	44.51	0.53	45.04	-28.96	74.00	100	360	Peak
2	* 7440.000	43.72	5.74	49.46	-24.54	74.00	100	360	Peak
3	9920.000	42.76	5.43	48.19	-25.81	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 78_Right Ear	Test Voltage	By Battery

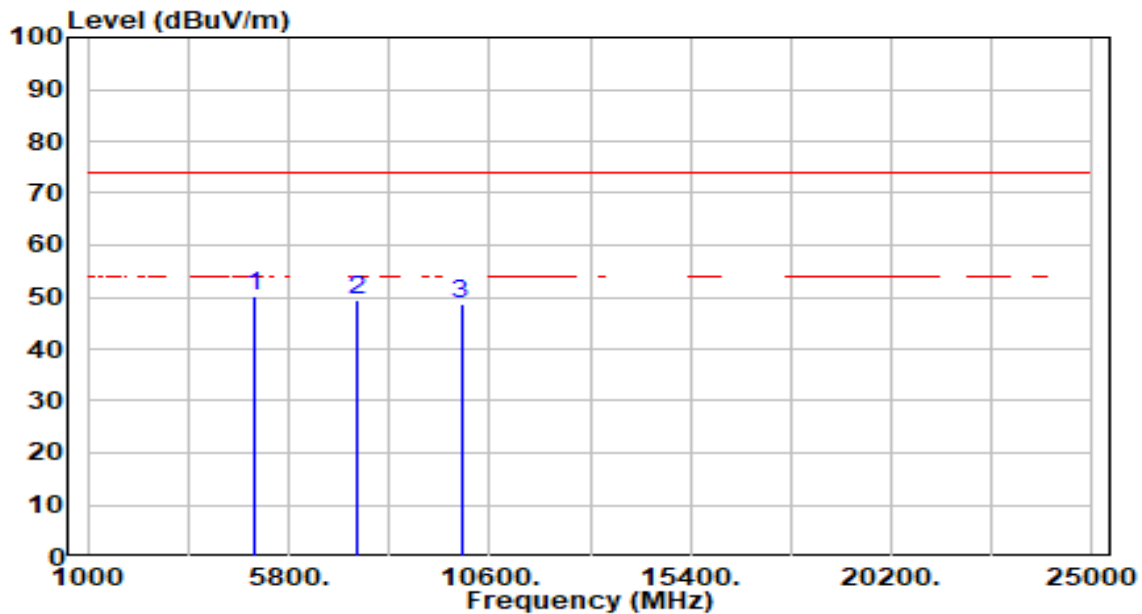

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4960.000	49.72	0.53	50.25	-23.75	74.00	100	360	Peak
2	7440.000	43.55	5.74	49.28	-24.72	74.00	100	360	Peak
3	9920.000	43.41	5.43	48.84	-25.16	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.9.3. Test Setting

Peak Field Strength Measurements

8. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
9. RBW = as specified in Table 1
10. VBW = 3 * RBW
11. Detector = peak
12. Sweep time = auto couple
13. Trace mode = max hold
14. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


9. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
10. RBW = 1MHz
11. VBW $\geq 1/T$
12. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
13. Detector = Peak
14. Sweep time = auto
15. Trace mode = max hold
16. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup

1GHz ~ 18GHz Test Setup:

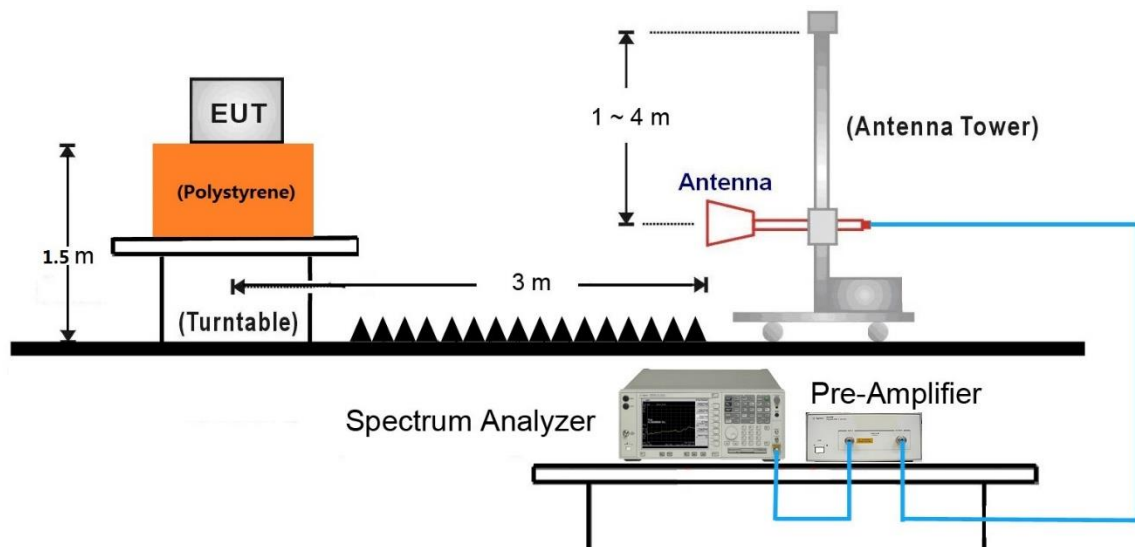


18GHz ~40GHz Test Setup:

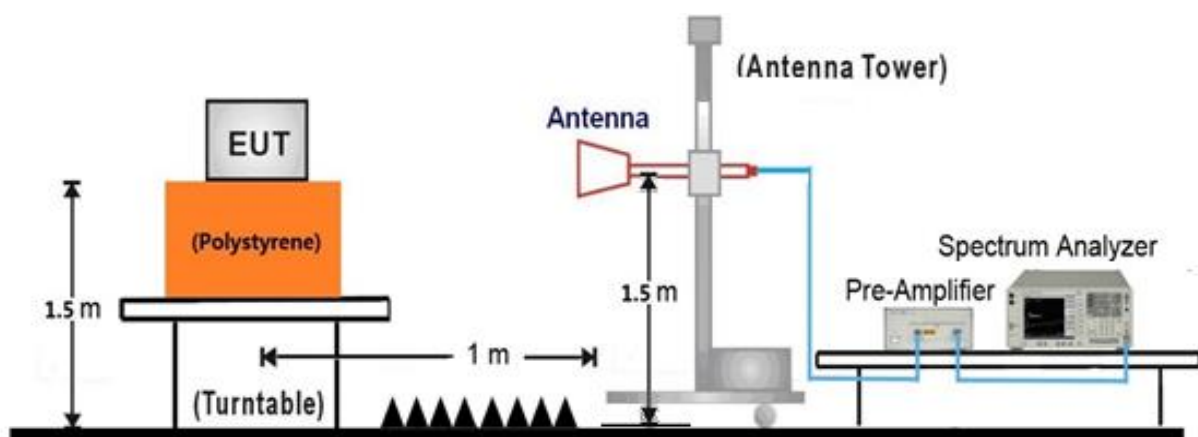

7.9.5. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Battery

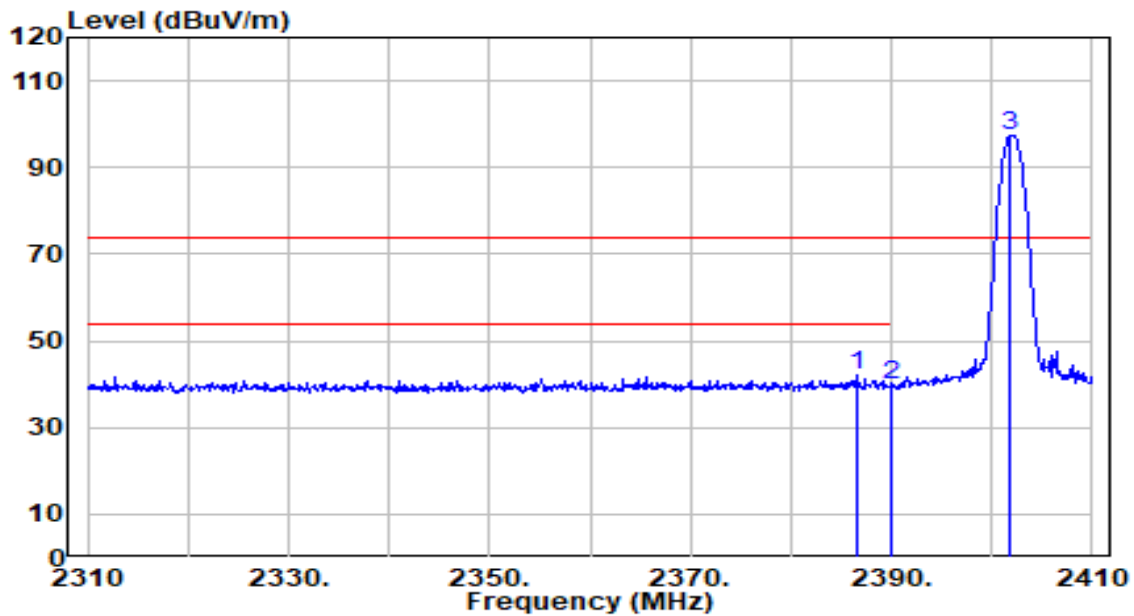


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2386.700	46.91	-5.00	41.92	-32.08	74.00	145	50	Peak
2	2390.000	45.05	-5.00	40.05	-33.95	74.00	145	50	Peak
3	2401.900	102.40	-4.99	97.41	N/A	N/A	145	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 0_Left Ear	Test Voltage	By Battery

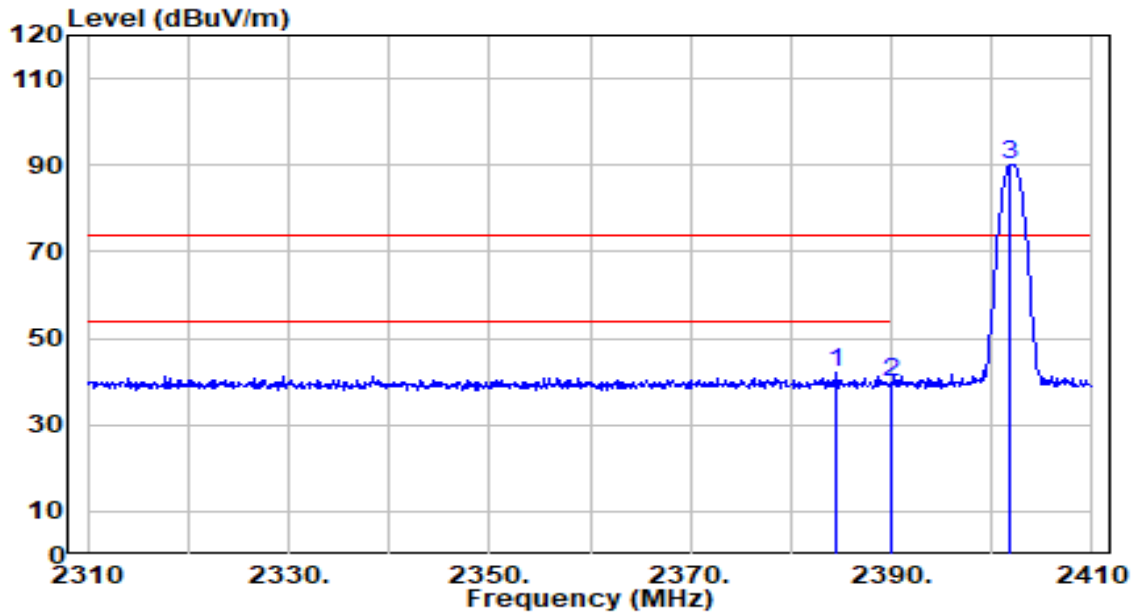


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.600	46.96	-5.00	41.96	-32.04	74.00	215	10	Peak
2	2390.000	44.83	-5.00	39.83	-34.17	74.00	215	10	Peak
3	2401.900	95.23	-4.99	90.24	N/A	N/A	215	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 78_Left Ear	Test Voltage	By Battery

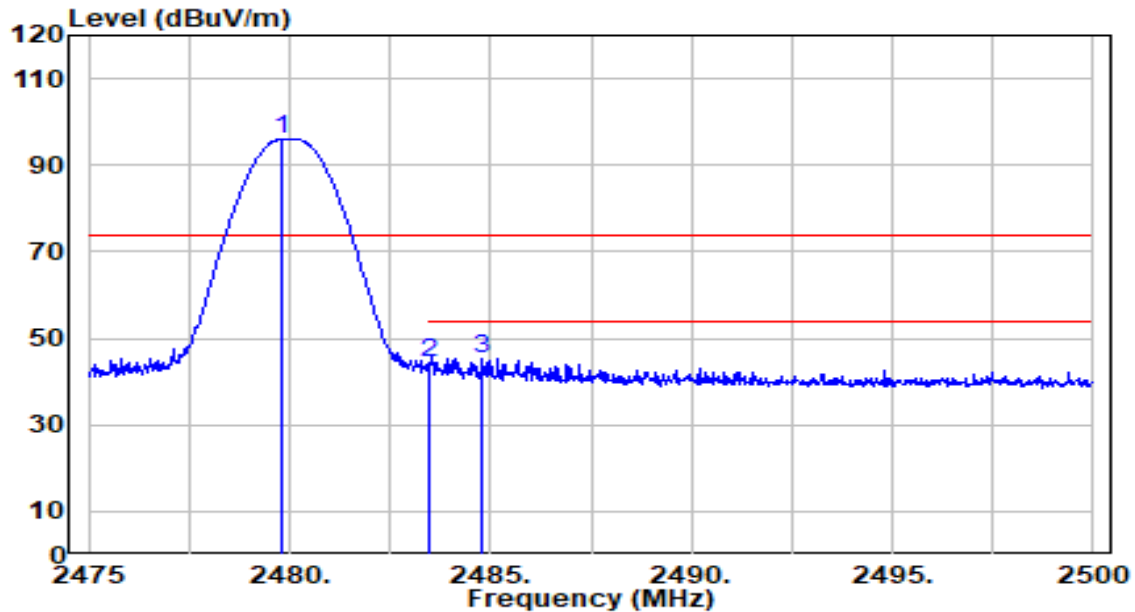


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.800	100.85	-4.80	96.05	N/A	N/A	155	260	Peak
2	2483.500	49.05	-4.79	44.26	-29.74	74.00	155	260	Peak
3	* 2484.775	50.24	-4.79	45.45	-28.55	74.00	155	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 78_Left Ear	Test Voltage	By Battery

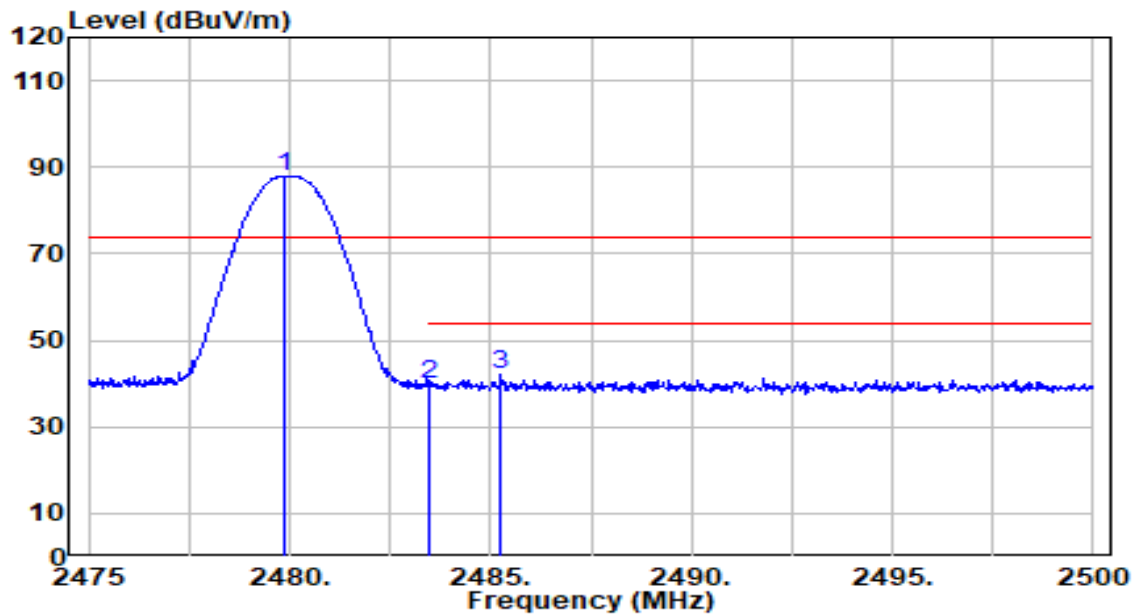


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.850	92.62	-4.80	87.82	N/A	N/A	230	195	Peak
2	2483.500	44.74	-4.79	39.95	-34.05	74.00	230	195	Peak
3	* 2485.250	46.80	-4.79	42.01	-31.99	74.00	230	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 0_Left Ear	Test Voltage	By Battery

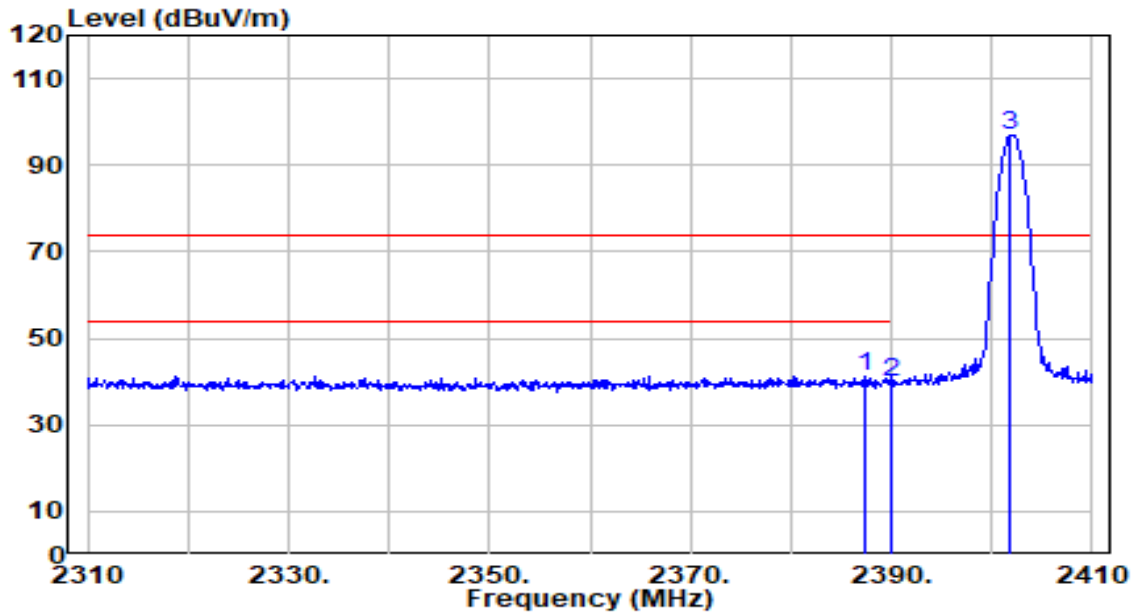


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.300	46.42	-5.00	41.42	-32.58	74.00	145	50	Peak
2	2390.000	44.90	-5.00	39.91	-34.09	74.00	145	50	Peak
3	2401.900	101.89	-4.99	96.90	N/A	N/A	145	50	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 0_Left Ear	Test Voltage	By Battery

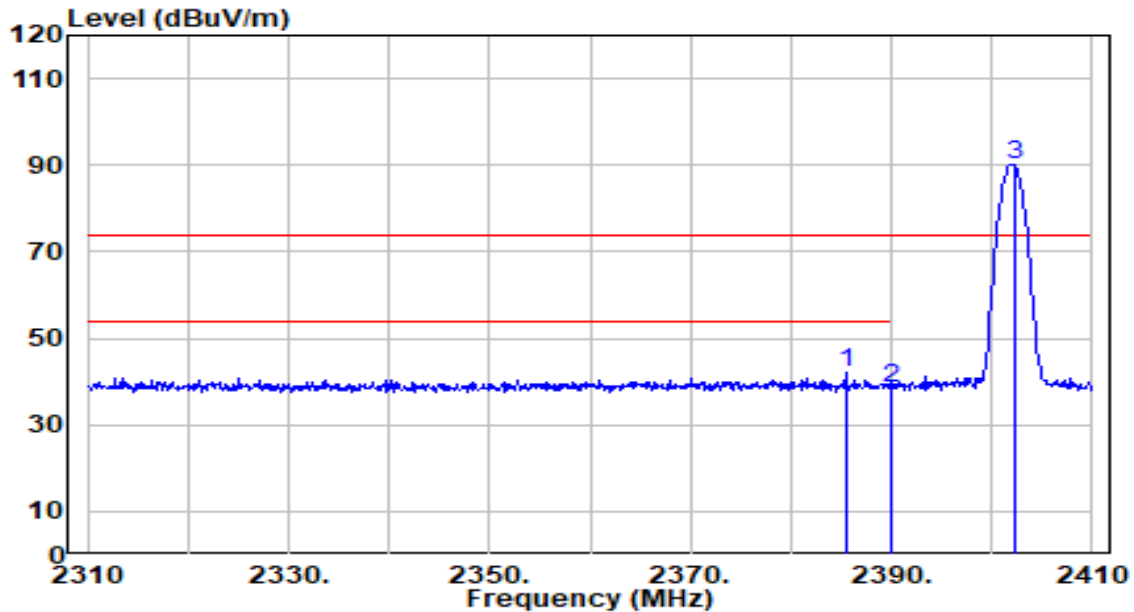


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2385.500	47.20	-5.00	42.20	-31.80	74.00	215	10	Peak
2	2390.000	43.54	-5.00	38.54	-35.46	74.00	215	10	Peak
3	2402.200	95.32	-4.99	90.33	N/A	N/A	215	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 78_Left Ear	Test Voltage	By Battery

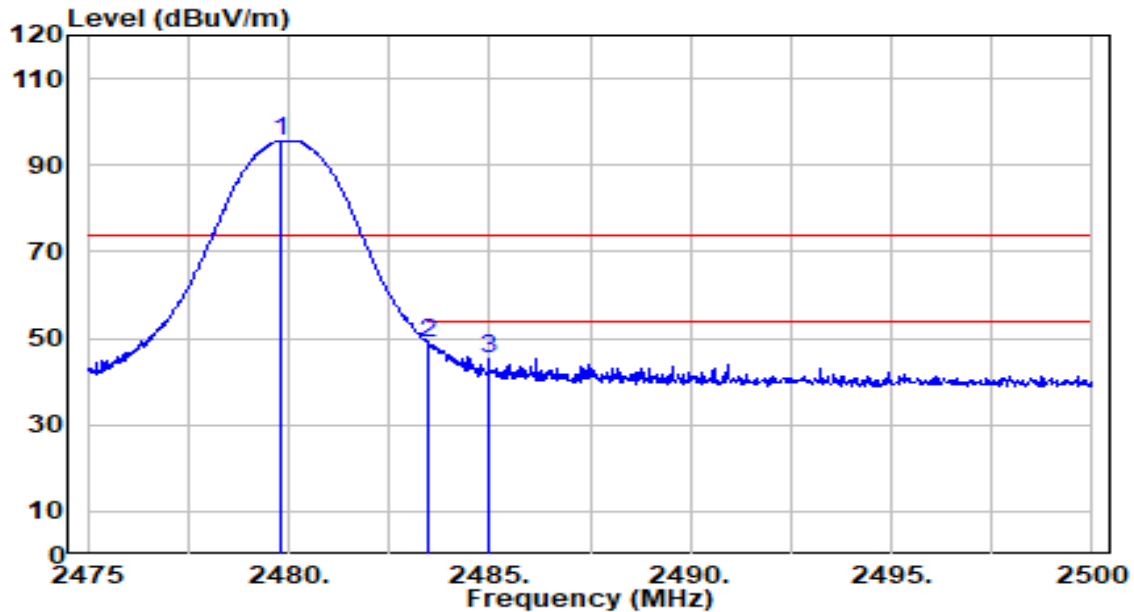


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.800	100.45	-4.80	95.65	N/A	N/A	155	260	Peak
2	* 2483.500	53.65	-4.79	48.86	-25.14	74.00	155	260	Peak
3	2484.975	50.23	-4.79	45.45	-28.55	74.00	155	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 78_Left Ear	Test Voltage	By Battery

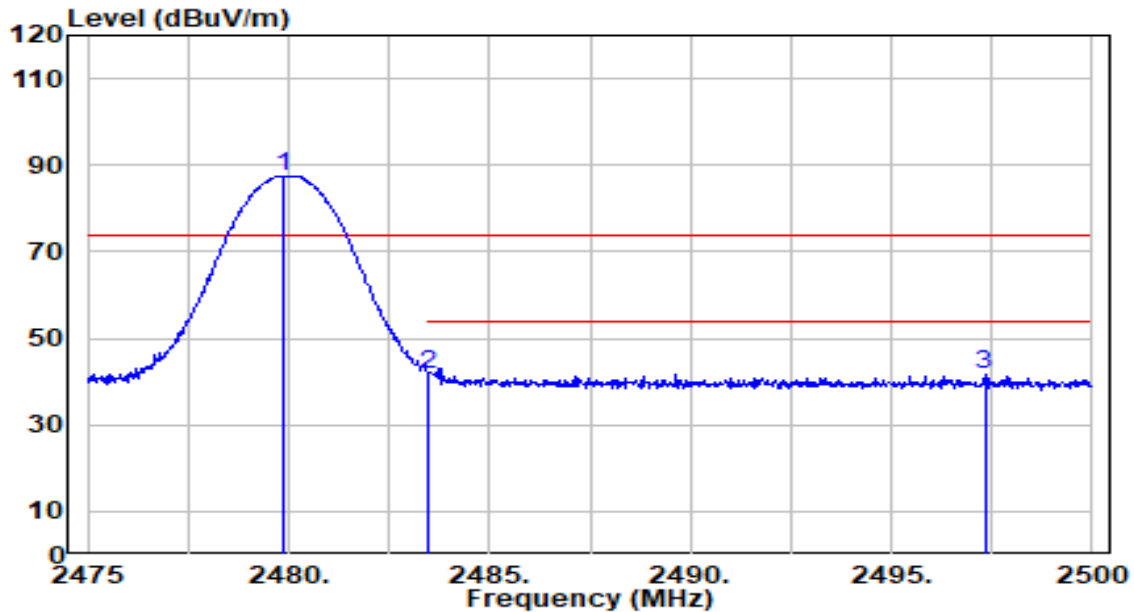


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.850	92.37	-4.80	87.57	N/A	N/A	230	195	Peak
2	2483.500	46.29	-4.79	41.50	-32.50	74.00	230	195	Peak
3	* 2497.325	46.41	-4.76	41.65	-32.35	74.00	230	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Battery

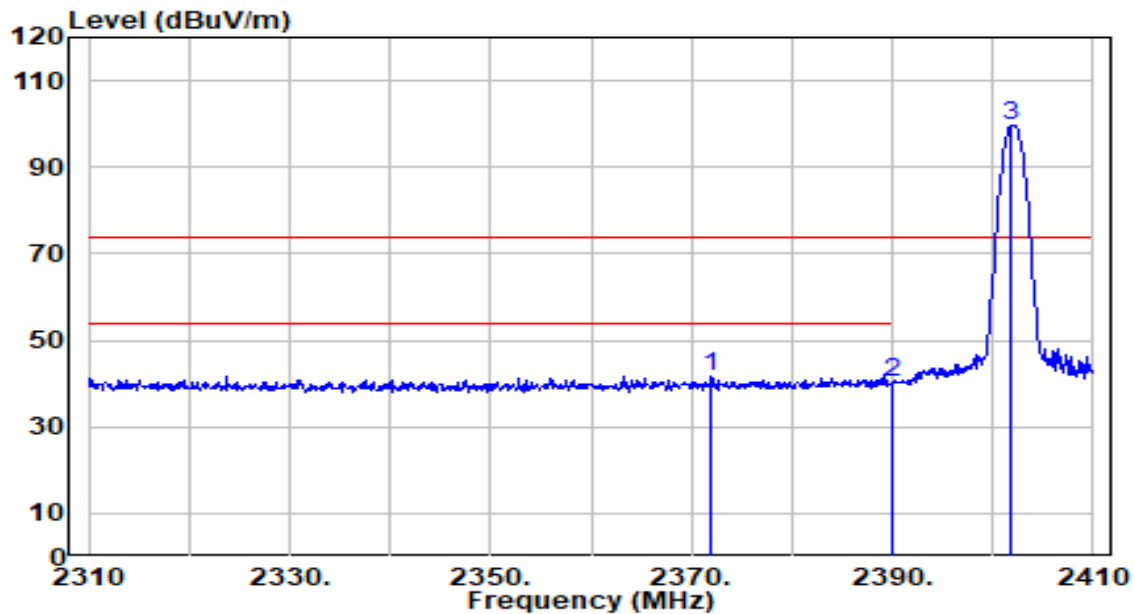


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2372.000	46.75	-5.00	41.74	-32.26	74.00	145	120	Peak
2	2390.000	45.19	-5.00	40.19	-33.81	74.00	145	120	Peak
3	2401.900	104.56	-4.99	99.57	N/A	N/A	145	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 0_Right Ear	Test Voltage	By Battery

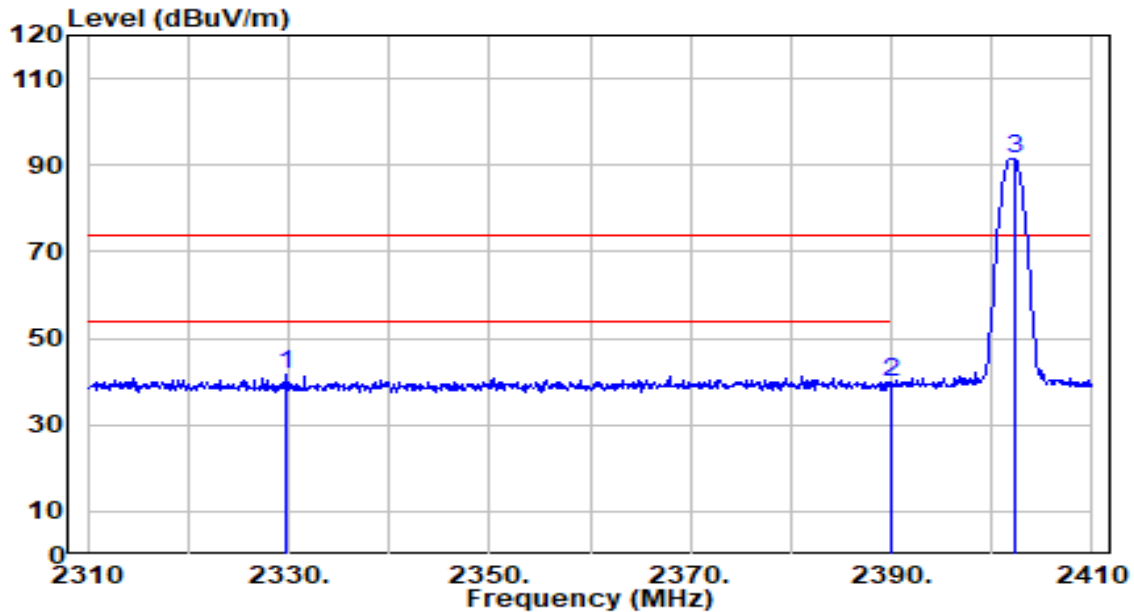


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2329.800	46.70	-5.02	41.67	-32.33	74.00	195	10	Peak
2	2390.000	44.73	-5.00	39.74	-34.26	74.00	195	10	Peak
3	2402.200	96.59	-4.99	91.60	N/A	N/A	195	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 78_Right Ear	Test Voltage	By Battery

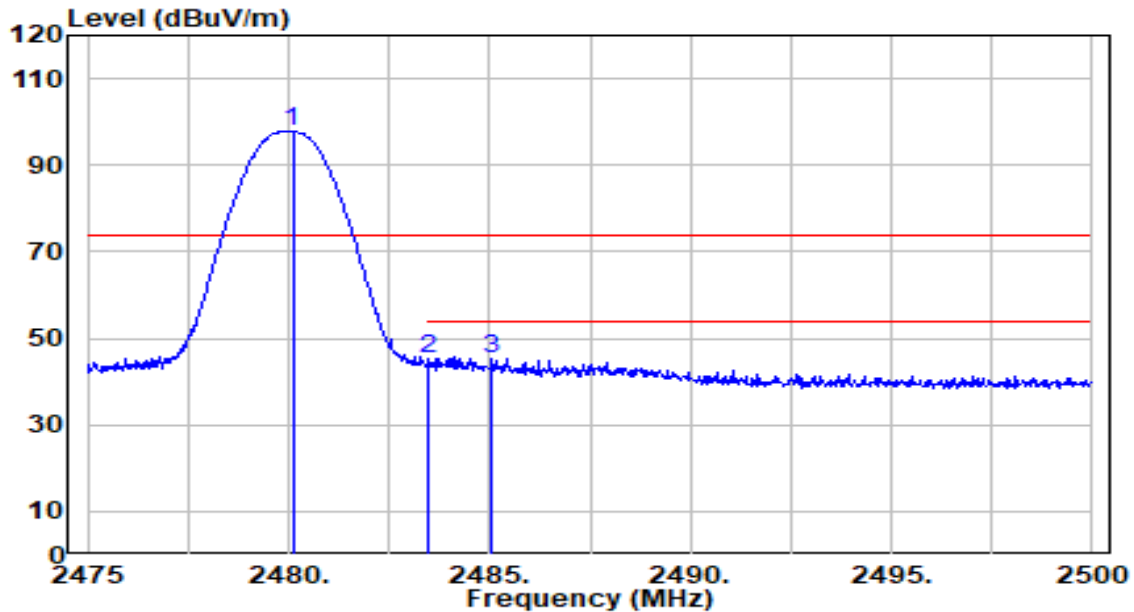


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.100	102.48	-4.80	97.68	N/A	N/A	140	105	Peak
2	2483.500	50.00	-4.79	45.21	-28.79	74.00	140	105	Peak
3	* 2485.075	50.03	-4.79	45.24	-28.76	74.00	140	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_DH5_CH 78_Right Ear	Test Voltage	By Battery

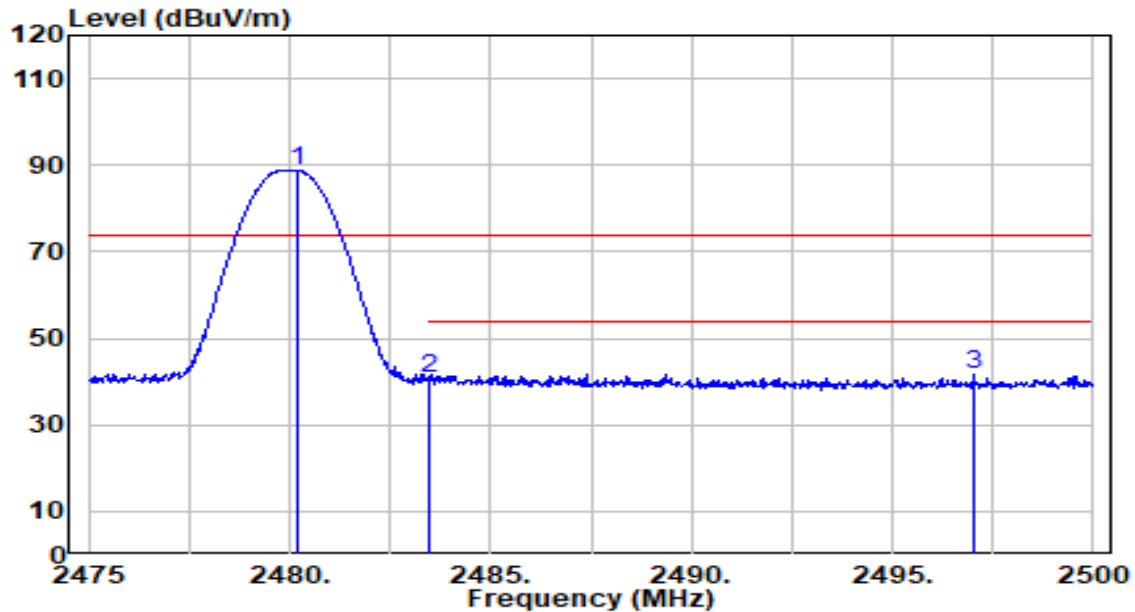


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.175	93.62	-4.80	88.82	N/A	N/A	150	340	Peak
2	2483.500	45.69	-4.79	40.90	-33.10	74.00	150	340	Peak
3	* 2497.025	46.23	-4.76	41.48	-32.52	74.00	150	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 0_Right Ear	Test Voltage	By Battery

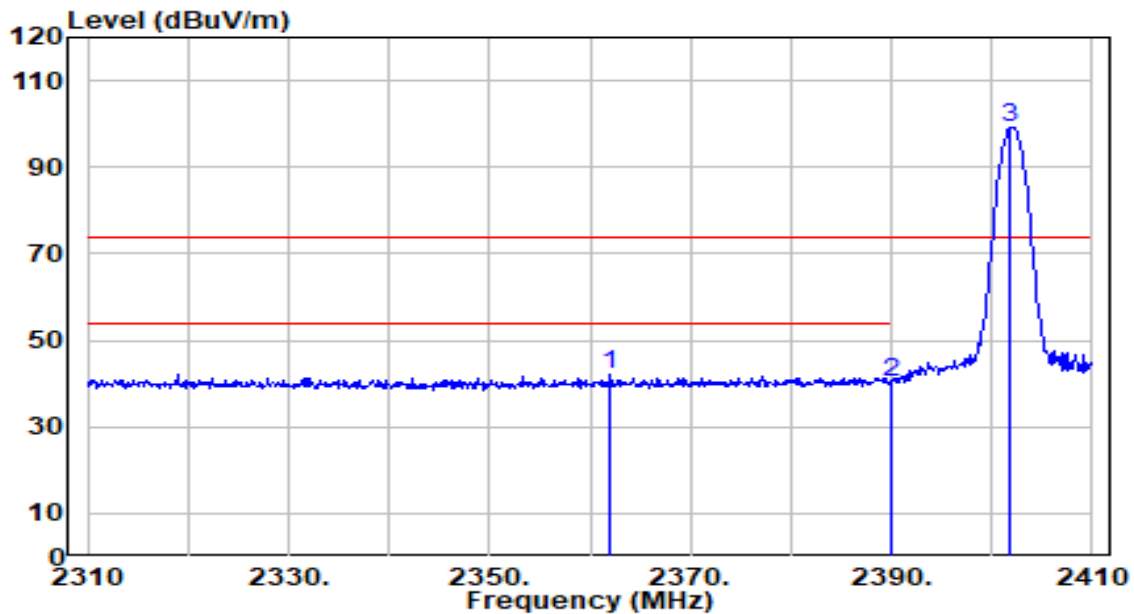


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2362.000	47.11	-5.01	42.10	-31.90	74.00	145	120	Peak
2	2390.000	45.31	-5.00	40.32	-33.68	74.00	145	120	Peak
3	2401.900	104.21	-4.99	99.22	N/A	N/A	145	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 0_Right Ear	Test Voltage	By Battery

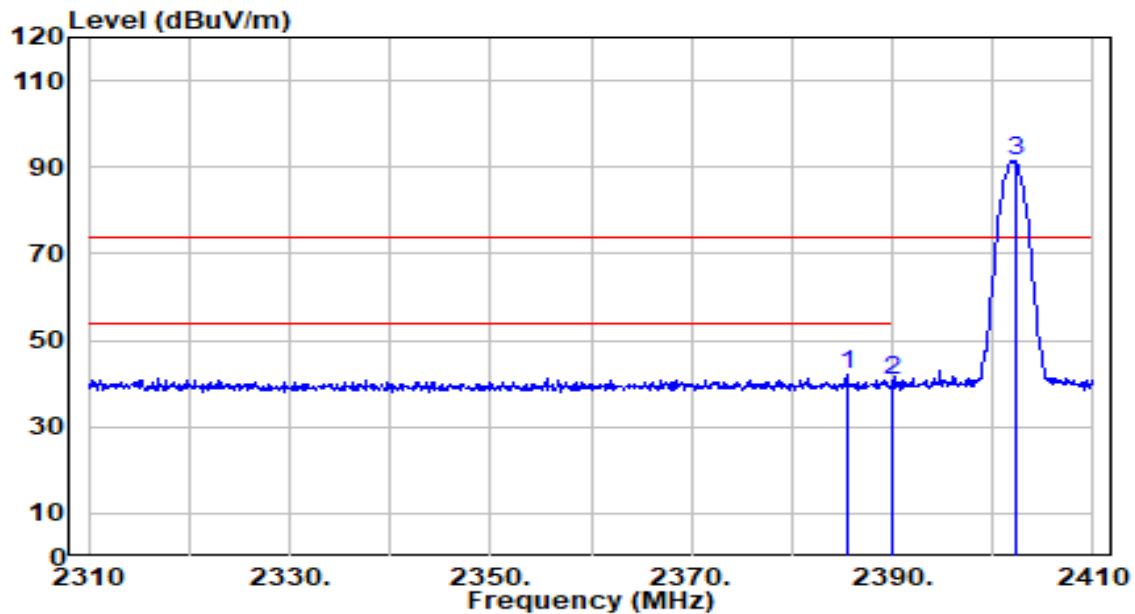


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2385.500	47.15	-5.00	42.15	-31.85	74.00	195	10	Peak
2	2390.000	45.90	-5.00	40.90	-33.10	74.00	195	10	Peak
3	2402.200	96.26	-4.99	91.28	N/A	N/A	195	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 78_Right Ear	Test Voltage	By Battery

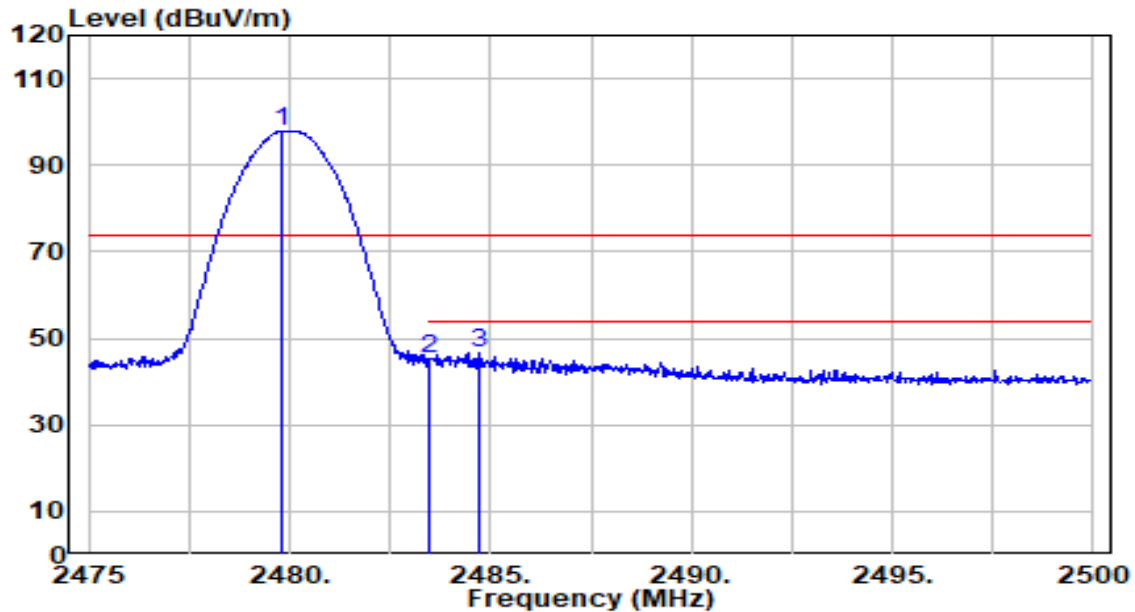


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2479.775	102.52	-4.80	97.72	N/A	N/A	140	105	Peak
2	2483.500	49.93	-4.79	45.14	-28.86	74.00	140	105	Peak
3	* 2484.700	51.31	-4.79	46.53	-27.47	74.00	140	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	BT_TX_3DH5_CH 78_Right Ear	Test Voltage	By Battery

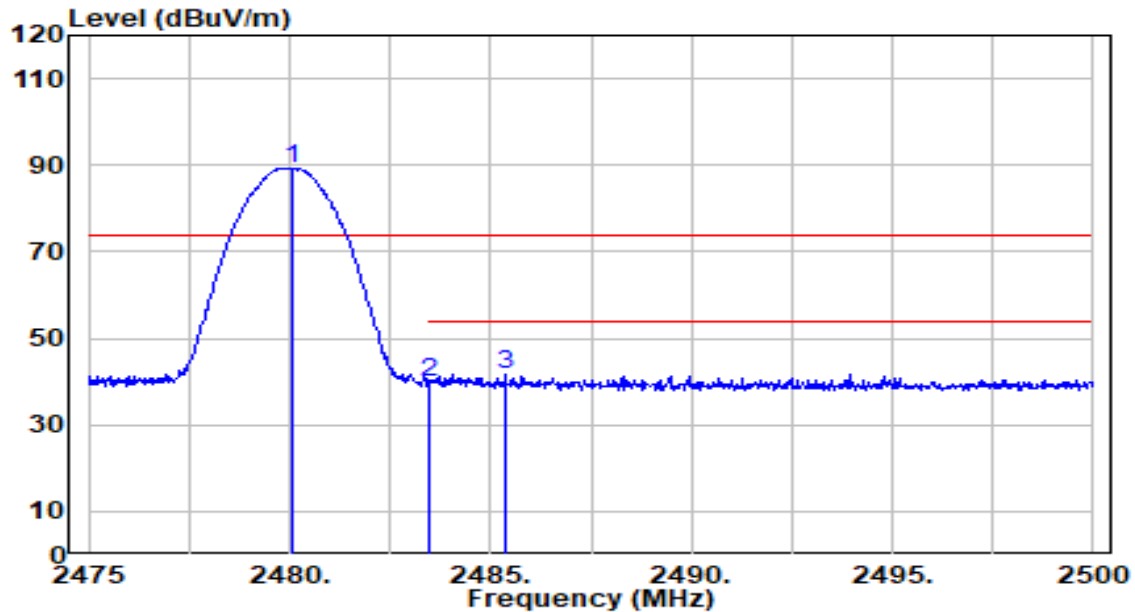

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2480.050	94.01	-4.80	89.21	N/A	N/A	150	340	Peak
2	2483.500	44.64	-4.79	39.85	-34.15	74.00	150	340	Peak
3	* 2485.375	46.29	-4.79	41.50	-32.50	74.00	150	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

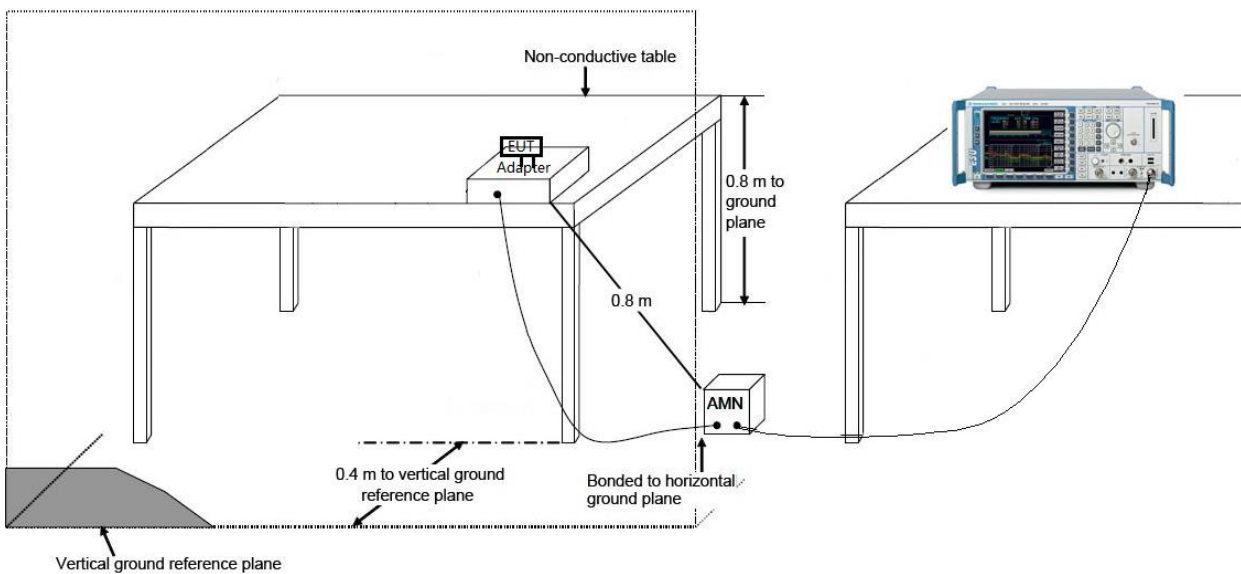

7.10.3. Test Result

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.5°C /58%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	AC 120V/60Hz

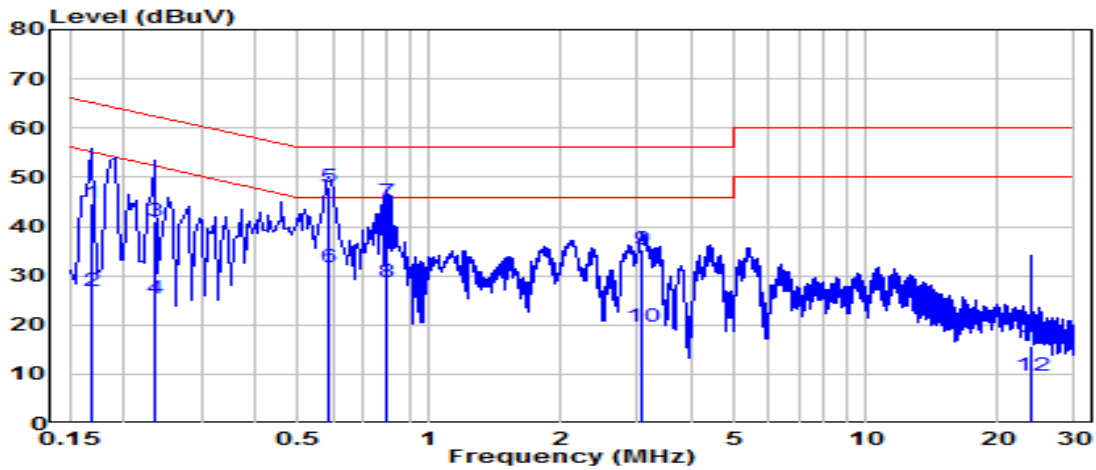


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)	
1	0.168	35.10	9.62	44.73	-20.33	65.06	QP	
2	0.168	17.25	9.62	26.87	-28.19	55.06	Average	
3	0.235	31.38	9.62	41.01	-21.25	62.25	QP	
4	0.235	15.63	9.62	25.26	-27.00	52.25	Average	
5	*	0.591	38.23	9.65	47.88	-8.12	56.00	QP
6	*	0.591	21.94	9.65	31.58	-14.42	46.00	Average
7	0.802	35.27	9.66	44.93	-11.07	56.00	QP	
8	0.802	18.95	9.66	28.61	-17.39	46.00	Average	
9	3.084	25.49	9.71	35.20	-20.80	56.00	QP	
10	3.084	9.80	9.71	19.51	-26.49	46.00	Average	
11	23.998	5.89	9.91	15.81	-44.19	60.00	QP	
12	23.998	-0.15	9.91	9.76	-40.24	50.00	Average	

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.5°C /58%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	AC 120V/60Hz

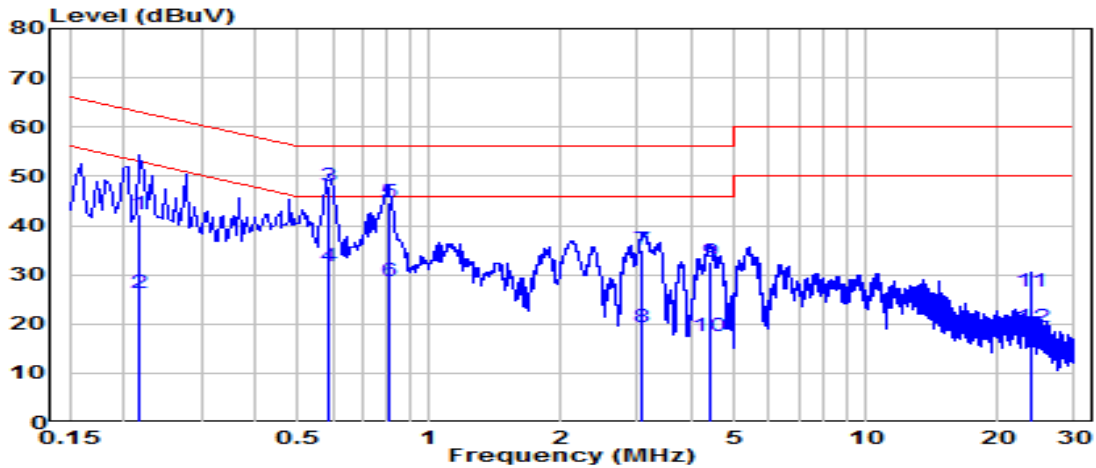


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.217	32.62	9.62	42.25	-20.67	62.91	QP
2	0.217	16.53	9.62	26.16	-26.76	52.91	Average
3	* 0.591	38.43	9.65	48.07	-7.93	56.00	QP
4	* 0.591	22.16	9.65	31.81	-14.19	46.00	Average
5	0.807	35.02	9.66	44.68	-11.32	56.00	QP
6	0.807	19.12	9.66	28.78	-17.22	46.00	Average
7	3.079	25.32	9.71	35.03	-20.97	56.00	QP
8	3.079	9.63	9.71	19.34	-26.66	46.00	Average
9	4.371	22.89	9.74	32.63	-23.37	56.00	QP
10	4.371	7.68	9.74	17.42	-28.58	46.00	Average
11	23.899	16.65	10.01	26.67	-33.33	60.00	QP
12	23.899	9.37	10.01	19.38	-30.62	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.5°C /58%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	AC 240V/60Hz

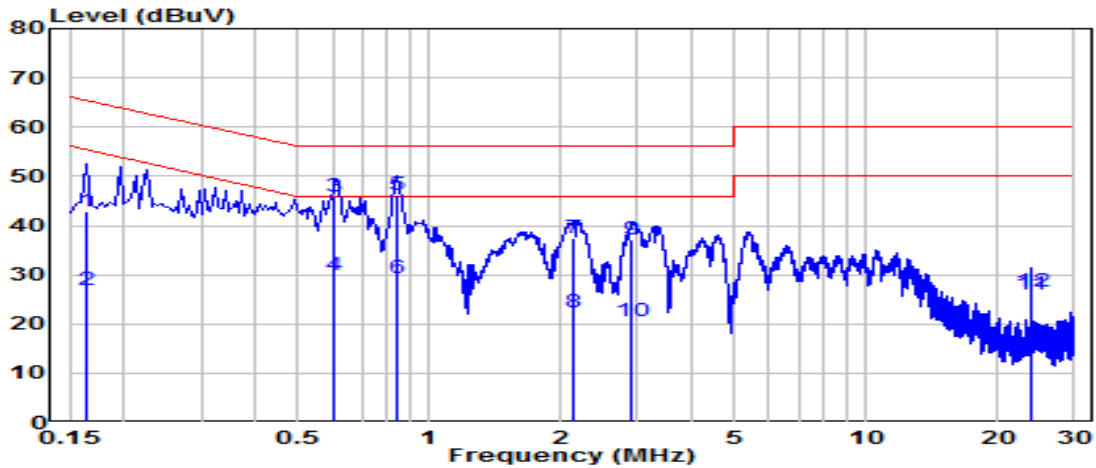


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.163	33.35	9.62	42.97	-22.31	65.28	QP
2	0.163	17.33	9.62	26.95	-28.34	55.28	Average
3	0.604	36.10	9.65	45.75	-10.25	56.00	QP
4	0.604	20.32	9.65	29.97	-16.03	46.00	Average
5	*	0.838	36.41	46.07	-9.93	56.00	QP
6	*	0.838	19.72	29.38	-16.62	46.00	Average
7	2.148	27.77	9.69	37.47	-18.53	56.00	QP
8	2.148	12.53	9.69	22.23	-23.77	46.00	Average
9	2.917	27.47	9.71	37.18	-18.82	56.00	QP
10	2.917	10.90	9.71	20.60	-25.40	46.00	Average
11	23.948	15.95	9.91	25.87	-34.13	60.00	QP
12	23.948	16.67	9.91	26.58	-23.42	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.5°C /58%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	BT_TX_DH5_CH 39_Left Ear	Test Voltage	AC 240V/60Hz

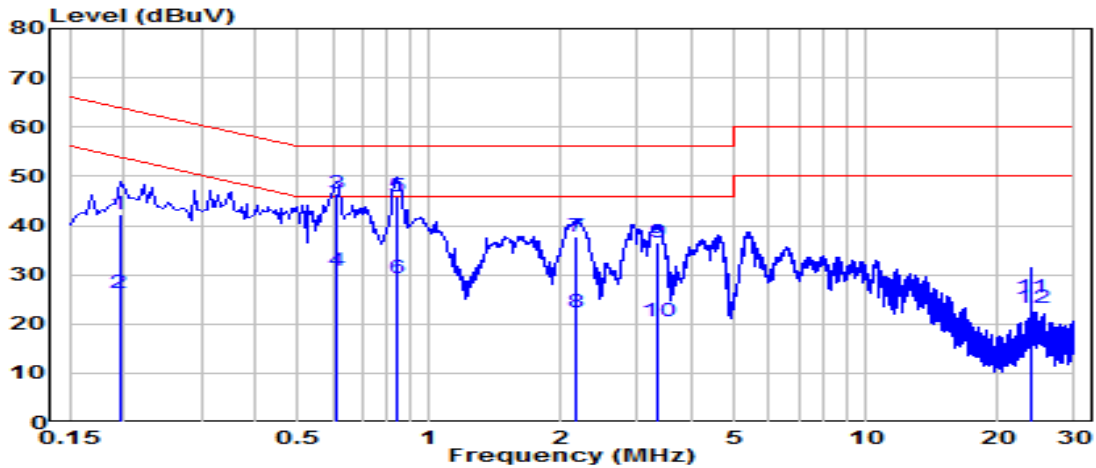


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.195	32.69	9.62	42.31	-21.51	63.82	QP
2	0.195	16.77	9.62	26.39	-27.43	53.82	Average
3	* 0.613	36.93	9.65	46.58	-9.42	56.00	QP
4	* 0.613	21.23	9.65	30.88	-15.12	46.00	Average
5	0.847	36.28	9.66	45.94	-10.06	56.00	QP
6	0.847	19.73	9.66	29.39	-16.61	46.00	Average
7	2.166	28.00	9.69	37.70	-18.30	56.00	QP
8	2.166	12.75	9.69	22.44	-23.56	46.00	Average
9	3.354	26.94	9.72	36.66	-19.34	56.00	QP
10	3.354	10.93	9.72	20.65	-25.35	46.00	Average
11	23.953	15.29	10.01	25.30	-34.70	60.00	QP
12	23.953	13.20	10.01	23.21	-26.79	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.5°C /58%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	AC 120V/60Hz

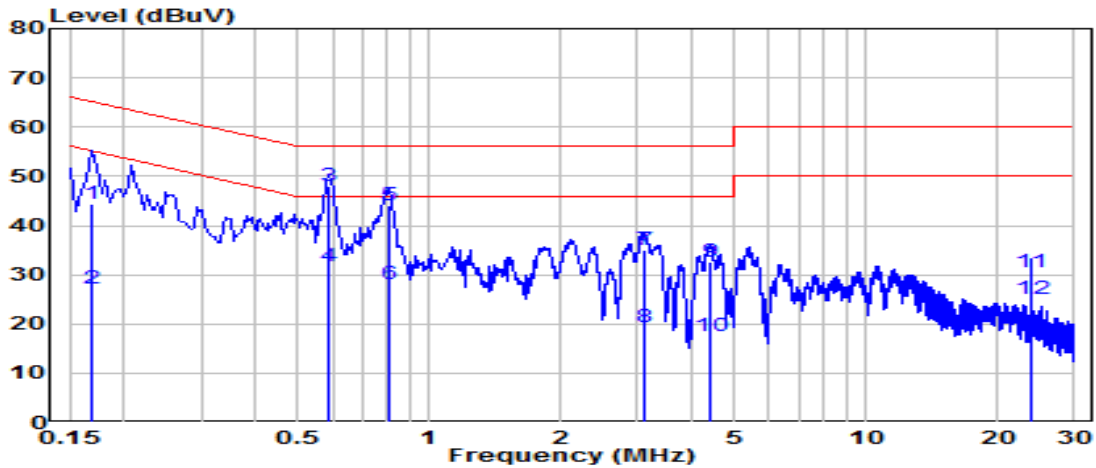


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	34.77	9.62	44.39	-20.67	65.06	QP
2	0.168	17.56	9.62	27.18	-27.88	55.06	Average
3	* 0.591	38.23	9.65	47.88	-8.12	56.00	QP
4	* 0.591	22.04	9.65	31.69	-14.31	46.00	Average
5	0.811	34.46	9.66	44.12	-11.88	56.00	QP
6	0.811	18.44	9.66	28.10	-17.90	46.00	Average
7	3.102	25.35	9.71	35.06	-20.94	56.00	QP
8	3.102	9.62	9.71	19.33	-26.67	46.00	Average
9	4.398	22.96	9.74	32.70	-23.30	56.00	QP
10	4.398	7.76	9.74	17.50	-28.50	46.00	Average
11	23.948	20.59	9.91	30.50	-29.50	60.00	QP
12	23.948	15.22	9.91	25.14	-24.86	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.5°C /58%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	AC 120V/60Hz

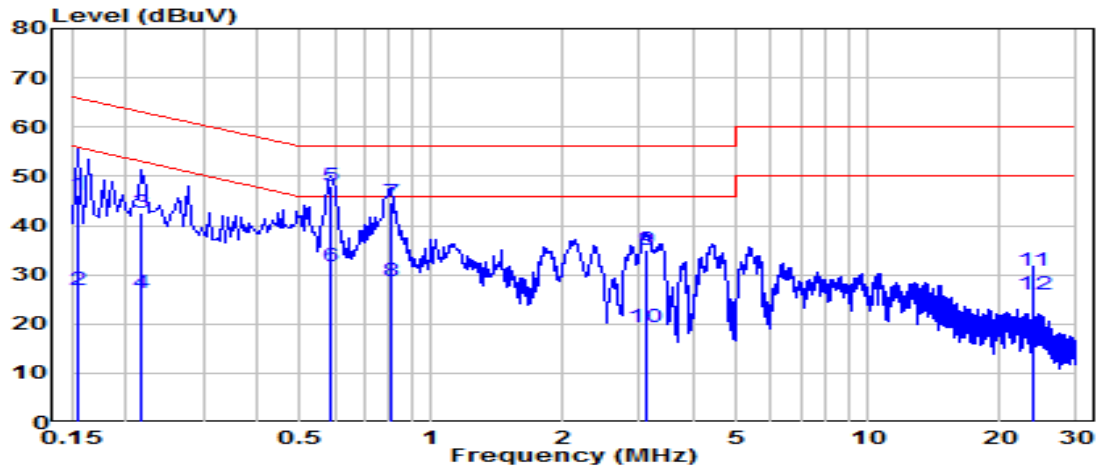


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)	
1	0.154	36.68	9.62	46.30	-19.46	65.75	QP	
2	0.154	17.11	9.62	26.73	-29.02	55.75	Average	
3	0.217	32.81	9.62	42.44	-20.48	62.91	QP	
4	0.217	16.54	9.62	26.17	-26.75	52.91	Average	
5	*	0.591	38.43	9.65	48.08	-7.92	56.00	QP
6	*	0.591	22.18	9.65	31.83	-14.17	46.00	Average
7	0.807	35.00	9.66	44.66	-11.34	56.00	QP	
8	0.807	19.11	9.66	28.77	-17.23	46.00	Average	
9	3.088	25.37	9.71	35.08	-20.92	56.00	QP	
10	3.088	9.62	9.71	19.33	-26.67	46.00	Average	
11	23.953	20.66	10.01	30.67	-29.33	60.00	QP	
12	23.953	16.09	10.01	26.11	-23.89	50.00	Average	

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.5°C /58%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	AC 240V/60Hz

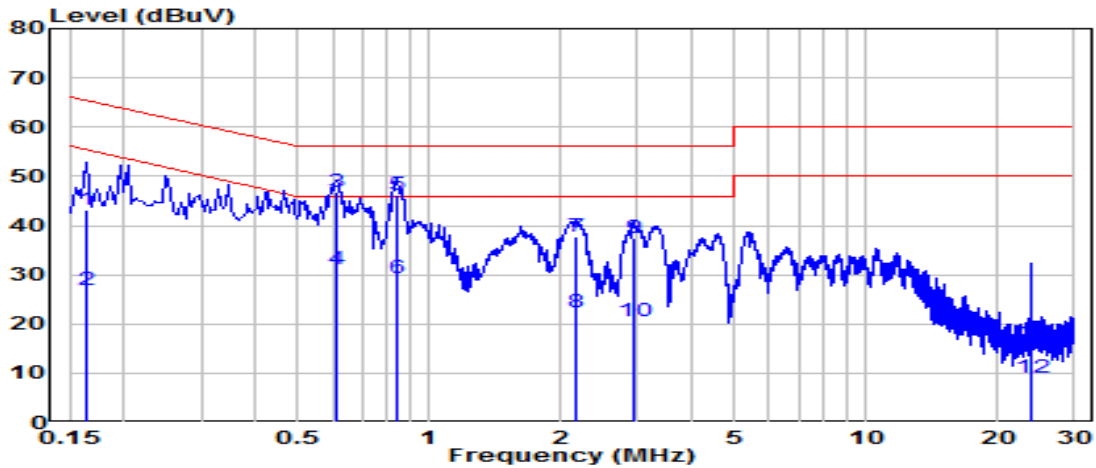


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	33.69	9.62	43.31	-21.97	65.28	QP
2	0.163	17.33	9.62	26.95	-28.33	55.28	Average
3	* 0.613	37.06	9.65	46.71	-9.29	56.00	QP
4	* 0.613	21.35	9.65	31.00	-15.00	46.00	Average
5	0.838	36.44	9.66	46.10	-9.90	56.00	QP
6	0.838	19.71	9.66	29.37	-16.63	46.00	Average
7	2.166	27.89	9.69	37.59	-18.41	56.00	QP
8	2.166	12.68	9.69	22.38	-23.62	46.00	Average
9	2.931	27.60	9.71	37.31	-18.69	56.00	QP
10	2.931	10.71	9.71	20.42	-25.58	46.00	Average
11	23.948	6.09	9.91	16.01	-43.99	60.00	QP
12	23.948	-0.82	9.91	9.09	-40.91	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Digital Wireless Stereo Earphones	Date of Test	2022-10-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.5°C /58%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	BT_TX_DH5_CH 39_Right Ear	Test Voltage	AC 240V/60Hz

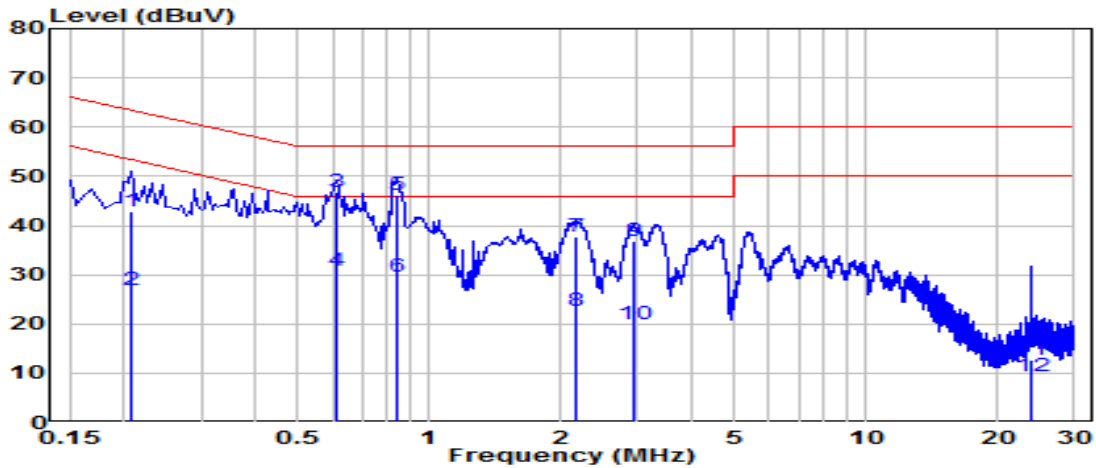

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.208	33.13	9.62	42.76	-20.51	63.27	QP
2	0.208	17.11	9.62	26.73	-26.54	53.27	Average
3	* 0.609	37.00	9.65	46.65	-9.35	56.00	QP
4	* 0.609	21.19	9.65	30.84	-15.16	46.00	Average
5	0.843	36.53	9.66	46.19	-9.81	56.00	QP
6	0.843	20.02	9.66	29.68	-16.32	46.00	Average
7	2.170	28.01	9.69	37.71	-18.29	56.00	QP
8	2.170	12.80	9.69	22.49	-23.51	46.00	Average
9	2.931	27.12	9.71	36.83	-19.17	56.00	QP
10	2.931	10.25	9.71	19.95	-26.05	46.00	Average
11	23.948	2.62	10.01	12.64	-47.36	60.00	QP
12	23.948	-0.73	10.01	9.28	-40.72	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Digital Wireless Stereo Earphones, FCC ID: ACJ-EAH-AZ60M2** is in compliance with Part 15C of the FCC Rules.

————— The End —————