

EXHIBIT 5

Test Report

APPLICATION FOR CERTIFICATION
On Behalf of
Matsushita Electric Industrial Co., Ltd.
17" Multi-Scan Color Monitor

Model : TX-T7F22*/M-T7F22*

FCC ID : ACJ92512127

Prepared for : Matsushita Electric Industrial Co., Ltd.
One Panasonic Way, Panazip 4B-8,
Secaucus, NJ 07094, U.S.A.

Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel: (02) 2609-9301, 2609-2133

File Number : ATM-G99058
Report Number : TTEMC-F99020
Date of Test : Feb. 10 ~ 11, 1999
Date of Report : Feb. 25, 1999

TABLE OF CONTENTS

Description	Page
Test Report Certification.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Tested Supporting System Details	5
1.3. Description of Test Facility	6
2. POWERLINE CONDUCTED TEST.....	7
2.1. Test Equipment	7
2.2. Block Diagram of Test Setup.....	7
2.3. Powerline Conducted Emission Limit (CLASS B).....	8
2.4. EUT’s Configuration during Compliance Measurement.....	8
2.5. Operating Condition of EUT.....	8
2.6. Test Procedure.....	9
2.7. Test Results	9
2.8. Line Conducted RF Voltage Measurement Results.....	9
3. RADIATED EMISSION TEST	16
3.1. Test Equipment	16
3.2. Block Diagram of Test Setup.....	16
3.3. Radiation Limit (CLASS B)	17
3.4. EUT’s Configuration during Compliance Measurement.....	17
3.5. Operating Condition of EUT.....	17
3.6. Test Procedure.....	18
3.7. Test Results	18
3.8. Radiated Emission Measurement Results.....	19
4. DEVIATIONS TO TEST SPECIFICATIONS	21
5. PHOTOGRAPHS.....	22
5.1. Photos of Powerline Conducted Measurement.....	22
5.2. Photos of Radiated Measurement at Open Field Test Site	23
5.3. Photos of Radiated Measurement at Anechoic Chamber	25
 APPENDIX I (Conducted Test Data)	
APPENDIX II (Radiated Test Data at Anechoic Chamber)	

TEST REPORT CERTIFICATION

Applicant : Matsushita Electric Industrial Co., Ltd.
 Manufacturer : Matsushita Electric (Taiwan) Co., Ltd.
 FCC ID : ACJ92512127
 EUT Description : 17" Multi-Scan Color Monitor
 (A) MODEL NO. : TX-T7F22*/M-T7F22*
 (B) SERIAL NO. : TA9130002
 (C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used :

FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1997
 AND FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions.

The measurement results were contained in this test report and TAIWAN TOKIN EMC ENG. CORP. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report showed that the EUT to be technically compliance with the FCC official limits.

This report applied to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Feb. 10 ~ 11, 1999

Prepared by : Monica Chang Feb. 26, 1999
 (MONICA CHANG)

Test Engineer : Kent
 (KENT HSU)

Approve & Authorized Signer : Jackie Deng 3/1/99
 (JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	17" Multi-Scan Color Monitor
Model Number	:	TX-T7F22*/M-T7F22*
		The M/N TX-T7F22* is for panasonic; the M/N M-T7F22* is for Tiny; the "*" may be numeral 1 to 9 or alphabet A to Z.
Serial Number	:	TA9130002
Applicant	:	Matsushita Electric Industrial Co., Ltd. One Panasonic Way, Panazip 4B-8, Secaucus, NJ 07094, U.S.A.
Manufacturer	:	Matsushita Electric (Taiwan) Co., Ltd. 579 Yuan San Road, Chung-Ho, Taipei Hsien 23506, Taiwan, R.O.C.
CRT	:	Panasonic, M/N M41KXH100X01 S/N M000041
Data Cable	:	Shielded, Detachable, 1.5m Bonded two ferrite cores
Power Cord	:	Non-Shielded, Detachable, 1.5m
Date of Receipt of Sample	:	Feb. 10, 1999
Date of Test	:	Feb. 10 ~ 11, 1999

1.2. Tested Supporting System Details

1.2.1. PERSONAL COMPUTER

Model Number	:	PC763
Serial Number	:	TA421U7881
FCC ID	:	AO9-PC76X
Manufacturer	:	Digital
Switching Power Supply	:	Astec M/N SA-201-3440
Floppy Driver 3.5"	:	Teac Corp. M/N FD-235HF
VGA Card	:	Sixgraph Computing Ltd. M/N Wiz 924 S/N 189477 FCC ID JYOWIZ01
Disk Ctrl Card	:	Within Mother Board
Serial/Parallel Card	:	Within Mother Board
Power Cord	:	Non-Shielded, Detachable, 1.8m

1.2.2. KEYBOARD

Model Number	:	5121
Serial Number	:	J83300813
FCC ID	:	E5XKBM104M10UC
Manufacturer	:	Behavior Tech Computer Corp.
Data Cable	:	Shielded, Undetachable, 1.0m

1.2.3. PRINTER

Model Number	:	2225C
Serial Number	:	2526S40437
FCC ID	:	BS46XU2225C
Manufacturer	:	Hewlett Packard
Power Cord	:	Non-Shielded, Undetachable, 1.8m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.4. MODEM #1

Model Number	:	DM-1414
Serial Number	:	980034396
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.5. MODEM #2

Model Number : DM-1414
 Serial Number : 980034395
 FCC ID : IFAXDM1414
 Manufacturer : Accex
 Data Cable : Shielded, Detachable, 1.2m
 Power Adapter : Amigo, Model AM-91000A
 Non-Shielded, Undetachable, 1.8m

1.2.6. MOUSE

Model Number : M-S35
 Serial Number : LZA82103160
 FCC ID : DZL211029
 Manufacturer : Logitech
 Data Cable : Non-Shielded, Undetachable, 1.8m

1.3. Description of Test Facility

Site Description : Feb. 13, 1998 File on
 (No. 5 Open Site) Federal Communication Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046, U.S.A.

Site Description : Aug. 22, 1997 Re-file on
 (Anechoic Chamber) Federal Communication Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046, U.S.A.

Name of Firm : Taiwan Tokin EMC Eng. Corp.

Site Location : No. 53-11, Tin-Fu Tsun, Lin-Kou,
 Taipei Hsien, Taiwan, R.O.C.

NVLAP lab. Code : 200077-0

2. POWERLINE CONDUCTED TEST


2.1. Test Equipment

The following test equipments were used during the power line conducted tests :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESC3 30	825442/020	Apr. 29, 98'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-1370-9	Jun.03, 98'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KNW-407	8-1370-10	Jun.03, 98'	1 Year

2.2. Block Diagram of Test Setup

2.2.1. EUT Power Connects to L.I.S.N. Directly

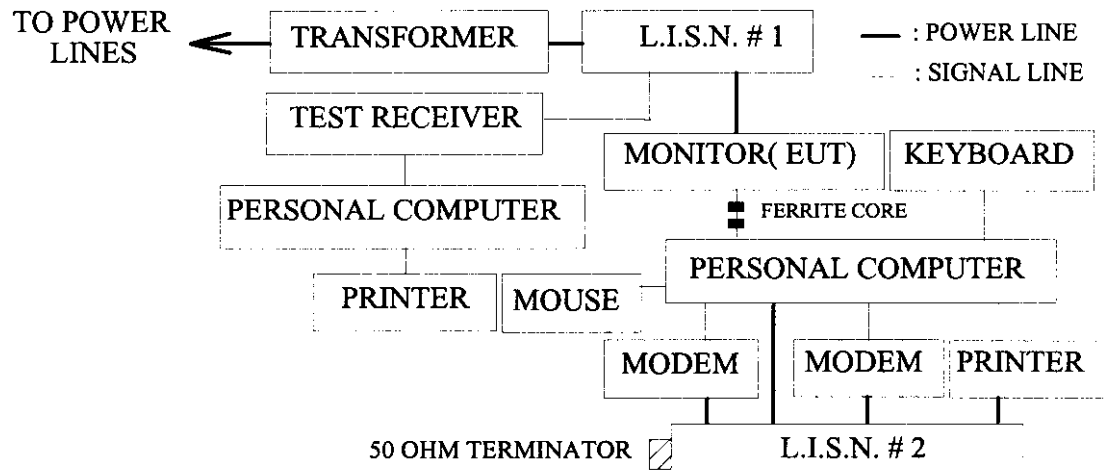

2.2.2. EUT Power connects to PC AC Outlet then PC power connects to L.I.S.N.

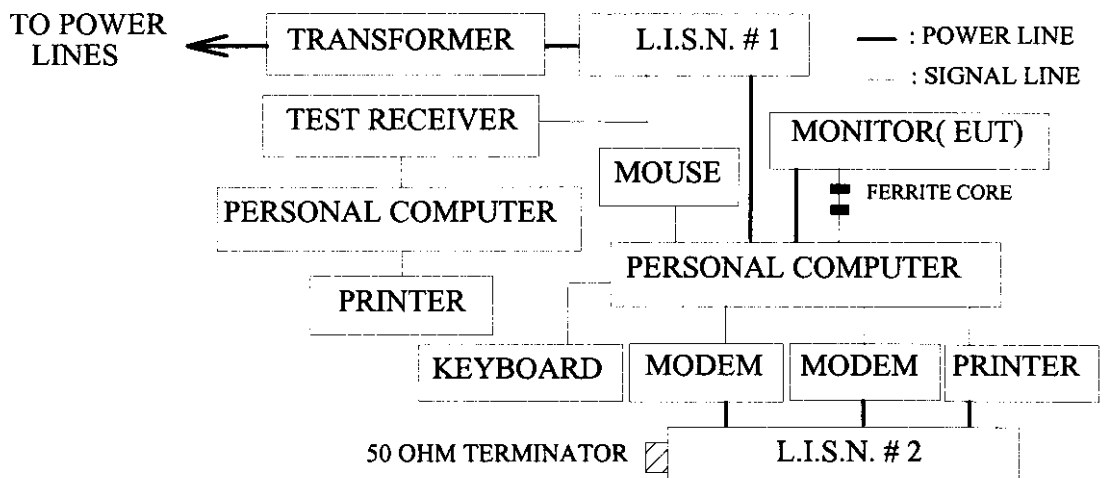

2.3. Powerline Conducted Emission Limit (CLASS B)

Frequency	Maximum RF Line Voltage	
	uV	dBuV
0.45MHz ~ 30Mhz	250	48

REMARKS : RF LINE VOLTAGE (dBuV) = 20 log RF LINE VOLTAGE (uV)

2.4. EUT's Configuration during Compliance Measurement

The following equipments were installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating in a manner which tend to maximize its emission characteristics in a normal application.

2.4.1. 17" Multi-Scan Color Monitor (EUT)

- Model Number : TX-T7F22*/M-T7F22*
- Serial Number : TA9130002
- Manufacturer : Matsushita Electric (Taiwan) Co., Ltd.
- CRT : Panasonic, M/N M41KXH100X01
S/N M000041
- Data Cable : Shielded, Detachable, 1.5m
Bonded two ferrite cores
- Power Cord : Non-Shielded, Detachable, 1.5m

2.4.2. Supporting System : As in Section 1.2

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown on 2.2.
- 2.5.2. Turn on the power of all equipments.
- 2.5.3. Personal Computer read data from disk.
- 2.5.4. Personal Computer sent "H" character to monitor (EUT) and the screen displayed and full with "H" pattern.
- 2.5.5. The other peripheral devices were drove and operated in turn during all testing.

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N.# 1). The EUT is also connected to PC power outlet then the PC power cord connected to the power mains through a line impedance stabilization network (L.I.S.N # 1.). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. # 2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to FCC ANSI C63.4-1992 on conducted measurement.

The bandwidth of the R&S Test Receiver ESCS 30 was set at 10KHz.

The frequency range from 450KHz to 30MHz was checked.

2.7. Test Results

PASSED. Please refer to the following pages.

2.8. Line Conducted RF Voltage Measurement Results

The following test modes were done on conducted measurement and reported the worst test modes 7 & 14 in the next pages, the others test data are attached within Appendix I.

(Test Date : Feb. 11, 1999 Temperature : 20 °C Humidity : 56 %)


Mode	Frequency Resolution	EUT Power	Reference Data #
1.	31.5KHz / 640*480	Connect to L.I.S.N	# 93, 94
2.	37.9KHz / 640*480	Connect to L.I.S.N	# 97, 98
3.	48.1KHz / 800*600	Connect to L.I.S.N	# 100, 99
4.	48.4KHz / 1024*768	Connect to L.I.S.N	# 96, 95
5.	58KHz / 1024*768	Connect to L.I.S.N	# 101, 102
6.	61.6KHz / 1280*960	Connect to L.I.S.N	# 104, 103
※ 7.	66KHz / 1280*1024	Connect to L.I.S.N	# 105 (106), 107 (108)
8.	31.5KHz / 640*480	Connect to PC	# 110, 109
9.	37.9KHz / 640*480	Connect to PC	# 114, 113
10.	48.1KHz / 800*600	Connect to PC	# 115, 116
11.	48.4KHz / 1024*768	Connect to PC	# 111, 112
12.	58KHz / 1024*768	Connect to PC	# 118, 117
13.	61.6KHz / 1280*960	Connect to PC	# 119, 120
※ 14.	66KHz / 1280*1024	Connect to PC	# 123 (122), 121 (124)



Test Site: *FCC ID: ACJ92512127 Page 10 of 25*
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: 105 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 14:38:33

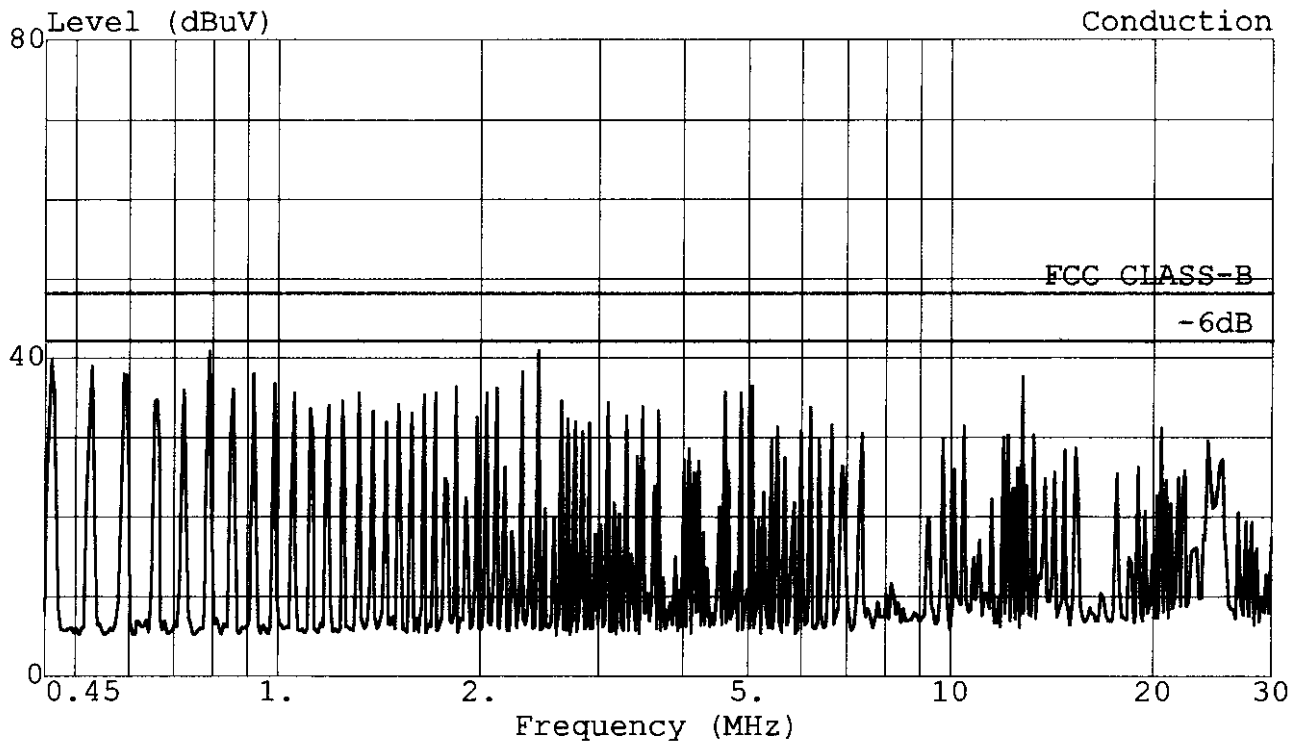

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*1024;66KHz




Test Site: ^{FCC ID: ACJ92512127} Page 11 of 25
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: 107 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:42:28

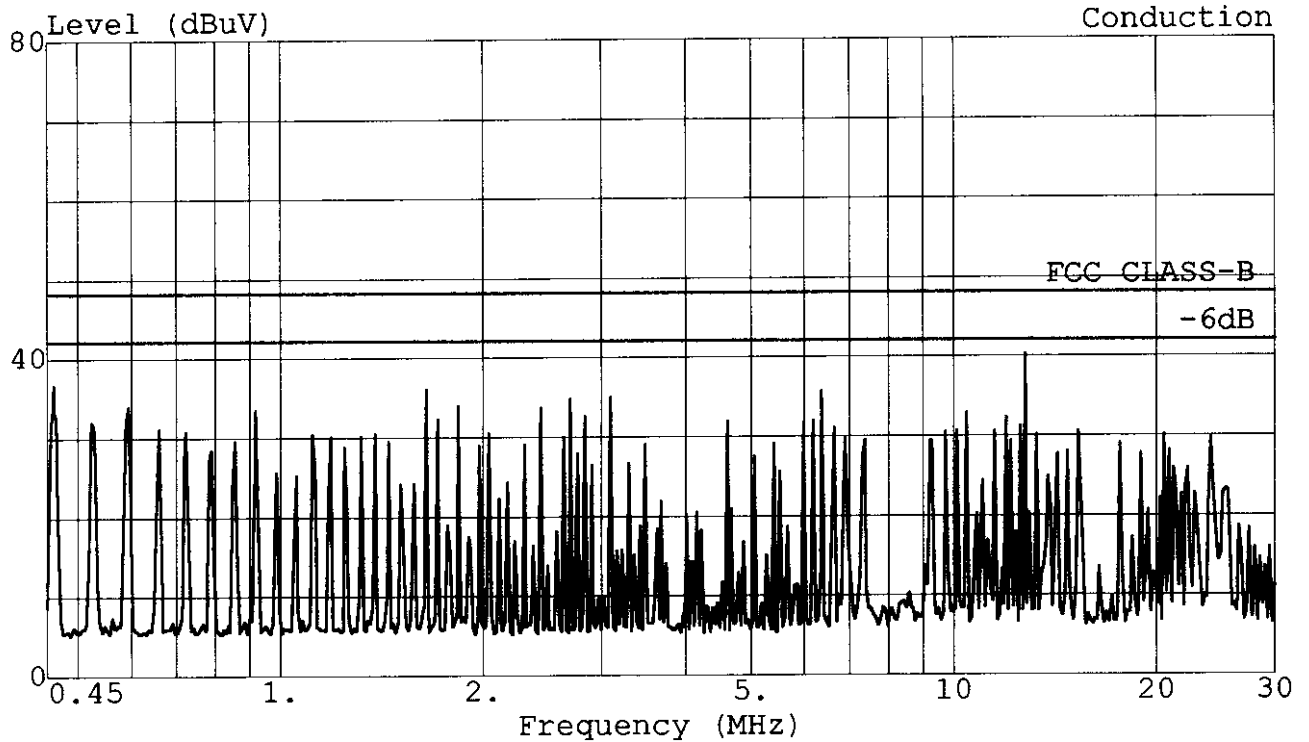

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*1024;66KHz

TOKIN

Test Site: *FCC ID: ACJ92512127 Page 12 of 25*
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: 106 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 14:41:15

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*1024;66KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.460	39.70	-8.30	48.00	39.54	0.11	0.04	0.00	QP
2	0.790	39.27	-8.73	48.00	39.12	0.10	0.05	0.00	QP
3	2.437	39.61	-8.39	48.00	39.46	0.10	0.05	0.00	QP
4	5.073	35.60	-12.40	48.00	35.45	0.10	0.05	0.00	QP
5	12.782	35.61	-12.39	48.00	35.35	0.18	0.08	0.00	QP
6	20.623	29.89	-18.11	48.00	29.41	0.28	0.20	0.00	QP

Data#: 108 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 14:45:08

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*1024;66KHz


Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.459	35.25	-12.75	48.00	35.09	0.12	0.04	0.00	QP
2	0.921	32.57	-15.43	48.00	32.42	0.10	0.05	0.00	QP
3	1.646	34.72	-13.28	48.00	34.57	0.10	0.05	0.00	QP
4	3.095	33.97	-14.03	48.00	33.82	0.10	0.05	0.00	QP
5	6.393	34.16	-13.84	48.00	34.01	0.10	0.05	0.00	QP
6	12.847	38.80	-9.20	48.00	38.54	0.18	0.08	0.00	QP

TAIWAN TOKIN EMC ENG. CORP.

Data#: 123 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:13:22

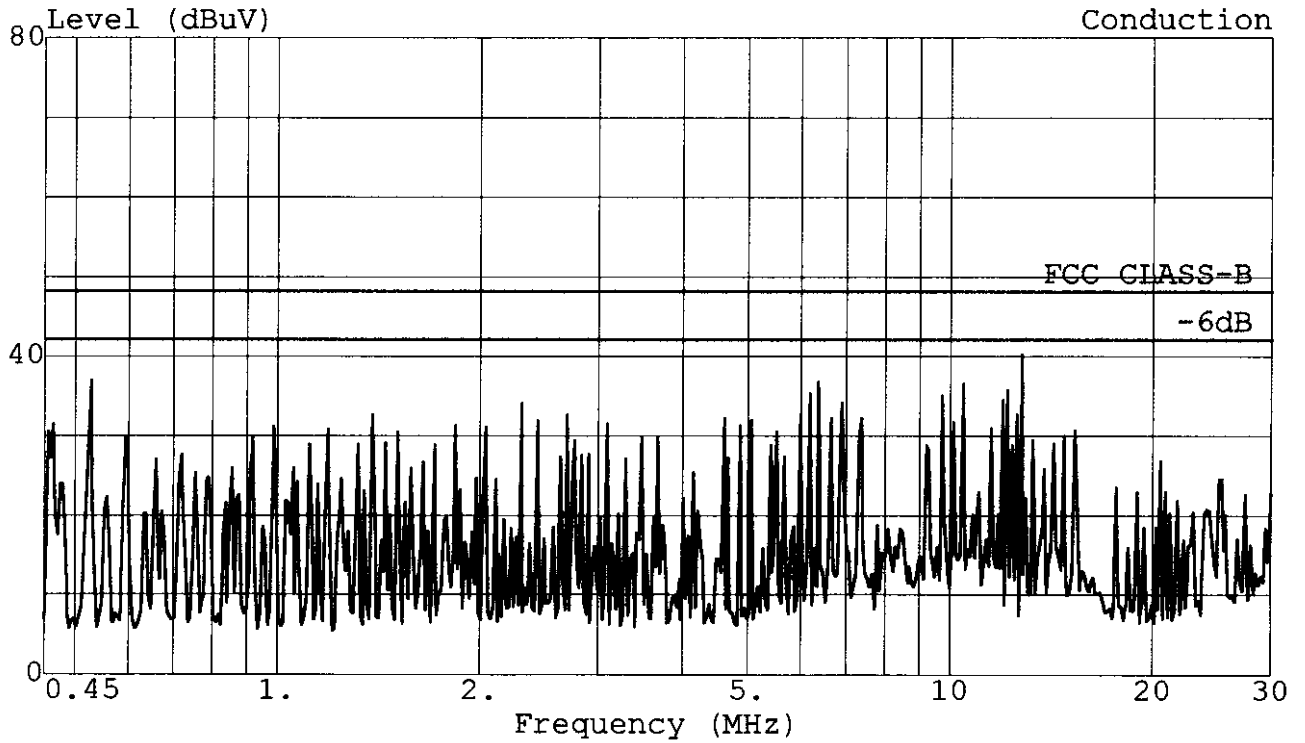


Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*1024;66KHz

TAIWAN TOKIN EMC ENG. CORP.

Data#: 121 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:10:12

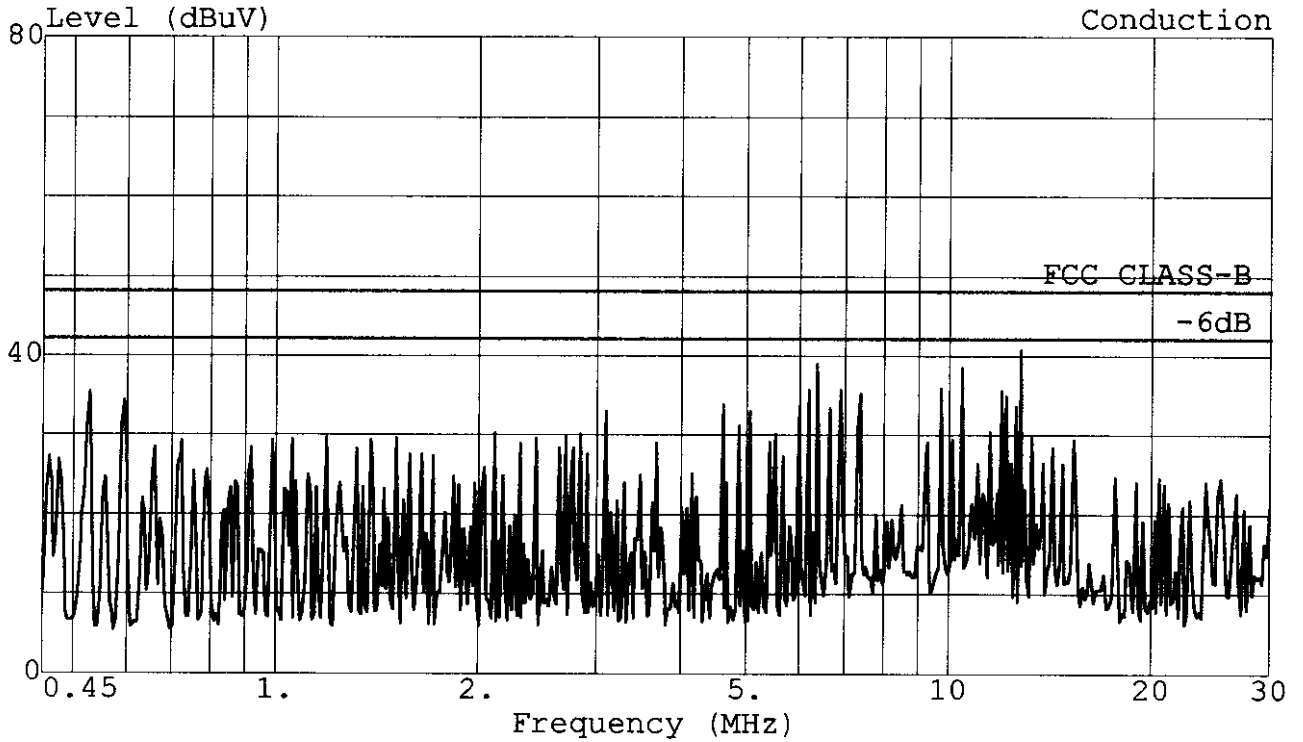

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*1024;66KHz

TOKIN

FCC ID: ACJ92512127 Page 15 of 25

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: 122 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 15:12:38

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*1024;66KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.526	34.82	-13.18	48.00	34.68	0.10	0.04	0.00	QP
2	0.593	32.88	-15.12	48.00	32.74	0.10	0.04	0.00	QP
3	3.097	31.65	-16.35	48.00	31.50	0.10	0.05	0.00	QP
4	6.390	36.57	-11.43	48.00	36.42	0.10	0.05	0.00	QP
5	10.475	37.56	-10.44	48.00	37.35	0.16	0.06	0.00	QP
6	12.847	39.98	-8.02	48.00	39.72	0.18	0.08	0.00	QP

Data#: 124 File#: MATSUSHI.EMI Date: 1999-02-11 Time: 15:16:02

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1280*1024;66KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.526	35.62	-12.38	48.00	35.48	0.10	0.04	0.00	QP
2	0.595	28.55	-19.45	48.00	28.41	0.10	0.04	0.00	QP
3	1.383	31.43	-16.57	48.00	31.28	0.10	0.05	0.00	QP
4	2.700	31.36	-16.64	48.00	31.21	0.10	0.05	0.00	QP
5	6.392	36.02	-11.98	48.00	35.87	0.10	0.05	0.00	QP
6	12.846	39.82	-8.18	48.00	39.56	0.18	0.08	0.00	QP

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

3.1.1. For Anechoic Chamber :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	HP	8593A	3212A01727	Jul.25, 98'	1 Year
2.	Pre-Amplifier	HP	8447D	2944A06305	May.13,98'	1 Year
3.	Broadband Antenna	Schwarzbeck	BBA9106	A3L	Dec.09, 98'	1 Year
4.	Broadband Antenna	Schwarzbeck	UHALP9107	A3H	Dec.09, 98'	1 Year

3.1.2. For No. 5 Open Site :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	R&S	ESVP	861190/011	Dec.21, 98'	1 Year
2.	Broadband Antenna	Chase	VBA6106A	1245	Jul.23, 98'	1 Year
3.	Broadband Antenna	Chase	UPA6109	1035	Jul.23, 98'	1 Year


3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

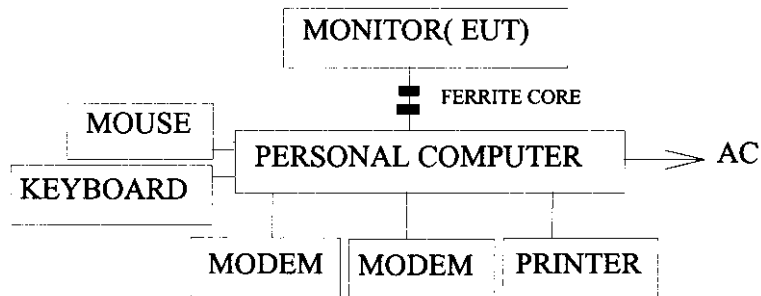

3.2.2. Anechoic Chamber & Open Field Test Site Setup Diagram

ANTENNA TOWER

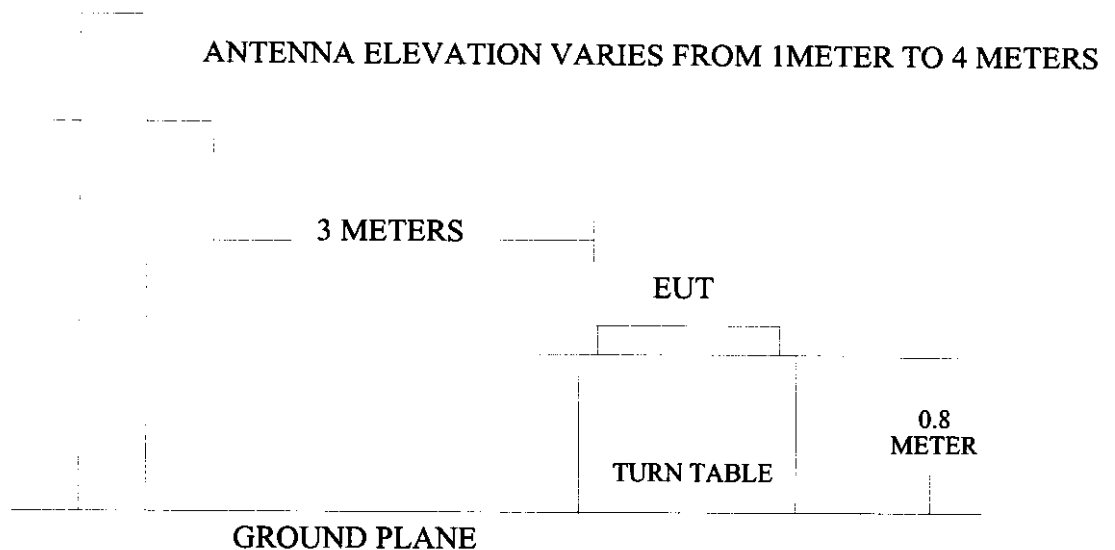

3.3. Radiation Limit (CLASS B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS	
		uV/M	dBuV/M
MHz	Meters		
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

- Remark :
- (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT's Configuration during Compliance Measurement

The configuration of EUT and its simulators were same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotate 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which were mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 on radiated measurement.

The bandwidth of the R&S Test Receiver ESVP was set at 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

The following operating conditions were measured within Anechoic Chamber and all the scanning waveform were attached within Appendix II, which include :

- (1) 31.5KHz/640*480
- (2) 37.9KHz/640*480
- (3) 48.1KHz/800*600
- (4) 48.4KHz/1024*768
- (5) 58KHz/1024*768
- (6) 61.6KHz/1280*960
- (7) 66KHz/1280*1024

Finally, re-measured the each worst operating situation (66KHz/1280*1024) at No. 5 Open Field Test Site and all the test results are listed in section 3.8.

3.7. Test Results

PASSED. Please refer to the following pages.

3.8. Radiated Emission Measurement Results

The frequency spectrum from 30 MHz to 1000MHz was investigated. All the emissions not reported below were too low against the FCC CLASS B limit.

Date of Test : Feb. 11, 1999 Temperature : 22 °C
 EUT : 17" Multi-Scan Color Monitor Humidity : 65 %
 Test Mode : 66KHz/1280*1024

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level Horizontal dBuV/m	Limits dBuV/m	Margin dBuV/m
			Horizontal dBuV	Horizontal dBuV/m			
41.319	19.66	1.15	2.87	23.68	40.00	16.32	
55.067	13.59	1.33	9.16	24.08	40.00	15.92	
75.753	12.95	1.54	15.97	30.46	40.00	9.54	
123.954	19.60	1.99	8.58	30.17	43.50	13.33	
130.810	19.97	2.06	9.84	31.87	43.50	11.63	
144.580	20.30	2.17	8.08	30.55	43.50	12.95	
199.675	21.44	2.57	4.57	28.58	43.50	14.92	
220.331	21.90	2.70	9.19	33.79	46.00	12.21	
* 234.089	22.78	2.75	12.57	38.10	46.00	7.90	
254.744	23.49	2.96	11.52	37.97	46.00	8.03	
344.261	16.48	3.45	6.91	26.84	46.00	19.16	
351.149	16.70	3.49	9.66	29.85	46.00	16.15	
406.241	17.80	3.81	4.98	26.59	46.00	19.41	
440.672	17.83	3.92	6.27	28.02	46.00	17.98	
537.063	19.44	4.40	3.63	27.47	46.00	18.53	
550.833	20.14	4.44	7.78	32.36	46.00	13.64	
660.971	20.91	4.92	0.95	26.78	46.00	19.22	
798.708	22.02	5.54	4.32	31.88	46.00	14.12	
826.249	23.09	5.71	1.87	30.67	46.00	15.33	

- Remark :
1. All reading were Quasi-Peak values.
 2. The worst emission was detected at 234.089MHz with corrected signal level of 38.10dBuV/m (limit was 46.0dBuV/m) when the antenna was at horizontal polarization and was at 1m high and the turn table was at 330° .
 3. 0° is the table front facing the antenna. Degree was calculated from 0° clockwise facing the antenna.

Date of Test : Feb. 11, 1999 Temperature : 22 °C
 EUT : 17" Multi-Scan Color Monitor Humidity : 65 %
 Test Mode : 66KHz/1280*1024

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level Vertical dBuV/m	Limits dBuV/m	Margin dBuV/m
			Vertical dBuV	Vertical dBuV/m			
46.780	16.19	1.21	15.08	32.48	40.00	7.52	
* 55.091	13.94	1.33	20.50	35.77	40.00	4.23	
68.732	12.75	1.48	17.36	31.59	40.00	8.41	
75.593	13.52	1.54	18.26	33.32	40.00	6.68	
82.478	15.33	1.60	18.51	35.44	40.00	4.56	
110.160	18.46	1.86	10.74	31.06	43.50	12.44	
130.817	19.26	2.06	8.20	29.52	43.50	13.98	
151.473	20.91	2.21	4.05	27.17	43.50	16.33	
220.323	22.57	2.70	4.33	29.60	46.00	16.40	
254.749	23.66	2.96	5.02	31.64	46.00	14.36	
275.404	24.12	3.07	6.25	33.44	46.00	12.56	
296.059	25.53	3.19	4.79	33.51	46.00	12.49	
344.263	15.85	3.45	9.13	28.43	46.00	17.57	
351.148	15.52	3.49	12.66	31.67	46.00	14.33	
406.227	16.81	3.81	10.92	31.54	46.00	14.46	
440.652	17.56	3.92	7.59	29.07	46.00	16.93	
550.804	20.12	4.44	7.24	31.80	46.00	14.20	
605.884	20.08	4.74	2.21	27.03	46.00	18.97	
764.263	21.81	5.41	2.20	29.42	46.00	16.58	

- Remark :
1. All reading were Quasi-Peak values.
 2. The worst emission was detected at 55.091MHz with corrected signal level of 35.77dBuV/m (limit was 40.0dBuV/m) when the antenna was at vertical polarization and was at 1.4m high and the turn table was at 325 ° .
 3. 0 ° is the table front facing the antenna. Degree was calculated from 0 ° clockwise facing the antenna.

4. DEVIATIONS TO TEST SPECIFICATIONS

[NONE]

APPENDIX I

Conducted Test Data

(Total Pages : 24)


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 93 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:18:14

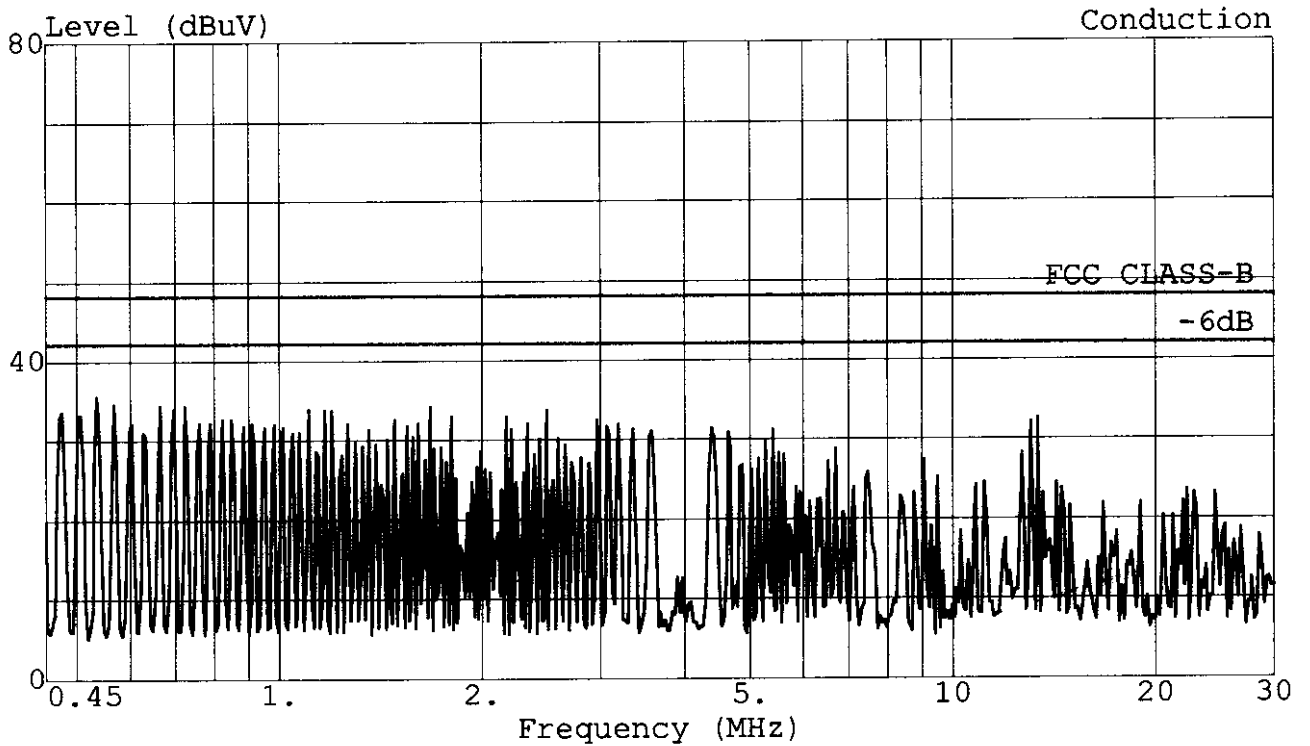

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 640*480;31.5KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 94 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:18:40

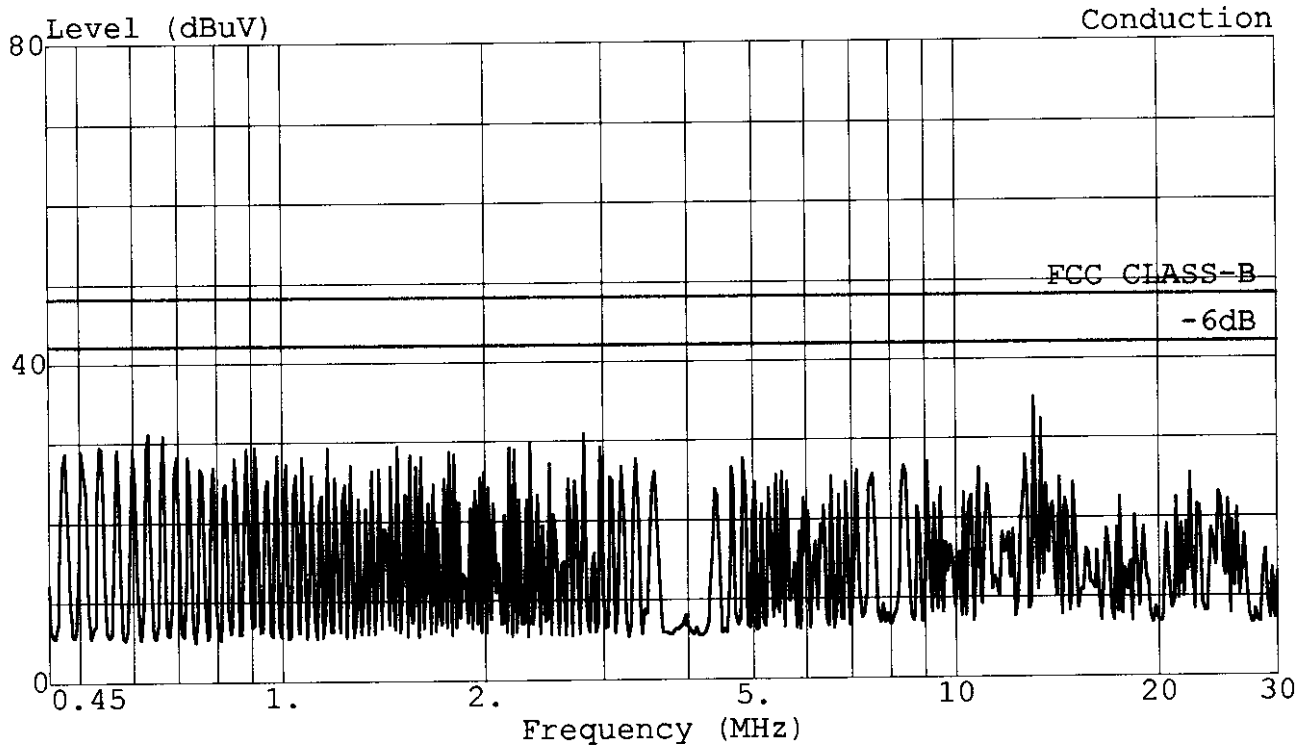

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 640*480;31.5KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 97 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:24:59

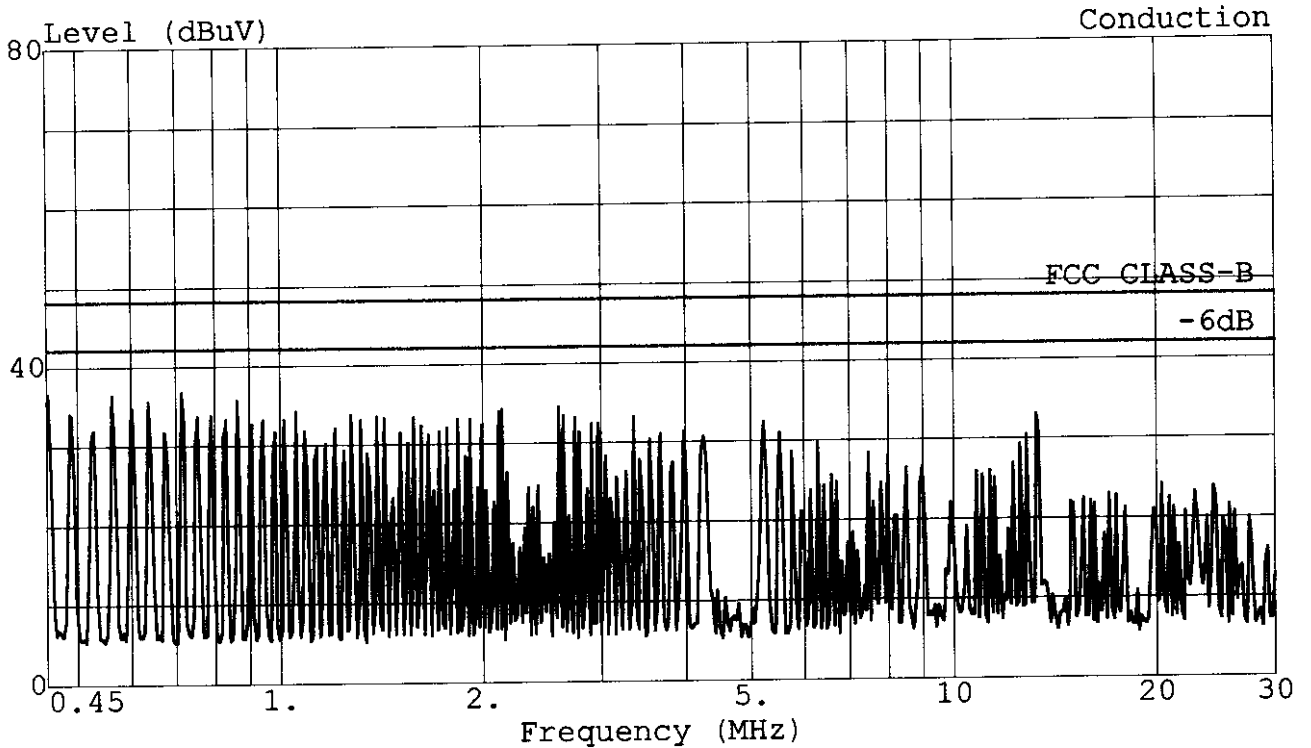

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 640*480;37.9KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 98 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:25:27

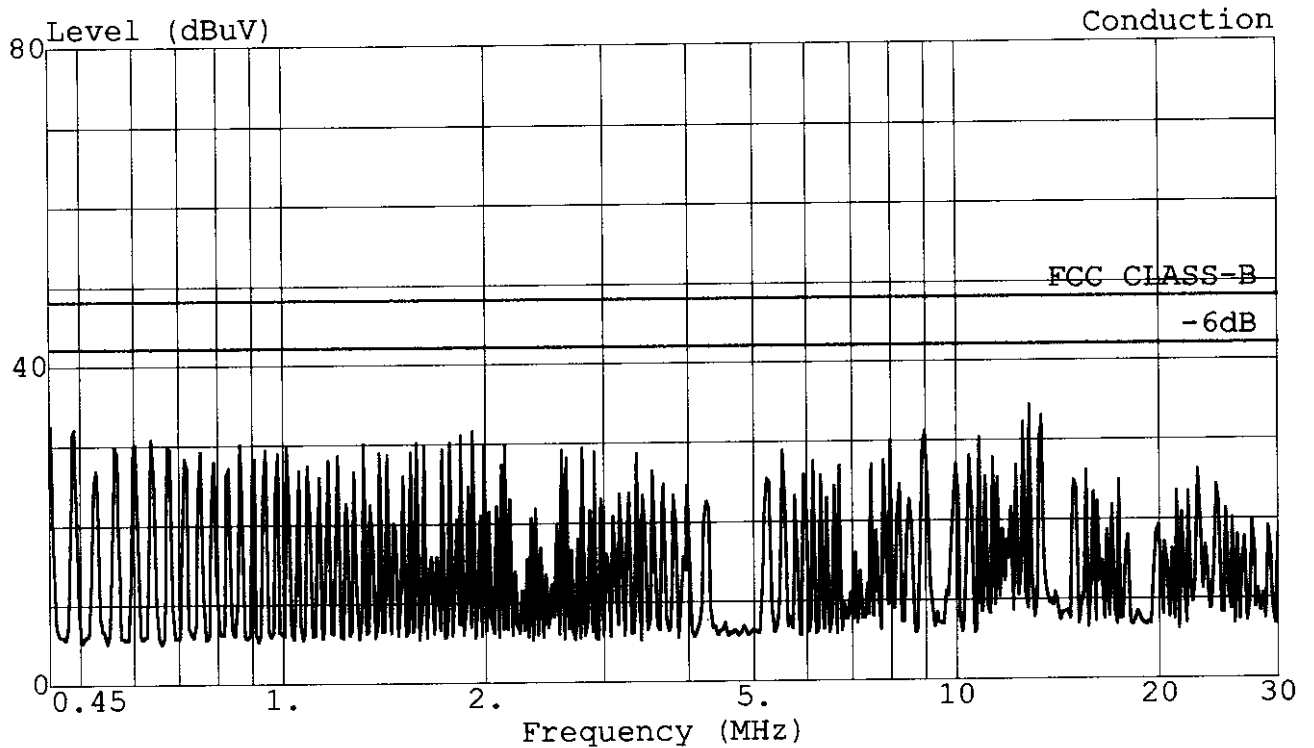

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 640*480;37.9KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 100 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:30:32

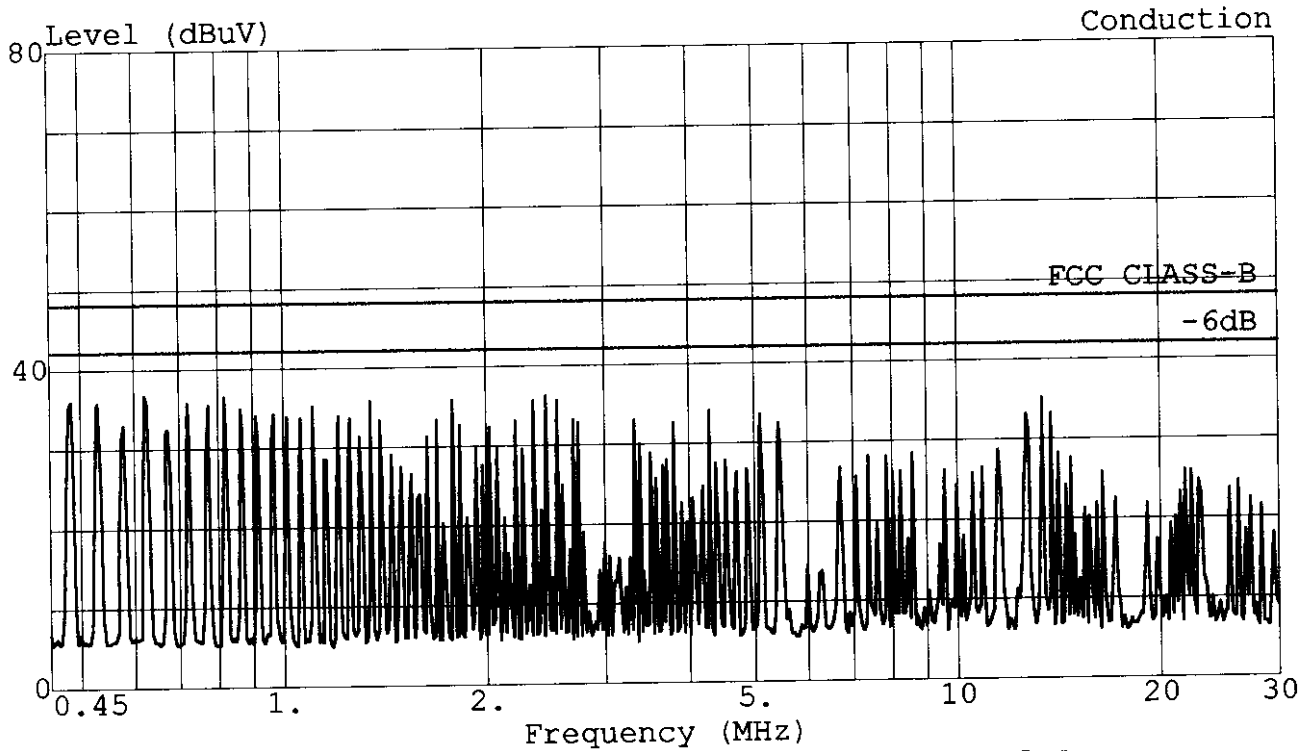

Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 800*600;48.1KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 99 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:30:04

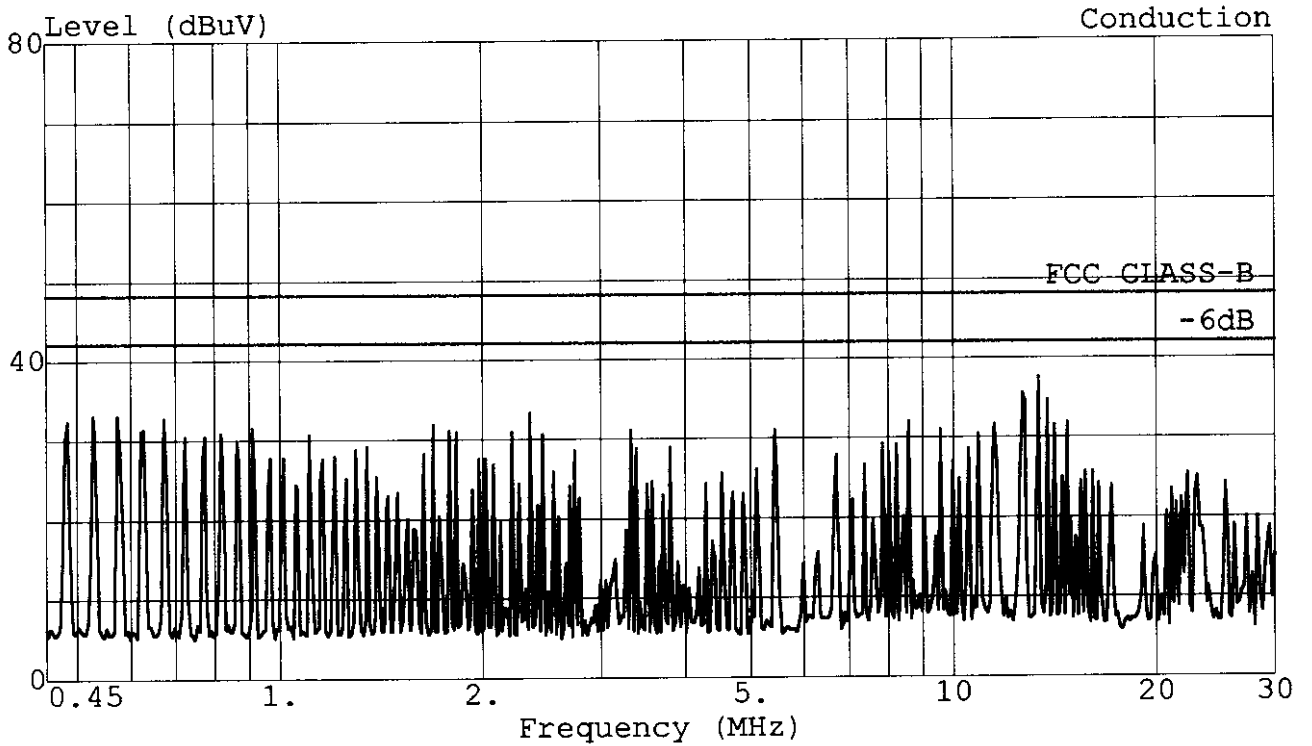

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 800*600;48.1KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 96 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:21:19

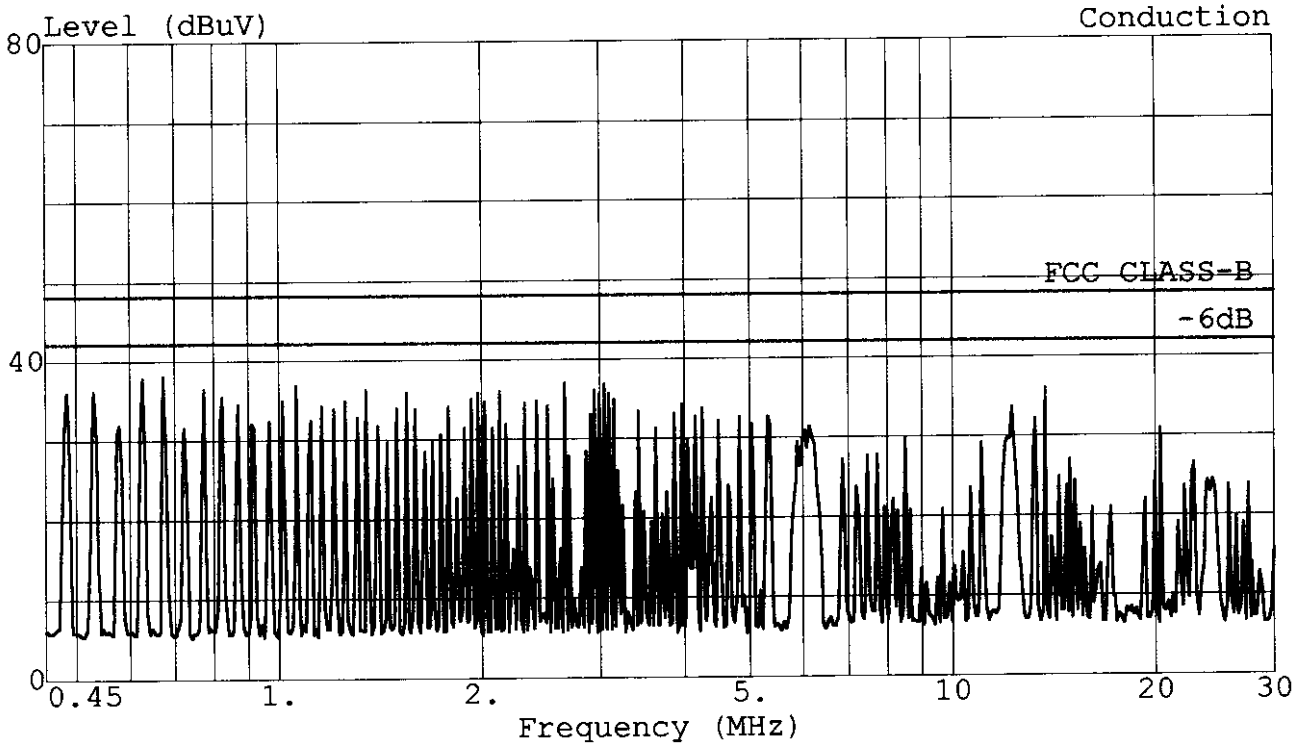

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO LISN

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;48.4KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 95 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:20:42

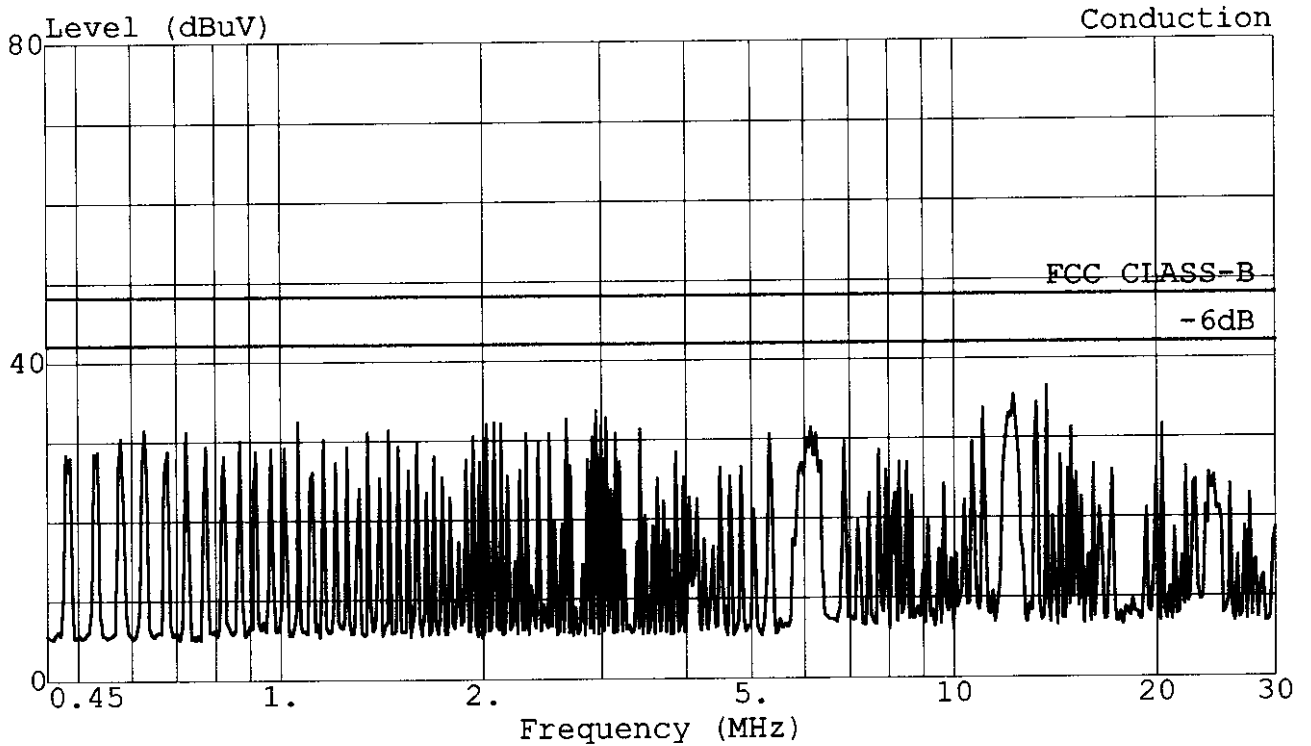

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1024*768;48.4KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 101 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:33:28

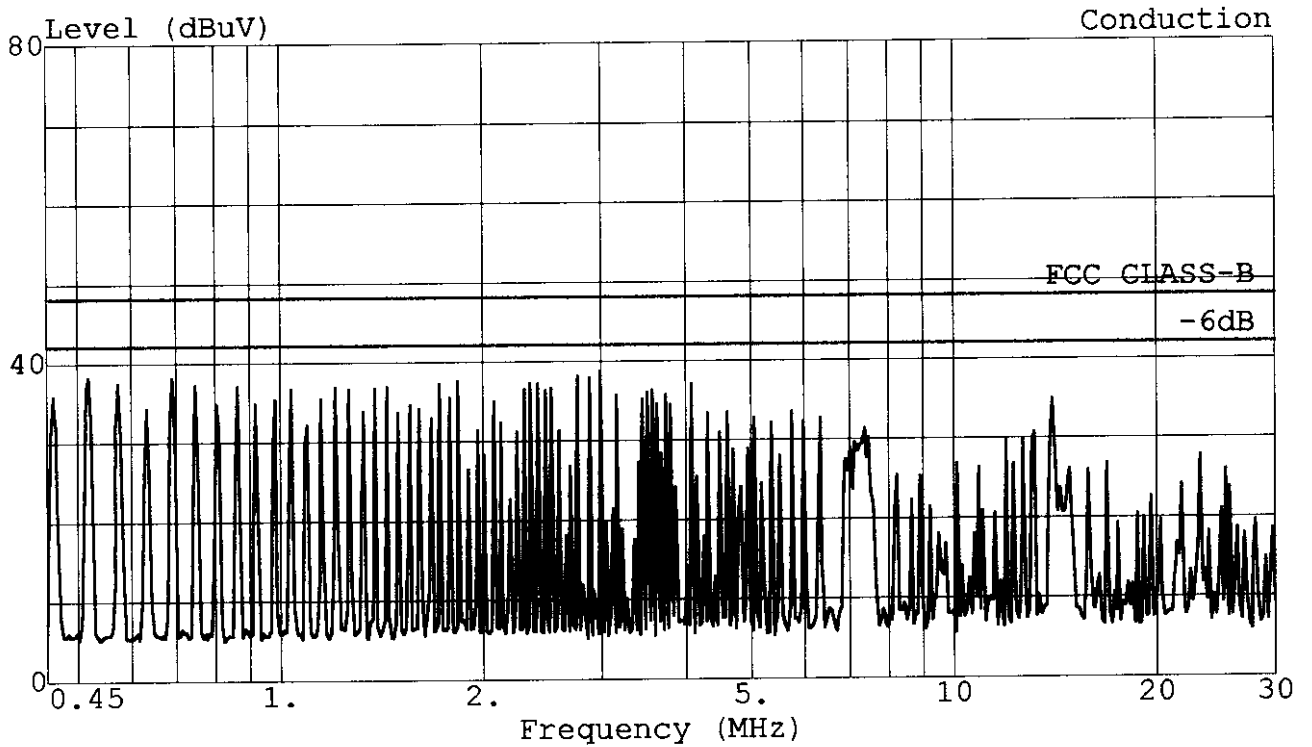

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1024*768;58KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 102 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:33:54

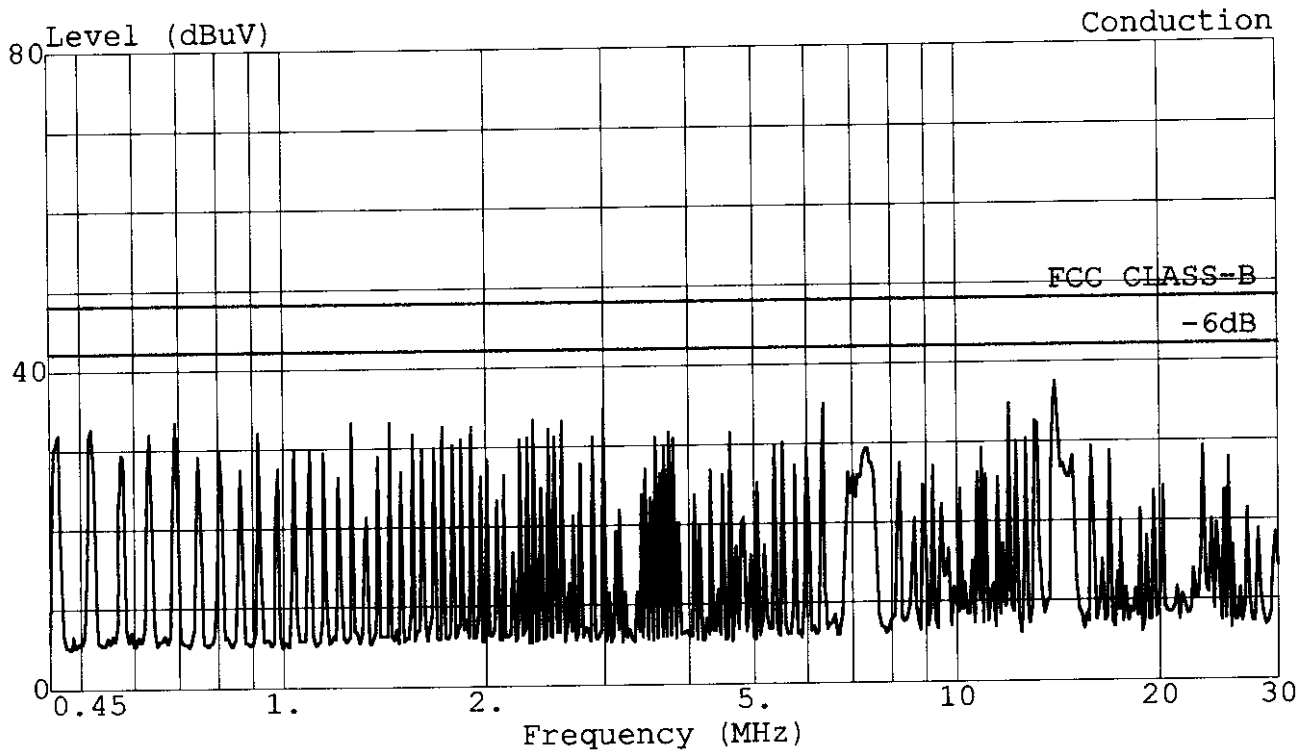

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1024*768;58KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 104 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:37:18

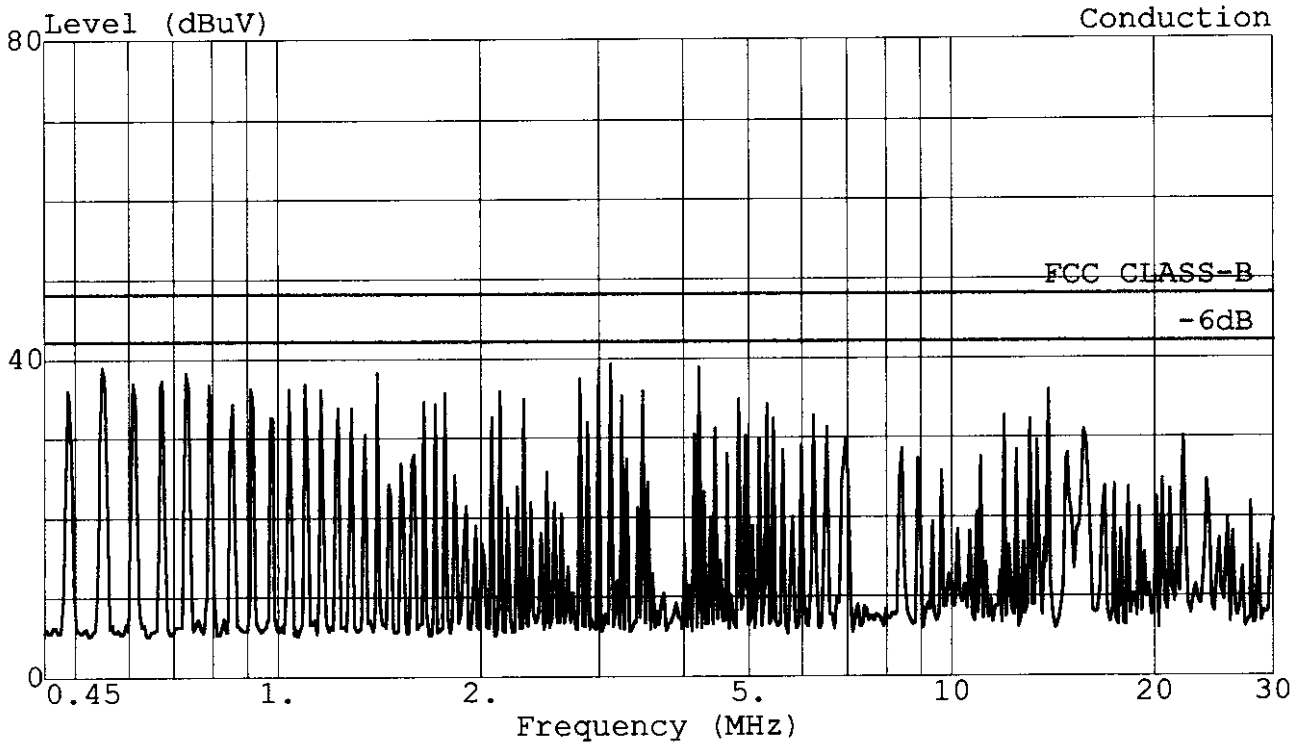

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*960;61.6KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 103 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:36:47

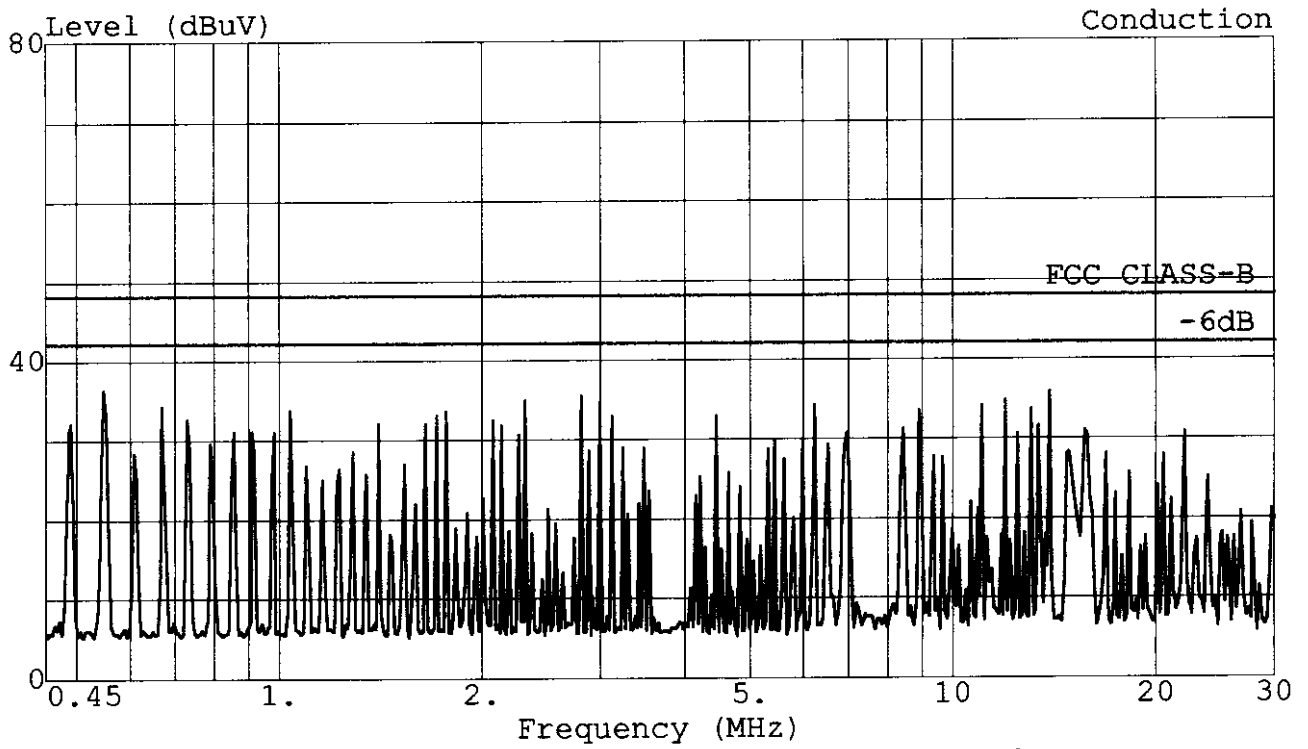

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO LISN
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*960;61.6KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 110 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:54:59

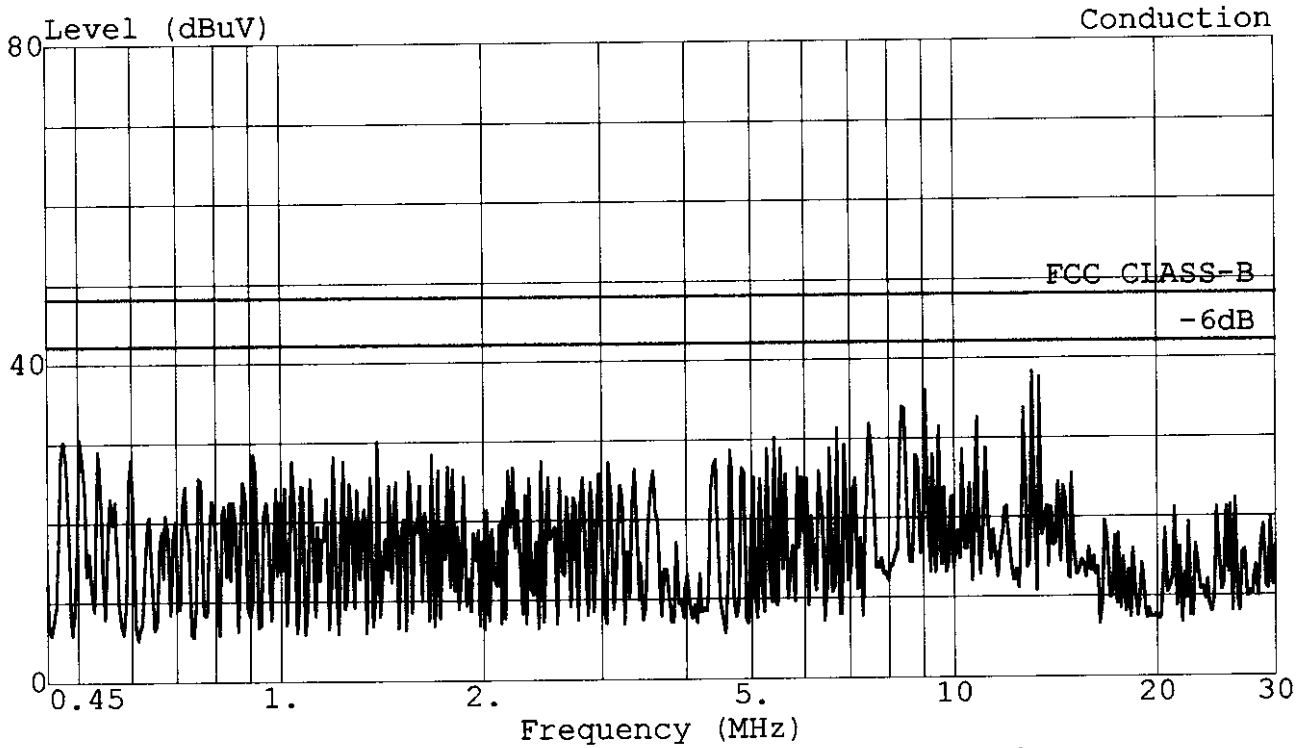

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 640*480;31.5KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 109 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:54:18

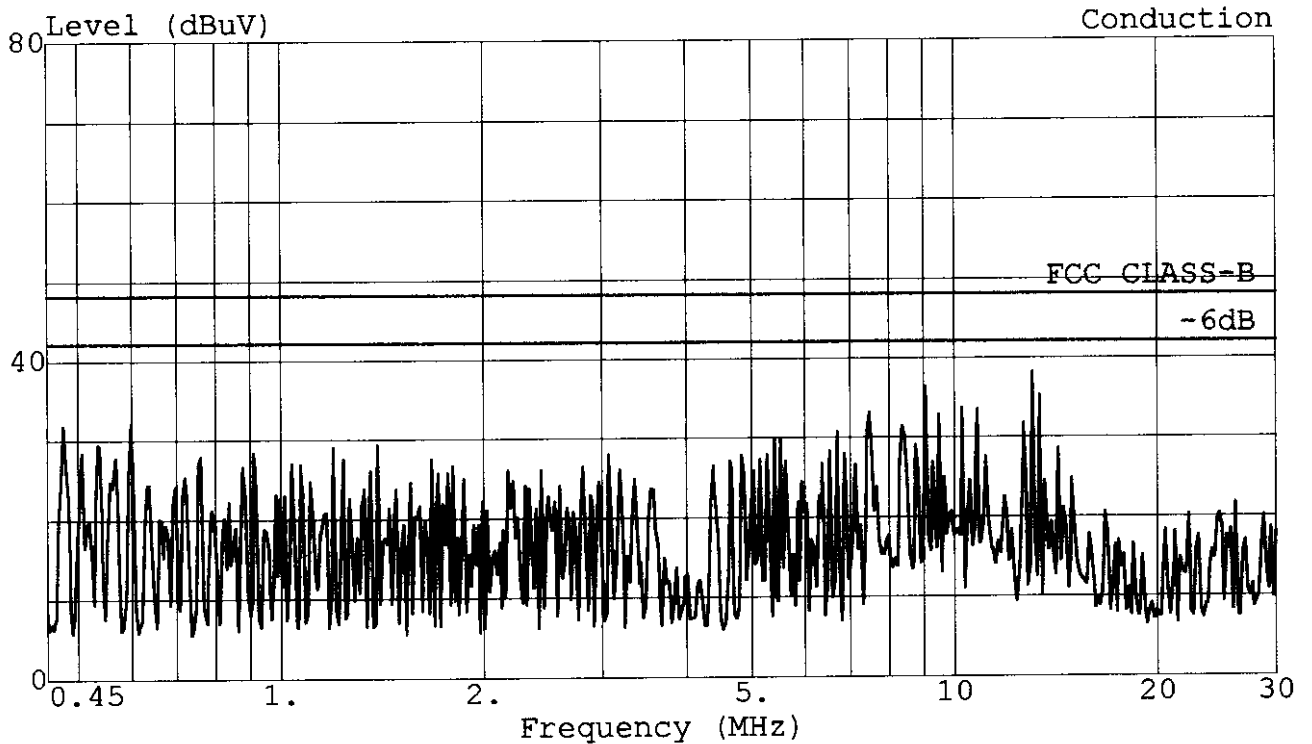

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 640*480;31.5KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 114 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:00:29

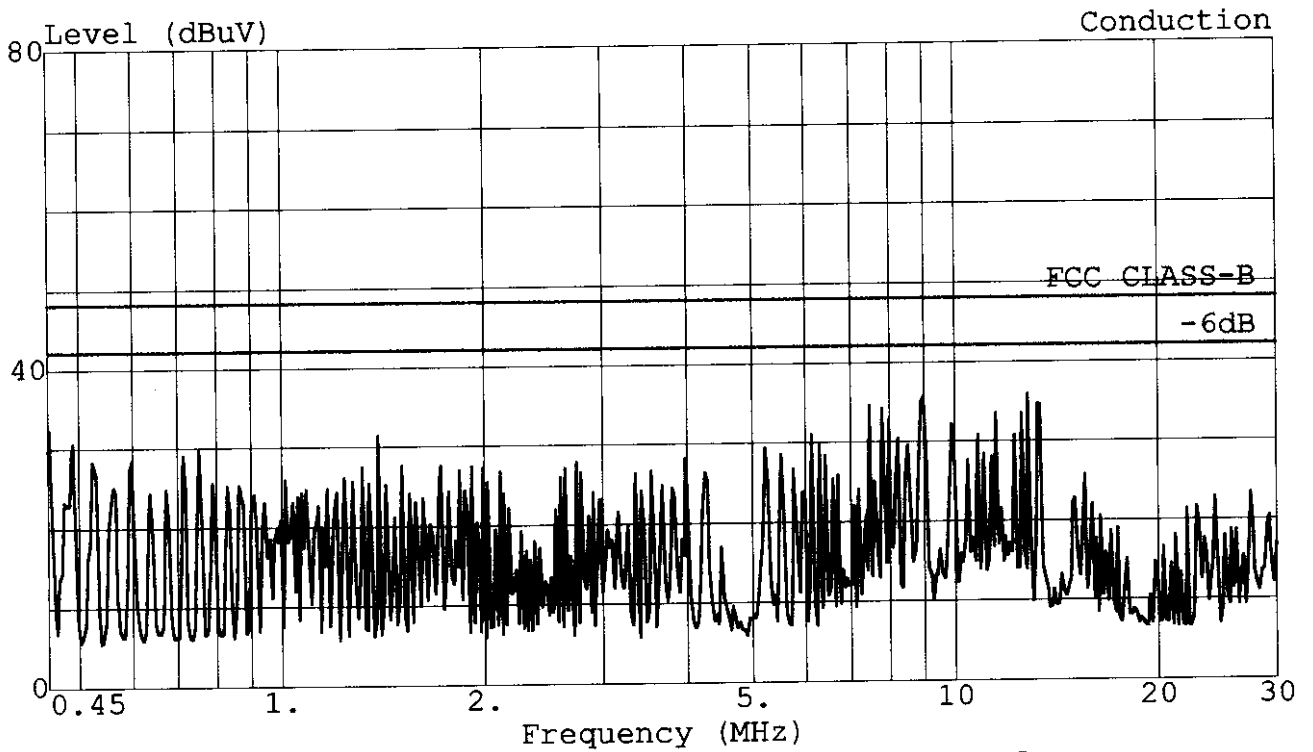

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;37.9KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 113 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:59:59

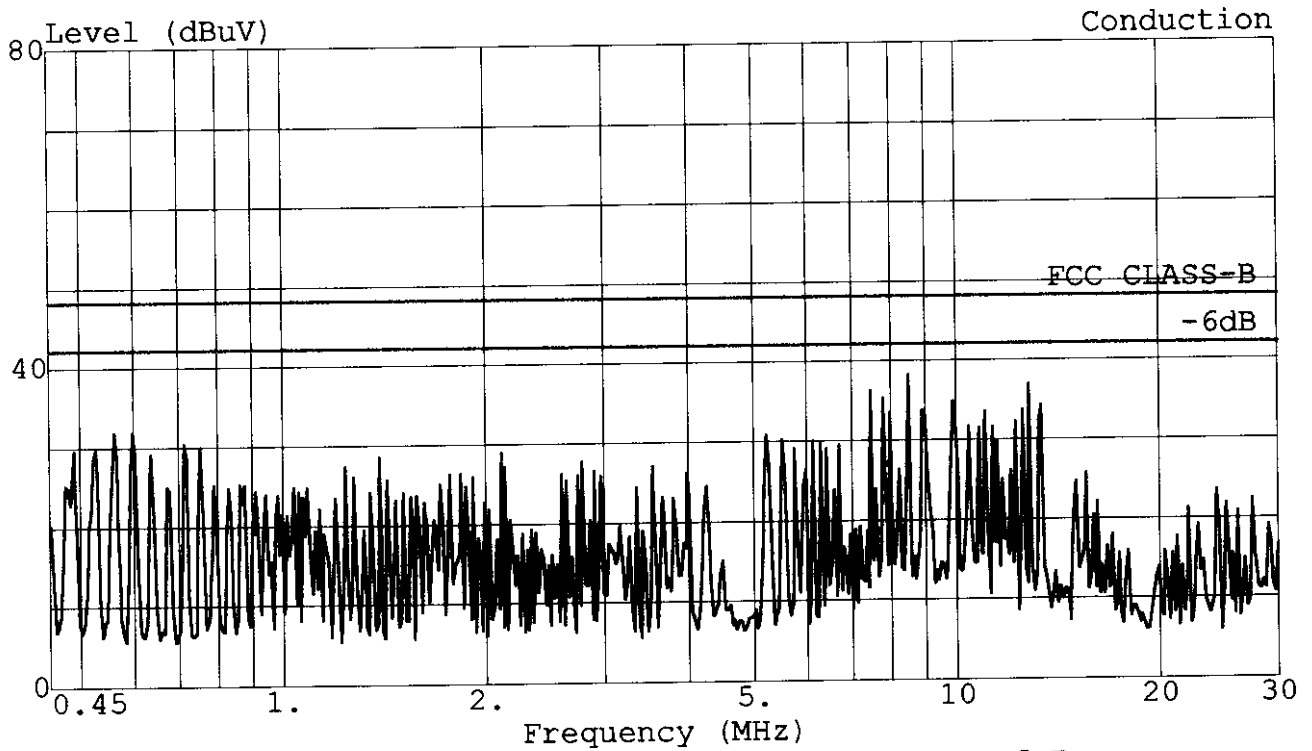

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 640*480;37.9KHz

Ref Trace:


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 115 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:03:27

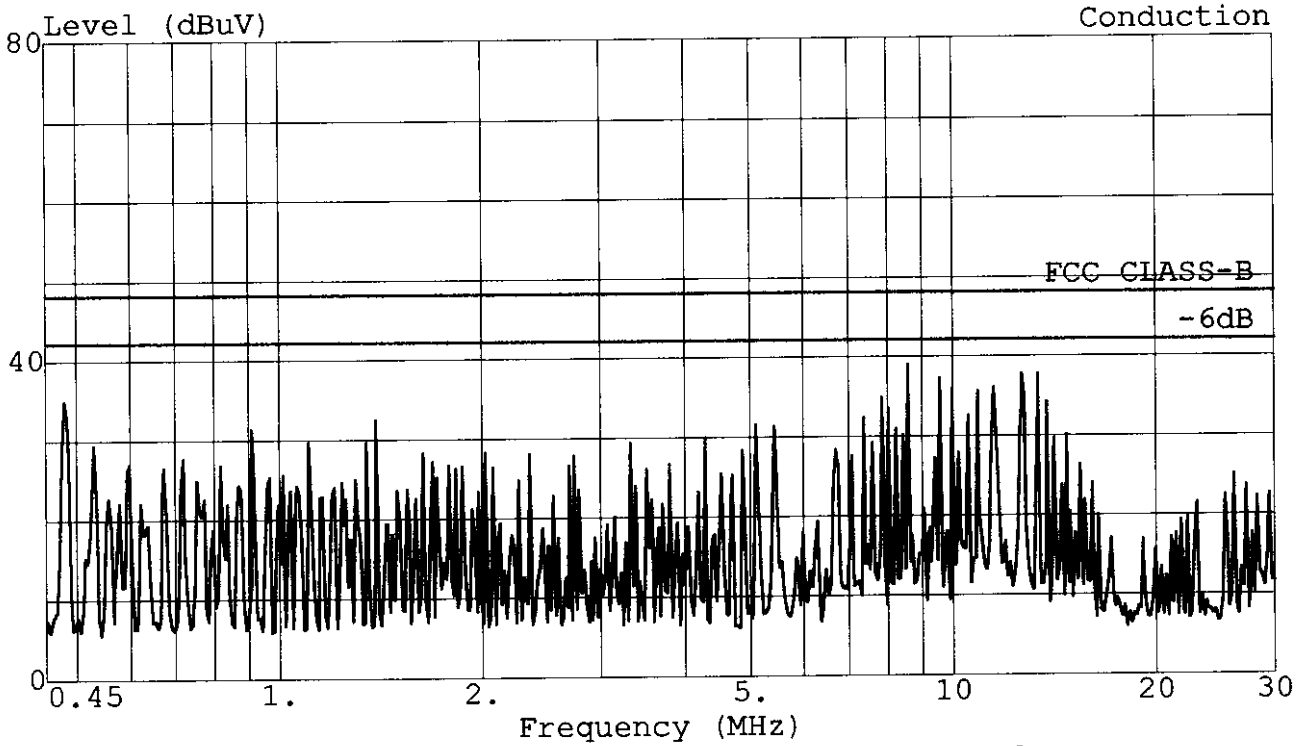

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 800*600;48.1KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 116 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:03:53

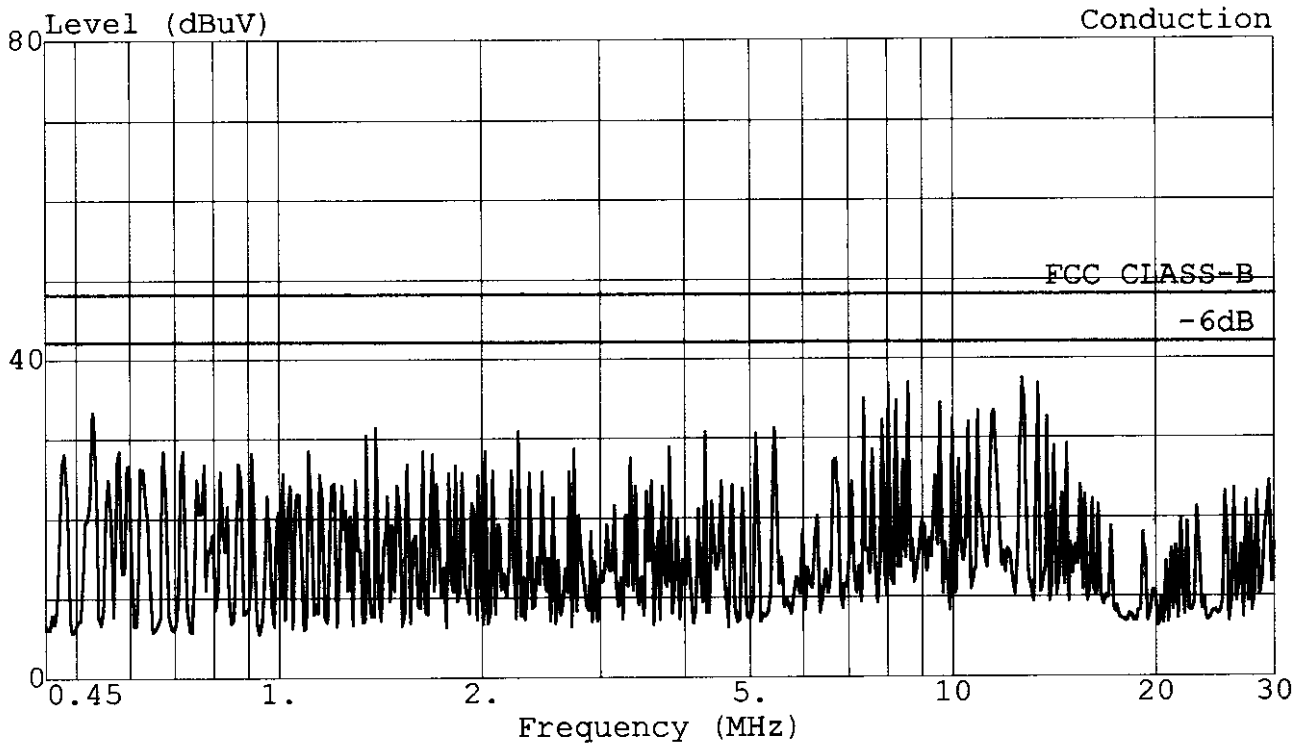

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 800*600;48.1KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 111 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:56:28

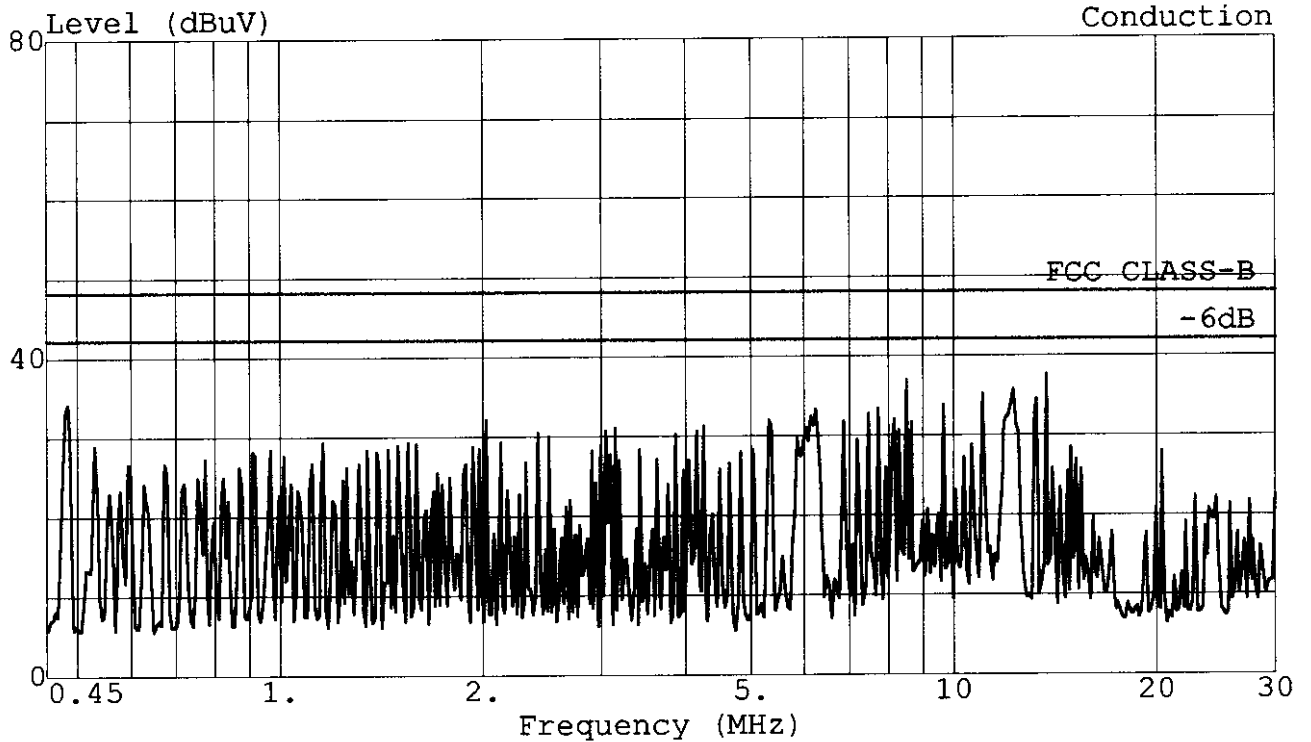

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" COLOR MONITOR EUT TO PC

Power: 120Vac/60Hz

Memo : M/N:TX-T7F22*/M-T7F22*

: 1024*768;48.4KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 112 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 14:56:54

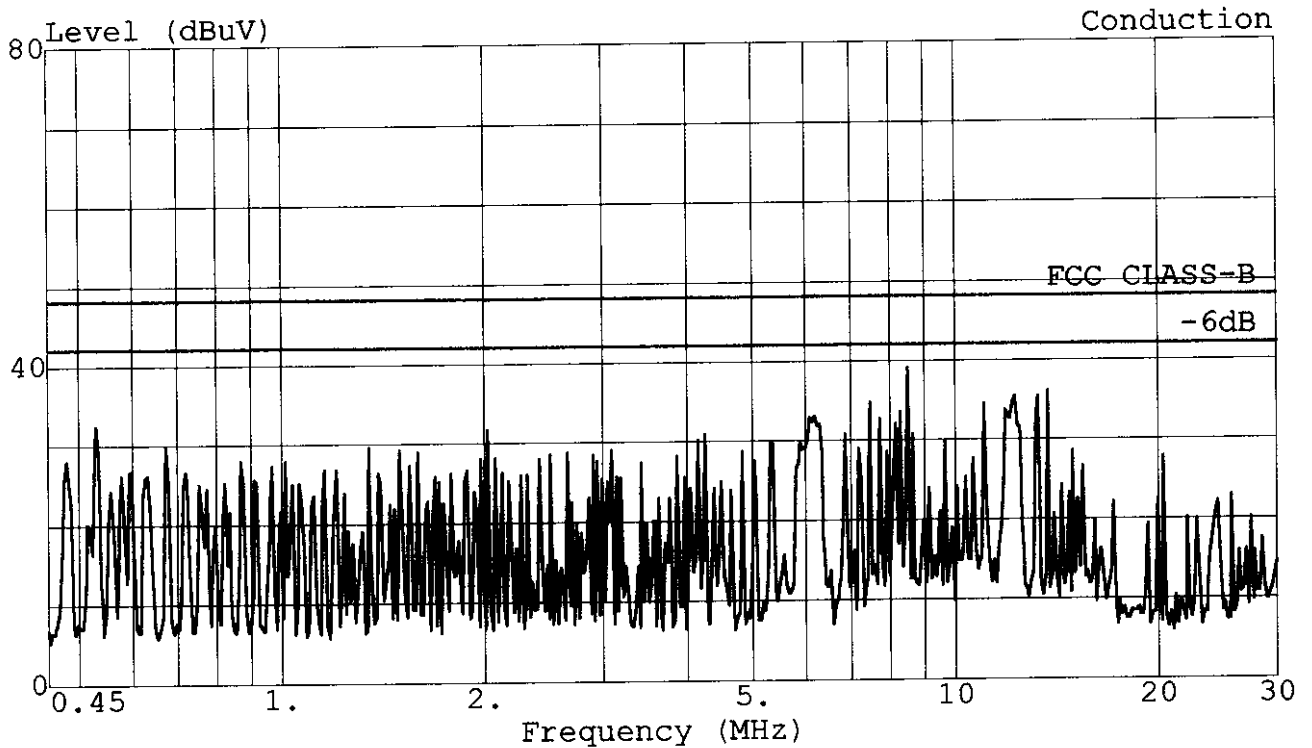

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1024*768;48.4KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 118 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:06:04

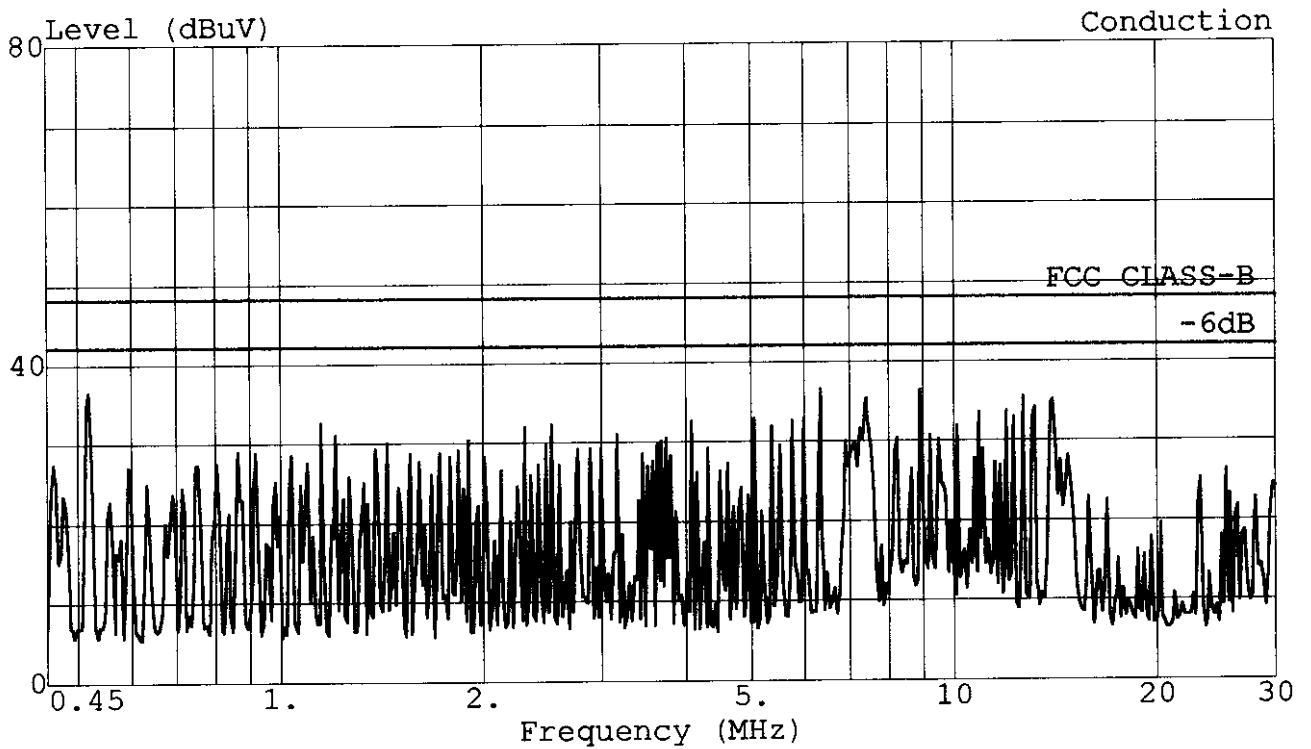

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1024*768;58KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 117 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:05:38

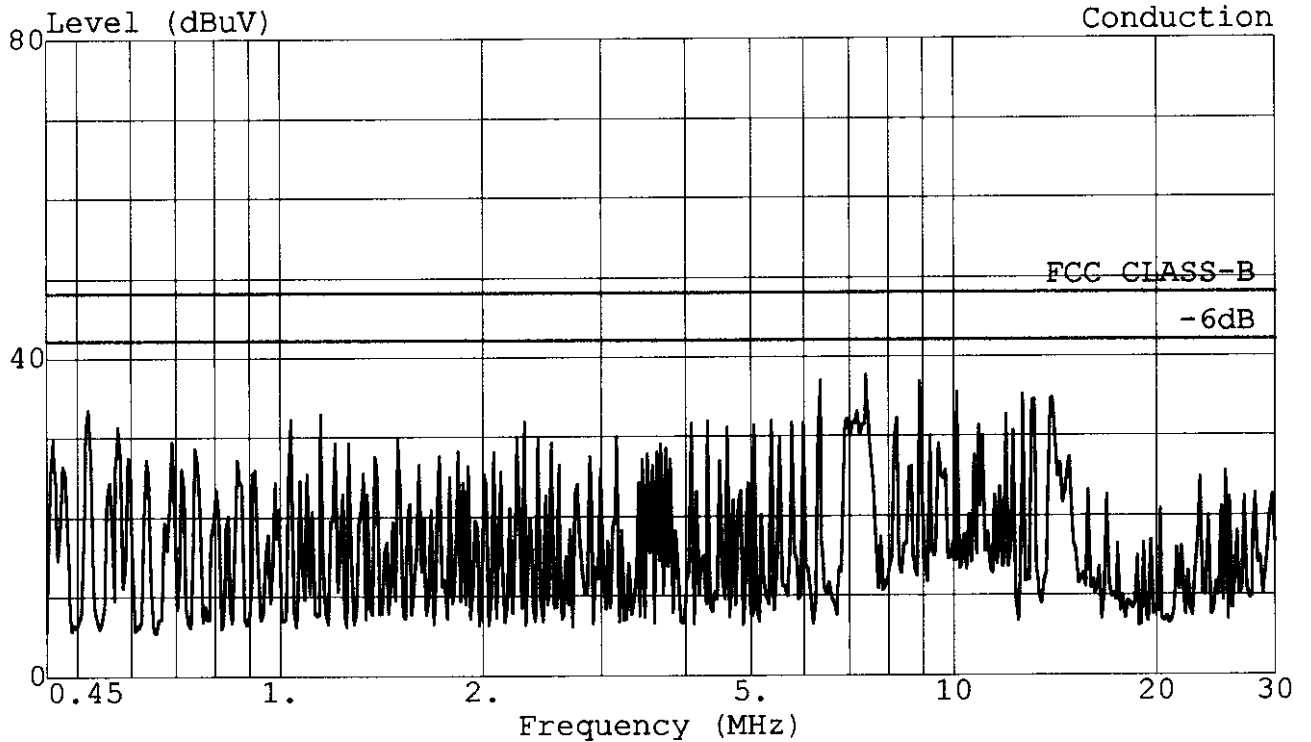

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1024*768;58KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 119 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:07:15

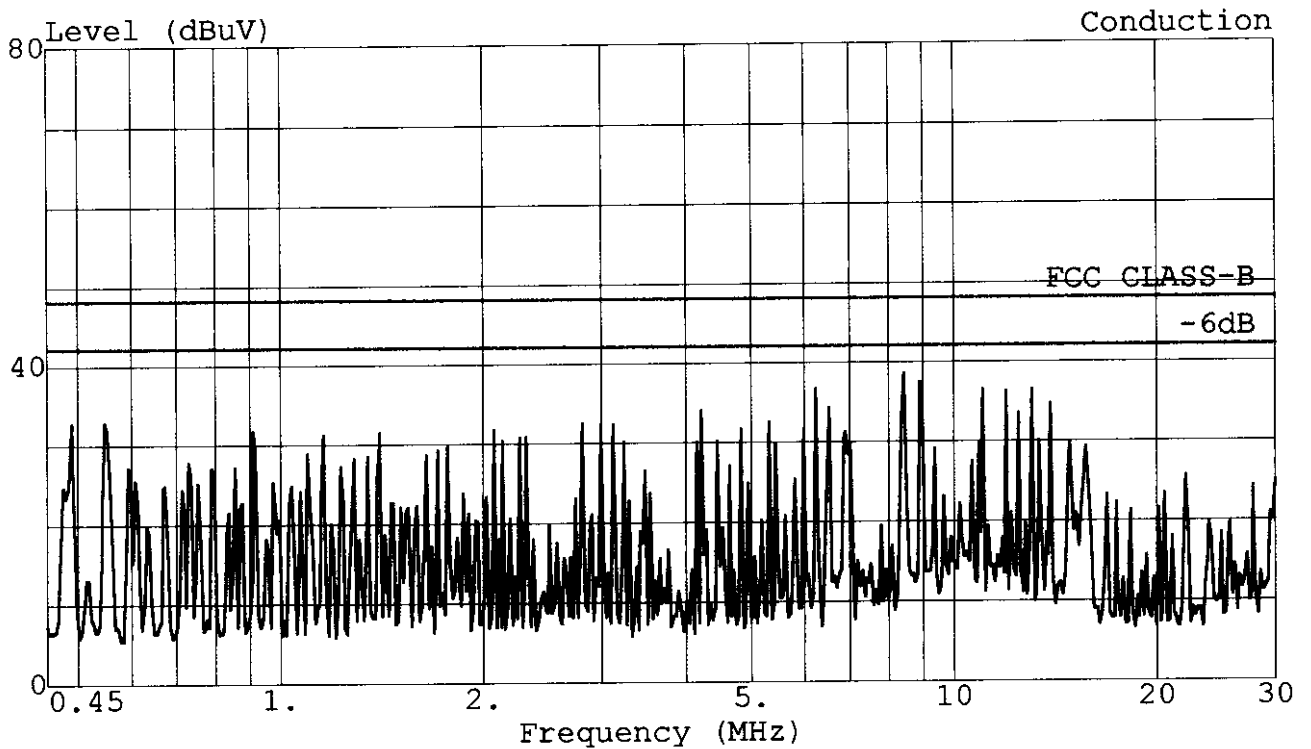

Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*960;61.6KHz


TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
#53-11 Tingfu Tsun, Linkou,
Taipei, Taiwan R.O.C.
Tel:02-26092133 Fax:02-26099303

Data#: 120 File#: MATSUSHI.EMI

Date: 1999-02-11 Time: 15:08:57

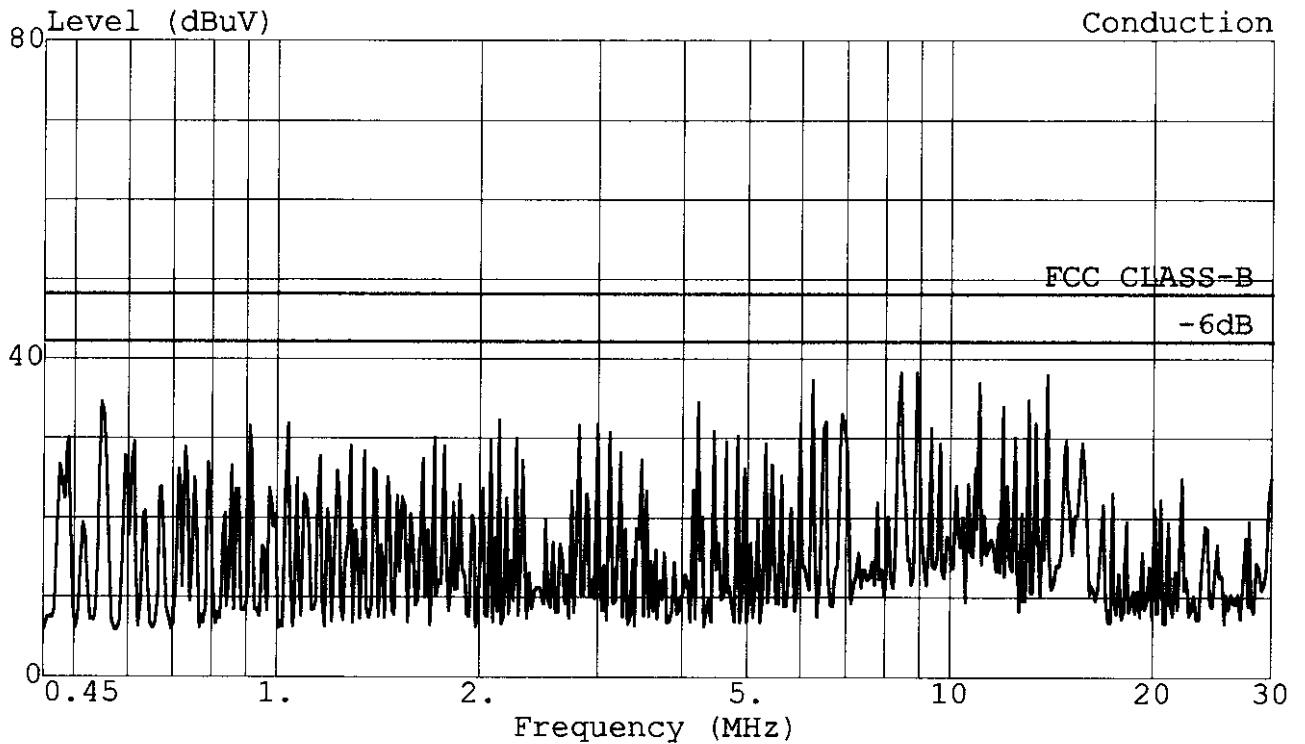


Trace: Ref Trace:
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL
EUT : 17" COLOR MONITOR EUT TO PC
Power: 120Vac/60Hz
Memo : M/N:TX-T7F22*/M-T7F22*
: 1280*960;61.6KHz

APPENDIX II


Radiated Test Data at Anechoic Chamber

(Total Pages : 14)

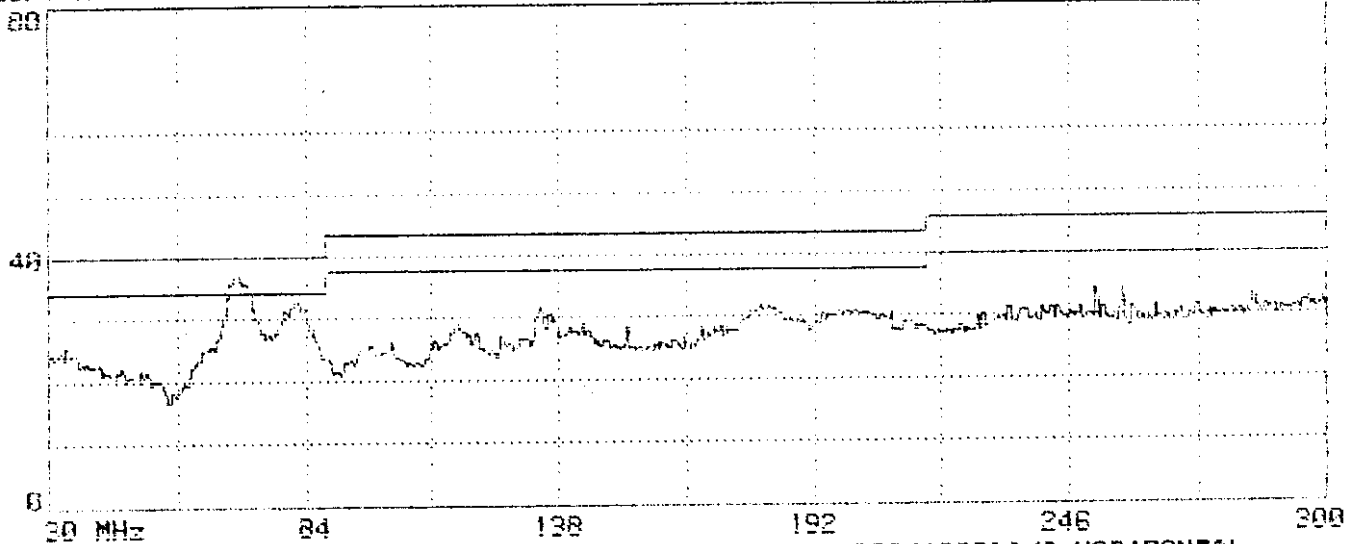

Limit : FCC CLASS-B 3m
 EUT : 17" COLOR MONITOR
 Margin: 6dB Standard: 0
 Memo : 31.5KHz (640X480) M/N:TX-T7F22*


Probe: BB09106B(1209)A/C HORIZONTAL
 Power: 120Vac/60Hz
 Trace: 1510, 0, 0, 0, 0

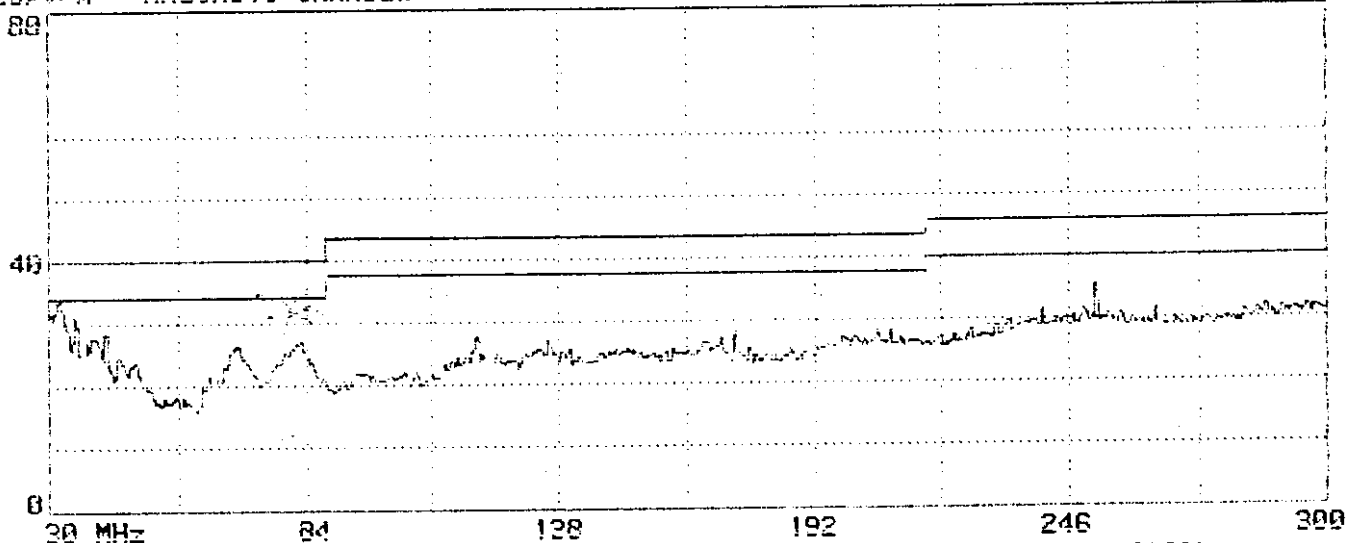

Limit : FCC CLASS-B 3m
 EUT : 17" COLOR MONITOR
 Margin: 6dB Standard: 0
 Memo : 31.5KHz (640X480) M/N:TX-T7F22*

Probe: BB09106B(1209)A/C VERTICAL
 Power: 120Vac/60Hz
 Trace: 1511, 0, 0, 0, 0


Page#: 1508 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 17:33:33
dBuV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

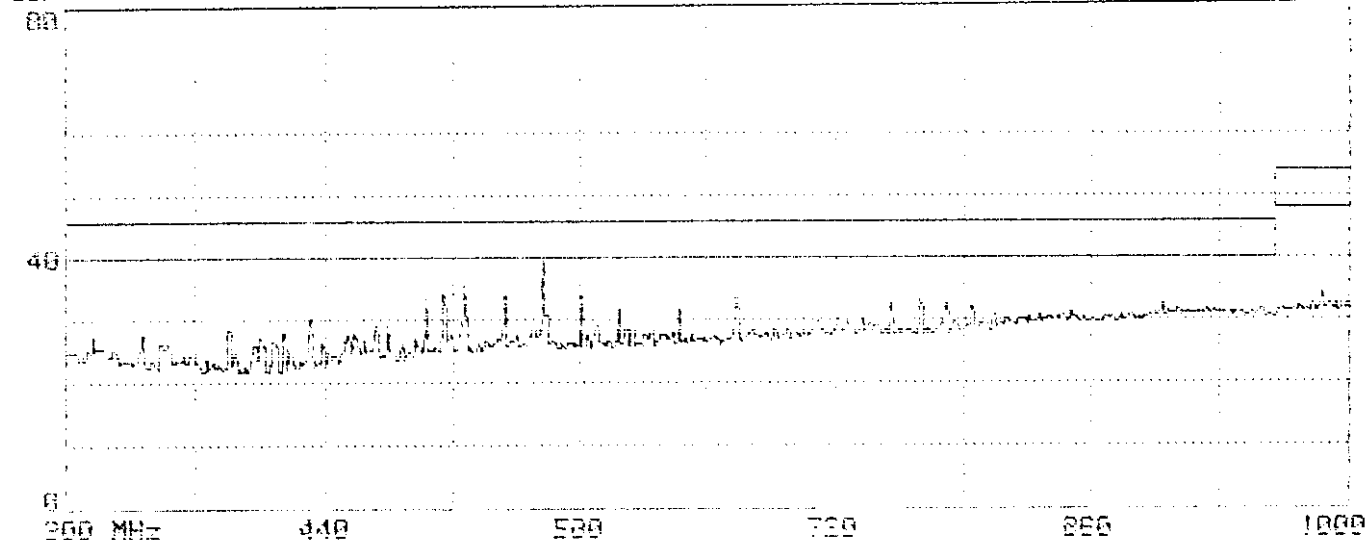

Limit : FCC CLASS-B 3m
EUT : 17" COLOR MONITOR
Margin: 6dB Standard: 0
Memo : 31.5KHz(640X480) M/N:TX-T7F22*


Probe: WH0LP 0100-A 0100 HORIZONTAL
Power: 120Vac/60Hz
Trace: 1500, 0, 0, 0

Page#: 1509 SP File#: MATSUSHI.E1 Date: 02-10-1999 Time: 17:40:16
dBuV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

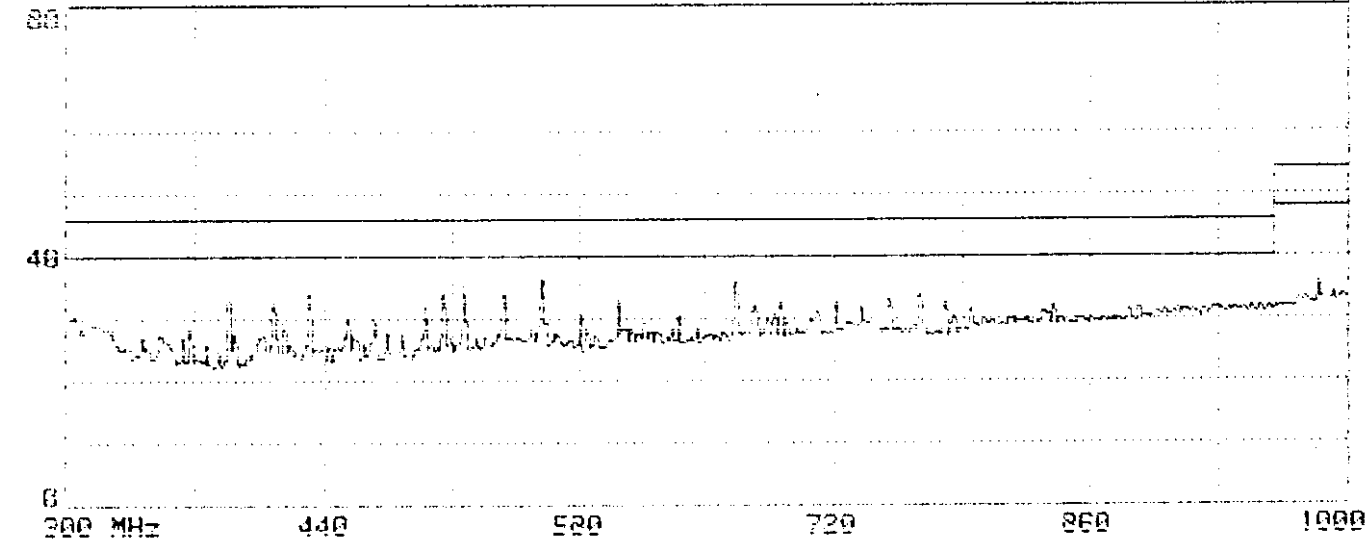


Limit : FCC CLASS-B 3m
EUT : 17" COLOR MONITOR
Margin: 6dB Standard: 0
Memo : 31.5KHz(640X480) M/N:TX-T7F22*

Probe: WH0LP 0100-A 0100 VERTICAL
Power: 120Vac/60Hz
Trace: 1500, 0, 0, 0

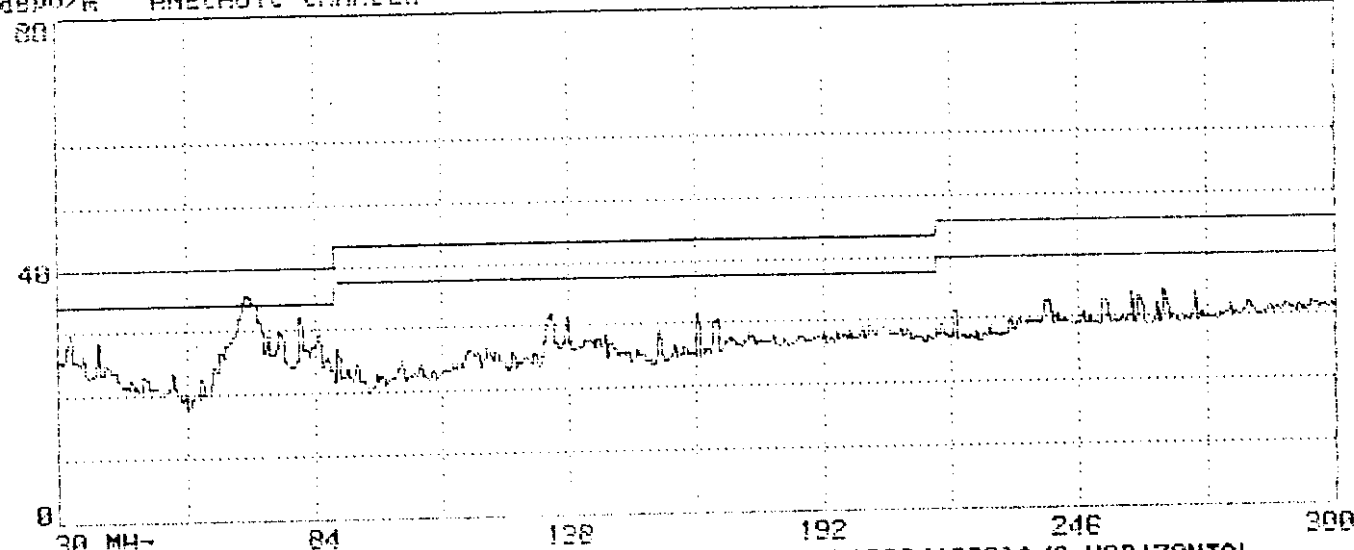

Limit : FCC CLASS-B 3m
 EUT : 17" COLOR MONITOR
 Margin: 6dB Standard: 0
 Memo : 37.9KHz (640X480) M/N:TX-T7F22*


Probe: BB091060 (1209)A/C HORIZONTAL
 Power: 120V_{ac}/50Hz
 Trace: 1512, 0, 0, 0, 0

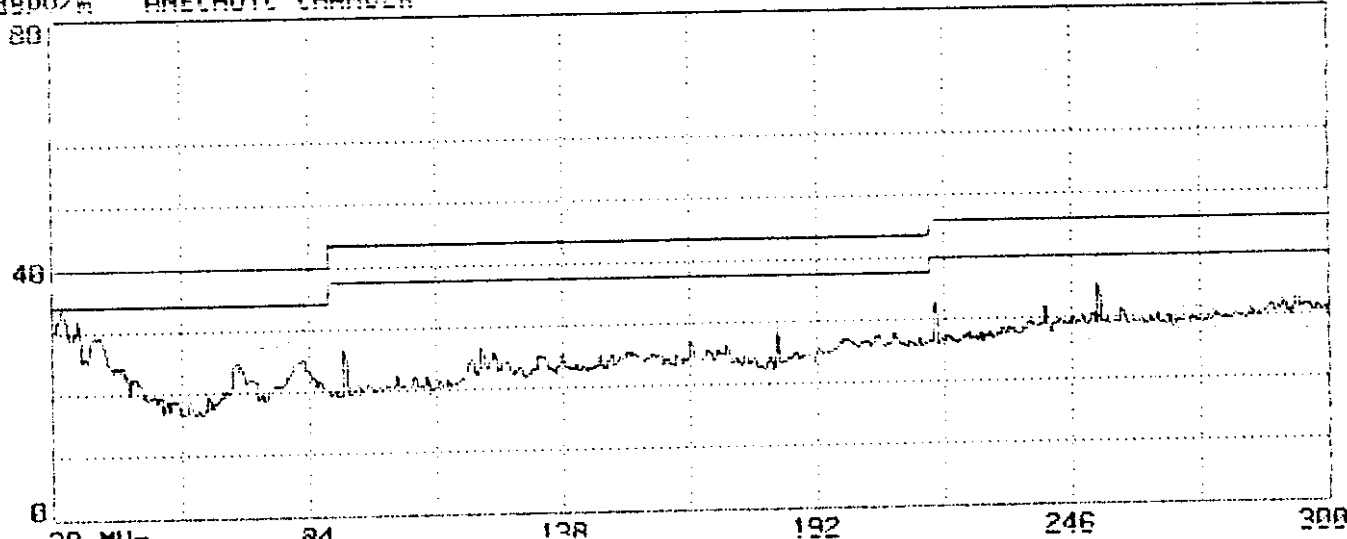

Limit : FCC CLASS-B 3m
 EUT : 17" COLOR MONITOR
 Margin: 6dB Standard: 0
 Memo : 37.9KHz (640X480) M/N:TX-T7F22*

Probe: BB091060 (1209)A/C VERTICAL
 Power: 120V_{ac}/50Hz
 Trace: 1513, 0, 0, 0, 0


Page#: 1514 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 17:58:21
dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

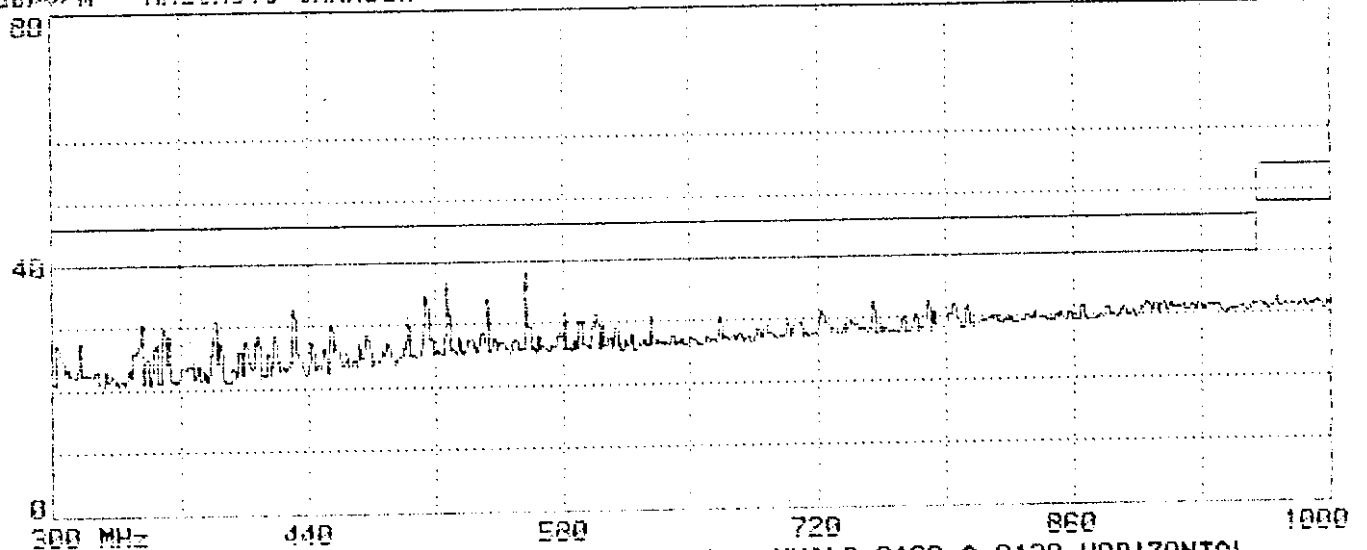

Limit : FCC CLASS-B 3m
EUT : 17" COLOR MONITOR
Margin: 6dB Standard: 0
Memo : 37.9KHz(640X480) M/N:TX-T7F22*

Probe: UHALP 9108-A 0139 HORIZONTAL
Power: 120Vac/60Hz
Trace: 1514, 0, 0, 0, 0

Page#: 1515 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 17:59:51
dB μ V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

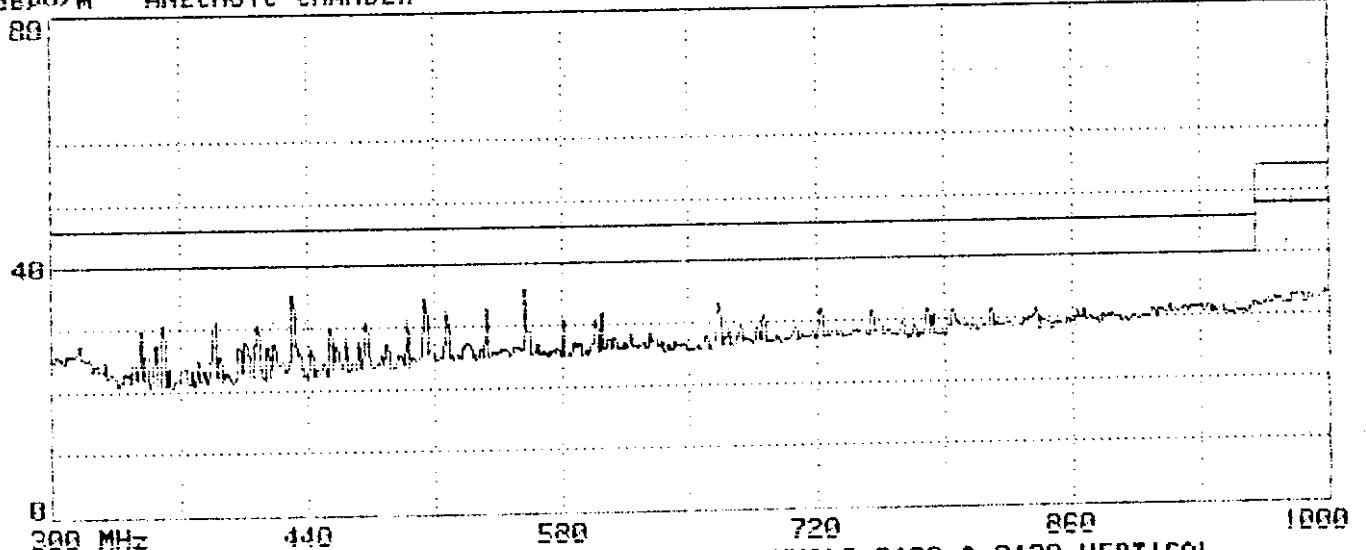


Limit : FCC CLASS-B 3m
EUT : 17" COLOR MONITOR
Margin: 6dB Standard: 0
Memo : 37.9KHz(640X480) M/N:TX-T7F22*

Probe: UHALP 9108-A 0139 VERTICAL
Power: 120Vac/60Hz
Trace: 1515, 0, 0, 0, 0

Page#: 1518 SP File#: MATSUSHI.EI
dB μ V/m ANECHOIC CHAMBER

Date: 02-10-1999 Time: 18:10:56
TAIWAN TOKIN EMC ENG. CORP.

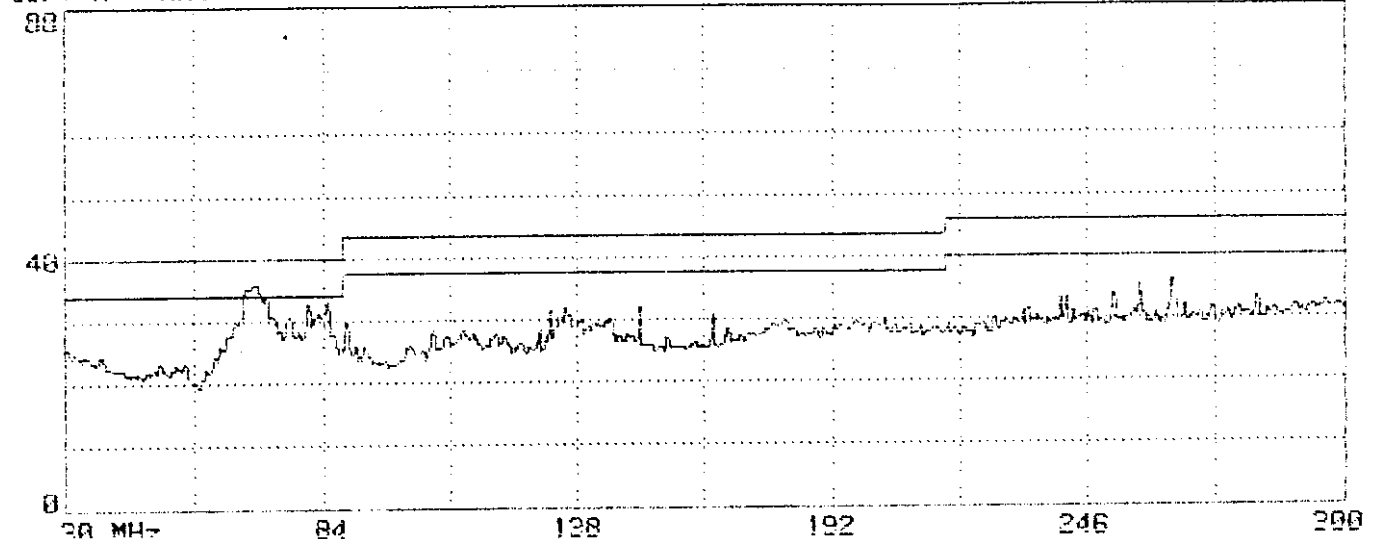


Limit : FCC CLASS-B 3m
EUT : 17" COLOR MONITOR
Margin: 6dB Standard: 0
Memo : 48.1KHz(800X600) M/N:TX-T7F22*

Probe: 89091058(1209)O/C HORIZONTAL
Power: 120Vac/60Hz
Trace: 1518, 0, 0, 0, 0

Page#: 1519 SP File#: MATSUSHI.EI
dB μ V/m ANECHOIC CHAMBER

Date: 02-10-1999 Time: 18:12:33
TAIWAN TOKIN EMC ENG. CORP.

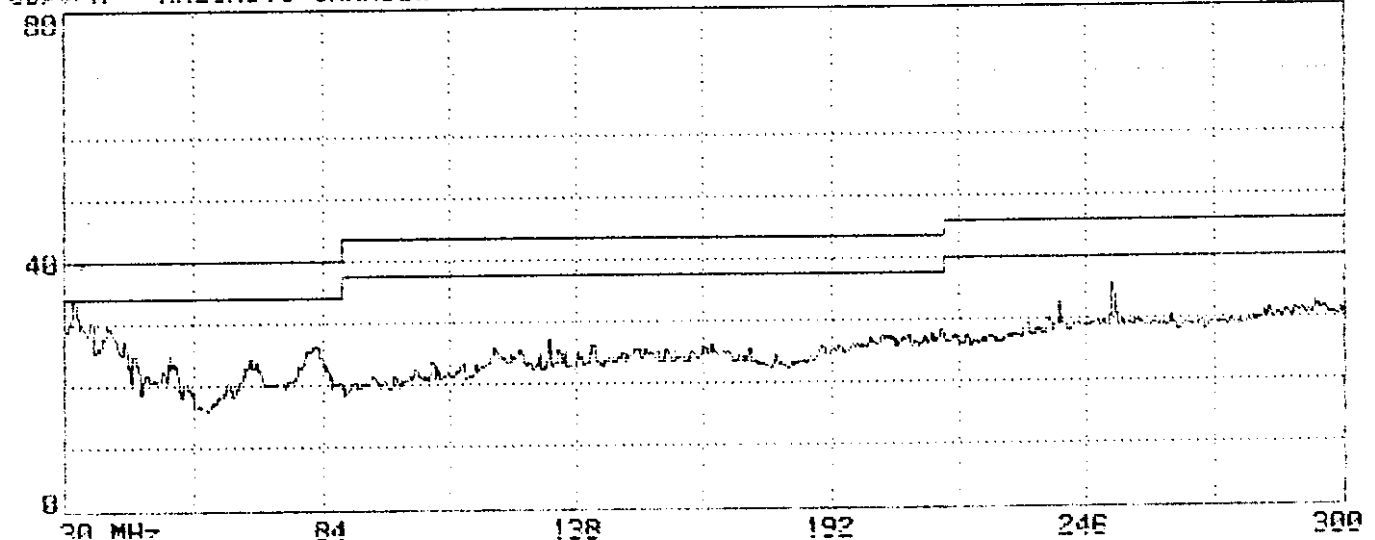


Limit : FCC CLASS-B 3m
EUT : 17" COLOR MONITOR
Margin: 6dB Standard: 0
Memo : 48.1KHz(800X600) M/N:TX-T7F22*

Probe: 89091058(1209)O/C VERTICAL
Power: 120Vac/60Hz
Trace: 1519, 0, 0, 0, 0

Page#: 1516 SP File#: MATSUSHI.E1
dBuV/m ANECHOIC CHAMBER

Date: 02-10-1999 Time: 18:04:49
TAIWAN TOKIN EMC ENG. CORP.

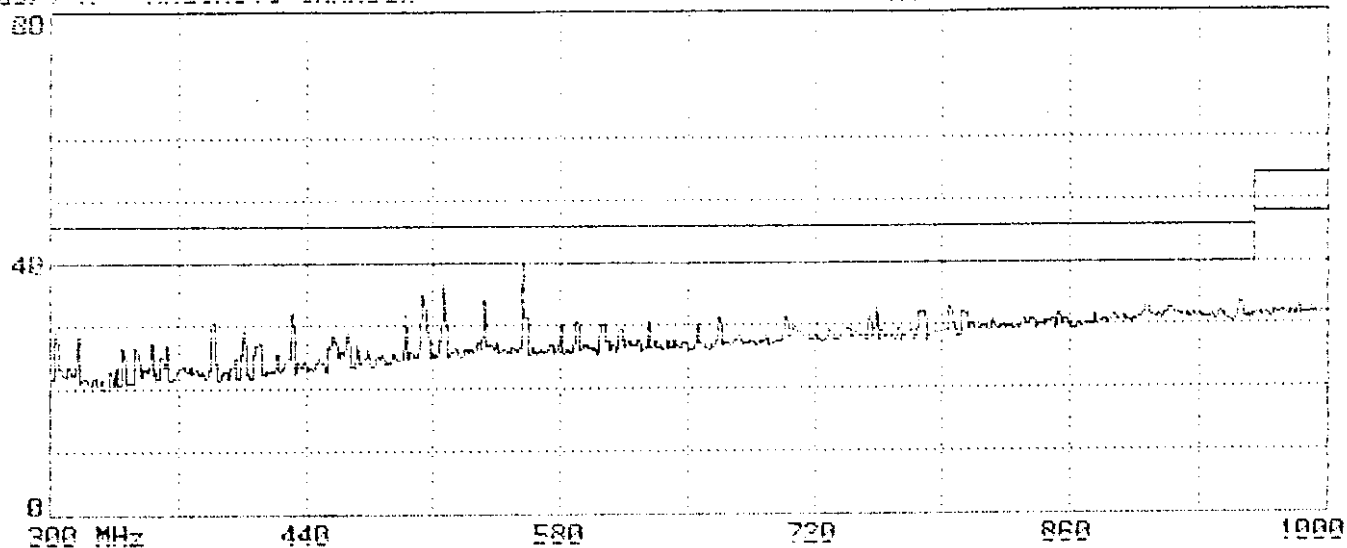


Limit : FCC CLASS-B 3m
EUT : 17" COLOR MONITOR
Margin: 6dB Standard: 0
Memo : 48.1KHz(800X600) M/N:TX-T7F22*

Probe: UHALP 9108-A 0139 HORIZONTAL
Power: 120Vac/60Hz
Trace: 1516, 0, 0, 0, 0


Page#: 1517 SP File#: MATSUSHI.E1
dBuV/m ANECHOIC CHAMBER

Date: 02-10-1999 Time: 18:06:27
TAIWAN TOKIN EMC ENG. CORP.

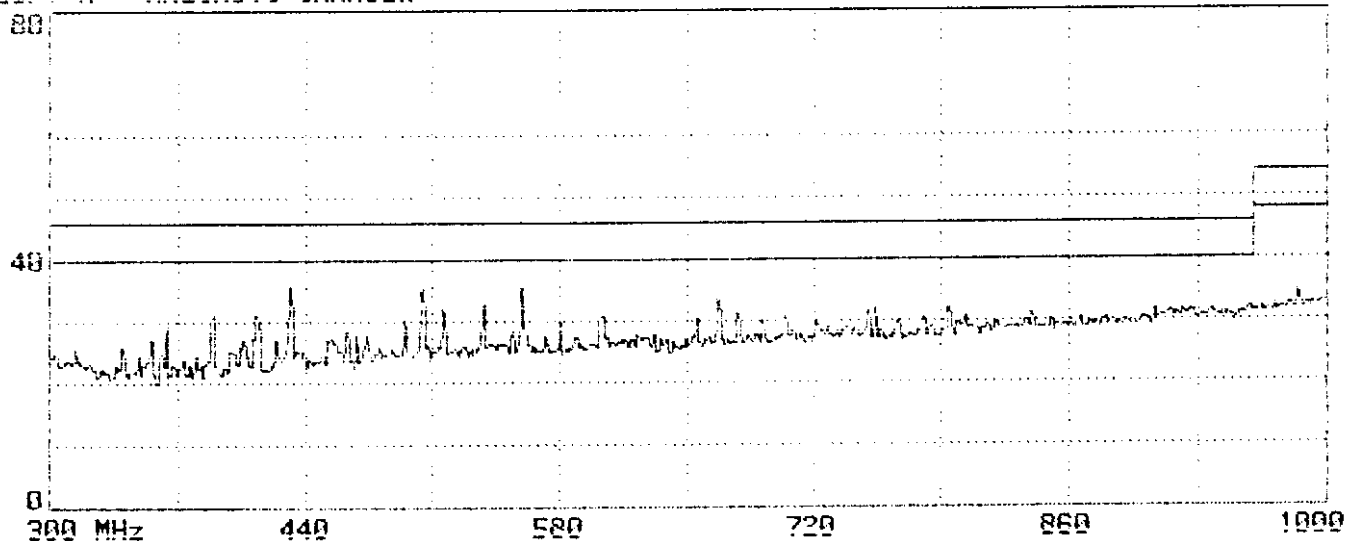


Limit : FCC CLASS-B 3m
EUT : 17" COLOR MONITOR
Margin: 6dB Standard: 0
Memo : 48.1KHz(800X600) M/N:TX-T7F22*

Probe: UHALP 9108-A 0139 VERTICAL
Power: 120Vac/60Hz
Trace: 1517, 0, 0, 0, 0

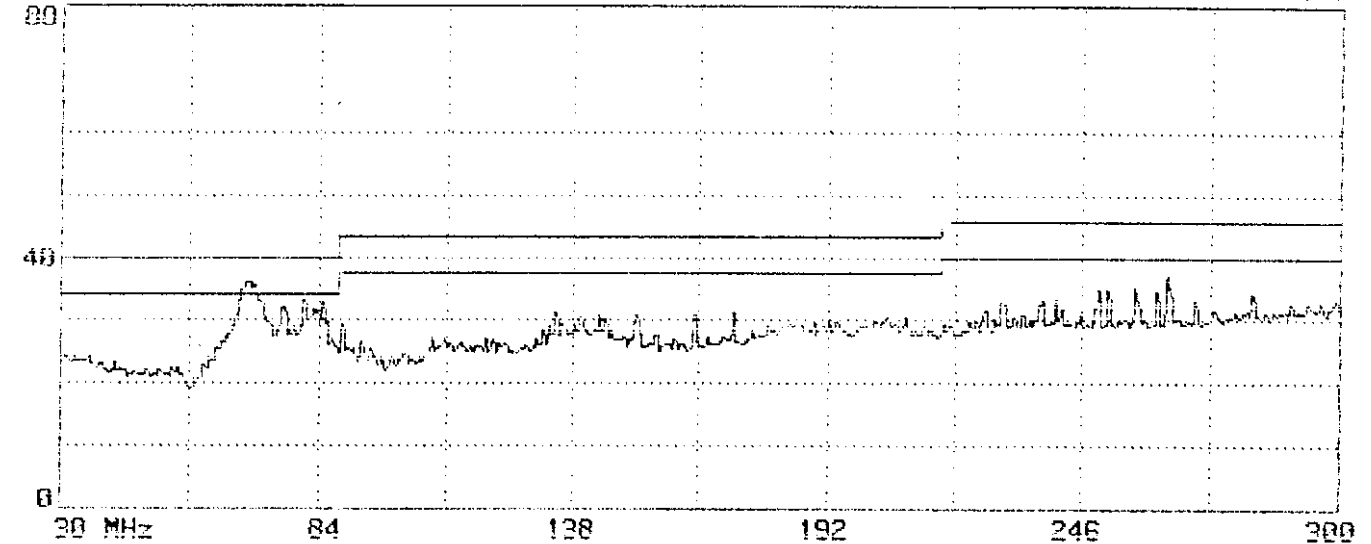


Limit : FCC CLASS-B 3m Probe: BBA9106B(1209)A/C HORIZONTAL
EUT : 17" COLOR MONITOR Power: 120Vac/60Hz
Margin: 6dB Standard: 0 Trace: 1520, 0, 0, 0, 0
Memo : 48.4KHz(1024X768) M/N:TX-T7F22*

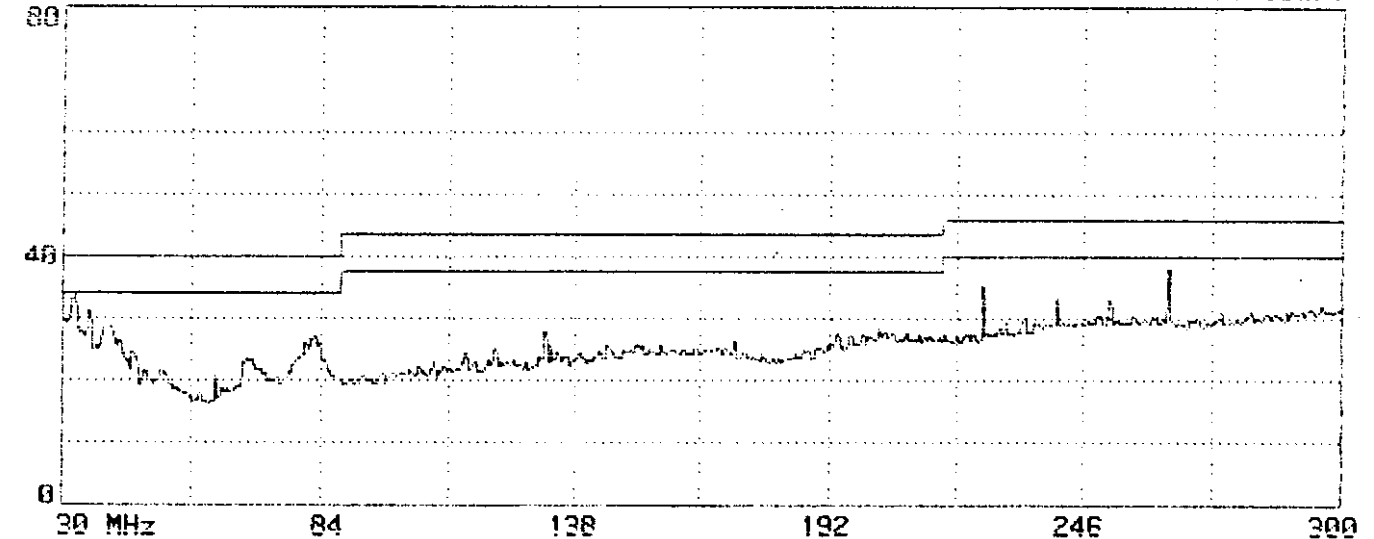




Limit : FCC CLASS-B 3m Probe: BBA9106B(1209)A/C VERTICAL
EUT : 17" COLOR MONITOR Power: 120Vac/60Hz
Margin: 6dB Standard: 0 Trace: 1521, 0, 0, 0, 0
Memo : 48.4KHz(1024X768) M/N:TX-T7F22*



Page#: 1522 SP File#: MATSUSHI.EI Date: 02-10-1999 Time: 18:29:03
dB μ /m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

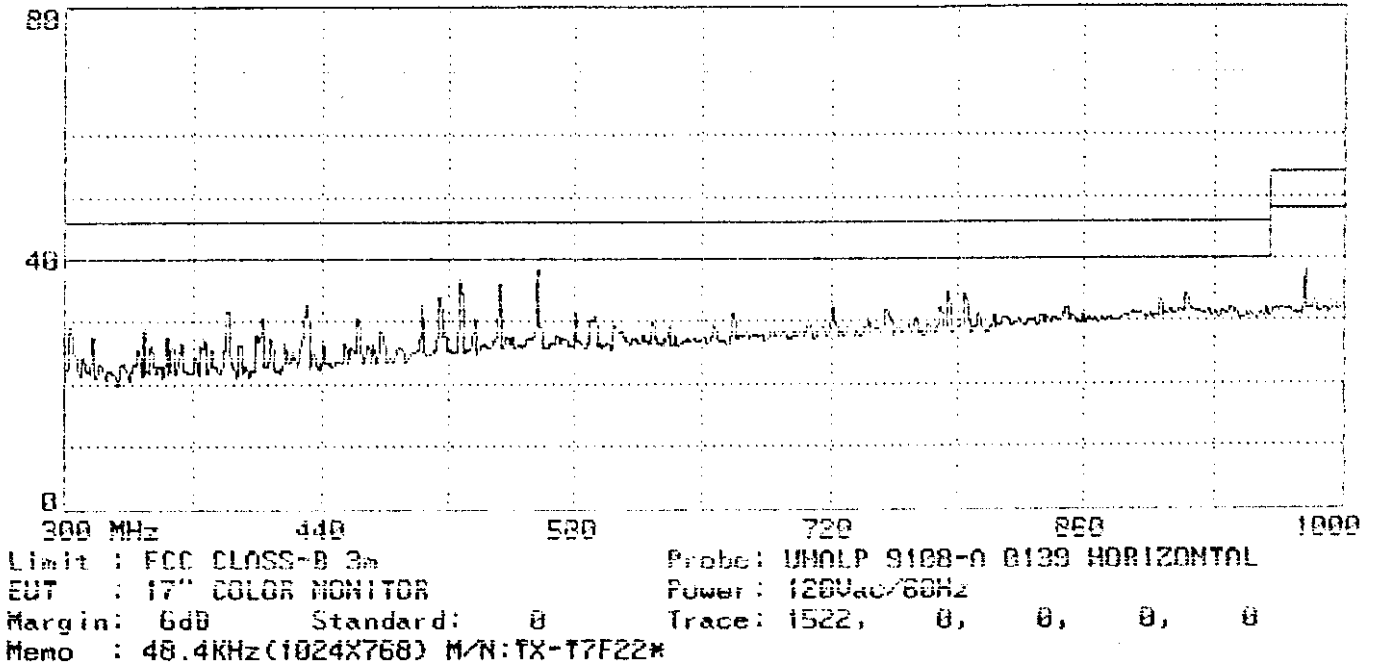


Page#: 1523 SP File#: MATSUSHI EI Date: 02-10-1999 Time: 18:31:52
dB μ /m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

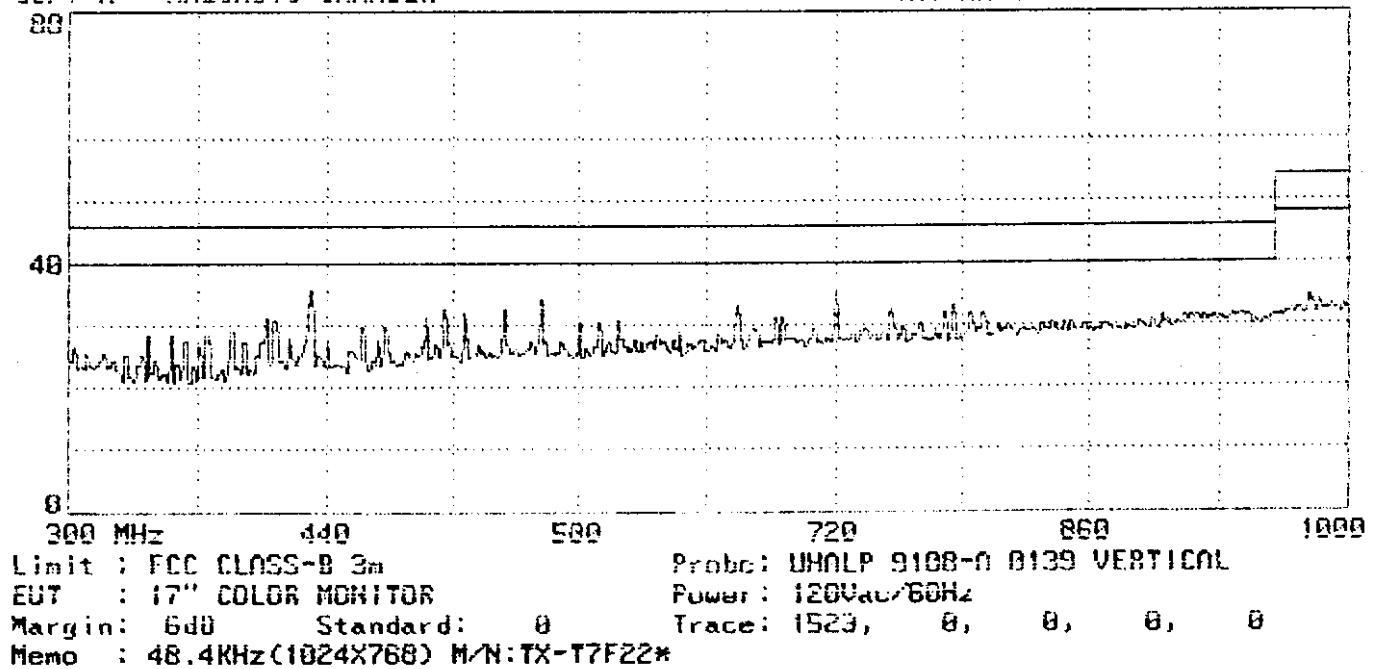

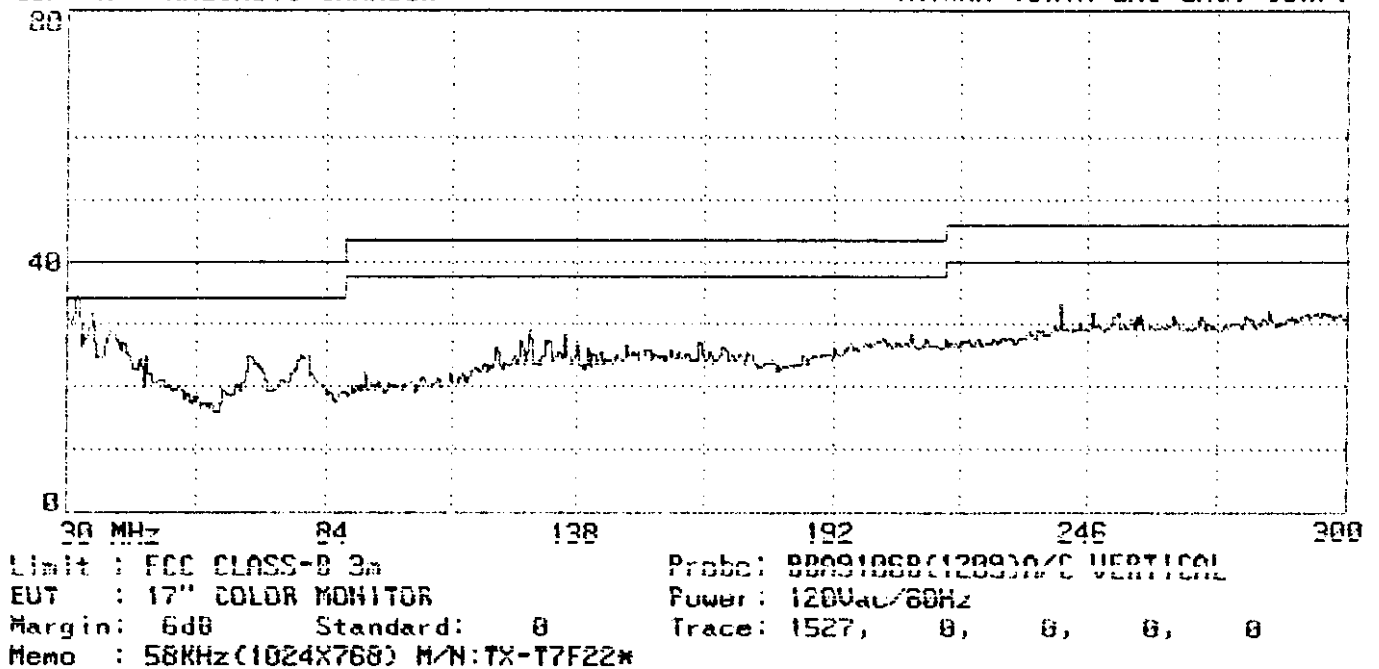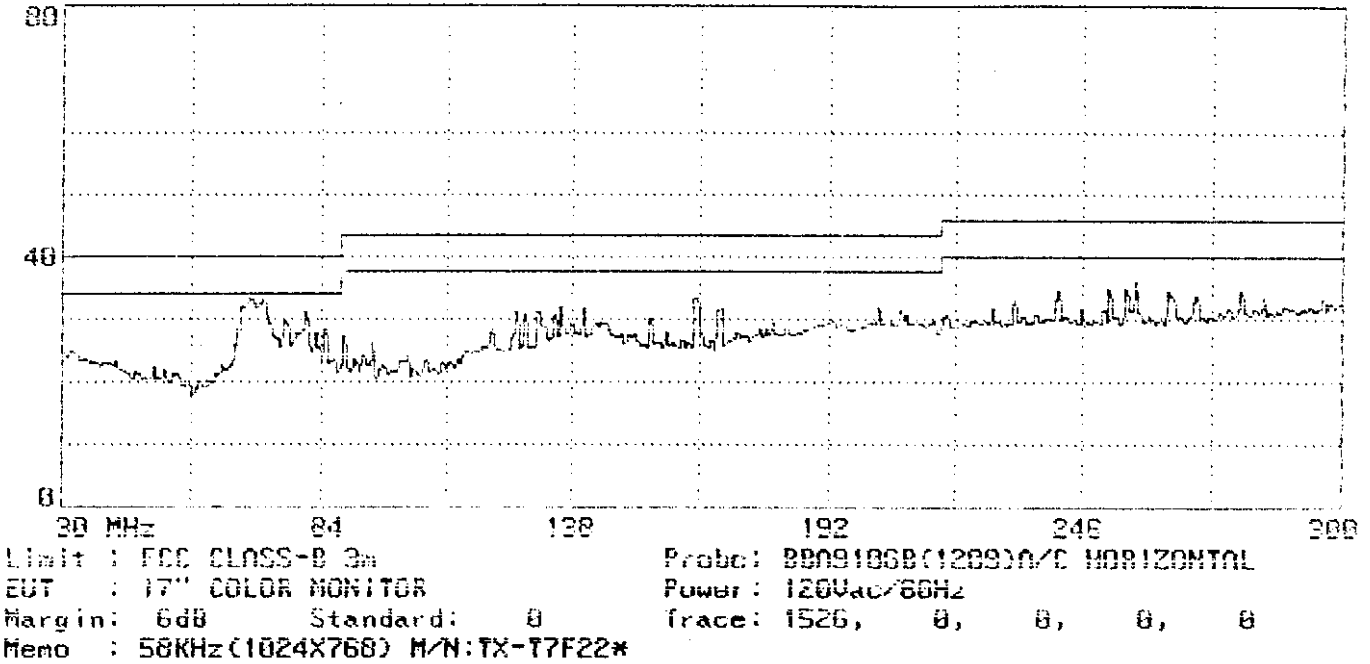


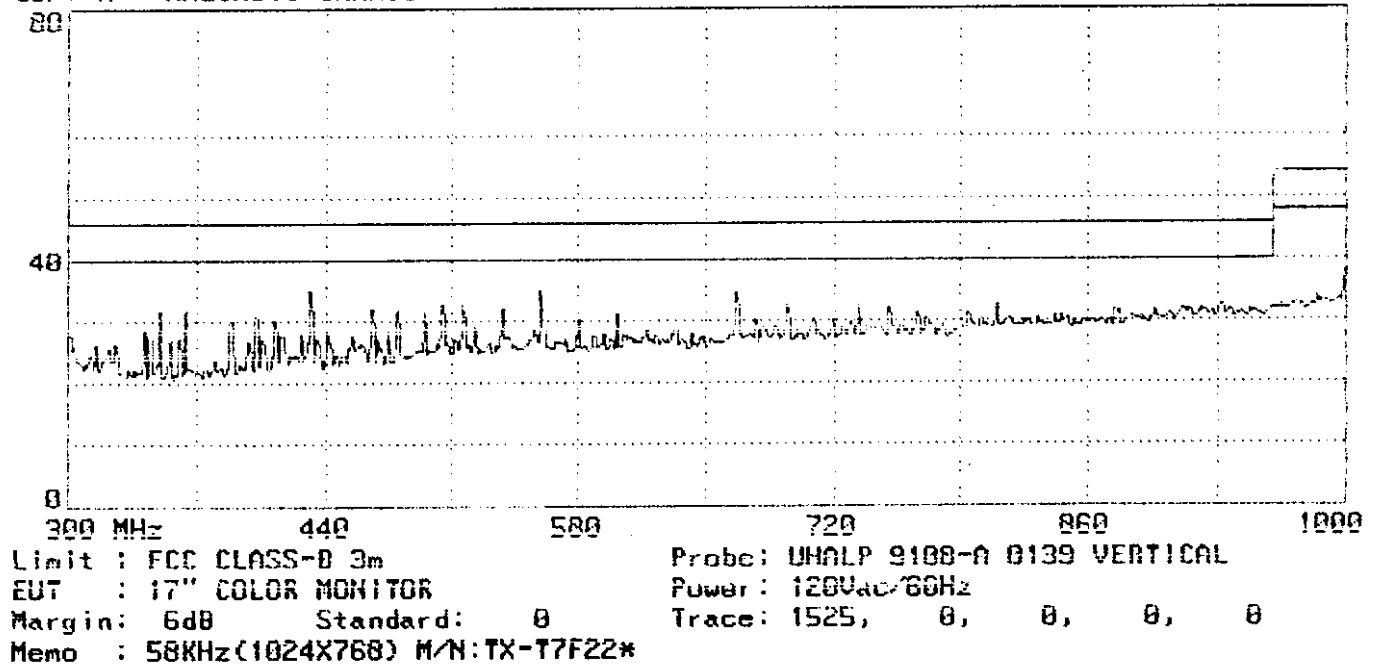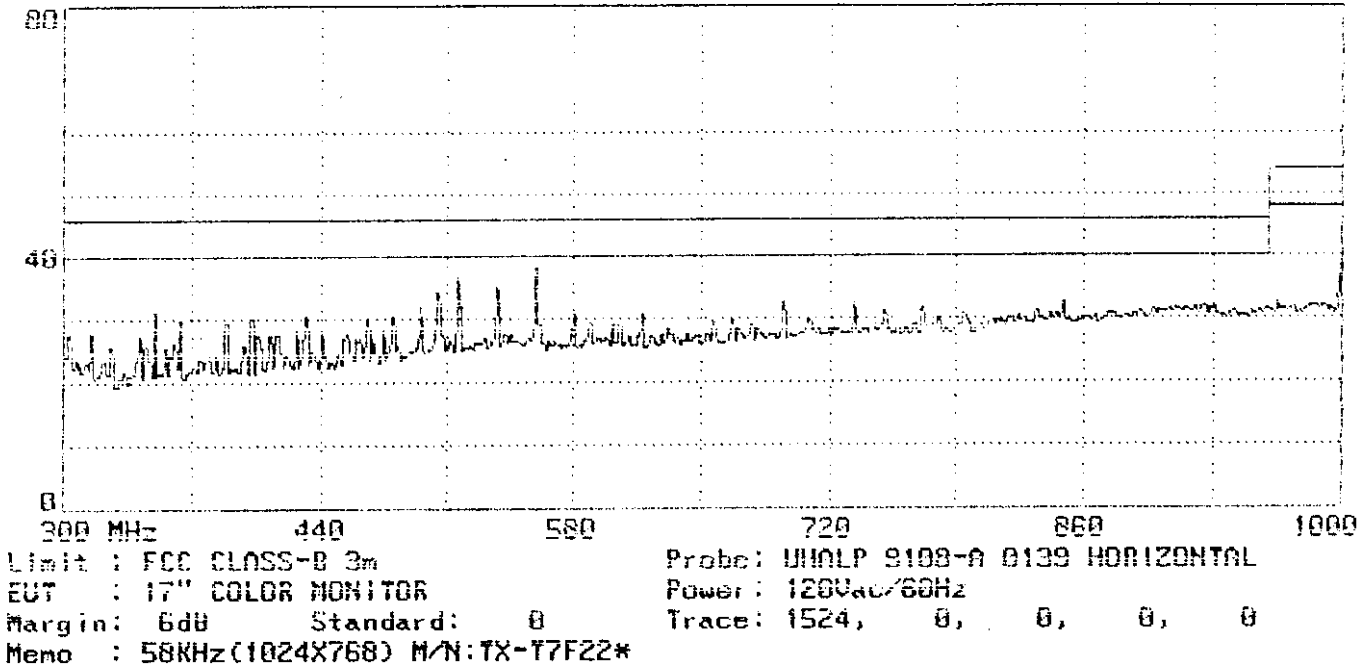

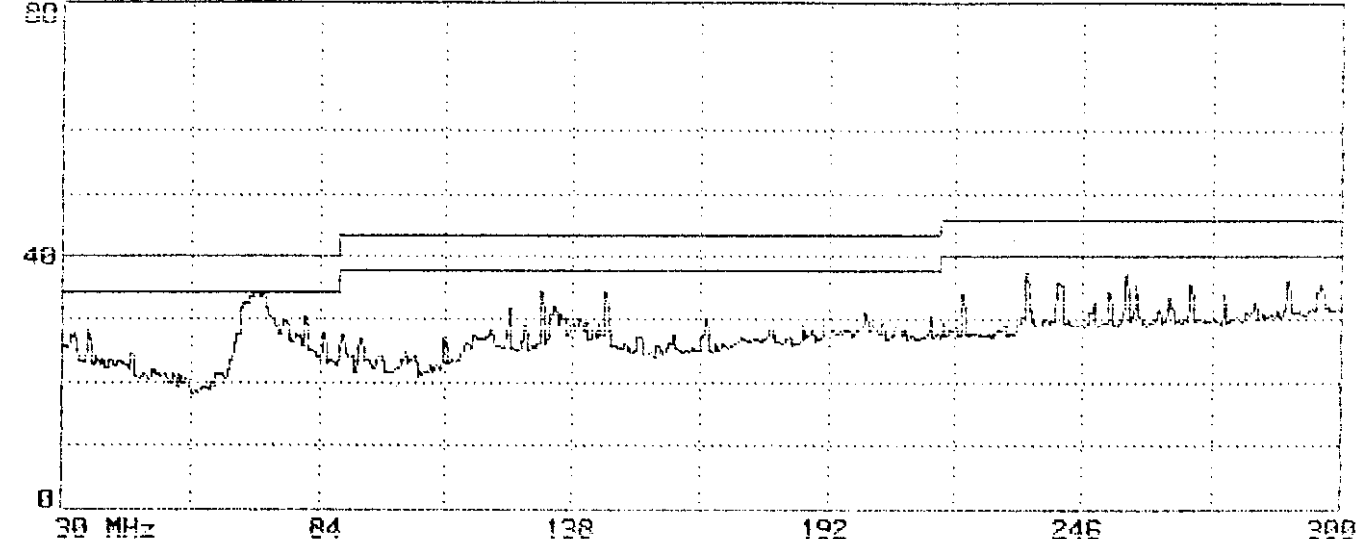


Limit : FCC CLASS-B 3m
 EUT : 17" COLOR MONITOR
 Margin: 6dB Standard: 0
 Memo : 61.6KHz(1280X960) M/N:TX-T7F22*

Probe: 80A9106B(1209)A/C HORIZONTAL
 Power: 120Vac/60Hz
 Trace: 1534, 0, 0, 0, 0

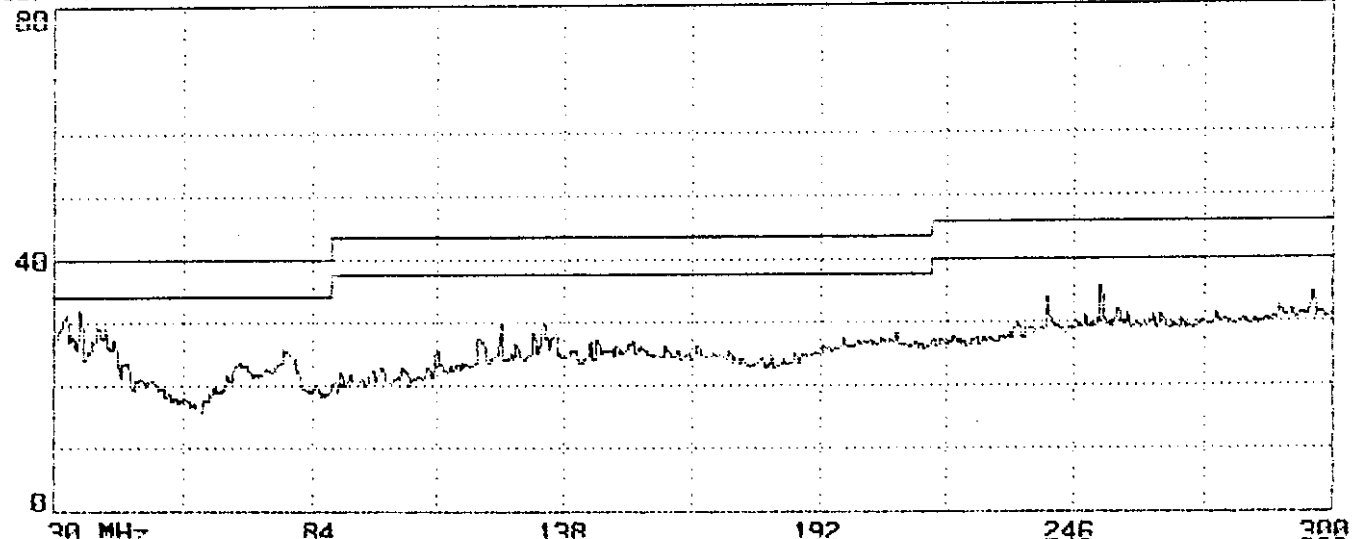


Limit : FCC CLASS-B 3m
 EUT : 17" COLOR MONITOR
 Margin: 6dB Standard: 0
 Memo : 61.6KHz(1280X960) M/N:TX-T7F22*



Probe: 80A9106B(1209)A/C VERTICAL
 Power: 120Vac/60Hz
 Trace: 1535, 0, 0, 0, 0

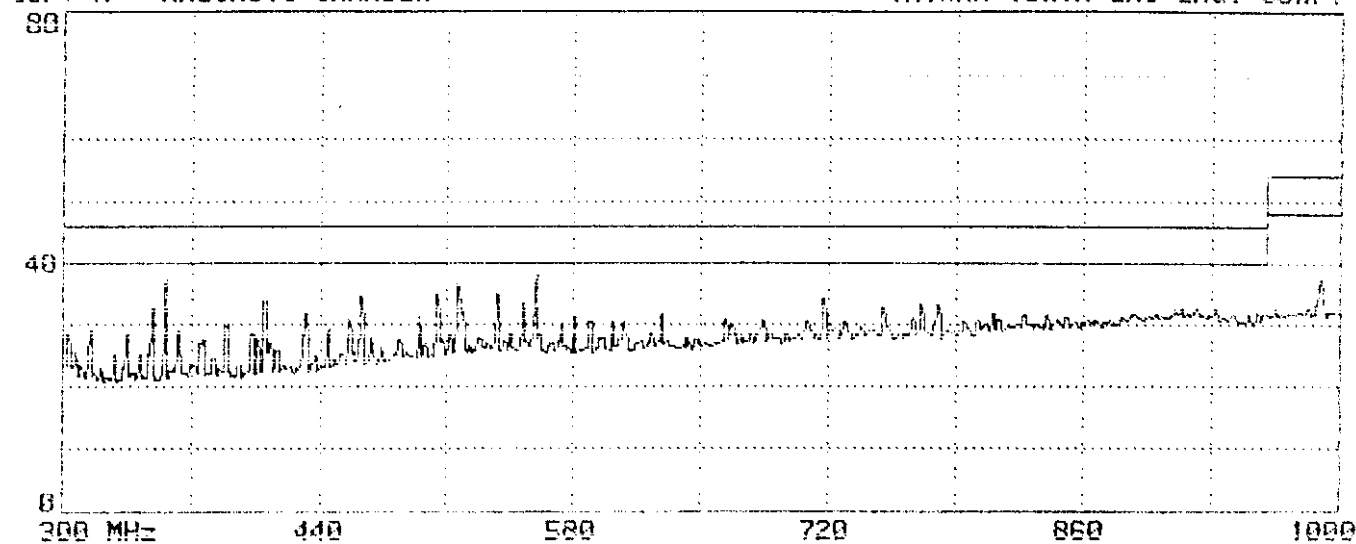


Limit : FCC CLASS-B 3m Probe: UHALP 9108-A 0139 HORIZONTAL
EUT : 17" COLOR MONITOR Power : 120Vac/60Hz
Margin: 6dB Standard: 0 Trace: 1532, 0, 0, 0, 0
Memo : 61.6KHz(1280X960) M/N:TX-T7F22*

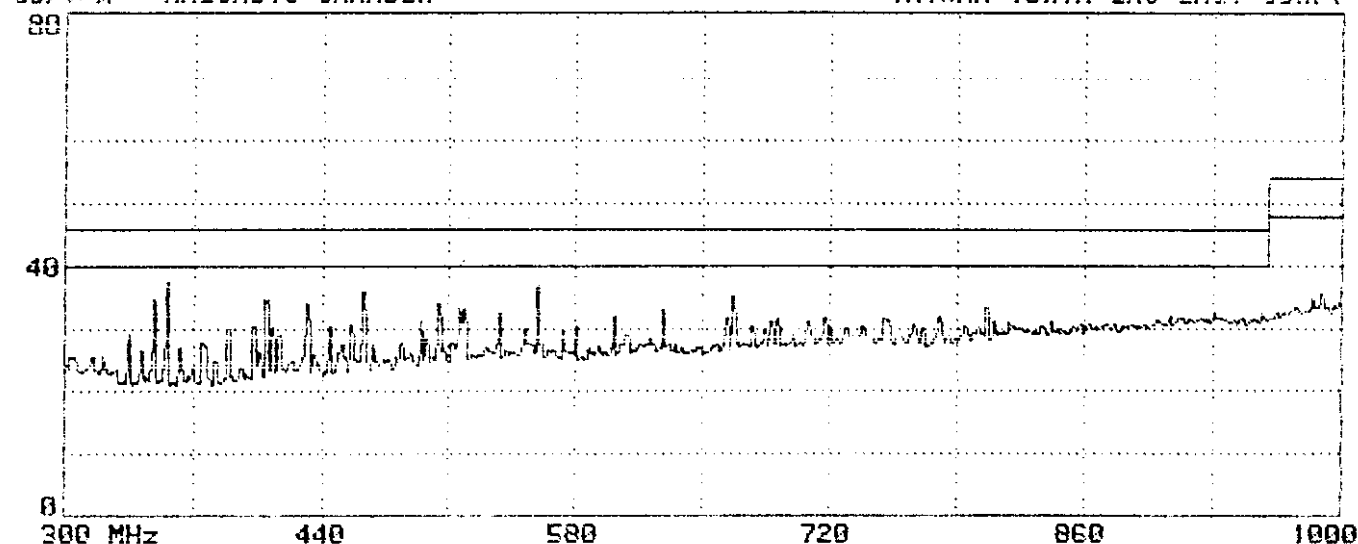


Limit : FCC CLASS-B 3m Probe: UHALP 9108-A 0139 VERTICAL
EUT : 17" COLOR MONITOR Power : 120Vac/60Hz
Margin: 6dB Standard: 0 Trace: 1533, 0, 0, 0, 0
Memo : 61.6KHz(1280X960) M/N:TX-T7F22*

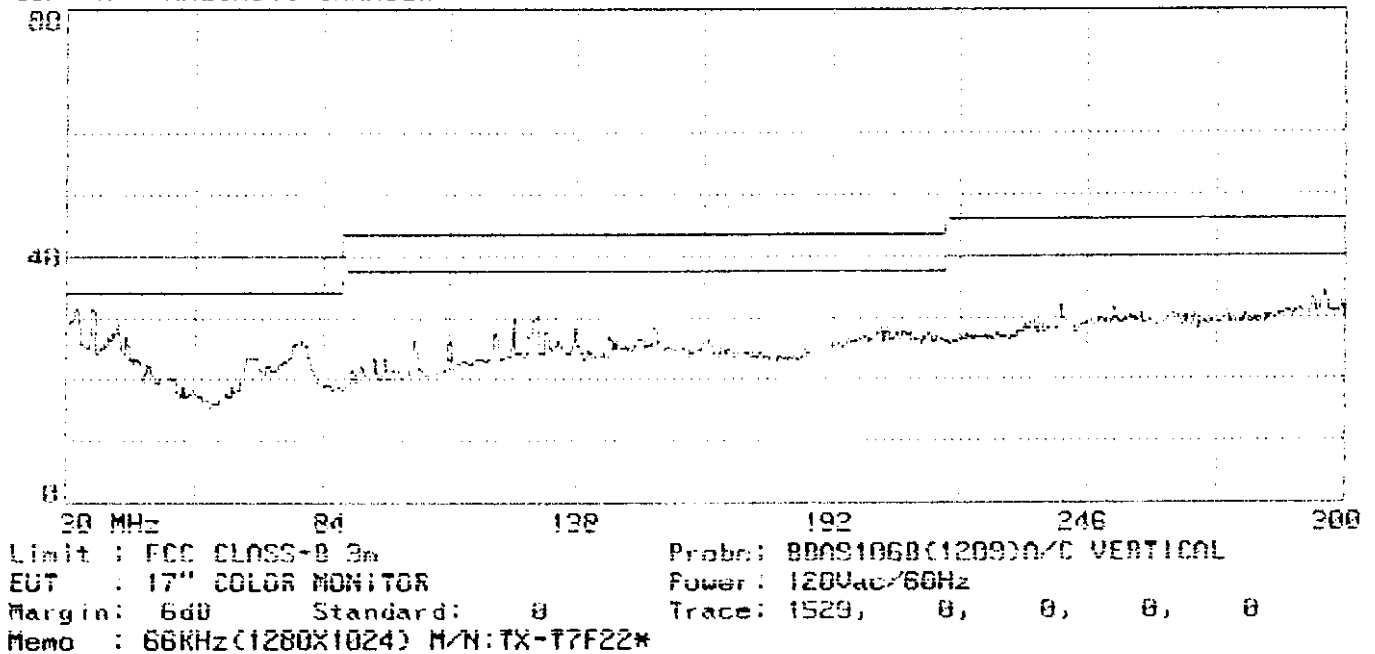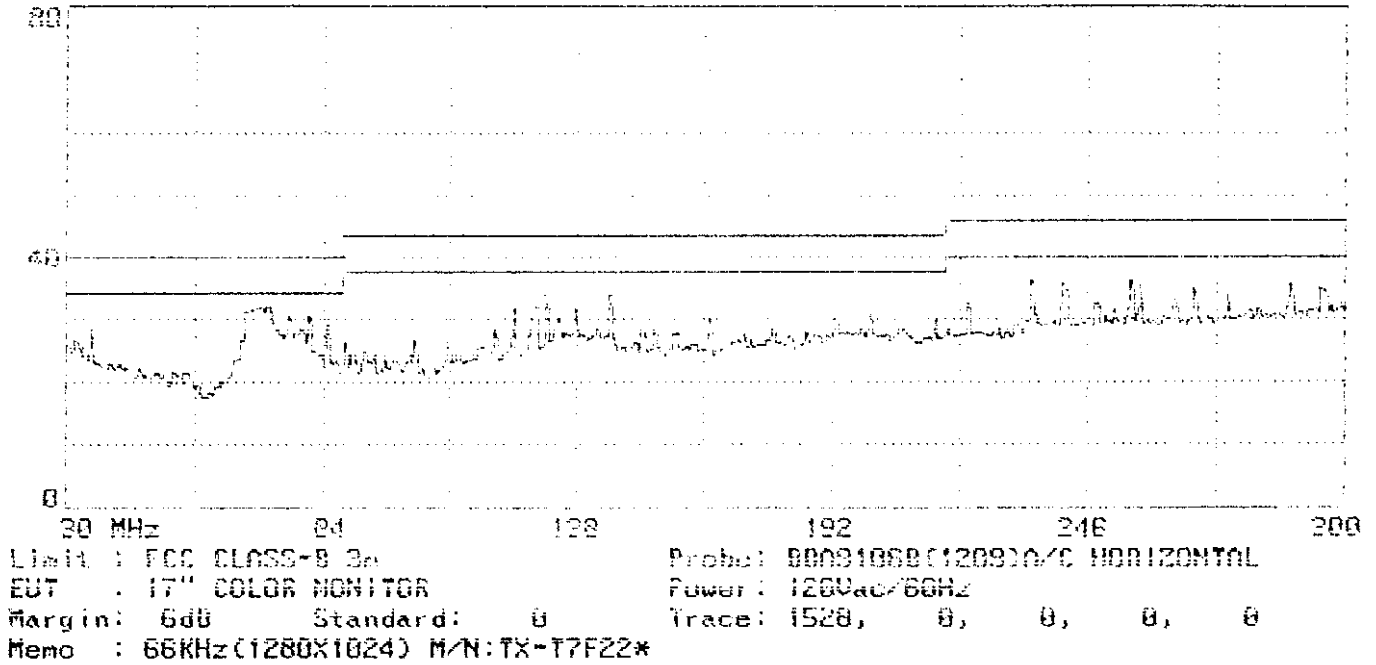

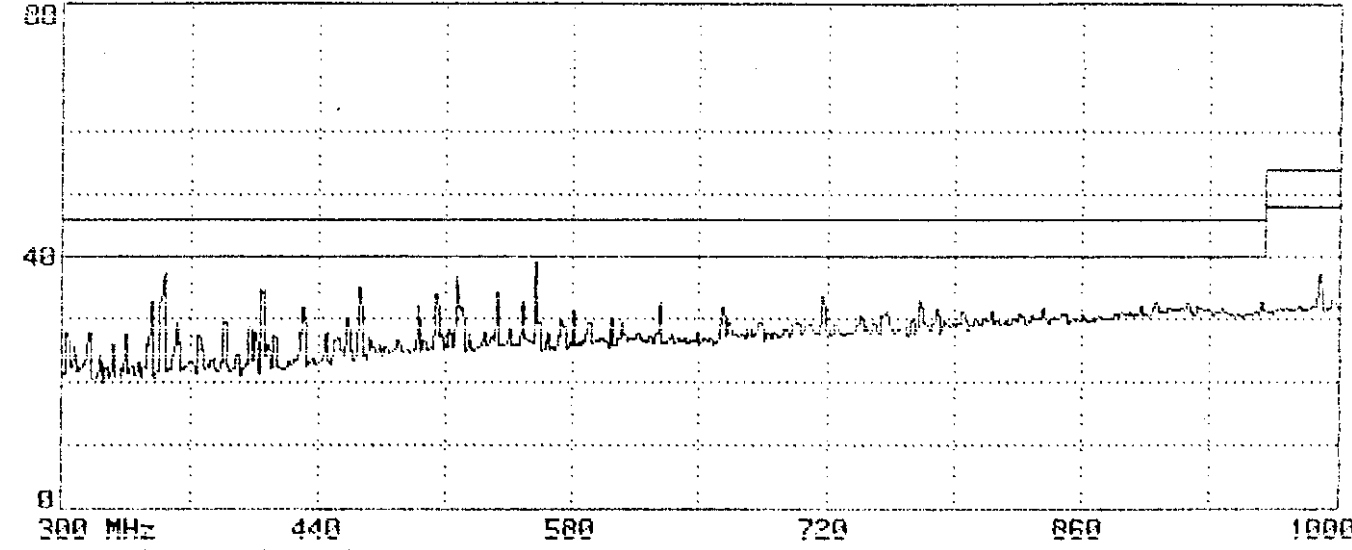

Limit : FCC CLASS-B 3m Probe: UHALP 9108-A 0139 HORIZONTAL
EUT : 17" COLOR MONITOR Power : 120Vac/60Hz
Margin: 6dB Standard: 0 Trace: 1530, 0, 0, 0, 0
Memo : 66KHz(1280X1024) M/N:TX-T7F22*

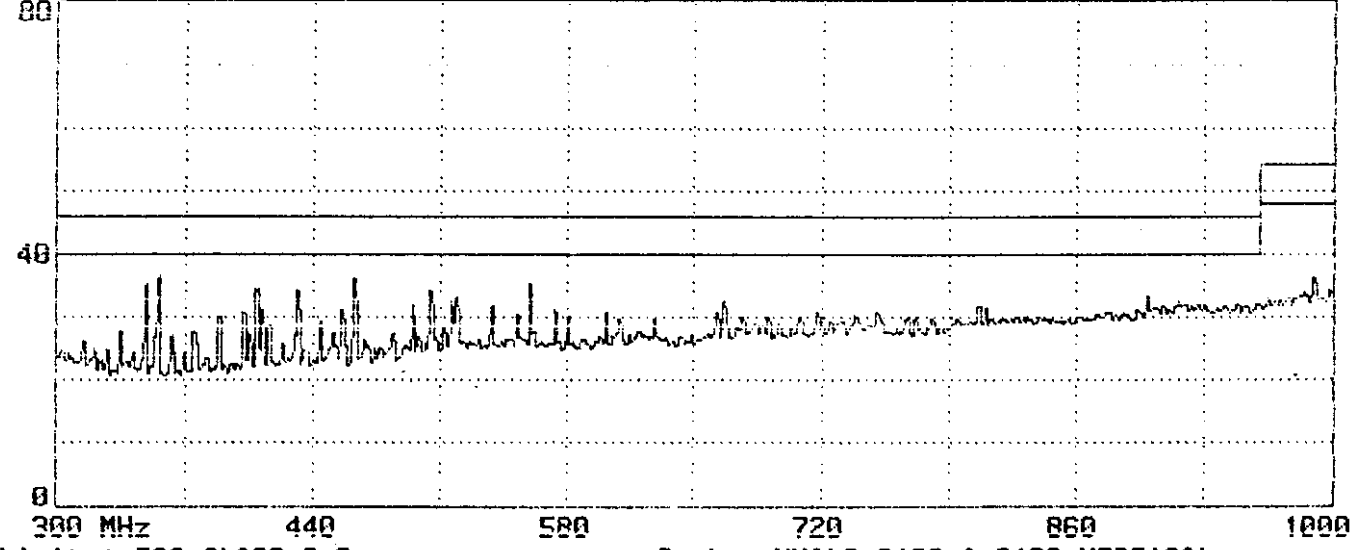

Limit : FCC CLASS-B 3m Probe: UHALP 9108-A 0139 VERTICAL
EUT : 17" COLOR MONITOR Power : 120Vac/60Hz
Margin: 6dB Standard: 0 Trace: 1531, 0, 0, 0, 0
Memo : 66KHz(1280X1024) M/N:TX-T7F22*