

TEST RESULTS (Cont.):	
------------------------------	--

Measurement			
Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.17000	5.19000	5.23000
Stop Frequency	5.19000	5.21000	5.25000
Span	20.000 MHz	20.000 MHz	20.000 MHz
RBW	1.000 MHz	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz	3.000 MHz
SweepPoints	101	101	101
Sweeptime	2.020 s	2.020 s	2.020 s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	RMS	RMS	RMS
SweepCount	3	3	3
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
SweepType	Sweep	Sweep	Sweep
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.30 dB	0.30 dB	0.30 dB
Run	4 / max. 150	5 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.03 dB	0.04 dB	0.03 dB


TEST RESULTS (Cont.):	n Mode
------------------------------	---------------

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Power spectral density (dBm)	-13.791	-12.895
Measurement uncertainty (dB)	<±0.78	

TEST RESULTS (Cont.):

Lowest Channel

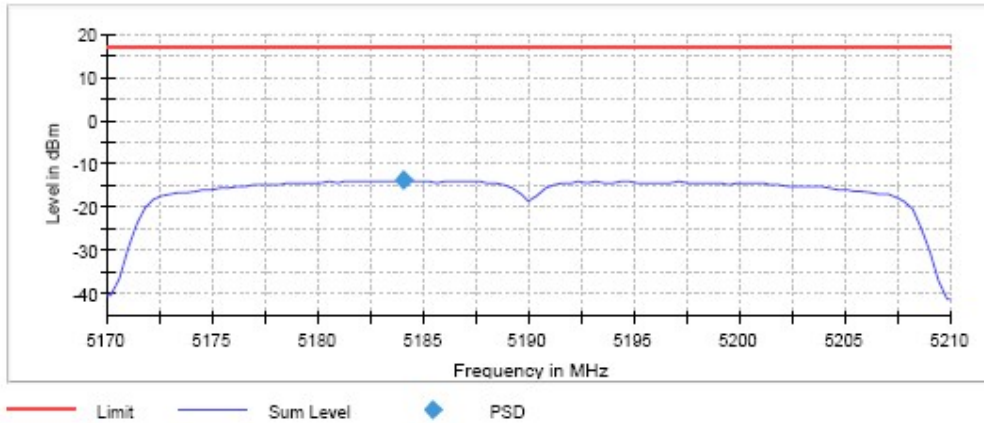

Highest Channel

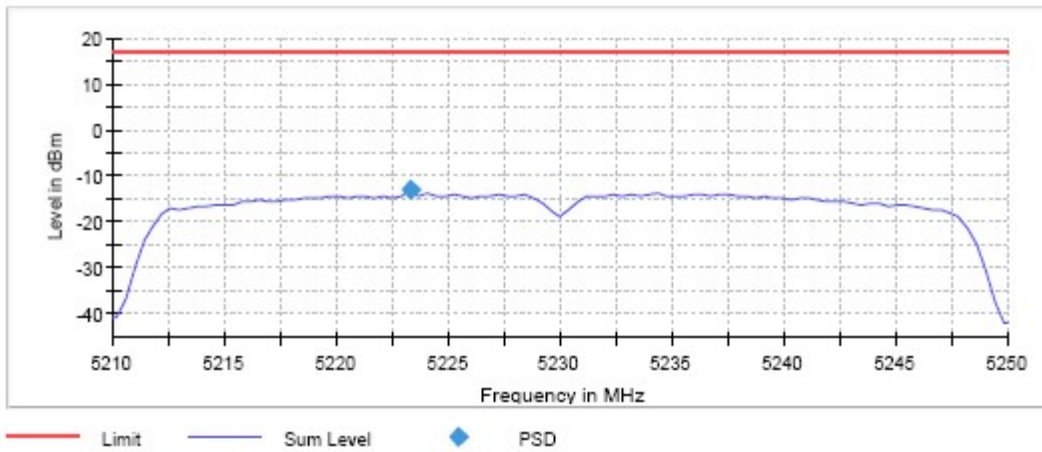

TEST RESULTS (Cont.):

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	5.17000	5.21000
Stop Frequency	5.21000	5.25000
Span	40.000 MHz	40.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	101	101
SweepTime	2.020 s	2.020 s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	15 / max.	15 / max.
Stable	3 / 3	3 / 3
Max Stable Difference	0.54 dB	0.47 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

	Lowest frequency	Middle frequency	Highest frequency
	5180 MHz	5200 MHz	5240 MHz
Power spectral density (dBm)	-12.805	-10.411	-9.720
Measurement uncertainty (dB)	<±0.78		

Lowest Channel

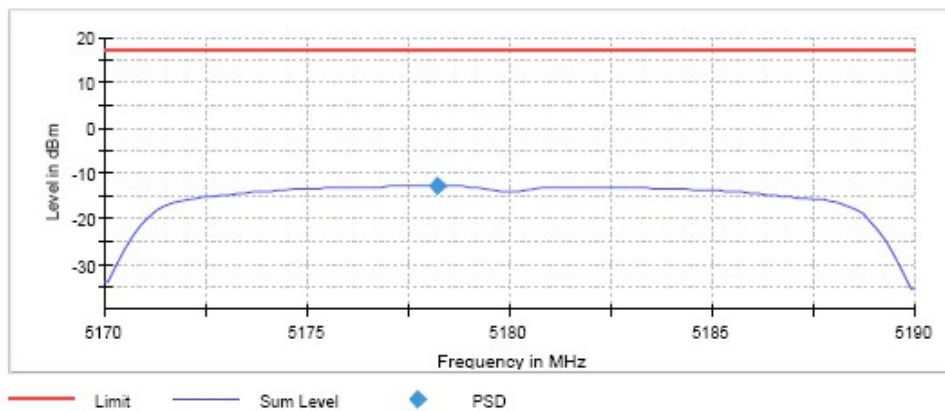


Middle Channel

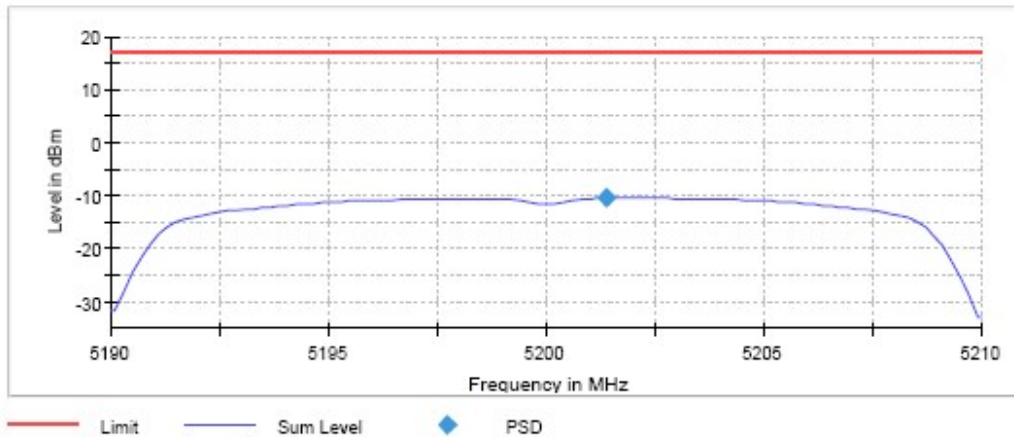

TEST RESULTS (Cont.)

Highest Channel

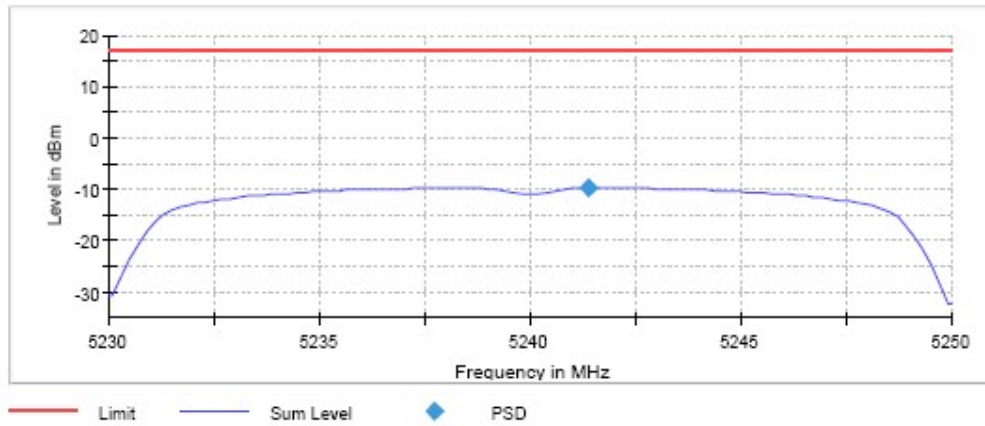

Measurement


Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.17000 GHz	5.19000 GHz	5.23000 GHz
Stop Frequency	5.19000 GHz	5.21000 GHz	5.25000 GHz
Span	20.000 MHz	20.000 MHz	20.000 MHz
RBW	1.000 MHz	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz	3.000 MHz
SweepPoints	101	101	101
Sweeptime	2.020 s	2.020 s	2.020 s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	RMS	RMS	RMS
SweepCount	3	3	3
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweeptype	Sweep	Sweep	Sweep
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.30 dB	0.30 dB	0.30 dB
Run	4 / max. 150	4 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.02 dB	0.03 dB	0.05 dB

TEST RESULTS	ac Mode (40 MHz)
---------------------	-------------------------


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
Power spectral density (dBm)	-13.895	-12.419
Measurement uncertainty (dB)	± 0.78	

TEST RESULTS (Cont.):	
------------------------------	--

Lowest Channel

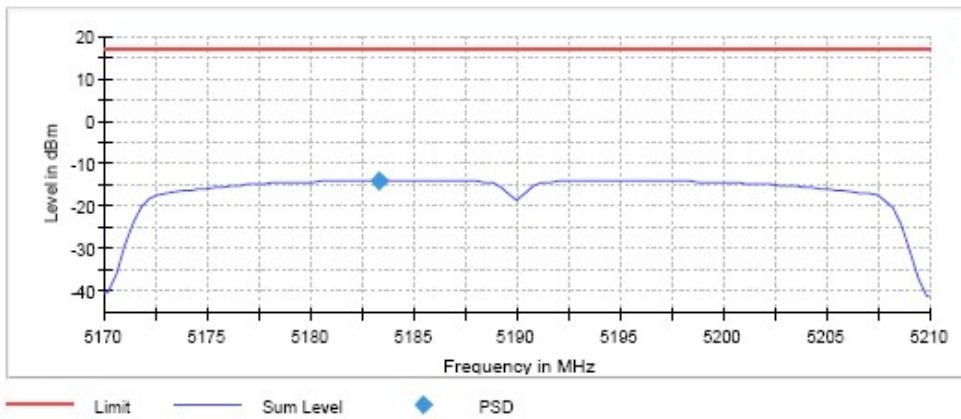

Highest Channel

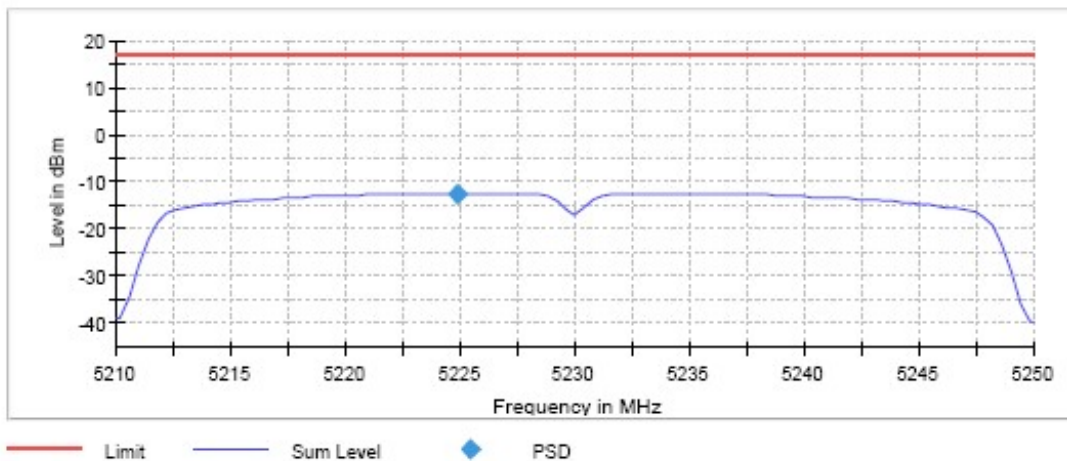

TEST RESULTS (Cont.):

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	5.17000	5.21000
Stop Frequency	5.21000	5.25000
Span	40.000 MHz	40.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	101	101
SweepTime	2.020 s	2.020 s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.03 dB	0.04 dB

TEST RESULTS	ac Mode (80 MHz)
---------------------	-------------------------

	Lowest frequency 5210 MHz
Power spectral density (dBm)	-22.088
Measurement uncertainty (dB)	<±0.78

TEST RESULTS (Cont.):	
------------------------------	--

Lowest Channel

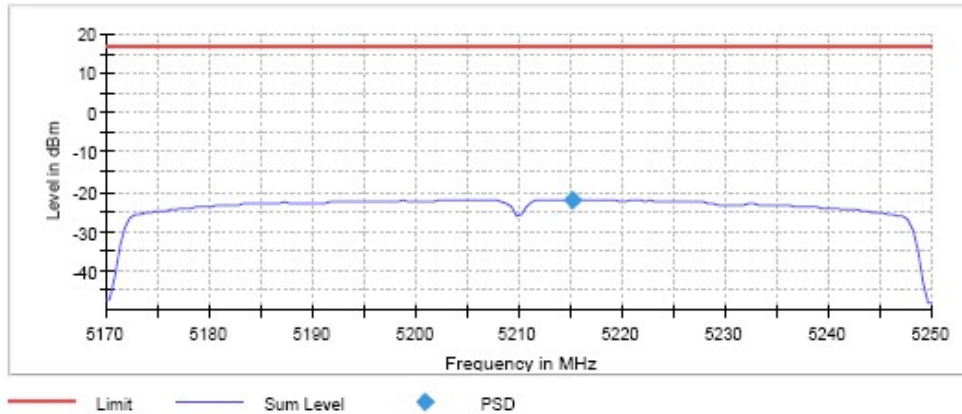

Measurement

Setting	Instrument Value
Start Frequency	5.17000
Stop Frequency	5.25000
Span	80.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
SweepPoints	160
Sweeptime	3.200 s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	RMS
SweepCount	3
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.03 dB


TEST B.4: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.407 and RSS-247
	Test standard:	Part 15 Subpart C §15.407(b)(1) and RSS-247 6.2.1.2

LIMITS


For transmitters operating in the 5.15 – 5.25 GHz band: all emissions outside the frequency band shall not exceed an EIRP of -27 dBm /MHz

TEST SETUP

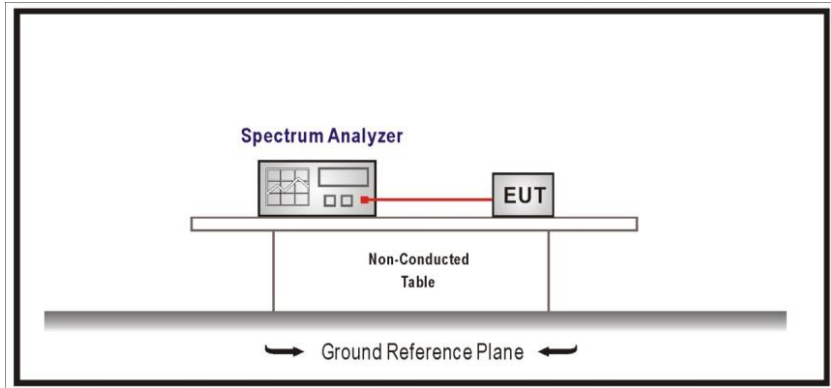

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode)
TEST RESULTS:	PASS

Lowest Channel

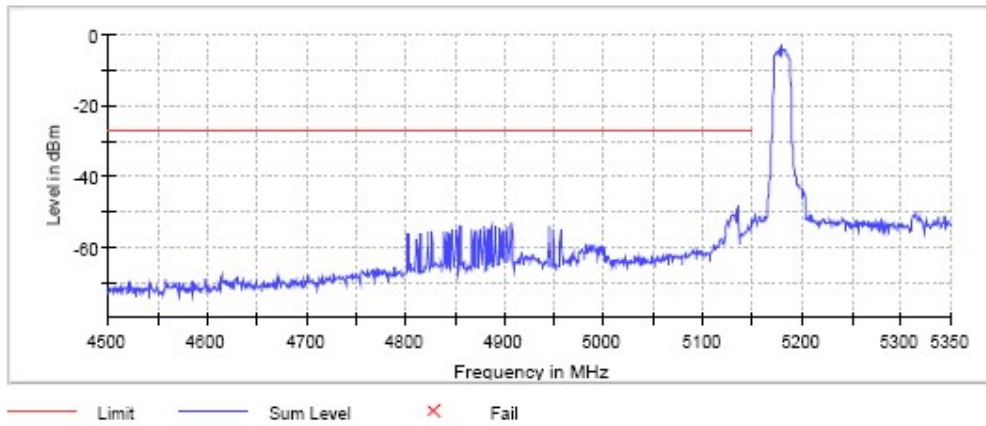


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	4.50000 GHz
Stop Frequency	5.35000 GHz	5.15000 GHz
Span	200.000 MHz	650.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	400	1300
Sweeptime	28.594 μ s	87.688 μ s
Reference Level	0.000 dBm	-20.000 dBm
Attenuation	20.000 dB	0.000 dB
Detector	Maxpeak	Maxpeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 150	23 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Lowest Channel

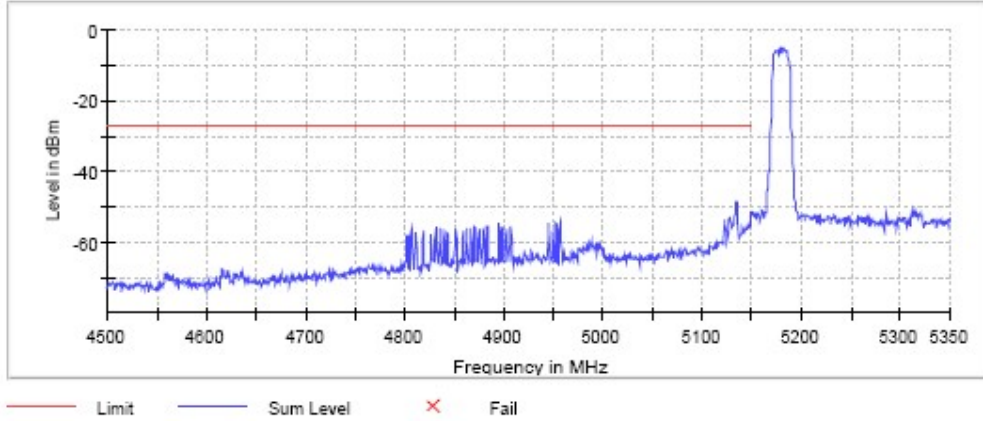


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	4.50000 GHz
Stop Frequency	5.35000 GHz	5.15000 GHz
Span	200.000 MHz	650.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	400	1300
Sweeptime	28.594 us	87.688 us
Reference Level	0.000 dBm	-20.000 dBm
Attenuation	20.000 dB	0.000 dB
Detector	Maxpeak	Maxpeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	23 / max. 150
Stable	3 / 3	3 / 3
Max Stable Difference	0.10 dB	0.00 dB

TEST RESULTS (Cont.): **n Mode (40 MHz)**

Lowest Channel

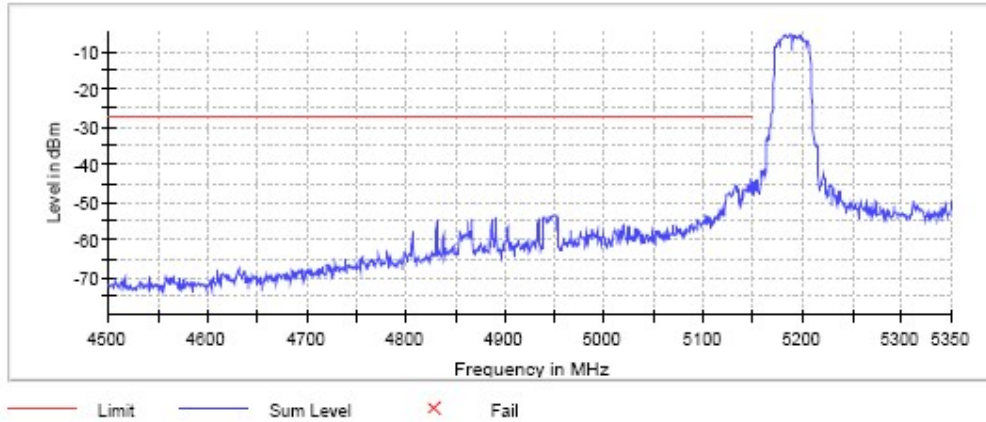


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	4.50000 GHz
Stop Frequency	5.35000 GHz	5.15000 GHz
Span	200.000 MHz	650.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	400	1300
Sweeptime	28.594 μ s	87.688 μ s
Reference Level	0.000 dBm	-20.000 dBm
Attenuation	20.000 dB	0.000 dB
Detector	Maxpeak	Maxpeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	26 / max. 150	13 / max. 150
Stable	3 / 3	3 / 3
Max Stable	0.00 dB	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Lowest Channel:

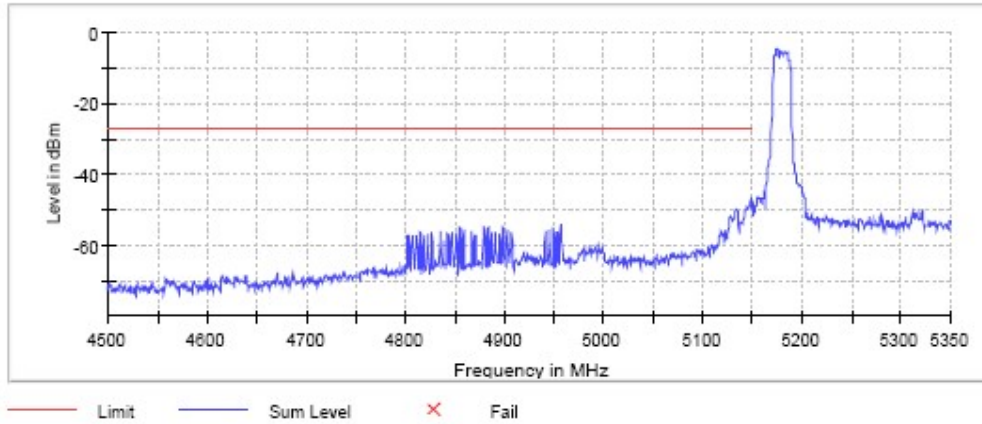


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	4.50000 GHz
Stop Frequency	5.35000 GHz	5.15000 GHz
Span	200.000 MHz	650.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	400	1300
Sweeptime	28.594 us	87.688 us
Reference Level	0.000 dBm	-20.000 dBm
Attenuation	20.000 dB	0.000 dB
Detector	Maxpeak	Maxpeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	23 / max. 150
Stable	3 / 3	3 / 3
Max Stable	0.39 dB	0.00 dB

TEST RESULTS (Cont.): **ac mode (40 MHz)**

Bandwidth: 40 MHz

Lowest Channel

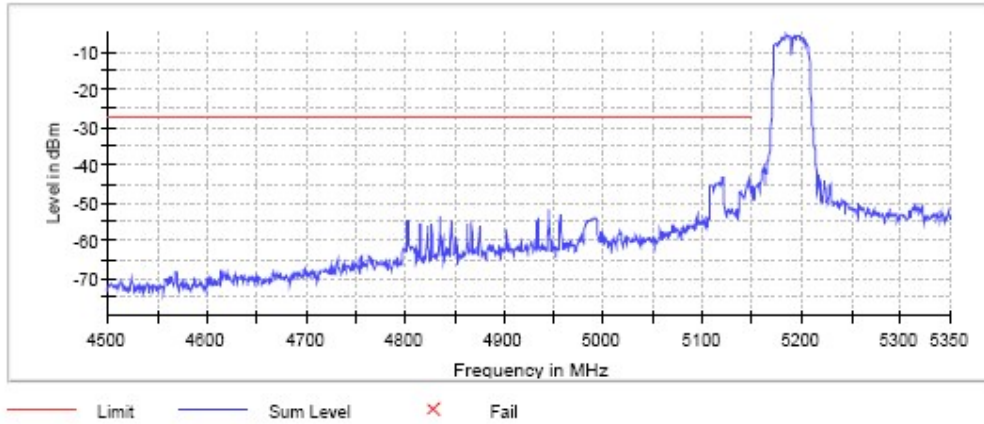


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	4.50000 GHz
Stop Frequency	5.35000 GHz	5.15000 GHz
Span	200.000 MHz	650.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	400	1300
Sweeptime	28.594 μ s	87.688 μ s
Reference Level	0.000 dBm	-20.000 dBm
Attenuation	20.000 dB	0.000 dB
Detector	Maxpeak	Maxpeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	FFT
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	9 / max. 150
Stable	3 / 3	3 / 3
Max Stable	0.09 dB	0.00 dB

TEST RESULTS (Cont.): **ac mode (80 MHz)**

Bandwidth: 80 MHz

Lowest Channel

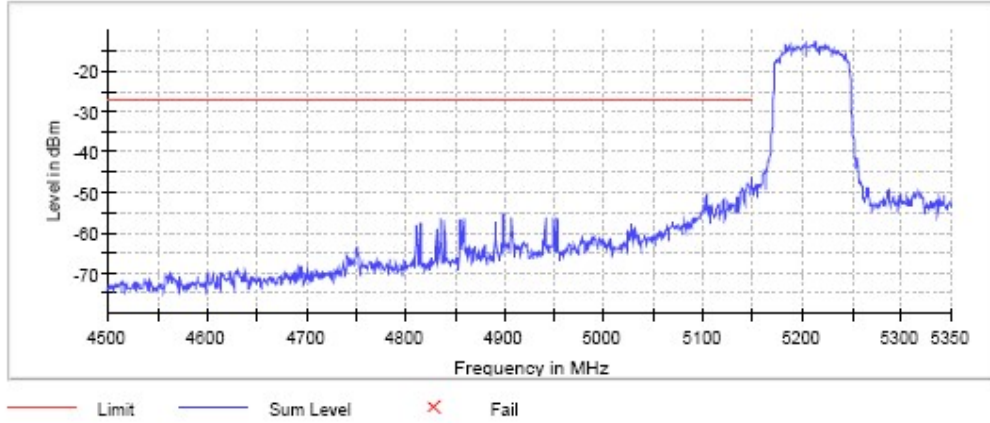

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	4.50000 GHz
Stop Frequency	5.35000 GHz	5.15000 GHz
Span	200.000 MHz	650.000 MHz
RBW	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz
SweepPoints	400	1300
SweepTime	28.594 μ s	87.688 μ s
Reference Level	0.000 dBm	-10.000 dBm
Attenuation	20.000 dB	10.000 dB
Detector	Maxpeak	Maxpeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	44 / max. 150	16 / max. 150
Stable	3 / 3	3 / 3
Max Stable	0.20 dB	0.00 dB

TEST B.5: UNDESIRABLE RADIATED EMISSIONS (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.407 and RSS-247
	Test standard:	Part 15 Subpart C §15.407(b) (1)(6)(7) and RSS-247 6.2.1.2

LIMITS

For transmitters operating in the 5.15 – 5.25 GHz band: all emissions outside of the 5.15 – 5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.23 dBµ V/m at 3m distance).

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function

TEST SETUP

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and at 1m for the frequency range 1-40 GHz (1 GHz-18 GHz and 18 GHz-40 GHz Double ridge horn antennas).

For radiated emissions in the range 1-40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

TEST SETUP (CONT.)

Radiated measurements Setup $f < 1$ GHz

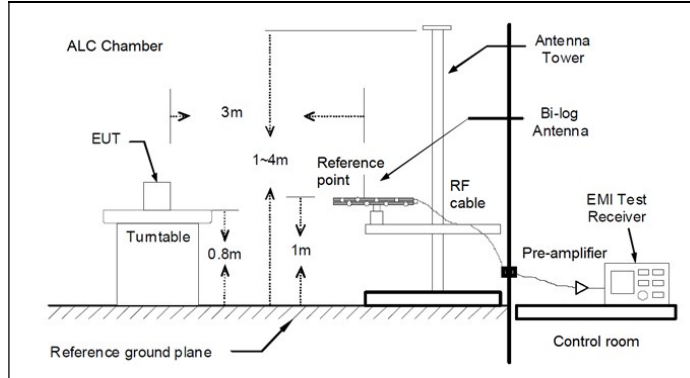

Radiated measurements setup $f > 1$ GHz

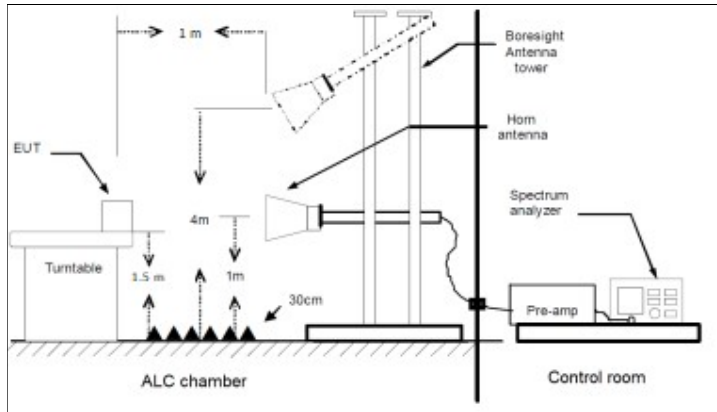

TESTED SAMPLES:	S/02
TESTED CONDITIONS MODES:	TC#02 (n mode)
TEST RESULTS:	PASS

For spurious emissions for OFDM modes 802.11a, 802.11n20/40 and 802.11ac20/40/80 a preliminary scan was performed to determine the worst case.

The tables and plots show the results for the worst case of modulation and data rate: MCS0 for 802.11n20


Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT. The results in the next tables and plots show the maximum measured levels in the 30 MHz – 1000 MHz range

Frequency range 1 GHz – 40 GHz

The results in the next tables and plots show the maximum measured levels in the 1-40 GHz range including the restricted bands 4.5-5.15 GHz and 5.35-5.46 GHz (see next plots).

FREQUENCY RANGE **30 MHz – 1000 MHz**

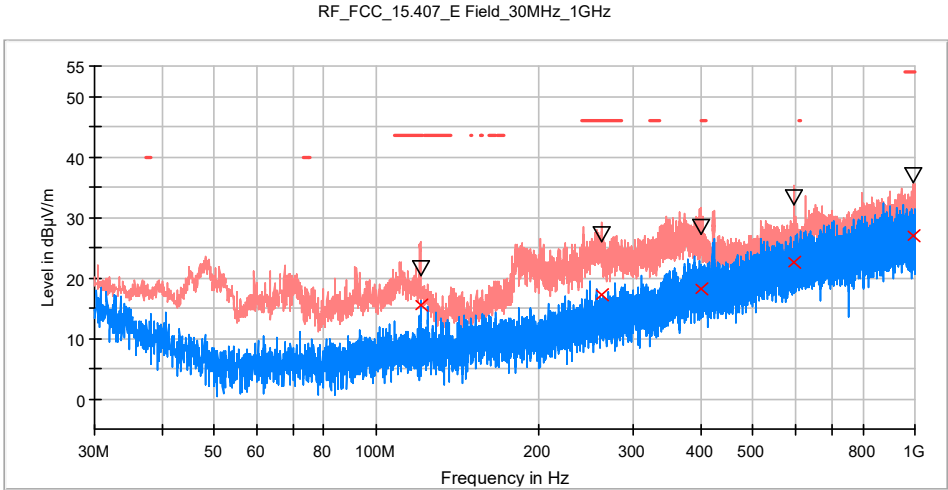


- PK+ MAXH
- PK+ CLRWR
- - - TX limits to Spurious Emission FCC15.407 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)
596.383000	33.2	22.5
262.703000	27.2	17.2
400.831000	28.3	18.1
120.695000	21.7	15.4
996.265500	37.0	26.9

TEST RESULTS (Cont.)	n mode (20 MHz)
FREQUENCY RANGE	1 GHz – 18 GHz

Low Channel

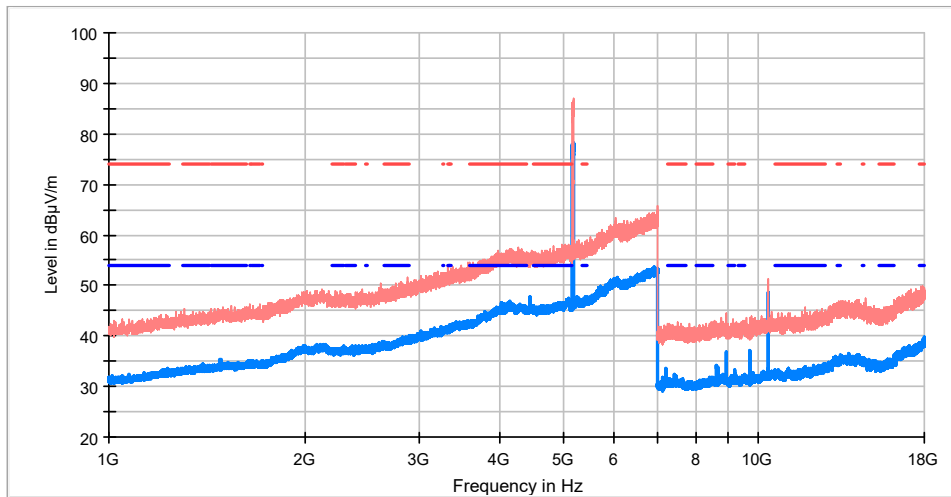


- AVG_MAXH
- PK+ MAXH
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+ MAXH (dBuV/m)	AVG_MAXH (dBuV/m)	Pol	Comments
5181.454546	85.95	78.11	V	Fundamental
8909.500000	44.54	36.81	V	
9698.000000	43.55	37.10	H	
10360.000000	51.23	48.58	V	

TEST RESULTS (Cont.)

Middle Channel

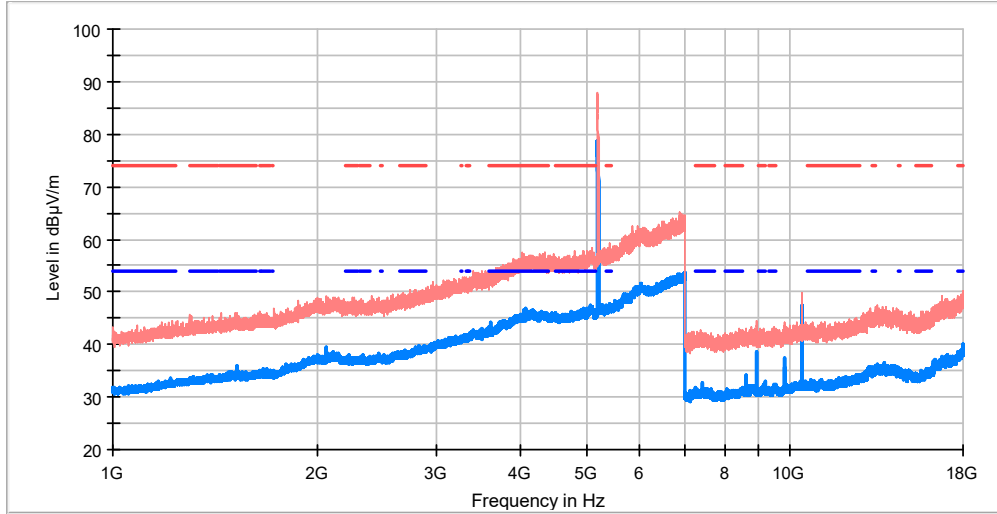


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comments
5201.090909	86.84	78.83	V	Fundamental
8910.000000	44.56	38.70	V	
9786.000000	44.12	37.36	V	
10400.000000	49.72	47.47	H	

TEST RESULTS (Cont.)

High Channel

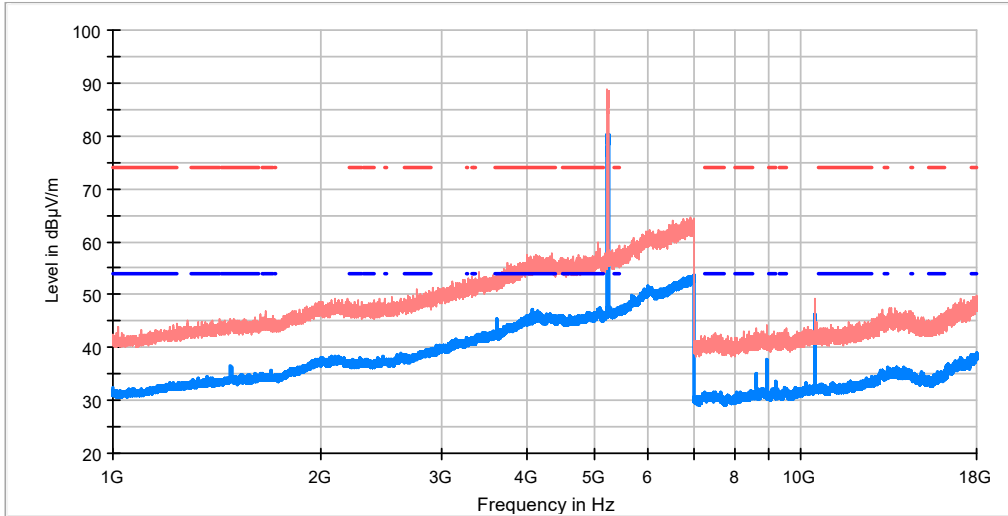

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comments
3608.909091	53.02	45.49	V	
5238.454546	87.20	80.32	V	Fundamental
8909.500000	44.35	37.83	H	
10480.000000	49.31	46.20	V	

TEST RESULTS (Cont.)	
-----------------------------	--


FREQUENCY RANGE	18 GHz – 40 GHz
------------------------	------------------------

Low Channel

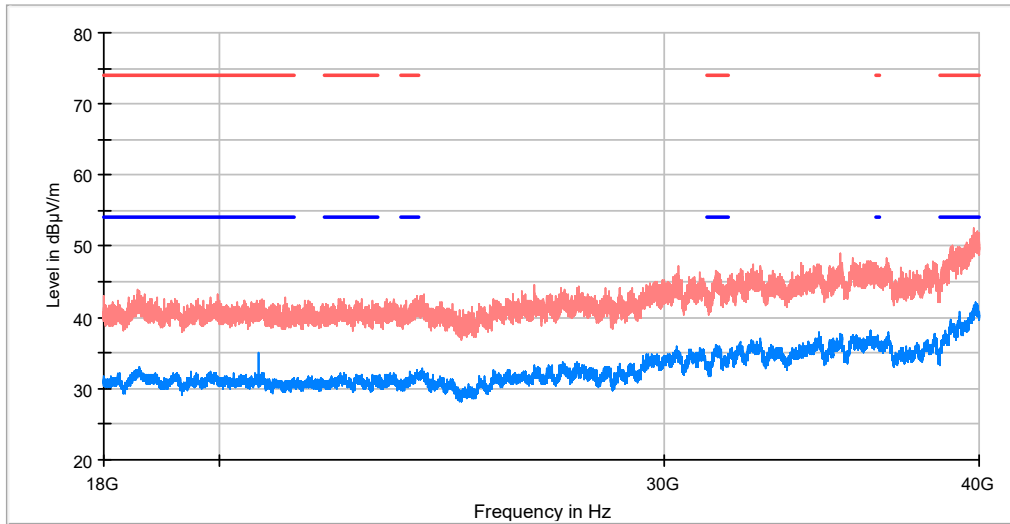

- AVG_MAXH
- PK+_MAXH
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Middle Channel

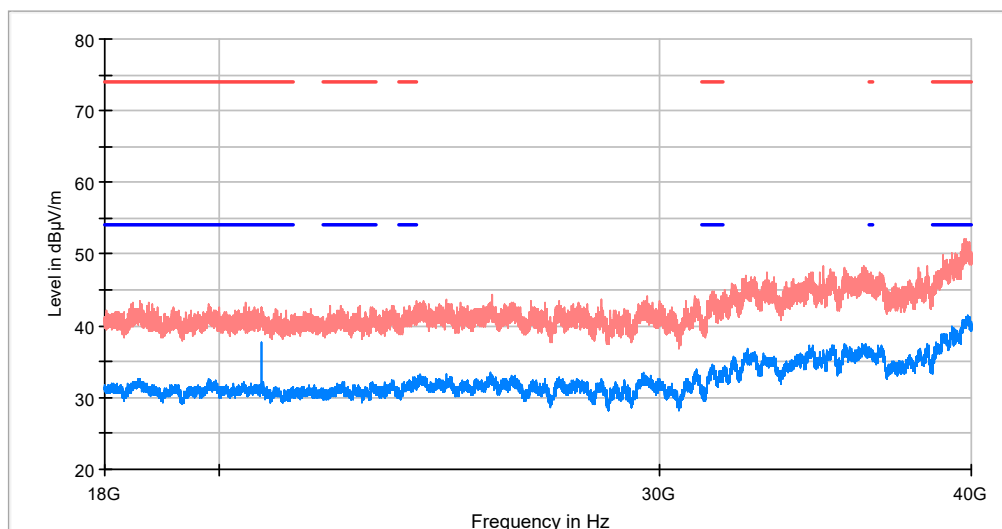

- AVG_MAXH
- PK+_MAXH
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


TEST RESULTS (Cont.)

High Channel

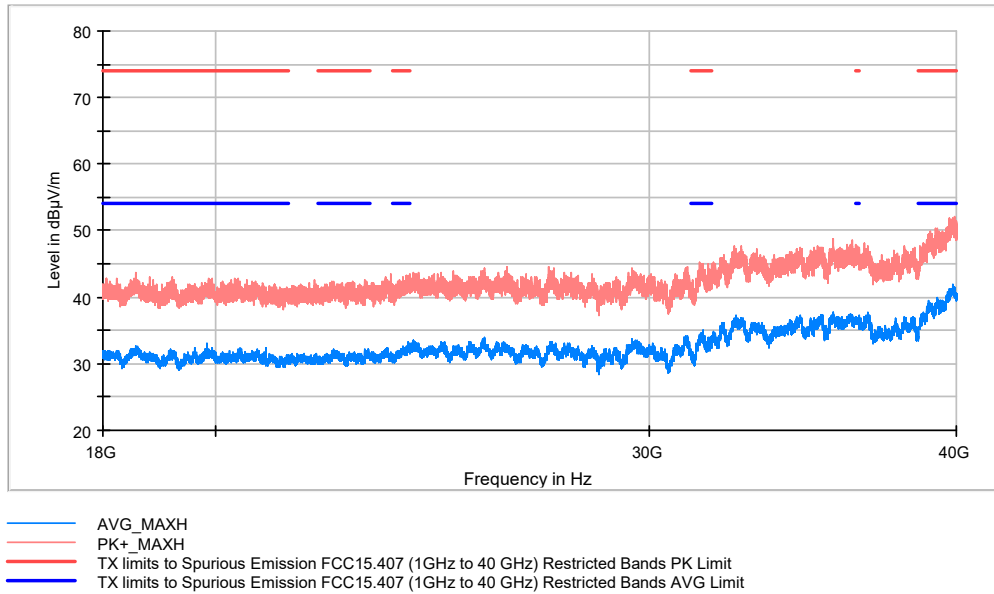


RESTRICTED BANDS **4.5 GHz – 5.15 GHz**

Low Channel

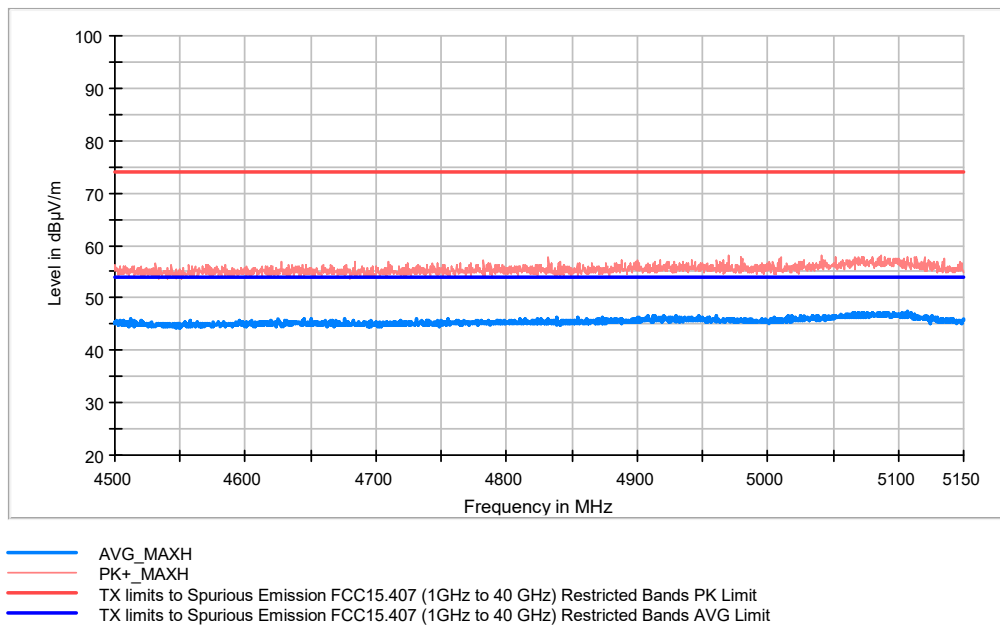


TEST RESULTS (Cont.)

Middle Channel

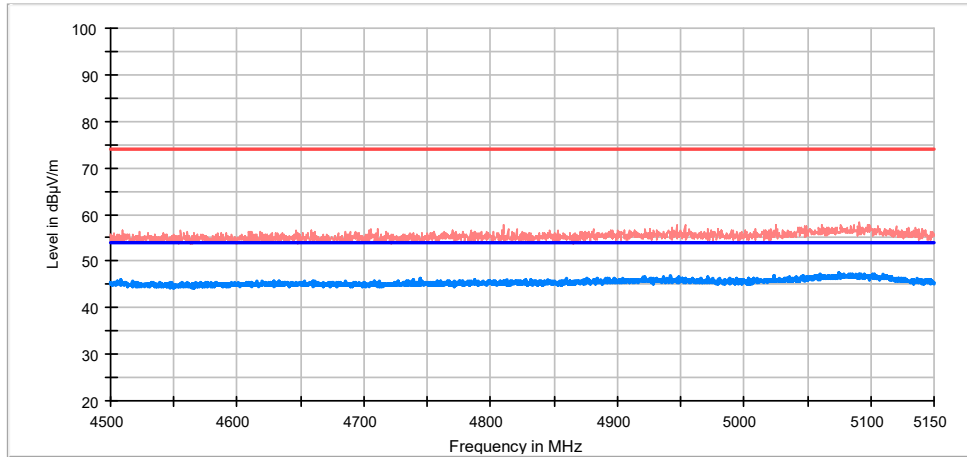

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


High Channel

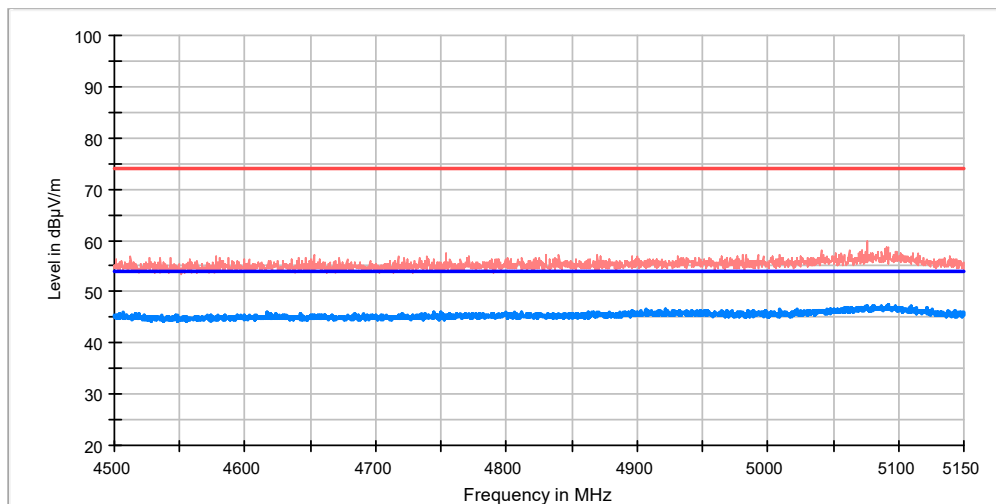

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


TEST RESULTS (Cont.)	
RESTRICTED BANDS	5.35 GHz – 5.46 GHz

Low Channel

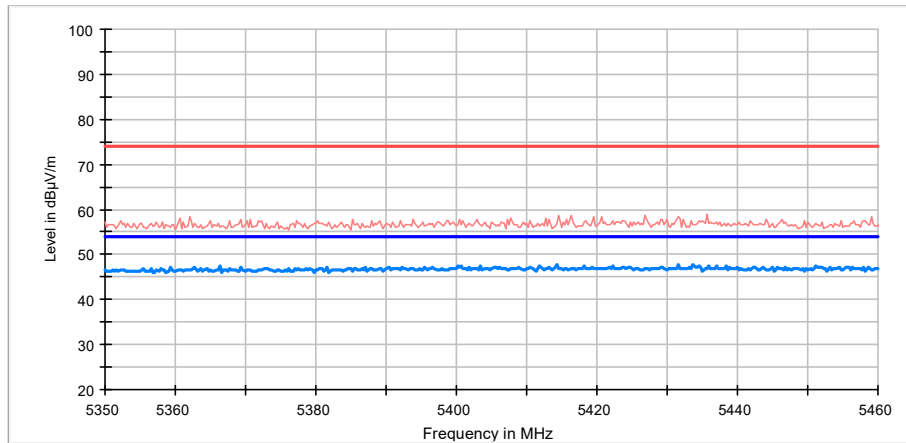

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Middle Channel

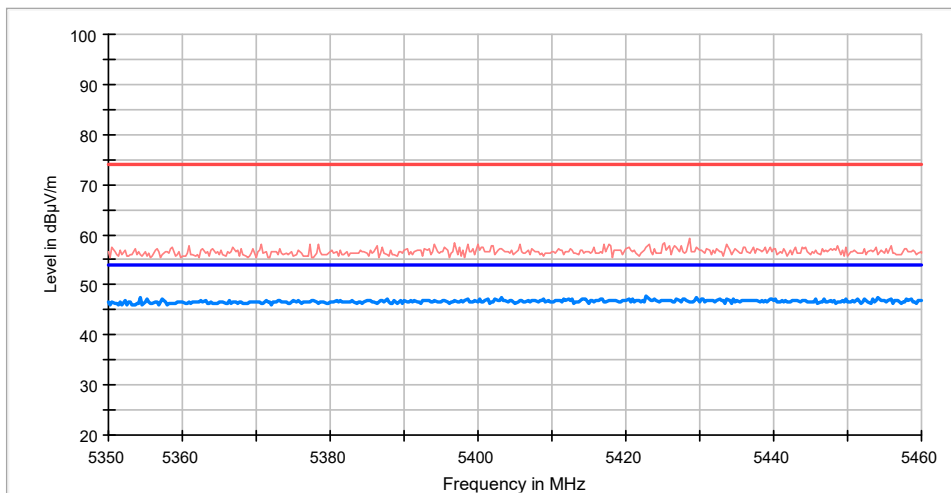

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.)

High Channel

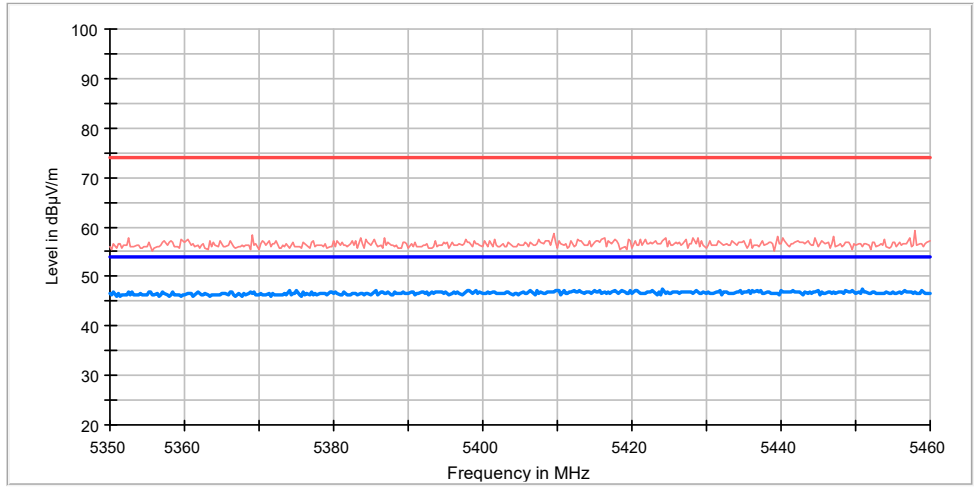

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Appendix C: Test results 5.25 GHz – 5.35 GHz Band

Appendix C Content

DESCRIPTION OF TEST CONDITIONS	76
TEST C.1: 26DB EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	77
TEST C.2: POWER LIMITS. MAXIMUM OUTPUT POWER	94
TEST C.3: POWER SPECTRAL DENSITY	103
TEST C.4: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER).....	116
TEST C.5: UNDESIRABLE RADIATED EMISSIONS (TRANSMITTER)	123

DESCRIPTION OF TEST CONDITIONS

TEST CONDITIONS ^{(1) (2)}	DESCRIPTION
<p>TC#01 (a mode)</p>	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 14.4 \text{ Vdc}$</p> <p><u>Test Frequencies for Conducted/Radiated tests: (20 MHz)</u> Lowest range: 5260 MHz Middle channel: 5280 MHz Highest range: 5320 MHz</p>
<p>TC#02 (n mode)</p>	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 14.4 \text{ Vdc}$</p> <p><u>Test Frequencies for Conducted/Radiated tests: (20 MHz)</u> Lowest range: 5260 MHz Middle channel: 5280 MHz Highest range: 5320 MHz</p> <p><u>Test Frequencies for Conducted/Radiated tests: (40 MHz)</u> Lowest channel: 5270 MHz Highest channel: 5310 MHz</p>
<p>TC#03 (ac mode)</p>	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 14.4 \text{ Vdc}$</p> <p><u>Test Frequencies for Conducted/Radiated tests: (20 MHz)</u> Lowest range: 5260 MHz Middle channel: 5280 MHz Highest range: 5320 MHz</p> <p><u>Test Frequencies for Conducted/Radiated tests: (40 MHz)</u> Lowest channel: 5270 MHz Highest channel: 5310 MHz</p> <p><u>Test Frequencies for Conducted/Radiated tests: (80 MHz)</u> Middle channel: 5290 MHz</p>

Note (1): For radiated spurious emissions for OFDM modes 802.11a, 802.11n20/40 and 802.11ac20/40/80 a preliminary scan was performed to determine the worst case.


Note (2): For radiated/conducted measurements, a preliminary scan was performed to determine the worst case. The data rates of 6Mb/s for 802.11a, MCS0 for 802.11n20/n40, and MCS8 for 802.11ac20/ac40/ac80 were selected based on preliminary testing that identified those rates corresponding to the worst cases.

TEST C.1: 26DB EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

LIMITS:	Product standard:	Part 15 Subpart C §15.403 and RSS-247
	Test standard:	Part 15 Subpart C §15.403 and RSS-247 6.2.1

No requirements requested

TEST SETUP:

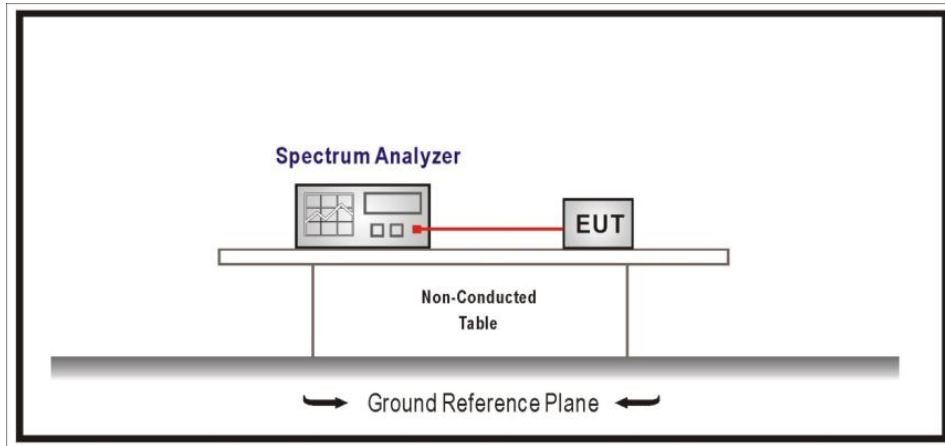


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


	Lowest frequency 5260 MHz	Middle frequency 5280 MHz	Highest frequency 5320 MHz
26dB Bandwidth (MHz)	20	19.8	19.8
Occupied bandwidth (MHz)	16.4	16.4	16.4
Measurement uncertainty (kHz)	<± 8.33		

TEST RESULTS (Cont.):	26 dB BANDWIDTH
------------------------------	------------------------


Lowest Channel

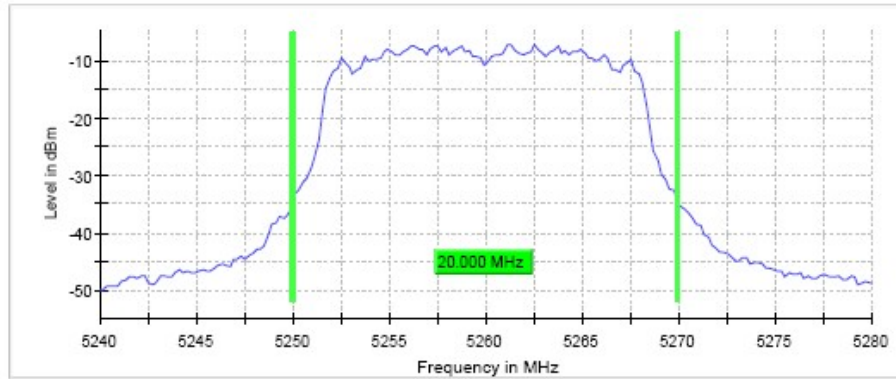

Middle Channel

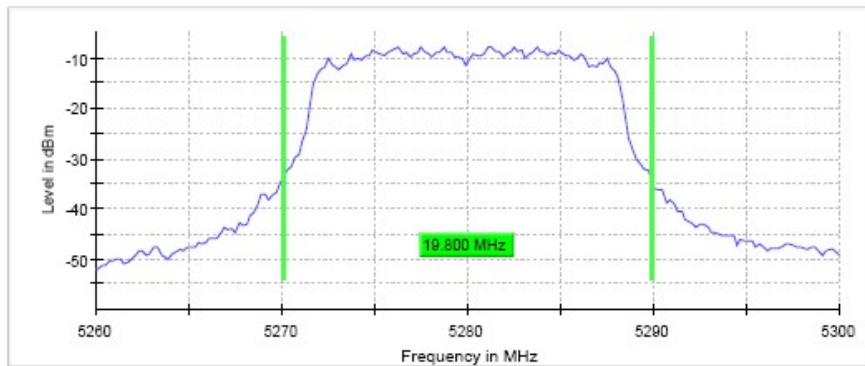


Highest Channel

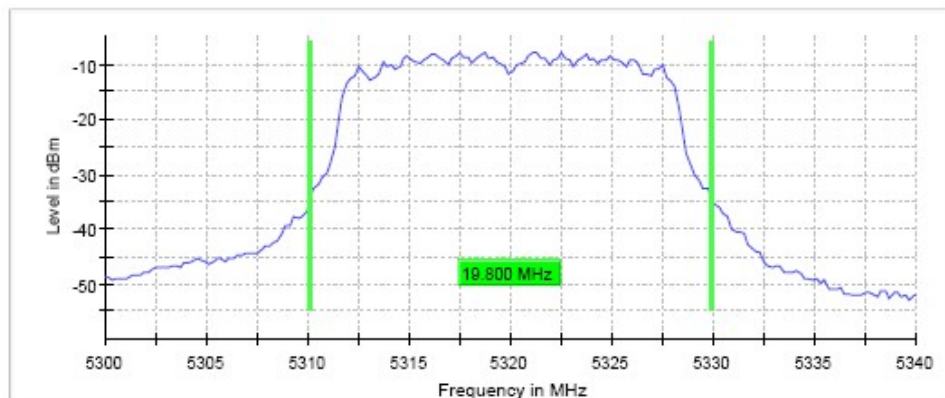


TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------


Lowest Channel

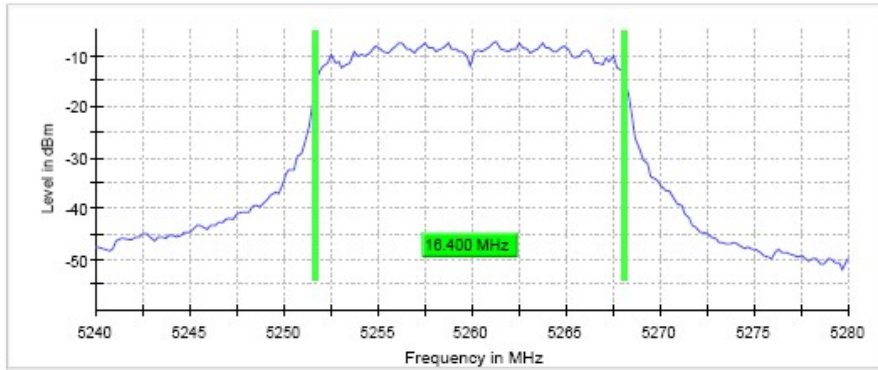

Middle Channel

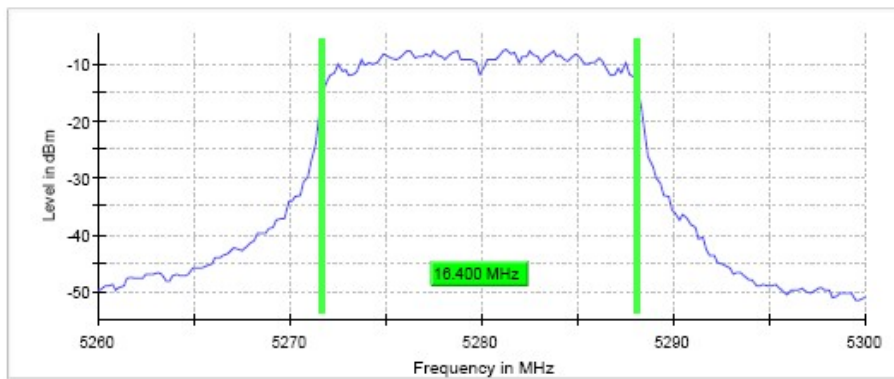


Highest Channel

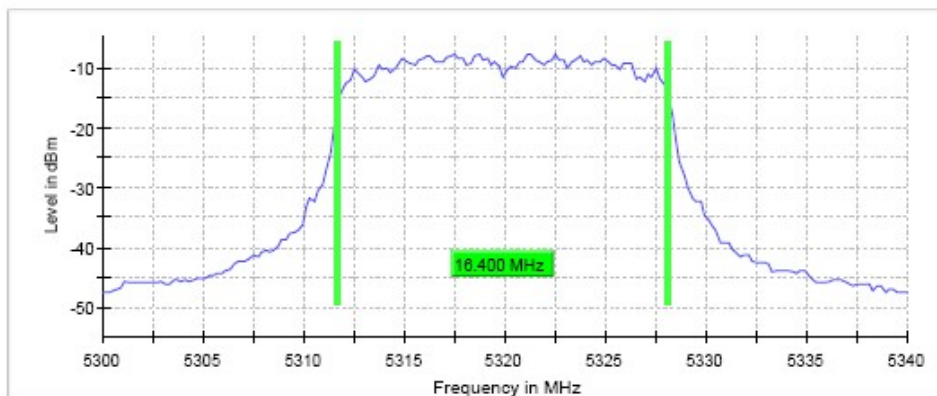


TEST RESULTS (Cont.)				
Measurement				
	Setting	Instrument Value	Instrument Value	Instrument Value
	Start Frequency	5.24000 GHz	5.26000 GHz	5.30000 GHz
	Stop Frequency	5.28000 GHz	5.30000 GHz	5.34000 GHz
	Span	40.000 MHz	40.000 MHz	40.000 MHz
	RBW	200.000 kHz	200.000 kHz	200.000 kHz
	VBW	1.000 MHz	1.000 MHz	1.000 MHz
	SweepPoints	200	200	200
	Sweeptime	28.443 μ s	28.443 μ s	28.443 μ s
	Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
	Attenuation	20.000 dB	20.000 dB	20.000 dB
	Detector	MaxPeak	MaxPeak	MaxPeak
	SweepCount	200	200	200
	Filter	3 dB	3 dB	3 dB
	Trace Mode	Max Hold	Max Hold	Max Hold
	Sweeptype	FFT	FFT	FFT
	Preamp	off	off	off
	Stablemode	Trace	Trace	Trace
	Stablevalue	0.30 dB	0.30 dB	0.30 dB
	Run	47 / max. 150	38 / max. 150	30 / max. 150
	Stable	5 / 5	5 / 5	5 / 5
	Max Stable Difference	0.12 dB	0.07 dB	0.24 dB
TESTED SAMPLES:		S/01		
TESTED CONDITIONS MODES:		TC#02 (n Mode)		
TEST RESULTS:		PASS		
Bandwidth: 20 MHz				
		Lowest frequency	Middle frequency	Highest frequency
		5260 MHz	5280 MHz	5320 MHz
	26dB bandwidth (MHz)	20.2	20.6	20.2
	Occupied bandwidth (MHz)	17.4	17.4	17.4
	Measurement uncertainty (kHz)	$<\pm 8.33$		

TEST RESULTS (Cont.): **26 dB BANDWIDTH**


Lowest Channel

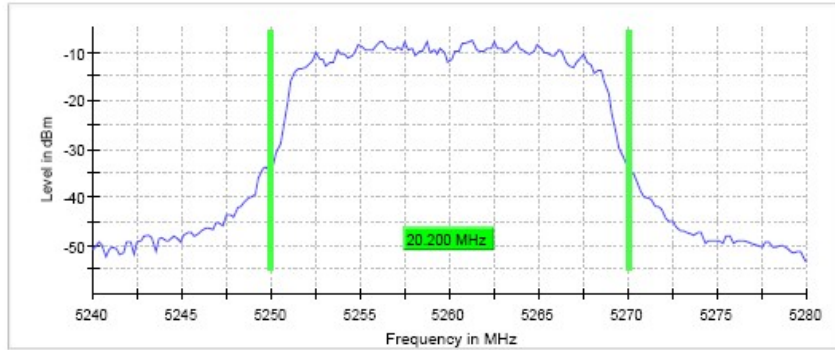

Middle Channel

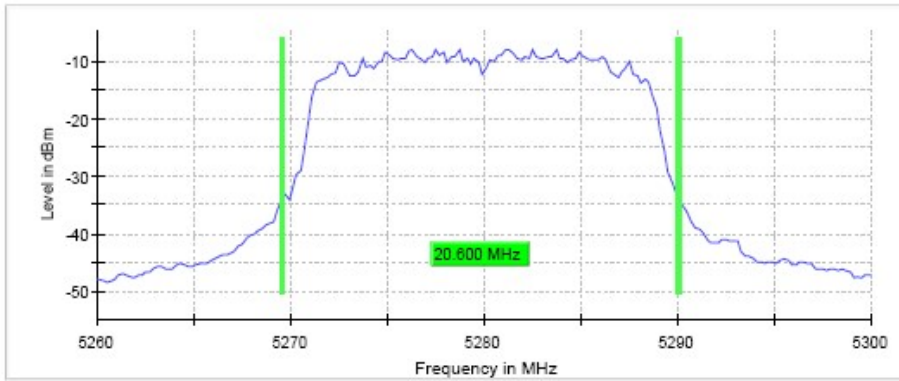


Highest Channel

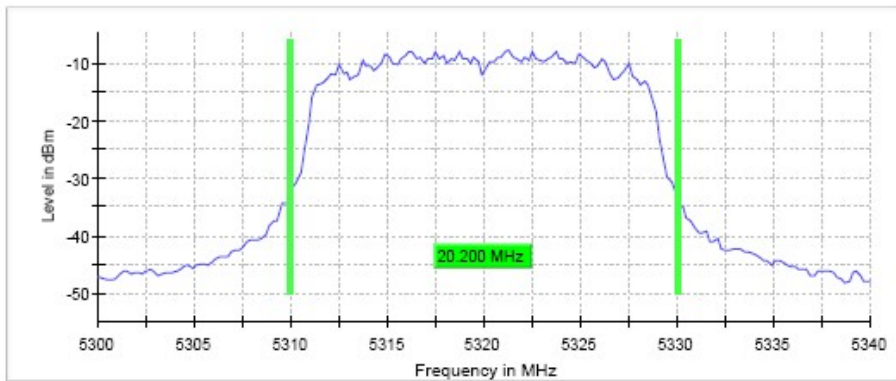


TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------


Lowest Channel

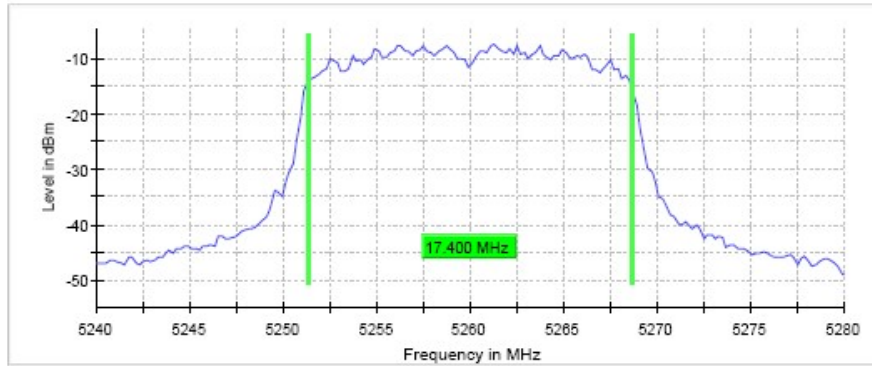

Middle Channel

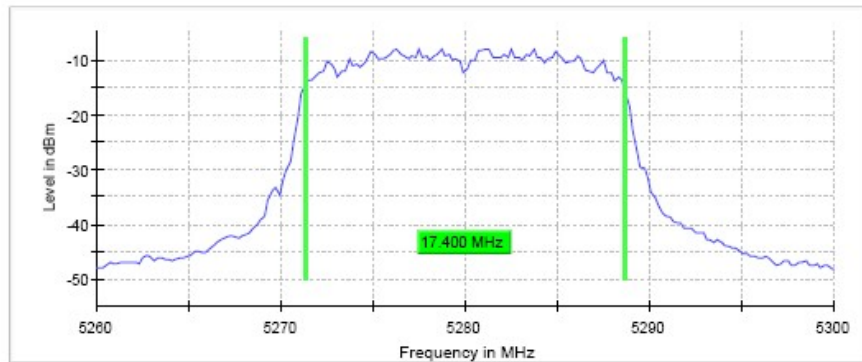

Highest Channel

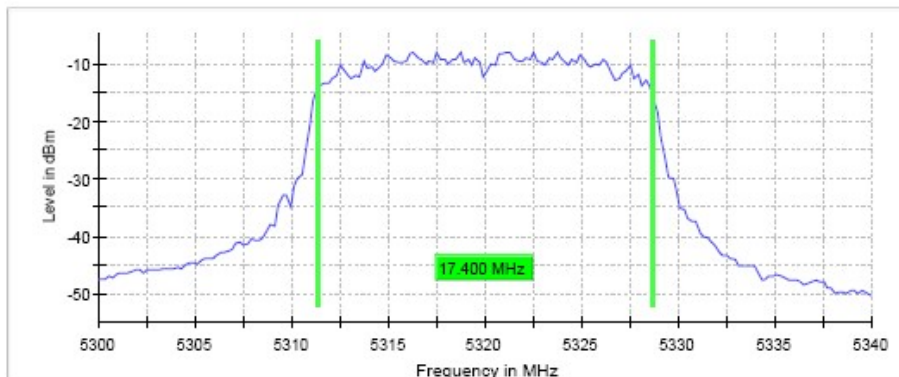

TEST RESULTS (Cont.)	Measurement
-----------------------------	--------------------

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.24000 GHz	5.26000 GHz	5.30000 GHz
Stop Frequency	5.28000 GHz	5.30000 GHz	5.34000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
SweepPoints	200	200	200
SweepTime	28.443 μ s	28.443 μ s	28.443 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
SweepCount	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
SweepType	FFT	FFT	FFT
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.30 dB	0.30 dB	0.30 dB
Run	24 / max. 150	47 / max. 150	65 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.27 dB	0.00 dB	0.04 dB


TEST RESULTS (Cont.)	n Mode
-----------------------------	---------------

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5270 MHz	5310 MHz
26dB bandwidth (MHz)	40.449	40.449
Occupied bandwidth (MHz)	36.5	36.5
Measurement uncertainty (kHz)	$<\pm 8.33$	

TEST RESULTS (Cont.):	26 dB BANDWIDTH
------------------------------	------------------------

Lowest Channel

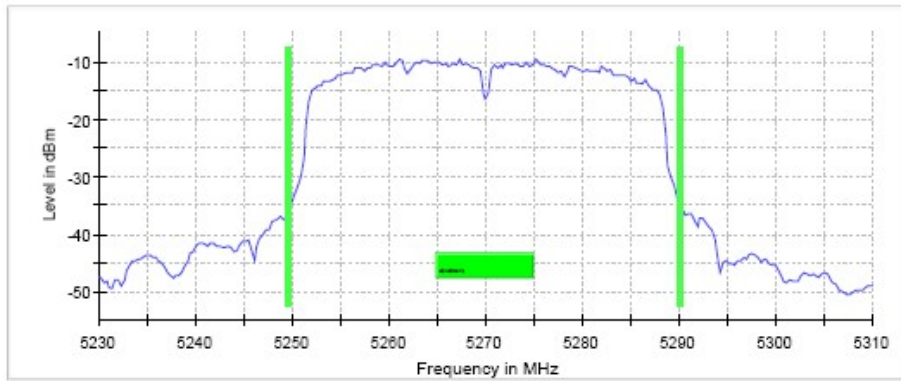


Highest Channel

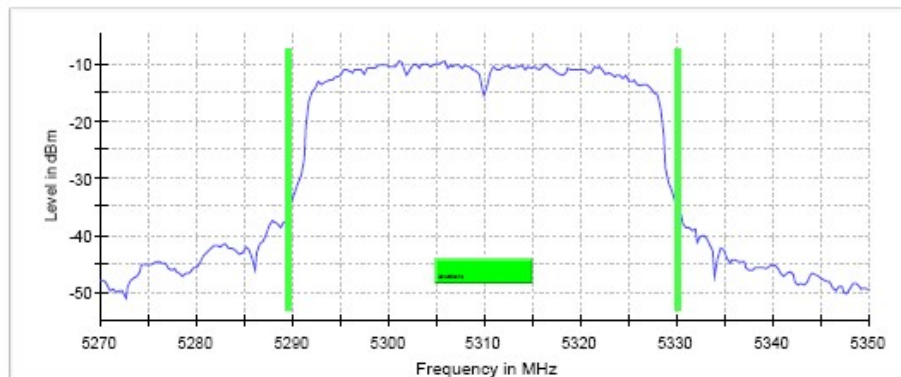


TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------

Lowest Channel

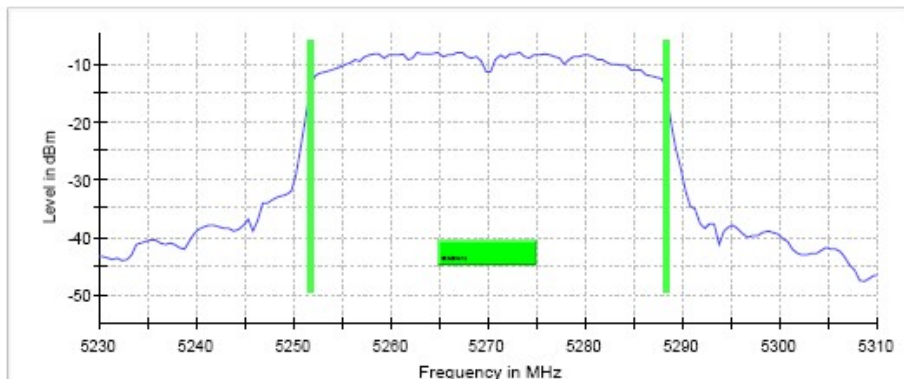


Highest Channel

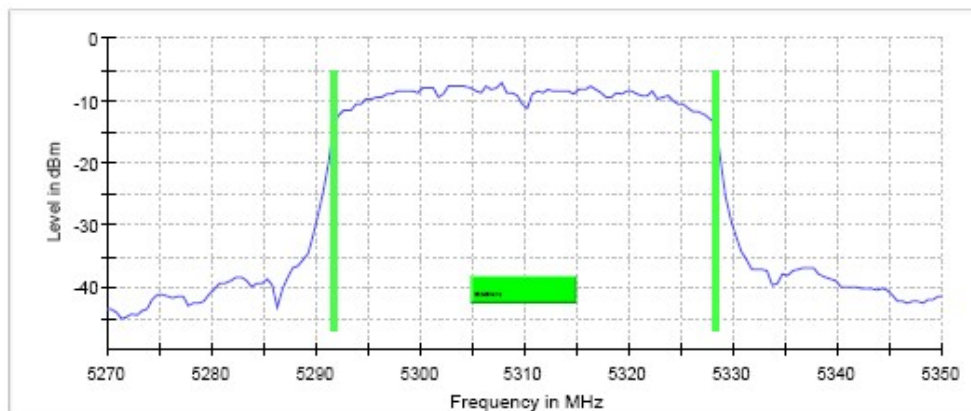


TEST RESULTS (Cont.)			
Measurement			
	Setting	Instrument Value	Instrument Value
	Start Frequency	5.23000 GHz	5.27000 GHz
	Stop Frequency	5.31000 GHz	5.35000 GHz
	Span	80.000 MHz	80.000 MHz
	RBW	500.000 kHz	500.000 KHz
	VBW	2.000 MHz	2.000 MHz
	SweepPoints	267	267
	Sweeptime	31.603 us	31.603 us
	Reference Level	0.000 dBm	0.000 dBm
	Attenuation	20.000 dB	20.000 dB
	Detector	MaxPeak	MaxPeak
	SweepCount	200	200
	Filter	3 dB	3 dB
	Trace Mode	Max Hold	Max Hold
	SweepType	FFT	FFT
	Preamp	off	off
	Stablemode	Trace	Trace
	Stablevalue	0.30 dB	0.30 dB
	Run	67 / max. 150	46 / max. 150
	Stable	0 / 5	5 / 5
	Max Stable	0.26 dB	0.22 dB
TESTED SAMPLES:	S/01		
TESTED CONDITIONS MODES:	TC#03 (ac mode)		
TEST RESULTS:	PASS		
Bandwidth: 20 MHz			
	Lowest frequency	Middle frequency	Highest frequency
	5260 MHz	5280 MHz	5320 MHz
26db bandwidth (MHz)	20.4	20.4	20.8
Occupied bandwidth (MHz)	17.4	17.4	17.4
Measurement uncertainty (kHz)	<± 8.33		

TEST RESULTS (Cont.): **26 dB BANDWIDTH**


Lowest Channel

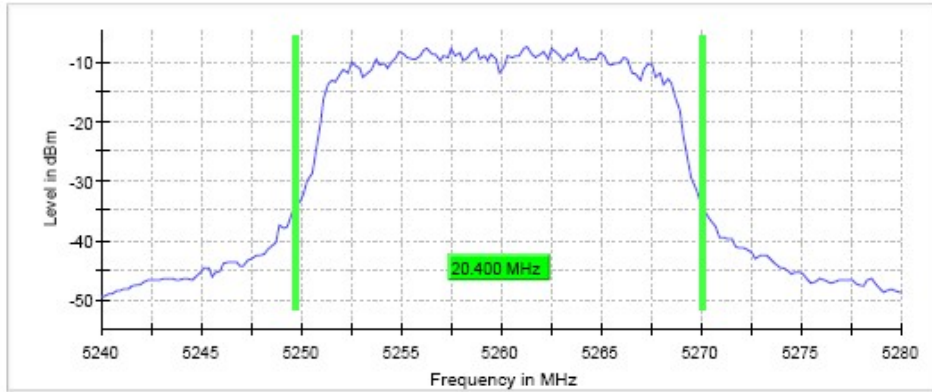

Middle Channel

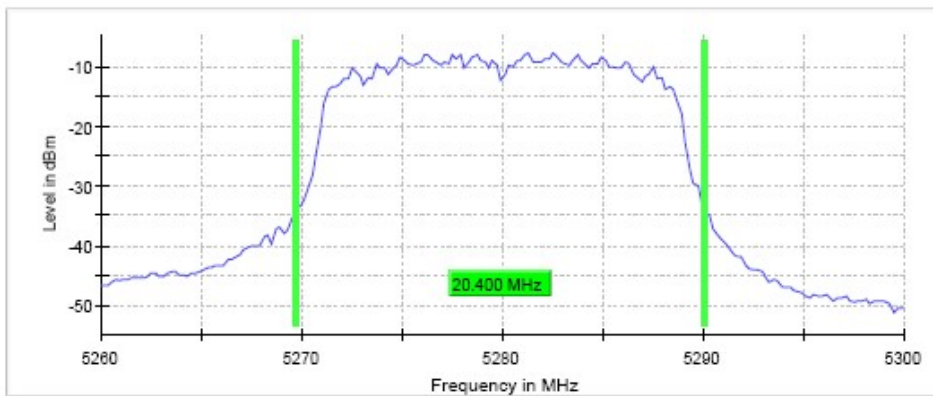


Highest Channel

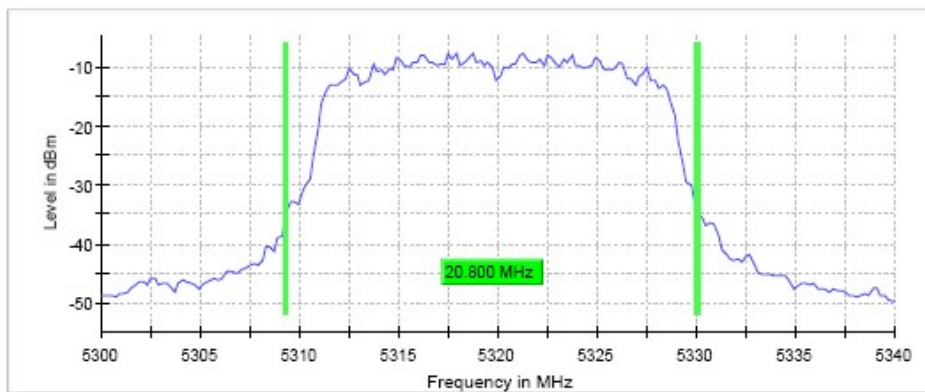


TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------


Lowest Channel

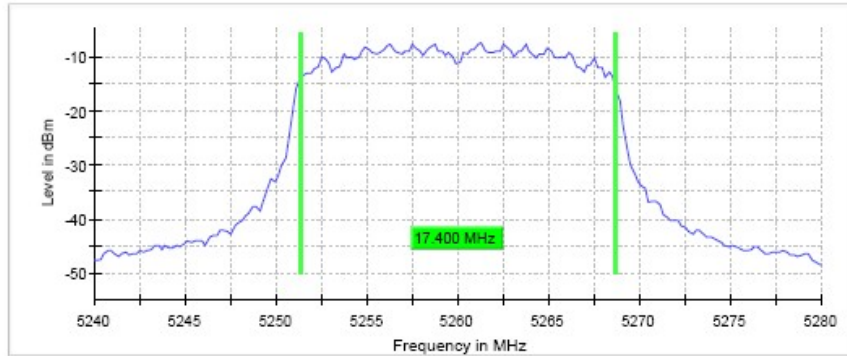

Middle Channel

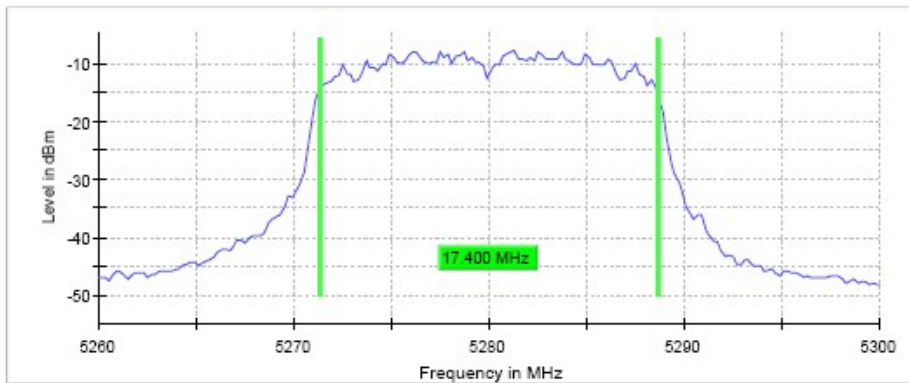

Highest Channel

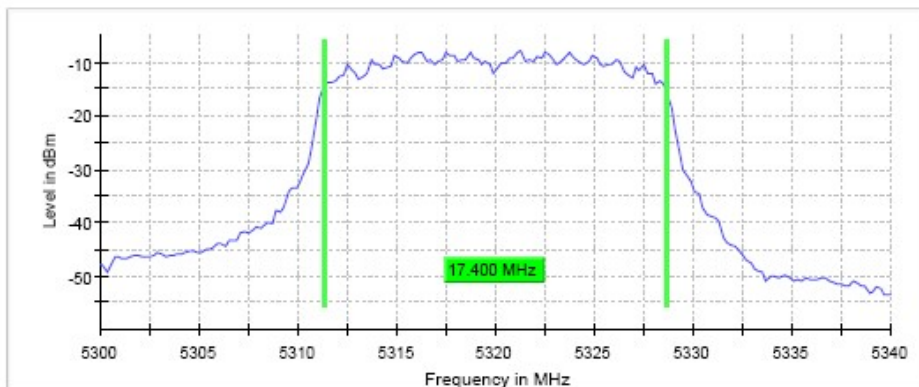

TEST RESULTS (Cont.)	
-----------------------------	--

Measurement


Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.24000 GHz	5.26000 GHz	5.30000 GHz
Stop Frequency	5.28000 GHz	5.30000 GHz	5.34000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
SweepPoints	200	200	200
SweepTime	28.443 μ s	28.443 μ s	28.443 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
SweepCount	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
SweepType	FFT	FFT	FFT
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.30 dB	0.30 dB	0.30 dB
Run	50 / max. 150	54 / max. 150	52 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.01 dB	0.28 dB	0.26 dB

TEST RESULTS	ac mode (40 MHz)
---------------------	-------------------------


	Lowest frequency 5270 MHz	Highest frequency 5310 MHz
26dB bandwidth (MHz)	40.749	40.749
Occupied bandwidth (MHz)	36.5	36.5
Measurement uncertainty (kHz)	$<\pm 8.33$	

TEST RESULTS (Cont.): **26 dB BANDWIDTH**

Lowest Channel

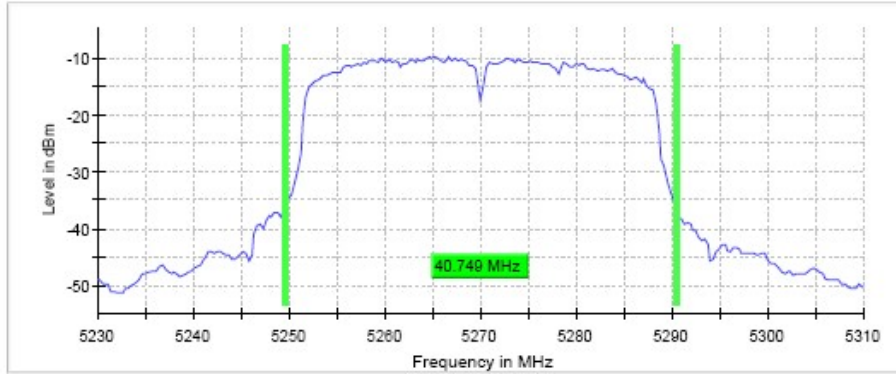


Highest Channel

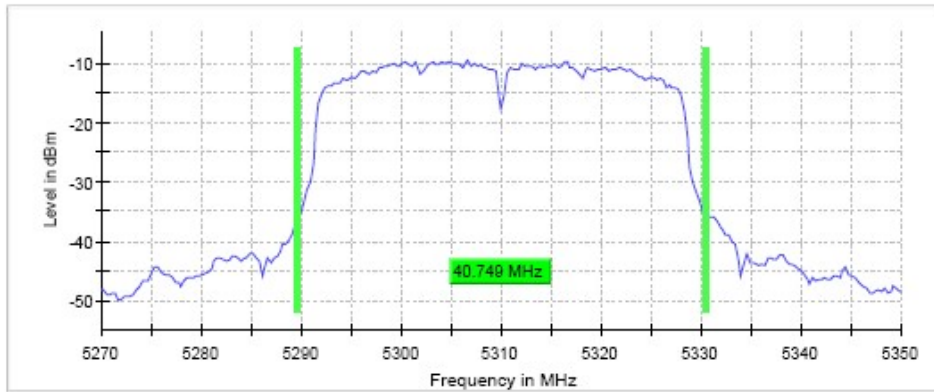


TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------

Lowest Channel

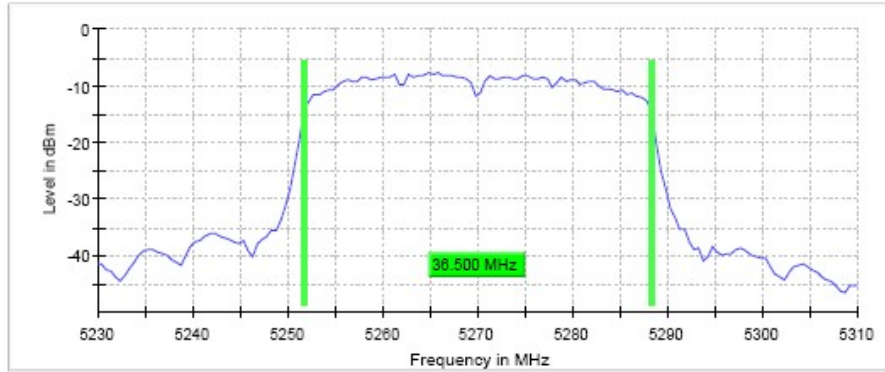

Highest Channel

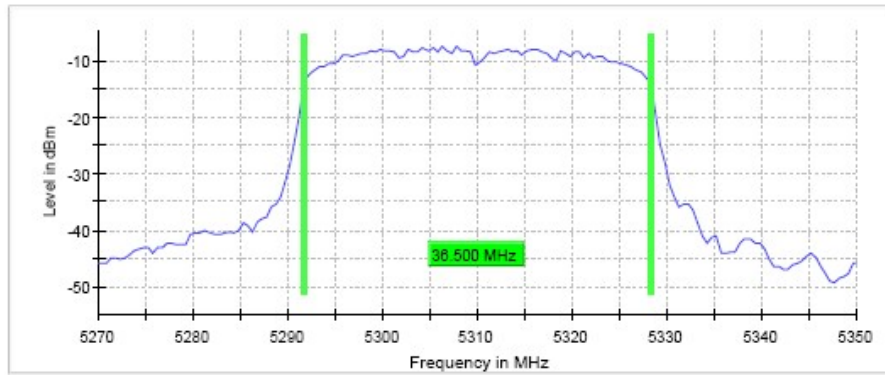

TEST RESULTS (Cont.)

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	5.23000 GHz	5.27000 GHz
Stop Frequency	5.31000 GHz	5.35000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
SweepPoints	267	267
SweepTime	31.603 μ s	31.603 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	FFT
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	63 / max. 150	58 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.18 dB	0.10 dB

TEST RESULTS **ac mode (80 MHz)**

	Lowest frequency 5290 MHz
26dB bandwidth (MHz)	84
Occupied bandwidth (MHz)	75
Measurement uncertainty (kHz)	± 8.33


TEST RESULTS (Cont.): **26 dB BANDWIDTH**

Lowest Channel

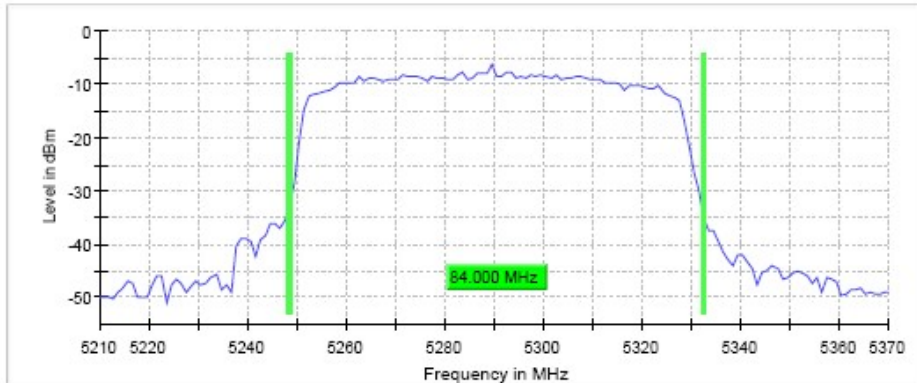

TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------

Lowest Channel

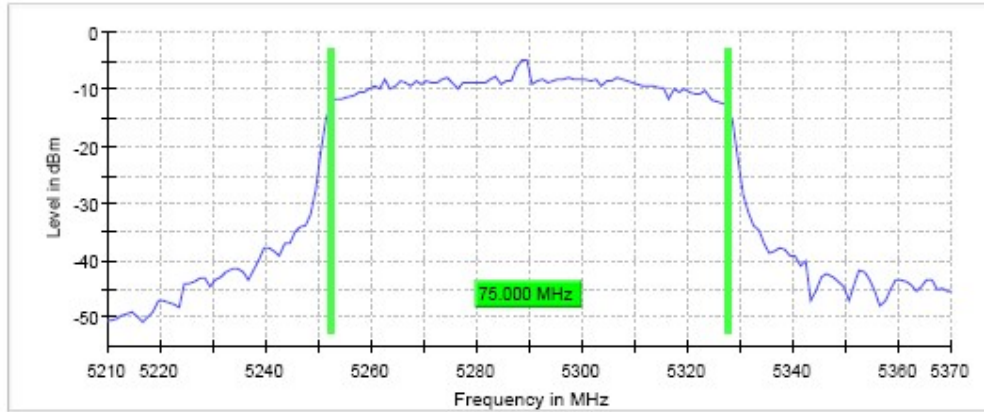

Measurement

Setting	Instrument Value
Start Frequency	5.21000 GHz
Stop Frequency	5.37000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
SweepPoints	160
Sweeptime	22.754 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	32 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TEST C.2: POWER LIMITS. MAXIMUM OUTPUT POWER

LIMITS:	Product standard:	Part 15 Subpart C §15.407 and RSS-247
	Test standard:	Part 15 Subpart C §15.407(a) (1) (4) and RSS-247 6.2.1.1


LIMITS

In band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST SETUP

Measured according to ANSI C63.10, Section 11.9.2.3.2 Method AVGPM-G

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power

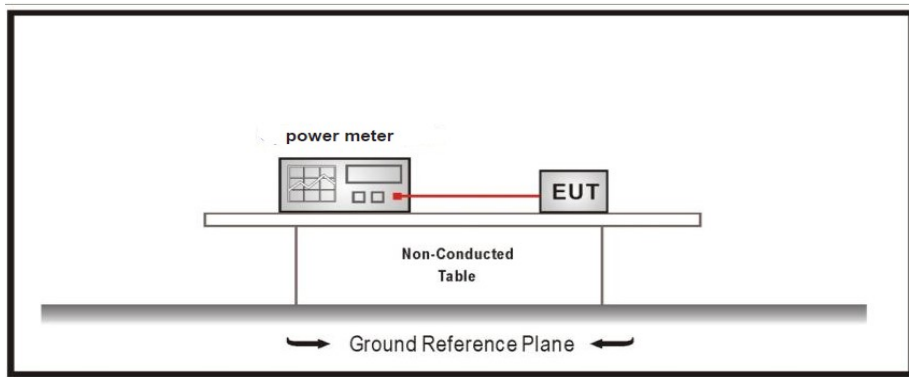

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Maximum declared antenna gain: -2.5 dBi

	Lowest frequency 5260 MHz	Middle frequency 5280 MHz	Highest frequency 5320 MHz
Maximum conducted power (dBm)	2.2	2	1.8
Maximum EIRP power (dBm)	-0.3	-0.5	-0.7
Measurement uncertainty (dB)	<±0.78		

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.