



RADIO TEST REPORT

Test Report No.: 14210105H

Customer	Panasonic Corporation of North America
Description of EUT	WAM LO (CV)
Model Number of EUT	IM2005BB
FCC ID	ACJ932IM2005BB
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied (Refer to SECTION 3)
Issue Date	August 25, 2022
Remarks	For Permissive change

Representative Test Engineer

Hiroyuki Furutaka
Engineer

Approved By

Shinichi Miyazono
Engineer



CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 21.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the applicant for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14210105H

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14210105H	August 25, 2022	-

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	6
SECTION 4: Operation of EUT during testing	9
SECTION 5: Radiated emission (Fundamental and Spurious Emission)	10
SECTION 6: -20 dB Bandwidth.....	12
SECTION 7: 99% Bandwidth.....	12
APPENDIX 1: Test data	13
Radiated Emission (Fundamental and Spurious Emission).....	13
-20 dB Bandwidth / 99 % Occupied Bandwidth	15
APPENDIX 2: Test instruments	16
APPENDIX 3: Photographs of test setup	17
Radiated Spurious Emission.....	17
Worst Case Position	18

SECTION 1: Customer Information

Company Name	Panasonic Corporation of North America *1)
Address	Two Riverfront Plaza, 9th Floor Newark, NJ 07102-5490
Telephone Number	+1-201-348-7760
Contact Person	Ben Botros

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

*1) Panasonic Corporation of North America designates Panasonic Automotive Systems Asia Pacific Co., Ltd. as manufacturer of the product (WAM LO (CV)).

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	WAM LO (CV)
Model Number	IM2005BB
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is not equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	July 15, 2022
Test Date	July 28, 2022

2.2 Product Description

General Specification

Rating	DC 12.0 V
--------	-----------

Radio Specification

Equipment Type	Transceiver
Frequency of Operation	125 kHz
Type of Modulation	ASK

<Contents of the change from original model>

Original test report number of this report is 12541470H-R1.

The EUT specification was changed from the original model as below;

- Addition of the specifications for external antennas that can be used.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C FCC Part 15 final revised on April 1, 2022 and effective May 2, 2022
Title	FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.209 Radiated emission limits; general requirements.

3.2 Procedures and results

Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
Conducted Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 8.8	<FCC> Section 15.207 <ISED> RSS-Gen 8.8	-	N/A	N/A	N/A *1)
Electric Field Strength of Fundamental Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 6.5, 6.12	<FCC> Section 15.209 <ISED> RSS-210 7.2 RSS-Gen 8.9	Radiated	N/A	17.2 dB 125 kHz, 0 deg. Peak with Duty factor	Complied a)
Electric Field Strength of Spurious Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 6.5, 6.6, 6.13	<FCC> Section 15.209 <ISED> RSS-210 7.3 RSS-Gen 8.9	Radiated	N/A	3.6 dB 36.000 MHz, Vertical, QP	Complied a)
-20 dB Bandwidth	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> -	<FCC> Reference data <ISED> -	Radiated	N/A	N/A	Complied b)

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

a) Refer to APPENDIX 1 (data of Radiated emission)

b) Refer to APPENDIX 1 (data of -20 dB Bandwidth / 99 % emission bandwidth)

FCC Part 15.31 (e)

This EUT provides stable voltage constantly to RF Module regardless of input voltage.

Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the vehicle.

Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
99% emission bandwidth	RSS-Gen 6.7	-	Radiated	N/A	N/A	-

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Test Item		Frequency range		Uncertainty (+/-)
Conducted emission AMN (LISN)		0.15 MHz to 30 MHz		3.3 dB
Radiated emission	3 m	9 kHz to 30 MHz		3.2 dB
	10 m			3.0 dB
	3 m	30 MHz to 200 MHz	Horizontal	4.8 dB
			Vertical	5.0 dB
		200 MHz to 1000 MHz	Horizontal	5.1 dB
			Vertical	6.2 dB
	10 m	30 MHz to 200 MHz	Horizontal	4.8 dB
			Vertical	4.8 dB
		200 MHz to 1000 MHz	Horizontal	5.0 dB
			Vertical	5.0 dB
	3 m	1 GHz to 6 GHz		4.9 dB
		6 GHz to 18 GHz		5.2 dB
	1 m	10 GHz to 26.5 GHz		5.4 dB
		26.5 GHz to 40 GHz		5.4 dB
	10 m	1 GHz to 18 GHz		5.4 dB
-20 dB Bandwidth / 99 % emission bandwidth		-		0.96 %

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-

3.6 Test data, Test instruments, and Test set up


Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Modes

Test mode	Remarks																
1) Continuous transmitting mode (125kHz)	-																
*Power of the EUT was set by the software as follows;																	
<table><tr><th>Software</th><th>Version</th><th>Date</th><th>Storage location</th></tr><tr><td>cm0plus.srec</td><td>-</td><td>2021,10,18</td><td>EUT memory</td></tr><tr><td>cm4.srec</td><td>-</td><td>2021,10,18</td><td>EUT memory</td></tr><tr><td>cm4_app.srec</td><td>-</td><td>2021,10,21</td><td>EUT memory</td></tr></table>		Software	Version	Date	Storage location	cm0plus.srec	-	2021,10,18	EUT memory	cm4.srec	-	2021,10,18	EUT memory	cm4_app.srec	-	2021,10,21	EUT memory
Software	Version	Date	Storage location														
cm0plus.srec	-	2021,10,18	EUT memory														
cm4.srec	-	2021,10,18	EUT memory														
cm4_app.srec	-	2021,10,21	EUT memory														
*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.																	
Justification: The system was configured in typical fashion (as a user would normally use it) for testing.																	

4.2 Configuration and peripherals

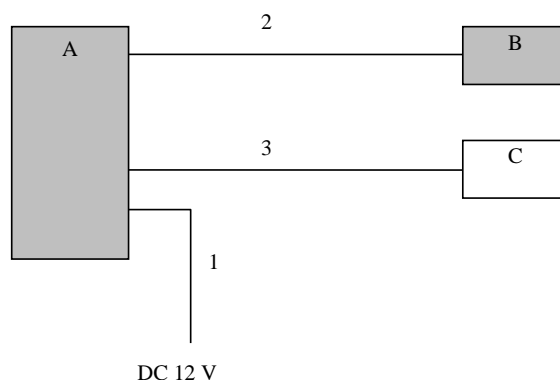

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	WAM LO (CV)	IM2005BB	002	Panasonic Automotive Systems Asia Pacific Co., Ltd.	EUT
B	Key cylinder & Immobilizer coil	8-97556661-0	No.2	U-Shin Ltd.	EUT
C	Antenna Test Box	-	-	-	-

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	2.5	Unshielded	Unshielded	-
2	DC and Signal Cable	3.0	Unshielded	Unshielded	-
3	Signal Cable	2.5	Unshielded	Unshielded	-

SECTION 5: Radiated emission (Fundamental and Spurious Emission)

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[Limit conversion]

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

[Frequency: From 9 kHz to 30 MHz]

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., and 135 deg.) and horizontal polarization.

*Refer to Figure 2 about Direction of the Loop Antenna.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

These tests were performed in semi anechoic chamber. Therefore, the measured level of emissions may be higher than if measurements were made without a ground plane. However, test results were confirmed to pass against standard limit.

[Frequency: From 30 MHz to 1 GHz]

The measuring antenna height varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

[Test instruments and test settings]

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz
Antenna Type	Loop	Biconical	Logperiodic

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Frequency	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz
Instrument used	Test Receiver				
Detector	PK / AV	QP	PK / AV	QP	QP
IF Bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz
Test Distance	3 m *1)	3 m *1)	3 m *1)	3 m *2)	3 m

*1) Distance Factor: $40 \times \log(3 \text{ m} / 300 \text{ m}) = -80 \text{ dB}$

*2) Distance Factor: $40 \times \log(3 \text{ m} / 30 \text{ m}) = -40 \text{ dB}$

Figure 1: Test Setup



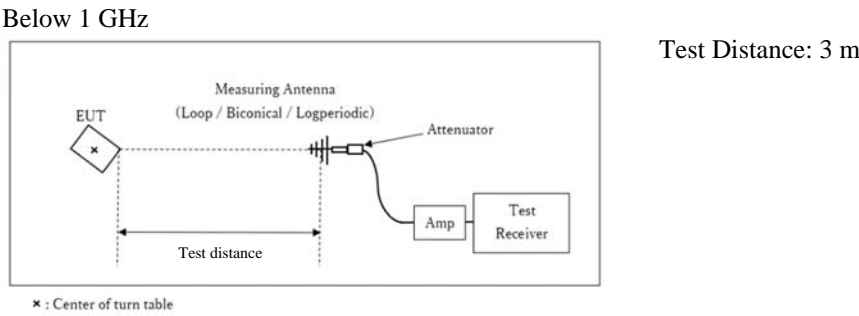


Figure 2: Direction of the Loop Antenna

Side View (Vertical)

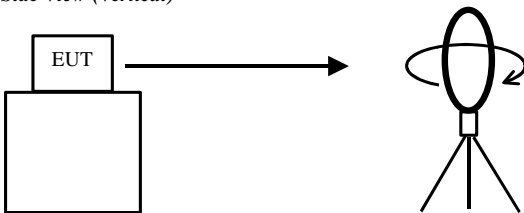


Top View (Horizontal)



Antenna was not rotated.

Top View (Vertical)

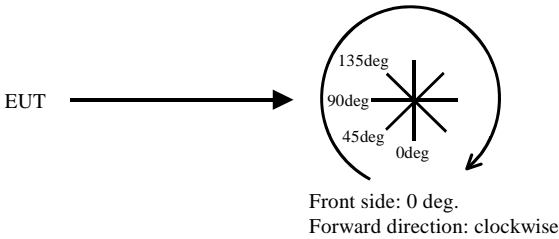

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

- This EUT has two modes which transponder key is inserted or not. The worst case was confirmed with and without transponder key inserted, as a result, the test without transponder key inserted was the worst case. Therefore the test without transponder key inserted was performed only.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 9 kHz to 1 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: -20 dB Bandwidth

Test Procedure

The test was measured with a spectrum analyzer.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
-20 dB Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer

Test data : APPENDIX
Test result : Pass

SECTION 7: 99% Bandwidth

Test Procedure

The test was measured with a spectrum analyzer.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
99 % Occupied Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Peak hold was applied as Worst-case measurement.							

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data**Radiated Emission (Fundamental and Spurious Emission)**

Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date July 28, 2022
Temperature / Humidity 22 deg. C / 50 % RH
Engineer Hiroyuki Furutaka
Mode Mode 1

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	95.4	19.1	-73.9	32.2	-	8.4	45.6	37.2	Fundamental
0deg	0.25000	PK	39.4	19.1	-64.1	32.2	-	-37.8	39.6	77.4	Floor Noise
0deg	0.37500	PK	48.6	19.0	-64.1	32.2	-	-28.7	36.1	64.8	
0deg	0.50000	QP	23.5	19.0	-24.1	32.1	-	-13.7	33.6	47.3	Floor Noise
0deg	0.62500	QP	36.5	19.0	-24.1	32.1	-	-0.7	31.7	32.4	
0deg	0.75000	QP	22.4	19.1	-24.1	32.2	-	-14.8	30.1	44.9	Floor Noise
0deg	0.87500	QP	34.2	19.1	-24.1	32.2	-	-3.0	28.7	31.7	
0deg	1.00000	QP	21.9	19.0	-24.1	32.2	-	-15.4	27.6	43.0	Floor Noise
0deg	1.12500	QP	33.0	19.0	-24.1	32.2	-	-4.3	26.5	30.8	
0deg	1.25000	QP	21.7	19.1	-24.1	32.2	-	-15.5	25.6	41.1	Floor Noise
90deg	23.24989	QP	40.9	20.4	-23.1	32.1	-	6.1	29.5	23.4	
Hori.	32.760	QP	23.4	17.5	7.1	32.1	-	15.9	40.0	24.1	
Hori.	36.000	QP	30.2	16.4	7.1	32.1	-	21.6	40.0	18.4	
Hori.	49.750	QP	21.7	11.3	7.3	32.1	-	8.2	40.0	31.8	Floor Noise
Hori.	64.507	QP	29.5	6.9	7.5	32.1	-	11.8	40.0	28.2	
Hori.	78.250	QP	29.1	6.7	7.6	32.1	-	11.3	40.0	28.7	
Hori.	215.000	QP	21.1	11.5	8.8	32.0	-	9.4	43.5	34.1	Floor Noise
Vert.	32.760	QP	33.7	17.5	7.1	32.1	-	26.2	40.0	13.8	
Vert.	36.000	QP	45.0	16.4	7.1	32.1	-	36.4	40.0	3.6	
Vert.	49.750	QP	27.4	11.3	7.3	32.1	-	13.9	40.0	26.1	
Vert.	64.507	QP	43.5	6.9	7.5	32.1	-	25.8	40.0	14.2	
Vert.	78.250	QP	38.9	6.7	7.6	32.1	-	21.1	40.0	18.9	
Vert.	215.000	QP	21.2	11.5	8.8	32.0	-	9.5	43.5	34.0	Floor Noise

Below 30MHz Result(0.125 MHz only) = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor) - Gain(Amplifier)

Below 30MHz Result(Except 0.125 MHz) = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

Above 30MHz Result = Reading + Ant Factor + Loss (Cable + Attenuator) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	95.4	19.1	-73.9	32.2	0.0	8.4	25.6	17.2	Fundamental
0deg	0.25000	PK	39.4	19.1	-64.1	32.2	0.0	-37.8	19.6	57.4	
0deg	0.37500	PK	48.6	19.0	-64.1	32.2	0.0	-28.7	16.1	44.8	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	95.4	19.1	6.1	32.2	-	88.4	-	-	Fundamental


Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.

Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Radiated Spurious Emission
(Plot data, Worst case for Spurious Emission)


Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	July 28, 2022
Temperature / Humidity	22 deg. C / 50 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 1

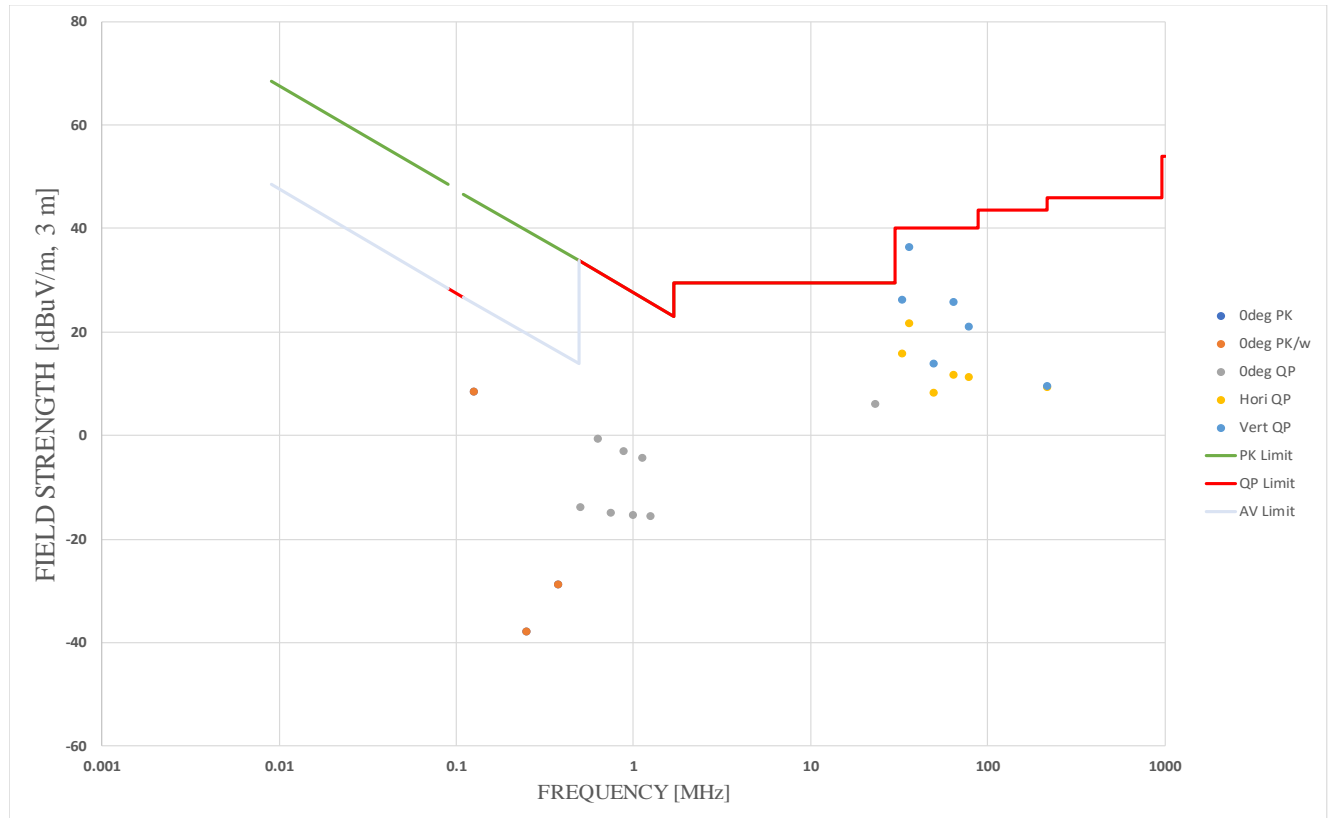

-20 dB Bandwidth / 99 % Occupied Bandwidth

Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date July 28, 2022
Temperature / Humidity 22 deg. C / 50 % RH
Engineer Hiroyuki Furutaka
Mode Mode 1

-20 dB Bandwidth [kHz]	99 % Occupied Bandwidth [kHz]
15.774	31.7732

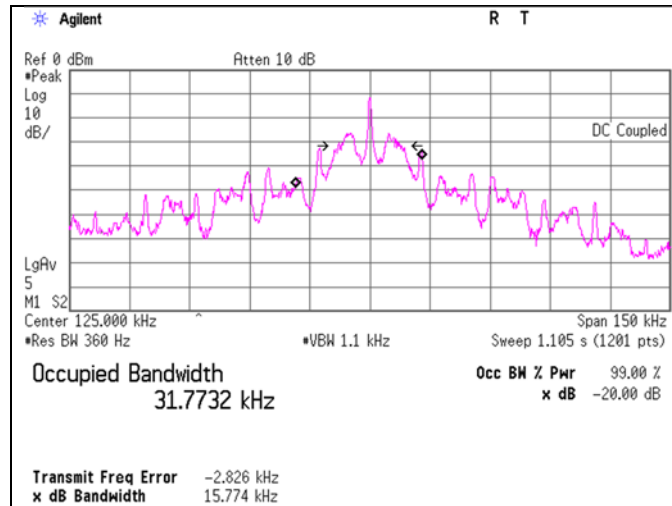

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	JTR-03	213780	EMI Test Receiver	Rohde & Schwarz	ESW8	103079	12/21/2021	12
RE	MAEC-04	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/22/2022	24
RE	MAT-34	141331	Attenuator(6dB)	TME	UFA-01	-	02/25/2022	12
RE	MBA-05	141425	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	VHA 91031302	08/28/2021	12
RE	MCC-113	141217	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W/SFM141/421-010/sucoform141-PE/RFM-E121(SW)	-/04178	06/11/2022	12
RE	MCC-255	207745	Coaxial Cable	UL Japan	-	-	05/17/2022	12
RE	MCC-50	141397	Coaxial Cable	UL Japan	-	-	11/03/2021	12
RE	MHF-24	141295	High Pass Filter 0.15-30MHz	Rohde & Schwarz	EZ-25/3	100041	02/24/2022	12
RE	MJM-29	142230	Measure	KOMELON	KMC-36	-	-	-
RE	MLA-23	141267	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-192	08/28/2021	12
RE	MLPA-01	141254	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100017	05/31/2022	12
RE	MMM-10	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	01/16/2022	12
RE	MOS-15	141562	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0010	01/10/2022	12
RE	MPA-14	141583	Pre Amplifier	SONOMA INSTRUMENT	310	260833	04/04/2022	12
RE	MSA-16	141903	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186390	01/07/2022	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission