




## SAR TEST REPORT

Test Report No. : 27BE0153-HO-E

Applicant : Panasonic Communications Co., Ltd.  
Type of Equipment : Cordless Telephone (Handset)  
Model No. : KX-TGA600 (Handset)  
FCC ID : ACJ96NKX-TG6051  
Test standard : FCC47CFR 2.1093  
FCC OET Bulletin 65, Supplement C  
Test Result : Complied  
Max. SAR Measured : Head 0.090W/kg (5759.702MHZ)  
Body 0.639W/kg (5759.702MHZ)

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above standard. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test : October 4, 5, 2006

Tested by :    
Miyo Ikuta Hisayoshi Sato  
EMC Services EMC Services

Approved by :   
Hironobu Shinoji  
Group Leader of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

<b>SECTION 1 : Client information .....</b>	<b>3</b>
<b>SECTION 2 : Equipment under test (E.U.T.) .....</b>	<b>3</b>
2.1 Identification of E.U.T. ....	3
2.2 Product Description .....	3
<b>SECTION 3 : Test standard information .....</b>	<b>4</b>
3.1 Requirements for compliance testing defined by the FCC .....	4
3.2 Exposure limit .....	5
<b>SECTION 4 : Test result .....</b>	<b>6</b>
4.1 Result of Max. SAR value .....	6
4.2 Test Location .....	6
<b>SECTION 5 : Operation of E.U.T. during testing .....</b>	<b>7</b>
5.1 Confirmation before SAR testing .....	7
5.2 Confirmation of SAR testing .....	7
5.3 Operating modes for SAR testing .....	7
5.4 Description of the head test setup .....	8
5.5 Description of the Body-worn test setup .....	10
5.6 Antenna of EUT .....	11
5.7 Method of Head / Body SAR Measurement .....	11
<b>SECTION 6 : Test surrounding .....</b>	<b>12</b>
6.1 Measurement uncertainty .....	12
<b>SECTION 7 : Results of confirmation before SAR testing .....</b>	<b>13</b>
7.1 Measurement procedure for Output Power .....	13
7.2 Output Power .....	13
<b>SECTION 8 : Measurement results .....</b>	<b>14</b>
8.1 SAR measurement results .....	14
<b>APPENDIX 1 : Photographs of test setup .....</b>	<b>16</b>
1. Photograph of EUT .....	17
<b>APPENDIX 2 : SAR Measurement data .....</b>	<b>25</b>
1. Evaluation procedure .....	26
2. Head measurement data .....	27
3. Body measurement data .....	37
<b>APPENDIX 3 : Test instruments .....</b>	<b>44</b>
1. Equipment used .....	45
2. Dosimetry assessment setup .....	46
3. Configuration and peripherals .....	47
4. System components .....	48
5. Test system specifications .....	50
6. Simulated Tissues Composition of 5GHz .....	51
7. Validation Measurement .....	51
8. System validation data .....	52
9. Validation uncertainty .....	54
10. Validation Measurement data .....	55
11. System Validation Dipole (D5GHzV2,S/N: 1020) .....	57
12. Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507) .....	68
13. References .....	77

## **SECTION 1 : Client information**

Company Name	Panasonic Communications Co., Ltd.
Brand name	Panasonic
Address	1-62, 4-chome Minoshima, Hakata-ku, Fukuoka 812-8531, Japan
Telephone Number	+81-92-477-1405
Facsimile Number	+81-92-477-1487
Contact Person	Kunihiko Nawata

## **SECTION 2 : Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment	Cordless Telephone (Handset)
Model No.	KX-TGA600 (Handset)
Serial No.	2
Country of Manufacture	Japan
Battery	Model Name : HHR-P107
	Rating : DC3.6V/650mAh
	Manufacture Panasonic
Option Battery	N/A
Condition of EUT	Engineering Prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Operation Clock	Main clock : 13.824 MHz
Accessories	Typical headset
Size	W46mm×D151mm×H30mm
Receipt Date of Sample	September 29, 2006
Modification of EUT	No modification by the test lab.
Category Identified	Portable device

### **2.2 Product Description**

Equipment Type	Transceiver
Frequency band	Lower Channel: 5759.702MHz Upper Channel: 5838.187MHz
Bandwidth & Channel spacing	Bandwidth: 79MHz Channel spacing: 892kHz
Max.Peak power tested	20.3[dBm] (107.2mW)
Type of Modulation	FSK (FHSS)
Antenna Type	5/8 lambda Pattern-Antenna
Antenna Gain	4dBi Typ.
Power Supply (RF Part)	DC3.6V
Method of Frequency Generation	Synthesizer

---

### **SECTION 3 : Test standard information**

#### **3.1 Requirements for compliance testing defined by the FCC**

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).

2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

### 3.2 Exposure limit

#### (A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

#### (B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

**Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE  
SPATIAL PEAK(averaged over any 1g of tissue) LIMIT  
1.6 W/kg**

## **SECTION 4 : Test result**

### **4.1 Result of Max. SAR value**

Max. SAR Measured :       Head   0.090 W/kg (5759.70240MHz)  
                                  Body   0.639 W/kg (5759.70240MHz)

### **4.2 Test Location**

UL Apex Co., Ltd. Head Office EMC Lab.  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8116  
Facsimile : +81 596 24 8124

## **SECTION 5 : Operation of E.U.T. during testing**

### **5.1 Confirmation before SAR testing**

#### **(i)Correlation of output power**

- Output power is equal to the power in DATA of EMC test. (October 3, 2006).
  - EMC and SAR tests are performed with the same test sample under the same condition.
- The result is shown in Section 7.2.

### **5.2 Confirmation of SAR testing**

The power drift is within  $\pm 5\%$  in the evaluation procedure of SAR testing.  
The result is shown in APPENDIX 2.

### **5.3 Operating modes for SAR testing**

#### **5.3.1 Setting of EUT**

	<p>The frequency band and the modulation used in this test are shown as a following.</p> <p>Frequency band : 5759.702 – 5838.187MHz</p> <p>Channel : 1ch(5759.702MHz) 44ch(5798.053MHz) 89ch(5838.187MHz)</p> <p>Modulation : FSK (FHSS)</p> <p>Crest factor : 5 *</p> <p>Remark* : Because Duty Cycle is 20%, Crest factor becomes "5".</p>
--	--


## 5.4 Description of the head test setup

According to the OET 65 and IEEE1528, this EUT was tested on the “Cheek/Touch” and “Ear/Tilt” positions at the left head and right head section of the SAM phantom.

### 5.4.1 Initial ear position

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom.

The device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”.

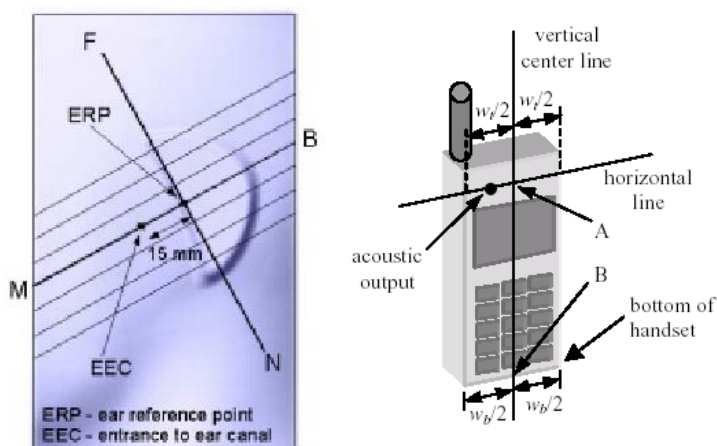


### 5.4.2 Cheek position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

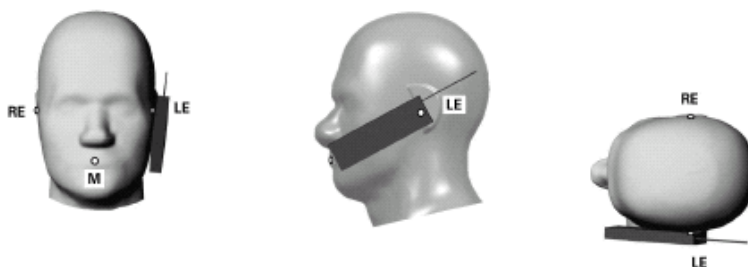

### 5.4.3 Tilt position

If the earpiece of the handset is not in full contact with the phantom's ear spacer and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise the handset should be moved away from the cheek perpendicular to the line passes through both "ear reference points" for approximate 2-3 cm. While it is in this position, the handset is tilted away from the mouth with respect to the "test device reference point" by  $15^{\circ}$ . After the tilt, it is then moved back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than  $15^{\circ}$  so that the device and its antenna would touch the phantom simultaneously.



## **5.5 Description of the Body-worn test setup**

This EUT were tested on the “Front” and “Back” positions at the flat section of SAM phantom.  
The tests were performed in the EUT with the typical headset.

### **5.5.1 Front position**

The test was performed in touch with front surface of the EUT to the flat section of SAM Twin phantom.

### **5.5.2 Back position**

The test was performed in touch with back of the EUT to the flat section of SAM Twin phantom.

## **5.6 Antenna of EUT**

The EUT has two antennas (Ant.1 / Ant.2) and both antennas are built-in antenna.

## **5.7 Method of Head / Body SAR Measurement**

Radiated power is always monitored by Spectrum Analyzer.

### **Head SAR**

Step1. The searching for the worst position (Ant.1 used)

Step2. The searching for the worst position (Ant.2 used)

Step3. The changing to the Low and High channels

This test was performed at the highest SAR position of Step 1, 2.

### **Body SAR**

Step1. The searching for the worst position (Ant.1 used)

Step2. The searching for the worst position (Ant.2 used)

Step3. The changing to the Low and High channels

This test was performed at the highest SAR position of Step 1, 2.

## SECTION 6 : Test surrounding

### 6.1 Measurement uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.8$	Normal	1	1	$\pm 6.8$	$\infty$
Axial isotropy of the probe	$\pm 4.7$	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	$\pm 1.9$	$\infty$
Spherical isotropy of the probe	$\pm 9.6$	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	$\pm 3.9$	$\infty$
Boundary effects	$\pm 2.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.2$	$\infty$
Probe linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
Detection limit	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout electronics	$\pm 0.3$	Normal	1	1	$\pm 0.3$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF ambient Noise	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
RF ambient Reflections	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Probe Positioner	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Probe positioning	$\pm 9.9$	Rectangular	$\sqrt{3}$	1	$\pm 5.7$	$\infty$
Max.SAR Eval.	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
<b>Test Sample Related</b>						
Device positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9$	17
Device holder uncertainty	$\pm 3.6$	Normal	1	1	$\pm 3.6$	5
Power drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid conductivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid conductivity (meas.)	$\pm 5.0$	Rectangular	1	0.64	$\pm 3.2$	$\infty$
Liquid permittivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid permittivity (meas.)	$\pm 5.0$	Rectangular	1	0.6	$\pm 3.0$	$\infty$
<b>Combined Standard Uncertainty</b>					<b><math>\pm 13.45</math></b>	
<b>Expanded Uncertainty (k=2)</b>					<b><math>\pm 26.91</math></b>	

## SECTION 7 : Results of confirmation before SAR testing

### 7.1 Measurement procedure for Output Power

The output power of EUT is confirmed before the SAR test is executed.

#### Output power measurement method

- 1) EUT was placed on a platform of nominal size, and raised 1.0m above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The Radiated Electric Field Strength intensity has been measured in semi anechoic chamber with absorbent materials lined (Type VHP 12) on a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.
- 2) Exchanged the EUT to the Substitution Antenna, the measurement was set for the same height 1.0m as the EUT. The frequency below 1GHz of the Substitution Antenna was used as the Half wave dipole Antenna, which is harmonized with the measured frequency in 1). The frequency above 1GHz of the Substitution Antenna was used with Horn Antenna. The Substitution Antenna was connected with the Signal Generator, and the polarized electromagnetic radiation of the Substitution Antenna was matched with the one of the measuring Antenna, which was set with the Signal Generator to the measured frequency in 1). Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field is equal to the measured value in 1). The measuring antenna height was varied between 1 to 4m to obtain the maximum receiving level. Its Output power of Signal Generator was recorded.
- 3) Effective radiated power was calculated by subtracting the cable loss and the attenuator loss connected between the Signal Generator and the Substitution Antenna from the Output power of the Signal Generator recorded in 2). For the usage of the Antenna (Horn Antenna) except for the Half wave dipole Antenna (2.15dBi) for the Substitution Antenna, the Effective radiated power was calculated by compensating the finite difference in the Antenna gain of the Half wave dipole Antenna, and Substitution Antenna.

### 7.2 Output Power

		UL-Apex Co.,Ltd.	
		Head Office EMC Lab. No.3 Semi Anechoic Chamber	
Company	: Panasonic Communications Co., Ltd.	Regulation	: FCC15.247(b)(1)/RSS-210A8.4(3)
Equipment	: Cordless Telephone (Handset)	Test Distance	: 3m
Model	: KX-TGA600 (Handset)	Date	: 10/03/2006
S/N	: 2	Temperature	: 24 deg.C.
:			
Power	: DC3.6V	Humidity	: 62 %
Mode	: Tx (Hopping off), Worst Ant : Ant2	Engineer	: Kenichi Adachi
Refer to RADIO TEST Report (27BE0153-HO-A).			

No.	Frequency [MHz]	Electric Field Strength (After Factor Calculation) [dBuV/m]		SG Reading [dBm]		Tx Cable Loss [dB]	Tx Ant. Gain [dBi]	Tx Ant. ATT. Loss [dB]	RESULT (EIRP) [dBm]	
		HOR	VER	HOR	VER				HOR	VER
1	5759.70	118.9	120.5	10.7	12.3	5.0	13.0	0.0	18.7	20.3
2	5798.05	118.5	118.9	10.3	10.7	5.0	13.0	0.0	18.4	18.7
3	5838.19	117.7	118.9	9.6	10.8	5.0	13.1	0.0	17.6	18.8

CALCULATION RESULT = SG Reading - Tx Loss + Tx Ant. Gain - Tx Ant. ATT. Loss  
Rx-ANTENNA : Biconical Antenna(30-300MHz), Logperiodic Antenna(300-1000MHz), Horn Antenna(1-26.5GHz)  
Tx-ANTENNA : Shorted Dipole Antenna(30-120MHz), Dipole Antenna(120-1000MHz), Horn Antenna(1-26.5GHz)  
Result is calculated to two places of decimals. Therefore, there may be 0.1 difference for the result.  
With the result above, the effective radiated power was calculated on the basis of the reference value  
- for the calibration data on the substitution measurement.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 8 : Measurement results

### 8.1 SAR measurement results

All of power drifts were within  $\pm 5\%$ . The measurement data is shown the "APPENDIX 2".

#### 8.1.1 Head SAR 5800MHz

Liquid Depth (cm)	: 15.0	Model	: KX-TGA600
Parameters	: $\epsilon_r = 33.7$ , $\sigma = 5.49$	Serial No.	: 1
Ambient temperature (deg.c.)	: 25	Modulation	: FSK (FHSS)
Relative Humidity (%)	: 55	Crest factor	: 5
Date	: October 4, 2006	Measured By	: Hisayoshi Sato

HEAD SAR MEASUREMENT RESULTS									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Step1. Position search (Ant.1 used)									
44	5798.053	FHSS	Left Head	Ant. 1	Cheek	0	24.5	24.5	0.053
44	5798.053	FHSS	Left Head	Ant. 1	Tilt	0	24.5	24.5	0.047
44	5798.053	FHSS	Right Head	Ant. 1	Cheek	0	24.6	24.6	0.066
44	5798.053	FHSS	Right Head	Ant. 1	Tilt	0	24.6	24.6	0.057
Step2. Position search (Ant.2 used)									
44	5798.053	FHSS	Left Head	Ant.2	Cheek	0	24.6	24.6	0.055
44	5798.053	FHSS	Left Head	Ant.2	Tilt	0	24.6	24.6	0.043
44	5798.053	FHSS	Right Head	Ant.2	Cheek	0	24.5	24.5	0.057
44	5798.053	FHSS	Right Head	Ant.2	Tilt	0	24.5	24.5	0.070
Step3. Frequency Change									
1	5759.702	FHSS	Right Head	Ant.2	Tilt	0	24.5	24.5	0.090
89	5838.187	FHSS	Right Head	Ant.2	Tilt	0	24.5	24.5	0.058
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						Head SAR: 1.6 W/kg (averaged over 1 gram)			

\* See Appendix 2 for measurement data plots.

## 8.1.2 Body-worn 5800MHz SAR

Liquid Depth (cm) : 15.0      Model : KX-TGA600  
Parameters :  $\epsilon_r = 46.0$ ,  $\sigma = 6.19$       Serial No. : 1  
Ambient temperature (deg.c.) : 25      Modulation : FSK (FHSS)  
Relative Humidity (%) : 60      Crest factor : 5  
Date : October 5, 2006      Measured By : Miyo Ikuta

BODY-WORN SAR MEASUREMENT RESULTS									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Step1. Position search (Ant.1 used)									
44	5798.053	FHSS	Flat	Ant.1	Front	0	24.8	24.8	0.061
44	5798.053	FHSS	Flat	Ant.1	Back	0	24.8	24.8	0.019
Step2. Position search (Ant.2 used)									
44	5798.053	FHSS	Flat	Ant.2	Front	0	24.5	24.5	0.083
44	5798.053	FHSS	Flat	Ant.2	Back	0	24.5	24.5	0.340
Step3. Frequency Change									
1	5759.702	FHSS	Flat	Ant.2	Back	0	24.5	24.5	0.639
89	5838.187	FHSS	Flat	Ant.2	Back	0	24.5	24.5	0.388
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						Head SAR: 1.6 W/kg (averaged over 1 gram)			

\* See Appendix 2 for measurement data plots.