



Test report no. : 160537-7

Item tested : KX-TGA659

Type of equipment : UPCS Handset

FCC ID : ACJ96NKX-TGA659

Client : Panasonic System Networks Co., Ltd.

FCC Part 15, subpart D

Isosynchronous UPCS Device
1920 - 1930 MHz

Industry Canada RSS-213, Issue 2

2 GHz Licence-exempt Personal
Communications Service Devices
(LE-PCS)

9 December 2010

Authorized by : 

G. Suhantakumar
Technical Verificator

CONTENTS

1	GENERAL INFORMATION	3
1.1	Testhouse Info	3
1.2	Client Information	3
1.3	Responsible Manufacturer (if other than client)	3
2	TEST INFORMATION	4
2.1	Tested Item	4
2.2	Description of Tested Device	4
2.3	Exposure Evaluation	4
2.4	Test Environment	5
2.5	Test Period	5
2.6	Test Engineer(s)	5
2.7	Test Equipment	5
2.8	Other Comments	5
3	TEST REPORT SUMMARY	6
3.1	General	6
3.2	Test Summary	7
4	TEST RESULTS	8
4.1	Power Line Conducted Emissions	8
4.2	Coordination with fixed microwave	11
4.3	Digital Modulation Techniques	11
4.4	Labeling Requirements	11
4.5	Antenna Requirement	12
4.6	Channel Frequencies	12
4.7	Peak Power Output	13
5	TEST SETUPS	16
5.1	Power Line Conducted Emissions Test	16
5.2	Radiated Emissions Test, Fully Anechoic Chamber	16
6	TEST EQUIPMENT USED	17

1 GENERAL INFORMATION

1.1 Testhouse Info

Name : Nemko AS
Address : Nemko Kjeller
 Instituttveien 6
 N-2007 Kjeller, NORWAY
Telephone : +47 64 84 57 00
Fax : +47 64 84 57 05
E-mail: comlab@nemko.com
FCC test firm registration # : 994405
IC OATS registration # : 2040D-1
Total Number of Pages: 17

1.2 Client Information

Name : Panasonic System Networks Co., Ltd.
Address : 1-62, 4-Chome, Minoshima, Hakata-ku, Fukuoka 812-8531 Japan
Telephone : +81-92-477-1405
Fax : +81-92-477-1487

Contact:

Name : Mr. Junji Sumi
Telephone : +81 92 477 1405
E-mail : sumi.junji@jp.panasonic.com

1.3 Responsible Manufacturer (if other than client)

Name : /
Address : /

2 Test Information

2.1 Tested Item

Name :	Panasonic
Model name :	KX-TGA659
FCC ID :	ACJ96NKX-TGA659
Industry Canada ID :	216A-KXTGA659
Serial number :	/
Hardware identity and/or version:	/
Software identity and/or version :	/
Tested to IC Radio Standard (RSS) :	RSS-213 Issue 2, RSS-GEN Issue 3
Test Site IC Reg. Number :	IC 2040D-1
Frequency Range :	1921.536 – 1928.448 MHz
Number of Channels :	5 RF Channels, 5x12 = 60 TDMA Duplex Channels
Type of Modulation :	Digital (Gaussian Frequency Shift Keying)
Peak Output Power :	112 mW (Conducted)
Antenna Connector :	None (Integral antennas)
Number of Antennas :	1
Antenna Diversity Supported :	No
Desktop Charger :	PNLC1015 with AC Adaptors PQLV219(UC) and PQLV219(FW)
Power Supply :	Secondary Batteries (2xAAA NiMH batteries)

2.2 Description of Tested Device

The tested equipment is a DECT handset which complies with ETSI EN 300 175. The frequencies have been reprogrammed, the output power reduced and the software updated to comply with the FCC requirements to an Isochronous UPCS device after FCC Part 15D.

The EUT is an initiating device as described in ANSI C63.17 and is designed to operate together with a DECT fixed part (i.e. a base station), which is then the responding device.

2.3 Exposure Evaluation

The EUT is a portable device and is designed to be held to ear or worn in a belt clip when used. A test reports with the measured SAR values for both configurations are submitted with the application.

2.4 Test Environment

Temperature:	21 – 23 °C
Relative humidity:	15 – 35 %
Normal test voltage:	2.5 V DC

The values are the limit registered during the test period.
All tests were performed with fully charged batteries.

2.5 Test Period

Item received date: 2010-11-04
Test period : from 2010-11-18 to 2010-12-08

2.6 Test Engineer(s)

Frode Sveinsen / Tore Løvlien

2.7 Test Equipment

See list of test equipment in clause 6.

2.8 Other Comments

This test report covers only radiated tests. All other tests are covered by Nemko test report no. 137945-4.
The UPCS Handset covered by this report is identical to the model KX-TGA651 except for the antenna and certain changes to the PCB other than the RF part. This new model also includes two new AC adaptors, Power-Line conducted emissions has therefore also been re-tested.

3 TEST REPORT SUMMARY

3.1 General

Manufacturer: Panasonic
Model No.: KX-TGA659
Serial No.: /

All measurements are traceable to national standards.

The tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR47 Part 15D for Isochronous UPCS Devices and Industry Canada RSS-213 Issue 2 / RSS-GEN Issue 3.

All tests were conducted in accordance with ANSI C63.4-2009 and ANSI C63.17-2006. Antenna Gain tests were made in a 3m fully-anechoic chamber.

A description of the test facility is on file with the FCC and Industry Canada.

- | | |
|---|---|
| <input checked="" type="checkbox"/> New Submission | <input checked="" type="checkbox"/> Production Unit |
| <input type="checkbox"/> Class II Permissive Change | <input type="checkbox"/> Pre-production Unit |
| PUE Equipment Code | <input type="checkbox"/> Family Listing |

THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".



TEST REPORT NO: 160537-7

TESTED BY : Frode Sveinsen
Frode Sveinsen, Chief Engineer

DATE: 8 December 2010

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

3.2 Test Summary

Name of test	FCC CFR 47 Paragraph #	IC RSS-213 Paragraph #	Verdict
Coordination with fixed microwave	15.307(b)	N/A	Complies
Digital Modulation Techniques	15.319(b)	6.1	Complies
Labeling requirements	15.19(a)(3)	RSS-GEN 5.2	Complies
Antenna Requirement	15.317, 15.203	4.1(e)	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	6.3 RSS-GEN 7.2.2	Complies
Peak transmit Power	15.319(c)(e), 15.31(e)	6.5	Complies
Spurious Emissions (Radiated)	15.319(g) 15.109(a) 15.209(a)	4.3.3 RSS-GEN 7.2.3	Complies

4 TEST RESULTS

4.1 Power Line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: Tore Løvlien	Date of Test: 18 Nov 2010
---------------------------------	---------------------------

Measurement procedure: ANSI C63.4-2009 using 50 μ H/50 ohms LISN.

Test Results: Complies


Measurement Data: See attached graph, (Peak detector).

Highest measured value (L1 and N):


AC Adaptor PQLV219(UC): All emissions were below the Average Limit, even when measured with Peak Detector.

AC Adaptor PQLV219(FW):

Frequency	Detector	Measured value	Limit	Margin
KHz	Peak/QP/AV	dB μ V	dB μ V	dB
360.611	QP	47.5	58.7	11.2
	AV	33.7	48.7	15.0

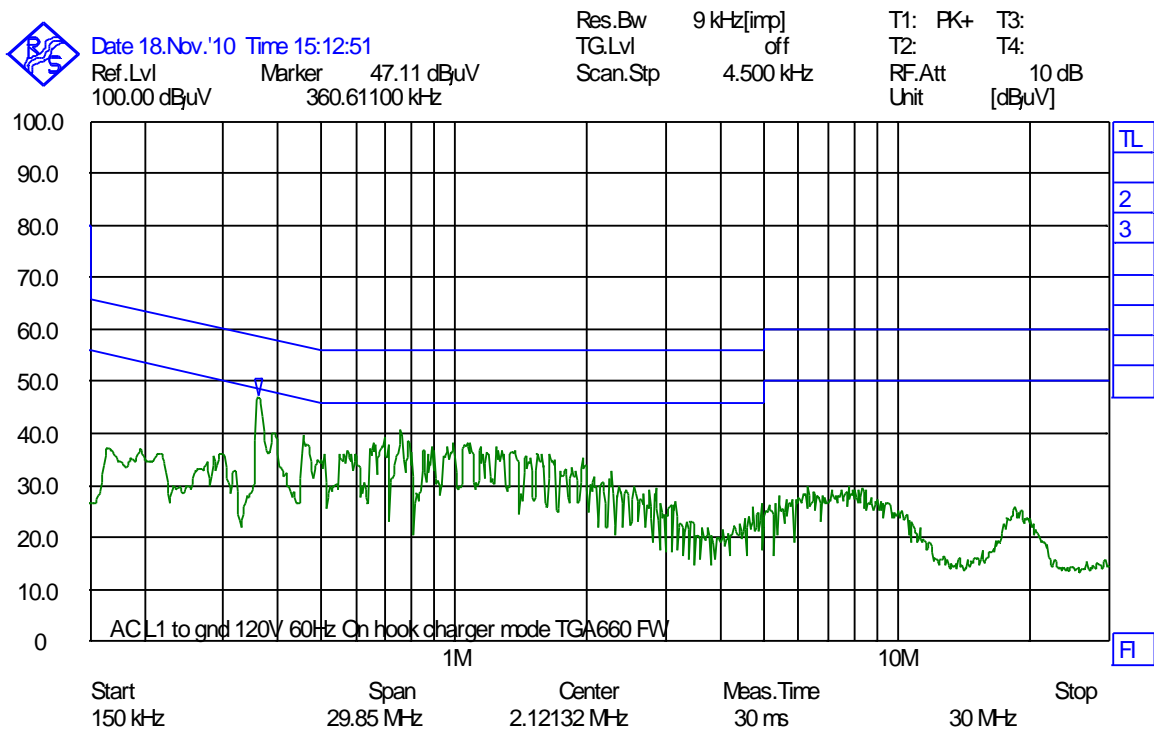

Phase L1, Hook On, Charging, Adaptor PQLV219(FW)

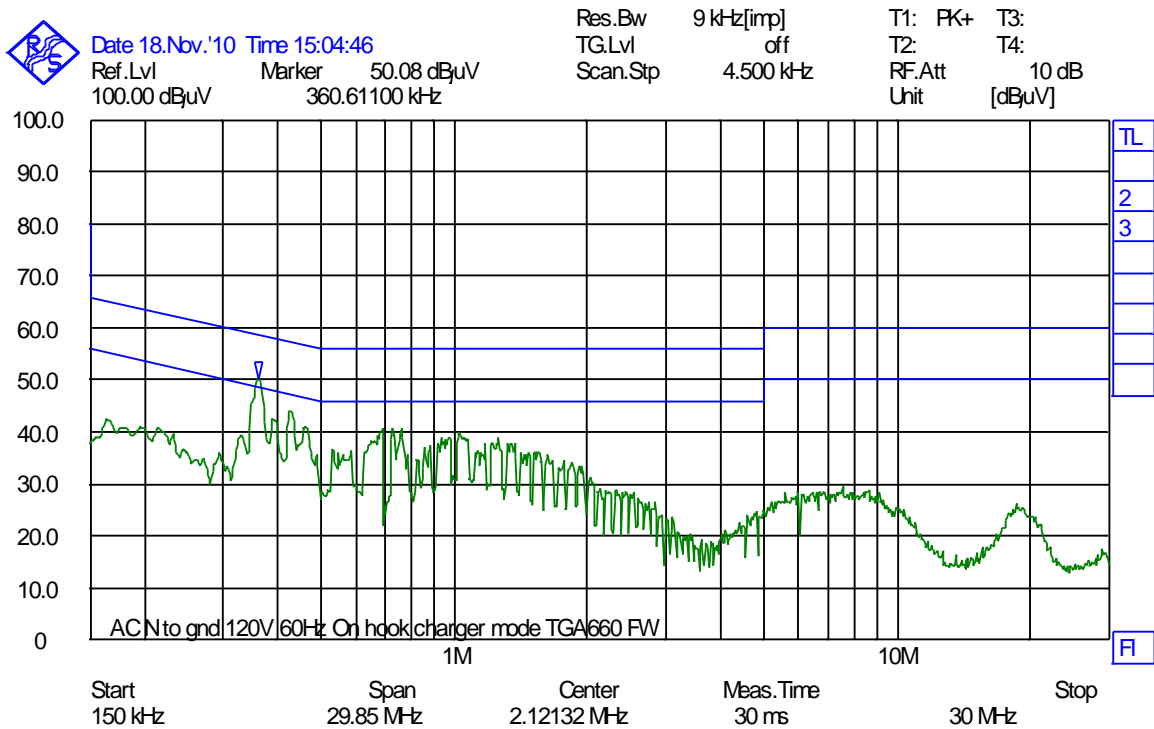


Phase N, Hook On, Charging, Adaptor PQLV219(FW)



Date 18.Nov.'10 Time 15:30:39
 Ref.Lvl
 100.00 dBuV

Res.Bw 9 kHz[imp]
 TG.Lvl off
 Scan.Stp 4.500 kHz

T1: PK+ T3:
 T2: T4:
 RF.Att 10 dB
 Unit [dBuV]

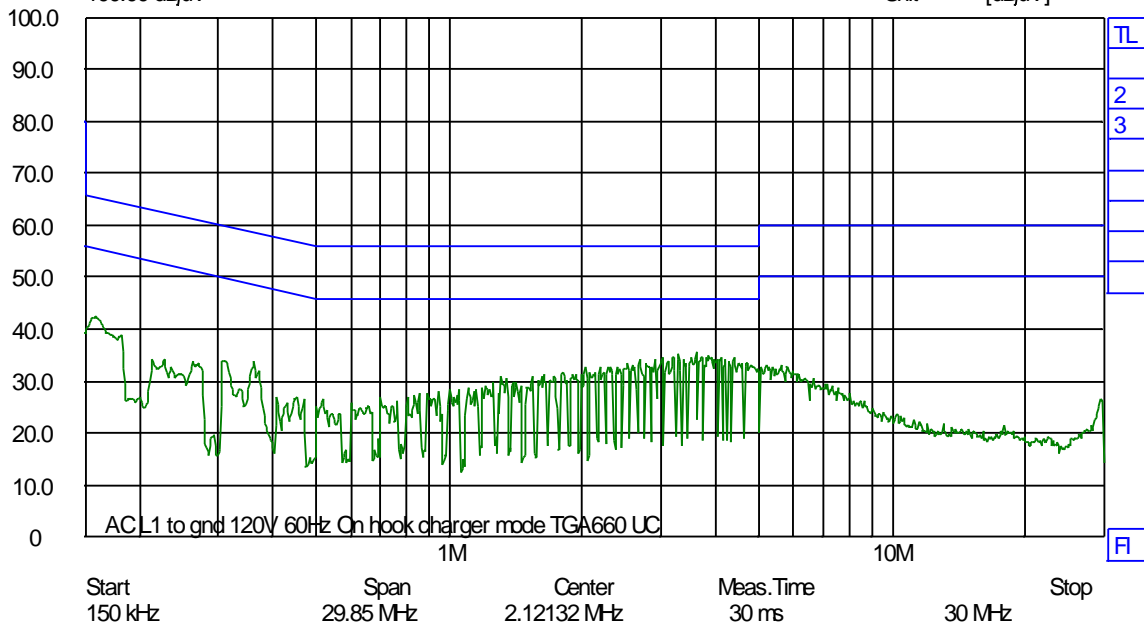


Phase L1, Hook On, Charging, Adaptor PQLV219(UC)



Date 18.Nov.'10 Time 15:23:59
 Ref.Lvl
 100.00 dBuV

Res.Bw 9 kHz[imp]
 TG.Lvl off
 Scan.Stp 4.500 kHz

T1: PK+ T3:
 T2: T4:
 RF.Att 10 dB
 Unit [dBuV]

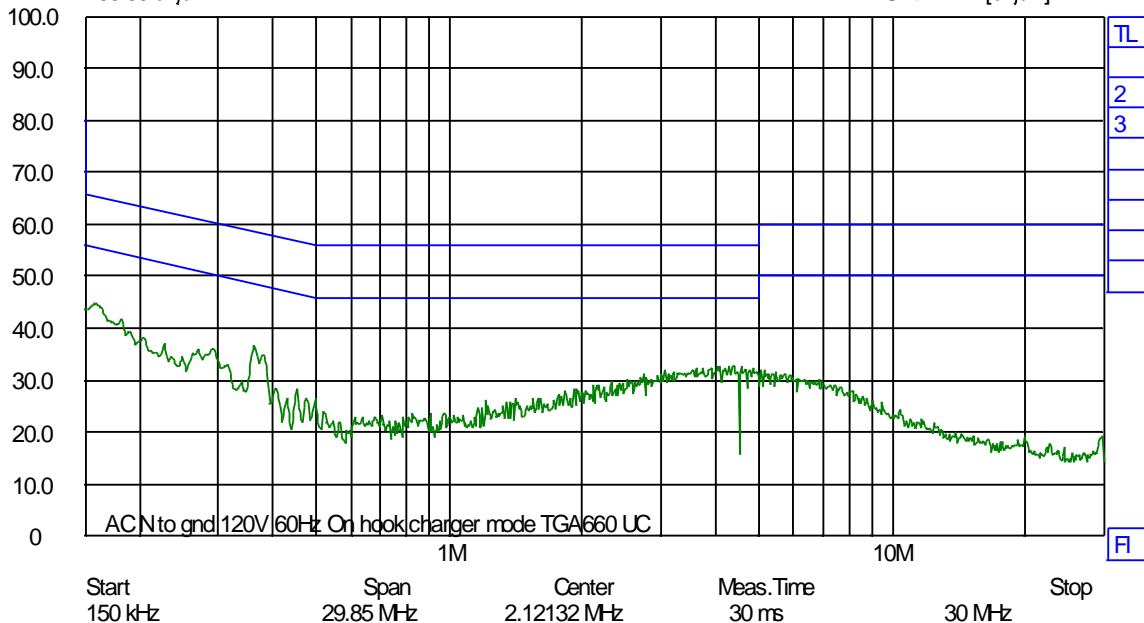

Phase N, Hook On, Charging, Adaptor PQLV219(UC)

4.2 Coordination with fixed microwave

The affidavit from UTAM, Inc. is included in the documentation supplied by the applicant:

Yes

No

Requirement, FCC 15.307 (b):

Each application for certification of equipment operating under the provisions of this Subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the Commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.

4.3 Digital Modulation Techniques

The tested equipment is based on DECT technology described in the ETSI standard EN 300175, the only difference is that the channel allocation is modified to operate in the 1920-1930 MHz band.

The EUT used Multi Carrier / Time Division Multiple Access / Time Division Duplex and Digital GFSK modulation.

For further details see the operational description provided by the applicant.

Requirement, FCC 15.319(b):

All transmissions must use only digital modulation techniques.

4.4 Labeling Requirements

See separate documents showing the label design and the placement of the label on the EUT.

Requirements FCC 15.19

The FCC Identifier shall be displayed on the label, and the device(s) shall bear the following statement in a conspicuous location on the device or in the user manual if the device is too small:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label itself shall be of a permanent type, not a paper label, and shall last the lifetime of the equipment.

4.5 Antenna Requirement

Does the EUT have detachable antenna(s)? Yes No

If detachable, is the antenna connector(s) non-standard? Yes No

The tested equipment has only integral antennas. The conducted tests were performed on a sample with a temporary antenna connector.

Requirement: FCC 15.203, 15.204, 15.317.

4.6 Channel Frequencies

UPCS CHANNEL	FREQUENCY (MHz)
Upper Band Edge	1930.000
0 (Highest)	1928.448
1	1926.720
2	1924.992
3	1923.264
4 (Lowest)	1921.536
Lower Band Edge	1920.000

Requirement: FCC 15.303 (d), (g)

Within 1920 -1930 MHz band for isochronous devices.

4.7 Peak Power Output

Test Method:

ANSI C63.17, clause 6.1.2.

Test Results: Complies

Measurement Data:

Maximum Conducted Output Power

Channel No.	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Maximum Radiated Output Power (dBm)	Maximum Antenna Gain (dBi)
4	1921.536	20.5	19.1	-1.4
2	1924.992	20.4	19.5	-0.9
0	1928.448	20.4	19.3	-1.1

Conducted values are from Nemko report no. 137945-4.

The Radiated Output Power is measured as Output Power with correction factors stored in the Spectrum Analyzer.

Limit:

Conducted: $100 \mu\text{W} \times \text{SQRT}(B)$ where B is the measured Emission Bandwidth in Hz

FCC 15.319(c)(e): 21.85 dBm (153 mW)

RSS-213, Issue 2: 20.53 dBm (113 mW)


The antenna gain is below 3 dBi, no reduction in transmit power is necessary.

Requirements, FCC 15.319(c)(e), RSS-213, Issue 2

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hertz.


The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Radiated Peak Output Power

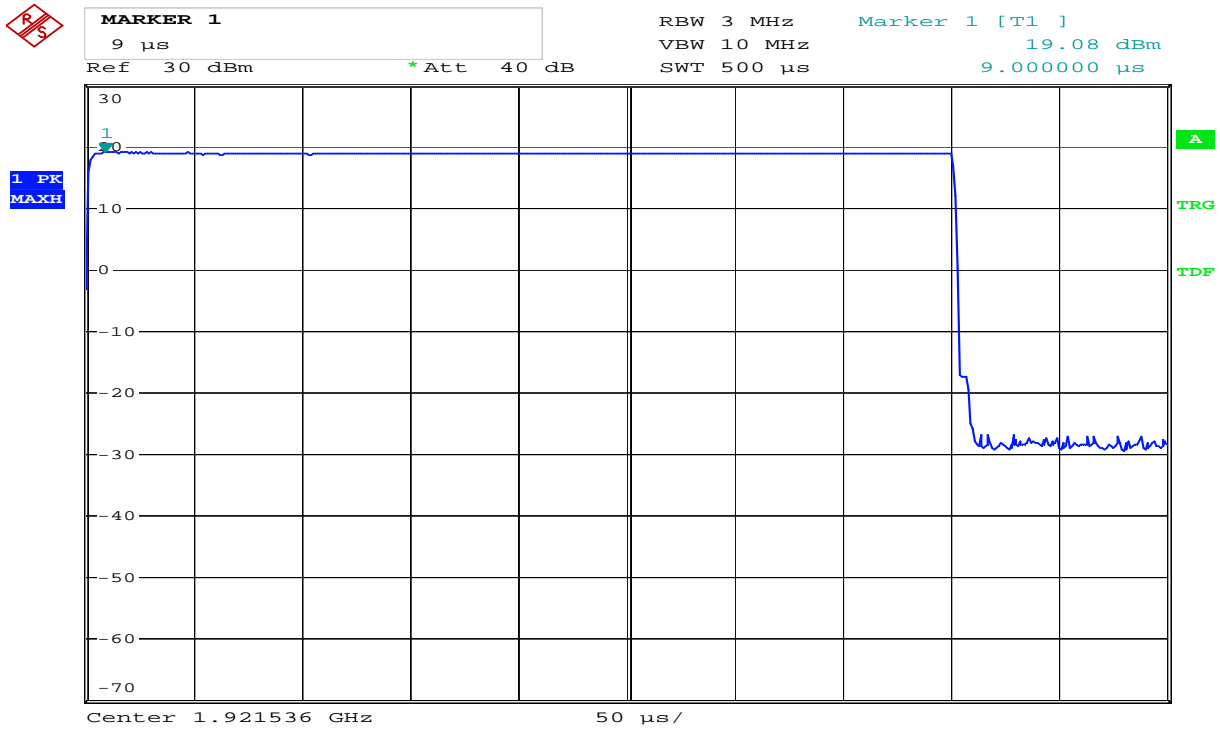

Date: 18.NOV.2010 14:38:45

Lower Channel (Max: EUT H1, HP)

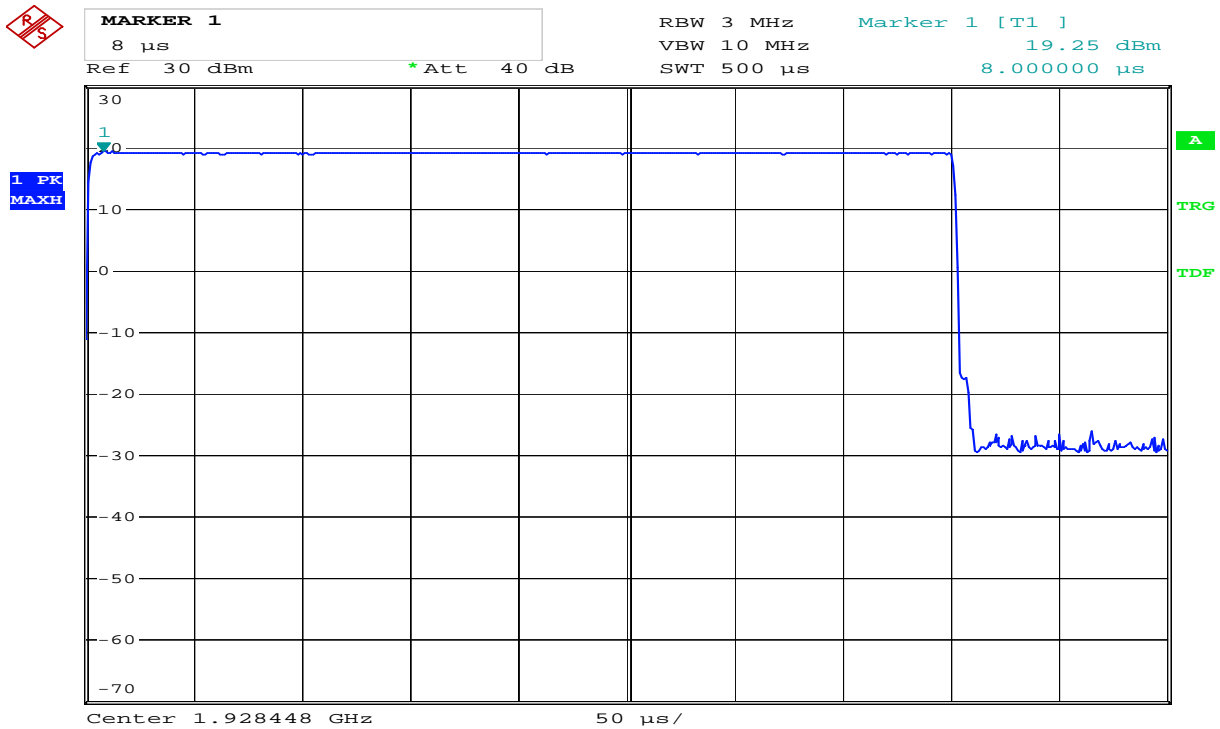


Date: 18.NOV.2010 14:36:27

Upper Channel (Max: EUT H1, HP)



MARKER 1
 7 μ s
 Ref 30 dBm *Att 40 dB

RBW 3 MHz Marker 1 [T1]
 VBW 10 MHz 19.53 dBm
 SWT 500 μ s 7.000000 μ s

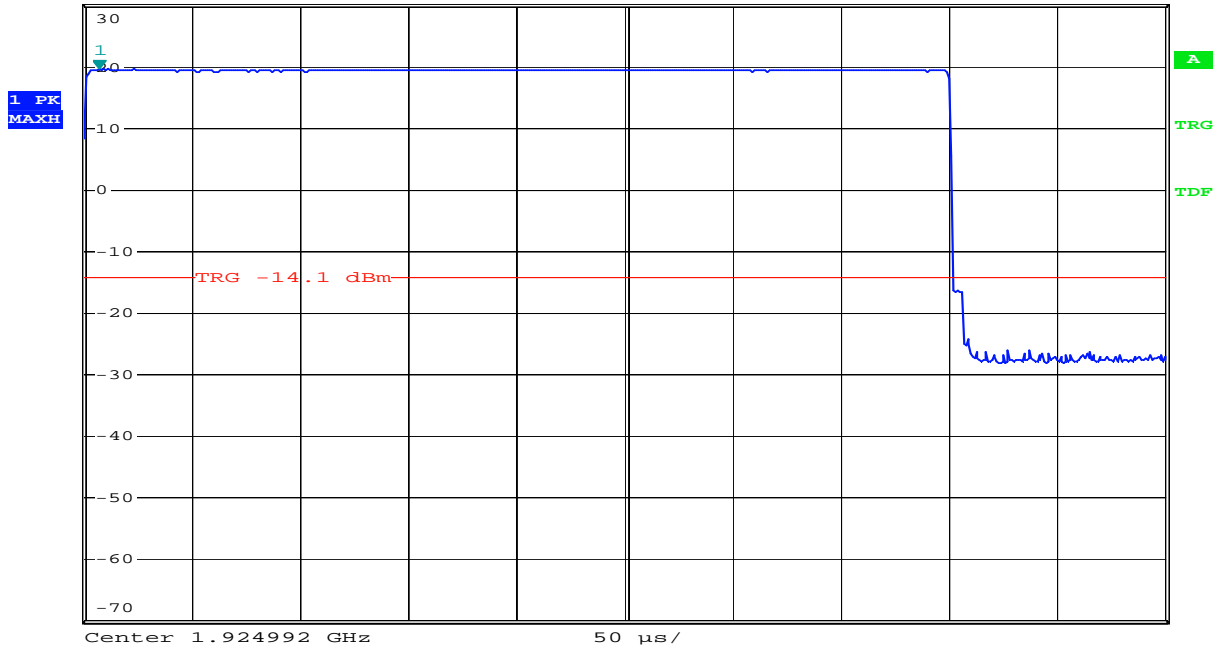


Date: 8.DEC.2010 10:45:33

Middle Channel (Max: EUT H1, HP)

5 Test Setups


5.1 Power Line Conducted Emissions Test

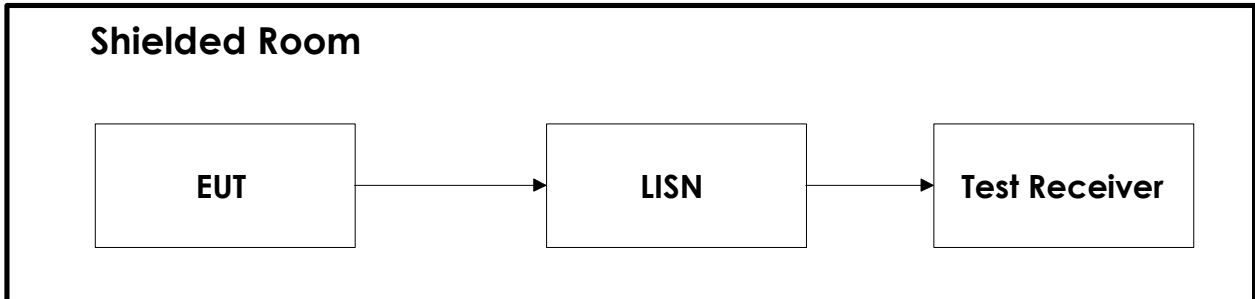

Test equipment: 2, 4, 5, 10

Test Set-Up 5

5.2 Radiated Emissions Test, Fully Anechoic Chamber

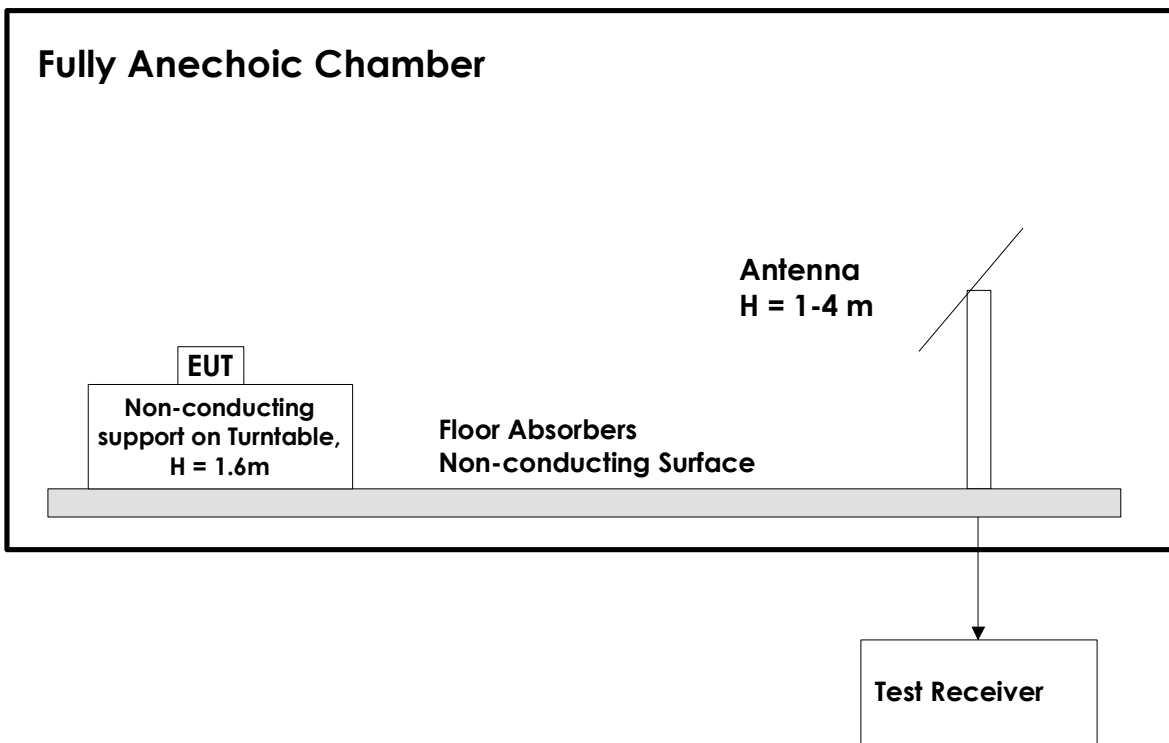

Test equipment: 6, 7, 8, 9, 14

Test Set-Up 7

This test setup is used for measuring radiated output power. The measurements are performed in a 3m Fully Anechoic Chamber with a Spectrum Analyzer and Horn Antenna, a preamplifier may be used after the antenna. The measuring distance is 3m.

6 Test Equipment Used

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Testhouse.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	FSU26	Spectrum Analyzer	Rohde & Schwarz	LR 1504	2010.09.28	2012.09.28
2	ESAI	Measuring Receiver	Rohde & Schwarz	LR 1090	2010.03.04	2012.03.04
3	6810.17B	Attenuator	Suhner	LR1212	2010.09.15	2012.09.15
4	ESH3-Z5	Two Line V-Network	Rohde & Schwarz	LR 1076	2009.10.22	2011.10.22
5	80S	Signal Generator	Powertron	LT 502	Cal b4 use	
6	6812B	AC Power Source	Agilent	LR 1515	2010.04.13	2011.04.13
7	FSP30	Spectrum Analyzer	Rohde & Schwarz	LR 1551	2009-02	2011-2
8	JS3	Pre-Amplifier	Miteq	LR 1552	2009.03.18	2011.03.18
9	U2000A	USB Power Sensor	Agilent	LR 1523	2010.01.15	2011.01.15
10	ESH3-Z2	Pulse Limiter	Rohde & Schwarz	LR 1074	2010.03.03	2012.03.03
11	ESCI	Measuring Receiver	Rohde & Schwarz	N-4259	2010.11.03	2011.11.03
12	HK116	Biconical Antenna	Rohde & Schwarz	LR 1260	2010.05.12	2013.05.12
13	HL223	Log Period Antenna	Rohde & Schwarz	LR 1261	2010.05.12	2013.05.12
14	HL562	BiLog Antenna	Rohde & Schwarz	LR 1499	2010.08.16	2011.08.16