



toll-free: (866) 311-3268
fax: (480) 926-3598

<http://www.ComplianceTesting.com>
info@ComplianceTesting.com

Test Report

Prepared for: Panasonic Corporation of North America

Model: WJ-VPU4000

Description: Network Recorder

FCC ID: ACJ9TAWJ-VPU4000
IC: 216A-WJVPU4000

To

FCC Part 15.247
IC RSS-247 Issue 2

Date of Issue: March 3rd 2021

On the behalf of the applicant:

Panasonic i-PRO Sensing Solutions Corporation of America
1701 Golf Rd., Suite 3-600
Rolling Meadows, IL 60008

Attention of:

Michael Baumann, Product Manager
Ph: 636-751-2469
E-mail: michael.baumann@us.panasonic.com

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p1120005

Alex Macon
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested.

Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	March 3, 2021	Alex Macon	Original Document
2.0	March 31, 2021	Alex Macon	Updated bandwidth data
3.0	April 11, 2021	Alex Macon	Updated bandwidth plots

Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions Engineering Practices	6
Conducted Output Power	9
Conducted RF Measurements (15.209).....	10
Radiated Spurious Emissions	11
Conducted Spurious Emissions	12
DTS Bandwidth	13
Transmitter Power Spectral Density (PSD).....	17
A/C Powerline Conducted Emission	Error! Bookmark not defined.
Test Equipment Utilized	18

ANAB

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A

The applicant has been cautioned as to the following

15.21 - Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) - Special Accessories

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Standard Test Conditions Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.10-2013 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
23.2 – 27.2	24 – 37.5	965– 971.8

EUT Description

Model: WJ-VPU4000

Description: Network Recorder

Firmware: N/A

Software: N/A

Serial Number: 2S47

Additional Information:

The EUT was tested conducted mode with RF connectors mounted on the EUT at the antenna input.

The EUT is comprised of two identical 2x2 WiFi modules and a BLE radio. The modules are utilized in separate modes, with different clients and are completely uncorrelated. The module that operates in “Station” mode utilizes 2.4 GHz, 5250 – 5350, 5470 – 5725 and 5725 – 5850. The module that operates in “AP” mode utilizes 2.4 GHz and 5725 – 5850 MHz

The EUT is intended to be mounted in a vehicle and is powered by the vehicles DC voltage.

EUT Operation during Tests

The EUT was placed into a test mode to enable constant transmit with >98% duty cycle.

The EUT was monitored while all radios were transmitting to ensure no additional intermodulation emissions were present.

Accessories:

Qty	Description	Manufacturer	Model	S/N
1	USB to RS232 converter	US Converters	XS880	XS2018011998
1	AC/DC Adapter	Shenzhen Boshenggao Technology Co.	BX~1208000	N/A

Cables:

Qty	Description	Length (M)	Shielding Y/N	Shielded Hood Y/N	Ferrite Y/N
1	Serial cable	2	Y	Y	N

Modifications:

15.203: Antenna Requirement:

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply

Test Results Summary

FCC 15.247 Specification	RSS-247 Specification	Test Name	Pass, Fail, N/A	Comments
15.247(b)	Section 5.4(d)	Output Power	Pass	
15.247(d)	Section 5.5	Conducted Spurious Emissions	Pass	
15.247(d), 15.209(a), 15.205	Section 5.5	Radiated Spurious Emissions	Pass	
15.247(d), 15.209(a), 15.205	Section 5.5	Emissions At Band Edges	Pass	
15.247(a)(2)	Sections 5.2(a)	Occupied Bandwidth	Pass	
15.247(e)	Section 5.2(b)	Transmitter Power Spectral Density	Pass	
15.207	RSS-GEN Section 8.8	A/C Powerline Conducted Emissions	N/A	EUT does not connect to the AC mains

References	Description
CFR47, Part 15, Subpart B	Unintentional Radiators
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63.10-2013	American National standard for testing Unlicensed Wireless Devices
ANSI C63.4-2014	Method and Measurements of Radio-Noise Emissions from low-Voltage Electrical and Electronic Equipment in the range 9kHz to 40GHz.
ISO/IEC 17025:2005	General requirements for the Competence of Testing and Calibrations Laboratories
KDB 558074 D01 v04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

Conducted Output Power

Engineer: Alex Macon

Test Date: 1/19/2021


Test Procedure

The EUT was connected directly to a spectrum analyzer. The Spectrum Analyzer was set to the following:

- RBW = 1-5% of the OBW, not to exceed 1MHz
- VBW \geq 3 x RBW
- RMS Detector
- Number of points in sweep \geq 2 x span / RBW
- Trace average at least 100 traces in power averaging mode
- Sweep = auto
- Span = 1.5 x EBW

The EUT was set to transmit on the lowest, middle and highest frequencies at the maximum power level. The RF output power was measured using the spectrum analyzer’s channel power function

Test Setup



Transmitter Output Power

Tuned Frequency (MHz)	Measured Value (dBm)	Specification Limit	Result
2402	5.73	1 W (30 dBm)	Pass
2442	6.76	1 W (30 dBm)	Pass
2480	6.32	1 W (30 dBm)	Pass

Conducted RF Measurements (15.209)

Engineer: Alex Macon

Test Date: 1/28/2021

Test Procedure

Antenna-port conducted measurements were performed as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands for 15.209.

The following offsets were added to the measurements:

The maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level

A maximum ground reflection factor to the EIRP level, 6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz.

The following equations were used to determine the field strength from the conducted values.

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and $d = 3\text{m}$

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters.

The Spectrum Analyzer was set to the following:

The Spectrum Analyzer was set to the following for emissions > 1000 MHz:


- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak.
- Sweep time = auto
- Trace mode = max hold
 - Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- RBW = 1 MHz
- VBW $\leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz

For emissions below 1000 MHz the Spectrum Analyzer settings were as follows:

- RBW = 100 kHz
- VBW ≥ 300 kHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

The EUT was connected to a spectrum analyzer to verify that the EUT met the requirements for spurious emissions. The EUT was set to transmit on the lowest, middle and highest frequencies at the maximum power level. The frequency range from 30 MHz to the 10th harmonic of the fundamental transmitter was investigated.

Test Setup



See Annex A for test data

Radiated Spurious Emissions

Engineer: Alex Macon

Test Date: 2/16/2021

**Test Procedure
Radiated Spurious Emissions: 30 – 1000 MHz**

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The output of the transmitter was connected to a non-radiating balance load. The EUT was set to transmit on the lowest, middle and highest frequencies at the maximum power level. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360° with the antennas in both the vertical and horizontal orientation and was raised from 1 to 4 meters to ensure the TX signal levels were maximized.

All emissions from 30 MHz to 1 GHz were examined and no spurious emissions were observed. An example plot is included in annex B

Measured Level includes antenna and receiver cable correction factors.


Correction factors were input into the spectrum analyzer before recording “Measured Level”.

RBW = 100 KHz

VBW = 300 KHz

Detector – Quasi Peak


Test Setup



**Test Procedure for
Radiated Spurious Emissions above 1 GHz**

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The output of the transmitter was connected to a non-radiating balance load. The EUT was set to transmit on the lowest, middle and highest frequencies at the maximum power level. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360° with the antennas in both the vertical and horizontal orientation and was raised from 1 to 4 meters to ensure the TX signal levels were maximized.

Test Setup

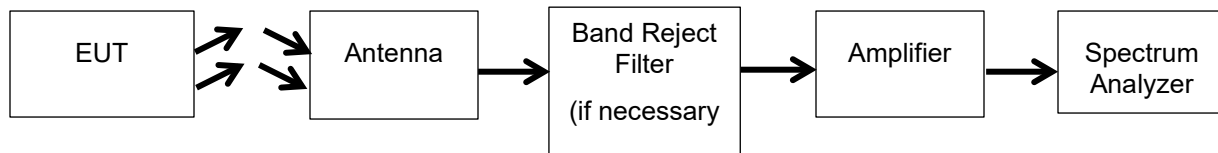

See Annex B for Test Data

Conducted Spurious Emissions

Engineer: Alex Macon

Test Date: 1/20/2021

Test Procedure

The EUT was connected directly to a spectrum analyzer. The Spectrum Analyzer was set to the following:

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Peak Detector


Trace mode = max hold

Sweep = auto couple

Frequency Range = 30MHz – 10th Harmonic of the fundamental

The EUT was set to transmit on the lowest, middle and highest frequencies at the maximum power level. The trace was allowed to stabilize. All emission were investigated to insure they were attenuated from the peak fundamental by at least 20dB. If the average power levels were measured then the out-of-band emissions needed to be attenuated by 30dB. In addition emissions were investigated at the band edges to insure all out-of-band emissions were attenuated 20 or 30dB as necessary.

Test Setup



See Annex A for Test Data

DTS Bandwidth

Engineer: Alex Macon

Test Date: 1/19/21


Test Procedure

The EUT was connected directly to a spectrum analyzer. The Spectrum Analyzer was set to the following:

- RBW = 100 kHz
- VBW \geq 3 x RBW
- Peak Detector
- Trace mode = max hold
- Sweep = auto couple
- Span = 1.5 x EBW



The EUT was set to transmit at the lowest, middle and highest channels of the band at the maximum power levels. The maximum width of the emission that was determined by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that were attenuated by 6db and this value was used to determine the width of the carrier. Alternatively the spectrum analyzer’s automatic bandwidth capability was used.



Test Setup




Occupied Bandwidth Summary

Frequency (MHz)	99% Measured Bandwidth (MHz)	6dB Measured Bandwidth (kHz)	Specification Limit (kHz)	Result
2402	1.066	696.66	\geq 500	Pass
2442	1.067	738.25	\geq 500	Pass
2480	1.067	691.46	\geq 500	Pass

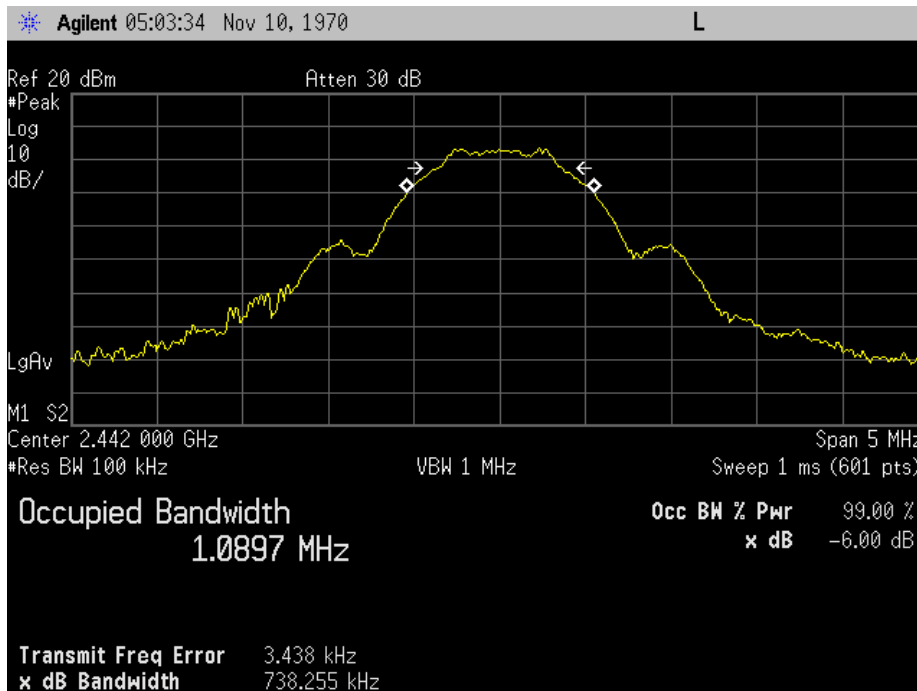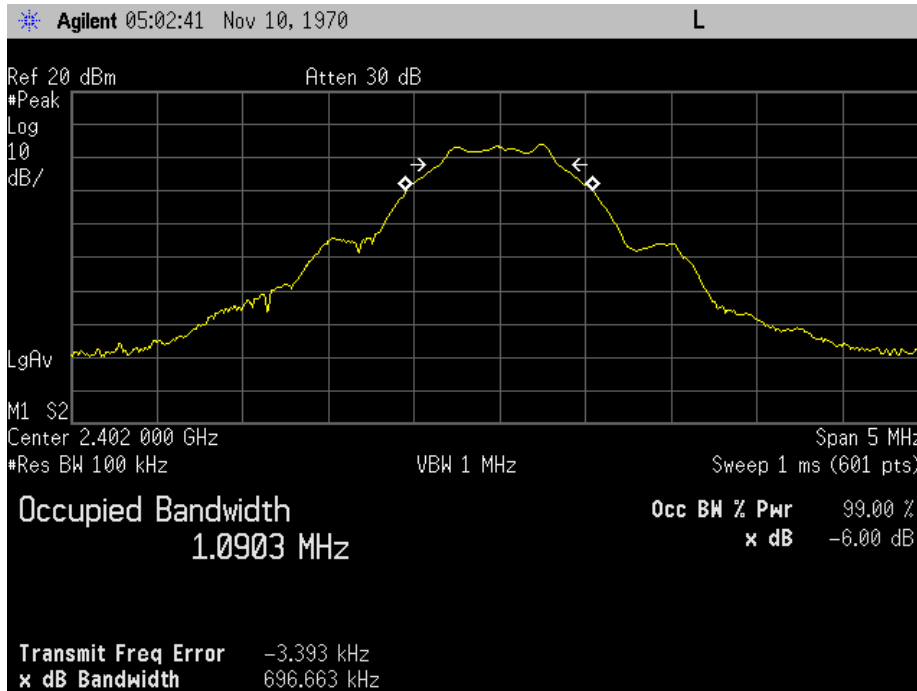

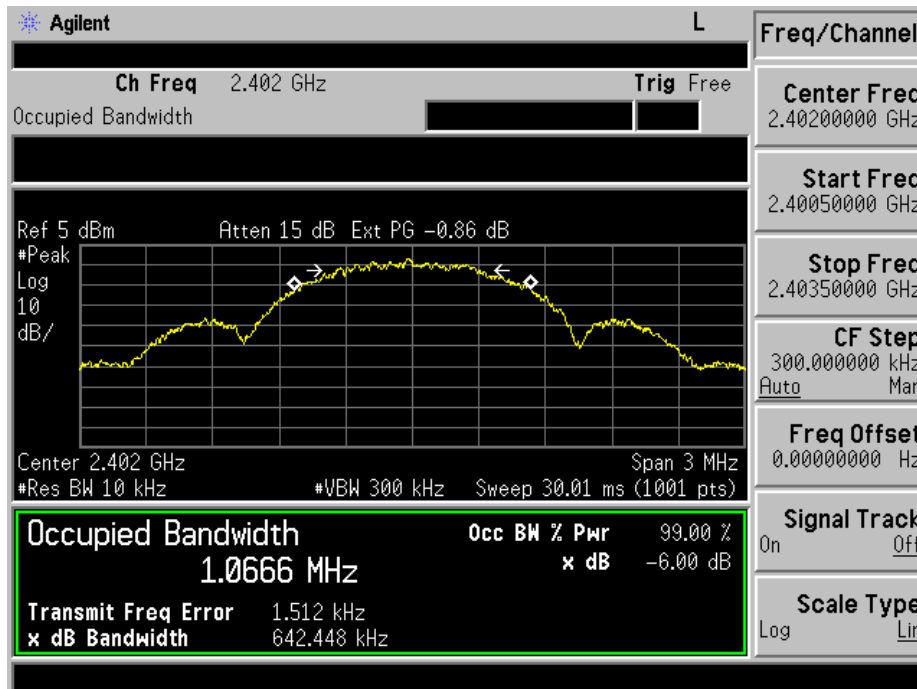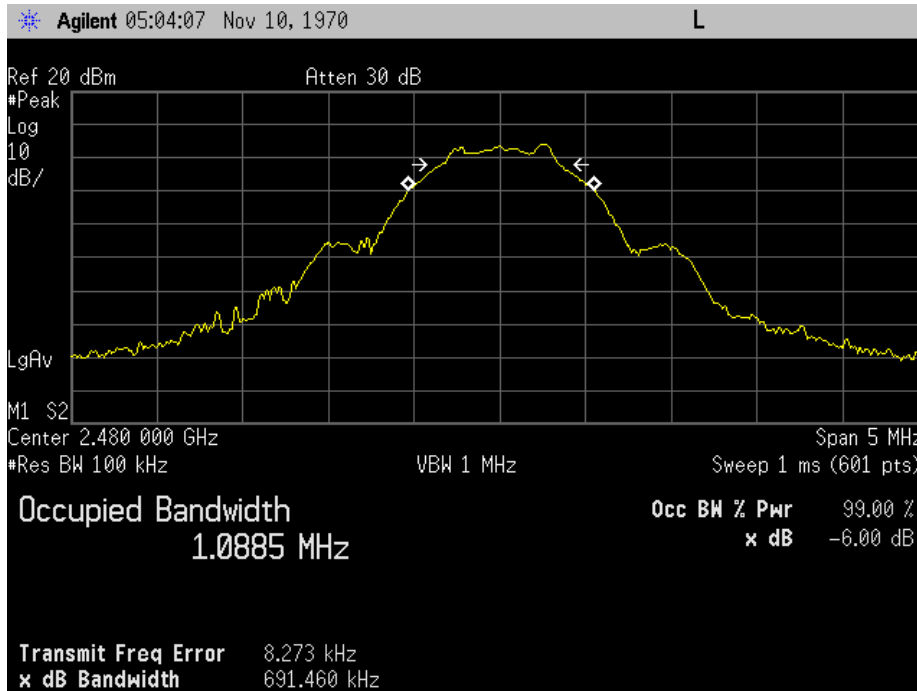

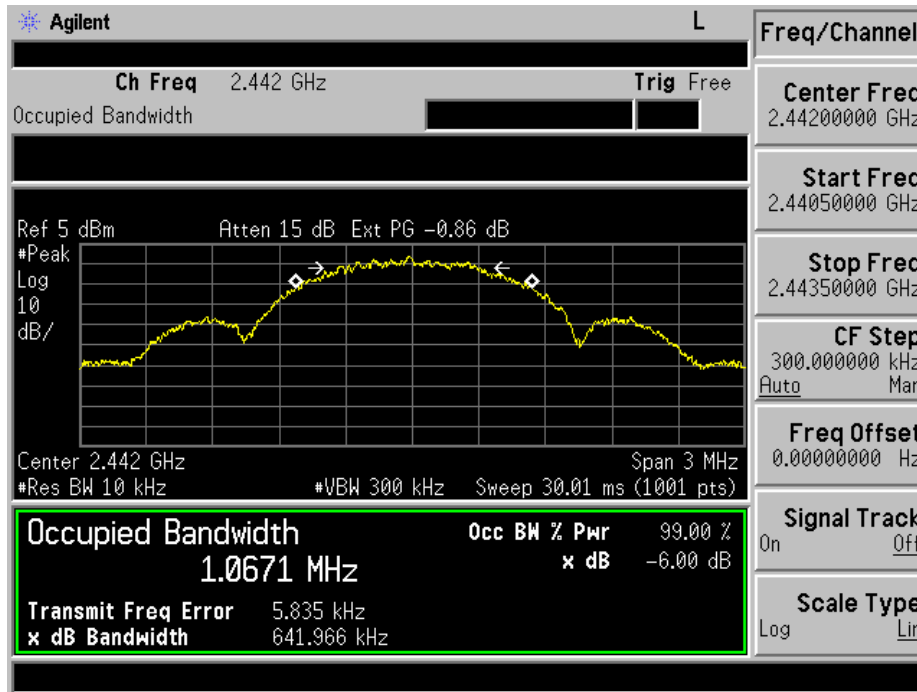

Transmitter Power Spectral Density (PSD)

Engineer: Alex Macon

Test Date: 1/20/2021


Test Procedure

The EUT was connected directly to a spectrum analyzer. The Spectrum Analyzer was set to the following:

DTS channel center frequency
 Span 1.5 x DTS bandwidth
 RBW = 3 kHz ≤ RBW ≤ 100 kHz
 VBW ≥ 3 x RBW
 Peak Detector
 Sweep time = auto couple
 Trace mode = max hold

The EUT was set to transmit at the lowest, middle and highest channels of the band at the maximum power levels. Once the trace has stabilize the peak marker was used to determine the peak power spectral density.

Test Setup



PSD Summary

Frequency (MHz)	Measured Data (dBm)	Specification Limit (dBm)	Result
2402	-9.28	8	Pass
2442	-8.76	8	Pass
2480	-9.23	8	Pass

Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Temperature Chamber	Tenney	Tenney Jr	i00027	NCR	NCR
Horn Antenna	EMCO	3116	i00085	2/22/21	2/22/23
Bi-Log Antenna	Schaffner	CBL611C	i00267	8/28/20	8/28/22
Horn Antenna	ARA	DRG-118/A	i00271	8/3/20	8/3/22
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	8/28/20	8/28/21
Spectrum Analyzer	Agilent	E4407B	i00331	12/28/20	12/28/21
Data Logger	Fluke	Hydra Data Bucket	i00343	6/10/20	6/10/21
Signal Generator	HP	83650A	i00353	12/7/20	12/7/22
EMI Analyzer	Agilent	E7405A	i00379	12/29/20	12/29/21
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	7/17/20	7/17/21
EMI Receiver	Keysight	N9038A	i00552	1/12/21	1/21/22
Spectrum Analyzer	Agilent	E4445A	i00471	12/23/20	12/23/21


In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT



Test Setup Photos
FCC ID: ACJ9TAWJ-VPU4000
IC: 216A-WJVPU4000

RF Radiated #1

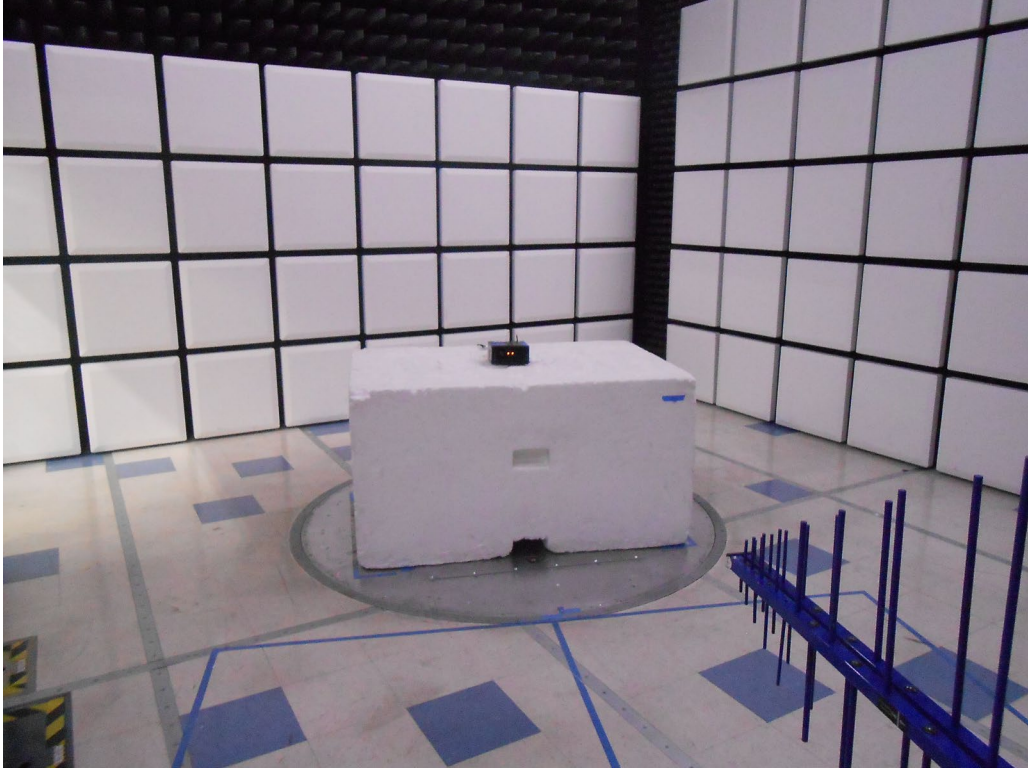

RF Radiated #2

