



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6554

http://www.pctestlab.com



## CERTIFICATE OF COMPLIANCE FCC Part 22 & 24 Certification

**Applicant Name:**

Panasonic Corporation of North America  
One Panasonic Way, 4B-8  
Secaucus, NJ 07094  
United States

**Date of Testing:**

September 7 - 10, 2007

**Test Site/Location:**

PCTEST Lab., Columbia, MD, USA

**Test Report Serial No.:**

0708210924.ACJ

**FCC ID:** ACJ9TGCF-TW72**APPLICANT:** PANASONIC CORPORATION OF NORTH AMERICA**Application Type:** Certification**FCC Classification:** PCS Licensed Transmitter (PCB)**FCC Rule Part(s):** §2; §22(H), §24(E)**EUT Type:** Toughbook Models: CF-T7/CF-W7**Model(s):** CF-T7/CF-W7**Tx Frequency Range:** 824.20 - 848.80MHz (Cell. GSM) / 1850.20 - 1909.80MHz (PCS GSM)  
826.40 - 846.60MHz (Cell. WCDMA) / 1852.4 - 1907.6MHz (PCS WCDMA)**Max. RF Output Power:** 0.857 W ERP Cell. GSM (29.33 dBm) / 1.592 W EIRP PCS GSM (32.02 dBm)  
0.088 W ERP Cell. WCDMA (19.43 dBm) / 0.27 W EIRP PCS WCDMA (24.32 dBm)  
0.538 W ERP EDGE850 (27.31 dBm) 0.798 W EIRP EDGE1900 (29.02 dBm)**Emission Designator(s):** 243KGXW (Cellular GSM), 246KGXW (PCS GSM)  
246KG7W (EDGE850), 246KG7W (EDGE1900)  
4M18F9W (Cellular WCDMA), 4M19F9W (PCS WCDMA)**Test Device Serial No.:** identical prototype [S/N: 7HKSA00019]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Grant Conditions:** Power output listed is ERP for Part 22 and EIRP for Part 24.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

  
Randy Ortanez  
President


FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 1 of 56

## T A B L E   O F   C O N T E N T S

---

FCC PART 22 & 24 MEASUREMENT REPORT.....	3
1.0    INTRODUCTION .....	4
1.1    MEASUREMENT PROCEDURE .....	4
1.2    SCOPE .....	4
1.3    TESTING FACILITY.....	4
2.0    PRODUCT INFORMATION.....	5
2.1    EQUIPMENT DESCRIPTION .....	5
2.2    EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....	5
2.3    LABELING REQUIREMENTS.....	5
3.0    DESCRIPTION OF TESTS .....	6
3.1    OCCUPIED BANDWIDTH EMISSION LIMITS .....	6
3.2    CELLULAR - BASE FREQUENCY BLOCKS.....	6
3.3    CELLULAR - MOBILE FREQUENCY BLOCKS.....	6
3.4    PCS - BASE FREQUENCY BLOCKS.....	7
3.5    PCS - MOBILE FREQUENCY BLOCKS.....	7
3.6    SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	7
3.7    RADIATED SPURIOUS AND HARMONIC EMISSIONS .....	7
3.8    FREQUENCY STABILITY / TEMPERATURE VARIATION .....	8
4.0    TEST EQUIPMENT CALIBRATION DATA .....	9
5.0    SAMPLE CALCULATIONS .....	10
6.0    TEST RESULTS.....	11
6.1    SUMMARY.....	11
6.2    CONDUCTED OUTPUT POWER .....	12
6.3    EFFECTIVE RADIATED POWER OUTPUT DATA .....	13
6.4    EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....	14
6.5    CELLULAR GSM RADIATED MEASUREMENTS .....	15
6.6    CELLULAR WCDMA RADIATED MEASUREMENTS .....	18
6.7    PCS GSM RADIATED MEASUREMENTS .....	21
6.8    PCS WCDMA RADIATED MEASUREMENTS .....	24
6.9    CELLULAR GSM FREQUENCY STABILITY MEASUREMENTS.....	27
6.10    CELLULAR WCDMA FREQUENCY STABILITY MEASUREMENTS .....	29
6.11    PCS GSM FREQUENCY STABILITY MEASUREMENTS.....	31
6.12    PCS WCDMA FREQUENCY STABILITY MEASUREMENTS .....	33
7.0    PLOTS OF EMISSIONS.....	35
8.0    CONCLUSION.....	56

<b>FCC ID:</b> ACJ9TGCF-TW72		<b>FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Panasonic</b> Reviewed by: Quality Manager
<b>Test Report S/N:</b> 0708210924.ACJ	<b>Test Dates:</b> September 7 - 10, 2007	<b>EUT Type:</b> Toughbook Models: CF-T7/CF-W7	Page 2 of 56



# MEASUREMENT REPORT

## FCC Part 22 & 24




### §2.1033 General Information

**APPLICANT:** Panasonic Corporation of North America  
**APPLICANT ADDRESS:** One Panasonic Way, 4B-8  
**Secaucus, NJ 07094**  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §22(H), §24(E)  
**BASE MODEL:** CF-T7/CF-W7  
**FCC ID:** ACJ9TGCF-TW72  
**FCC CLASSIFICATION:** PCS Licensed Transmitter (PCB)  
**EMISSION DESIGNATOR(S):** 243KGXW (Cellular GSM), 246KGXW (PCS GSM)  
 246KG7W (EDGE850), 246KG7W (EDGE1900)  
 4M18F9W (Cellular WCDMA), 4M19F9W (PCS WCDMA)  
**MODE:** GSM/EDGE/WCDMA  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** 7HKSA00019  Production  Pre-Production  Engineering  
**DATE(S) OF TEST:** September 7 - 10, 2007  
**TEST REPORT S/N:** 0708210924.ACJ

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EVDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.


FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 3 of 56

## 1.0 INTRODUCTION

### 1.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 1-1). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

**Deviation from Measurement Procedure.....None**

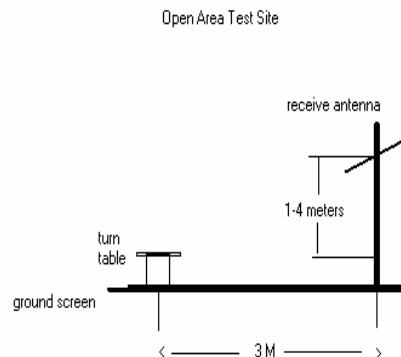


**Figure 1-1. Diagram of 3-meter outdoor test range**

### 1.2 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

### 1.3 Testing Facility

These measurements were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

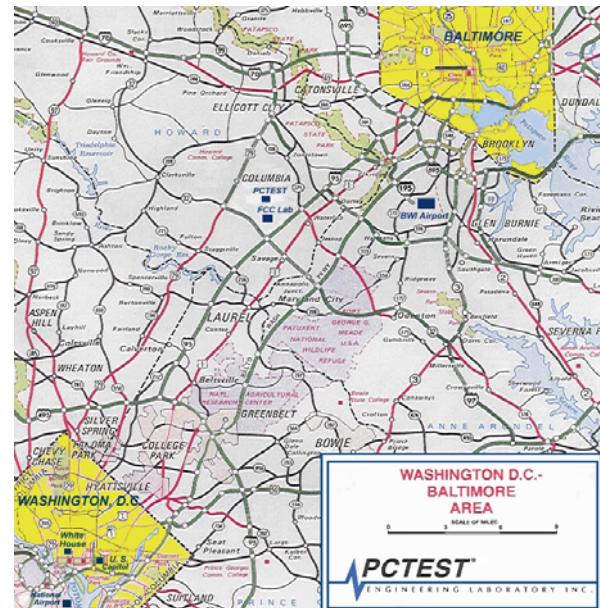

**Figure 1-2. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.**

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 4 of 56

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Toughbook Models: CF-T7/CF-W7** **FCC ID: ACJ9TGCF-TW72**. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
Panasonic / Model: CF-T7/CF-W7	ACJ9TGCF-TW72	Toughbook Models: CF-T7/CF-W7
Intel / Model: 4965AG	PD94965AG	802.11a/g WLAN module
Alps / Model: UGNZA	N/A	Bluetooth 2.0 w/ E.D.R module
Novatel / Model: EU860D	NBZNRM-EU860D	GPRS/EDGE/HSDPA module

Table 2-1. EUT Equipment Description

### 2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.3 Labeling Requirements

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 5 of 56


## 3.0 DESCRIPTION OF TESTS

### 3.1 Occupied Bandwidth Emission Limits


§2.1049, 22.917(a), 24.238(a)

- a. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- b. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- c. When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- d. The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

### 3.2 Cellular - Base Frequency Blocks

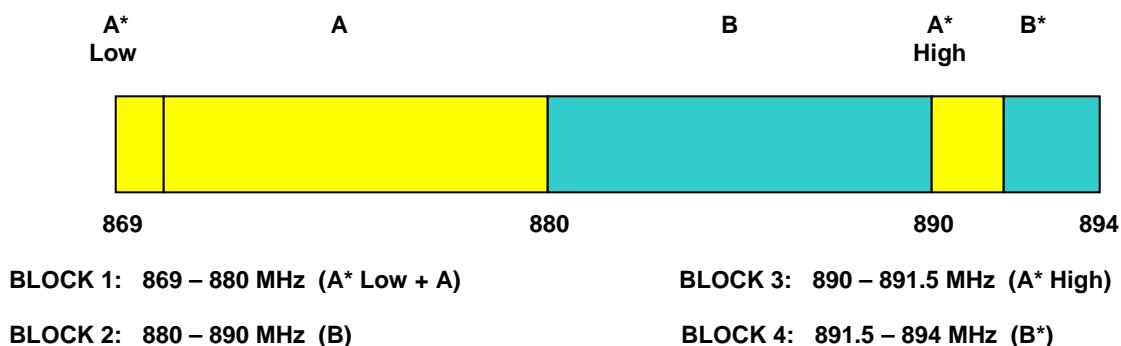


### 3.3 Cellular - Mobile Frequency Blocks

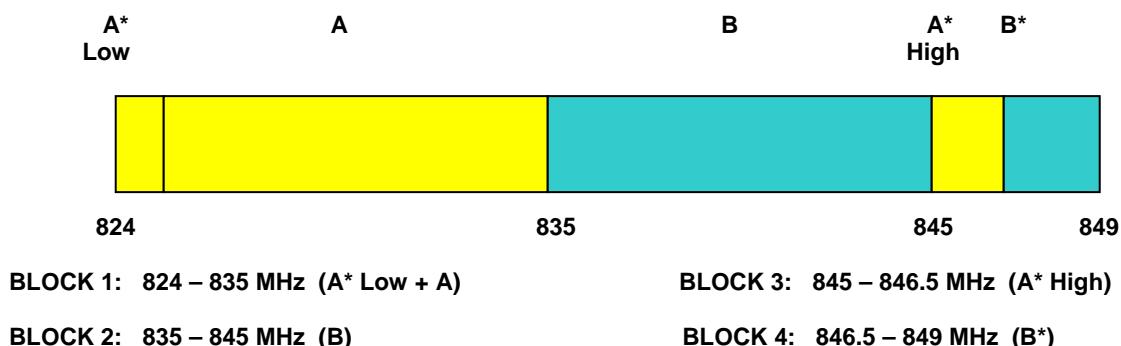

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 6 of 56



### 3.4 PCS - Base Frequency Blocks

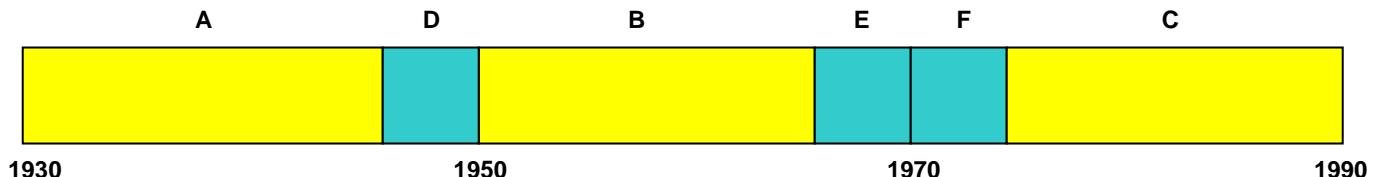

**BLOCK 1: 1930 – 1945 MHz (A)**

**BLOCK 4: 1965 – 1970 MHz (E)**


**BLOCK 2: 1945 – 1950 MHz (D)**

**BLOCK 5: 1970 – 1975 MHz (F)**

**BLOCK 3: 1950 – 1965 MHz (B)**

**BLOCK 6: 1975 – 1990 MHz (C)**

### 3.5 PCS - Mobile Frequency Blocks

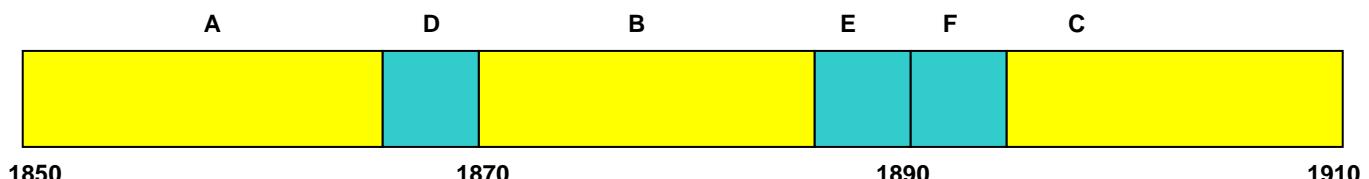

**BLOCK 1: 1850 – 1865 MHz (A)**

**BLOCK 4: 1885 – 1890 MHz (E)**

**BLOCK 2: 1865 – 1870 MHz (P)**

**BLOCK 5: 1890 – 1895 MHz (F)**

**BLOCK 3: 1870 – 1885 MHz (B)**

**BLOCK 6: 1895 – 1910 MHz (C)**

### 3.6 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a); RSS-129 (8.1.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic.

### 3.7 Radiated Spurious and Harmonic Emissions

§2.1053, 22.917(a), 24.238(a); RSS-129 (8.1.1), RSS-133 (6.5.1(i))

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

FCC ID: AC9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 7 of 56



### 3.8 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235; RSS-132 (4.3) / RSS-133 (6.3)

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5 \text{ ppm}$ ) of the center frequency.*

#### Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 8 of 56

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4407B ESA Spectrum Analyzer	04/29/07	Annual	04/28/08	US39210313
Agilent	E5515C Wireless Communications Test Set	07/27/06	Biennial	07/26/08	GB41450275
Agilent	E5515C Wireless Communications Test Set	10/06/06	Biennial	10/05/08	GB43193972
Agilent	8648D (9kHz-4GHz) Signal Generator	10/01/06	Annual	10/01/07	3613A00315
Agilent	E5515C Wireless Communications Test Set	10/26/06	Biennial	10/25/08	GB46310798
EMCO	Model 3115 (1-18GHz) Horn Antenna	09/24/06	Biennial	09/23/08	9203-2178
EMCO	Model 3115 (1-18GHz) Horn Antenna	09/25/06	Biennial	09/24/08	9704-5182
Rohde & Schwarz	NRVS Power Meter	07/03/07	Biennial	07/02/09	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	07/03/07	Biennial	07/02/09	846076/007
Rohde & Schwarz	CMU200 Base Station Simulator	11/08/06	Annual	11/08/07	107826
Rohde & Schwarz	CMU200 Base Station Simulator	05/24/07	Annual	05/23/08	836371/079
Agilent	HP 8566B (100Hz-22GHz) Spectrum Analyzer	12/21/06	Annual	12/21/07	3638A08713
Agilent	E4448A (3Hz-50GHz) Spectrum Analyzer	09/22/06	Annual	09/22/07	US42510244
Agilent	E8257D (250kHz-20GHz) Signal Generator	03/08/07	Annual	03/07/08	MY45470194
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/12/06	Annual	12/12/07	N/A
Agilent	HP 85685A (20Hz-2GHz) Preselector	12/12/06	Annual	12/12/07	N/A
Agilent	HP 8566B Opt. 462 Impulse Bandwidth	12/12/06	Annual	12/12/07	3701A22204
EMCO	Dipole Pair	09/21/06	Biennial	09/20/08	23951
SOLAR	8012-50 LISN (2)	11/18/05	Biennial	11/18/07	0313233, 0310234
K & L	11SH10 Band Pass Filter	N/A	Annual	N/A	1300/4000
K & L	11SH10 Band Pass Filter	N/A	Annual	N/A	4000/12000
Agilent	HP 8495A (0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
-	263-10dB (DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
Pasternack	PE2208-6 Bidirectional Coupler	N/A		N/A	N/A
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Rohde & Schwarz	NRVD Dual Channel Power Meter	12/11/06	Biennial	12/10/08	101695
Rohde & Schwarz	NRV-Z33 Peak Power Sensor (1mW-20W)	11/28/06	Biennial	11/27/08	100155

Table 4-1. Test Equipment

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 9 of 56

## 5.0 SAMPLE CALCULATIONS

### GSM Emission Designator

**Emission Designator = 250KGXW**

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission - PCS Band

**Example: GSM Channel 512 PCS Mode 2<sup>nd</sup> Harmonic (3700.40 MHz)**

The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80) = 50.3 dBc.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 10 of 56

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: Panasonic Corporation of North America  
 FCC ID: ACJ9TGCF-TW72  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): GSM/EDGE/WCDMA

FCC Part Section(s)	RSS Section	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
2.1049, 22.917(a), 24.238(a)	N/A	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	< 43 + log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
2.1046	N/A	GSM/WCDMA Conducted Output Power	N/A		PASS	Section 6.2
22.913(a)(2)	RSS-132 (4.4) [SRSP-503(5.1.3)]	Effective Radiated Power	< 7 Watts max. ERP (<6.3 Watts max. ERP (IC))	RADIATED	PASS	Section 6.3
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.4
2.1053, 22.917(a), 24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Undesirable Emissions	< 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Sections 6.5, 6.6, 6.7, 6.8
2.1055, 22.355, 24.235	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	< 2.5 ppm		PASS	Sections 6.9, 6.10, 6.11, 6.12
<b>RECEIVER MODE (RX) / DIGITAL EMISSIONS</b>						
15.107	RSS-Gen (7.2.2)	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Pt. 15B Test Report
15.109	RSS-132 (4.6) RSS-133(6.7(a) [RSS-Gen (7.2.2)] RSS-210 (7.3)	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.109 limits or < RSS-210 table 3 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Pt. 15B Test Report
<b>RF EXPOSURE (SAR)</b>						
2.1091 / 2.1093	RSS-102	SAR Test	1.6 W/kg (SAR Limit)	SAR	PASS	SAR Report

**Table 6-1. Summary of Test Results**

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 11 of 56

## 6.2 Conducted Output Power

### §2.1046

A base station simulator (Rhode and Schwartz Model: CMU200) was used to establish communication with the **Panasonic Toughbook Models: CF-T7/CF-W7 FCC ID: ACJ9TGCF-TW72**. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. The WCDMA and GSM conducted powers are reported below.

Band	Channel	GSM / GPRS		EDGE
		Power Control Level	Conducted Power	Conducted Power
		[dBm]	[dBm]	
Cellular	128	5	32.04	27.25
	190	5	32.21	27.40
	251	5	32.31	27.44
PCS	512	0	29.10	26.49
	661	0	29.16	26.45
	810	0	29.05	26.29

Table 6-2. GSM Conducted Output Powers

Band	Channel	HSDPA Inactive		HSDPA Active	
		12.2 kbps RMC	12.2 kbps AMR	12.2 kbps RMC	12.2 kbps AMR
		[dBm]	[dBm]	[dBm]	[dBm]
Cellular	4132	22.98	N/A	22.96	N/A
	4183	23.17	N/A	23.19	N/A
	4233	22.83	N/A	22.81	N/A
PCS	9262	22.72	N/A	22.79	N/A
	9400	23.01	N/A	22.50	N/A
	9538	22.97	N/A	22.42	N/A

Table 6-3. WCDMA Conducted Output Powers

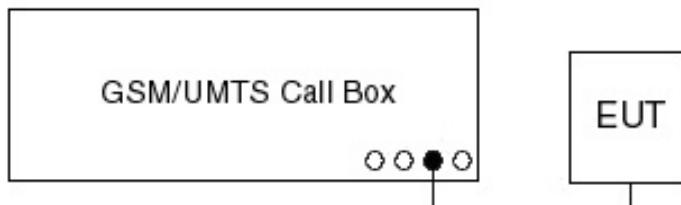


Figure 6-1. GSM/WCDMA Conducted Power Test Setup Diagram

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 12 of 56

### 6.3 Effective Radiated Power Output Data

§22.913(a)(2); RSS-132 (4.4) [SRSP-503(5.1.3)]

#### POWER: PCL "5" (Cellular GSM Mode)

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Battery Type
824.20	-11.310	28.69	0.00	V	28.69	0.740	Standard
836.60	-10.670	29.33	0.00	V	29.33	0.857	Standard
848.80	-11.450	28.55	0.00	V	28.55	0.716	Standard
836.60	-12.690	27.31	0.00	V	27.31	0.538	Standard

Table 6-4. Effective Radiated Power Output Data (GSM)

#### POWER: All "1" bits (Cellular WCDMA Mode)

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Battery Type
826.40	-18.240	18.76	0.00	V	18.76	0.075	Standard
836.60	-17.950	19.05	0.00	V	19.05	0.080	Standard
846.60	-17.570	19.43	0.00	V	19.43	0.088	Standard

Table 6-5. Effective Radiated Power Output Data (WCDMA)

#### NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 13 of 56

## 6.4 Equivalent Isotropic Radiated Power Output Data

§24.232(c); RSS-133 (6.4) [SRSP-510 (5.1.2)]

### POWER: PCL "0" (PCS GSM Mode)

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Battery Type
1850.20	-11.680	23.32	8.00	V	31.32	1.355	Standard
1880.00	-10.980	24.02	8.00	V	32.02	1.592	Standard
1909.80	-11.170	23.83	8.00	V	31.83	1.524	Standard
1880.00	-13.980	21.02	8.00	V	29.02	0.798	Standard

Table 6-6. Equivalent Isotropic Radiated Power Output Data (GSM)

### POWER: All "1" bits (PCS WCDMA Mode)

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Battery Type
1852.40	-18.680	16.32	8.00	V	24.32	0.270	Standard
1880.00	-18.940	16.06	8.00	V	24.06	0.255	Standard
1907.60	-19.130	15.87	8.00	V	23.87	0.244	Standard

Table 6-7. Equivalent Isotropic Radiated Power Output Data (WCDMA)

### NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 14 of 56



## 6.5 Cellular GSM Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz  
CHANNEL: 128  
MEASURED OUTPUT POWER: 29.330 dBm = 0.857 W  
MODULATION SIGNAL: GSM (Internal)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) =$  42.33 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-39.29	6.08	-33.21	V	62.5
2472.60	-50.66	6.53	-44.13	V	73.5
3296.80	-48.84	6.87	-41.97	V	71.3
4121.00	-46.78	7.21	-39.58	V	68.9
4945.20	-49.91	8.37	-41.54	V	70.9

Table 6-8. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 15 of 56



## Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190  
 MEASURED OUTPUT POWER: 29.330 dBm = 0.857 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.33 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBD)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-36.67	6.09	-30.59	V	59.9
2509.80	-43.22	6.55	-36.67	V	66.0
3346.40	-46.90	6.89	-40.01	V	69.3
4183.00	-45.08	7.43	-37.65	V	67.0
5019.60	-46.57	8.35	-38.23	V	67.6

Table 6-9. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 16 of 56



## Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 29.330 dBm = 0.857 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.33 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-39.16	6.09	-33.07	V	62.4
2546.40	-50.28	6.57	-43.71	V	73.0
3395.20	-48.47	6.91	-41.56	V	70.9
4244.00	-48.58	7.65	-40.93	V	70.3
5092.80	-49.53	8.33	-41.20	V	70.5

Table 6-10. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with  $RBW = VBW = 3$  MHz. For WCDMA signals, a peak detector is used, with  $RBW = VBW = 5$  MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with  $RBW = VBW = 1$  MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 17 of 56



## 6.6 Cellular WCDMA Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.40 MHz  
CHANNEL: 4132  
MEASURED OUTPUT POWER: 19.430 dBm = 0.088 W  
MODULATION SIGNAL: WCDMA (Internal)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) =$  32.43 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-66.77	6.08	-60.68	V	80.1
2479.20	-65.53	6.54	-59.00	V	78.4
3305.60	-94.71	6.88	-87.83	V	107.3
4132.00	-92.66	7.25	-85.41	V	104.8
4958.40	-91.82	8.37	-83.45	V	102.9

Table 6-11. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 18 of 56



## Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 4183  
 MEASURED OUTPUT POWER: 19.430 dBm = 0.088 W  
 MODULATION SIGNAL: WCDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  32.43 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-66.39	6.09	-60.30	V	79.7
2509.80	-63.04	6.55	-56.49	V	75.9
3346.40	-94.62	6.89	-87.73	V	107.2
4183.00	-92.81	7.40	-85.40	V	104.8
5019.60	-91.59	8.35	-83.24	V	102.7

Table 6-12. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 19 of 56



## Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 846.60 MHz  
 CHANNEL: 4233  
 MEASURED OUTPUT POWER: 19.430 dBm = 0.088 W  
 MODULATION SIGNAL: WCDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  32.43 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-67.38	6.09	-61.29	V	80.7
2539.80	-64.30	6.57	-57.74	V	77.2
3386.40	-94.50	6.91	-87.60	V	107.0
4233.00	-93.01	7.62	-85.39	V	104.8
5079.60	-91.28	8.33	-82.94	V	102.4

Table 6-13. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 20 of 56



## 6.7 PCS GSM Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 32.020 dBm = 1.592 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.02 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-41.06	9.02	-32.04	V	64.1
5550.60	-40.52	10.40	-30.12	V	62.1
7400.80	-40.04	10.50	-29.53	V	61.6
9251.00	-40.35	11.85	-28.50	V	60.5
11101.20	-84.07	12.76	-71.31	V	103.3

Table 6-14. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 21 of 56



**PCS GSM Radiated Measurements (Cont'd)**  
§2.1053, 24.238(a); RSS-133 (6.5.1)

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 32.020 dBm = 1.592 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.02 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-49.34	8.99	-40.35	V	72.4
5640.00	-41.04	10.40	-30.64	V	62.7
7520.00	-41.66	10.62	-31.04	V	63.1
9400.00	-42.24	11.70	-30.54	V	62.6
11280.00	-83.32	12.69	-70.63	V	102.7

**Table 6-15. Radiated Spurious Data (PCS GSM Mode – Ch. 661)**

**NOTES:**

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 22 of 56



## PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 32.020 dBm = 1.592 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.02 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-46.82	8.97	-37.86	V	69.9
5729.40	-40.66	10.40	-30.26	V	62.3
7639.20	-39.18	10.71	-28.47	V	60.5
9549.00	-36.26	11.64	-24.62	V	56.6
11458.80	-82.58	12.62	-69.96	V	102.0

Table 6-16. Radiated Spurious Data (PCS GSM Mode – Ch. 810)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 23 of 56



## 6.8 PCS WCDMA Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1852.40 MHz  
 CHANNEL: 9262  
 MEASURED OUTPUT POWER: 24.320 dBm = 0.270 W  
 MODULATION SIGNAL: WCDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.32 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3704.80	-58.54	9.01	-49.53	V	73.8
5557.20	-56.30	10.40	-45.90	V	70.2
7409.60	-60.84	10.51	-50.33	V	74.6
9262.00	-86.50	11.83	-74.67	V	99.0
11114.40	-84.01	12.75	-71.26	V	95.6

Table 6-17. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 24 of 56



## PCS WCDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 9400  
 MEASURED OUTPUT POWER: 24.320 dBm = 0.270 W  
 MODULATION SIGNAL: WCDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.32 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-59.14	8.99	-50.15	V	74.5
5640.00	-57.74	10.40	-47.34	V	71.7
7520.00	-61.66	10.62	-51.04	V	75.4
9400.00	-86.30	11.70	-74.60	V	98.9
11280.00	-83.32	12.69	-70.63	V	95.0

Table 6-18. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 25 of 56



## PCS WCDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1907.60 MHz  
 CHANNEL: 9538  
 MEASURED OUTPUT POWER: 24.320 dBm = 0.270 W  
 MODULATION SIGNAL: WCDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.32 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3815.20	-59.44	8.97	-50.47	V	74.8
5722.80	-57.98	10.40	-47.58	V	71.9
7630.40	-61.79	10.71	-51.08	V	75.4
9538.00	-86.11	11.63	-74.48	V	98.8
11445.60	-82.63	12.62	-70.01	V	94.3

Table 6-19. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 26 of 56



## 6.9 Cellular GSM Frequency Stability Measurements

§2.1055, 22.355; RSS-132 (4.3)

OPERATING FREQUENCY: 836,600,000 Hz  
CHANNEL: 190  
REFERENCE VOLTAGE: 10.65 VDC  
DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	10.65	+ 20 (Ref)	836,599,995	-5	-0.000001
100 %		- 30	836,599,985	-15	-0.000002
100 %		- 20	836,599,991	-9	-0.000001
100 %		- 10	836,600,005	5	0.000001
100 %		0	836,600,007	7	0.000001
100 %		+ 10	836,600,010	10	0.000001
100 %		+ 20	836,599,997	-3	0.000000
100 %		+ 30	836,600,009	9	0.000001
100 %		+ 40	836,600,014	14	0.000002
100 %		+ 50	836,599,992	-8	-0.000001
115 %		+ 20	836,599,991	-9	-0.000001
BATT. ENDPOINT	10.14	+ 20	836,599,996	-4	0.000000


Table 6-20. Frequency Stability Data (Cellular GSM Mode – Ch. 190)

**Note:** This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 27 of 56

## Cellular GSM Frequency Stability Measurements (Cont'd)

§2.1055, 22.355; RSS-132 (4.3)

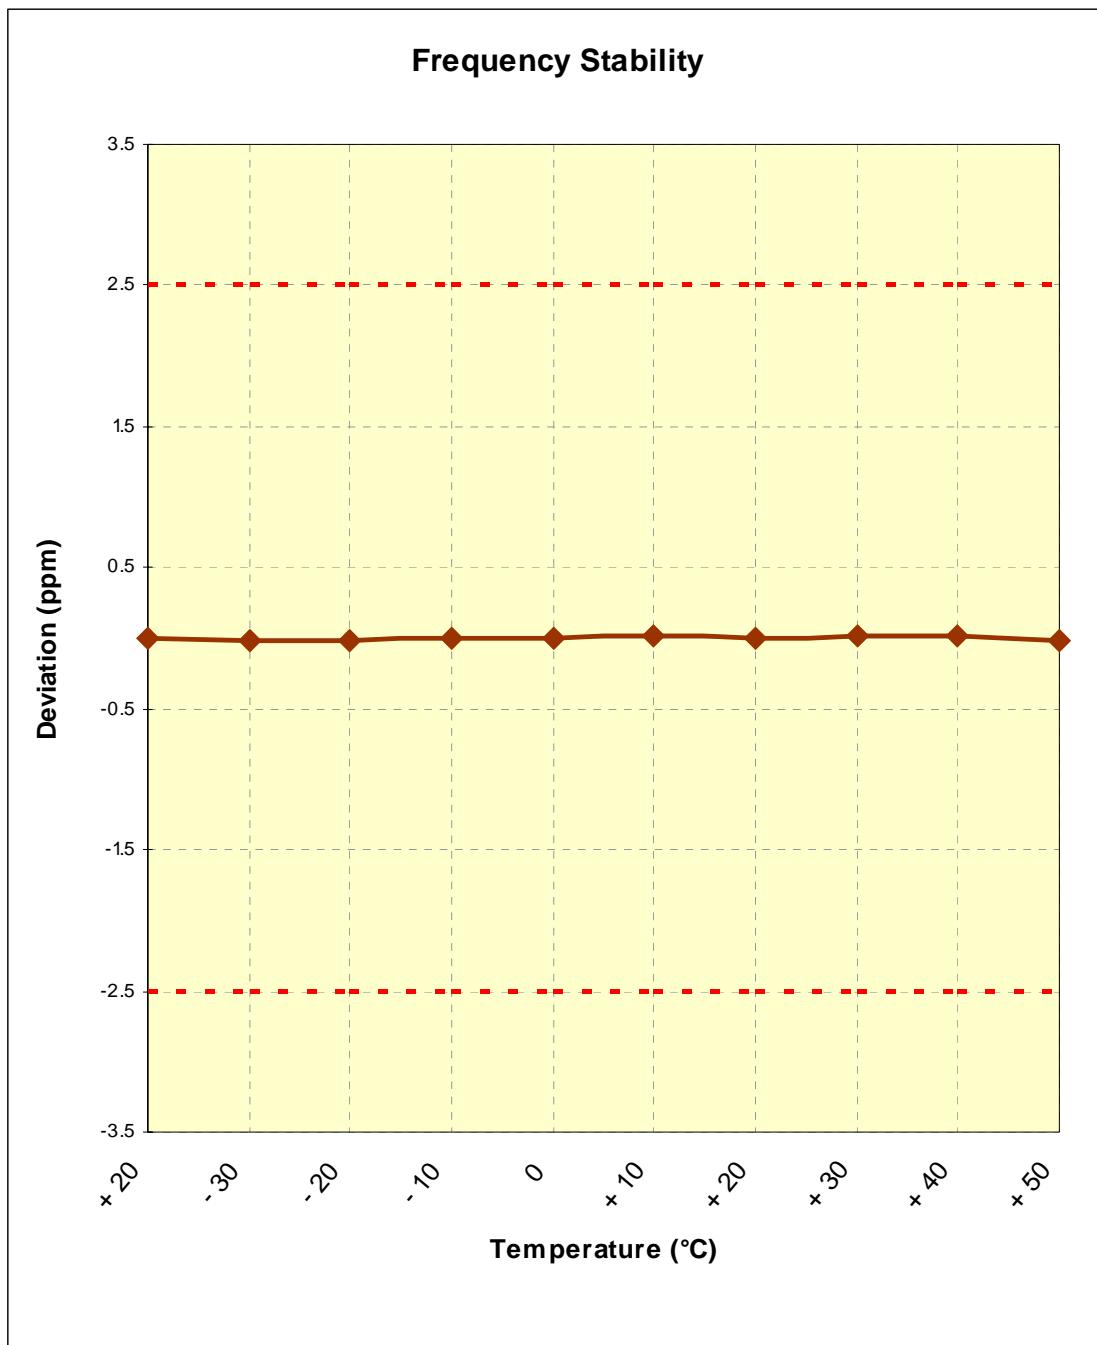

**Plot 6-1. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)**

**Note:** This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 28 of 56



## 6.10 Cellular WCDMA Frequency Stability Measurements

§2.1055, 22.355; RSS-132 (4.3)

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 4183

REFERENCE VOLTAGE: 10.65 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	10.65	+ 20 (Ref)	836,600,004	4	0.000000
100 %		- 30	836,600,012	12	0.000001
100 %		- 20	836,600,018	18	0.000002
100 %		- 10	836,600,013	13	0.000002
100 %		0	836,600,003	3	0.000000
100 %		+ 10	836,599,998	-2	0.000000
100 %		+ 20	836,600,003	3	0.000000
100 %		+ 30	836,599,992	-8	-0.000001
100 %		+ 40	836,599,998	-2	0.000000
100 %		+ 50	836,599,995	-5	-0.000001
115 %		+ 20	836,600,014	14	0.000002
BATT. ENDPOINT	10.14	+ 20	836,599,994	-6	-0.000001

Table 6-21. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)


**Note:**

This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 29 of 56

## Cellular WCDMA Frequency Stability Measurements (Cont'd)

§2.1055, 22.355; RSS-132 (4.3)

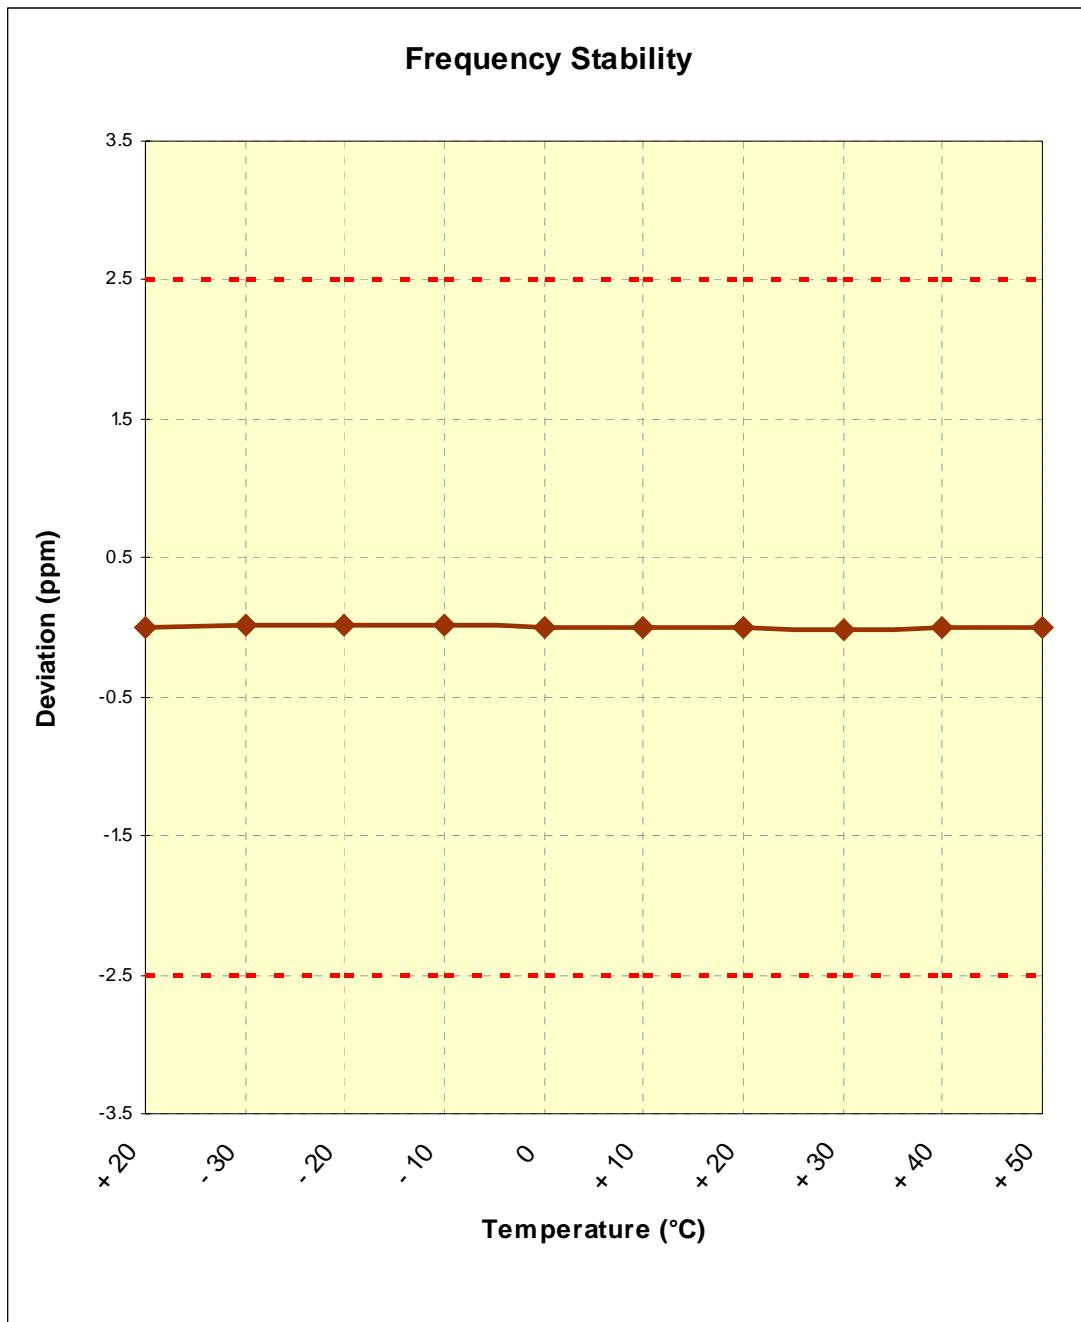

**Plot 6-2. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)**

**Note:**

This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 30 of 56



## 6.11 PCS GSM Frequency Stability Measurements

§2.1055, 24.235; RSS-133 (6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 661

REFERENCE VOLTAGE: 10.65 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	10.65	+ 20 (Ref)	1,880,000,006	6	0.000000
100 %		- 30	1,880,000,003	3	0.000000
100 %		- 20	1,880,000,005	5	0.000000
100 %		- 10	1,879,999,999	-1	0.000000
100 %		0	1,879,999,990	-10	-0.000001
100 %		+ 10	1,880,000,007	7	0.000000
100 %		+ 20	1,880,000,008	8	0.000000
100 %		+ 30	1,880,000,003	3	0.000000
100 %		+ 40	1,880,000,008	8	0.000000
100 %		+ 50	1,880,000,009	9	0.000000
115 %	12.25	+ 20	1,880,000,002	2	0.000000
BATT. ENDPOINT	10.14	+ 20	1,880,000,004	4	0.000000


Table 6-22. Frequency Stability Data (PCS GSM Mode – Ch. 661)

**Note:** This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 31 of 56

## PCS GSM Frequency Stability Measurements (Cont'd)

§2.1055, 24.235; RSS-133 (6.3)

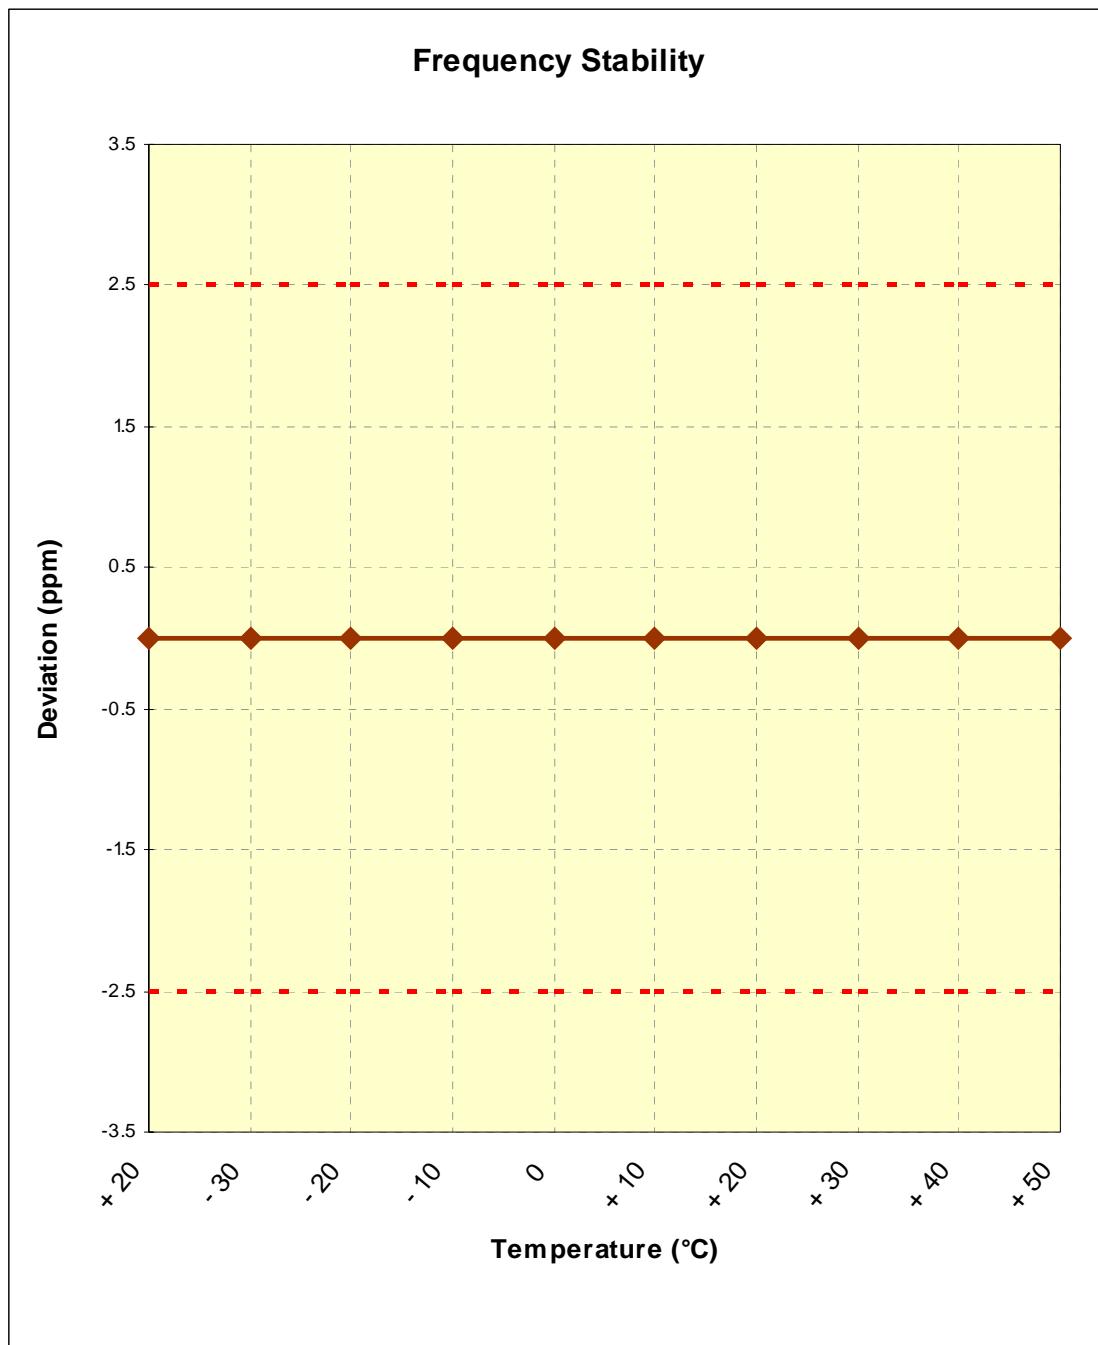

**Plot 6-3. Frequency Stability Graph (PCS GSM Mode – Ch. 661)**

**Note:** This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 32 of 56



## 6.12 PCS WCDMA Frequency Stability Measurements

§2.1055, 24.235; RSS-133 (6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 9400

REFERENCE VOLTAGE: 10.65 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	10.65	+ 20 (Ref)	1,879,999,993	-7	0.000000
100 %		- 30	1,880,000,001	1	0.000000
100 %		- 20	1,879,999,991	-9	0.000000
100 %		- 10	1,880,000,005	5	0.000000
100 %		0	1,880,000,009	9	0.000000
100 %		+ 10	1,880,000,016	16	0.000001
100 %		+ 20	1,880,000,007	7	0.000000
100 %		+ 30	1,879,999,993	-7	0.000000
100 %		+ 40	1,880,000,011	11	0.000001
100 %		+ 50	1,880,000,009	9	0.000000
115 %		+ 20	1,880,000,003	3	0.000000
BATT. ENDPOINT	10.14	+ 20	1,880,000,010	10	0.000001

Table 6-23. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)


**Note:**

This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 33 of 56

## PCS WCDMA Frequency Stability Measurements (Cont'd)

§2.1055, 24.235; RSS-133 (6.3)

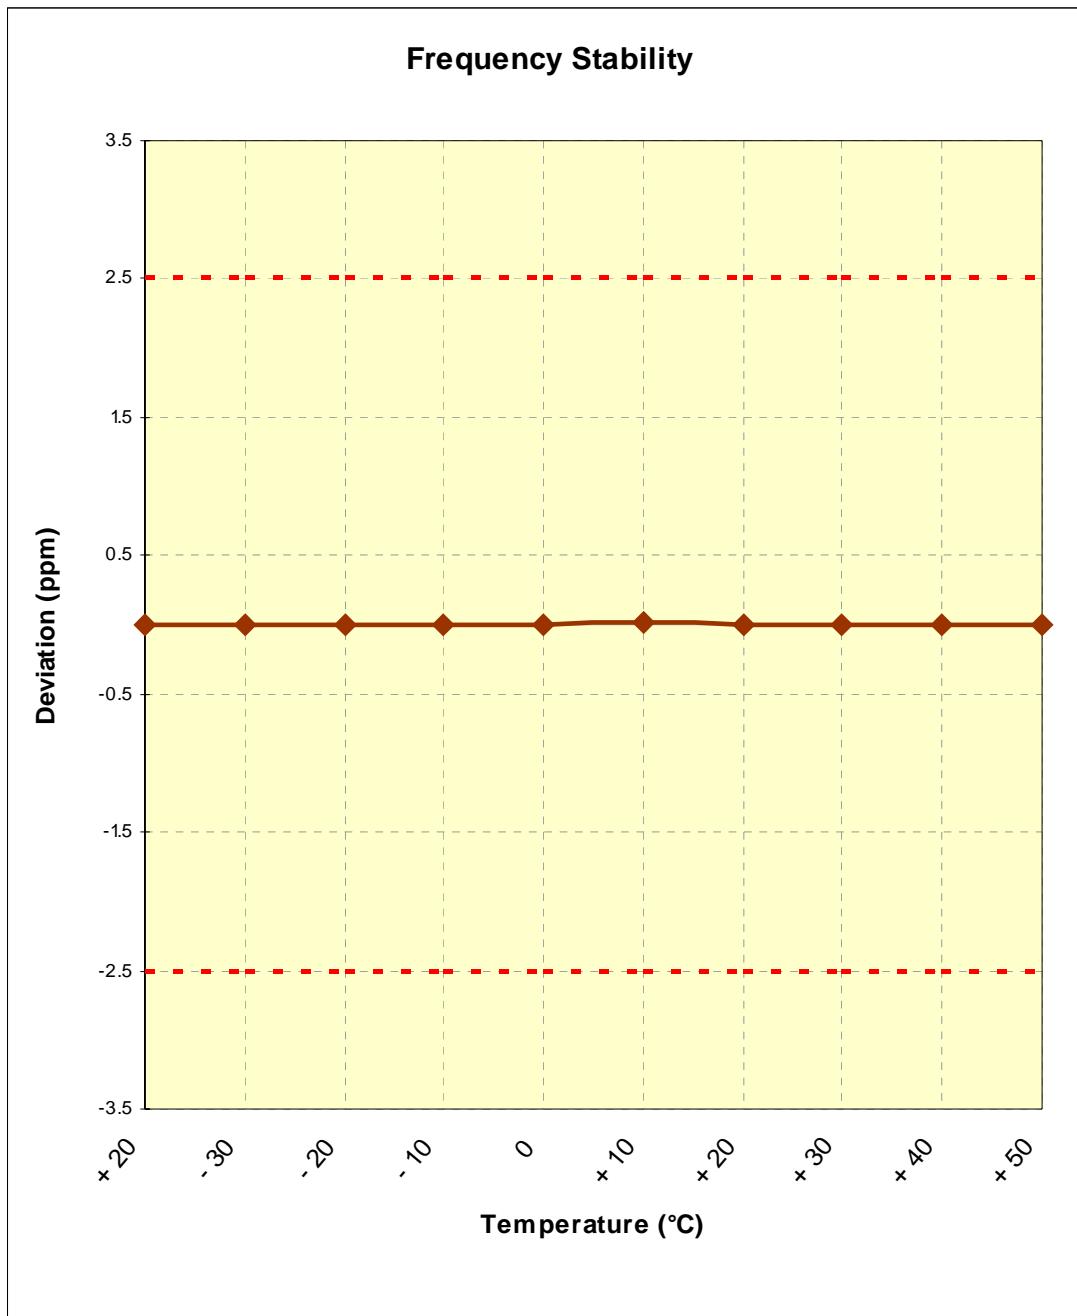


Plot 6-4. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

**Note:**


This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 34 of 56

## 7.0 PLOTS OF EMISSIONS

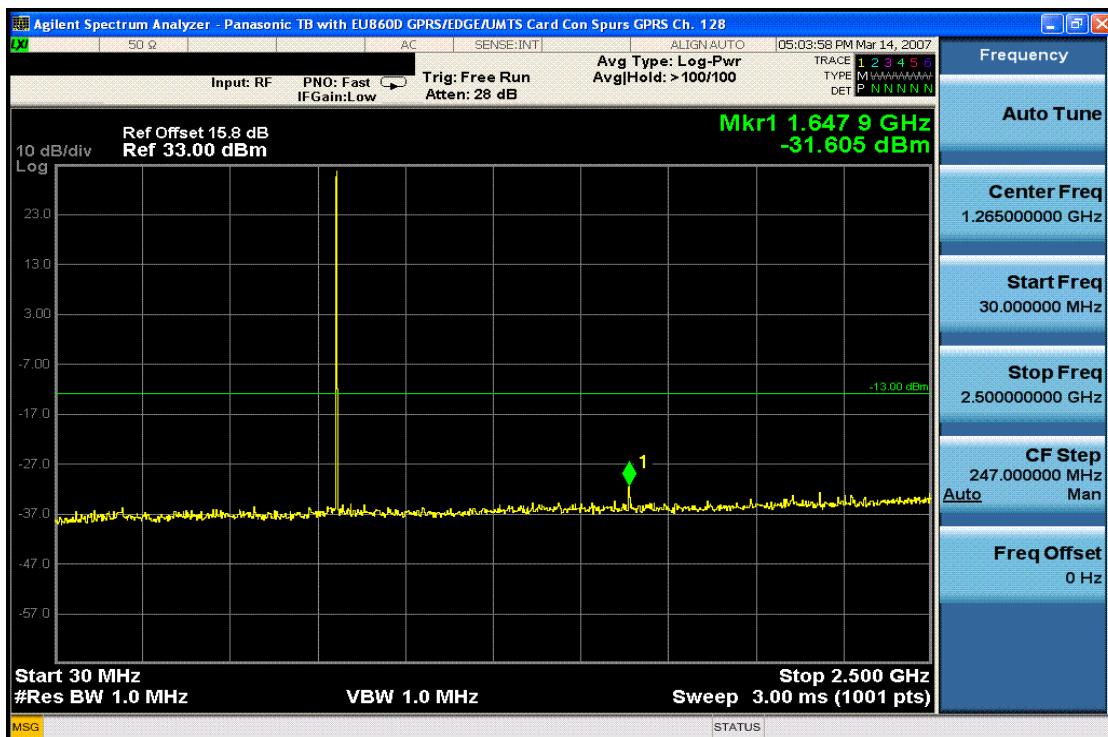


Plot 7-1. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

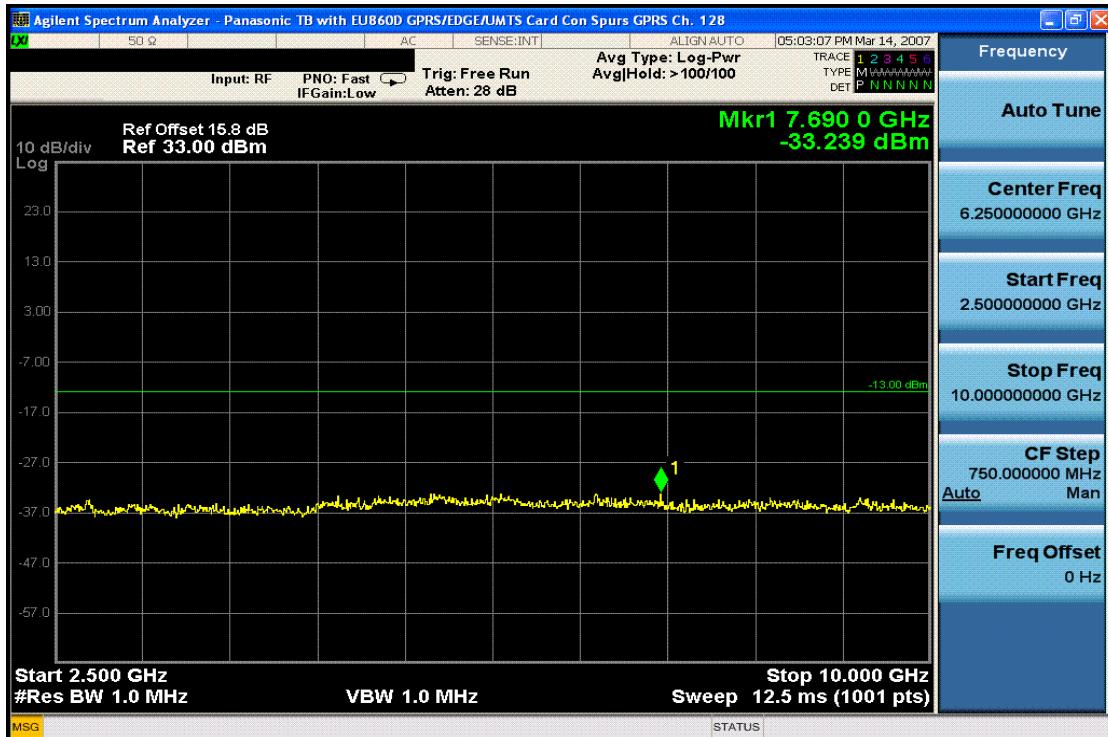


Plot 7-2. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 35 of 56

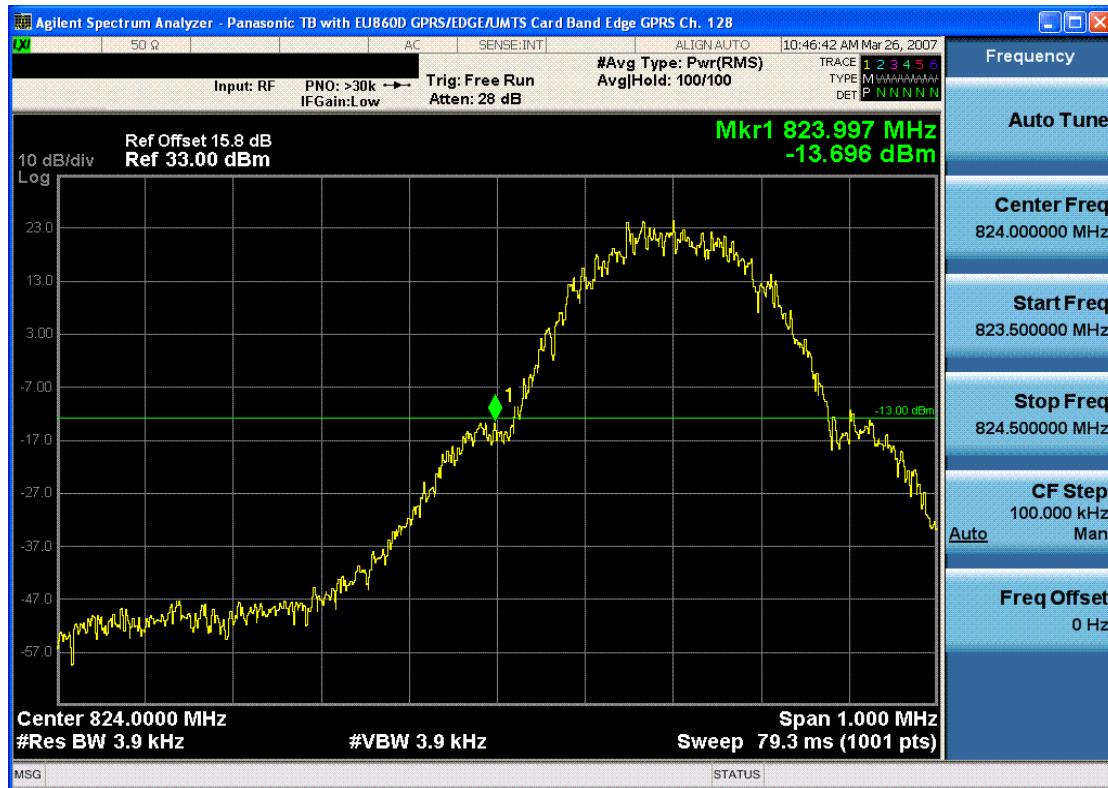


Plot 7-3. Band Edge Plot (Cellular GSM Mode – Ch. 128)

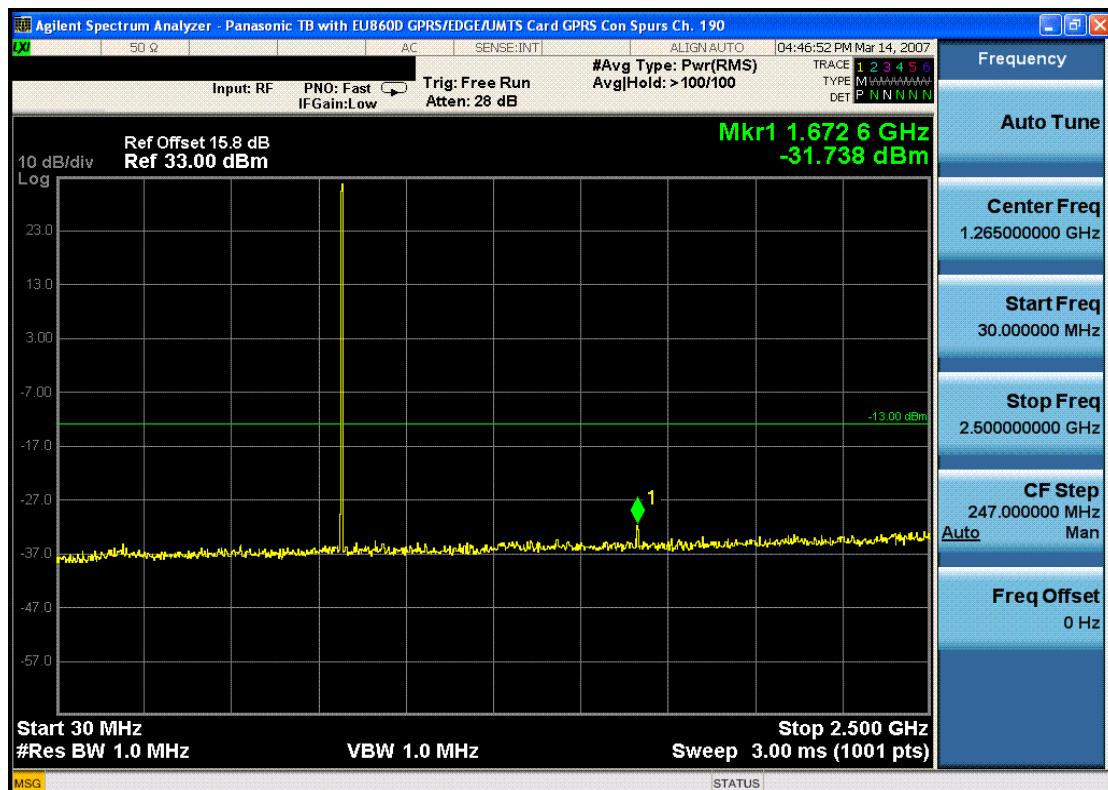


Plot 7-4. Conducted Spurious (Cellular GSM Mode – Ch. 190)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 36 of 56

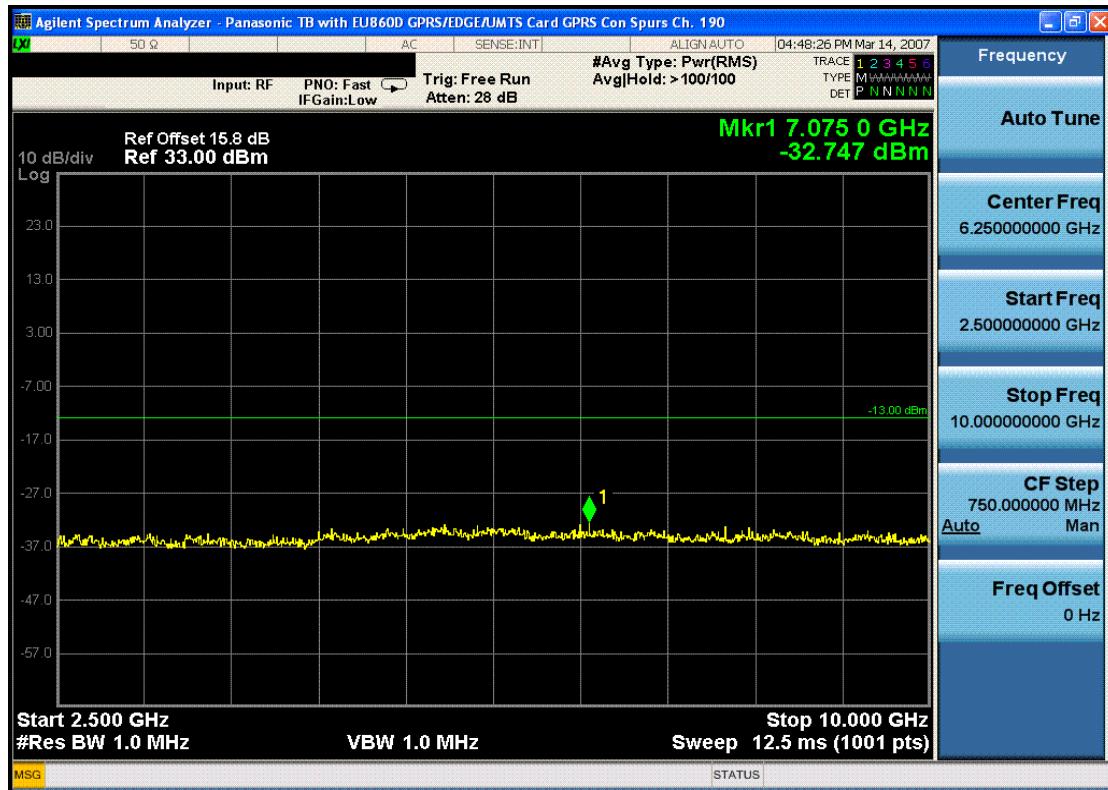


Plot 7-5. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

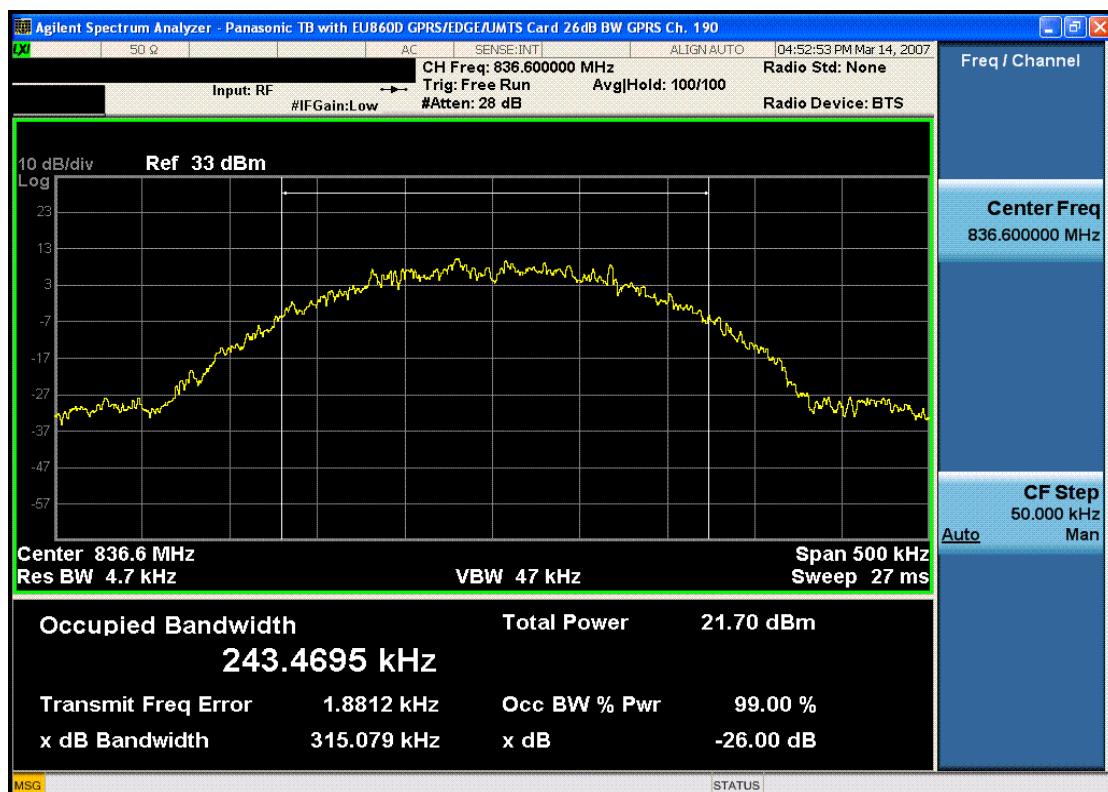


Plot 7-6. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 37 of 56

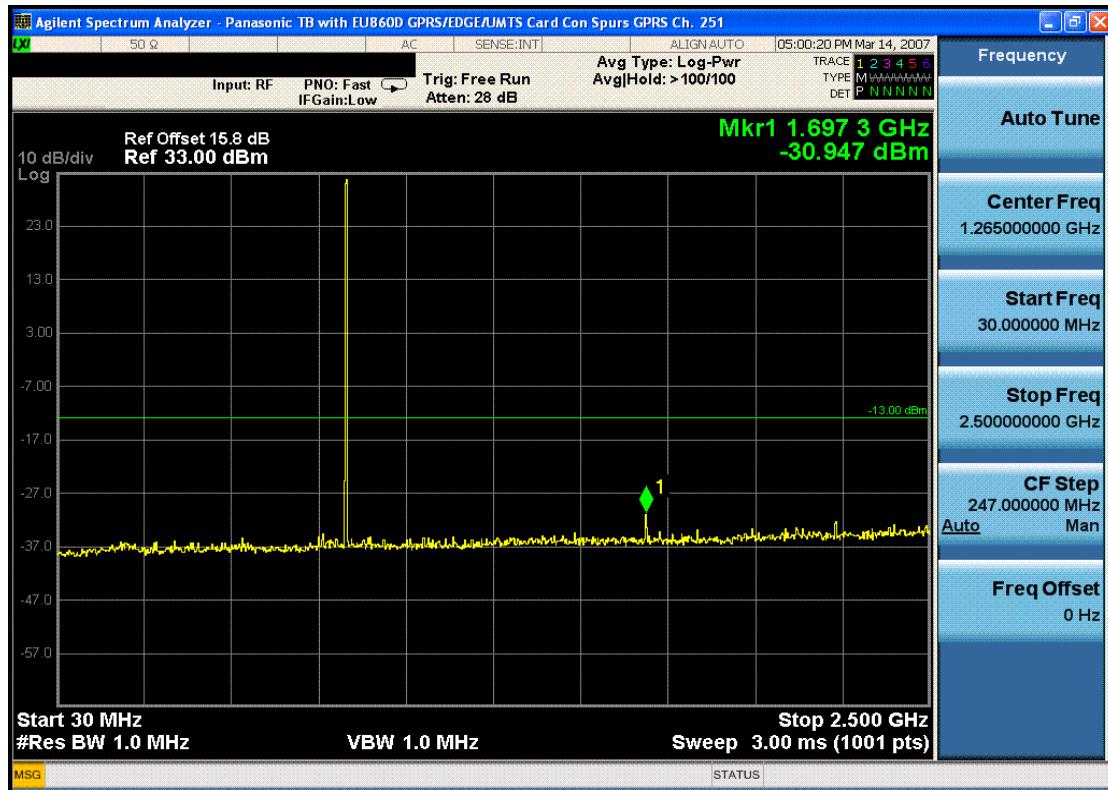


Plot 7-7. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

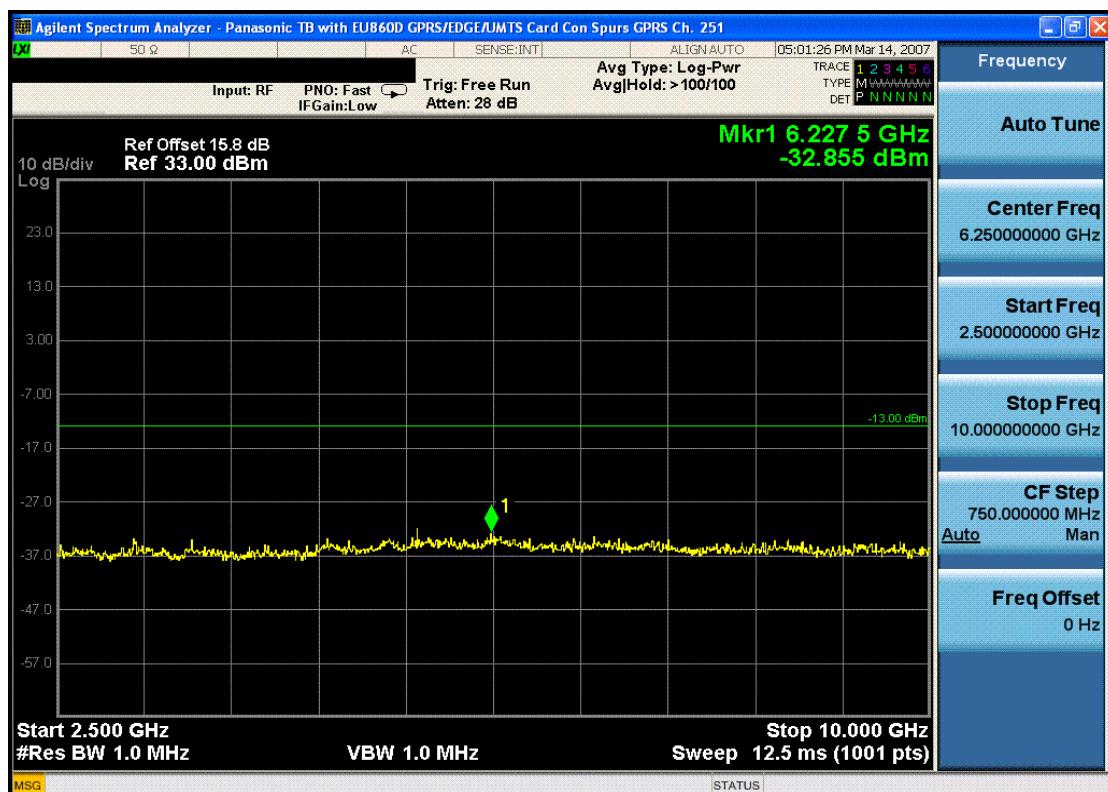


Plot 7-8. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 38 of 56

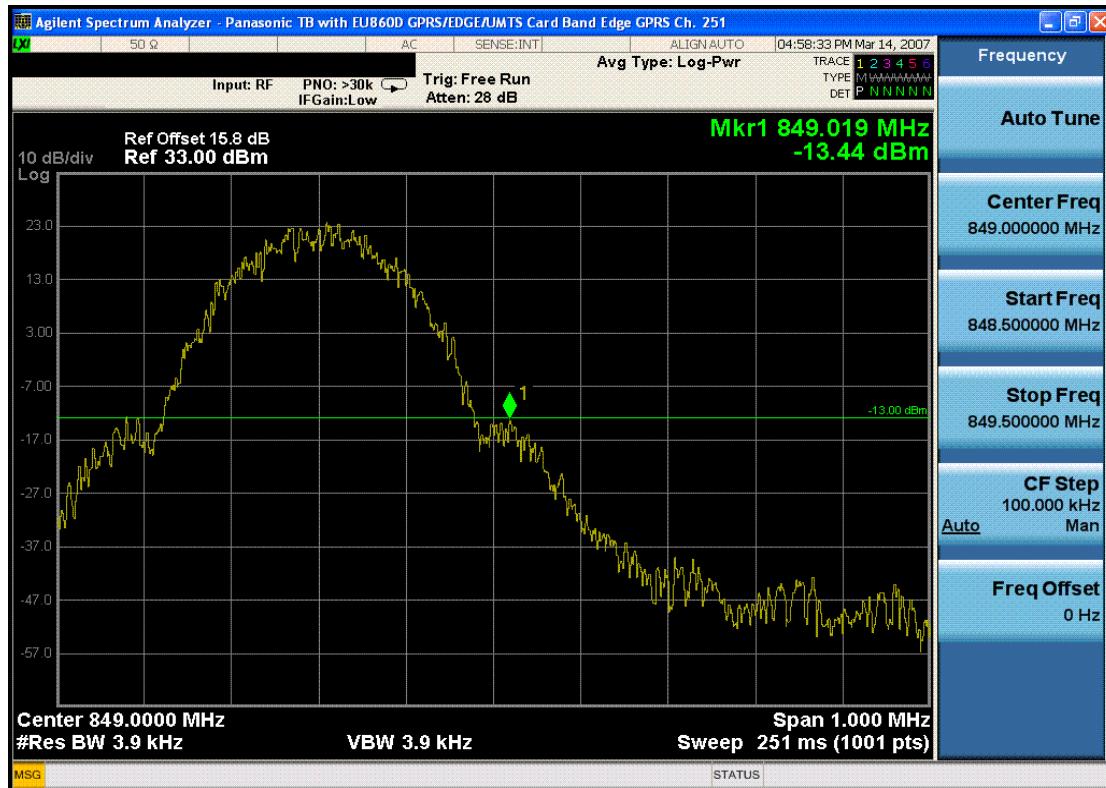


Plot 7-9. Band Edge Plot (Cellular GSM Mode – Ch. 251)

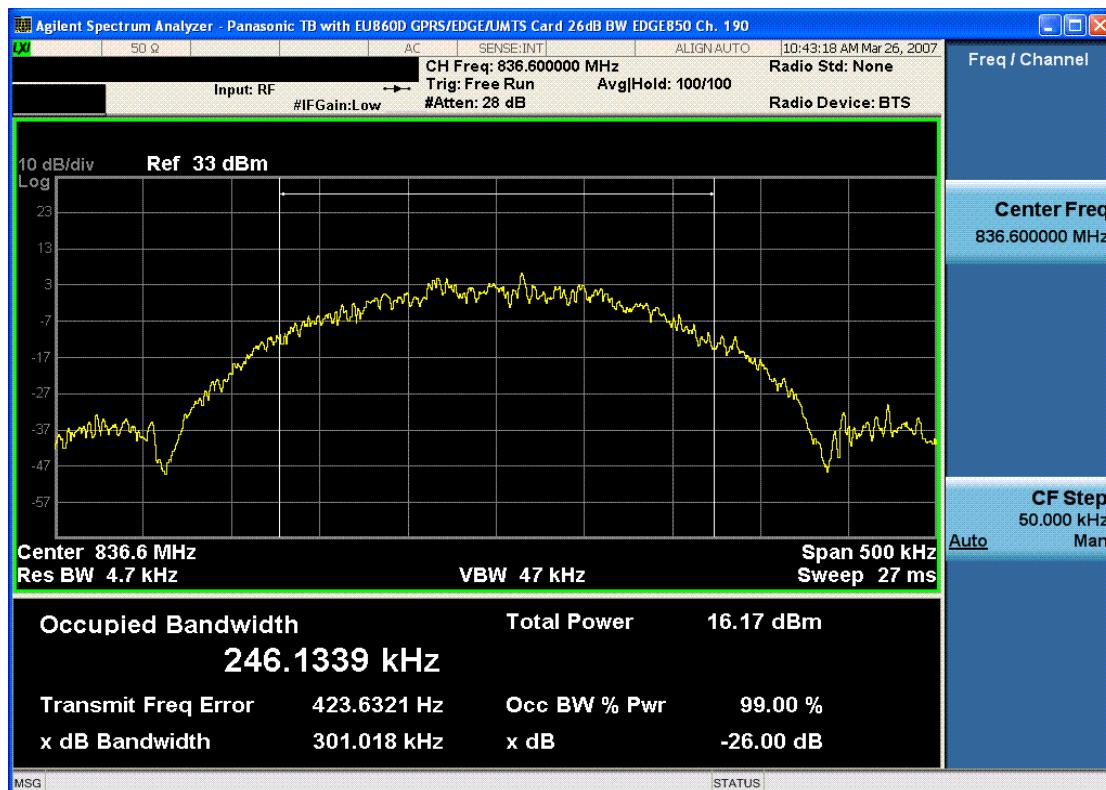

Plot 7-10. Occupied Bandwidth Plot (EDGE850 Mode – Ch. 190)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 39 of 56

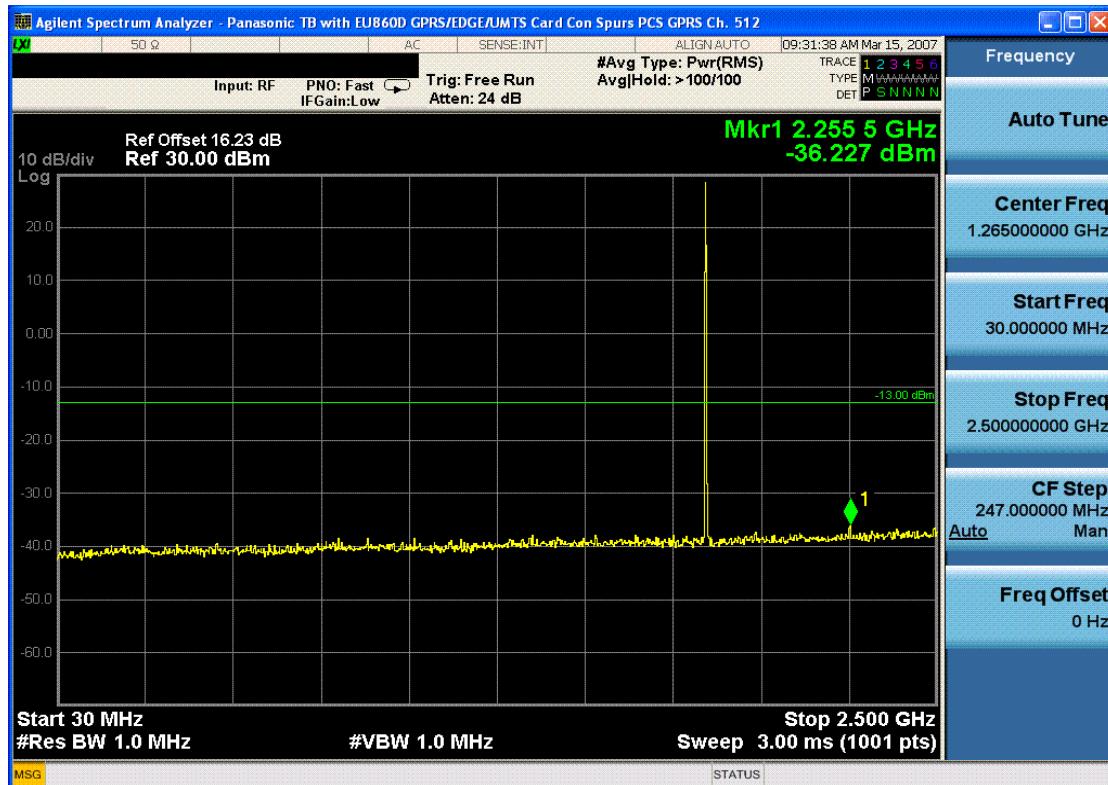


Plot 7-11. Conducted Spurious Plot (PCS GPRS Mode – Ch. 512)




Plot 7-12. Conducted Spurious Plot (PCS GPRS Mode – Ch. 512)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 40 of 56

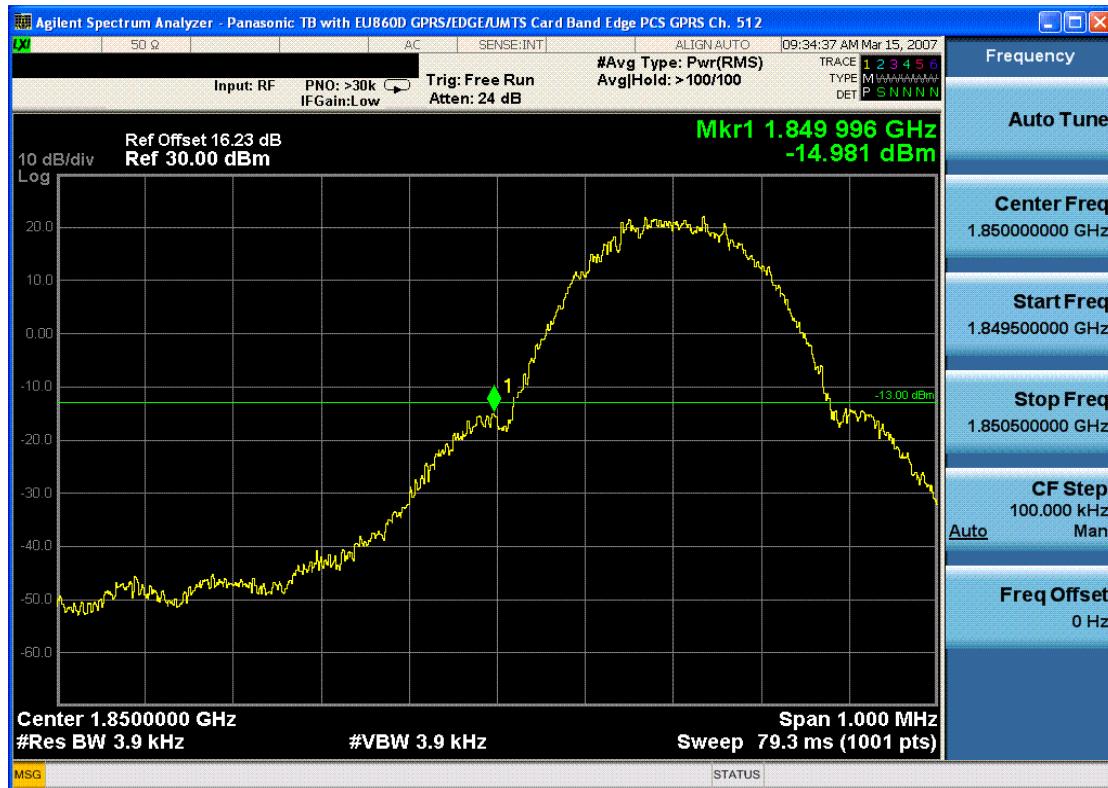

Plot 7-13. Band Edge Plot (PCS GSM Mode – Ch. 512)

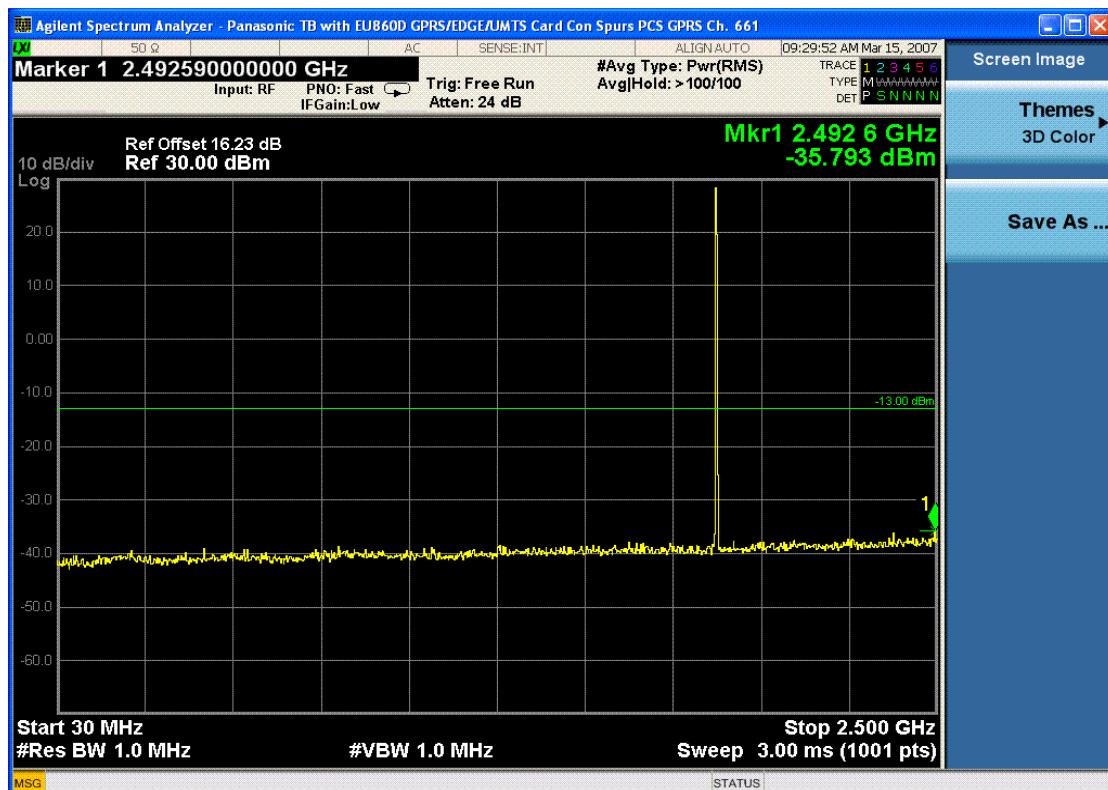

Plot 7-14. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 41 of 56




Plot 7-15. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)




Plot 7-16. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 42 of 56

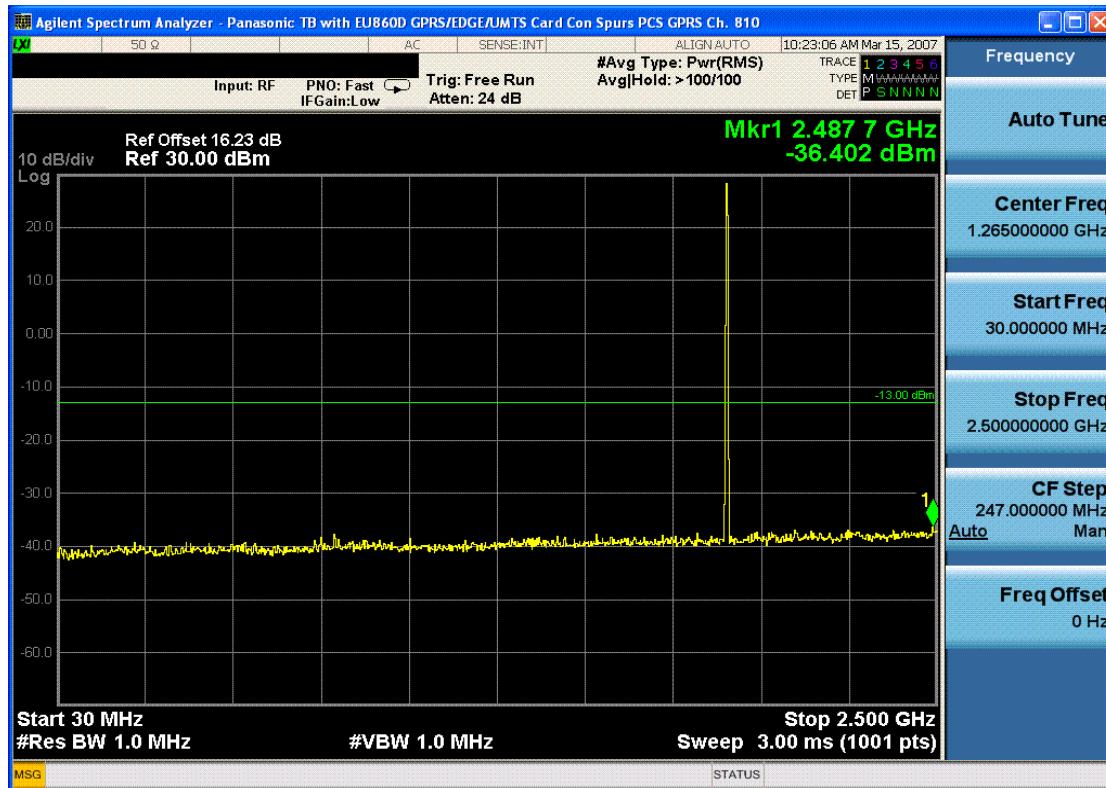

Plot 7-17. Conducted Spurious Plot (PCS GPRS Mode – Ch. 810)

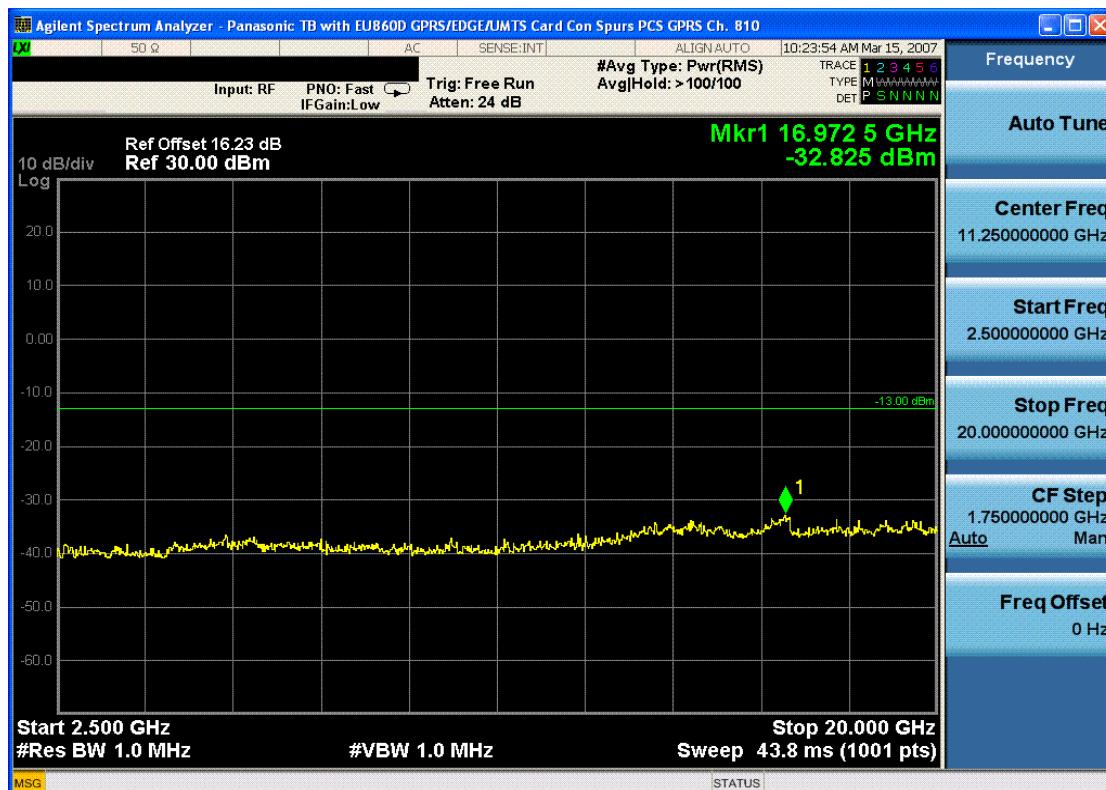


Plot 7-18. Conducted Spurious Plot (PCS GPRS Mode – Ch. 810)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 43 of 56




Plot 7-19. Band Edge Plot (PCS GSM Mode – Ch. 810)

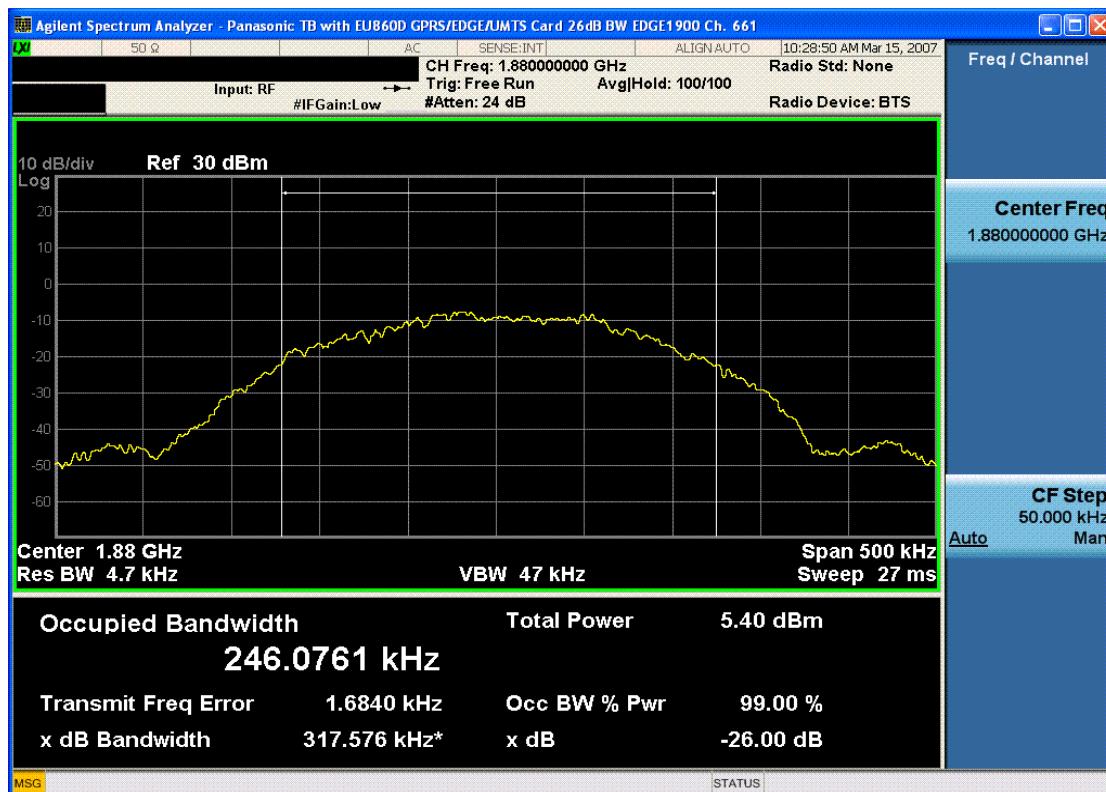


Plot 7-20. Occupied Bandwidth Plot (EDGE1900 Mode – Ch. 661)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 44 of 56

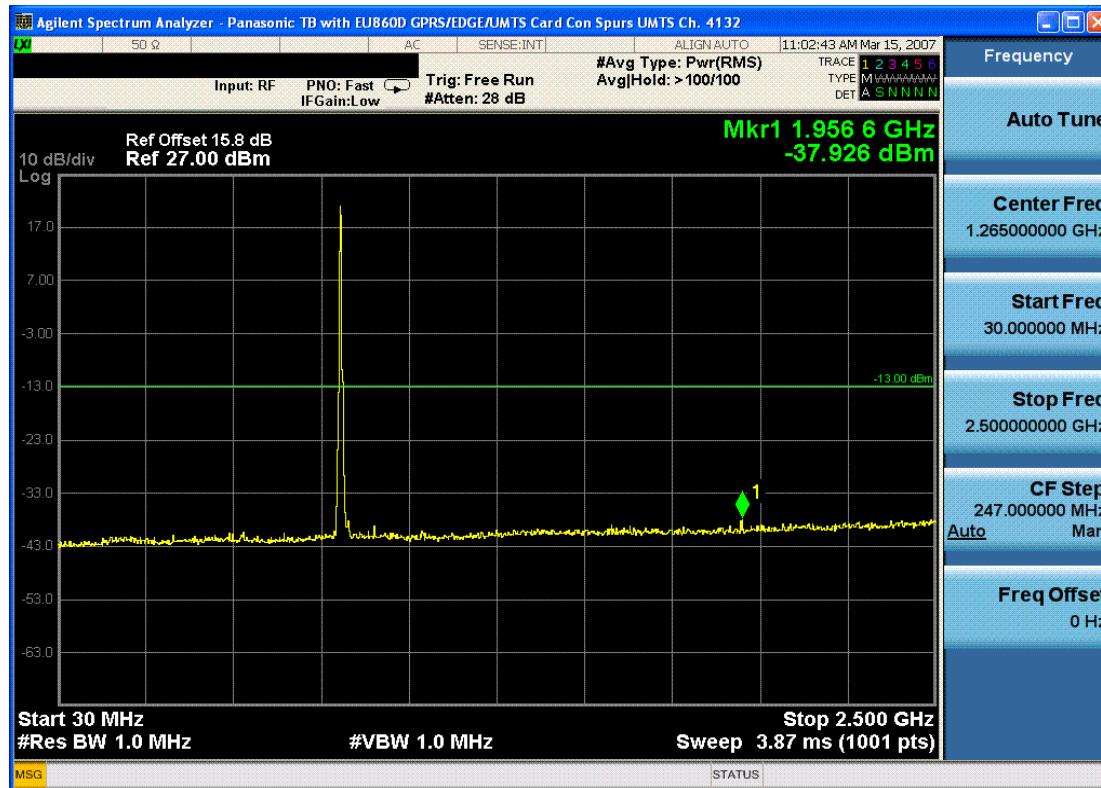


Plot 7-21. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

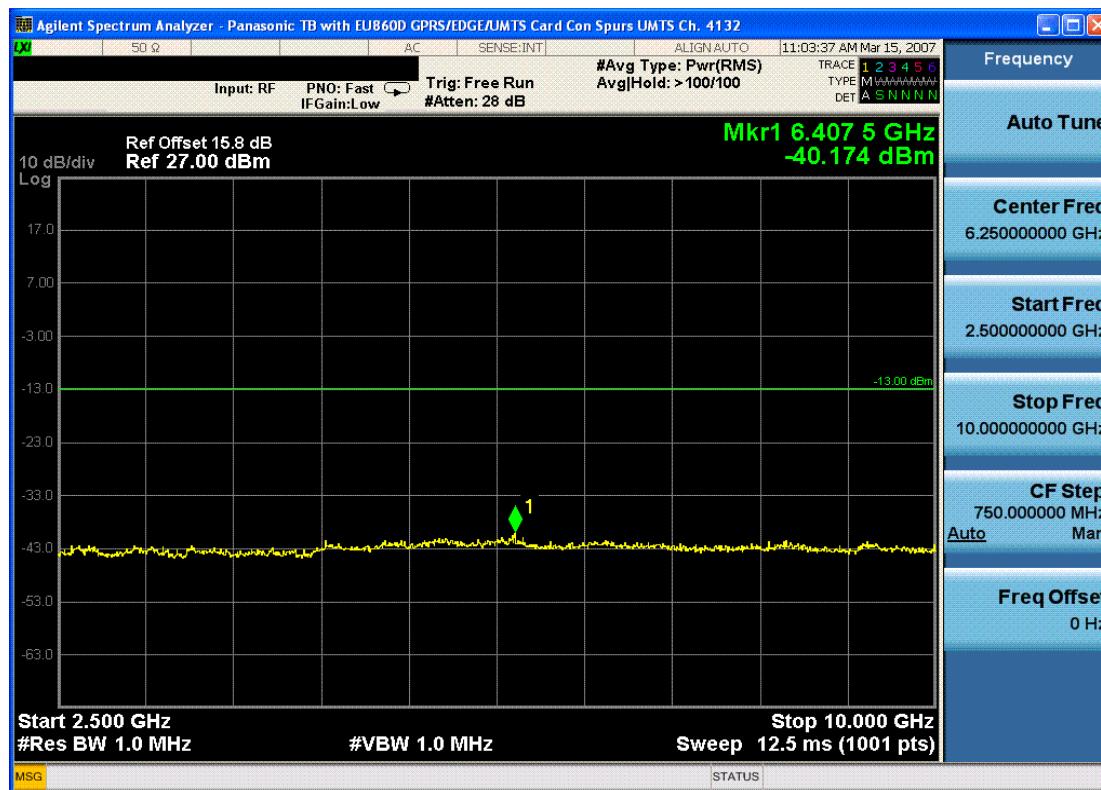


Plot 7-22. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 45 of 56

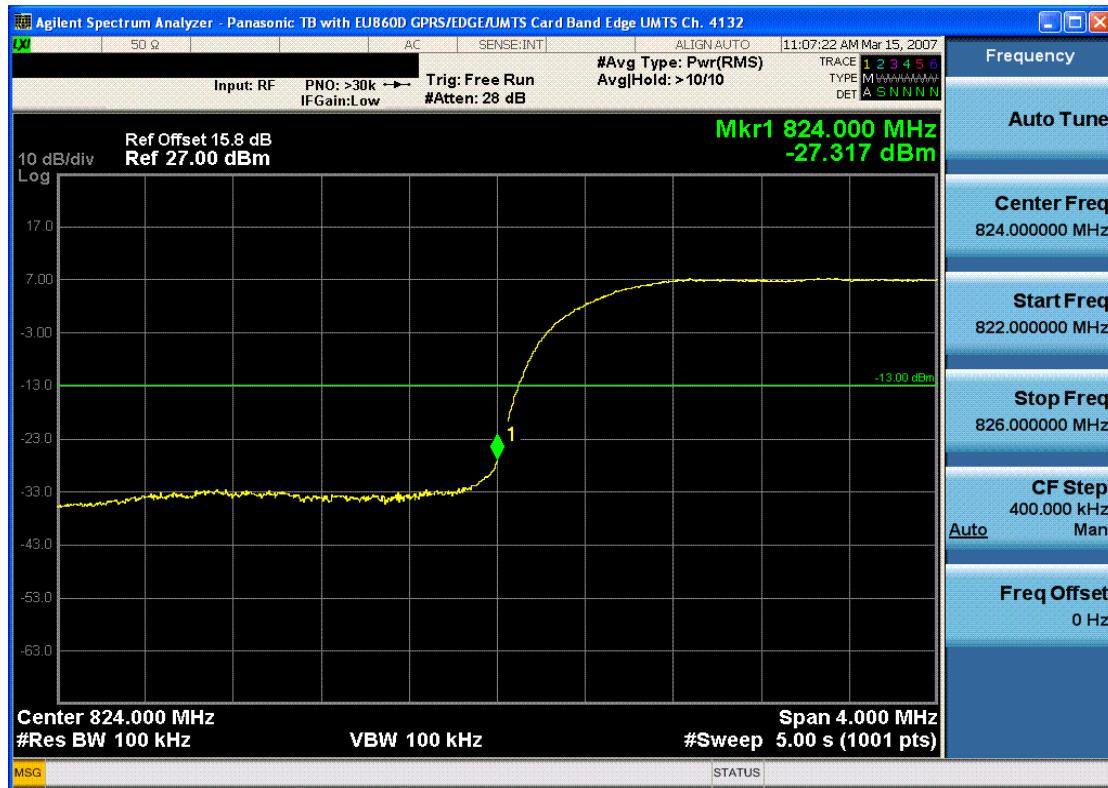


Plot 7-23. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)

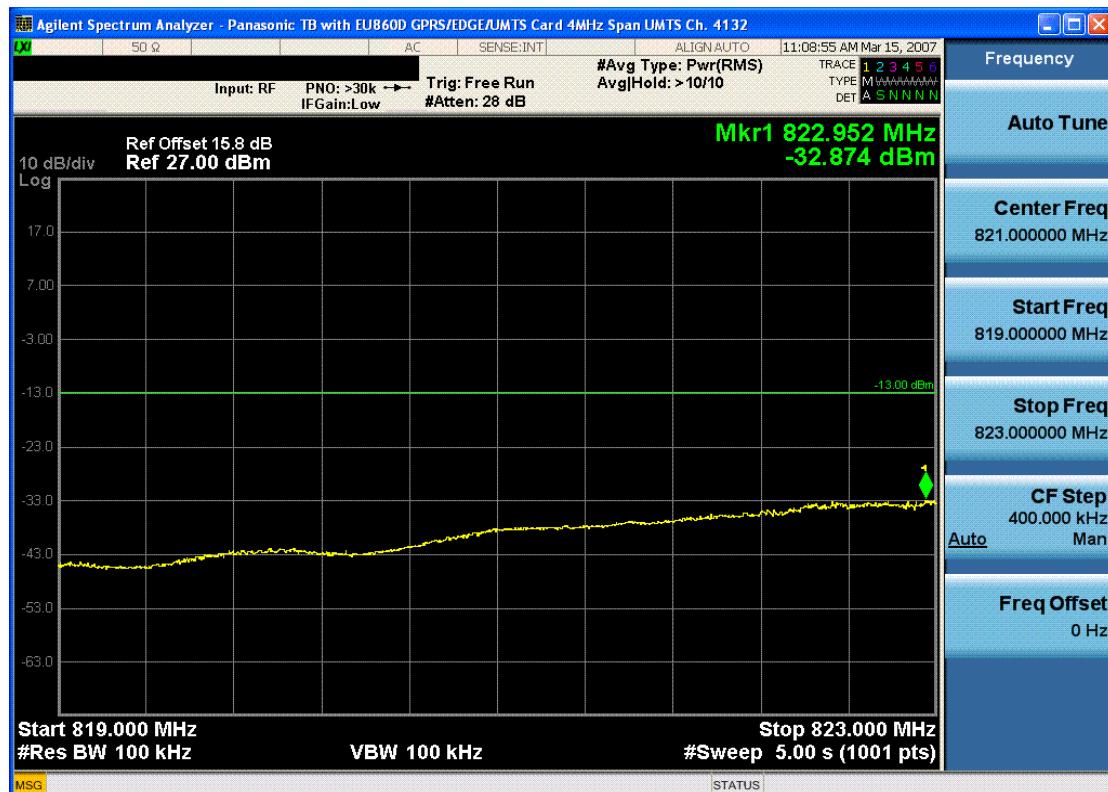


Plot 7-24. 4MHz Span Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 46 of 56

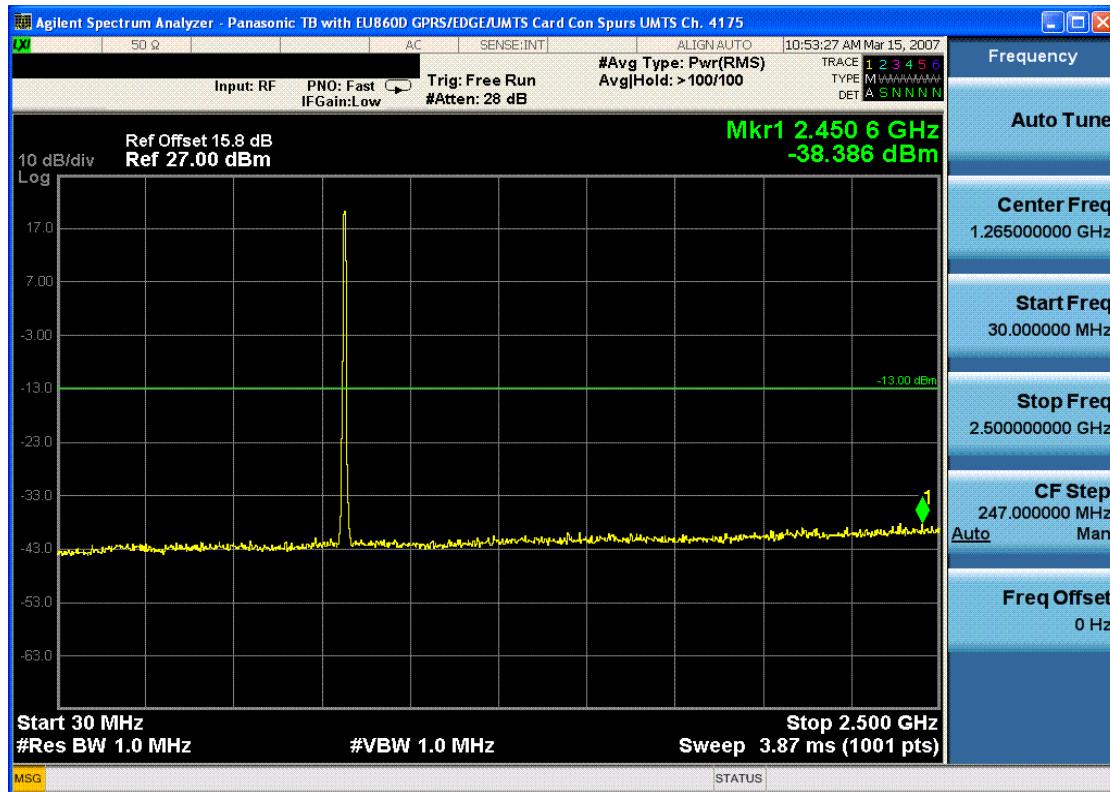


Plot 7-25. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

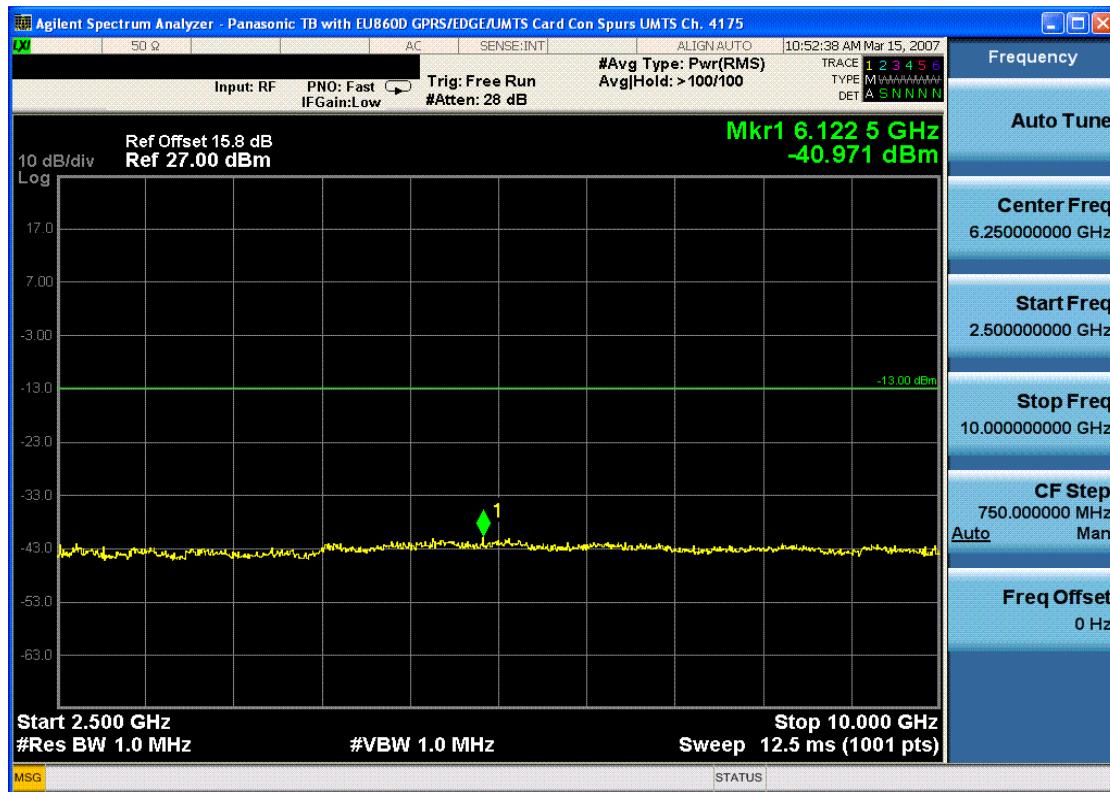


Plot 7-26. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 47 of 56

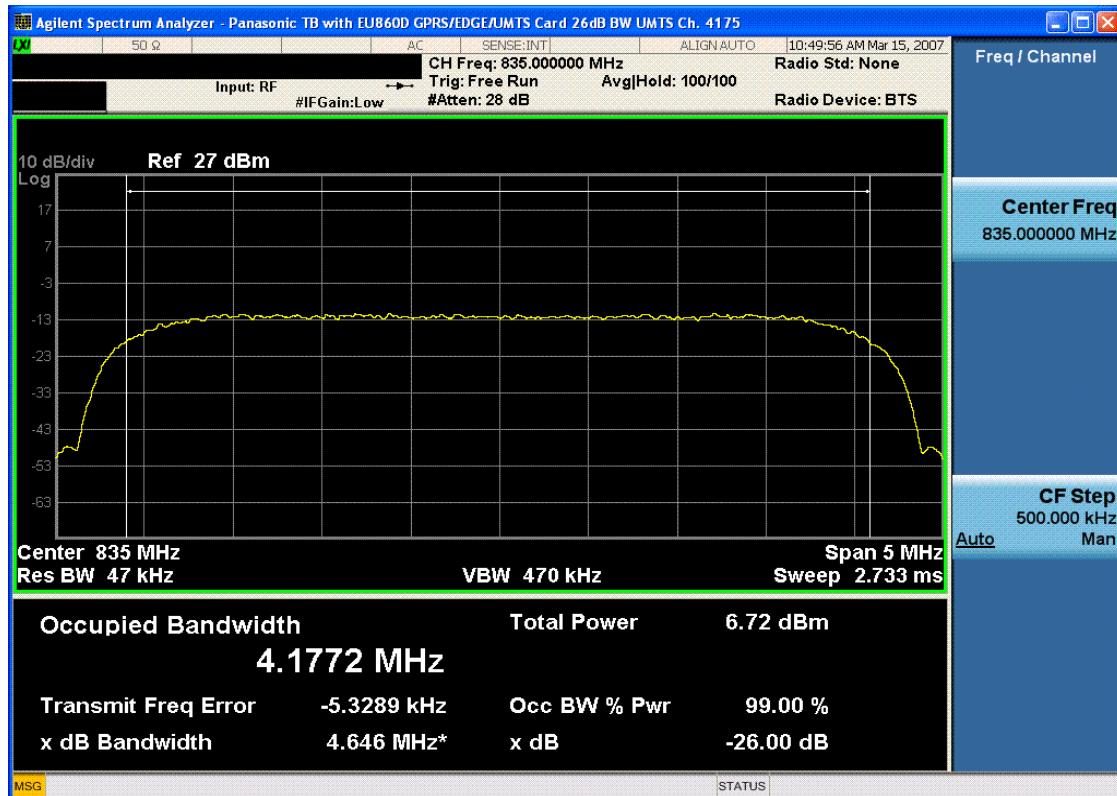


Plot 7-27. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

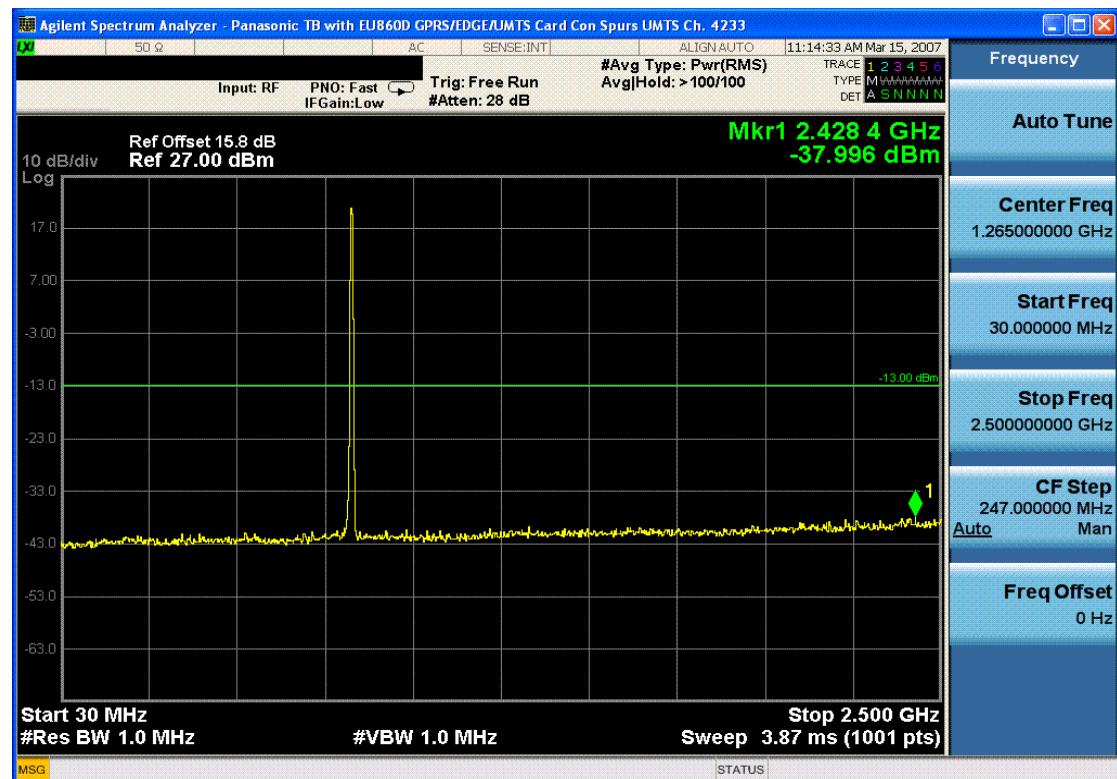


Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 48 of 56

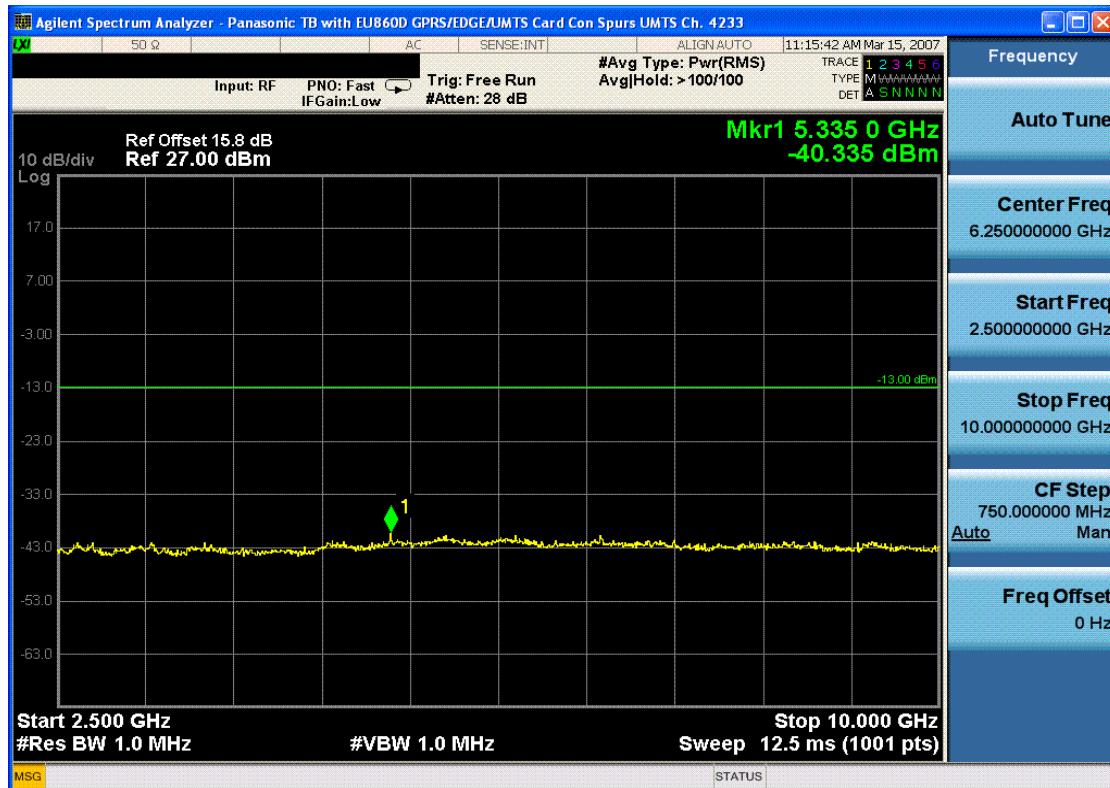

Plot 7-29. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

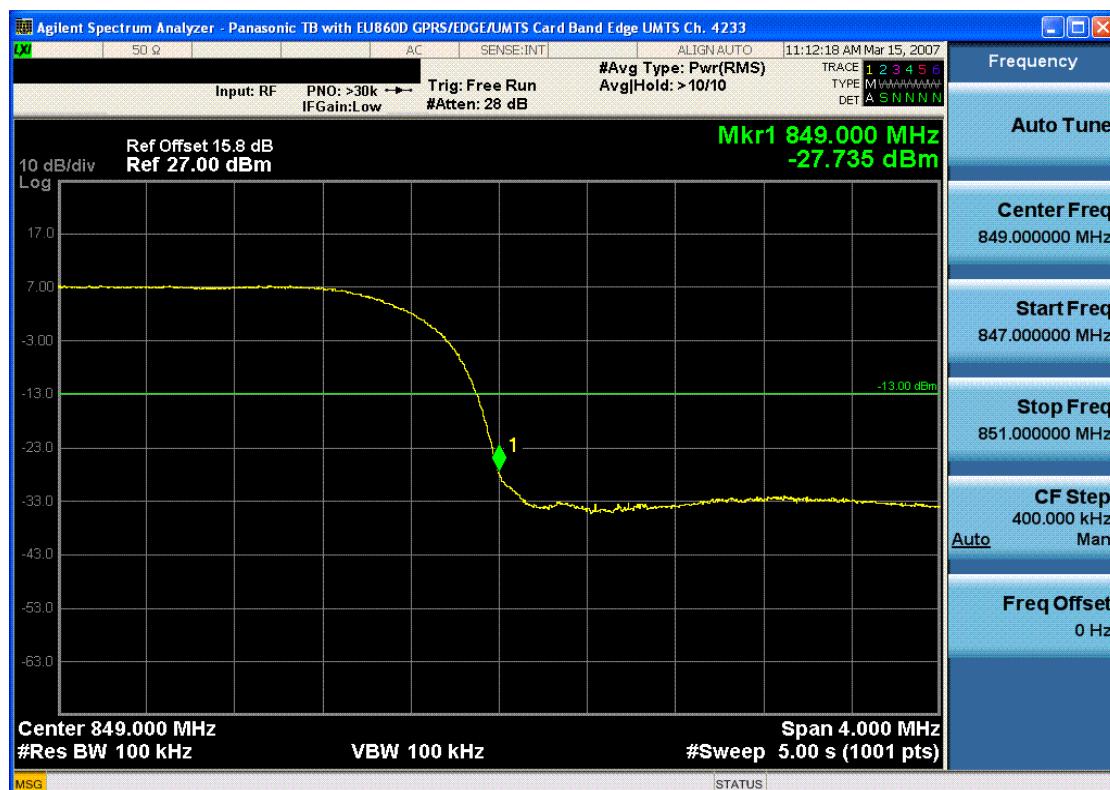


Plot 7-30. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 49 of 56



Plot 7-31. 4MHz Span Plot (Cellular WCDMA Mode – Ch. 4233)

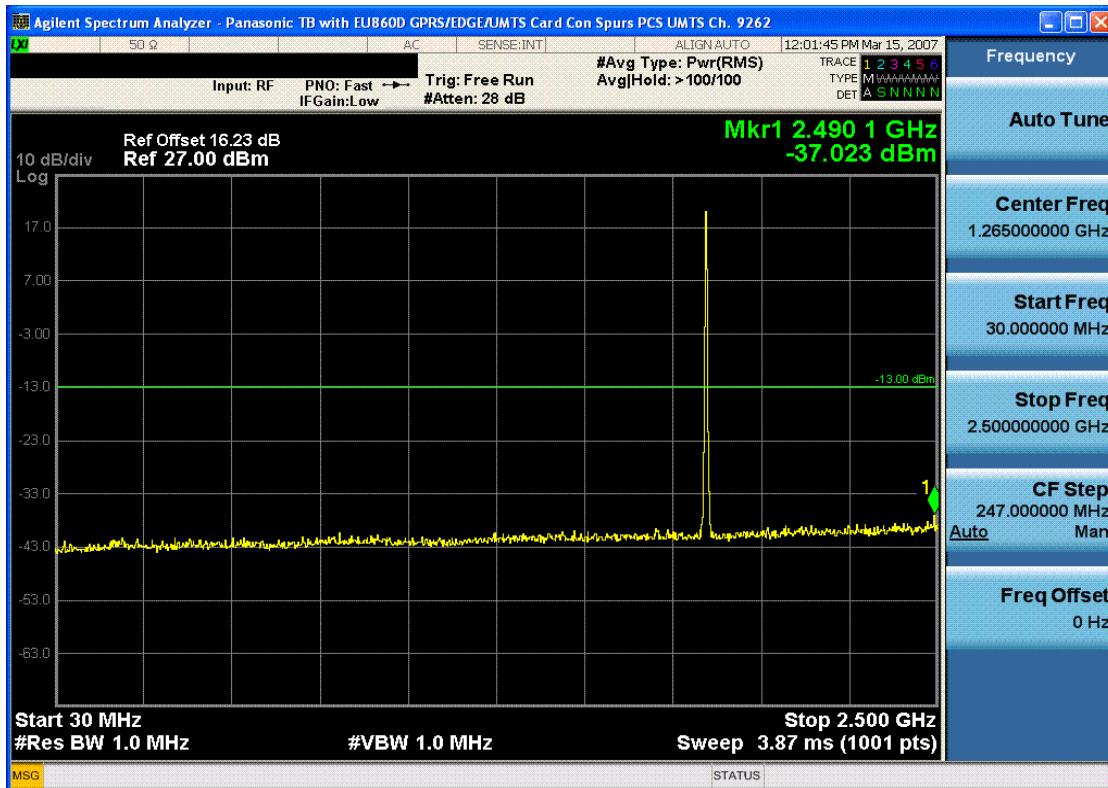


Plot 7-32. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 50 of 56




Plot 7-33. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

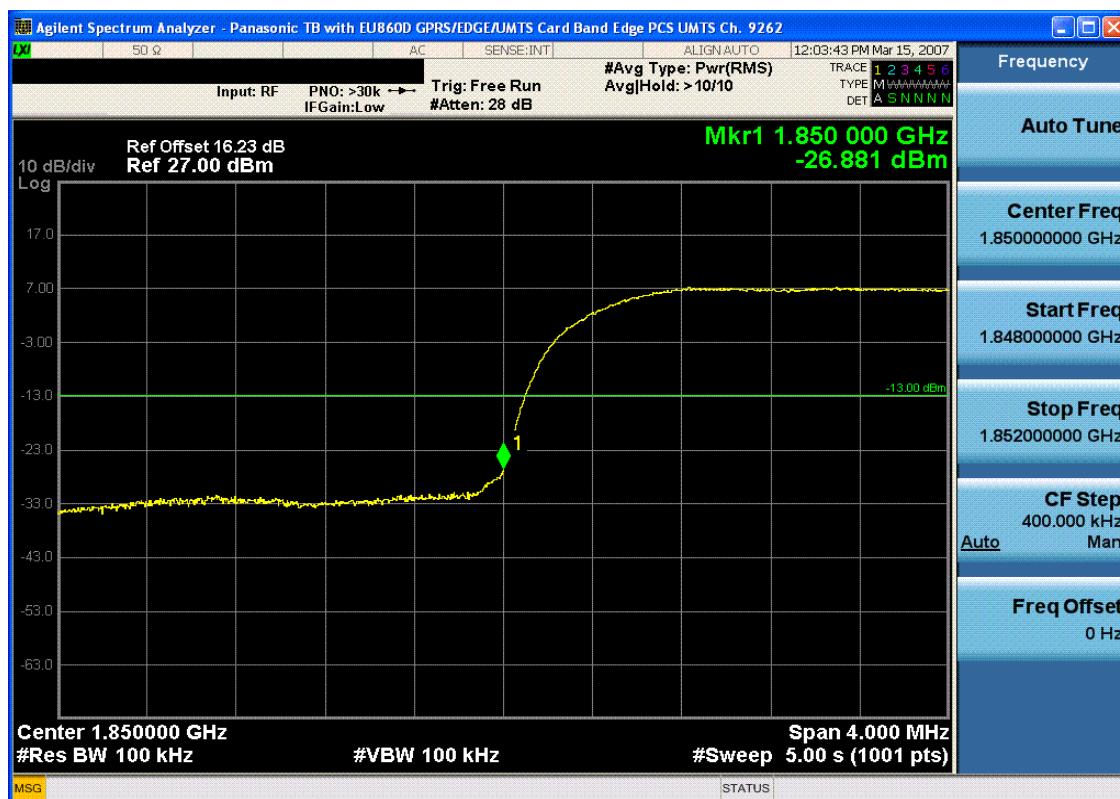


Plot 7-34. Band Edge Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 51 of 56

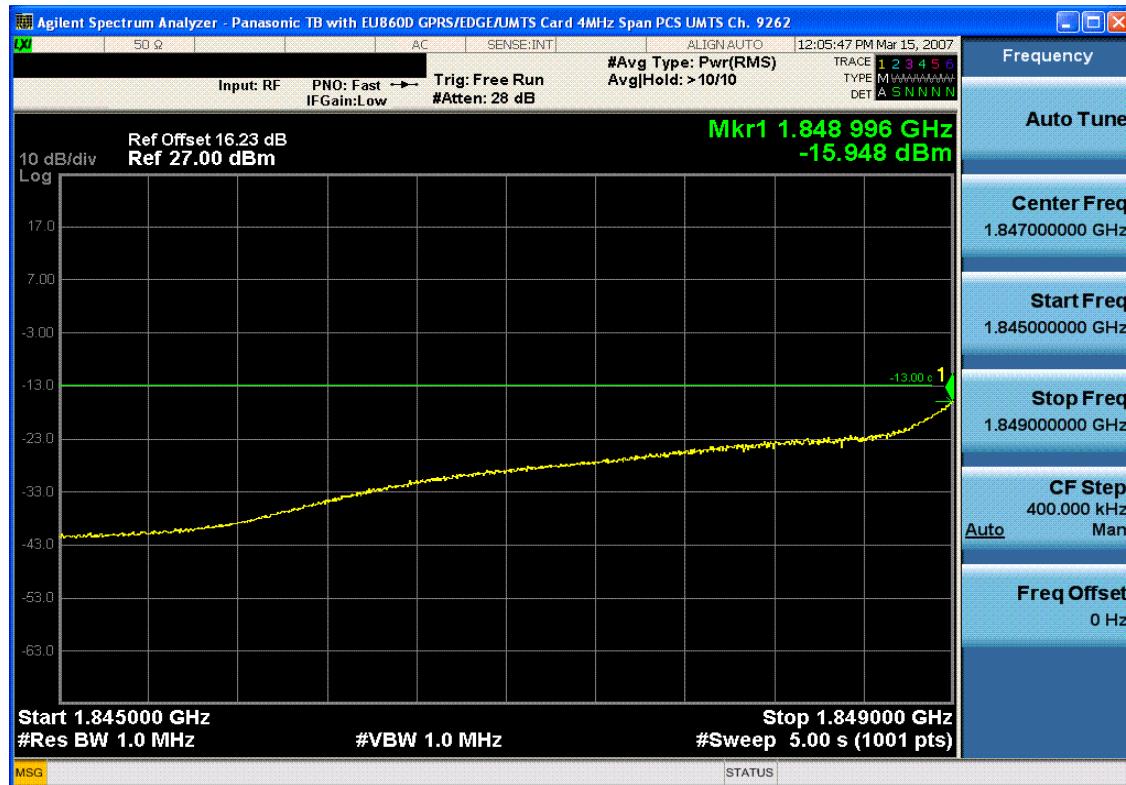

Plot 7-35. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9262)

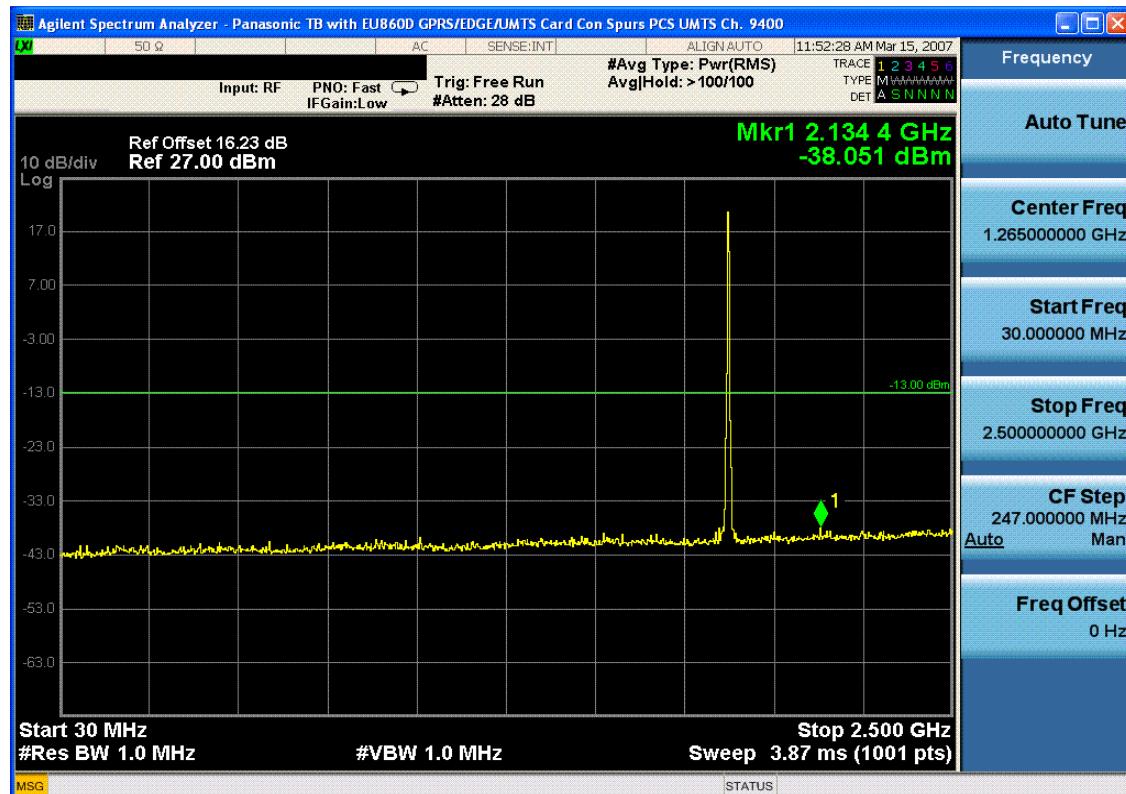


Plot 7-36. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 52 of 56




Plot 7-37. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

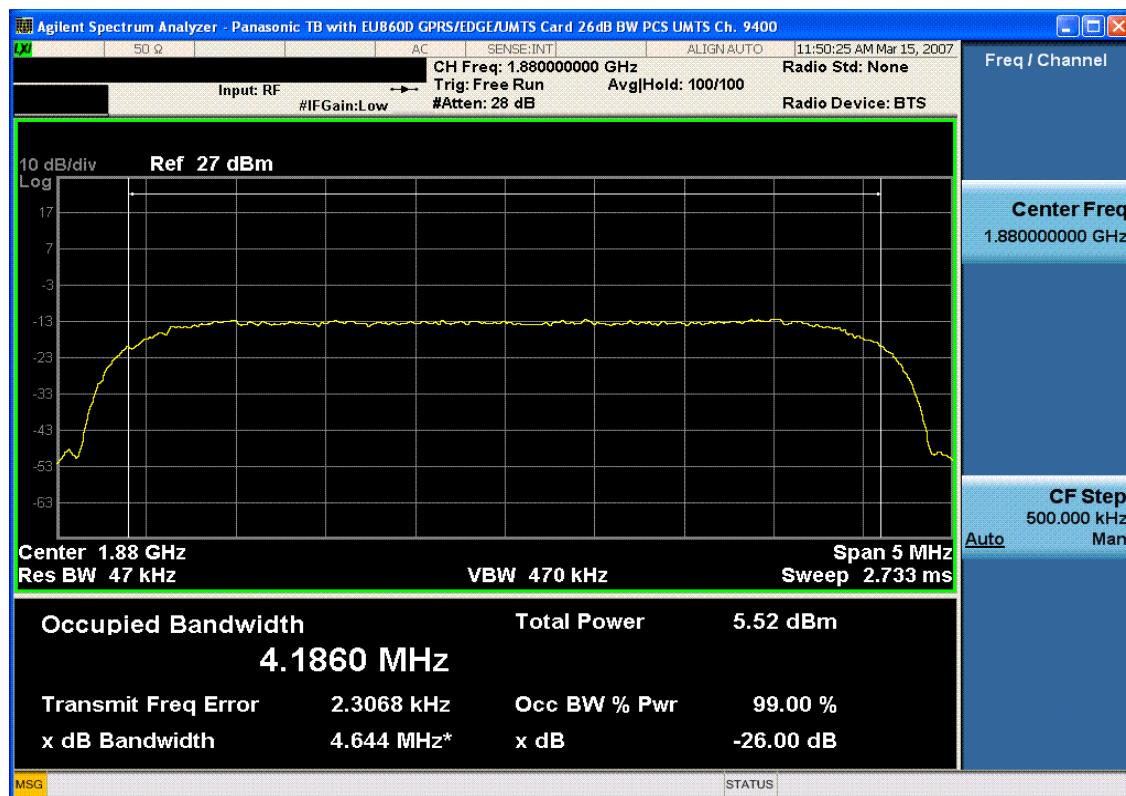


Plot 7-38. Occupied Bandwidth Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 53 of 56

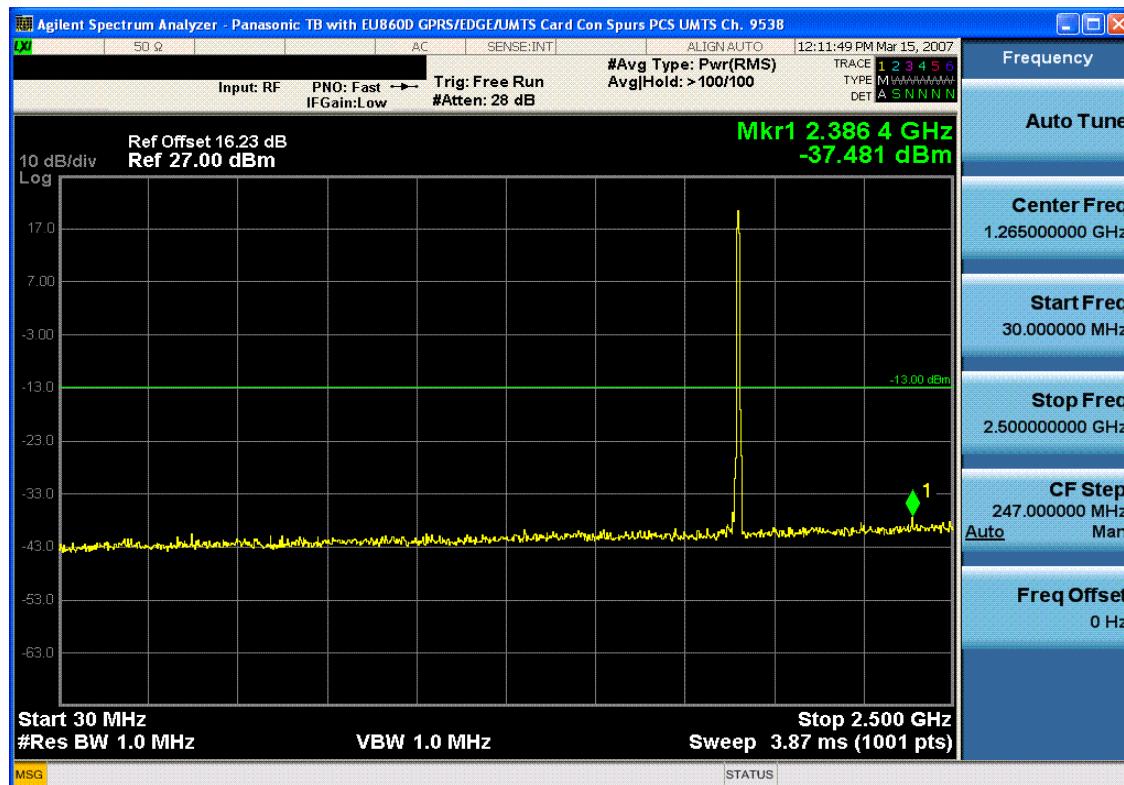


Plot 7-39. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

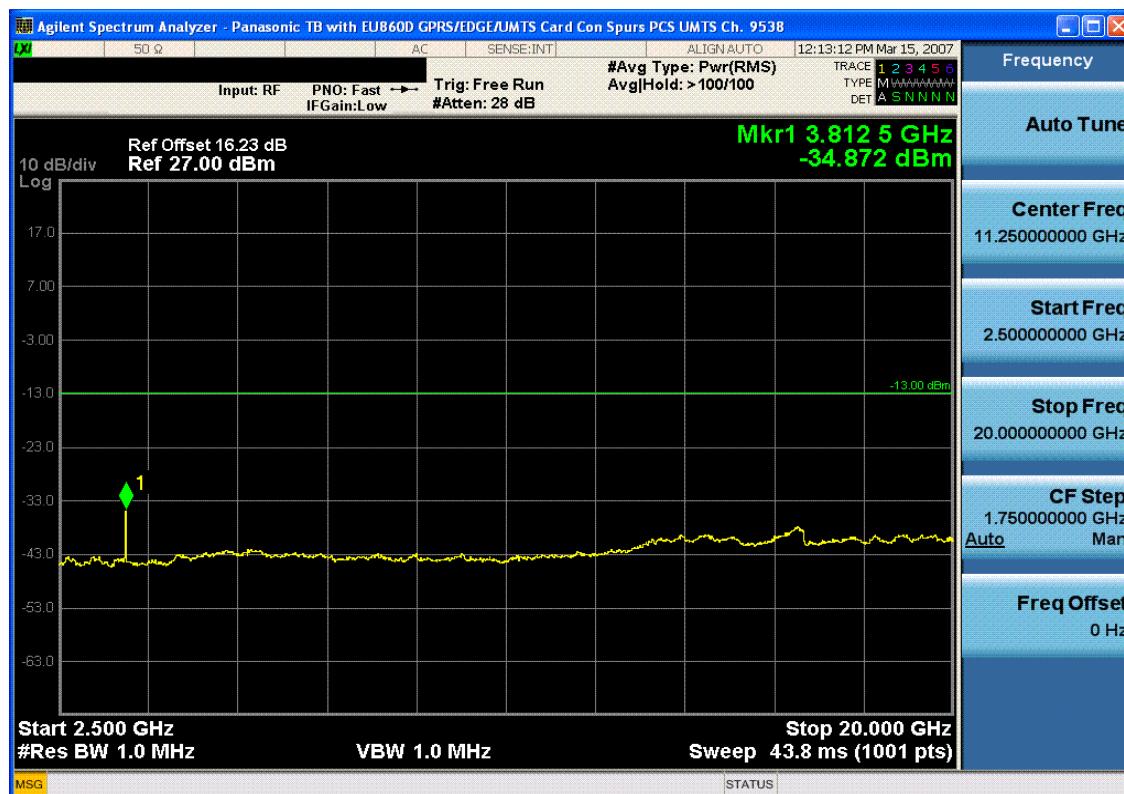


Plot 7-40. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 54 of 56

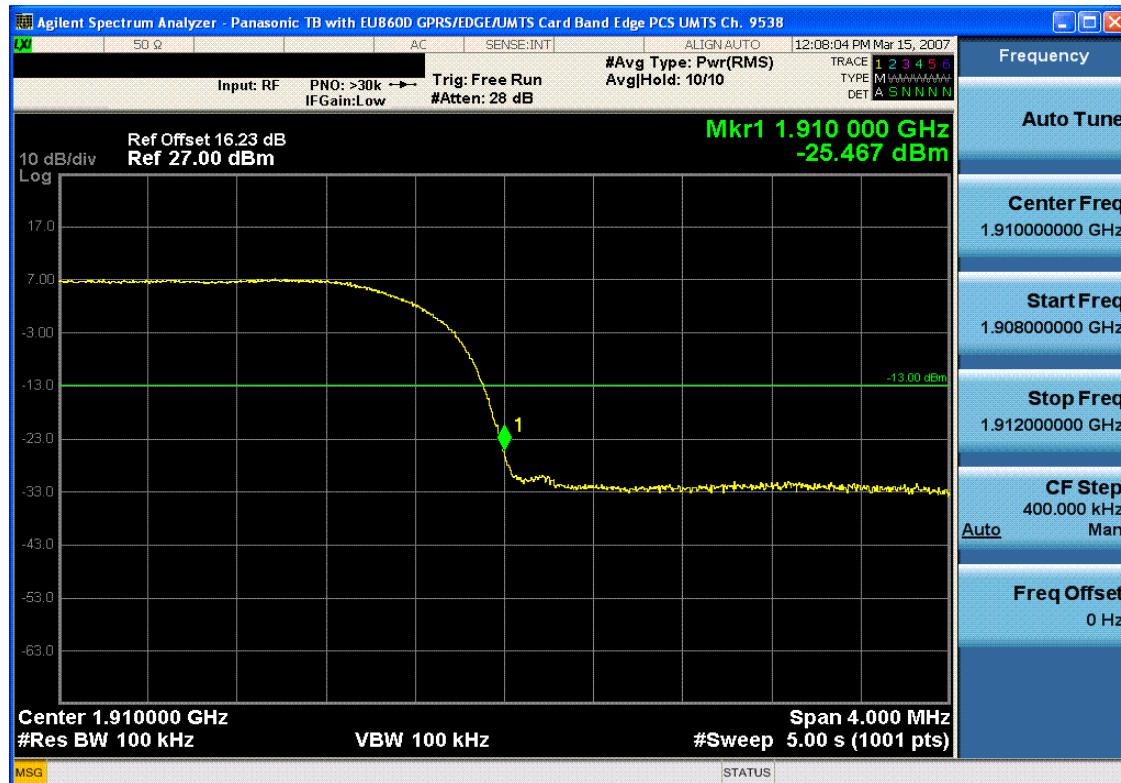

Plot 7-41. Band Edge Plot (PCS WCDMA Mode – Ch. 9538)

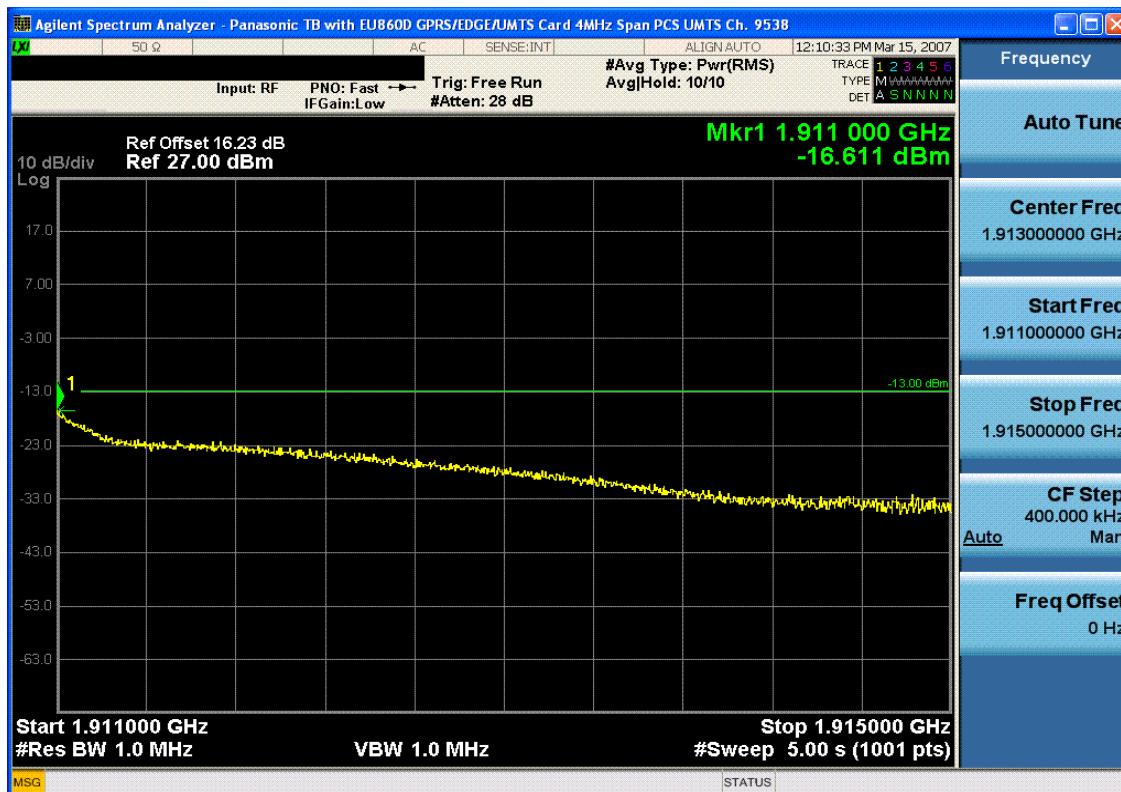

Plot 7-42. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 55 of 56



## 8.0 CONCLUSION

The data collected show that the **Panasonic Toughbook Models: CF-T7/CF-W7 FCC ID: ACJ9TGCF-TW72** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.

FCC ID: ACJ9TGCF-TW72		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0708210924.ACJ	Test Dates: September 7 - 10, 2007	EUT Type: Toughbook Models: CF-T7/CF-W7		Page 56 of 56