



# PCTEST ENGINEERING LABORATORY, INC.

6660 – B Dobbin Road · Columbia, MD 21045 · USA

Telephone 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com (email: randy@pctestlab.com)

## CERTIFICATE OF COMPLIANCE (SAR EVALUATION)



### APPLICANT NAME & ADDRESS:

Matsushita Electric Industrial Co., Ltd.  
1006 Oaza Kadoma, Kadoma,  
Osaka, 571 JAPAN

### DATE & LOCATION OF TESTING:

Dates of Tests: November 24, 2004  
Test Report S/N: SAR.241124418.ACJ  
Test Site: PCTEST Lab, Columbia, MD USA  
Project Number: ITPD-04-F034A

<b>FCC ID:</b>	<b>ACJ9TGCF-29C</b>
<b>APPLICANT NAME:</b>	<b>Matsushita Electric Industrial Co., Ltd.</b>

**EUT Type:** Panasonic Notebook w/ Boomer-II OEM Wireless Radio Modem Module FCC ID: PQS-BM28001, Sierra Wireless CDMA OEM Radio Module FCC ID: N7NSB555, also incorporating Intel WLAN FCC ID: PD9WM3B2200BG using Car Mounter Model: CF-WEB291

**Tx Frequency:** 806 ~ 821 MHz, 821 ~ 824 MHz

**Rx Frequency:** 806 ~ 821 MHz, 821 ~ 824 MHz

**Max. RF Output Power:** Mask G: 1.706 W (32.320 dBm)/ Mask H: 1.668 W (32.223 dBm)  
w/ External Antenna: Mask G: 1.900 W (32.820 dBm)/ Mask H: 1.835 W (32.684 dBm)

**Max. SAR Measurement:** 0.44 W/kg CDMA Body SAR

**Trade Name/Model(s):** CF-29mk2

**FCC Rule Part(s):** §2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]

**Application Type:** Certification

**Test Device Serial No.:** Identical Prototype [S/N: 4GKSA00904]


**Installed Options:**  WLAN  CDMA OEM Radio  OEM Modem  Other

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001) and IEEE Std. P1528 D1.2 (April 2003).

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is ERP for Part 90. SAR compliance for body-worn operating configuration is based on a separation distance of 1.5 cm between the back of the unit and the body of the user. End-users must be informed of the body-worn operating requirements for satisfying RF exposure compliance.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

  
Alfred Cirwithian  
Vice President Engineering



PCTEST SAR TEST REPORT	 <b>FCC CERTIFICATION</b>			Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 1 of 24

# TABLE OF CONTENTS

1. INTRODUCTION / SAR DEFINITION .....	3
2. SAR MEASUREMENT SETUP .....	4
3. ALIDX-500 E-FIELD PROBE SYSTEM .....	5
4. PROBE CALIBRATION PROCESS .....	6
5. PHANTOM & EQUIVALENT TISSUES.....	7
6. TEST SYSTEM SPECIFICATIONS.....	8
7. DOSIMETRIC ASSESSMENT & PHANTOM SPECS.....	9
8. TEST CONFIGURATION POSITION .....	10
9. ANSI/IEEE C95.1 - 1992 RF EXPOSURE LIMITS.....	11
10. MEASUREMENT UNCERTAINTIES .....	12
11. SAR TEST DATA SUMMARY.....	13
12. SAR TEST EQUIPMENT .....	14
13. CONCLUSION.....	15
14. REFERENCES.....	16
EXHIBIT A. SYSTEM VERIFICATION.....	17
EXHIBIT A. SAR DATA SUMMARY .....	18
EXHIBIT B. MPE DATA .....	20
EXHIBIT C. SAR TEST DATA .....	21
EXHIBIT D. SAR TEST SETUP PHOTOGRAPHS .....	22
EXHIBIT E. DIPOLE VALIDATION .....	23
EXHIBIT F. PROBE CALIBRATION .....	24

<b>PCTEST SAR TEST REPORT</b>		<b>FCC CERTIFICATION</b>		<b>Reviewed by:</b> Quality Manager
<b>SAR Filename:</b> SAR.241124319.ACJ	<b>Test Dates:</b> Nov. 24, 2004	<b>EUT Type:</b> Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	<b>FCC ID:</b> ACJ9TGCF-29C	Page 2 of 24

# 1. INTRODUCTION / SAR DEFINITION

The FCC has adopted the guidelines for evaluating the environmental effects of radiofrequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in *IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz*. (c) 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in *IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave*[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in *Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields*, NCRP Report No. 86 (c) NCRP, 1986, Bethesda, MD 20814.[6] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

## SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy ( $dU$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1.1).

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dV} \right)$$

Figure 1.1  
SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

where:

$\sigma$	=	conductivity of the tissue-simulant material (S/m)
$\rho$	=	mass density of the tissue-simulant material (kg/m <sup>3</sup> )
$E$	=	Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 3 of 24

## 2. SAR MEASUREMENT SETUP


### Robotic System

Measurements are performed using the ALIDX-500 automated dosimetric assessment system. The ALIDX-500 is made by IDX Robotics, Inc. (IDX) in the United States and consists of high precision robotics system (CRS), robot controller, Pentium 4 computer, near-field probe, probe alignment sensor, and the Left and Right SAM phantoms containing the head/brain equivalent tissue, and the flat phantoms for body/muscle equivalent. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

### System Hardware

The Robot table consists of the power supply, robot controller, safety computer, teach pendant (Joystick), six-axis robot arm, and the probe. The cell controller consists of DELL Dimension 4300 Pentium-4 1.6 GHz computer with Windows 2000 system and SAR Measurement software, National Instruments analog card, monitor, keyboard, and mouse. The robot controller is connected to the cell controller to communicate between the two computers. The probe data is connected to the cell controller via data acquisition cables.

### System Electronics

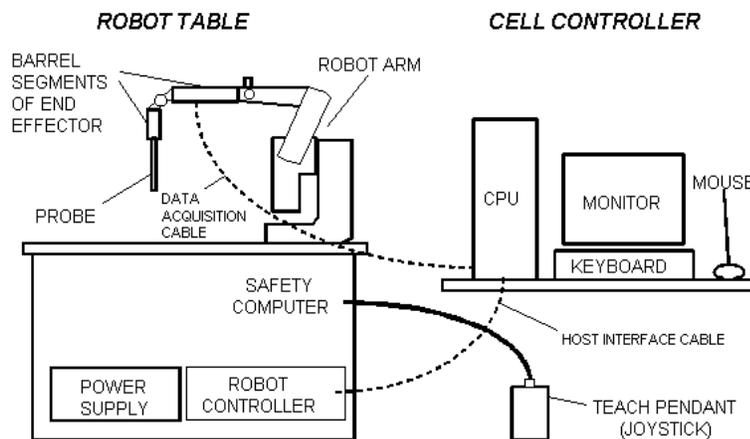

**Figure 2.1**  
**SAR Measurement System Setup**

When the Robot is in the home position, the Y-axis of the coordinate system parallels the line of intersection between the tabletop and the long axis of the Robot's Large Shoulder. The Teach Pendant may be used to establish the X,Y coordinate directions by depressing the 0-X and 0-Y MOTOR/AXIS switches while in axis mode.

The robot is first taught to position the probe sensor following a specific pattern of points. In the first sweep the sensor enclosure touches the inside of the phantom head. The SAR is measured on a defined grid of points that are concentrated on the surface of the head closest to the antenna of the transmitting device (EUT).

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 4 of 24

### 3. ALIDX-500 E-FIELD PROBE SYSTEM

#### Probe Measurement System



Fig 3.1  
IDX System

The near-field probe is an implantable isotropic E-field probe that measures the voltages proportional to the  $|E|^2$  (electric) or  $|H|^2$  (magnetic) fields. The probe is enclosed in a hollow glass protective cylinder 9-mm. outer diameter, 0.5 mm. thickness and 30 cm. in length. The E-probe contains three electrically small array of orthogonal dipoles strategically placed to provide greater accuracy and to compensate for near-field spatial gradients. The probe contains diodes that are placed over the gap of the dipoles to improve RF detection. The electrical signal detected by each diode is amplified by three DC amplifiers and are contained in a shielded container in the robot end effector so its performance is not affected by the presence of incident electromagnetic fields (see Fig. 3.1).

#### Probe Specifications

Frequency Range:	10 kHz – 6.0 GHz
Calibration:	In air from 10 MHz to 6.0 GHz In brain and muscle simulating tissue at Frequencies from 835 up to 5800MHz
Sensitivity:	3.5 mV/mW/cm <sup>2</sup> (air – typical)
DC Resistance:	300 kohm
Isotropic Response:	0.25 dB
Dynamic Range:	10 mW/kg – 100 W/kg
Resistance to Pull:	25 N
Probe Length:	290 mm
Probe Tip Material:	Glass
Probe Tip Length:	40 mm
Probe Tip Diameter:	7 ± 0.2 mm
Application:	SAR Dosimetry Testing HAC (Hearing Aid Compatibility) Compliance tests of mobile phones



Figure 3.2  
Triangular Probe Configuration

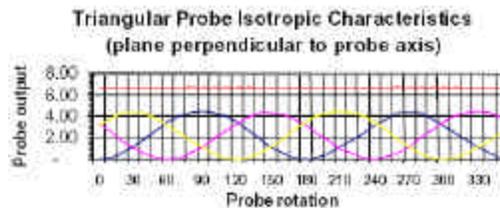


Figure 3.3  
Probe Characteristics

PCTEST SAR TEST REPORT	 <b>FCC CERTIFICATION</b>			Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 5 of 24

# 4. PROBE CALIBRATION PROCESS

## Dosimetric Assessment Procedure

Each E-Probe/Probe amplifier combination has unique calibration parameters. A TEM calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the Probe to a known E-field density (1mW/cm<sup>2</sup>) using an RF Signal generator, TEM cell, and RF Power Meter. The SAR measurement software is used for Probe calibration.

## Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or some other methodologies above 1 GHz for free space. For the free space calibration, we place the probe in the volumetric center of the cavity and at the proper orientation with the field. We then rotate the probe 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm<sup>2</sup>.

## Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

- $\Delta t$  = exposure time (30 seconds),
- C = heat capacity of tissue (brain or muscle),
- $\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

- $\sigma$  = simulated tissue conductivity,
- $\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

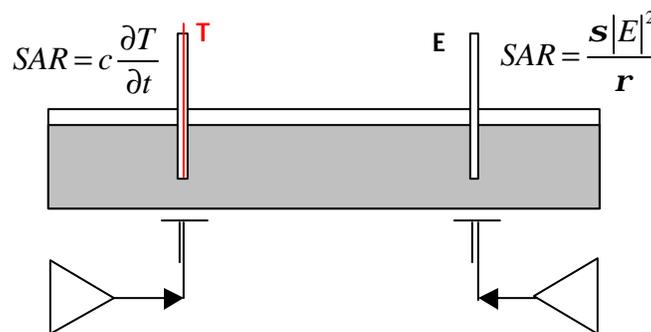


Figure 4.1 Temperature Assessment Test Configuration

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 6 of 24


# 5. PHANTOM & EQUIVALENT TISSUES



**Figure 5.1**  
SAM Phantoms


The Left and Right SAM Phantoms are constructed of a vivac composite integrated in a corian stand. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [7][8]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 5.1)

## Brain & Muscle Simulating Mixture Characterization



**Figure 5.2**  
Head Simulated Tissue

The brain and muscle mixtures consist of a viscous gel using hydroxyethylcellulose (HEC) gelling agent and saline solution (see Table 6.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove [9].(see Table 5.1)



**Figure 5.3**  
Body/Muscle Simulated Tissue

Ingredients (% by weight)	Frequency (MHz)									
	450		815		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	49.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.38	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7

Salt: 99% Pure Sodium Chloride      Sugar: 98% Pure Sucrose  
 Water: De-ionized, 16 MΩ resistivity      HEC: Hydroxyethyl Cellulose  
 DGBE: 99% Diethylene glycol butyl ether, [2-(2-hydroxyethoxy)ethanol]  
 Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl] ether

**Table 5.1**  
Composition of the Brain & Muscle Tissue Equivalent Matter

## Device Holder



**Figure 5.4**  
Device Positioner

In combination with the SAM Phantom, the EUT Holder (see Fig. 6.2) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. Device positioning is accurate and repeatable according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

\* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [8]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 7 of 24

# 6. TEST SYSTEM SPECIFICATIONS

## Automated Test System Specifications

### Positioner

**Robot:** CRS Robotics, Inc. Robot Model: F3  
**Repeatability:** ± 0.05 mm (0.002 in.)  
**No. Of axes:** 6

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** Pentium 4  
**Clock Speed:** 1.6 GHz  
**Operating System:** Windows 2000™ Professional  
**Data Card:** NI DAQ Card (in CPU)

#### Data Converter

**Software:** IDX Flexware  
**Connecting Lines:** Data Acquisition Cable  
 RS-232 Host Interface Cable  
**Sampling Rate:** 6000 samples/sec



**Figure 6.1**  
**ALIDX-500 Test System**

### E-Field Probes

**Model:** E-010 S/N: PCT003  
**Construction:** Triangular core absolute encoder system  
**Frequency:** 10 MHz to 6.0 GHz

### Phantom

**Phantom:** SAM Phantoms (Left & Right)  
**Shell Material:** Vivac Composite  
**Thickness:** 2.0 ± 0.2 mm

PCTEST SAR TEST REPORT		<b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 8 of 24

## 7. DOSIMETRIC ASSESSMENT & PHANTOM SPECS

### Measurement Procedure

The measurement procedure consists of the process parameters, probe parameters, EUT product data, and measurement scans (teach points). The measurement procedure is a set of predefined points to be scanned and measured by the probe, DC amplified and processed by the cell controller. The corresponding voltages determined by the electric and magnetic fields are extrapolated to determine peak SAR value.

The SAR Measurement System measures field strength by employing two different types of systematic measurement scans; a coarse scan and a fine scan. Coarse and fine scans measure field strength in a rectangular area within the XY plane (a plane parallel to the top of the Robot Table). The measurement area is divided into a grid of small squares defined by equally spaced grid lines. During an actual measurement process, the probe moves along grid lines systematically recording the field strength at grid line intersections. Typically, after a coarse scan is completed, a fine scan is conducted at the peak field strength value (hot spot) that was measured in the coarse scan. The fine scan has a greater resolution (smaller grid squares) than the coarse scan, and covers only a fraction of the measurement area in the coarse scan.

### Specific Anthropomorphic Mannequin (SAM) Specifications

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90<sup>th</sup> percentile adult male head dimensions as tabulated by the US Army. The SAM Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 7.1). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface. The SAM shell thickness is 2.0 ± 0.2 mm.



**Figure 7.1**  
Left and Right SAM Phantom shells

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 9 of 24

## 8. TEST CONFIGURATION POSITION

### Body-Worn Configurations

Body-worn operating configurations are tested with the notebook positioned touching against a flat phantom (lap) in a normal use configuration (see Figure 8.1). Body dielectric parameters are used.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and a caution statement must be included in the user's manual.



**Figure 8.1 Body SAR Laptop Configurations**

PCTEST SAR TEST REPORT	 <b>FCC CERTIFICATION</b>			Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 10 of 24

## 9. ANSI/IEEE C95.1 - 1992 RF EXPOSURE LIMITS

### Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 10.1. Safety Limits for Partial Body Exposure [2]**

	HUMAN EXPOSURE LIMITS	
	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)
SPATIAL PEAK SAR 1 Brain	1.60	8.00
SPATIAL AVERAGE SAR 2 Whole Body	0.08	0.40
SPATIAL PEAK SAR 3 Hands, Feet, Ankles, Wrists	4.00	20.00

1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

2 The Spatial Average value of the SAR averaged over the whole body.

3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 11 of 24

# 10. MEASUREMENT UNCERTAINTIES

a	b	c	d	e= f(d,k)	f	g	h = cx <sub>f</sub> /e	i = cx <sub>g</sub> /e	k
Uncertainty Component	Sec.	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> (1 - g)	c <sub>i</sub> (10 - g)	1 - g u <sub>i</sub> (± %)	10 - g u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration	E1.1	4.8	N	1	1	1	4.8	4.8	∞
Axial Isotropy	E1.2	4.7	R	√3	0.7	0.7	1.9	1.9	∞
Hemishperical Isotropy	E1.2	9.6	R	√3	0.7	0.7	3.9	3.9	∞
Boundary Effect	E1.3	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	E1.4	4.7	R	√3	1	1	2.7	2.7	∞
System Detection Limits	E1.5	1.0	R	√3	1	1	0.6	0.6	∞
Readout Electronics	E1.6	1.0	N	1	1	1	1.0	1.0	∞
Response Time	E1.7	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time	E1.8	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Conditions	E5.1	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E5.2	0.4	R	√3	1	1	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E5.3	2.9	R	√3	1	1	1.7	1.7	∞
Extrapolation, Interpolation & Integration Algorithms for Max. SAR Evaluation	E4.2	1.0	R	√3	1	1	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E3.2.1	2.9	N	1	1	1	2.9	2.9	145
Device Holder Uncertainty	E3.1.1	3.6	N	1	1	1	3.6	3.6	5
Output Power Variation - SAR drift measurement	5.6.2	5.0	R	√3	1	1	2.9	2.9	∞
<b>Phantom &amp; Tissue Parameters</b>									
Phantom Uncertainty (Shape & Thickness tolerances)	E2.1	4.0	R	√3	1	1	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E2.2	5.0	R	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E2.2	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity - deviation from target values	E2.2	5.0	R	√3	0.6	0.5	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E2.2	2.5	N	1	0.6	0.5	1.5	1.2	∞
<b>Combined Standard Uncertainty (k=1)</b>							10.3	10.0	
<b>Expanded Uncertainty (k=2) (95% CONFIDENCE LEVEL)</b>							20.6	20.1	

The above measurement uncertainties are according to IEEE Std. 1528-2003.

PCTEST SAR TEST REPORT			FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 12 of 24	

## 11. SAR TEST DATA SUMMARY

See Measurement Result Data Pages

### Procedures Used To Establish Test Signal

The device was placed into continuous transmit mode using a manufacturer test software. The end-user configuration will have a duty cycle of 10% or less, hence the SAR value was normalized. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR [4].

### Device Test Conditions

The internal transmitting device is powered through the host computer. The software was used to maintain the maximum output power. If a power deviation of more than 5% occurred, the test was repeated.

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 13 of 24

## 12. SAR TEST EQUIPMENT

### Equipment Calibration

Table 12.1 Test Equipment Calibration

EQUIPMENT SPECIFICATIONS			
Type	Calibration Date	Serial Number	
CRS Robot F3	February 2004	RAF0134133	
CRS C500C Motion Controller	February 2004	RCB0003303	
CRS Teach Pendant (Joystick)	February 2004	STP0132231	
DELL Computer, Pentium 4 1.6 GHz, Windows 2000™	February 2004	4PJZ111	
E-Field Probe E-010	January 2004	PCT003	
Right Ear SAM Phantom (P-SAM-R)	June 2004	94X-113	
Left Ear SAM Phantom (P-SAM-L)	June 2004	94X-019	
Flat SAM Phantom (P-SAM-FLAT)	June 2004	94X-097	
IDX Robot End Effector (EE-103-C)	June 2004	07111223	
IDX Probe Amplifier	June 2004	07111113	
Validation Dipole D-835S	October 2004	PCT640	
Validation Dipole D-1900S	October 2004	PCT641	
Brain Equivalent Matter (835MHz)	November 2004	PCTBEM101	
Brain Equivalent Matter (1900MHz)	November 2004	PCTBEM301	
Muscle Equivalent Matter (835MHz)	November 2004	PCTMEM201	
Muscle Equivalent Matter (1900MHz)	November 2004	PCTMEM401	
Amplifier Research 5S1G4 Power Amp	January 2004	PCT540	
Agilent E8241A (250kHz ~ 20GHz) Signal Generator	January 2004	US42110432	
HP-8753E (30kHz ~ 6GHz) Network Analyzer	January 2004	PCT552	
HP85070B Dielectric Probe Kit	January 2004	PCT501	
Ambient Noise/Reflection, etc.	<12mW/kg/<3%of SAR	January 2004	Anechoic Room PCT01

**NOTE:**

The brain simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 14 of 24

## 13. CONCLUSION

### Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.[3]

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 15 of 24

## 14. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 1991, *American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz*, New York: IEEE, Aug. 1992.
- [3] ANSI/IEEE C95.3 - 1991, *IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave*, New York: IEEE, 1992.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), *Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields*, July 2001.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, *Draft Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques*.
- [6] NCRP, National Council on Radiation Protection and Measurements, *Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields*, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, *The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz*, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [8] N. Kuster and Q. Balzano, *Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz*, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [9] G. Hartsgrove, A. Kraszewski, A. Surowiec, *Simulated Biological Materials for Electromagnetic Radiation Absorption Studies*, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [10] Q. Balzano, O. Garay, T. Manning Jr., *Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones*, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [11] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, *Numerical Recipes in C, The Art of Scientific Computing*, Second edition, Cambridge University Press, 1992.
- [12] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [13] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 16 of 24

# EXHIBIT A. SYSTEM VERIFICATION

## Tissue Verification

Table A.1 Simulated Tissue Verification

MEASURED TISSUE PARAMETERS					
Date(s)	11/24/2004	835MHz Brain		835MHz Muscle	
Liquid Temperature (°C)	20.8	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		41.50	39.99	55.20	55.70
Conductivity: $\sigma$		0.900	0.890	0.970	0.970

## Test System Validation

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at 835MHz by using the system validation kit(s). (Graphic Plots Attached)

Table A.2 System Validation

SYSTEM VALIDATION TARGET & MEASURED							
Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Tissue	Targeted SAR <sub>1g</sub> (mW/g)	Measured SAR <sub>1g</sub> (mW/g)	Deviation (%)
11/24/04	22.2	19.6	0.250	835 MHz Brain	2.375	2.27	- 4.27



Figure A.0 Dipole Validation Test Setup

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 17 of 24

# EXHIBIT A. SAR DATA SUMMARY

Mixture Type: 835MHz Muscle

14.1 MEASUREMENT RESULTS (Body SAR)								
FREQUENCY		Mask	POWER <sup>‡</sup>		Separation Distance (cm)	Antenna Position	100% Duty Cycle SAR	10% D.C. SAR (W/kg)
MHz	Ch.		(W)	Battery				
806.00	LOW	G	1.900	Standard	TOUCH	FIXED	2.69	0.27
815.00	MID	G	1.900	Standard	TOUCH	FIXED	4.39	0.44
821.00	HIGH	G	1.900	Standard	TOUCH	FIXED	3.29	0.33
821.00	LOW	H	1.835	Standard	TOUCH	FIXED	3.11	0.31
822.50	MID	H	1.835	Standard	TOUCH	FIXED	4.28	0.43
848.97	HIGH	H	1.835	Standard	TOUCH	FIXED	3.77	0.38
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b> Spatial Peak Uncontrolled Exposure/General Population					<b>Muscle</b> <b>1.6 W/kg (mW/g)</b> averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna-body position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  2. All modes of operation were investigated, and worst-case results are reported.
  3. Battery is fully charged for all readings. Standard batteries are the only options.
- <sup>‡</sup>Power Measured                       Conducted                       ERP                       EIRP  
 4. SAR Measurement System                       DASY3                       IDX  
 Phantom Configuration                       Left Head                       Flat Phantom                       Right Head  
 5. SAR Configuration                       Head                       Body                       Hand  
 6. Test Signal Call Mode                       Software                       Base Station Simulator  
 7. Tissue parameters and temperatures are listed on the SAR plots.  
 8. Liquid tissue depth is 15.1 cm. ± 0.1

Alfred

---

**Alfred Cirwilhian**  
Vice President Engineering



**Figure A.1 Body SAR Test Setup  
-- Lap Position --**

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 18 of 24

# EXHIBIT A. SAR DATA SUMMARY

Mixture Type: 835MHz Muscle

<b>A.2 MEASUREMENT RESULTS (Bystander SAR)</b>								
FREQUENCY		Mask	POWER (W)	Battery	Separation Distance (cm) **	Antenna Position	100% Duty Cycle SAR	10% D.C. SAR (W/kg)
MHz	Ch.							
806.00	LOW	G	1.900	Standard	1.5	FIXED	1.50	0.15
815.00	MID	G	1.900	Standard	1.5	FIXED	1.83	<b>0.18</b>
821.00	HIGH	G	1.900	Standard	1.5	FIXED	1.78	0.18
821.00	LOW	H	1.835	Standard	1.5	FIXED	1.69	0.17
822.50	MID	H	1.835	Standard	1.5	FIXED	1.75	0.18
824.00	HIGH	H	1.835	Standard	1.5	FIXED	1.66	0.17
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>								
<b>Spatial Peak</b>					<b>Muscle</b>			
<b>Uncontrolled Exposure/General Population</b>					<b>1.6 W/kg (mW/g)</b> averaged over 1 gram			

**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna-body position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  2. All modes of operation were investigated, and worst-case results are reported.
  3. Battery is fully charged for all readings. Standard batteries are the only options.
- ‡Power Measured                       Conducted                       ERP                       EIRP
4. SAR Measurement System                       DASY3                       IDX
  - Phantom Configuration                       Left Head                       Flat Phantom                       Right Head
  5. SAR Configuration                       Head                       Body                       Hand
  6. Test Signal Call Mode                       Software                       Base Station Simulator
  7. Tissue parameters and temperatures are listed on the SAR plots.
  8. Liquid tissue depth is 15.1 cm. ± 0.1



**Alfred Cirwithian**  
Vice President Engineering



**Figure A.2 Body SAR Test Setup  
-- Bystander Position --**

PCTEST SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 19 of 24

# EXHIBIT B. MPE DATA

PCTEST SAR TEST REPORT	 <b>FCC CERTIFICATION</b>			Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 20 of 24

## RF Exposure Evaluation - Maximum Permissible Exposure (MPE)

### 1. Introduction

This document attempts to prove the safety of radiation generated by RF devices to the human body. The limit for Maximum Permissible Exposure (MPE), specified in FCC 1.1210, is listed below. The power generated by this product is measured by a power meter. Through use of the Friis transmission formula and the maximum gain of the antenna, the distance from the product at which compliance with the MPE limit is achieved may be calculated. Alternatively, near field measurements may be performed to demonstrate compliance at a specific measurement distance.

Near field probe: Wandel & Goltermann EMR-20.

### 2. RF Exposure Limit

According to FCC 1.1310: the criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (Minutes)
(A) Limits For Occupational / Control Exposures				
30-300	61.4	.163	1.0	6
300-1500	...	...	F/300	6
1500-100,000	...	...	5	6
(B) Limits For General Population / Uncontrolled Exposure				
30-300	27.5	.073	.2	30
300-1500	...	...	F/1500	30
1500-100,000	...	...	1.0	30

F = Frequency in MHz

### 3. Friis Formula

Friis transmission formula:  $P_d = (P_{out} * G) / (4\pi r^2)$

Where:

$P_d$  = power density in mW/cm<sup>2</sup> (MPE limit)

$P_{out}$  = output power to antenna in mW

G = gain of antenna in linear scale

p = 3.1416

r = distance between observation point and center of the radiator in cm

Ref.: David K. Cheng, Field and Wave Electromagnetics, Second Edition, Page 640, Eq. (11.133)

PCTEST MPE REPORT	FCC CERTIFICATION REPORT			REVIEWED BY: QUALITY MANAGER
TEST REPORT S/N: 15.241124657.ACJ	TEST DATES: Nov. 24, 2004	EUT TYPE: Notebook PC w/ CDMA Module, Boomer-II OEM Radio & Intel WLAN	FCC ID: ACJ9TGCF-29C	PAGE 1 OF 2

#### 4. EUT Operating Condition

Software provided by the client enabled the EUT to transmit and receive data at lowest, middle, and highest channels individually.

#### 5. Climate Condition

The temperature and relative humidity: 22°C and 78% RH

#### 6. Measurement Results at 20 cm

Frequency (MHz)	Level (dBm)	Measurement Distance	Front MPE reading mW/cm <sup>2</sup>	Rear MPE reading mW/cm <sup>2</sup>	Right MPE reading mW/cm <sup>2</sup>	Left MPE reading mW/cm <sup>2</sup>	Limit
806.00	32.80	20cm	.263	.247	.100	.272	.537
2412	17.3	20 cm					

Frequency (MHz)	Level (dBm)	Measurement Distance	Front MPE reading mW/cm <sup>2</sup>	Rear MPE reading mW/cm <sup>2</sup>	Right MPE reading mW/cm <sup>2</sup>	Left MPE reading mW/cm <sup>2</sup>	Limit
815.00	32.80	20cm	.278	.250	.098	.288	.543
2437	17.50	20 cm					

Frequency (MHz)	Level (dBm)	Measurement Distance	Front MPE reading mW/cm <sup>2</sup>	Rear MPE reading mW/cm <sup>2</sup>	Right MPE reading mW/cm <sup>2</sup>	Left MPE reading mW/cm <sup>2</sup>	Limit
821.0	32.80	20cm	.265	.250	.088	.290	.547
2462	17.72	20 cm					

#### 7. Conclusion

The device meets the mobile 20cm separation distance as specified in Section 2.1091 of the FCC Rules. An appropriate RF exposure compliance statement will be placed in the user's manual.

PCTEST MPE REPORT	FCC CERTIFICATION REPORT			REVIEWED BY: QUALITY MANAGER
TEST REPORT S/N: 15.241124657.ACJ	TEST DATES: Nov. 24, 2004	EUT TYPE: Notebook PC w/ CDMA Module, Boomer-II OEM Radio & Intel WLAN	FCC ID: ACJ9TGCF-29C	PAGE 2 OF 2

# EXHIBIT C. SAR TEST DATA

PCTEST SAR TEST REPORT	 <b>FCC CERTIFICATION</b>			Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 21 of 24

SAR Data Report 04112409

Start : 24-Nov-04 10:58:26 am  
End : 24-Nov-04 11:06:27 am  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : PANASONIC  
Model Number : CF-29  
Serial Number : 4GKSA00904  
Frequency : 815.00 MHz  
Transmit Pwr : 1.900 W  
Antenna Type : Inverted F  
Antenna Posn. : Fixed

Measurement Data:

Phantom Name : SAM FLAT  
Phantom Type : Uniphantom  
Tissue Type : Muscle  
Tissue Dielectric : 55.700  
Tissue Conductivity : 0.970  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT003  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Muscle  
Calibrated Dielectric : 54.030  
Calibrated Conductivity : 0.980  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 6.000  
Probe Sensitivity : 2.809 3.327 3.274 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 1000 Samples  
NIDAQ Gain: 5

Comments:

MASK-G Mode MID CHAN  
Body SAR  
CF=1; Amb. Temp= 22.1 'C; Liq. Temp= 19.6 'C

Power Drop Test:

Reading @ start = 1.365  
Reading @ End = 1.355  
Power at End = 99.9%


Area Scan - Max Peak SAR Value at x=-13.0 y=46.0 = 3.95 W/kg

Zoom Scan - Max Peak SAR Value at x=-6.0 y=55.0 z=0.0 = 11.35 W/kg


Max 1g SAR at x=-8.0 y=57.0 z=0.0 = 4.39 W/kg


Max 10g SAR at x=-10.0 y=51.0 z=0.0 = 1.83 W/kg

SAR - Z Axis  
at Hotspot x:-6.0 y:55.0

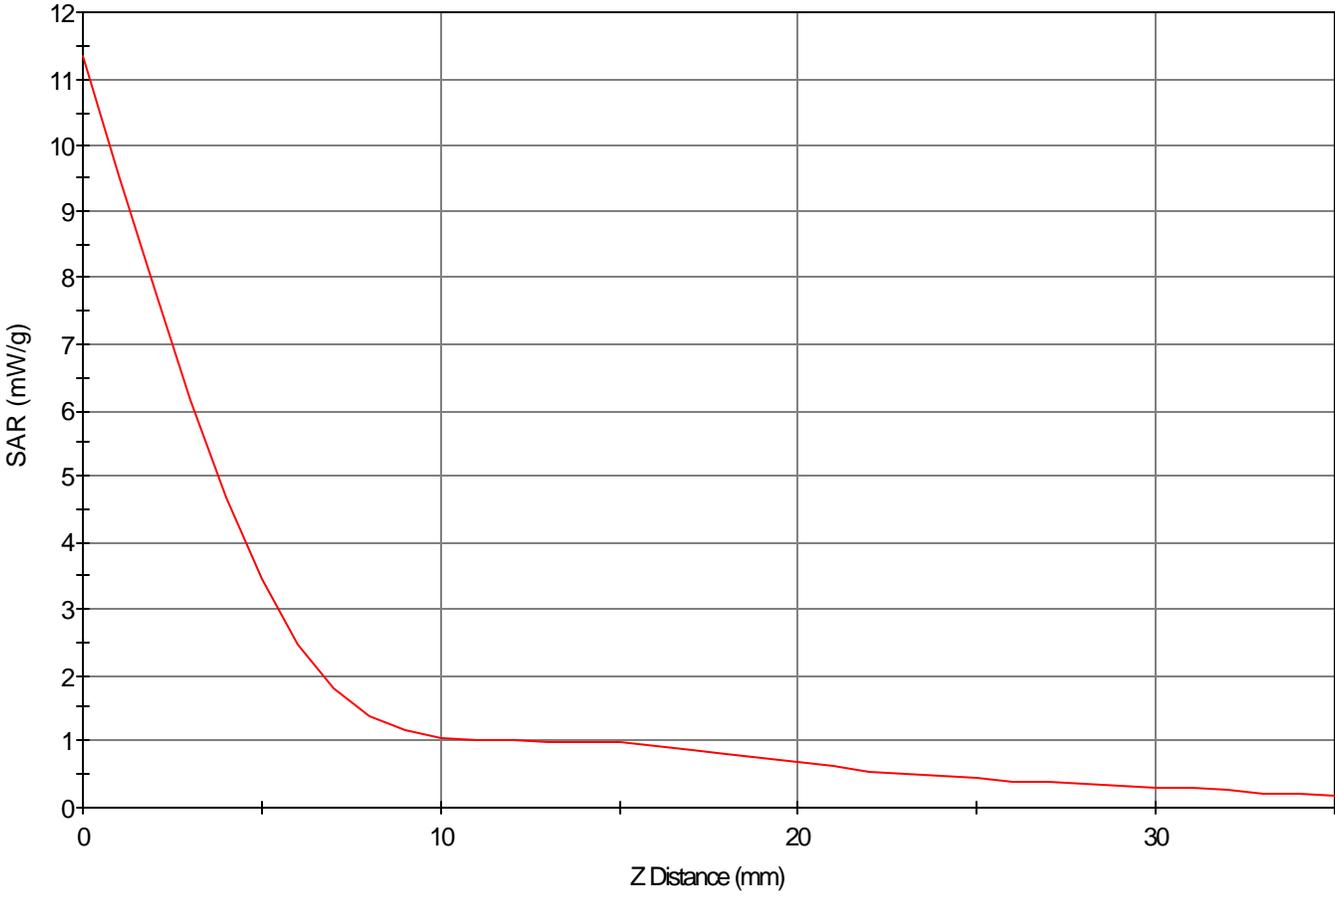

### 1g SAR Values

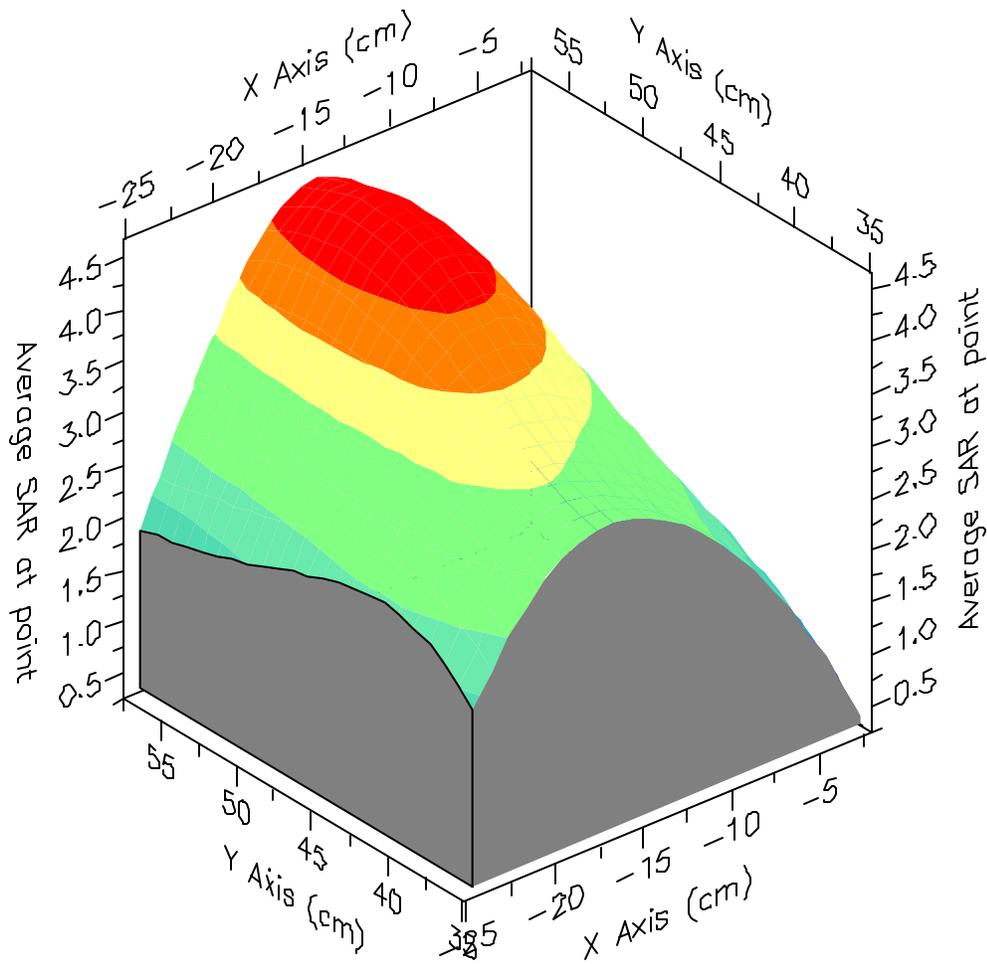

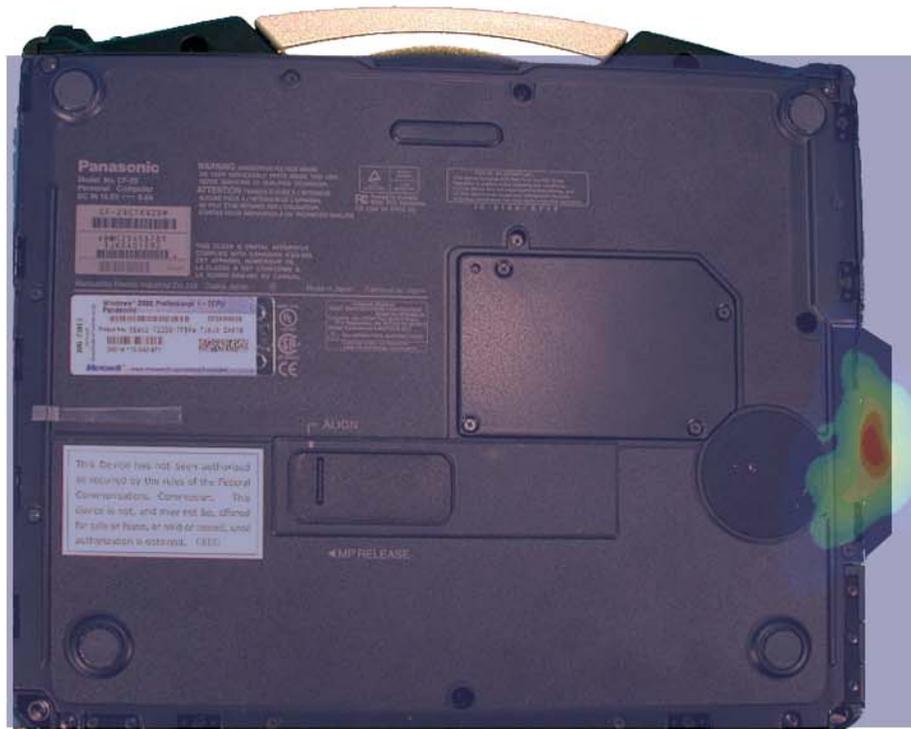

SAR Data Report 04112421

Start : 24-Nov-04 4:20:17 pm  
End : 24-Nov-04 4:26:17 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : PANASONIC  
Model Number : CF-29  
Serial Number : 4GKSA00904  
Frequency : 815.00 MHz  
Transmit Pwr : 1.900 W  
Antenna Type : Inverted F  
Antenna Posn. : Fixed

Measurement Data:

Phantom Name : SAM-FLAT-B  
Phantom Type : Uniphantom  
Tissue Type : Muscle  
Tissue Dielectric : 55.000  
Tissue Conductivity : 0.980  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT003  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Muscle  
Calibrated Dielectric : 54.030  
Calibrated Conductivity : 0.980  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 6.000  
Probe Sensitivity : 2.809 3.327 3.274 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 1000 Samples  
NIDAQ Gain: 5

Comments:

MASK-G Mode - MID CHAN  
Body - Bystander  
CF=1; Amb. Temp= 22.1 'C; Liq. Temp=19.6 'C

Power Drop Test:

Reading @ start = 3.040  
Reading @ End = 2.995  
Power at End = 98.5%


Area Scan - Max Peak SAR Value at x=11.0 y=7.0 = 1.54 W/kg

Zoom Scan - Max Peak SAR Value at x=8.0 y=7.0 z=0.0 = 2.96 W/kg


Max 1g SAR at x=6.0 y=6.0 z=0.0 = 1.83 W/kg


Max 10g SAR at x=6.0 y=7.0 z=0.0 = 1.12 W/kg

SAR - Z Axis  
at Hotspot x:8.0 y:7.0

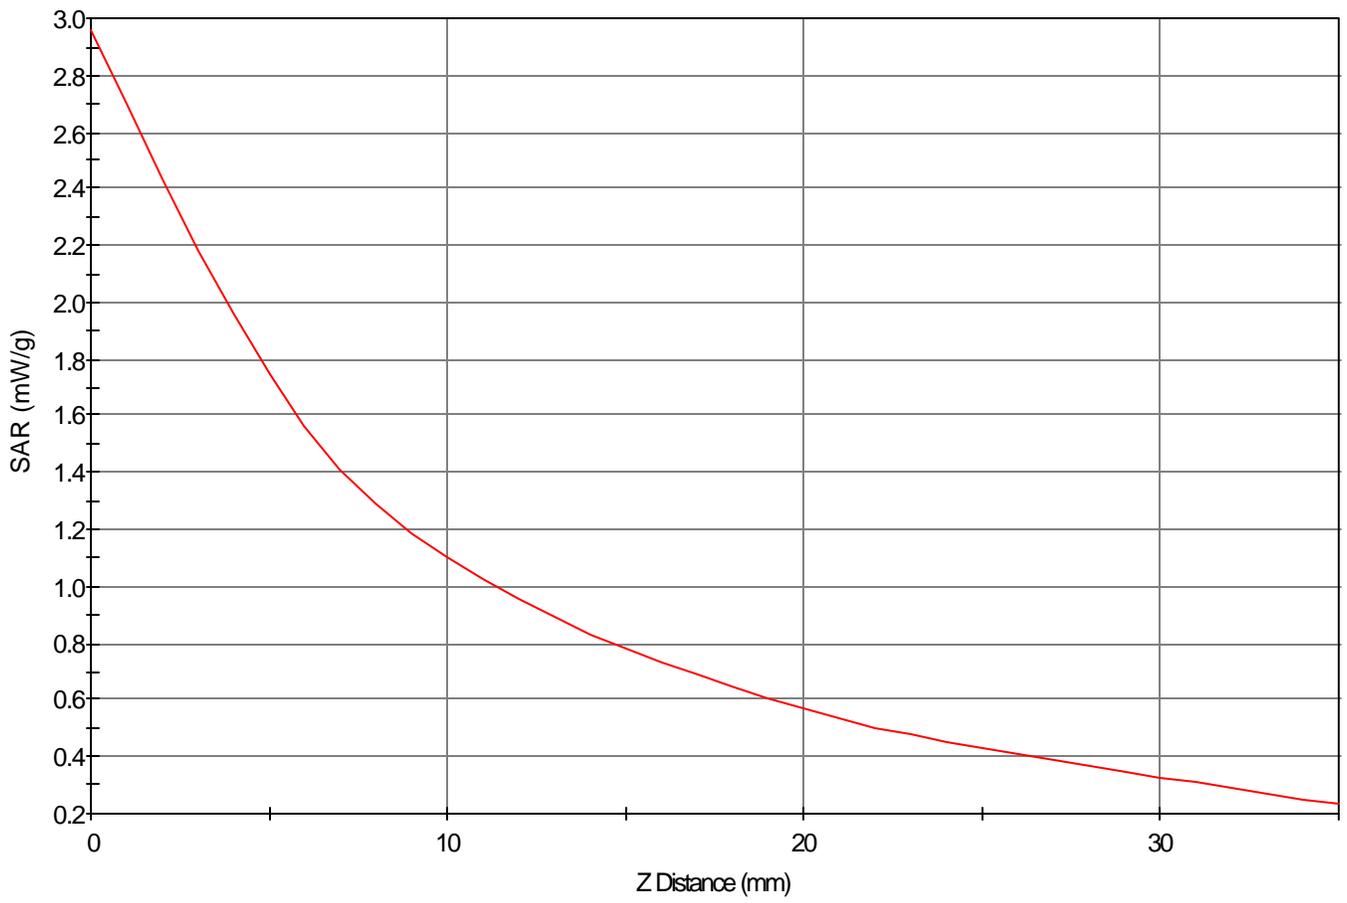

1g SAR Values

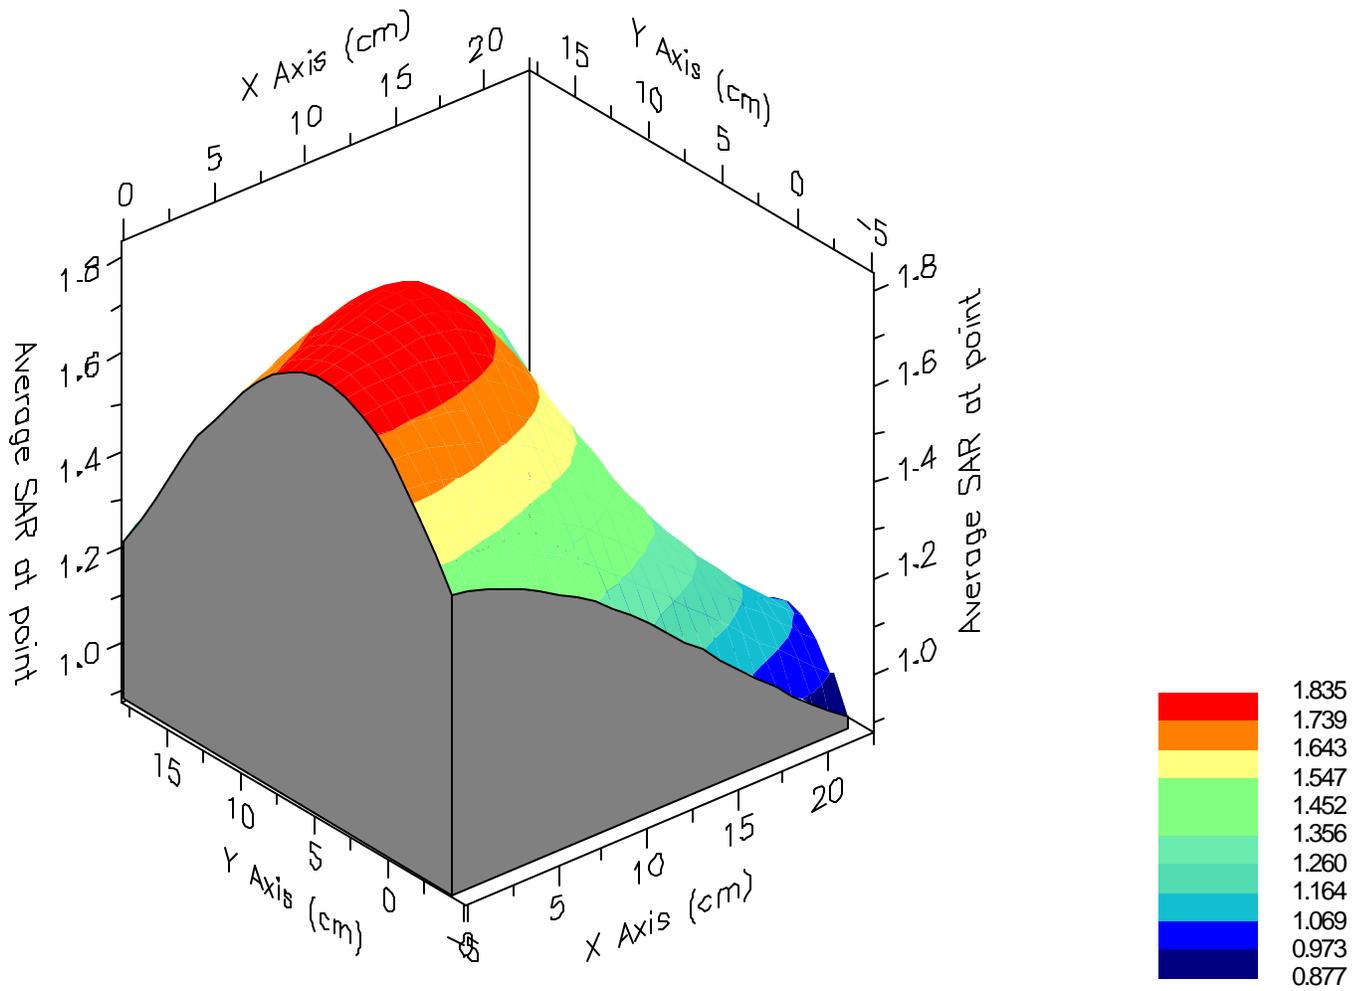

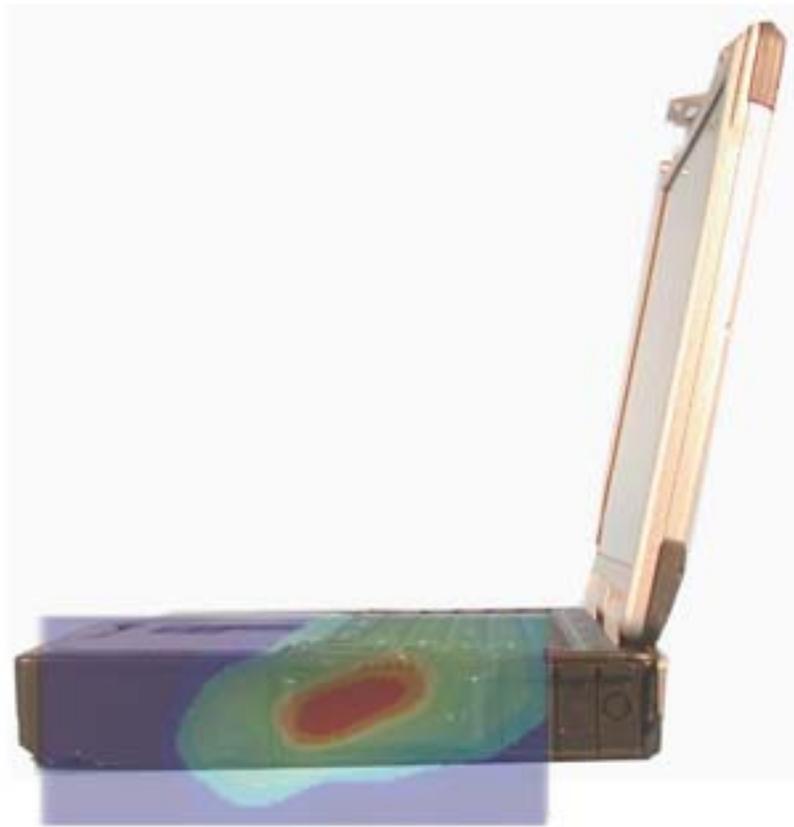

**EXHIBIT D. SAR TEST SETUP PHOTOGRAPHS**

<p>PCTEST SAR TEST REPORT</p>	 <p><b>FCC CERTIFICATION</b></p>			<p>Reviewed by: Quality Manager</p>
<p>SAR Filename: SAR.241124319.ACJ</p>	<p>Test Dates: Nov. 24, 2004</p>	<p>EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM &amp; Intel WLAN</p>	<p>FCC ID: ACJ9TGCF-29C</p>	<p>Page 22 of 24</p>

# EXHIBIT E. DIPOLE VALIDATION

PCTEST SAR TEST REPORT		<b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 23 of 24

SAR Data Report 04112402

Start : 24-Nov-04 09:11:57 am  
End : 24-Nov-04 09:17:36 am  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : Verification  
Model Number : E-010  
Serial Number : PCT003  
Frequency : 835 MHz  
Transmit Pwr : 0.250 W  
Antenna Type : Dipole  
Antenna Posn. : Verification

Measurement Data:

Phantom Name : SAM-FLAT-B  
Phantom Type : Uniphantom  
Tissue Type : Brain  
Tissue Dielectric : 39.990  
Tissue Conductivity : 0.890  
Tissue Density : 1.300  
Robot Name : CRS

Probe Data:

Probe Name : PCT003  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.240  
Calibrated Conductivity : 0.900  
Calibrated Density : 1.300  
Probe Offset : 2.400 mm  
Conversion Factor : 5.600  
Probe Sensitivity : 2.809 3.327 3.274 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 1000 Samples  
NIDAQ Gain: 5

Comments:

System Verification  
  
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=19.6 'C

Power Drop Test:

Reading @ start = 4.839  
Reading @ End = 4.887  
Power at End = 101.0%

Area Scan - Max Peak SAR Value at x=6.0 y=0.0 = 2.17 W/kg

Zoom Scan - Max Peak SAR Value at x=6.0 y=0.0 z=0.0 = 3.55 W/kg


Max 1g SAR at x=5.0 y=0.0 z=0.0 = 2.27 W/kg

Max 10g SAR at x=4.0 y=0.0 z=0.0 = 1.39 W/kg


Validation Results at 0.25 W:


Peak Nominal = 3.5, Error: 0.73 %  
1g Nominal = 2.4, Error: -4.27 %

SAR - Z Axis  
at Hotspot x:6.0 y:0.0

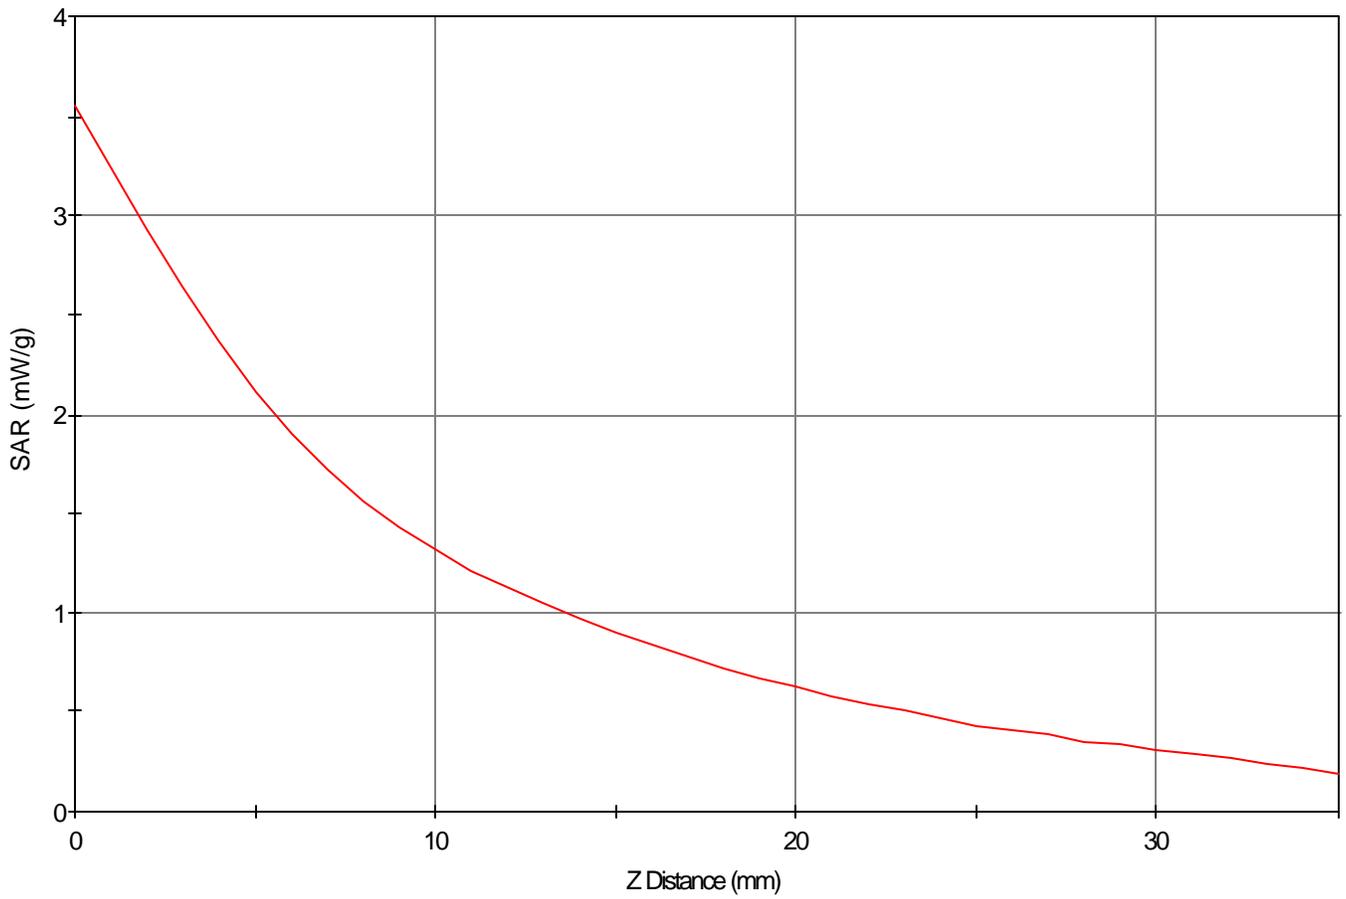

### 1g SAR Values

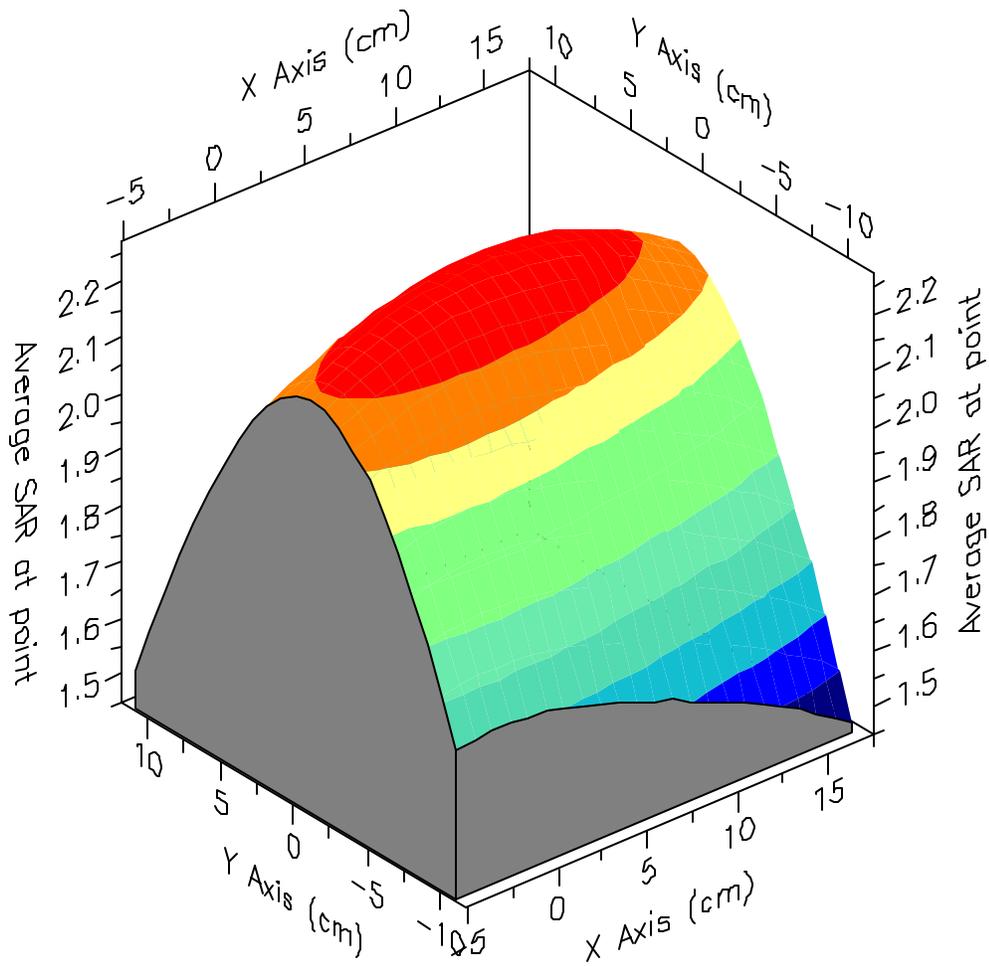

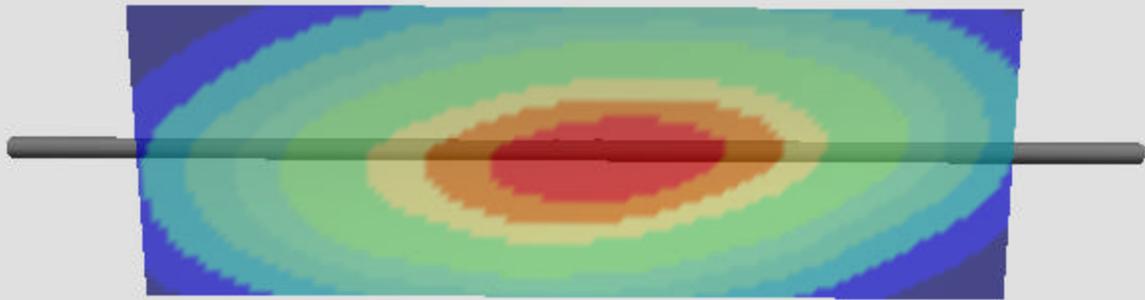

# EXHIBIT F. PROBE CALIBRATION

PCTEST SAR TEST REPORT	 <b>FCC CERTIFICATION</b>			Reviewed by: Quality Manager
SAR Filename: SAR.241124319.ACJ	Test Dates: Nov. 24, 2004	EUT Type: Panasonic Notebook PC w/ OEM Radio, Boomer-II OEM & Intel WLAN	FCC ID: ACJ9TGCF-29C	Page 24 of 24

# Probe E-010

## SN: PCT003

Manufactured:	November 4, 2002
Calibrated:	January 3, 2003
Re-calibrated:	January 6, 2004

Calibrated for the IDX System

PCTEST Calibration Laboratory

Approved By:




**Alfred Cirwithian**  
Vice President Engineering


Calibration is performed according to IEEE Std. P1528 D1.2 (April, 2003)  
and all test equipment used is traceable to U.S. NIST.





**835 MHz Calibration (PCT003)**

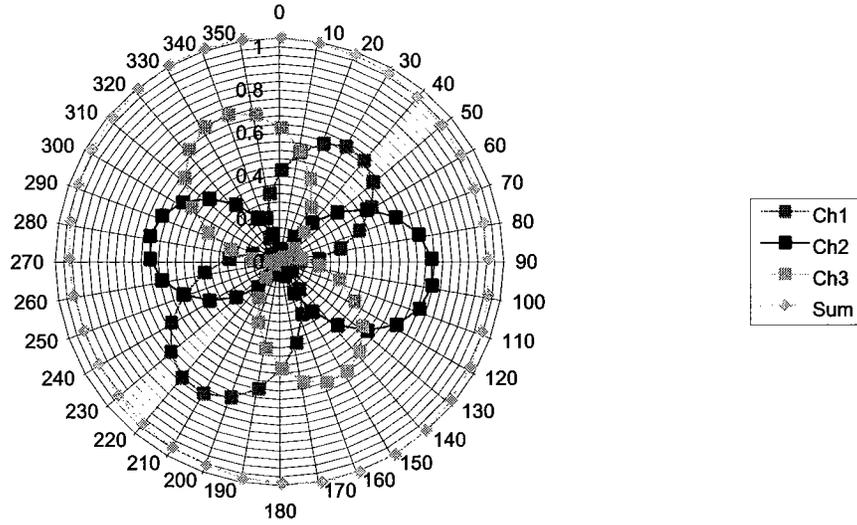

**1900 MHz Calibration (PCT003)**

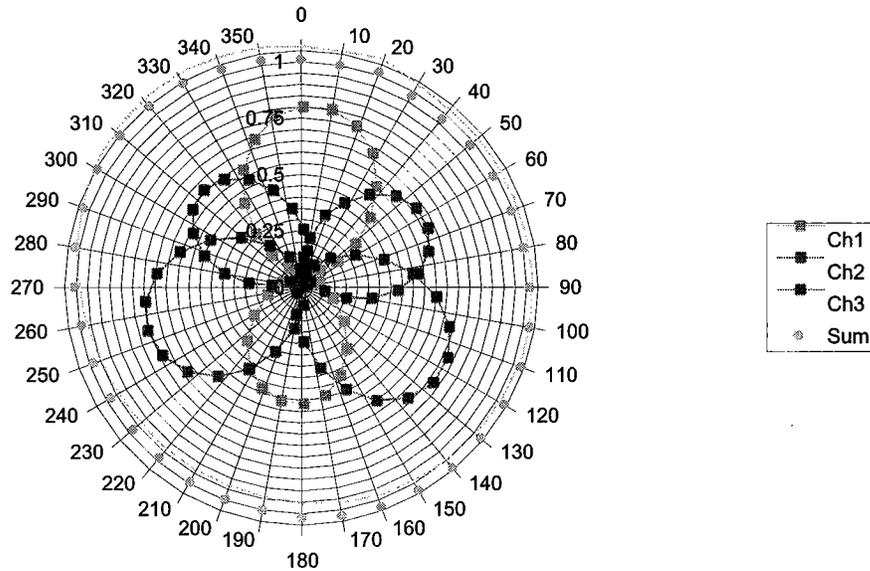

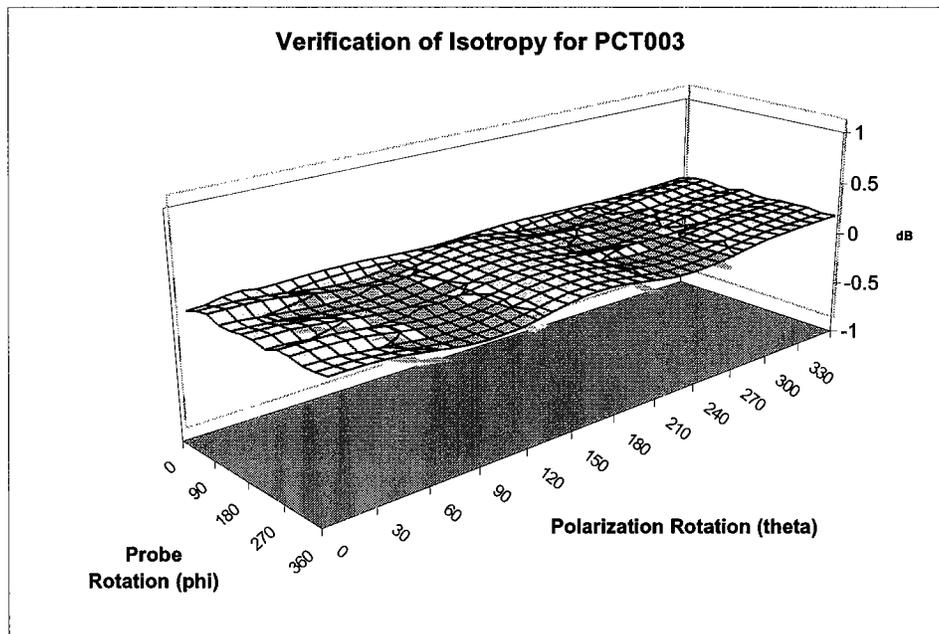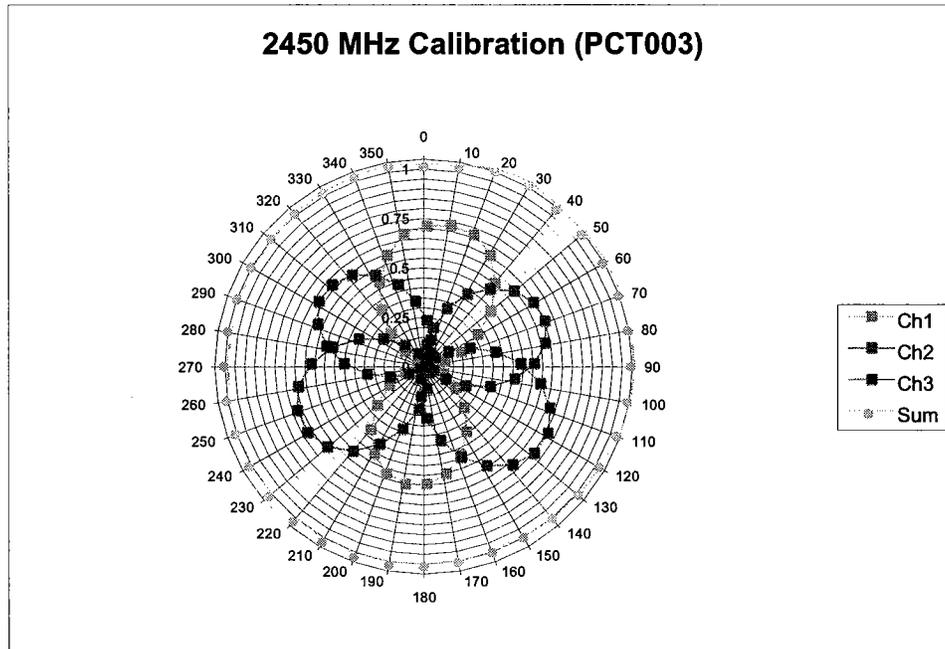


### PCTEST Calibration Laboratory

6660-B Dobbin Road  
Columbia, Maryland 21045 USA


TEM Calibration Plot  
Date: 5-Jan-04 01:54:12 pm  
Probe Name: PCT003  
Frequency: 835

Sensitivity: Ch1: 2.809 Ch2: 3.327 Ch3: 3.274 mV/(mW/cm<sup>2</sup>)  
Isotropy: 5.26% 0.22 db Min=0.949 Max=1.054

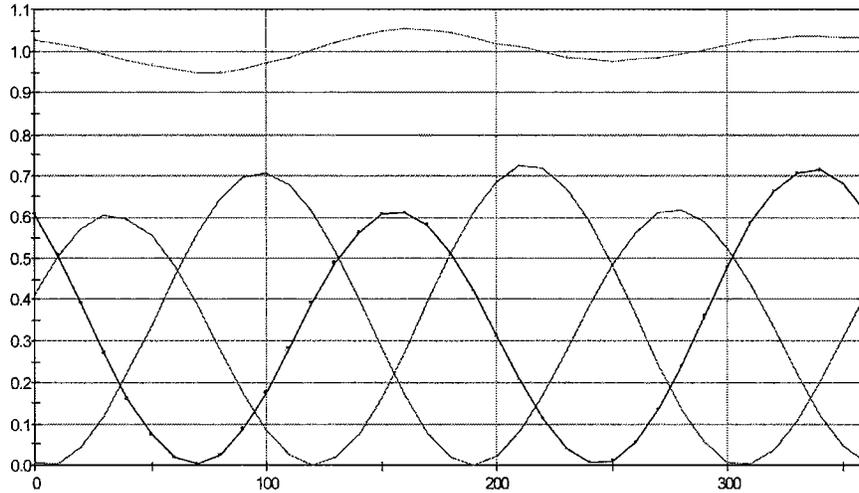

TEM Calibration Plot  
Date: 6-Jan-04 12:13:36 pm  
Probe Name: PCT003  
Frequency: 1900


Sensitivity: Ch1: 3.331 Ch2: 3.804 Ch3: 3.975 mV/(mW/cm<sup>2</sup>)  
Isotropy: 3.83% 0.16 db Min=0.972 Max=1.049

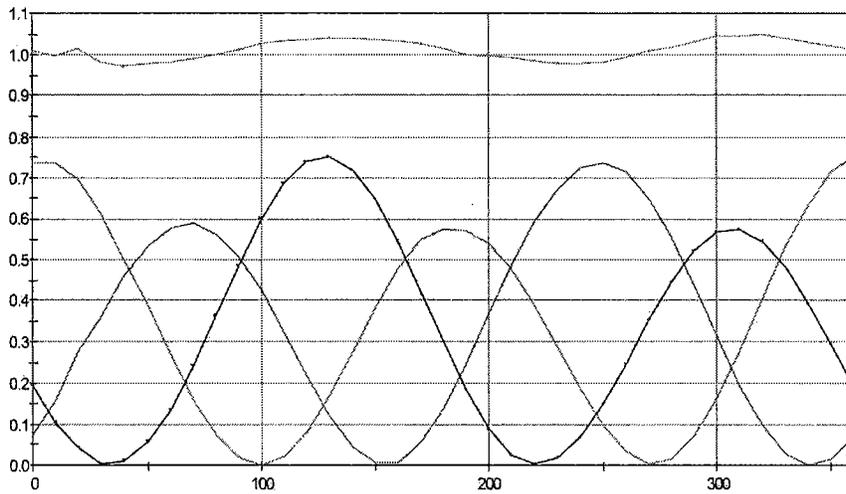



**PCTEST Calibration Laboratory**  
6660-B Dobbin Road  
Columbia, Maryland 21045 USA

TEM Calibration Plot  
Date: 6-Jan-04 1:10:39 pm  
Probe Name: PCT003  
Frequency: 2450  
Sensitivity: Ch1: 3.285 Ch2: 3.652 Ch3: 4.167 mV/(mW/cm<sup>2</sup>)  
Isotropicity: 2.99% 0.13 db Min=0.997 Max=1.057

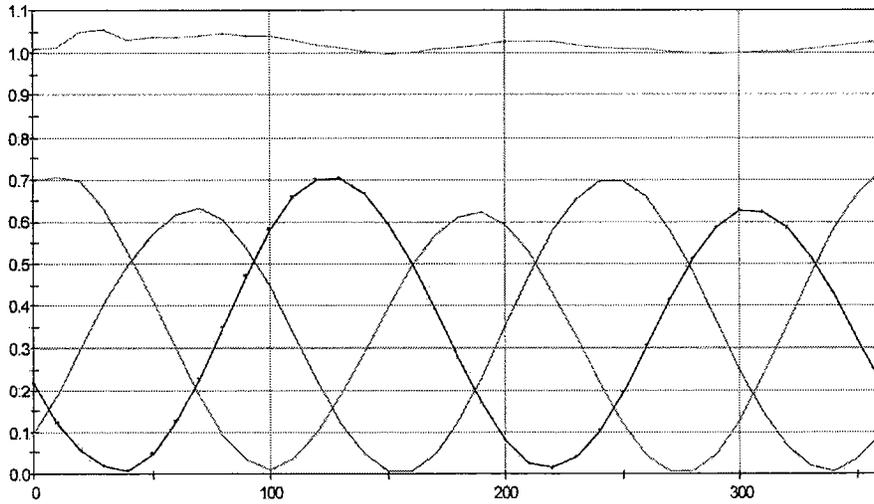





PCTEST Calibration Laboratory  
6660-B Dobbin Road  
Columbia, Maryland 21045 USA

---

## Test Equipment

The test equipment used during the probe calibration are listed as follows:

EQUIPMENT SPECIFICATIONS		
Type	Calibration Due	Asset Number/ Serial Number
CRS Robot F3	February 2004	RAF0134133
CRS C500C Motion Controller	February 2004	RCB0003303
CRS Teach Pendant (Joystick)	February 2004	STP0132231
DELL Computer, Pentium 4 1.6 GHz, Windows 2000™	February 2004	4PJZ111
Flat SAM Phantom (P-SAM-FLAT)	February 2004	94X-097
IDX Robot End Effector (EE-103-C)	February 2004	07111223
IDX Probe Amplifier	February 2004	07111113
Validation Dipole D-835S	October 2004	PCT441
Validation Dipole D1900V2	February 2005	PCT512
Validation Dipole D-2450S	October 2004	PCT641
HP-778D Dual-Directional Coupler (0.1 ~ 2.0 GHz)	November 2004	PCT664
MicroCircuits Directional Coupler (4.0 ~ 8.0 GHz)	November 2004	PE2204-6
Amplifier Research 5S1G4 Power Amp	January 2005	PCT540
IFI T184-10 Power Amplifier (4.0 ~ 18.0 GHz)	December 2004	5957
HP-8648D (9kHz ~ 4 GHz) Signal Generator	January 2005	PCT526
HP-8753E (30kHz ~ 6GHz) Network Analyzer	January 2005	PCT552
Rohde & Schwarz Power Meter NRVS 1020.1809.02	January 2005	835360/079
Rohde & Schwarz Power Sensor NRV-Z53 858.0500.02	April 2005	846076/007
HP85070B Dielectric Probe Kit	January 2005	PCT501
IFI CC110EXX TEM Cell (DC to 2000 MHz)	January 2005	PCT498
EMCO 3115 Horn Antenna (2.0 ~ 18.0 GHz)	August 2005	PCT496
Guidline 5150 Precision Dual-Thermometer	November 2004	66145