

# TEST REPORT

FCC/ISED RFID Test for RI23D  
Certification

**APPLICANT**  
Panasonic Connect Co.,Ltd.

**REPORT NO.**  
HCT-RF-2406-FI014-R2

**DATE OF ISSUE**  
July 30, 2024

**Tested by**  
Jeong Ho Kim



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST  
REPORT**

**REPORT NO.**  
HCT-RF-2406-FI014-R2

**DATE OF ISSUE**  
July 30, 2024

**Applicant** **Panasonic Connect Co.,Ltd.**  
ytv Kyobashi Building, 2-2-33 Shiromi, Chuo-ku, Osaka 540-8553 Japan

**Product Name** RFID Module  
**Model Name** RI23D

**FCC ID** ACJ9TGRI23D  
**IC** 216H-CFRI23D

**RF Peak Output Power** 25.47 dB $\mu$ V/m @30 m

**Frequency of Operation** 13.56 MHz

**Date of Test** June 04, 2024 ~ June 18, 2024

**FCC Classification** Low Power Communication Device Transmitter (DXX)

**Test Standard Used** FCC Part 15.225 Subpart C  
RSS-210 Issue 10\_Amendment (April 2020)  
RSS-Gen Issue 5\_Amendment 2 (February 2021)

**Location of Test**  Permanent Testing Lab  On Site Testing Lab  
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

**Test Results** PASS

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 21, 2024	Initial Release
1	July 23, 2024	- Revised the antenna requirements (page.8) - Added the note for all simultaneous transmission scenarios (page.20)
2	July 30, 2024	- Revised the note for all simultaneous transmission scenarios (page.20)

## Notice

---

### Content

---

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC/ISED Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

---

## CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. TEST SUMMARY	21
9. TEST RESULT	23
9.1. Operation within the band 13.110 MHz – 14.010 MHz	23
9.2. Radiated Emission 9kHz – 30 MHz	25
9.3. Radiated Emission 30MHz – 1000 MHz	26
9.4. 20 dB Bandwidth	27
9.5. Frequency Stability	28
9.6. POWERLINE CONDUCTED EMISSIONS	32
9.7 RECEIVER SPURIOUS EMISSIONS	33
10. LIST OF TEST EQUIPMENT	34
11. ANNEX A_ TEST SETUP PHOTO	36

## 1. EUT DESCRIPTION

Model	RI23D
Additional model	-
EUT Type	RFID Module
Power Supply	DC 11.10 V
Frequency Range	13.56 MHz
Max. RF Output Power	25.47 dB $\mu$ V/m @30 m
Modulation Type	ASK
PMN (Product Marketing Number)	RI23D
HVIN (Hardware Version Identification Number)	RI23D
FVIN (Firmware Version Identification Number)	N/A
HMN (Host Marketing Name)	CF-33
EUT serial numbers	Radiated : S0P-21-03641

## 2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the RSS-Gen issue 5, RSS-210 Issue 10.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

For ISED, test facility was accepted dated March 13, 2024 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

### According to RSS-Gen(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.



## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 ( Confidence level about 95 %, $k=2$ )

## 7. DESCRIPTION OF TESTS

### 7.1. Radiated Test

#### Limit (Operation within the band 13.110 MHz – 14.010 MHz)

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
13.553 – 13.567	15,848	30
13.410 $\leq f \leq$ 13.553 13.567 $\leq f \leq$ 13.710	334	30
13.110 $\leq f \leq$ 13.410 13.710 $\leq f \leq$ 14.010	106	30

Note:

1. 15,848  $\mu\text{V}/\text{m}$  = 84.0dB $\mu\text{V}/\text{m}$
2. 334  $\mu\text{V}/\text{m}$  = 50.47 dB $\mu\text{V}/\text{m}$
3. 106 $\mu\text{V}/\text{m}$  = 40.51dB $\mu\text{V}/\text{m}$

#### Limit(Radiated Spurious Emissions)(FCC)

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	*100	3
88-216	*150	3
216-960	*200	3
Above 960	500	3

※:


Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

**Limit (Radiated Spurious Emissions)(ISED)**


Frequency (MHz)	Field Strength ( $\mu\text{A}/\text{m}$ )	Measurement Distance (m)
0.009 – 0.490	$6.37/F(\text{kHz})$	300
0.490 – 1.705	$63.7/F(\text{kHz})$	30
1.705 – 30	0.08	30

**Test Configuration**

Below 30 MHz

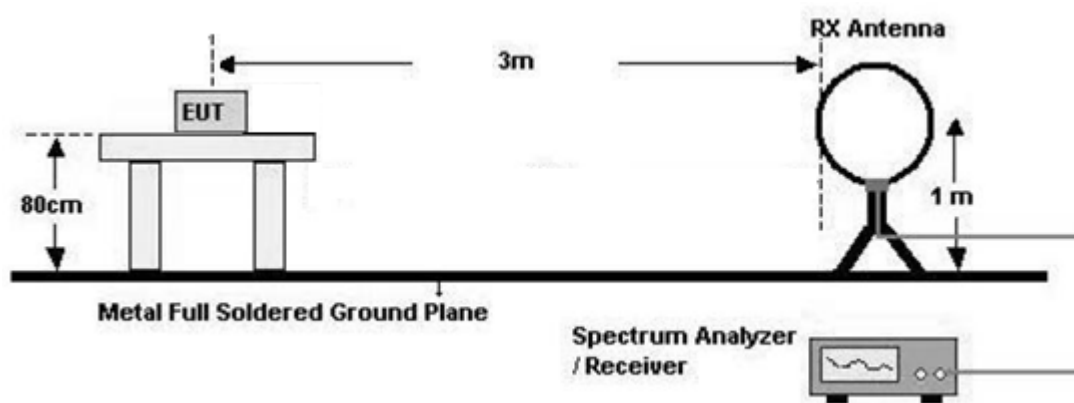

30 MHz - 1 GHz

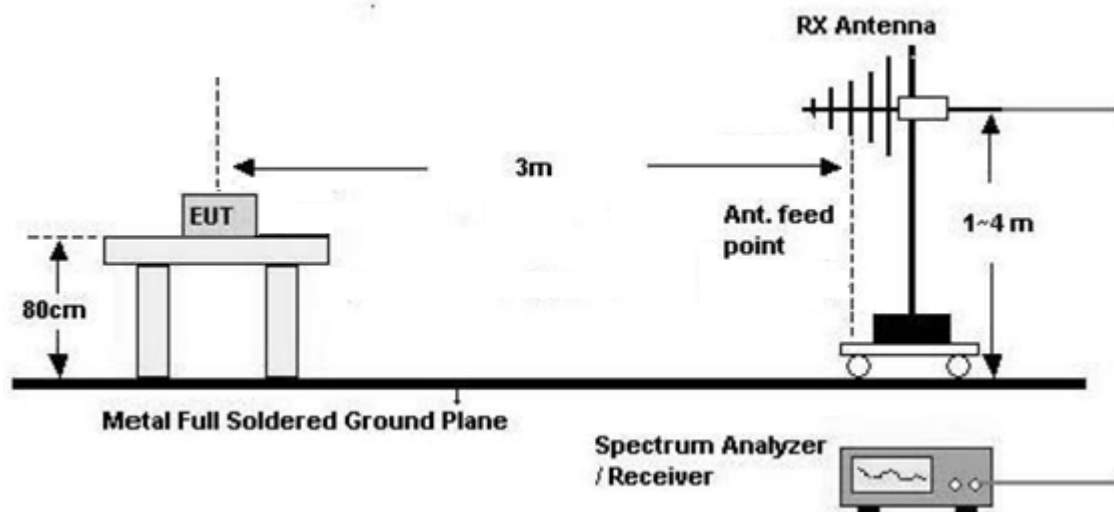

### Test Procedure of in-band

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$

Measurement Distance : 3 m (Below 30 MHz)

#### 7. Spectrum Setting

1) Frequency Range = 9 kHz ~ 150 kHz

- Detector = Peak

- Trace = Maxhold

- RBW = 300 Hz

- VBW  $\geq 3 \times$  RBW

2) Frequency Range = 150 kHz ~ 30 MHz

- Detector = Peak

- Trace = Maxhold

- RBW = 10 kHz

- VBW  $\geq 3 \times$  RBW

8. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$

Measurement Distance : 3 m

#### 8. Spectrum Setting

1) Frequency Range = 9 kHz ~ 150 kHz

- Detector = Peak

- Trace = Maxhold
  - RBW = 300 Hz
  - VBW  $\geq 3 \times$  RBW
- 2) Frequency Range = 150 kHz ~ 30 MHz
- Detector = Peak
  - Trace = Maxhold
  - RBW = 10 kHz
  - VBW  $\geq 3 \times$  RBW

9. Total(Measurement Type : Peak)

= Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Above30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting


- Frequency Range = 30 MHz ~ 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW

7.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

## 7.2. 20 dB Bandwidth

### Test Configuration

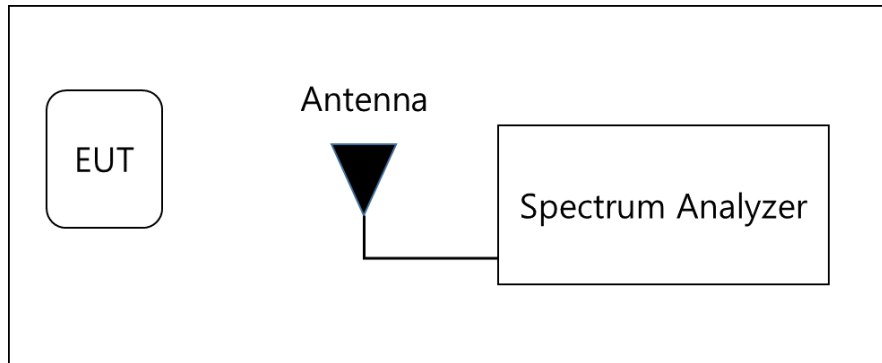

### Test Procedure

The 20 dB bandwidth was measured by using a spectrum analyzer.

(Procedure 6.9.2 in ANSI 63.10-2013)

- 1) RBW = 1 %~5 % of the OBW
- 2) VBW = approximately three times RBW
- 3) Span = between two times and five times the OBW
- 4) Detector = Peak
- 5) Trace mode = Max hold
- 6) Allow the trace to stabilize

#### Note :


We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Frequency Stability

#### Limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

#### Test Configuration

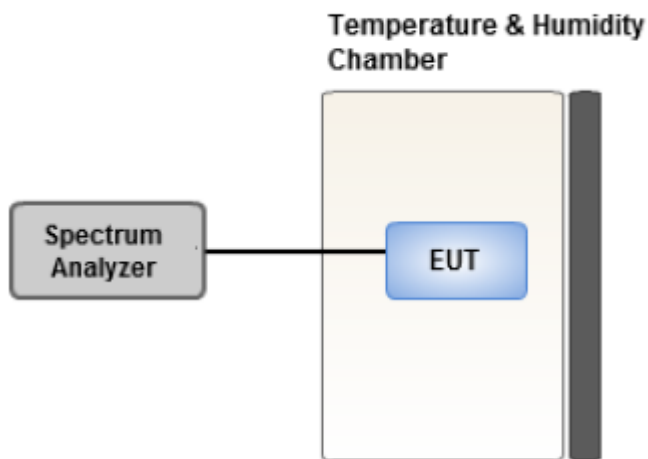

#### Test Procedure.

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber.  
For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements  
for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

#### Note:

- 1) Temperature:  
The temperature is varied from  $-20\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$  using an environmental chamber.
- 2) Primary Supply Voltage :  
The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment.  
For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

**7.4. AC Power line Conducted Emissions**

**Limit**

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

**Test Configuration**

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

**Test Procedure**

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
  - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
  - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

**Sample Calculation**

Quasi-peak(Final Result) = Measured Value + Correction Factor



### 7.5. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration

30 MHz - 1 GHz

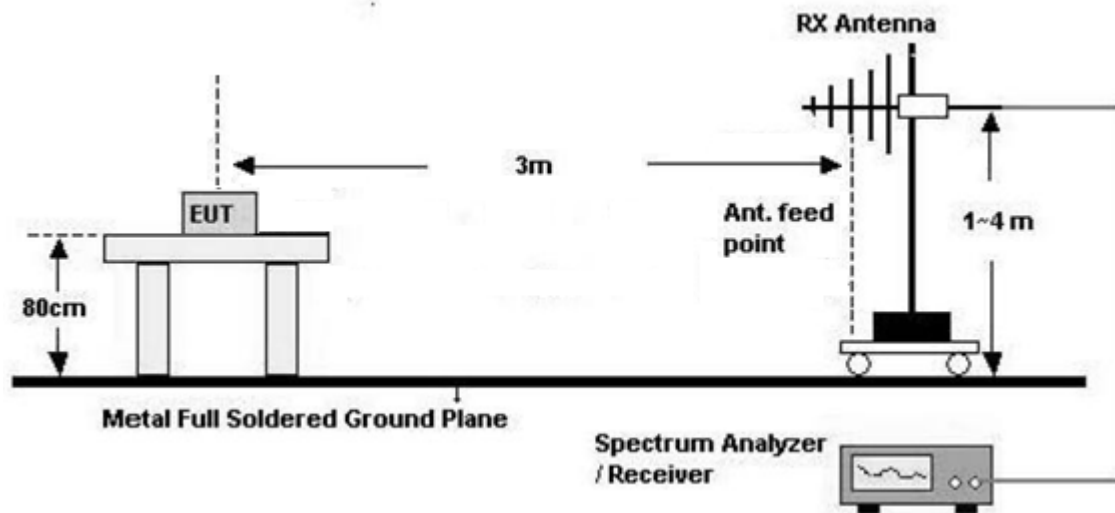

### Test Procedure of Receiver Spurious Emissions (Below 1GHz)


1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

#### (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) – Amp Gain(A.G)

### **Above 1 GHz**

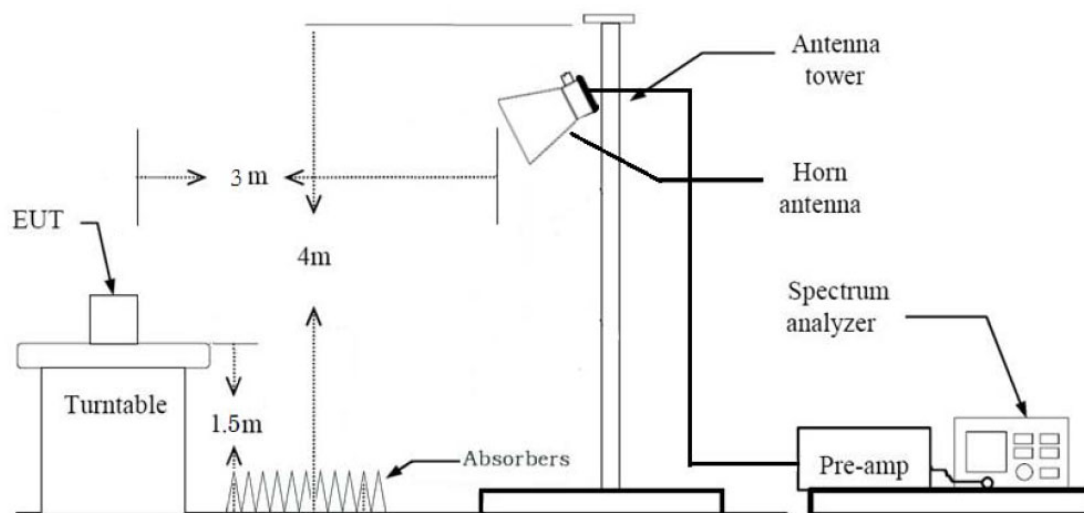

### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out

the highest emissions.

5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Average):
    - RBW = 1 MHz
    - VBW = 3 MHz
    - Detector = Average(RMS)
    - Trace = Average
    - Trace was allowed to stabilize
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

## 7.6. Worst case configuration and mode

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Laptop mode, Convertible mode, Tablet mode
  - Modulation : Type A, Type B, FeliCa, ISO15693
  - Worst case : Tablet mode + ISO15693
2. EUT Axis : X
3. All type and bitrate were investigated and the worst case results are reported.
  - Worst case : Tablet mode + ISO15693
4. All position of loop antenna were investigated and the worst case configuration results are reported.
  - Position : Horizontal, Vertical, Parallel to the ground plane
  - Worst case : Horizontal
5. All simultaneous transmission scenarios of operation were investigated. WWAN + WLAN 6 GHz simultaneous transmission investigated until 40 GHz. and the test results showed no additional significant emissions relative to the least restrictive limit were observed.

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Laptop mode, Convertible mode, Tablet mode
  - Modulation : Type A, Type B, FeliCa, ISO15693
  - Worst case : Tablet mode + ISO15693

### 20 dB Bandwidth & Frequency Stability

1. All type and bitrate were investigated and the worst case results are reported.

## 8. TEST SUMMARY

FCC

Regulation	Requirement	Result
Part 15.225 (a)	Radiated Electric Field Emissions (13.553 MHz to 13.567 MHz)	Pass
Part 15.225 (b)	Radiated Electric Field Emissions ( $13.410 \leq f \leq 13.553$ , $13.567 \leq f \leq 13.710$ )	Pass
Part 15.225 (c)	Radiated Electric Field Emissions ( $13.110 \leq f \leq 13.410$ , $13.710 \leq f \leq 14.010$ )	Pass
Part 15.209	Radiated Electric Field Emissions (9 kHz to 30 MHz)	Pass
Part 15.209	Radiated Electric Field Emissions (30 MHz to 1 GHz)	Pass
Part 15.225 (e)	Frequency Stability	Pass
Part 15.207	AC power conducted emissions (150 kHz to 30 MHz)	Pass
Part 15.215 (c)	20 dB Bandwidth	Pass

## ISED

Test Description	ISED Part Section(s)	Test Result
Radiated Electric Field Emissions (13.553MHz to 13.567MHz)	RSS-210, annex B.6(a)(i)	Pass
Radiated Electric Field Emissions ( $13.410 \leq f \leq 13.553$ , $13.567 \leq f \leq 13.710$ )	RSS-210, annex B.6(a)(ii)	Pass
Radiated Electric Field Emissions ( $13.110 \leq f \leq 13.410$ , $13.710 \leq f \leq 14.010$ )	RSS-210, annex B.6(a)(iii)	Pass
Radiated Electric Field Emissions (9kHz to 30MHz)	RSS-GEN, 8.9	Pass
Radiated Electric Field Emissions (30MHz to 1GHz)	RSS-GEN, 8.9	Pass
Frequency Stability	RSS-210, annex B.6(b)	Pass
AC power conducted emissions (150kHz to 30MHz)	RSS-GEN, 8.8	Pass
20 dB Bandwidth	RSS-GEN, 6.7	Pass
Receiver Spurious Emissions	RSS-GEN, 7	Pass

## 9. TEST RESULT

- Worst Case : ISO 15693

### 9.1. Operation within the band 13.110 MHz – 14.010 MHz

#### Measured Frequency Range :

13.553 MHz-13.567 MHz

Frequency (MHz)	Measured Value (dB $\mu$ V/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB $\mu$ V/m) @30 m	Limit (dB $\mu$ V/m) @30 m	Margin (dB)
13.5599	44.88	20.59	-40.00	H	25.47	84.00	58.53
13.5598	40.48	20.59	-40.00	V	21.07	84.00	62.93

#### Measured Frequency Range :

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz

Frequency (MHz)	Measured Value (dB $\mu$ V/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB $\mu$ V/m) @30 m	Limit (dB $\mu$ V/m) @30 m	Margin (dB)
13.5529	39.61	20.59	-40.00	H	20.20	50.47	30.27
13.5670	39.37	20.59	-40.00	H	19.96	50.47	30.51


#### Measured Frequency Range :

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz


Frequency (MHz)	Measured Value (dB $\mu$ V/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB $\mu$ V/m) @30 m	Limit (dB $\mu$ V/m) @30 m	Margin (dB)
13.4034	22.05	20.59	-40.00	H	2.64	40.51	37.87
13.7196	19.94	20.59	-40.00	H	0.53	40.51	39.98

▣ Test Plot

13.553 MHz ~ 13.567 MHz

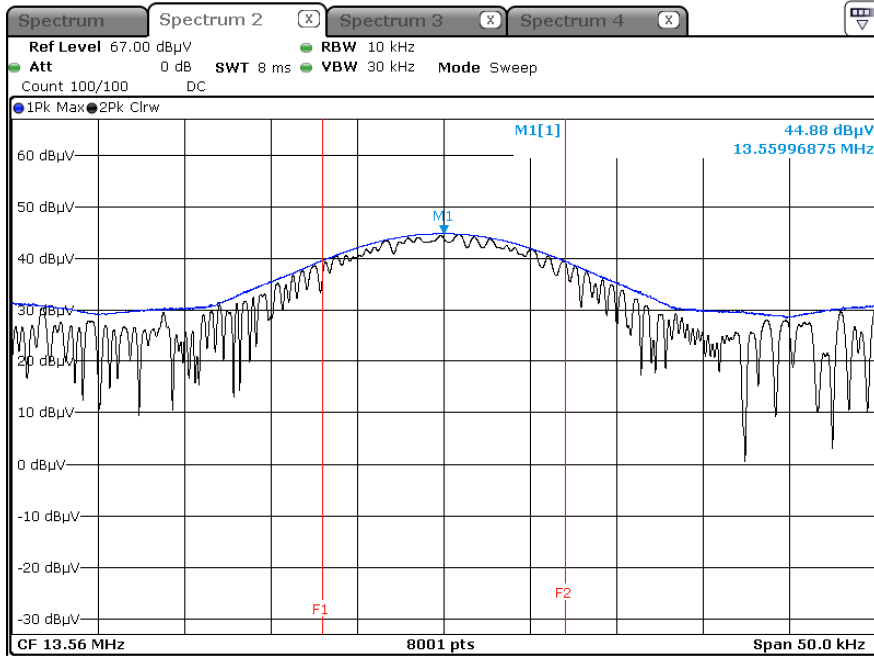

Worst Case (13.410 MHz - 13.553 MHz)

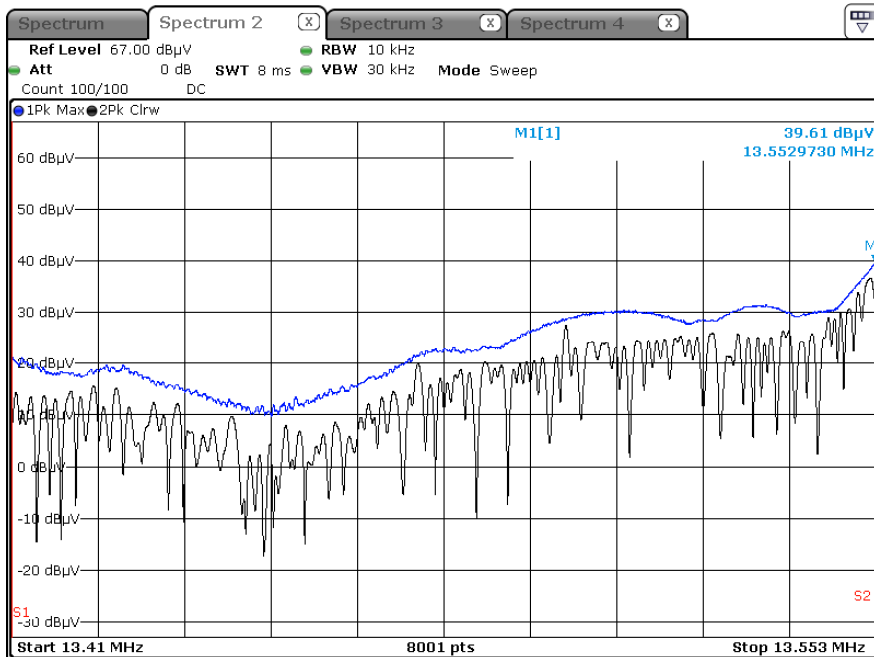

**Note:**

Plot of worst case are only reported.



## 9.2. Radiated Emission 9kHz – 30 MHz

FCC

Measured Frequency Range : 9 kHz -30 MHz							
Frequency (kHz)	Measured Value (dB $\mu$ V/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB $\mu$ V/m) @300 m	Limit (dB $\mu$ V/m) @300 m	Margin (dB)
10.2748	18.59	20.66	-40.00	H	-0.75	29.54	30.29
24.4439	12.20	20.74	-40.00	H	-7.06	29.54	36.60
27.4003	12.13	20.76	-40.00	H	-7.11	29.54	36.65
27.0366	11.49	20.76	-40.00	H	-7.75	29.54	37.29

ISED

Measured Frequency Range : 9 kHz – 30 MHz								
Frequency (MHz)	Measured Value (dB $\mu$ V/m) @3 m	Ant. Factor + Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB $\mu$ V/m) @30 m	Total (dB $\mu$ A/m) @30 m	Limit (dB $\mu$ A/m) @30 m	Margin (dB)
10.2748	18.59	20.66	-40.00	H	-0.75	-52.25	-21.94	30.31
24.4439	12.20	20.74	-40.00	H	-7.06	-58.56	-21.94	36.62
27.4003	12.13	20.76	-40.00	H	-7.11	-58.61	-21.94	36.67
27.0366	11.49	20.76	-40.00	H	-7.75	-59.25	-21.94	37.31

**Note:**

1. dB $\mu$ A/m = dB $\mu$ V/m - 51.5 dB


### 9.3. Radiated Emission 30MHz – 1000 MHz

Measured Frequency Range : 30 MHz - 1000 MHz							
Frequency (MHz)	Measured Value (dB $\mu$ V/m)@ 3 m	A.F [dB/m]	C.L [dB]	Ant. Pol (H/V)	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
#37.578	10.430	19.32	0.55	H	30.30	40.00	9.70
49.2619	10.570	19.83	0.56	H	30.96	40.00	9.04
74.9156	11.320	17.78	0.67	V	29.77	40.00	10.23
#119.5405	10.520	17.13	0.84	H	28.49	43.50	15.01
#126.6154	10.600	17.53	0.84	H	28.97	43.50	14.53
155.4741	11.160	19.24	0.96	V	31.36	43.50	12.14

**Note:**

1. # is the result for restricted band.


**Test Plot**

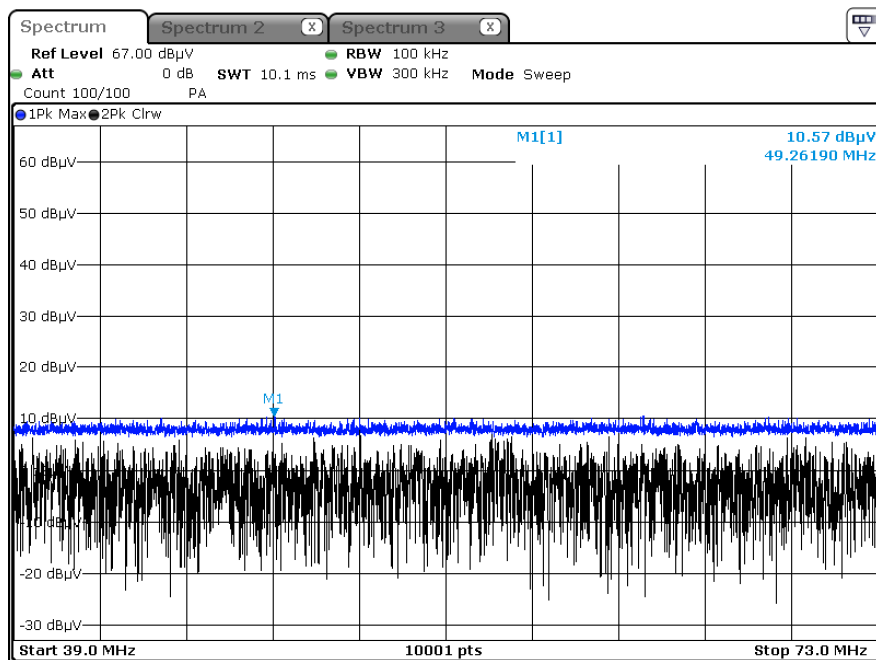

**Note:**

Plot of worst case are only reported

### 9.4. 20 dB Bandwidth

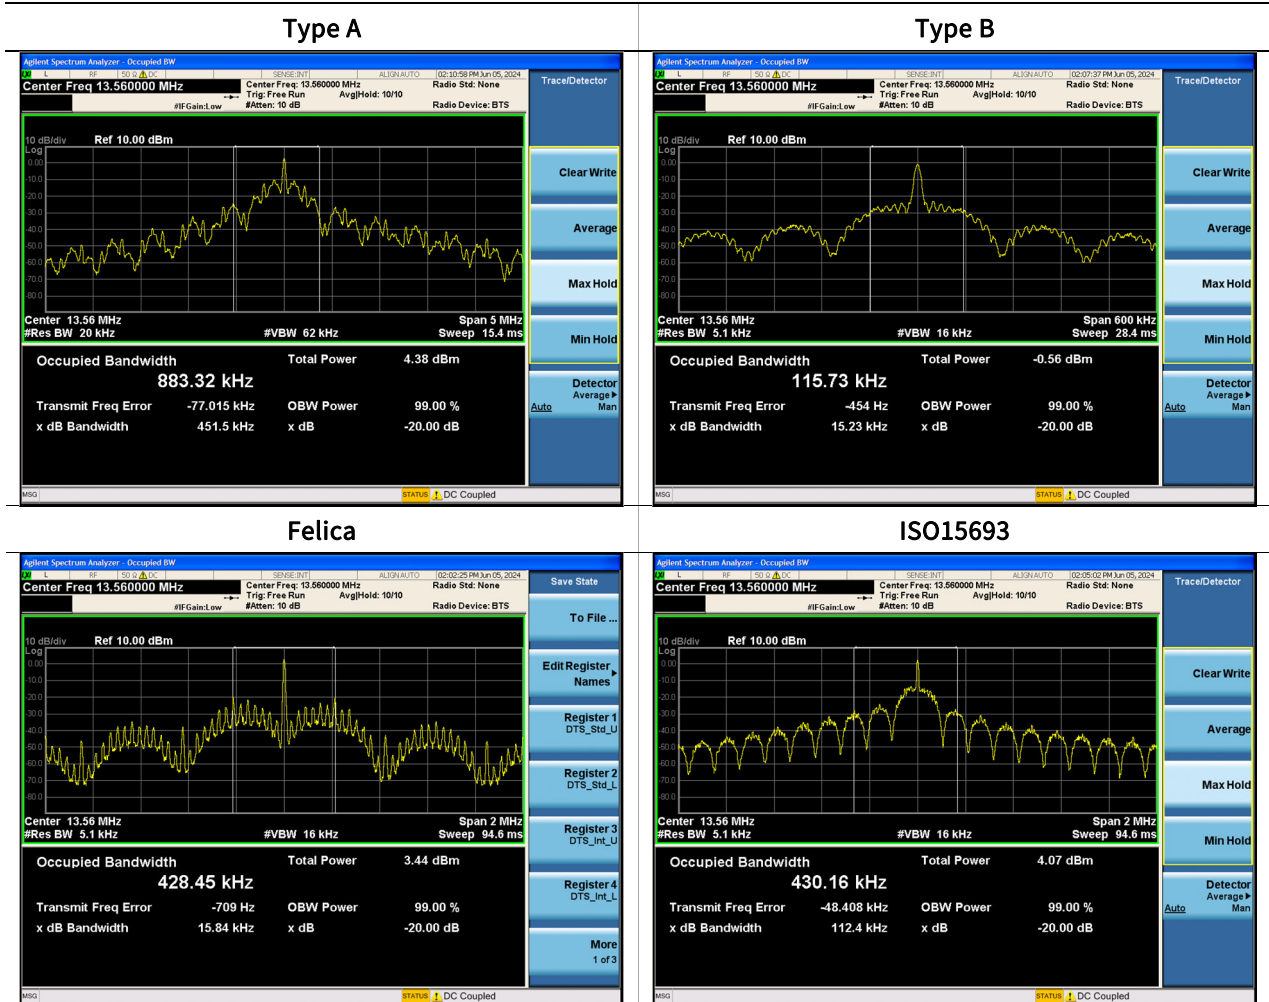

## 9.5. Frequency Stability

### Startup

OPERATING FREQUENCY: 13.56 MHz  
 REFERENCE VOLTAGE: 11.10 VDC  
 DEVIATION LIMIT:  $\pm 0.01\% = \pm 1356 \text{ Hz}$

Voltage	Power	Temp.	Frequency	Frequency Dev.	Frequency
(%)	(VDC)	(°C)	(MHz)	(Hz)	Dev (%)
100%	11.10	-20	13.560010	10	0.0000737
100%		-10	13.560012	12	0.0000885
100%		0	13.559968	-32	-0.0002360
100%		+10	13.560024	24	0.0001770
100%		+20(Ref.)	13.560007	7	0.0000516
100%		+30	13.560034	34	0.0002507
100%		+40	13.559975	-25	-0.0001844
100%		+50	13.559989	-11	-0.0000811
LOW		9.00	+20	13.560007	7
HIGH	12.60	+20	13.560005	5	0.0000369

**2 minutes**

PERATING FREQUENCY: 13.56 MHz  
 REFERENCE VOLTAGE: 11.10 VDC  
 DEVIATION LIMIT: ±0.01 % = ±1356 Hz

Voltage	Power	Temp.	Frequency	Frequency Dev.	Frequency
(%)	(VDC)	(°C)	(MHz)	(Hz)	Dev (%)
100%	11.10	-20	13.559974	-26	-0.0001917
100%		-10	13.560024	24	0.0001770
100%		0	13.560033	33	0.0002434
100%		+10	13.560011	11	0.0000811
100%		+20(Ref.)	13.560019	19	0.0001401
100%		+30	13.559958	-42	-0.0003097
100%		+40	13.559968	-32	-0.0002360
100%		+50	13.559995	-5	-0.0000369
LOW		9.00	+20	13.560004	4
HIGH	12.60	+20	13.560032	32	0.0002360

**5 minutes**

PERATING FREQUENCY: 13.56 MHz  
 REFERENCE VOLTAGE: 11.10 VDC  
 DEVIATION LIMIT: ±0.01 % = ±1356 Hz

Voltage	Power	Temp.	Frequency	Frequency Dev.	Frequency
(%)	(VDC)	(°C)	(MHz)	(Hz)	Dev (%)
100%	11.10	-20	13.560023	23	0.0001696
100%		-10	13.560012	12	0.0000885
100%		0	13.560052	52	0.0003835
100%		+10	13.559978	-22	-0.0001622
100%		+20(Ref.)	13.560035	35	0.0002581
100%		+30	13.560028	28	0.0002065
100%		+40	13.560019	19	0.0001401
100%		+50	13.559996	-4	-0.0000295
LOW		9.00	+20	13.560025	25
HIGH	12.60	+20	13.559995	-5	-0.0000369

**10 minutes**

PERATING FREQUENCY: 13.56 MHz  
 REFERENCE VOLTAGE: 11.10 VDC  
 DEVIATION LIMIT: ±0.01 % = ±1356 Hz

Voltage	Power	Temp.	Frequency	Frequency Dev.	Frequency
(%)	(VDC)	(°C)	(MHz)	(Hz)	Dev (%)
100%	11.10	-20	13.560035	35	0.0002581
100%		-10	13.560024	24	0.0001770
100%		0	13.559988	-12	-0.0000885
100%		+10	13.560022	22	0.0001622
100%		+20(Ref.)	13.560036	36	0.0002655
100%		+30	13.560041	41	0.0003024
100%		+40	13.560008	8	0.0000590
100%		+50	13.560019	19	0.0001401
LOW		9.00	+20	13.559976	-24
HIGH	12.60	+20	13.560005	5	0.0000369

## 9.6. POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions

[Unterm]

Test


1 / 1

## Test Report

### Common Information

EUT : CF-33  
 Operating Conditions : RFID ISO  
 Comment :

Full Spectrum

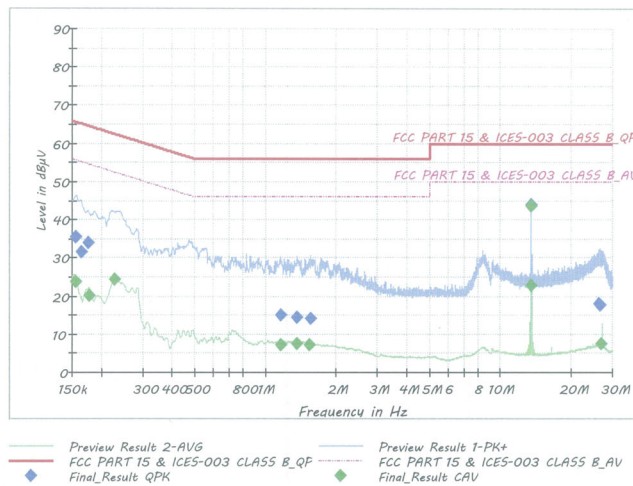

### Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1545	35.38	65.75	30.37	9.000	L1	9.6
0.1635	31.61	65.28	33.67	9.000	L1	9.6
0.1748	34.15	64.73	30.58	9.000	L1	9.6
1.1593	15.12	56.00	40.88	9.000	L1	9.7
1.3663	14.58	56.00	41.42	9.000	L1	9.7
1.5620	14.17	56.00	41.83	9.000	L1	9.7
13.5590	43.95	60.00	16.05	9.000	L1	10.1
26.1343	18.14	60.00	41.86	9.000	L1	10.6
26.6180	17.90	60.00	42.10	9.000	L1	10.6

### Final Result CAV

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1545	23.82	55.75	31.93	9.000	L1	9.6
0.1770	20.07	54.63	34.55	9.000	L1	9.6
0.2265	24.45	52.58	28.13	9.000	N	9.6
1.1593	7.26	46.00	38.74	9.000	L1	9.7
1.3640	7.44	46.00	38.56	9.000	L1	9.7
1.5440	7.14	46.00	38.86	9.000	L1	9.7
13.5433	22.73	50.00	27.27	9.000	L1	10.1
13.5590	43.79	50.00	6.21	9.000	L1	10.1
26.7733	7.45	50.00	42.55	9.000	L1	10.6

2024-06-10

오전 11:37:50



## 9.7 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

#### Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/02/2024	Annual
EMI Test Receiver	ESCI	Rohde & Schwarz	100584	05/08/2025	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/19/2025	Annual
DC Power Supply	E3632A	H.P	KR75303243	04/19/2025	Annual
Attenuator(10 dB)	8493C	Hewlett Packard	07560	06/05/2025	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2026	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	760	02/24/2025	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02299	01/29/2025	Biennial
Spectrum Analyzer	FSV40	Rohde & Schwarz	100901	02/22/2025	Annual
Signal Analyzer	N9030A	Agilent	MY52350879	04/05/2025	Annual
RF Switching System	FMSR-04B (3G HPF+LNA)	T&M SYSTEM	S2L1	12/27/2024	Annual
RF Switching System	FMSR-04B (10dB ATT+LNA)	T&M SYSTEM	S2L2	12/27/2024	Annual
RF Switching System	FMSR-04B (3dB ATT+LNA)	T&M SYSTEM	S2L3	12/27/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2406-FI014-P