

Wi-Fi 2.4GHz Tablet Mode

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 37.142$; $\rho = 1000$ kg/m³

Dasy Configuration:

- Area Scan Setting: Find Secondary Maximum within 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Electronics: DAE4 Sn1439; Calibrated: 2021-08-11
- Probe: EX3DV4 - SN7569; ConvF(7.61, 7.61, 7.61) @ 2437 MHz; Calibrated: 2021-04-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Edge1 0mm/802.11b_ch 6/Area Scan (9x29x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.473 W/kg

Edge1 0mm/802.11b_ch 6/Zoom Scan_WLAN#1 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.18 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.890 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.710 W/kg

Edge1 0mm/802.11b_ch 6/Zoom Scan_WLAN#2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.18 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.443 W/kg

Edge1 0mm/802.11b_ch 6/Zoom Scan_WLAN#2_2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.18 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.459 W/kg


SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 41.7%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.349 W/kg

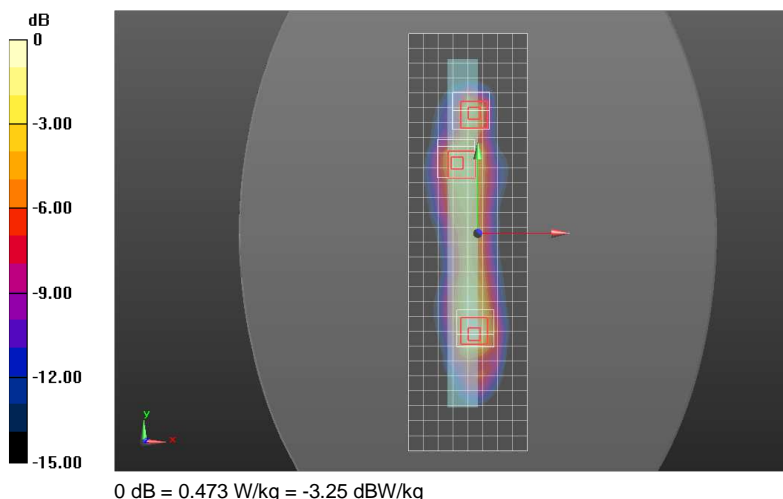

Wi-Fi 2.4GHz Tablet Mode

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 37.099$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1439; Calibrated: 8/11/2021
- Probe: EX3DV4 - SN7569; ConvF(7.61, 7.61, 7.61); Calibrated: 4/26/2021;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Rear Tilt (Edge 1 Side) 0mm/802.11b_ch 11/Area Scan (11x28x1): Measurement grid: dx=12mm, dy=12mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.69 W/kg

Rear Tilt (Edge 1 Side) 0mm/802.11b_ch 11/Zoom Scan_WLAN#1 (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.461 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.072 W/kg

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.248 W/kg

Rear Tilt (Edge 1 Side) 0mm/802.11b_ch 11/Zoom Scan_WLAN#2 (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 27.461 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.338 W/kg

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.57 W/kg

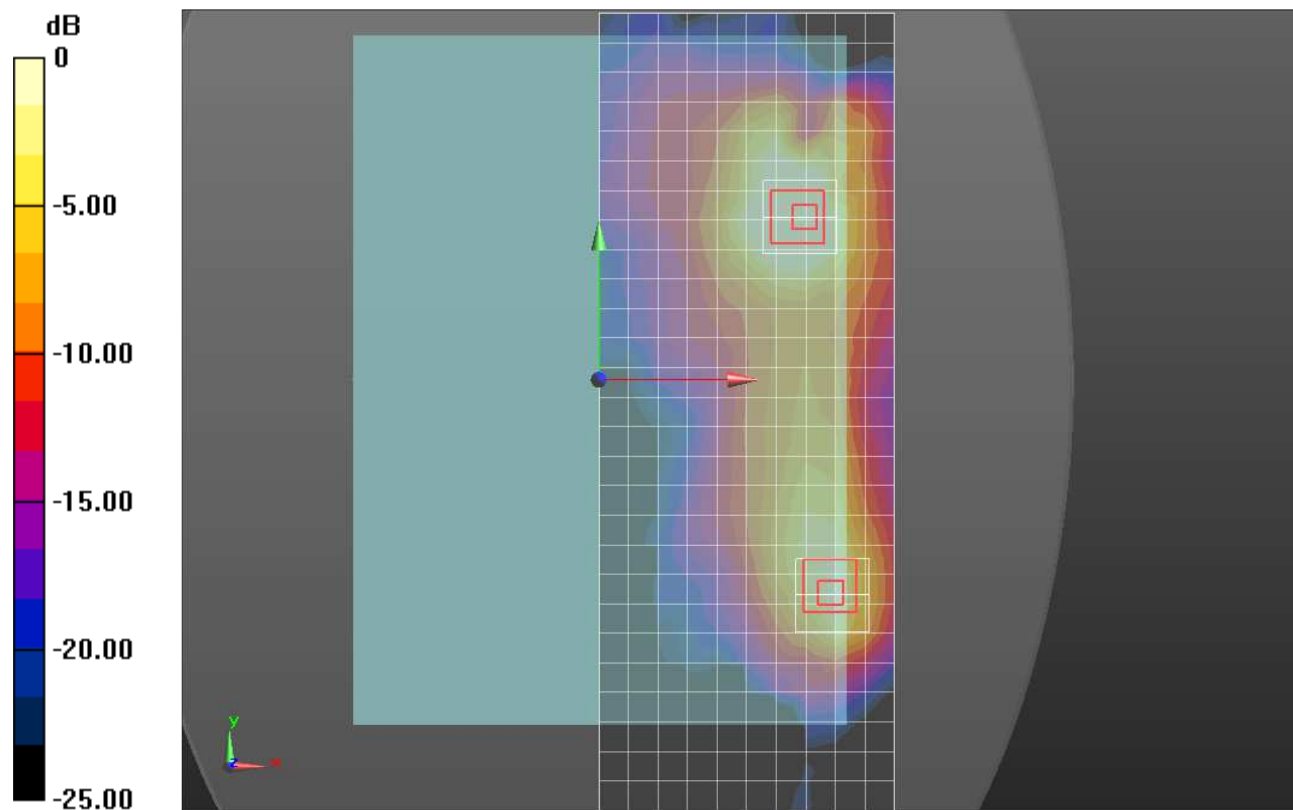

0 dB = 0.248 W/kg = -6.06 dBW/kg

Wi-Fi 5.3GHz Tablet Mode

Frequency: 5250 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.556$ S/m; $\epsilon_r = 34.929$; $\rho = 1000$ kg/m³

Dasy Configuration:

- Area Scan Setting: Find Secondary Maximum within 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Electronics: DAE4 Sn1439; Calibrated: 2021-08-11
- Probe: EX3DV4 - SN3686; ConvF(5.15, 5.15, 5.15) @ 5250 MHz; Calibrated: 2022-01-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Edge 1 0mm/802.11ac Ch 50/Area Scan (11x29x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.995 W/kg

Edge 1 0mm/802.11ac Ch 50/Zoom Scan_WLAN#1 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.04 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 W/kg

Edge 1 0mm/802.11ac Ch 50/Zoom Scan_WLAN#2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.04 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.444 W/kg



SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 53%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.289 W/kg

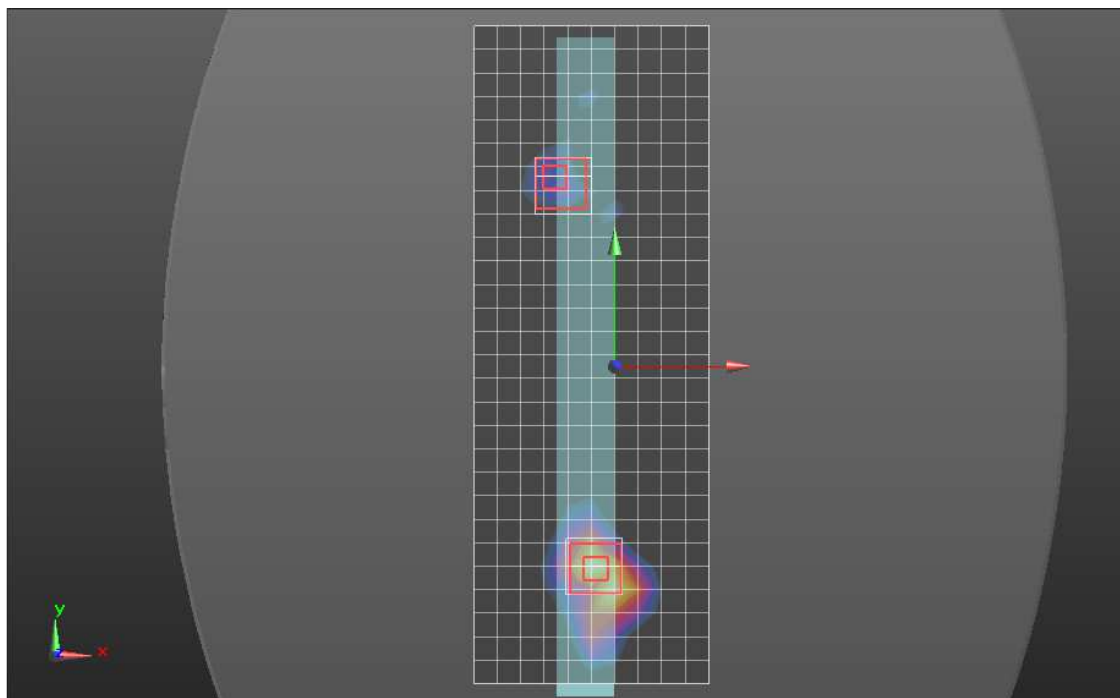

0 dB = 0.995 W/kg = -0.02 dBW/kg

Wi-Fi 5.3GHz Tablet Mode

Frequency: 5250 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.556$ S/m; $\epsilon_r = 34.929$; $\rho = 1000$ kg/m³

Dasy Configuration:

- Area Scan Setting: Find Secondary Maximum within 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Electronics: DAE4 Sn1439; Calibrated: 2021-08-11
- Probe: EX3DV4 - SN3686; ConvF(5.15, 5.15, 5.15) @ 5250 MHz; Calibrated: 2022-01-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Rear Tilt (Edge 1 Side) 0mm/802.11ac Ch 50/Area Scan (10x24x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.92 W/kg

Rear Tilt (Edge 1 Side) 0mm/802.11ac Ch 50/Zoom Scan_WLAN#1 (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.15 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.508 W/kg

Rear Tilt (Edge 1 Side) 0mm/802.11ac Ch 50/Zoom Scan_WLAN#2 (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.15 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.44 W/kg


SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.05 W/kg

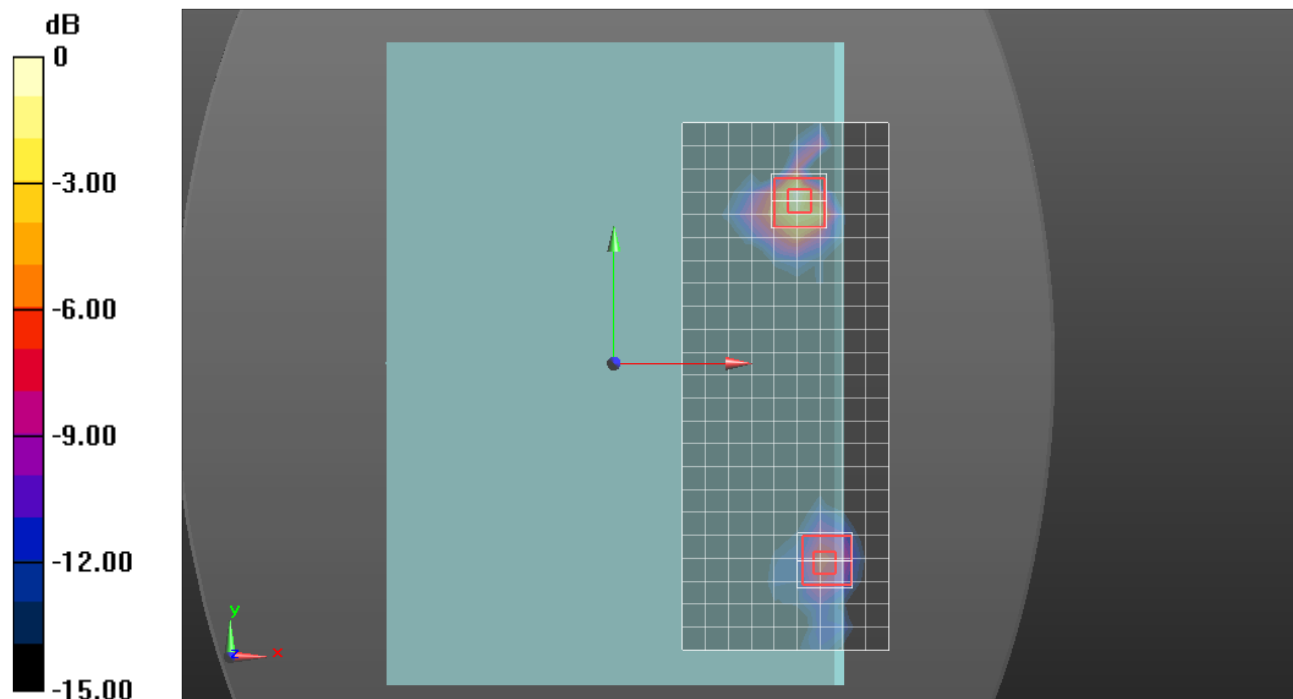

0 dB = 1.92 W/kg = 2.83 dBW/kg

Wi-Fi 5.5GHz Tablet Mode

Frequency: 5570 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 5570$ MHz; $\sigma = 4.908$ S/m; $\epsilon_r = 34.622$; $\rho = 1000$ kg/m³

Dasy Configuration:

- Area Scan Setting: Find Secondary Maximum within 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Electronics: DAE4 Sn1439; Calibrated: 2021-08-11
- Probe: EX3DV4 - SN3686; ConvF(4.55, 4.55, 4.55) @ 5570 MHz; Calibrated: 2022-01-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Edge1 0mm/802.11ac Ch 114/Area Scan (11x29x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.36 W/kg

Edge1 0mm/802.11ac Ch 114/Zoom Scan_WLAN#1 (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.65 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 52%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 W/kg

Edge1 0mm/802.11ac Ch 114/Zoom Scan_WLAN#2 (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.65 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.562 W/kg



SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.043 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.354 W/kg

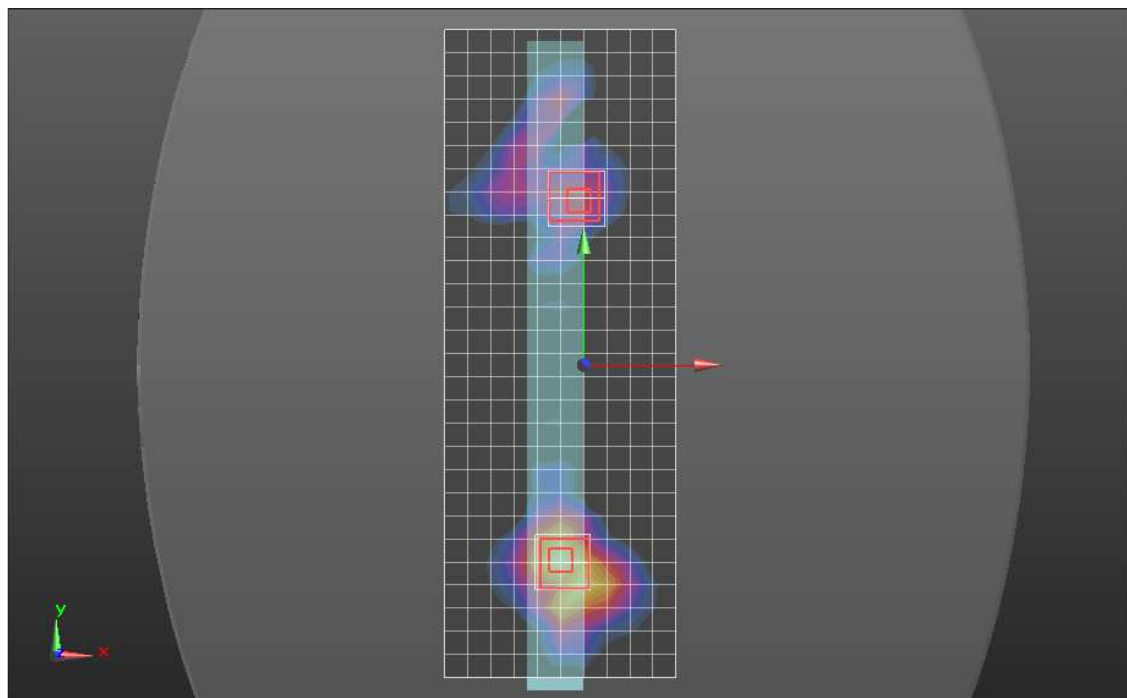

0 dB = 1.36 W/kg = 1.34 dBW/kg

Wi-Fi 5.5GHz Tablet Mode

Frequency: 5570 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 5570$ MHz; $\sigma = 4.908$ S/m; $\epsilon_r = 34.622$; $\rho = 1000$ kg/m³

Dasy Configuration:

- Area Scan Setting: Find Secondary Maximum within 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Electronics: DAE4 Sn1439; Calibrated: 2021-08-11
- Probe: EX3DV4 - SN3686; ConvF(4.55, 4.55, 4.55) @ 5570 MHz; Calibrated: 2022-01-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Rear Tilt (Edge1 Side) 0mm/802.11ac Ch 114/Area Scan (10x24x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.98 W/kg

Rear Tilt (Edge1 Side) 0mm/802.11ac Ch 114/Zoom Scan_WLAN#1 (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 17.24 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.775 W/kg

Rear Tilt (Edge1 Side) 0mm/802.11ac Ch 114/Zoom Scan_WLAN#2 (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 17.24 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.69 W/kg


SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.00 W/kg

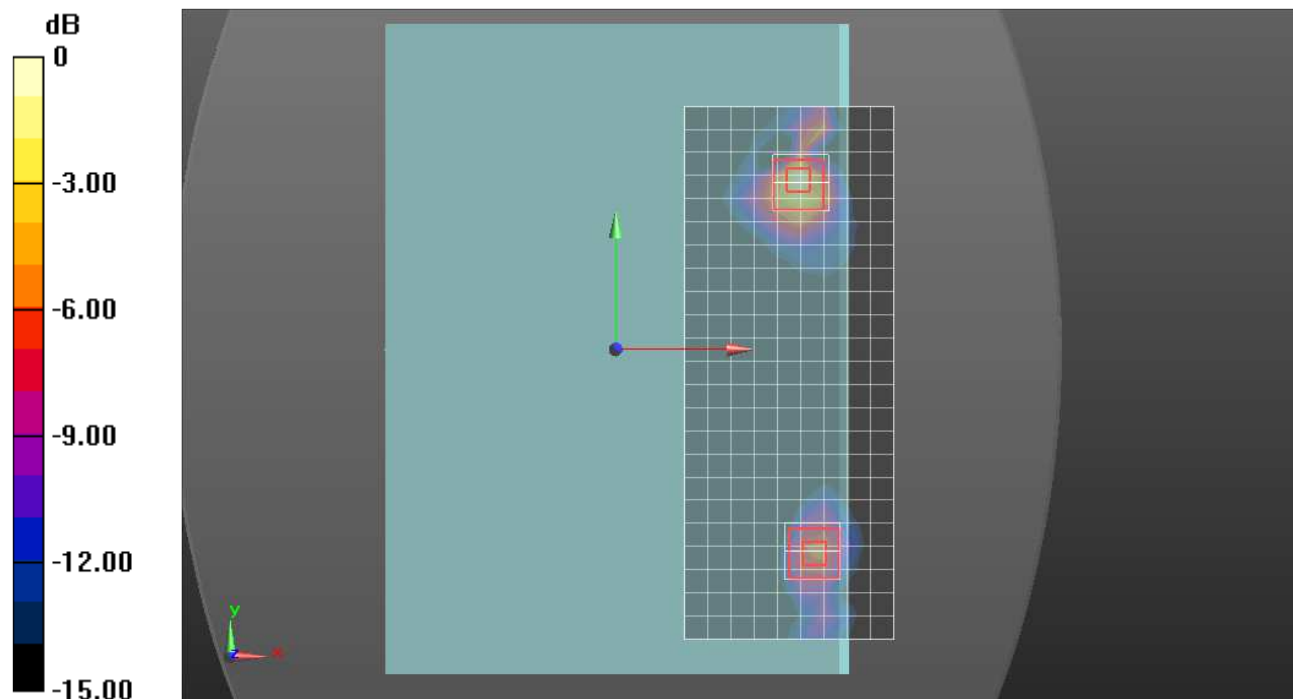

0 dB = 2.00 W/kg = 3.01 dBW/kg

Wi-Fi 5.8GHz Tablet Mode

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.205 \text{ S/m}$; $\epsilon_r = 34.925$; $\rho = 1000 \text{ kg/m}^3$


Dasy Configuration:

- Area Scan Setting: Find Secondary Maximum within 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Electronics: DAE4 Sn1439; Calibrated: 2021-08-11
- Probe: EX3DV4 - SN3686; ConvF(4.5, 4.5, 4.5) @ 5775 MHz; Calibrated: 2022-01-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Edge1 0mm/802.11ac Ch 155/Area Scan (11x29x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 1.33 W/kg

Edge1 0mm/802.11ac Ch 155/Zoom Scan_WLAN#1 (8x8x12)/Cube 0: Measurement grid:
 $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 13.85 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 2.46 W/kg
SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.176 W/kg
 Smallest distance from peaks to all points 3 dB below = 5.1 mm
 Ratio of SAR at M2 to SAR at M1 = 49.5%
 Maximum value of SAR (measured) = 1.37 W/kg

Edge1 0mm/802.11ac Ch 155/Zoom Scan_WLAN#2 (7x7x12)/Cube 0: Measurement grid:
 $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 13.85 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 0.852 W/kg
SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.051 W/kg
 Smallest distance from peaks to all points 3 dB below = 5.8 mm
 Ratio of Maximum value of SAR (measured) = 0.528 W/kg

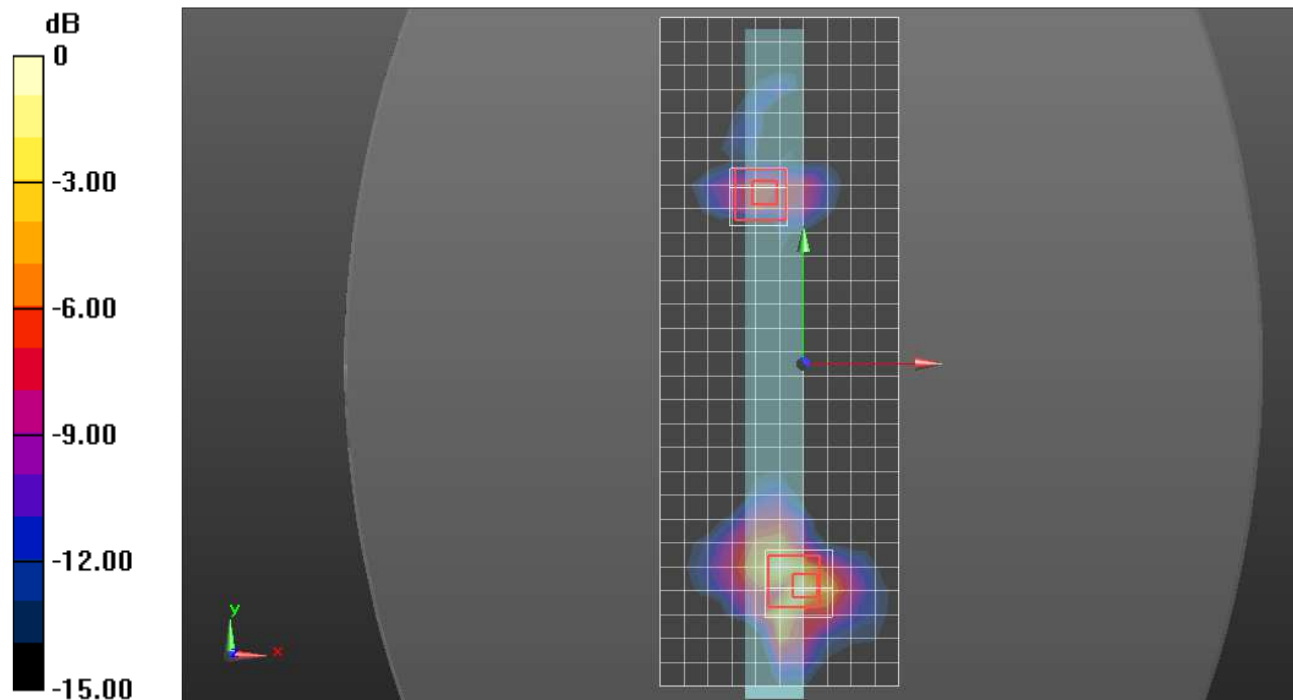

0 dB = 1.33 W/kg = 1.23 dBW/kg

Wi-Fi 5.8GHz Tablet Mode

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.205 \text{ S/m}$; $\epsilon_r = 34.925$; $\rho = 1000 \text{ kg/m}^3$


Dasy Configuration:

- Area Scan Setting: Find Secondary Maximum within 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Electronics: DAE4 Sn1439; Calibrated: 2021-08-11
- Probe: EX3DV4 - SN3686; ConvF(4.5, 4.5, 4.5) @ 5775 MHz; Calibrated: 2022-01-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Rear Tilt (Edge1 Side) 0mm/802.11ac Ch 155/Area Scan (10x24x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 2.21 W/kg

Rear Tilt (Edge1 Side) 0mm/802.11ac Ch 155/Zoom Scan_WLAN#1 (7x7x12)/Cube 0:
 Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 17.64 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.110 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.9 mm
 Ratio of SAR at M2 to SAR at M1 = 49.6%
 Maximum value of SAR (measured) = 0.847 W/kg

Rear Tilt (Edge1 Side) 0mm/802.11ac Ch 155/Zoom Scan_WLAN#2 (7x7x12)/Cube 0:
 Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 17.64 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 4.13 W/kg
SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.219 W/kg
 Smallest distance from peaks to all points 3 dB below = 5.4 mm
 Ratio of SAR at M2 to SAR at M1 = 47.7%
 Maximum value of SAR (measured) = 2.09 W/kg

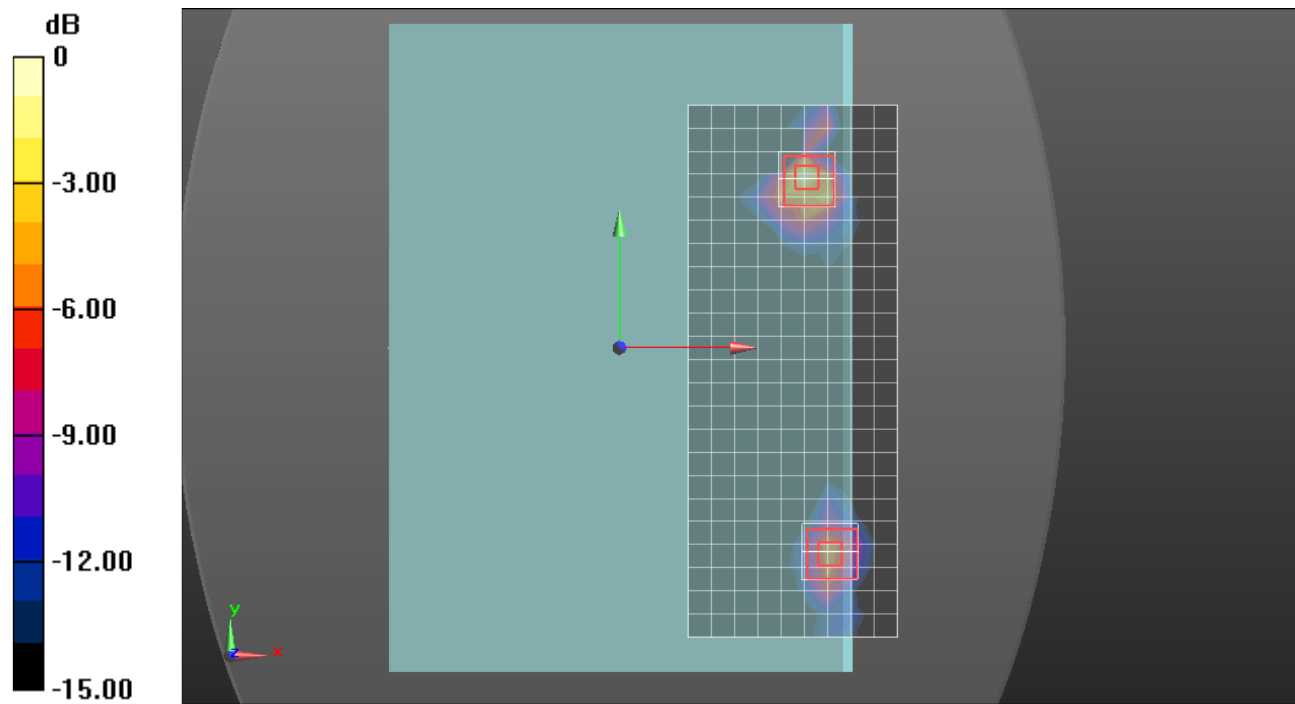

0 dB = 2.21 W/kg = 3.44 dBW/kg

Wi-Fi U-NII-8 Tablet Mode

Exposure Conditions

Band	U-NII-8	TSL Permittivity	33.2
Frequency [MHz] Channel Number	6985.0 207	TSL Conductivity [S/m]	6.73
Group UID	WLAN 10755-AAC	Phantom Section TSL	Flat HSL
Conversion Factor	5.7	Test Distance [mm]	0.00
Communication Configuration	IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle)		

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7711 2022-03-11	Phantom	ELI V5.0 (20deg probe tilt) - SN1194
DAE Calibration Date	DAE4 Sn1716 2022-03-08	TSL Type	HBBL-600-10000
Position	Edge1, WLAN#1		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
M2/M1 [%]		49.5
Dist 3dB Peak [mm]		4.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.268	0.303
psSAR10g [W/Kg]	0.081	0.077
Power Drift [dB]	0.83	-0.03

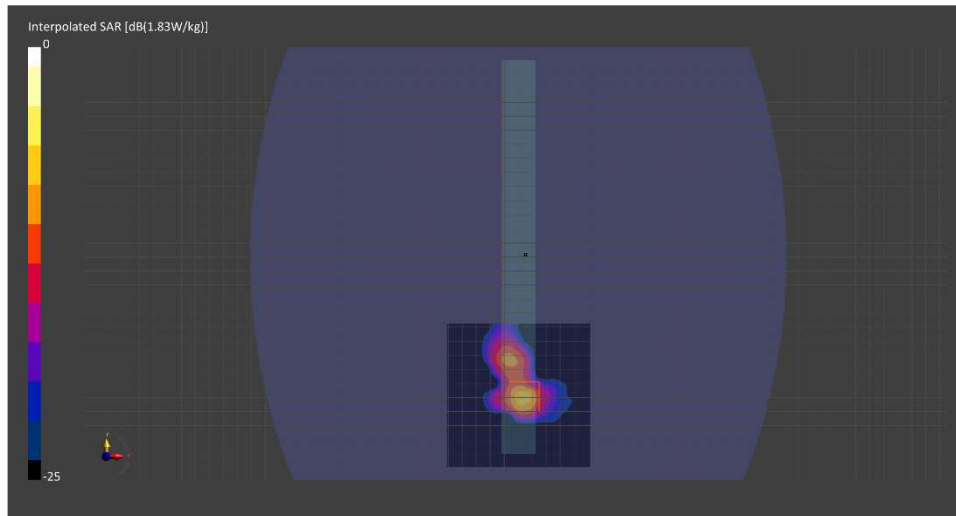

Wi-Fi U-NII-8 Tablet Mode

Exposure Conditions

Band	U-NII-7	TSL Permittivity	33.0
Frequency [MHz] Channel Number	6665.0 143	TSL Conductivity [S/m]	6.21
Group UID	WLAN 10755-AAC	Phantom Section TSL	Flat HSL
Conversion Factor	5.7	Test Distance [mm]	0.00
Communication Configuration	IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle)		

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7711 2022-03-11	Phantom	ELI V8.0 (20deg probe tilt) - SN2081
DAE Calibration Date	DAE4 Sn1716 2022-03-08	TSL Meas. Date	HBBL-600-10000 2022-Jun-30
Position	Rear Tilt (Edge1 side), WLAN #2		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
M2/M1 [%]		50.7
Dist 3dB Peak [mm]		4.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.308	0.371
psSAR10g [W/Kg]	0.090	0.094
Power Drift [dB]	-0.15	0.03

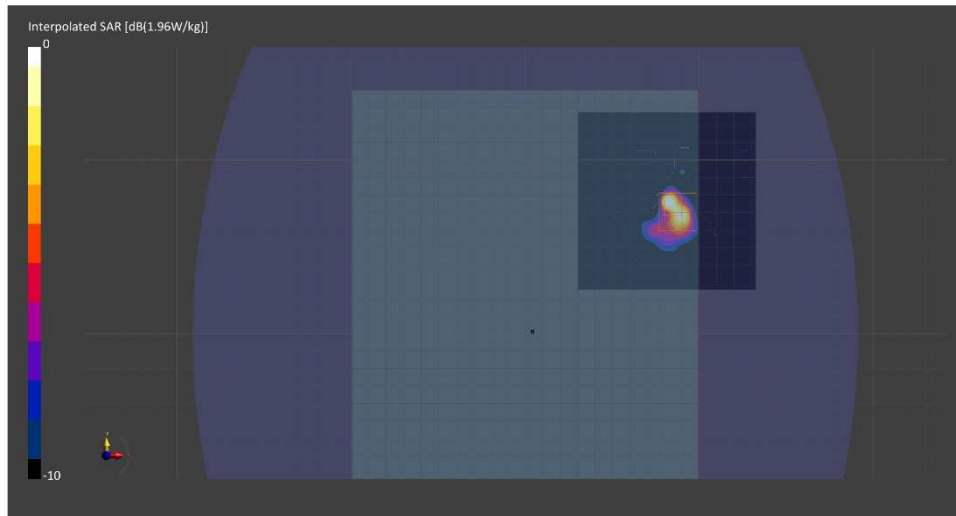

Bluetooth

Frequency: 2441 MHz; Duty Cycle: 1:1.29033; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 40.124$; $\rho = 1000$ kg/m³

Dasy Configuration:

- Area Scan Setting: Find Secondary Maximum within 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Electronics: DAE4 Sn1439; Calibrated: 2021-08-11
- Probe: EX3DV4 - SN3686; ConvF(7.09, 7.09, 7.09) @ 2441 MHz; Calibrated: 2022-01-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI A v5.0; Type: QD OVA 002 AA; Serial: 1194

Rear Tilt (Edge 1 Side) 0mm/GFSK DH5_ch 39/Area Scan (20x28x1): Measurement grid:
 dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.177 W/kg

Rear Tilt (Edge 1 Side) 0mm/GFSK DH5_ch 39/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
 dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.922 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.252 W/kg


SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.6%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.181 W/kg

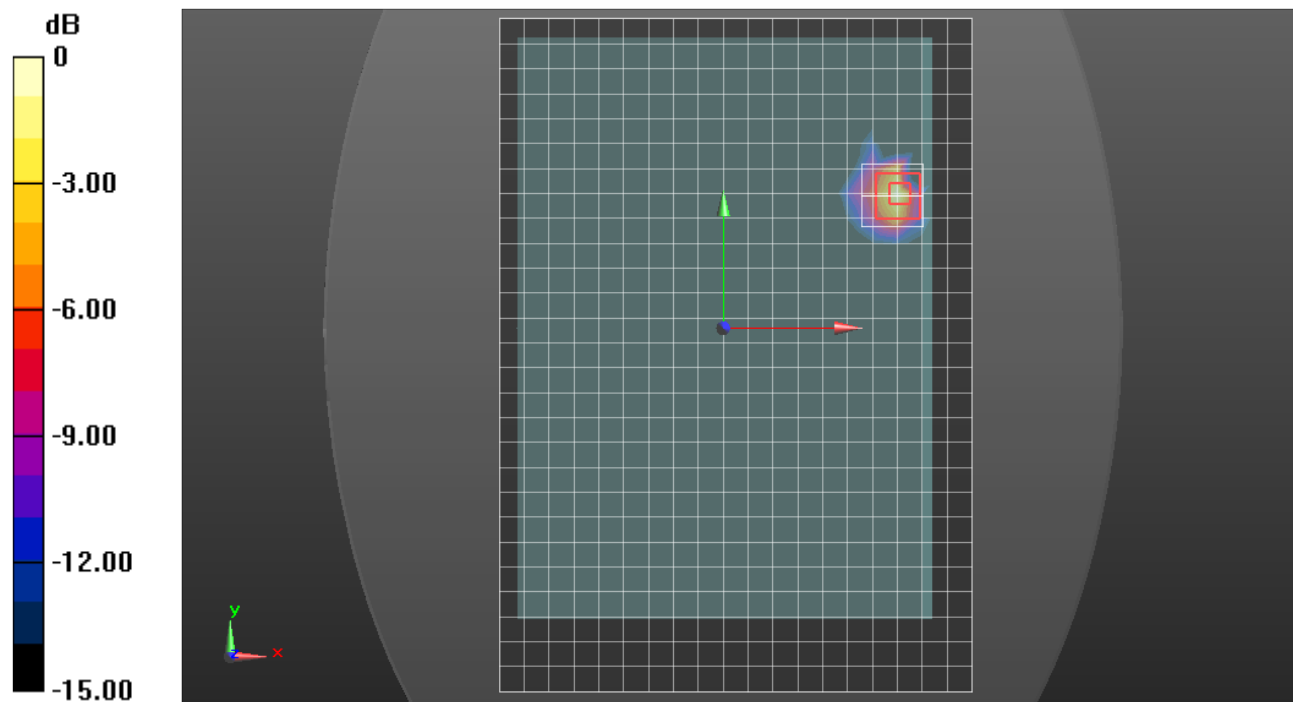

0 dB = 0.181 W/kg = -7.42 dBW/kg