

WCDMA Band5 RMC 12.2k 826.4MHz Edge1 0mm Power Reduction

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 56.686$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x181x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.88 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 48.56 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.620 W/kg

Maximum value of SAR (measured) = 2.06 W/kg

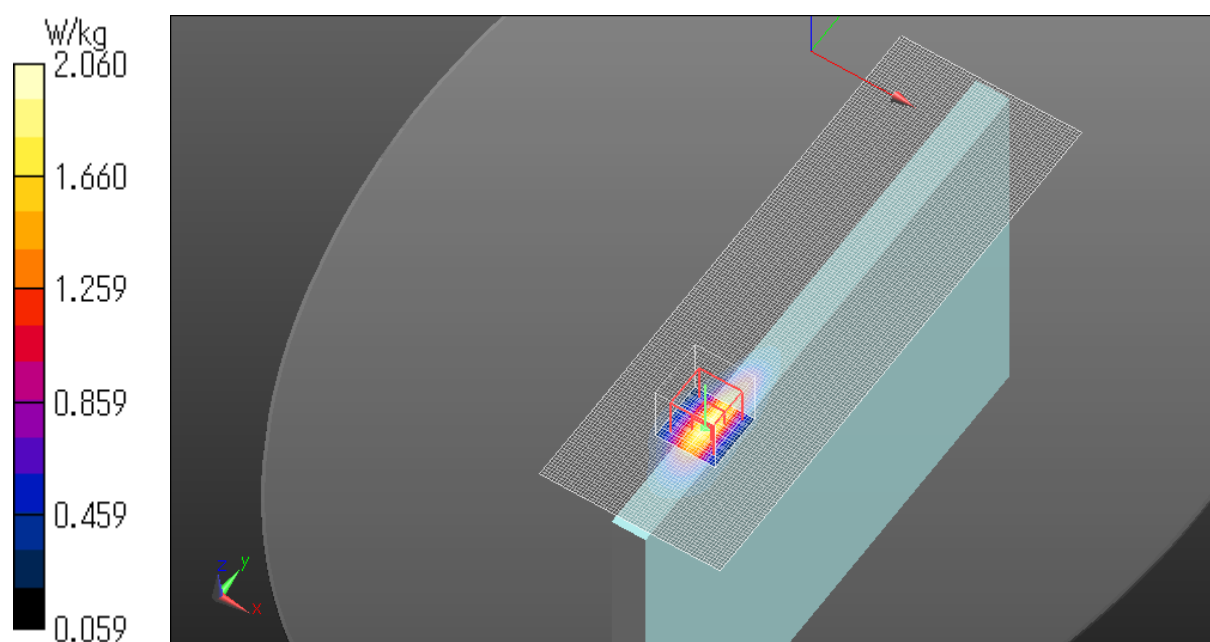

Plot No.1

WCDMA Band5 RMC 12.2k 836.6MHz Edge1 0mm Power Reduction

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 56.589$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x181x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.82 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 47.91 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.604 W/kg

Maximum value of SAR (measured) = 2.03 W/kg

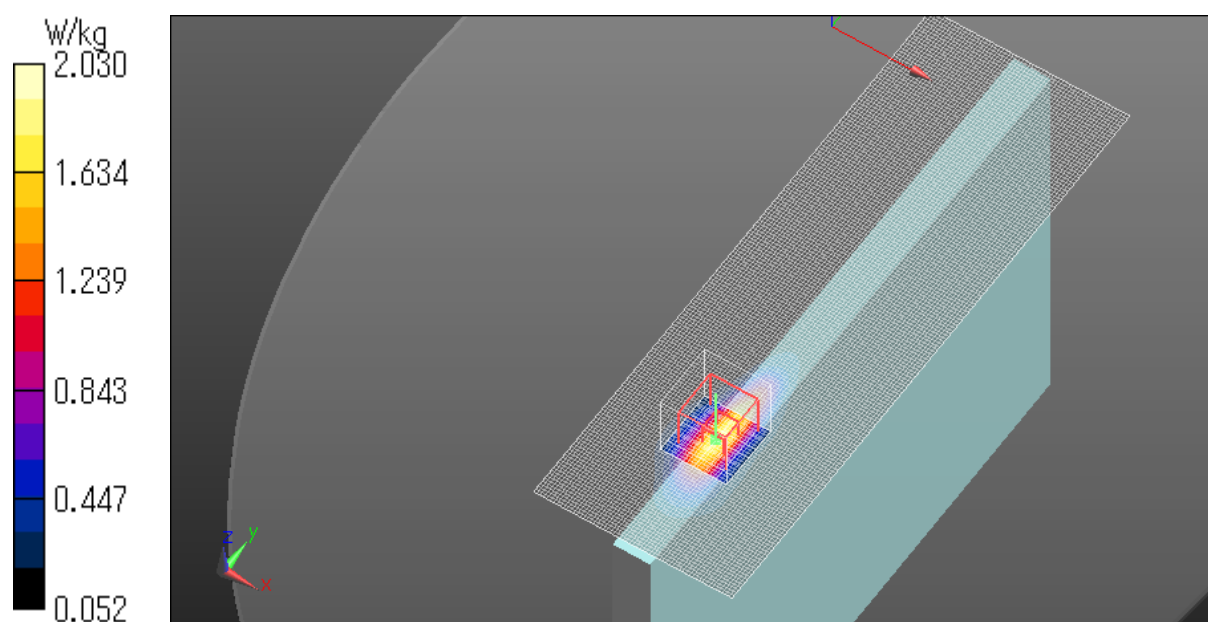

WCDMA Band5 RMC 12.2k 846.6MHz Edge1 0mm Power Reduction

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 56.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x181x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.80 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 47.42 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.598 W/kg

Maximum value of SAR (measured) = 2.02 W/kg

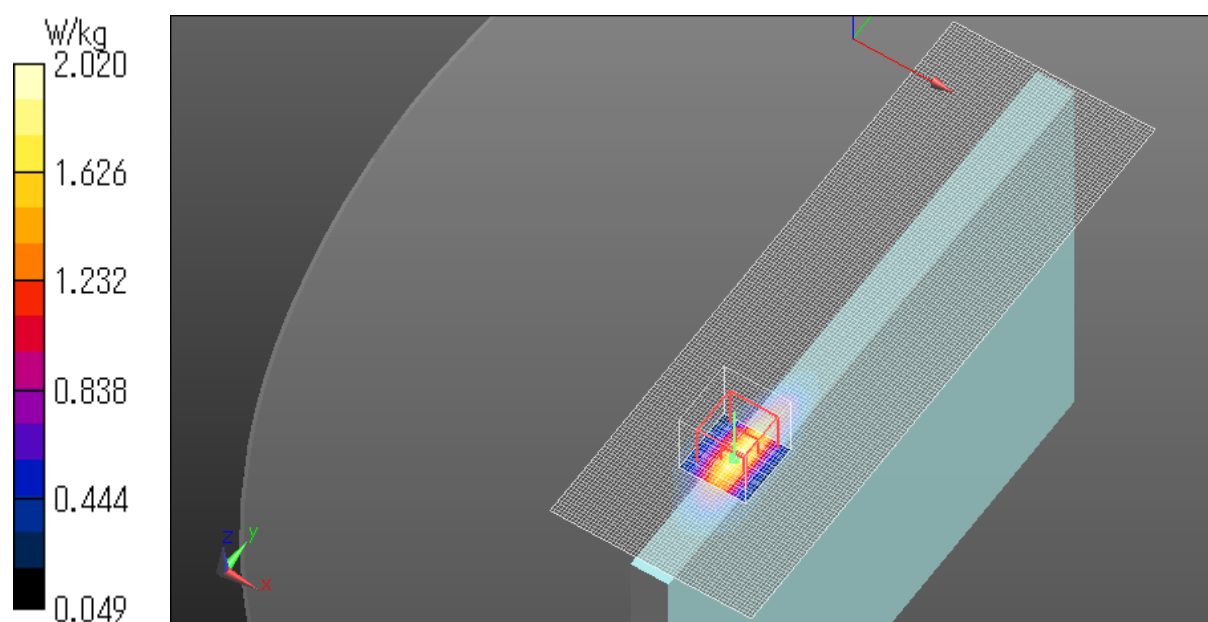

WCDMA Band5 RMC 12.2k 826.4MHz Bottom side 0mm Power Reduction

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 56.686$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.16 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 40.07 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.995 W/kg; SAR(10 g) = 0.550 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

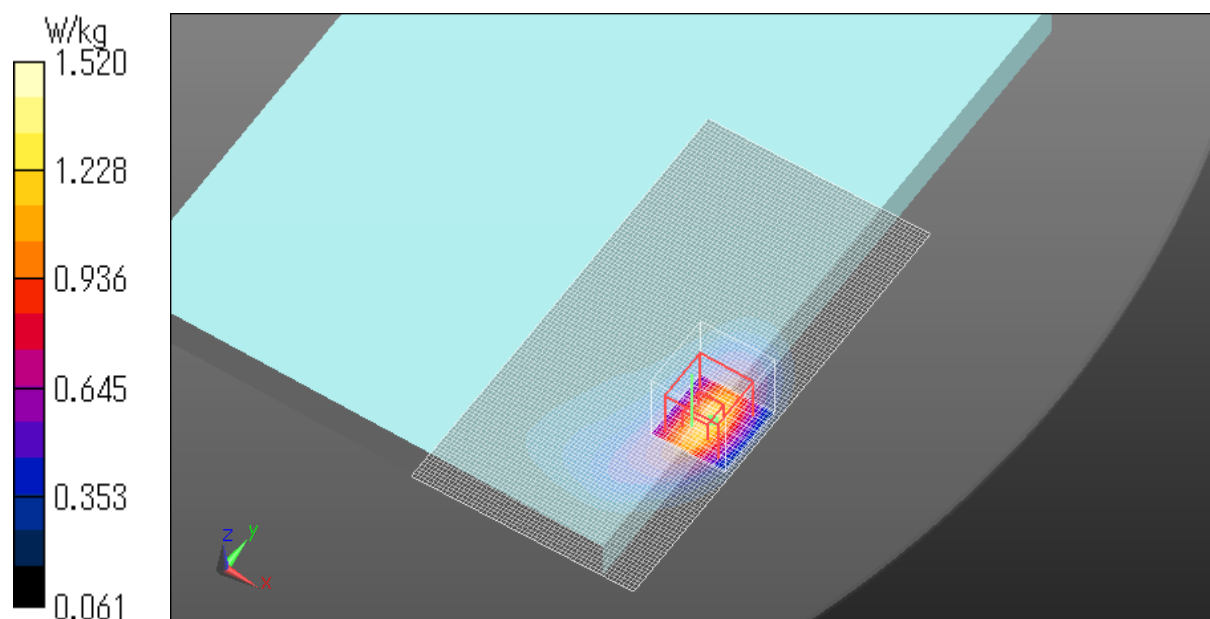

WCDMA Band5 RMC 12.2k 836.6MHz Bottom side 0mm Power Reduction

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 56.589$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.14 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 38.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.528 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

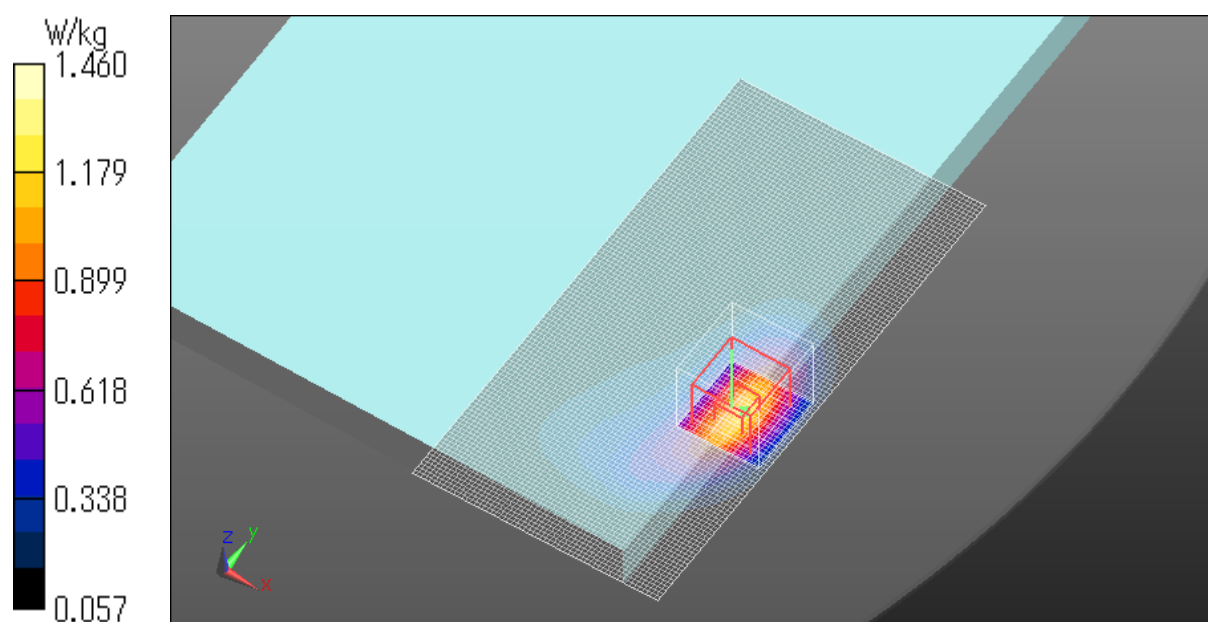

WCDMA Band5 RMC 12.2k 846.6MHz Bottom side 0mm Power Reduction

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 56.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.10 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 38.16 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.504 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

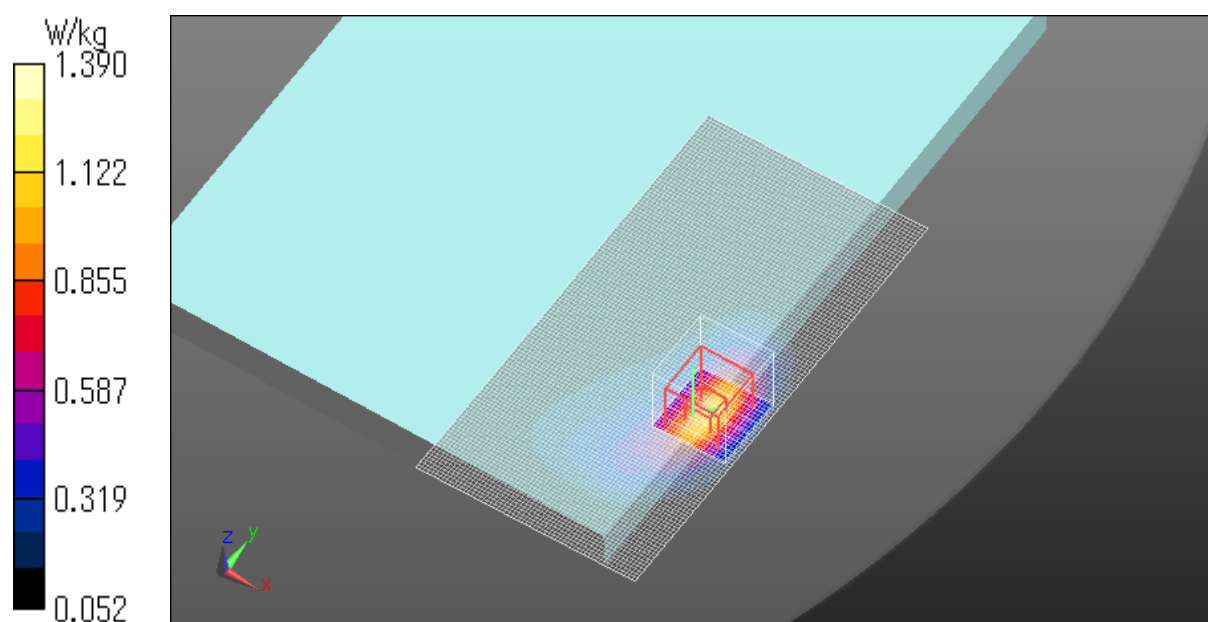

WCDMA Band5 RMC 12.2k 836.6MHz Edge1 23mm

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 56.589$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.361 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.67 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

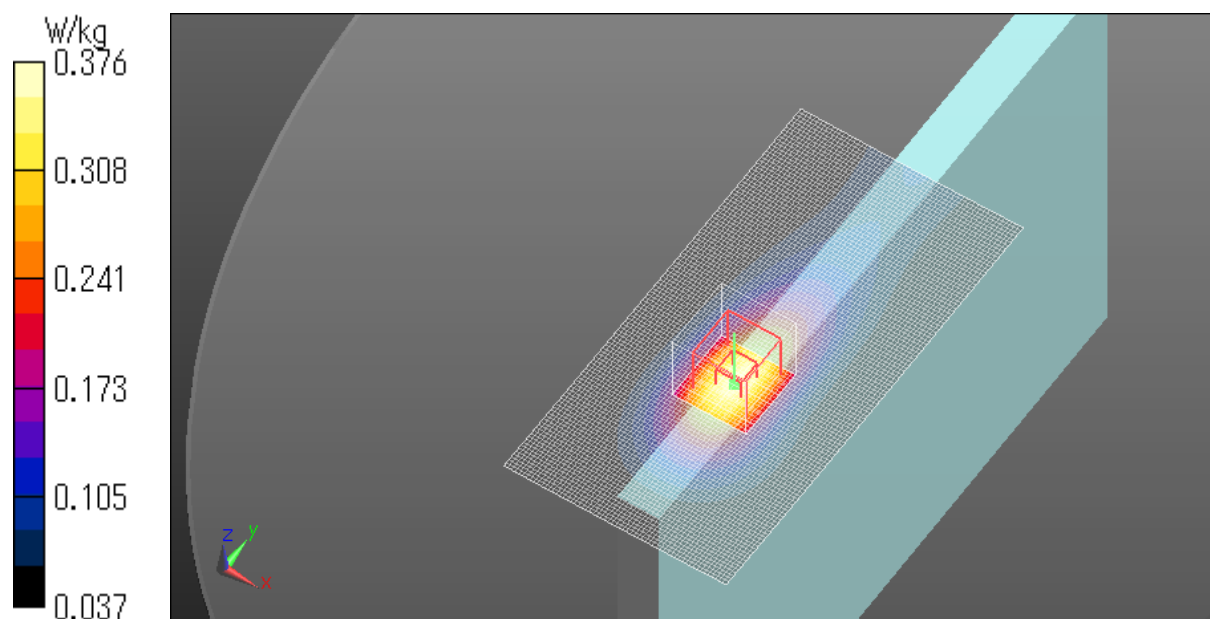

WCDMA Band5 RMC 12.2k 836.6MHz Edge4 0mm

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 56.589$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.357 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.72 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

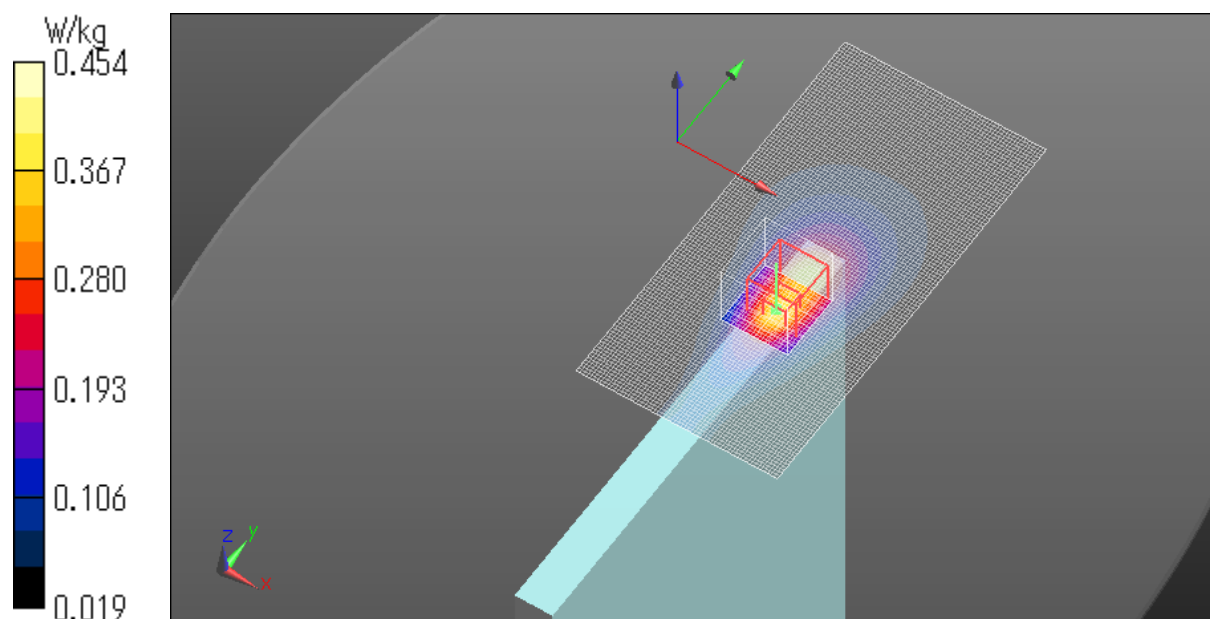

WCDMA Band5 RMC 12.2k 836.6MHz Bottom side 17mm

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 56.589$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.475 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.29 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.526 W/kg

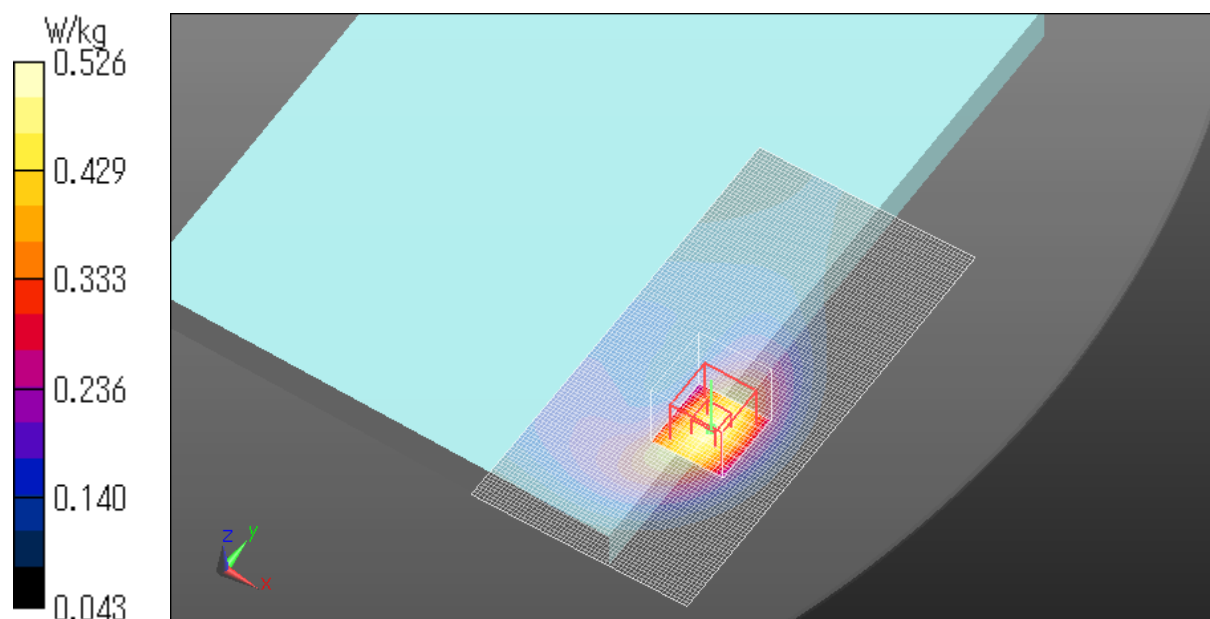

WCDMA Band5 RMC 12.2k 836.6MHz Bottom side Convertible mode 0mm

Communication System: UID 0, WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 56.589$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(9.49, 9.49, 9.49); Calibrated: 2014/12/16;

Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2015/07/07

Phantom: ELI v4.0 (20deg probe tilt); Type: QDOVA001BB; Serial: TP:1045

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.416 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.31 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.486 W/kg

