

17.9 SAR test plots for LTE Band 13


LTE Band13 Edge1 convertible 0mm QPSK 782MHz Allocation1 Start0 power reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)
DASYS5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.964 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 34.66 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.348 W/kg
Maximum value of SAR (measured) = 0.970 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

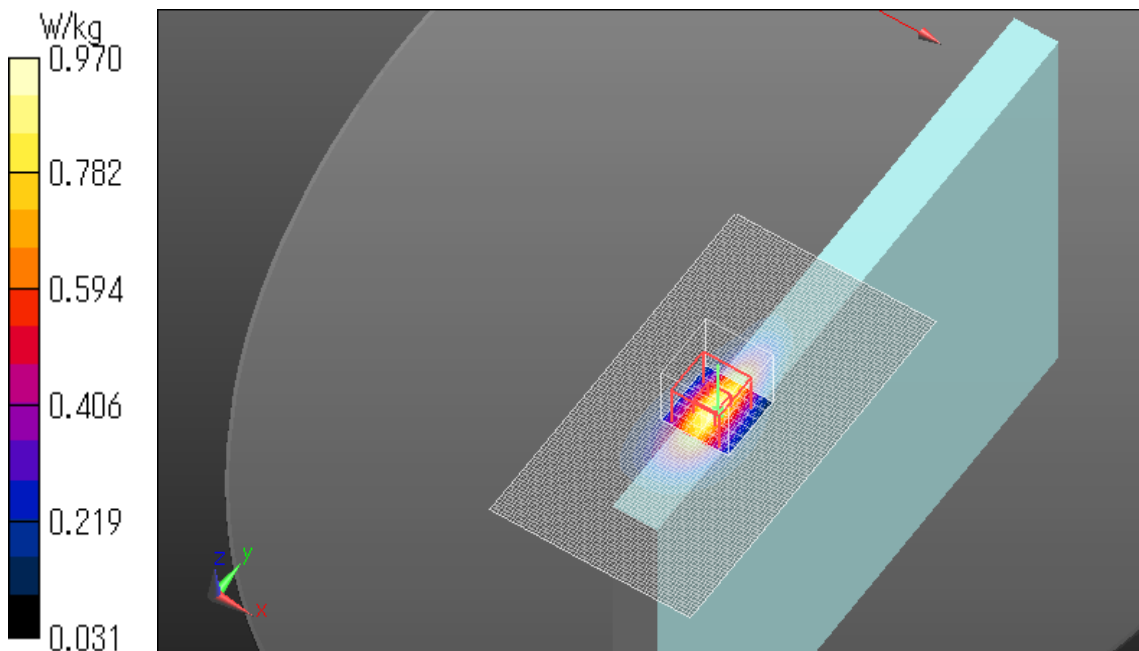


LTE Band13 Edge1 convertible 0mm QPSK 782MHz Allocation25 Start0 power reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.01 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 35.52 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.39 W/kg
SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.360 W/kg
Maximum value of SAR (measured) = 1.01 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

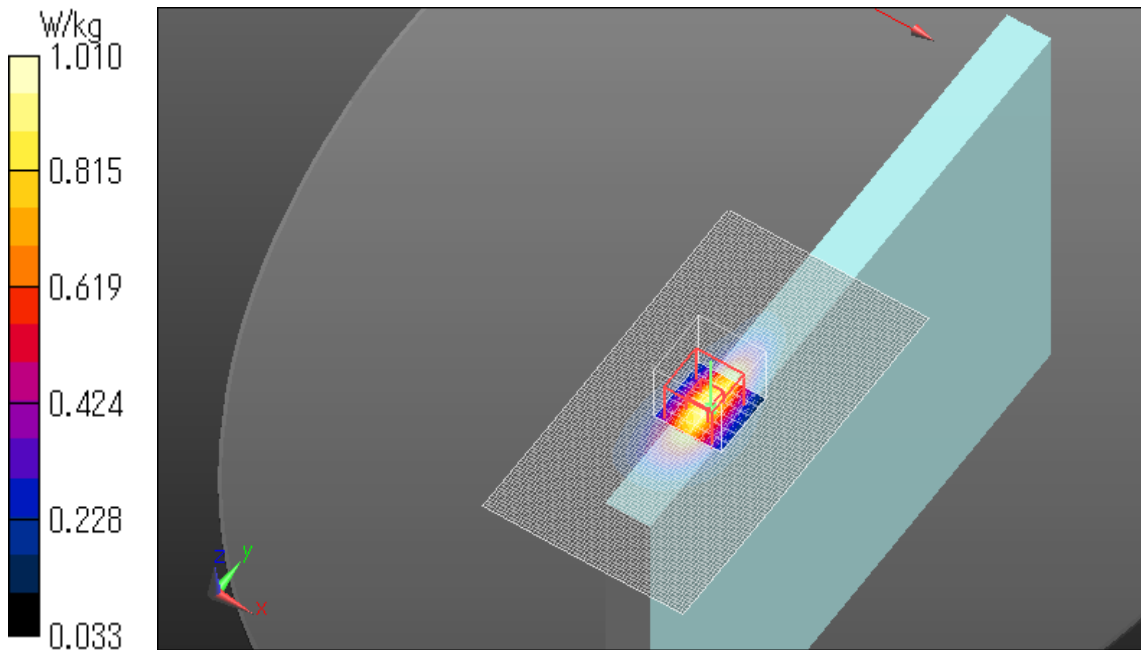


LTE Band13 Rear 0mm QPSK 782MHz Allocation1 Start0 power reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.797 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 31.99 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.351 W/kg
Maximum value of SAR (measured) = 0.833 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

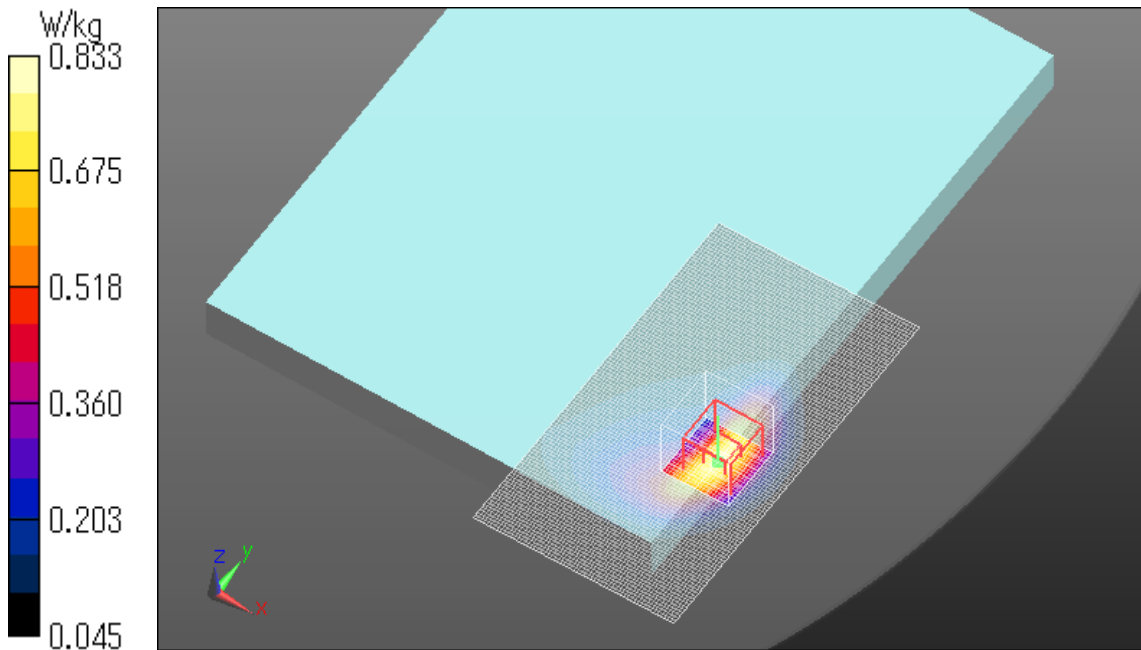


LTE Band13 Rear 0mm QPSK 782MHz Allocation25 Start0 power reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.778 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 31.43 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.335 W/kg
Maximum value of SAR (measured) = 0.801 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

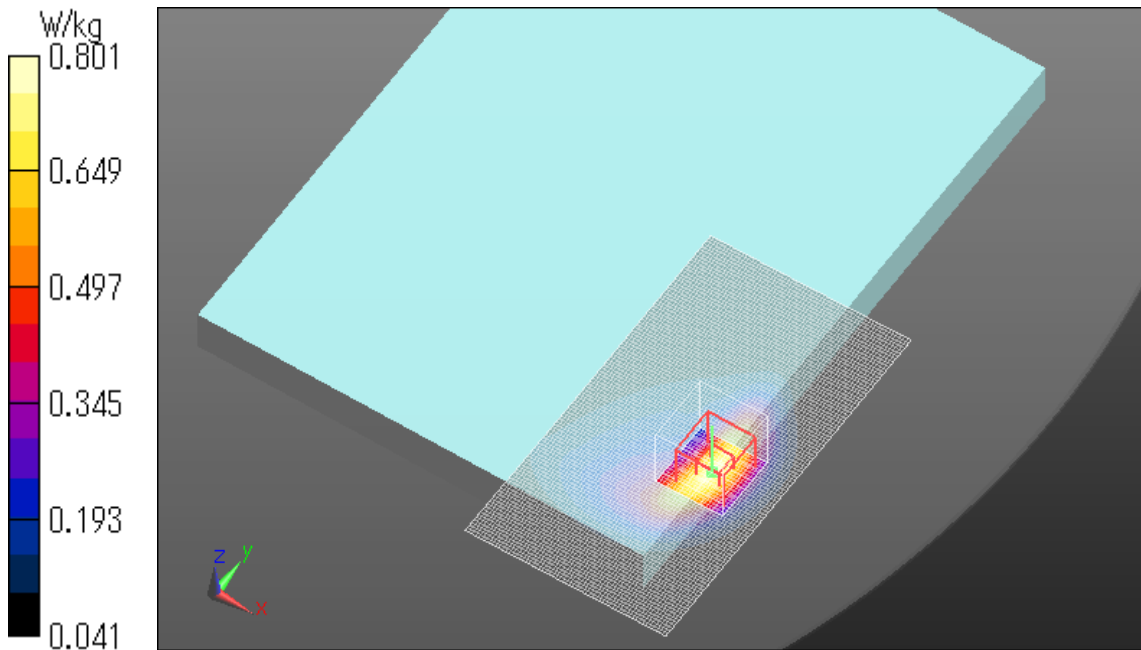


LTE Band13 Edge1 convertible 24mm QPSK 782MHz Allocation1 Start0

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.222 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.21 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.253 W/kg
SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.128 W/kg
Maximum value of SAR (measured) = 0.224 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

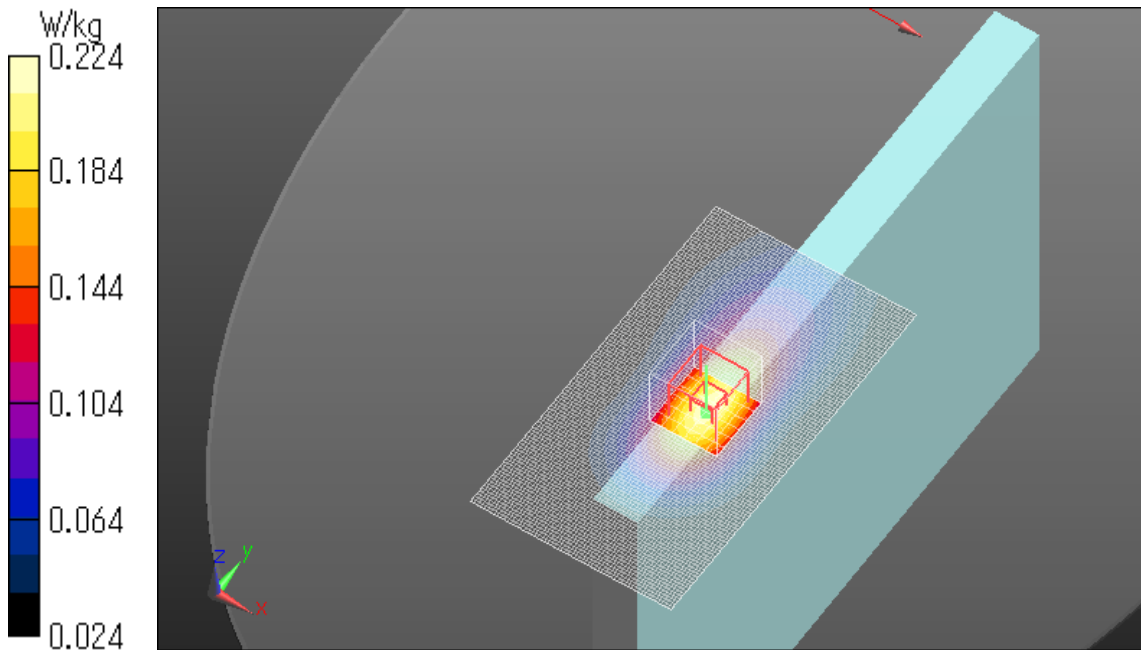


LTE Band13 Edge1 convertible 24mm QPSK 782MHz Allocation25 Start0

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.179 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.48 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.200 W/kg
SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.101 W/kg
Maximum value of SAR (measured) = 0.177 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

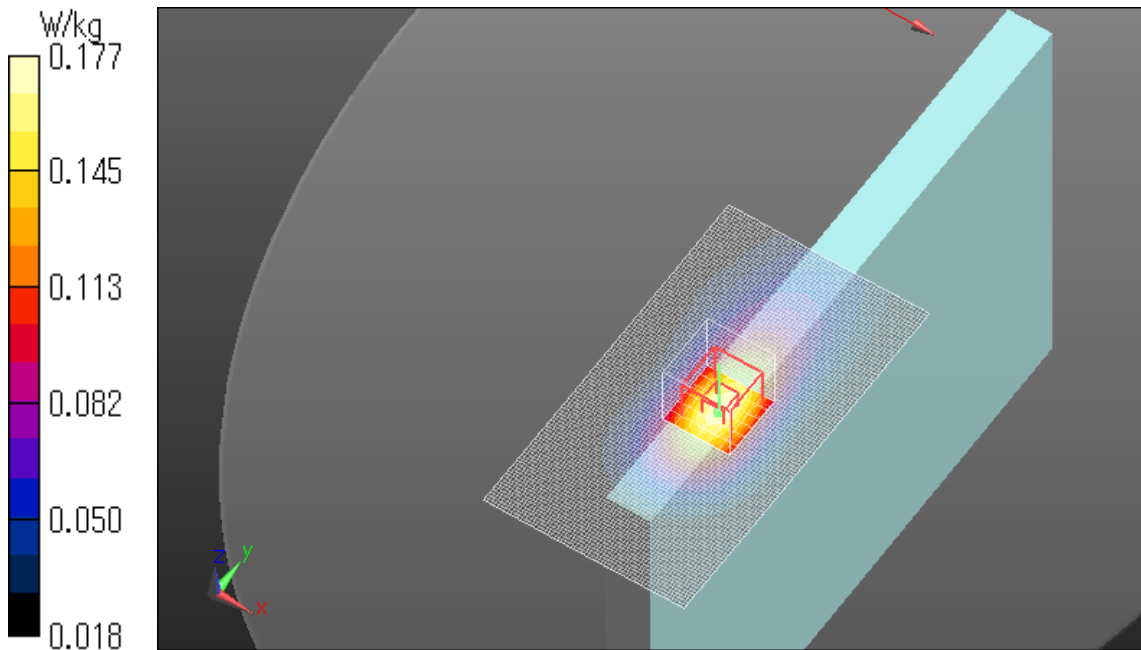


LTE Band13 Edge4 0mm QPSK 782MHz Allocation1 Start0

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.337 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 19.04 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.460 W/kg
SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.140 W/kg
Maximum value of SAR (measured) = 0.346 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

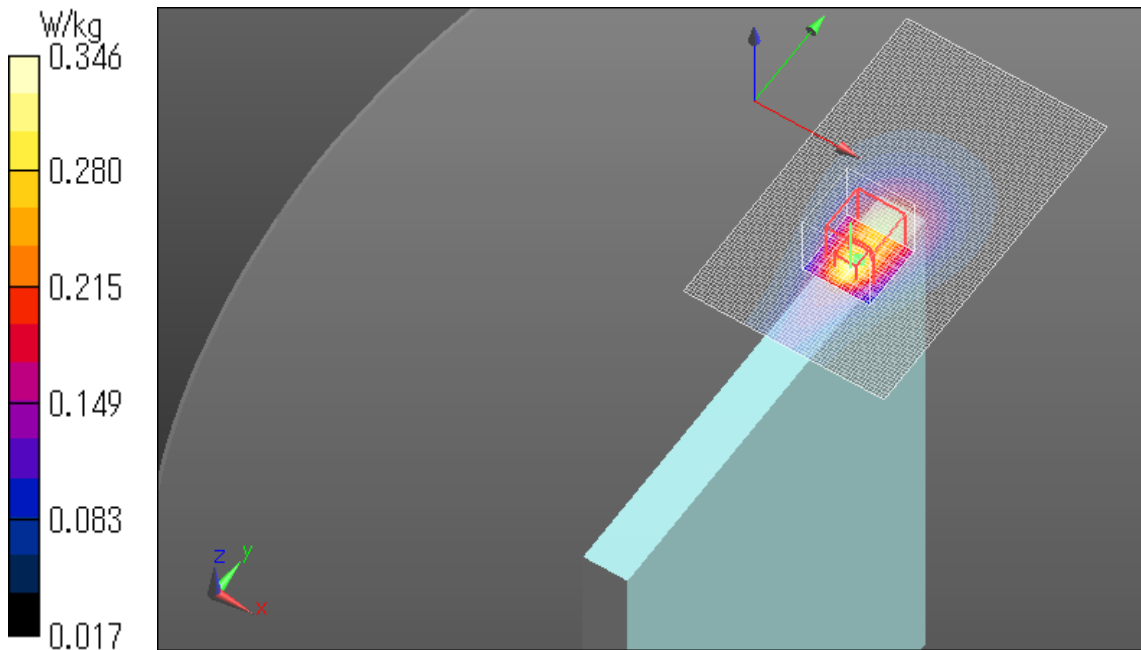


LTE Band13 Edge4 0mm QPSK 782MHz Allocation25 Start0

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.321 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.52 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.435 W/kg
SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.133 W/kg
Maximum value of SAR (measured) = 0.325 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

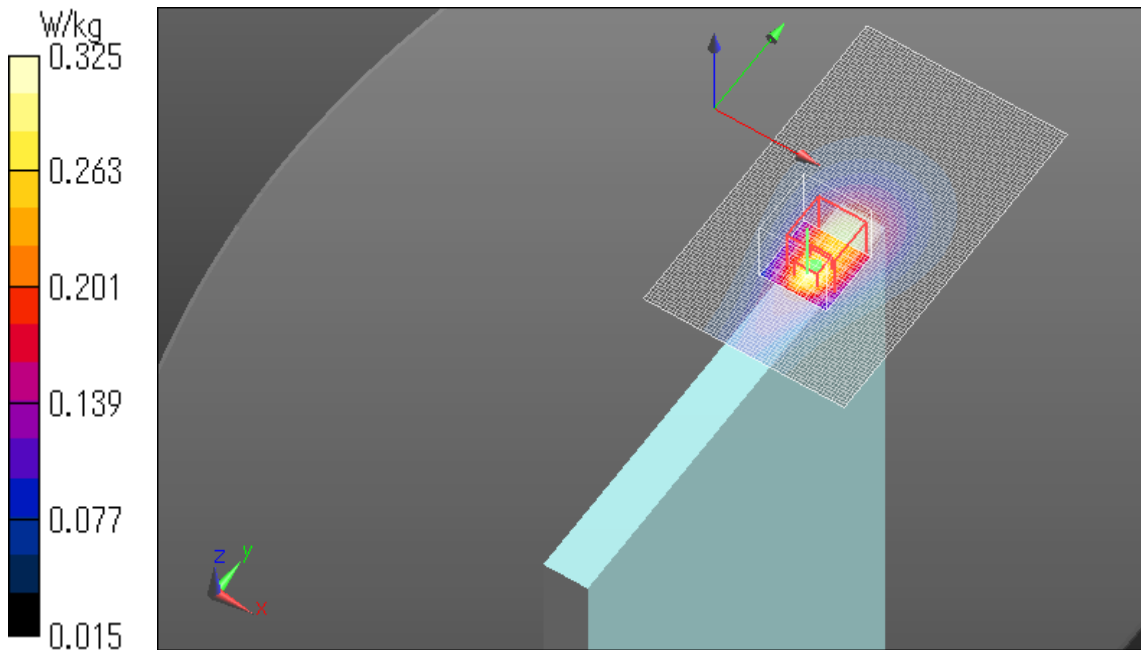


LTE Band13 Rear 19mm QPSK 782MHz Allocation1 Start0

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13,
E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.292 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.68 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.345 W/kg
SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.171 W/kg
Maximum value of SAR (measured) = 0.300 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

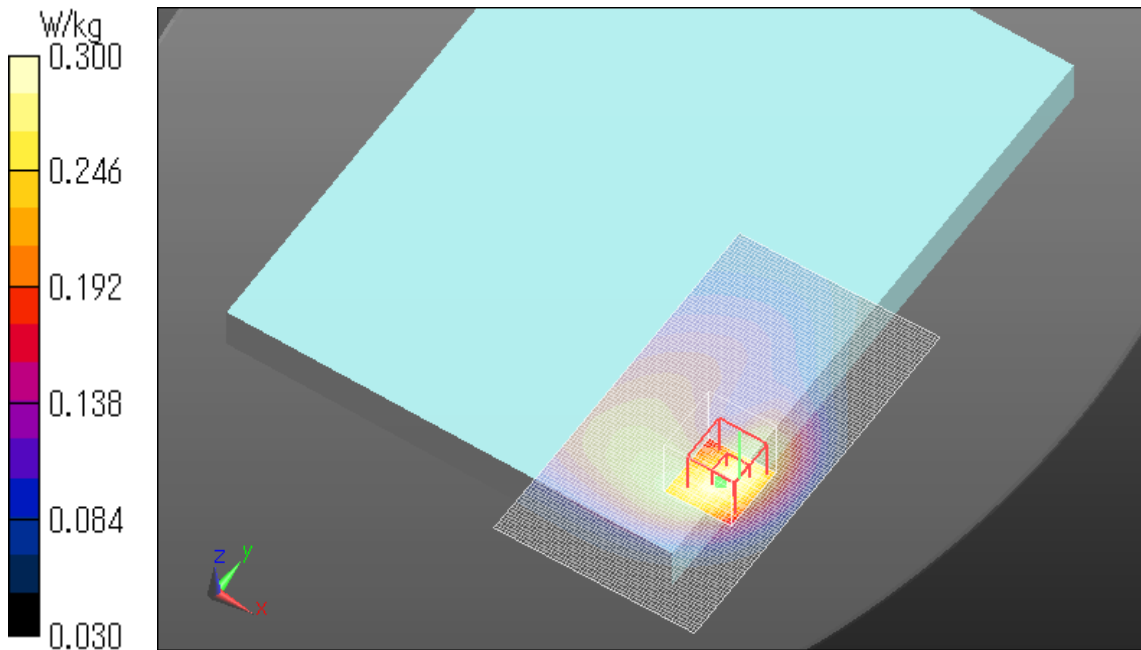

LTE Band13 Rear 19mm QPSK 782MHz Allocation25 Start0

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 13, E-UTRA/FDD (777.0 - 787.0 MHz); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.913$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.98, 9.98, 9.98); Calibrated: 2016/12/12;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2017/07/11
Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002BB; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.231 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.50 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.267 W/kg
SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.132 W/kg
Maximum value of SAR (measured) = 0.232 W/kg

Date: 2017/10/23
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

