

17.10 SAR test plots for LTE Band 25

LTE Band25 Edge1 0mm QPSK 1860MHz Allocation1 Start49 power reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 53.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1372; Calibrated: 2017/06/13

Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.762 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.13 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.740 W/kg

Date: 2017/10/26

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

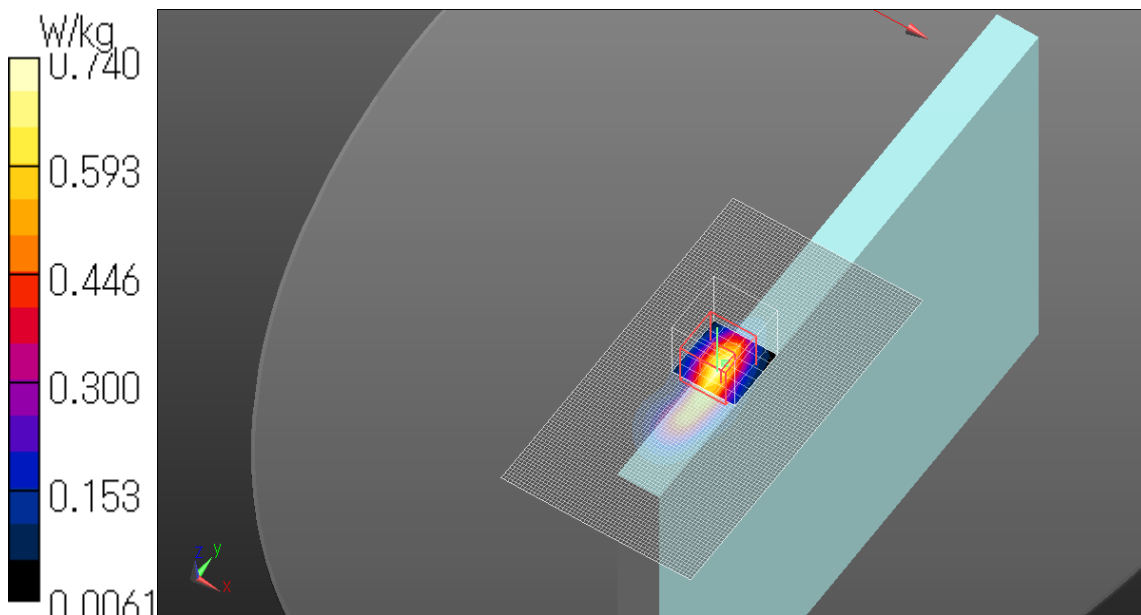

LTE Band25 Edge1 0mm QPSK 1860MHz Allocation50 Start49 power reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 53.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1372; Calibrated: 2017/06/13

Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.731 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.52 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.743 W/kg

Date: 2017/10/26

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

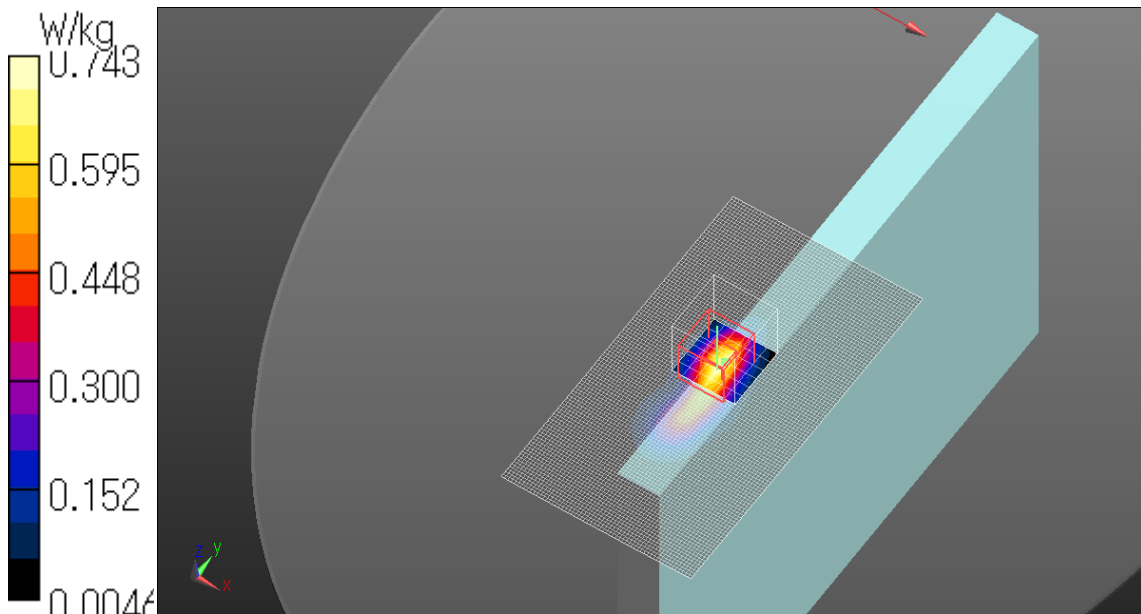


LTE Band25 Rear 0mm QPSK 1860MHz Allocation1 Start49 power reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 53.596$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.717 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 23.29 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.876 W/kg
SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.223 W/kg
Maximum value of SAR (measured) = 0.670 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

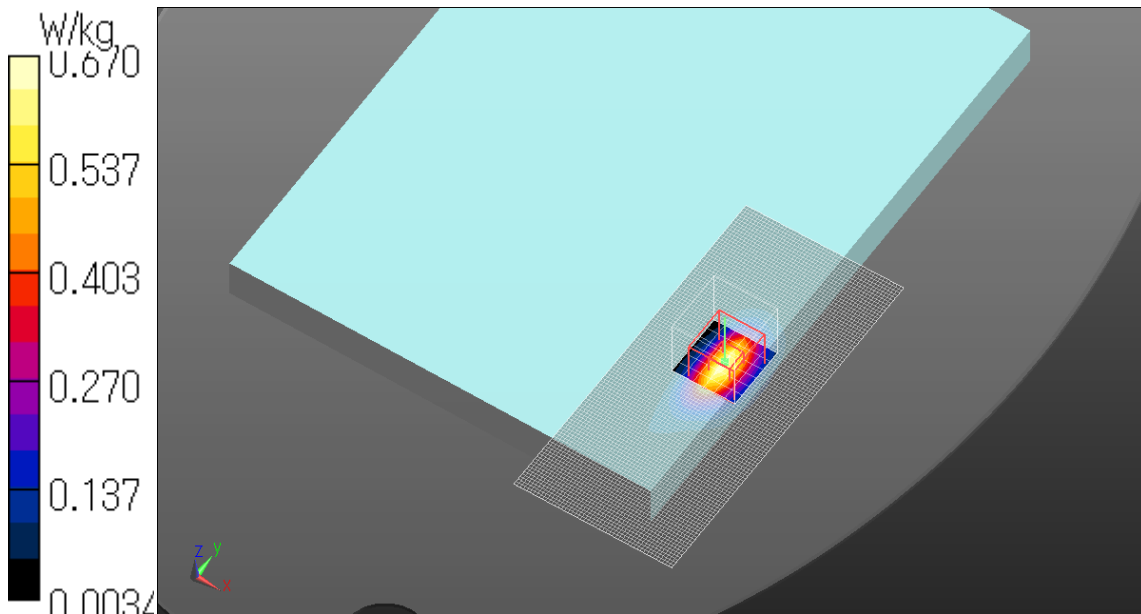


LTE Band25 Rear 0mm QPSK 1860MHz Allocation50 Start49 power reduction

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 53.596$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.793 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 24.22 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.945 W/kg
SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.241 W/kg
Maximum value of SAR (measured) = 0.728 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

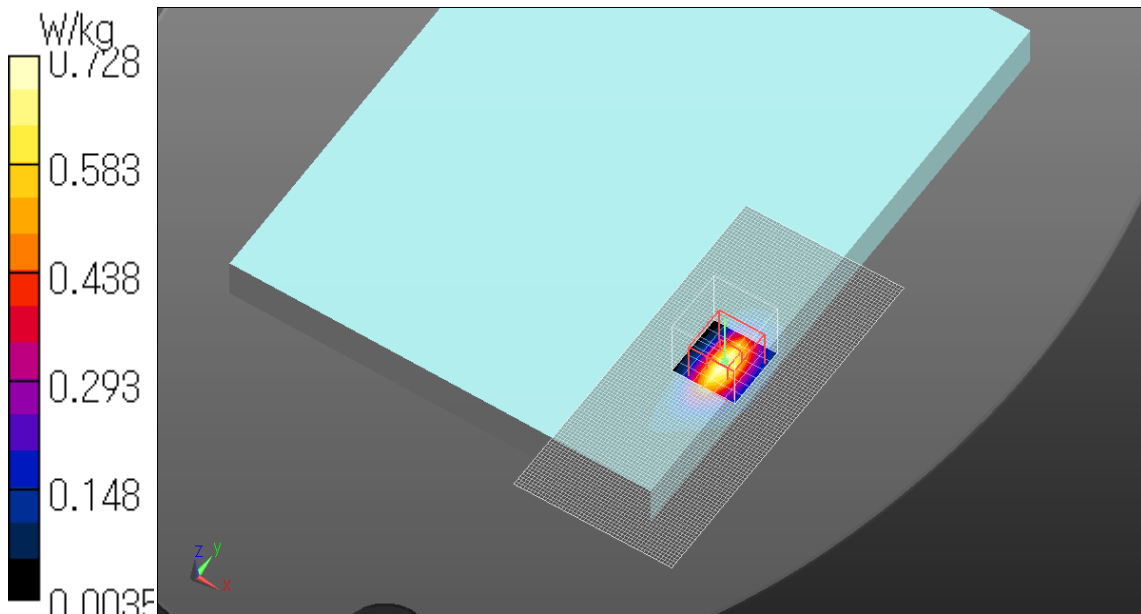


LTE Band25 Edge1 24mm QPSK 1860MHz Allocation1 Start49

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 53.596$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.925 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 26.85 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.441 W/kg
Maximum value of SAR (measured) = 0.907 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

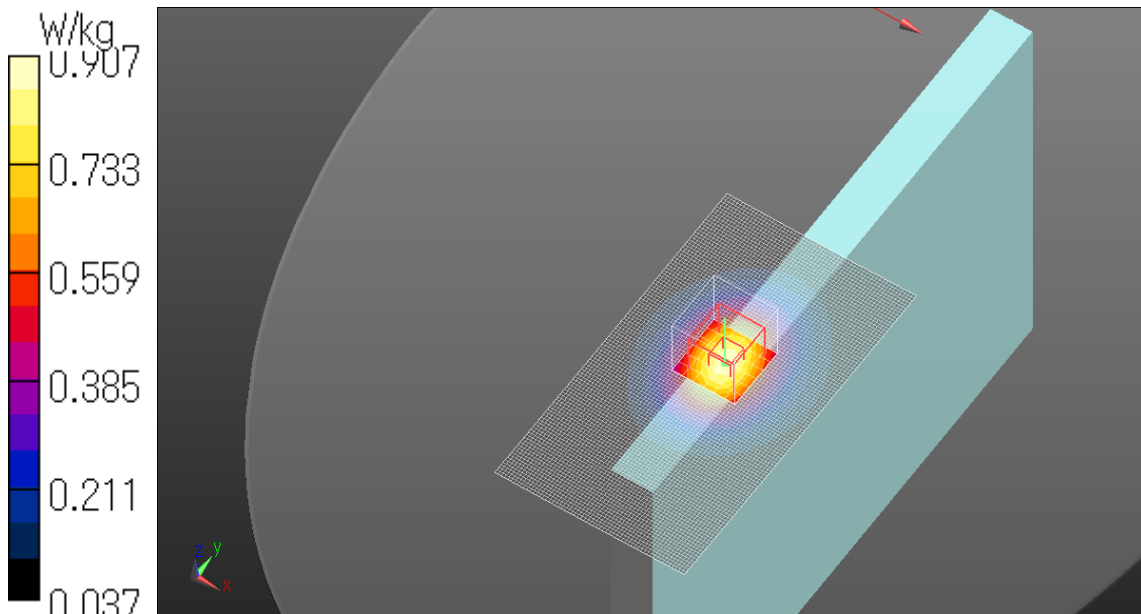


LTE Band25 Edge1 24mm QPSK 1882.5MHz Allocation1 Start99

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 53.487$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.04 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 28.11 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.492 W/kg
Maximum value of SAR (measured) = 1.03 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

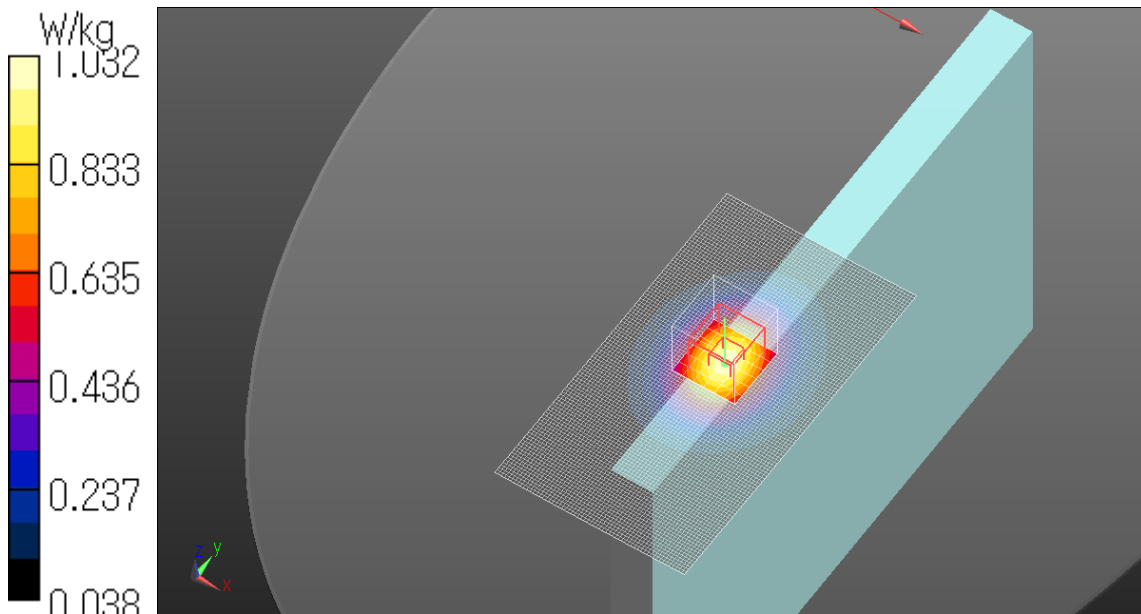


LTE Band25 Edge1 24mm QPSK 1905MHz Allocation1 Start0

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 53.405$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 28.86 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.30 W/kg
SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.521 W/kg
Maximum value of SAR (measured) = 1.09 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

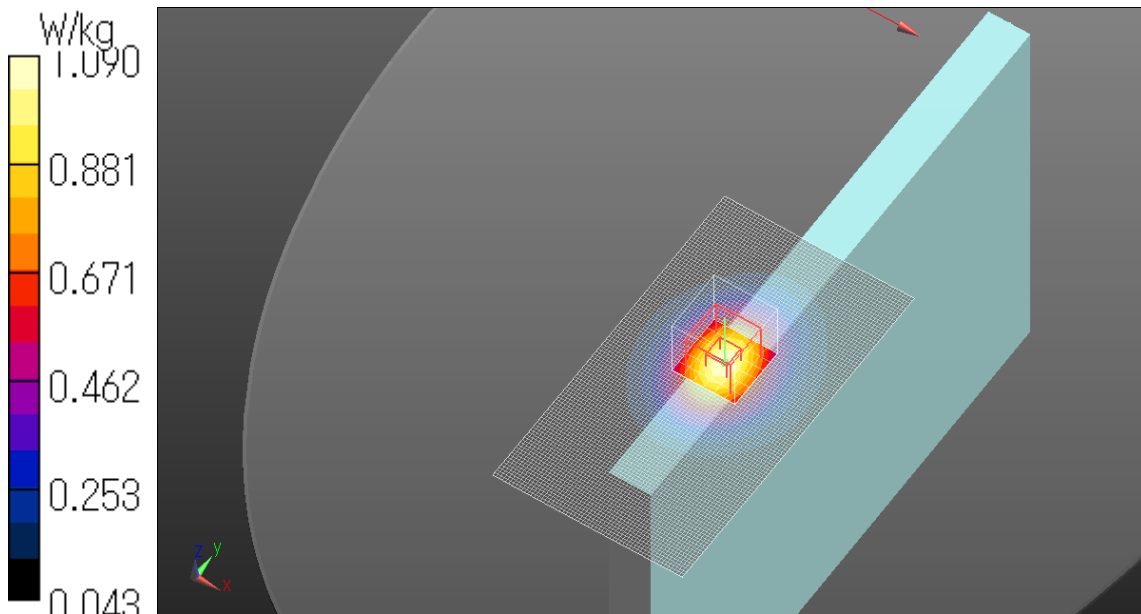


LTE Band25 Edge1 24mm QPSK 1860MHz Allocation50 Start49

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 53.596$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.756 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 24.18 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.883 W/kg
SAR(1 g) = 0.579 W/kg; SAR(10 g) = 0.359 W/kg
Maximum value of SAR (measured) = 0.746 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

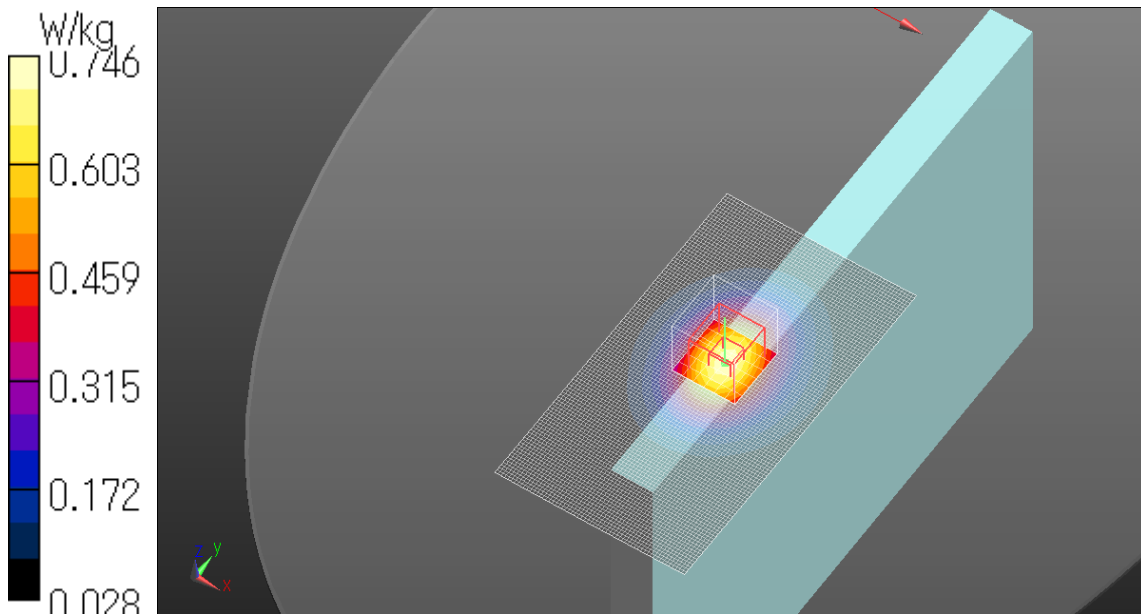


LTE Band25 Edge1 24mm QPSK 1882.5MHz Allocation50 Start49

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 53.487$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.840 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 25.39 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.986 W/kg
SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.396 W/kg
Maximum value of SAR (measured) = 0.831 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

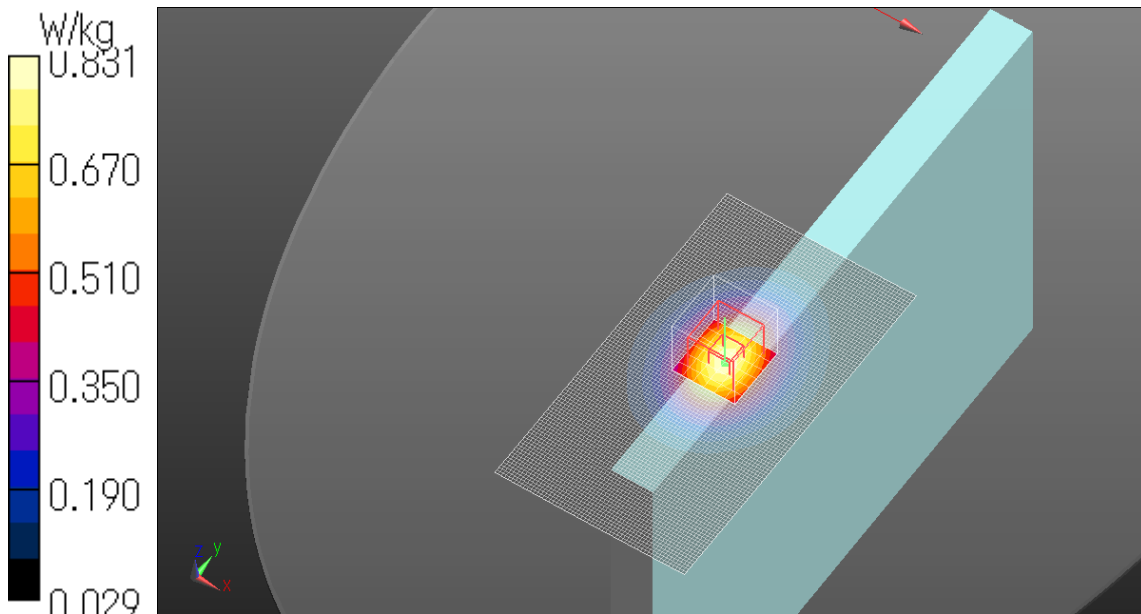


LTE Band25 Edge1 24mm QPSK 1905MHz Allocation50 Start24

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 53.405$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.930 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 26.53 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.434 W/kg
Maximum value of SAR (measured) = 0.915 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

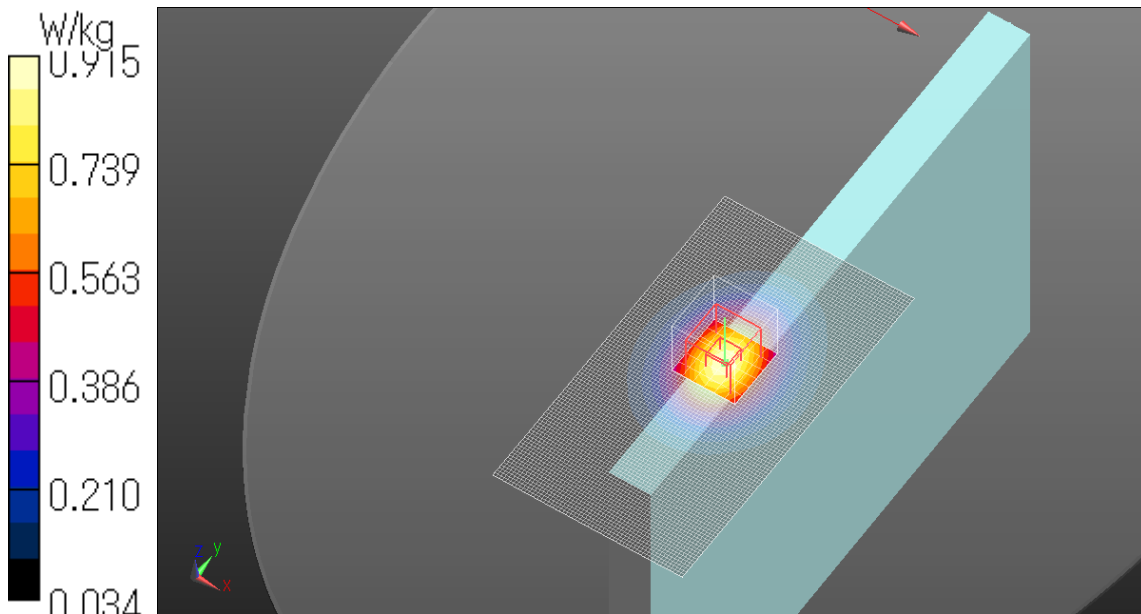


LTE Band25 Edge1 24mm QPSK 1905MHz Allocation100 Start0

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 53.405$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.908 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 26.12 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.425 W/kg
Maximum value of SAR (measured) = 0.898 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

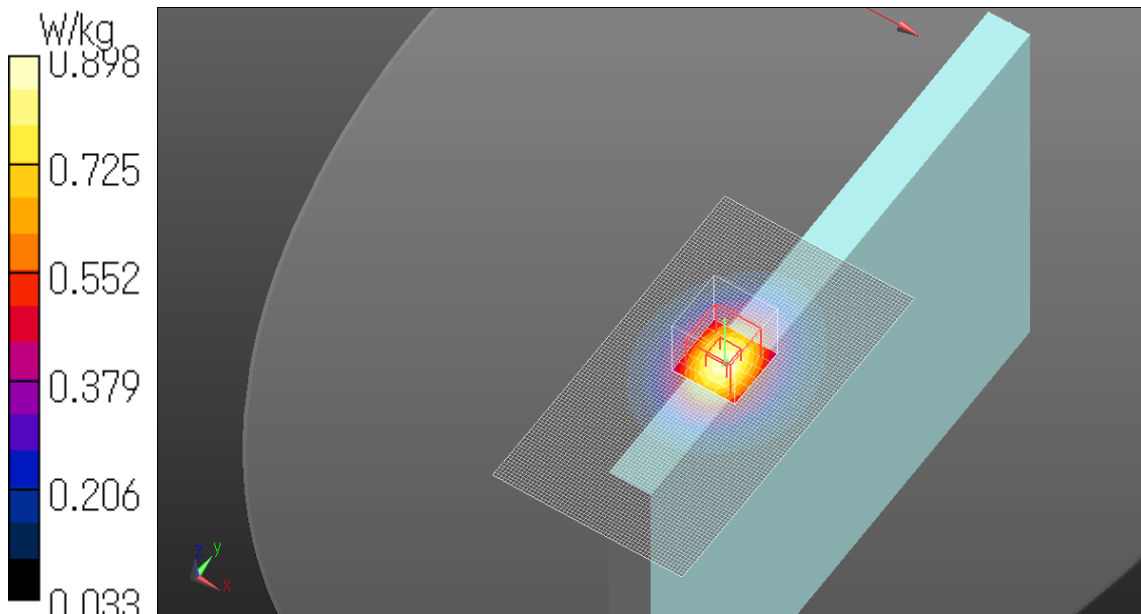


LTE Band25 Edge4 0mm QPSK 1882.5MHz Allocation1 Start99

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 53.487$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.231 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.57 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.299 W/kg
SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.085 W/kg
Maximum value of SAR (measured) = 0.233 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

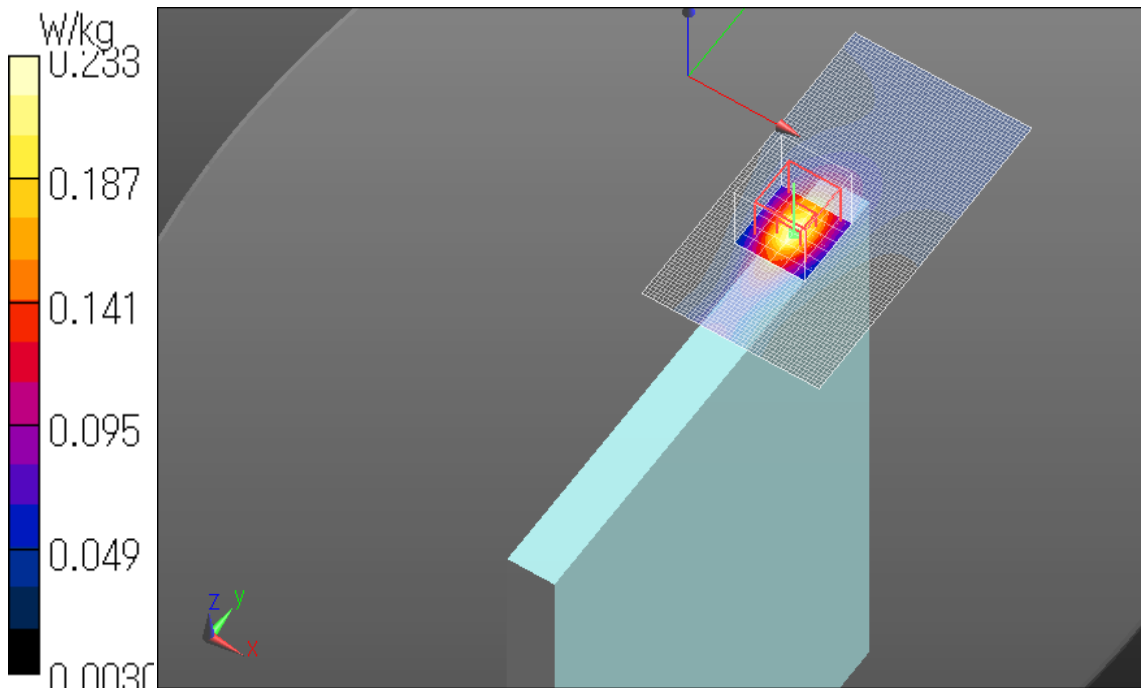


LTE Band25 Edge4 0mm QPSK 1905MHz Allocation50 Start24

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 53.405$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.201 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.73 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.263 W/kg
SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.075 W/kg
Maximum value of SAR (measured) = 0.206 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

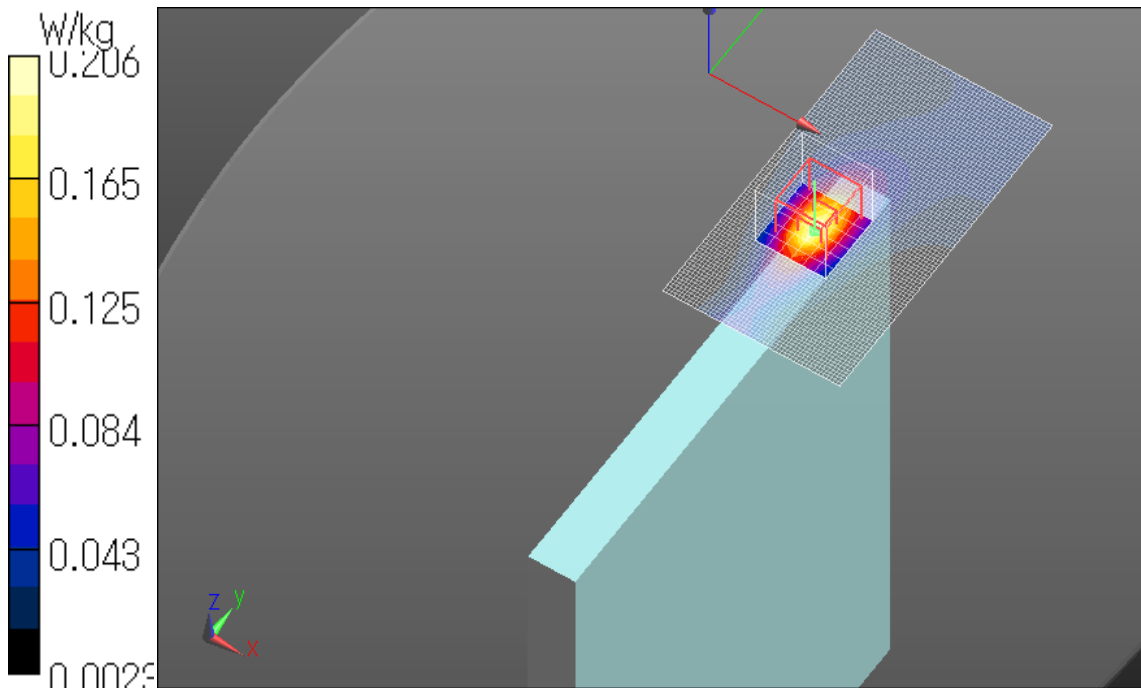


LTE Band25 Rear 19mm QPSK 1882.5MHz Allocation1 Start99

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 53.487$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.696 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 22.93 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.827 W/kg
SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.321 W/kg
Maximum value of SAR (measured) = 0.689 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

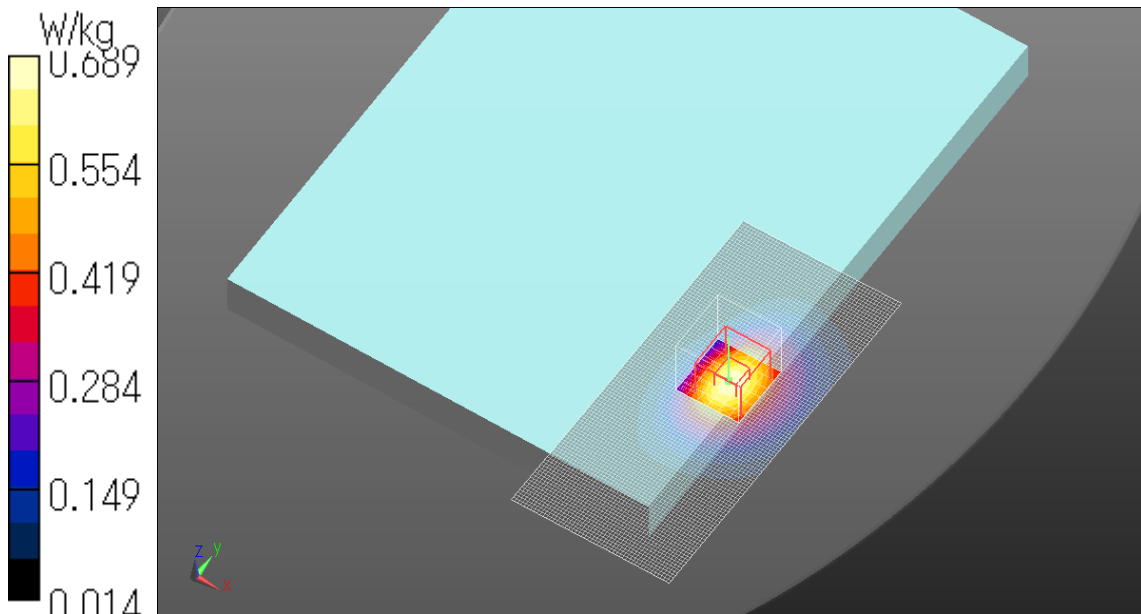

LTE Band25 Rear 19mm QPSK 1905MHz Allocation50 Start24

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 53.405$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN7372; ConvF(7.63, 7.63, 7.63); Calibrated: 2017/04/20;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1372; Calibrated: 2017/06/13
Phantom: ELI v5.0 TP1207 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:1207
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.637 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 21.48 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.746 W/kg
SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.287 W/kg
Maximum value of SAR (measured) = 0.618 W/kg

Date: 2017/10/26
Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

