

# TEST REPORT

FCC LTE B48 Test for WW18A(Tested inside of Panasonic PC CF-33)  
Class II Permissive Change

**APPLICANT**

Panasonic Corporation of North America

**REPORT NO.**

HCT-RF-2012-FC004

**DATE OF ISSUE**

December 4, 2020

**Tested by**  
Jae Ryang Do



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**

*Soo Chan Lee*  
SooChan Lee / CEO

**HCT CO., LTD.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401



**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**TEST  
REPORT**

FCC LTE Test for  
WW18A (Tested  
inside of  
Panasonic PC CF-  
33)

REPORT NO.  
HCT-RF-2012-FC004

DATE OF ISSUE  
December 04, 2020

Additional Model  
-

**Applicant**      **Panasonic Corporation of North America**  
Two Riverfront Plaza, 9th Floor, Newark, NJ 07102-5490, USA

**Eut Type**      Multi-Band Radio Module  
**Model Name**      WW18A (Tested inside of Panasonic PC CF-33)

**FCC ID:**      ACJ9TGWW18A

**FCC Rule Part(s):**      96, § 2

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 04, 2020	Initial Release

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO	11
3.5 OCCUPIED BANDWIDTH.	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 CHANNEL EDGE	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 End User Device Additional Requirement (CBSD Protocol)	18
3.10 WORST CASE(RADIATED TEST)	19
3.11 WORST CASE(CONDUCTED TEST)	20
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	25
8. TEST DATA	27
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	27
8.2 RADIATED SPURIOUS EMISSIONS	29
8.3 PEAK-TO-AVERAGE RATIO	33
8.4 OCCUPIED BANDWIDTH	34
8.5 CONDUCTED SPURIOUS EMISSIONS	35
8.6 CHANNEL EDGE	36
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	38
8.8 End User Device Additional Requirements (CBSD Protocol)	50
9. TEST PLOTS	54
10 ANNEX A_ TEST SETUP PHOTO	147

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

Applicant Name:	Panasonic Corporation of North America
Address:	Two Riverfront Plaza, 9th Floor, Newark, NJ 07102-5490, USA
FCC ID:	ACJ9TGWW18A
Application Type:	Class II Permissive Change
FCC Rule Part(s):	§ 96, § 2
EUT Type:	Multi-Band Radio Module
Model(s):	WW18A(Tested inside of Panasonic PC CF-33)
Tx Frequency:	3552.5 – 3697.5 : 5 MHz 3555.0 – 3695.0 : 10 MHz 3557.5 – 3692.5 : 15 MHz 3560.0 – 3690.0 : 20 MHz
Date(s) of Tests:	October 28, 2020 ~ December 03, 2020

### 1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm/10MHz)
LTE - Band 48 (5)	3552.5 - 3697.5	4M51G7D	QPSK	0.093	19.70
		4M47W7D	16QAM	0.091	19.61
		4M47W7D	64QAM	0.090	19.55
LTE - Band 48 (10)	3555.0 - 3695.0	8M93G7D	QPSK	0.096	19.84
		8M96W7D	16QAM	0.094	19.74
		8M99W7D	64QAM	0.093	19.69
LTE - Band 48 (15)	3557.5 - 3692.5	13M4G7D	QPSK	0.098	19.91
		13M4W7D	16QAM	0.096	19.81
		13M4W7D	64QAM	0.082	19.13
LTE - Band 48 (20)	3560.0 - 3690.0	17M9G7D	QPSK	0.099	19.96
		17M9W7D	16QAM	0.098	19.89
		17M9W7D	64QAM	0.080	19.04

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Multi-Band Radio Module with LTE.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4 - KDB 940660 D01 v01
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 - KDB 940660 D01 v01
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 - KDB 940660 D01 v01
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - KDB 940660 D01 v01
Frequency stability	- ANSI C63.26-2015 – Section 5.6 - KDB 940660 D01 v01
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17 - KDB 940660 D01 v01
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12 - KDB 940660 D01 v01
End User Device Additional Requirement (CBSD Protocol)	- KDB 940660 D01 v01 - WINNF-TS-0122 V1.0.0



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was set equal to 10MHz.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and NormalHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

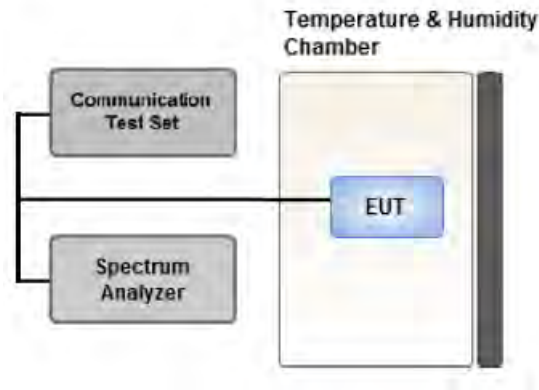

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ . Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### Test Settings(Average Power)

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.


#### 5. Sweep time:

Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep

(automation-compatible) measurement. The transmission period is the (on + off) time.

6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

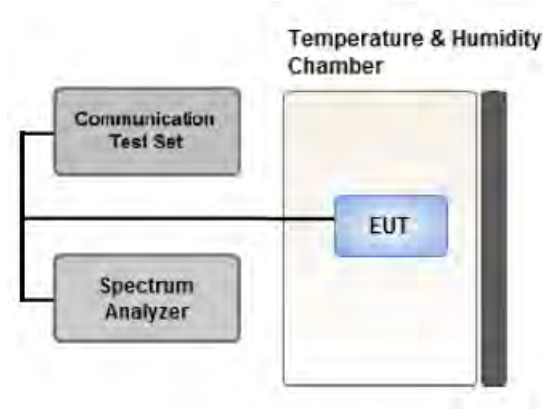

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

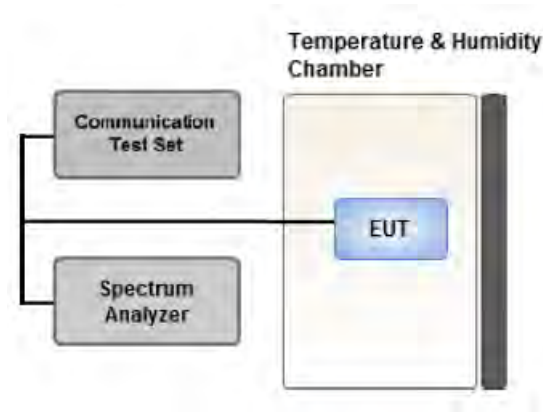

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

**Test Notes**


1. Duty Cycle factor already applied on the factor.

- Duty Cycle factor(dB) = 3.979
- Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
- Result(dBm) = Reading + Factor

2. Factor(dB)

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.249
1 – 5	31.955
5 – 10	32.570
10 – 15	33.095
15 – 20	33.468
20 – 26.5	34.110
26.5 – 37.0	29.249

### 3.7 CHANNEL EDGE

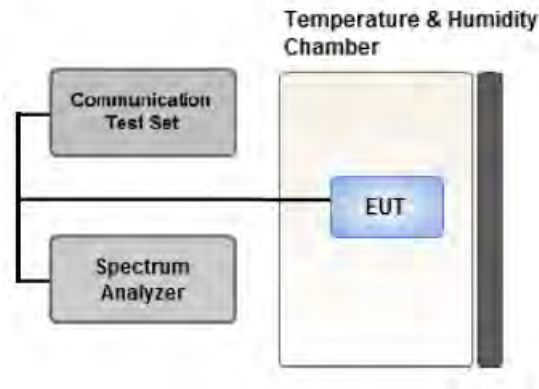

Test setup

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2% of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes


fundamental emission (whether in or outside of the authorized band) shall not exceed  $-13 \text{ dBm/MHz}$  within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge.

At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed  $-25 \text{ dBm/MHz}$ .

The conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed  $-25 \text{ dBm/MHz}$ , and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed  $-40 \text{ dBm/MHz}$ .



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

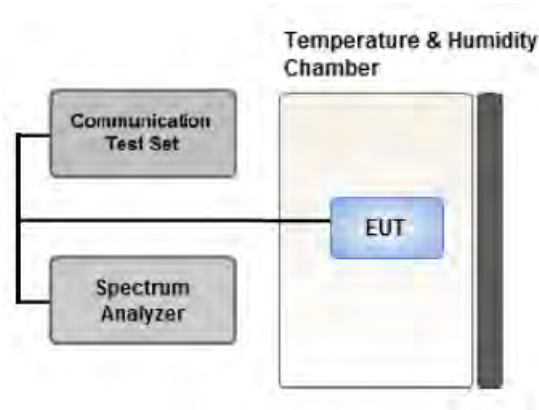

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:


- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 End User Device Additional Requirement (CBSD Protocol)

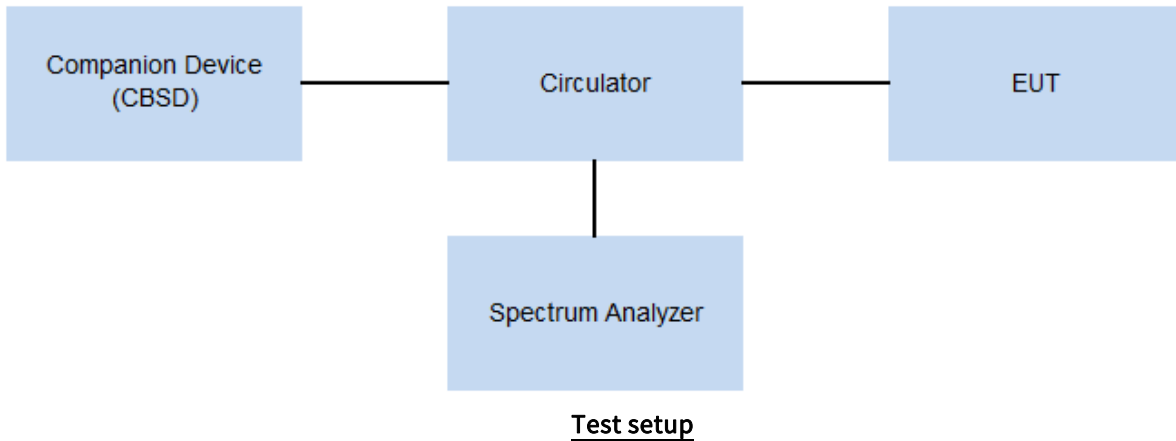

#### Test Overview

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (FCC ID: 2AS48SC-220) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

#### Test Settings

- a. Setup companion device with 3570MHz & 3610MHz.
- b. Enable AP service from companion device.
- c. EUT is connected to a companion device.
- c. Check EUT Tx frequency and power.
- d. Disable AP service from companion device and check EUT stop transmission within 10s.

### 3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM,	1	0	Y
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

### 3.11 WORST CASE(CONDUCTED TEST)

- Worst case : All mod of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM	5, 10, 15, 20	Mid	Full RB	0
Channel Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		5, 10, 15, 20	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93008124	03/18/2020	Annual	03/18/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2020	Annual	10/14/2021
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/26/2020	Annual	08/26/2021
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/12/2019	Biennial	03/12/2021
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
NOVA MICROWAVE	0380CEN/ CIRCULATOR	1436	10/06/2020	Annual	10/06/2021
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 96.41(e)	<ul style="list-style-type: none"> <li>■ -13 dBm/MHz at frequencies within 0-[B]MHz of channel edge</li> <li>■ -25 dBm/MHz at frequencies greater than [B]MHz above and below channel edge</li> <li>■ -25 dBm/MHz at frequencies below 3540 MHz and above 3710 MHz</li> <li>■ -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz</li> </ul>	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055,	Emission must remain in band	PASS
End User Device Additional Requirements (CBSD Protocol)	§ 96.47	<p>End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.</p> <p>An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.</p>	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC
3. The EUT is an End User Device



6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 96.41(b)	23 dBm/10MHz	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 96.41(e)	-40 dBm/MHz	PASS



## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW  
GSM BW = 249 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W  
GSM BW = 249 kHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W  
WCDMA BW = 4.17 MHz  
F = Frequency Modulation  
9 = Composite Digital Info  
W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D  
LTE BW = 4.48 MHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit
								dBm/10MHz	
3552.5	LTE B48/ 5 MHz	QPSK	-25.57	10.77	11.70	2.77	V	19.70	23.0
		16-QAM	-25.66	10.68	11.70	2.77	V	19.61	
		64-QAM	-25.72	10.62	11.70	2.77	V	19.55	
3625.0		QPSK	-27.69	8.78	11.85	2.79	V	17.84	
		16-QAM	-27.74	8.73	11.85	2.79	V	17.79	
		64-QAM	-27.87	8.60	11.85	2.79	V	17.66	
3697.5		QPSK	-28.61	8.02	11.70	2.81	V	16.91	
		16-QAM	-28.73	7.90	11.70	2.81	V	16.79	
		64-QAM	-28.77	7.86	11.70	2.81	V	16.75	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit
								dBm/10MHz	
3555.0	LTE B48/ 10 MHz	QPSK	-25.48	10.89	11.72	2.77	V	19.84	23.0
		16-QAM	-25.58	10.79	11.72	2.77	V	19.74	
		64-QAM	-25.63	10.74	11.72	2.77	V	19.69	
3625.0		QPSK	-27.47	9.00	11.85	2.79	V	18.06	
		16-QAM	-27.68	8.79	11.85	2.79	V	17.85	
		64-QAM	-27.76	8.71	11.85	2.79	V	17.77	
3695.0		QPSK	-28.43	8.19	11.71	2.81	V	17.09	
		16-QAM	-28.51	8.11	11.71	2.81	V	17.01	
		64-QAM	-28.66	7.96	11.71	2.81	V	16.86	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit
								dBm/10MHz	
3557.5	LTE B48/ 15 MHz	QPSK	-25.46	10.94	11.74	2.77	V	19.91	23.0
		16-QAM	-25.56	10.84	11.74	2.77	V	19.81	
		64-QAM	-26.24	10.16	11.74	2.77	V	19.13	
3625.0		QPSK	-27.36	9.11	11.85	2.79	V	18.17	
		16-QAM	-27.41	9.06	11.85	2.79	V	18.12	
		64-QAM	-28.31	8.16	11.85	2.79	V	17.22	
3692.5		QPSK	-28.51	8.06	11.72	2.82	V	16.96	
		16-QAM	-28.57	8.00	11.72	2.82	V	16.90	
		64-QAM	-29.33	7.24	11.72	2.82	V	16.14	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit
								dBm/10MHz	
3560.0	LTE B48/ 20 MHz	QPSK	-25.41	10.99	11.74	2.77	V	19.96	23.0
		16-QAM	-25.48	10.92	11.74	2.77	V	19.89	
		64-QAM	-26.33	10.07	11.74	2.77	V	19.04	
3625.0		QPSK	-27.34	9.13	11.85	2.79	V	18.19	
		16-QAM	-27.39	9.08	11.85	2.79	V	18.14	
		64-QAM	-28.22	8.25	11.85	2.79	V	17.31	
3690.0		QPSK	-28.43	8.14	11.72	2.82	V	17.04	
		16-QAM	-28.52	8.05	11.72	2.82	V	16.95	
		64-QAM	-29.33	7.24	11.72	2.82	V	16.14	

## 8.2 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B48
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters

Freq (MHz)	Measured Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
55265 (3552.5)	7 105.00	-62.09	10.98	-54.63	4.00	V	-47.65	-40.00
	10 657.50	-62.75	11.70	-51.99	5.03	V	-45.32	-40.00
	14 210.00	-58.02	13.02	-50.45	5.91	V	-43.34	-40.00
55990 (3625.0)	7 250.00	-62.77	10.50	-55.15	4.07	V	-48.72	-40.00
	10 875.00	-62.54	11.85	-51.89	5.11	V	-45.15	-40.00
	14 500.00	-57.50	13.40	-50.83	5.90	V	-43.33	-40.00
56715 (3697.5)	7 395.00	-62.30	11.17	-55.22	4.08	H	-48.13	-40.00
	11 092.50	-61.30	12.28	-50.57	5.09	V	-43.38	-40.00
	14 790.00	-57.09	13.78	-50.97	5.92	V	-43.11	-40.00

- ▣ MODE: LTE B48
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters

Freq (MHz)	Measured Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
55290 (3555.0)	7 110.00	-62.46	10.96	-54.84	4.00	V	-47.88	-40.00
	10 665.00	-62.98	11.70	-52.09	5.04	H	-45.43	-40.00
	14 220.00	-58.03	13.04	-50.31	5.92	V	-43.19	-40.00
55990 (3625.0)	7 250.00	-62.82	10.50	-55.20	4.07	V	-48.77	-40.00
	10 875.00	-63.00	11.85	-52.35	5.11	V	-45.61	-40.00
	14 500.00	-57.92	13.40	-51.25	5.90	V	-43.75	-40.00
56690 (3695.0)	7 390.00	-62.48	11.14	-55.43	4.07	H	-48.36	-40.00
	11 085.00	-61.52	12.27	-50.56	5.11	V	-43.40	-40.00
	14 780.00	-57.18	13.76	-51.01	5.86	V	-43.11	-40.00

- ▣ MODE: LTE B48
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters

Freq (MHz)	Measured Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
55315 (3557.5)	7 115.00	-62.42	10.94	-54.79	4.00	V	-47.85	-40.00
	10 672.50	-63.09	11.70	-52.55	5.04	H	-45.89	-40.00
	14 230.00	-58.35	13.06	-50.79	5.88	V	-43.61	-40.00
55990 (3625.0)	7 250.00	-62.84	10.50	-55.22	4.07	V	-48.79	-40.00
	10 875.00	-62.83	11.85	-52.18	5.11	H	-45.44	-40.00
	14 500.00	-57.77	13.40	-51.10	5.90	V	-43.60	-40.00
56665 (3692.5)	7 385.00	-62.58	11.11	-55.47	4.07	H	-48.43	-40.00
	11 077.50	-61.32	12.25	-50.46	5.12	V	-43.33	-40.00
	14 770.00	-57.45	13.74	-51.63	5.85	V	-43.74	-40.00

- ▣ MODE: LTE B48
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters

Freq (MHz)	Measured Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
55340 (3560.0)	7 120.00	-62.50	10.92	-54.84	4.01	V	-47.93	-40.00
	10 680.00	-62.83	11.70	4.08	5.02	V	-45.42	-40.00
	14 240.00	-58.19	13.08	-51.15	5.83	V	-43.90	-40.00
55990 (3625.0)	7 250.00	-63.20	10.50	-55.58	4.07	V	-49.15	-40.00
	10 875.00	-62.78	11.85	-52.13	5.11	V	-45.39	-40.00
	14 500.00	-57.60	13.40	-50.93	5.90	V	-43.43	-40.00
56640 (3690.0)	7 380.00	-62.53	11.08	-55.36	4.07	H	-48.35	-40.00
	11 070.00	-61.49	12.24	-50.95	5.13	V	-43.84	-40.00
	14 760.00	-57.34	13.72	-51.83	5.89	V	-44.00	-40.00



### 8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
48	5 MHz	3625.0	QPSK	25	0	5.49
			16-QAM			6.25
			64-QAM			6.60
	10 MHz		QPSK	50		5.67
			16-QAM			6.33
			64-QAM			6.73
	15 MHz		QPSK	75		5.47
			16-QAM			6.29
			64-QAM			6.63
	20 MHz		QPSK	100		5.53
			16-QAM			6.20
			64-QAM			6.58

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 67 ~ 78.

### 8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
48	5 MHz	3625.0	QPSK	25	0	4.5140
			16-QAM			4.4708
			64-QAM			4.4705
	10 MHz		QPSK	50		8.9281
			16-QAM			8.9575
			64-QAM			8.9879
	15 MHz		QPSK	75		13.425
			16-QAM			13.427
			64-QAM			13.355
	20 MHz		QPSK	100		17.881
			16-QAM			17.896
			64-QAM			17.850

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 55 ~ 66.

### 8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
48	5	3552.5	3.1865	31.955	-77.847	-45.892	-40.00
		3625.0	3.1556	31.955	-77.505	-45.550	
		3697.5	3.1516	31.955	-77.913	-45.958	
	10	3555.0	3.1750	31.955	-77.688	-45.733	
		3625.0	3.7588	31.955	-76.648	-44.693	
		3695.0	3.8291	31.955	-76.533	-44.578	
	15	3557.5	2.6950	31.955	-77.715	-45.760	
		3625.0	3.1770	31.955	-78.005	-46.050	
		3692.5	3.1770	31.955	-77.869	-45.914	
	20	3560.0	5.6257	32.570	-77.827	-45.257	
		3625.0	6.2084	32.570	-77.894	-45.324	
		3690.0	3.9567	31.955	-77.580	-45.625	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 123 ~ 146.
2. Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.979
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor

Frequency Range (GHz)	Factor [dB]
0.03 - 1	29.249
1 - 5	31.955
5 - 10	32.570
10 - 15	33.095
15 - 20	33.468
20 - 26.5	34.110
26.5 - 37.0	29.249

### 8.6 CHANNEL EDGE

BW (MHz)	RB (Size/ Offset)	Freq. (MHz)	Outside of the authorized band (dBm)					
			Lower Side(MHz)			Upper Side(MHz)		
			Below 3530	(C.E-1) ~ (B)	C.E ~ (C.E-1)	C.E ~ (C.E+1)	(C.E+1) ~ (B)	Above 3720
5	25/0	3552.5	-47.77	-28.33	-33.33	-34.32	-28.18	-
		3625.0	-	-24.95	-32.55	-33.20	-25.38	-
		3697.5	-	-22.16	-31.13	-31.27	-21.98	-45.86
10	50/0	3555.0	-47.98	-31.62	-36.56	-36.69	-29.92	-
		3625.0	-	-27.75	-35.14	-35.39	-27.24	-
		3695.0	-	-24.23	-32.88	-32.91	-24.18	-45.21
15	75/0	3557.5	-43.92	-33.19	-38.01	-37.00	-30.89	-
		3625.0	-	-28.97	-35.85	-35.42	-28.23	-
		3692.5	-	-25.75	-33.17	-32.93	-25.04	-41.40
20	100/0	3560.0	-43.55	-34.53	-38.72	-36.82	-31.55	-
		3625.0	-	-29.66	-35.96	-35.13	-28.88	-
		3690.0	-	-26.68	-33.31	-32.73	-25.88	-41.97
Limit (dBm)			-40.00	-13.00	-13.00	-13.00	-13.00	-40.00

Note:

1. C.E = Channel Edge
2. B = Channel Bandwidth
3. Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.979
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor
4. Plots of the EUT's Channel Edge are shown Page 79 ~ 122

BW (MHz)	RB (Size/ Offset)	Freq. (MHz)	Outside of the authorized band (dBm)					
			Lower Side(MHz)			Upper Side(MHz)		
			Below 3530	(C.E-1) ~ (B)	C.E ~ (C.E-1)	C.E ~ (C.E+1)	(C.E+1) ~ (B)	Above 3720
5	Lower Side: 1/0 Upper Side: 1/24	3552.5	-48.07	-32.24	-27.69	-27.43	-32.28	-
		3625.0	-	-32.12	-27.65	-27.23	-32.54	-
		3697.5	-	-32.31	-27.89	-27.25	-32.27	-46.03
10	Lower Side: 1/0 Upper Side: 1/49	3555.0	-48.29	-34.84	-35.46	-34.29	-35.57	-
		3625.0	-	-35.01	-35.42	-34.41	-35.77	-
		3695.0	-	-35.31	-35.35	-34.33	-35.50	-46.19
15	Lower Side: 1/0 Upper Side: 1/74	3557.5	-48.23	-35.27	-35.53	-34.60	-36.24	-
		3625.0	-	-35.22	-35.44	-34.84	-36.28	-
		3692.5	-	-35.54	-36.05	-35.10	-35.87	-46.20
20	Lower Side: 1/0 Upper Side: 1/99	3560.0	-48.14	-35.55	-35.33	-35.56	-36.72	-
		3625.0	-	-35.56	-35.45	-36.11	-36.59	-
		3690.0	-	-36.03	-36.06	-36.23	-36.22	-46.24
Limit (dBm)			-40.00	-13.00	-13.00	-13.00	-13.00	-40.00


**Note:**

1. C.E = Channel Edge
2. B = Channel Bandwidth
3. Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.979
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor
4. Plots of the EUT's Channel Edge are shown Page 79 ~ 122

### 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ OPERATING FREQUENCY: 3,552,500,000
- ▣ BANDWIDTH: 5 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3552 500 005	0.0	0.000 000	0.000
100%		-30	3552 499 981	-23.4	-0.000 001	-0.007
100%		-20	3552 499 985	-20.3	-0.000 001	-0.006
100%		-10	3552 499 984	-20.6	-0.000 001	-0.006
100%		0	3552 499 988	-17.0	0.000 000	-0.005
100%		+10	3552 499 986	-18.6	-0.000 001	-0.005
100%		+30	3552 499 989	-15.4	0.000 000	-0.004
100%		+40	3552 499 989	-15.8	0.000 000	-0.004
100%		+50	3552 500 021	16.3	0.000 000	0.005
85%		3.600	+20	3552 499 993	-11.5	0.000 000

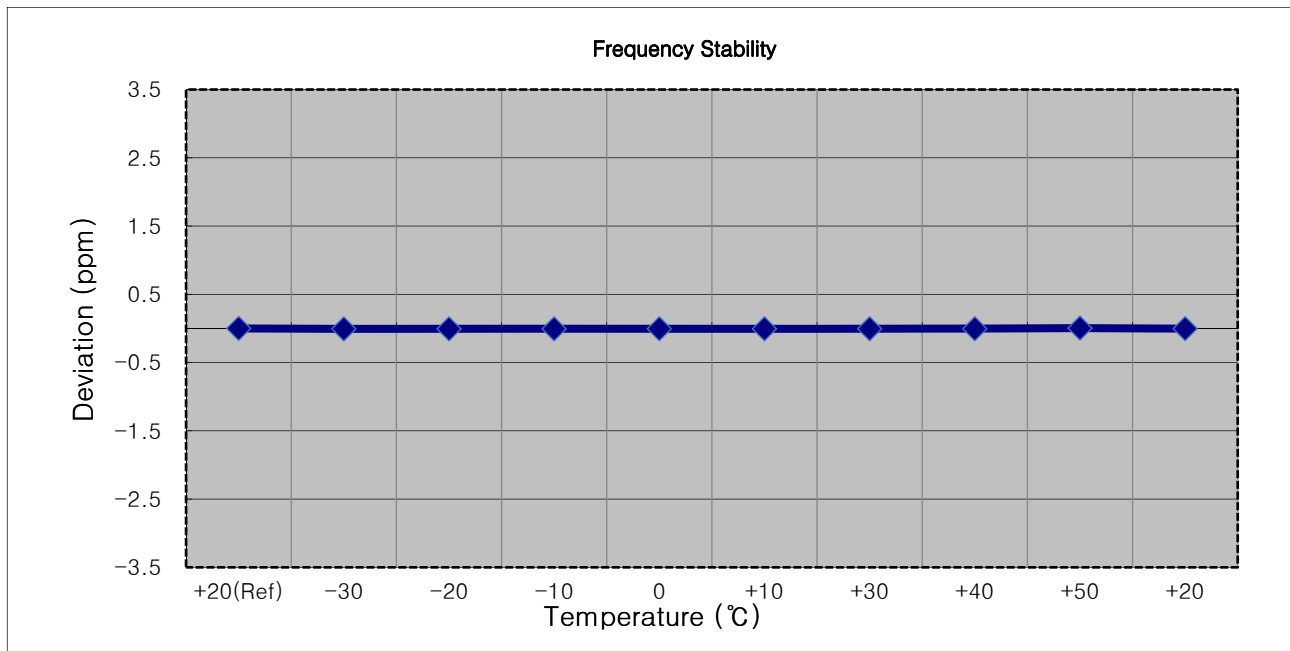


- ▣ OPERATING FREQUENCY: 3,555,000,000
- ▣ BANDWIDTH: 10 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3554 999 987	0.0	0.000 000	0.000
100%		-30	3554 999 970	-16.9	0.000 000	-0.005
100%		-20	3554 999 970	-16.5	0.000 000	-0.005
100%		-10	3554 999 970	-16.7	0.000 000	-0.005
100%		0	3554 999 972	-15.2	0.000 000	-0.004
100%		+10	3554 999 973	-13.8	0.000 000	-0.004
100%		+30	3554 999 975	-12.4	0.000 000	-0.003
100%		+40	3554 999 975	-12.2	0.000 000	-0.003
100%		+50	3554 999 977	-9.5	0.000 000	-0.003
85%	3.600	+20	3554 999 977	-10.1	0.000 000	-0.003

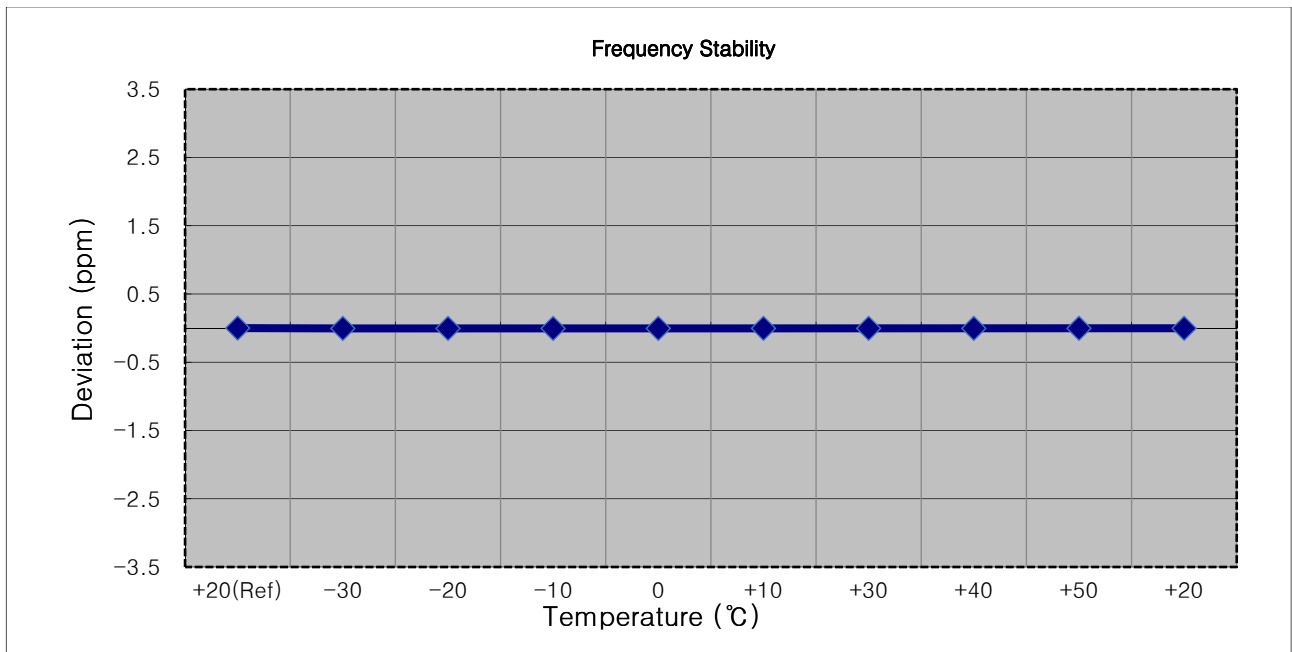

- ▣ OPERATING FREQUENCY: 3,557,500,000
- ▣ BANDWIDTH: 15 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3557 499 993	0.0	0.000 000	0.000
100%		-30	3557 499 987	-5.8	0.000 000	-0.002
100%		-20	3557 499 987	-5.6	0.000 000	-0.002
100%		-10	3557 499 985	-8.1	0.000 000	-0.002
100%		0	3557 499 985	-7.8	0.000 000	-0.002
100%		+10	3557 500 004	10.9	0.000 000	0.003
100%		+30	3557 499 986	-6.7	0.000 000	-0.002
100%		+40	3557 499 984	-8.5	0.000 000	-0.002
100%		+50	3557 499 985	-8.4	0.000 000	-0.002
85%	3.600	+20	3557 499 985	-7.8	0.000 000	-0.002

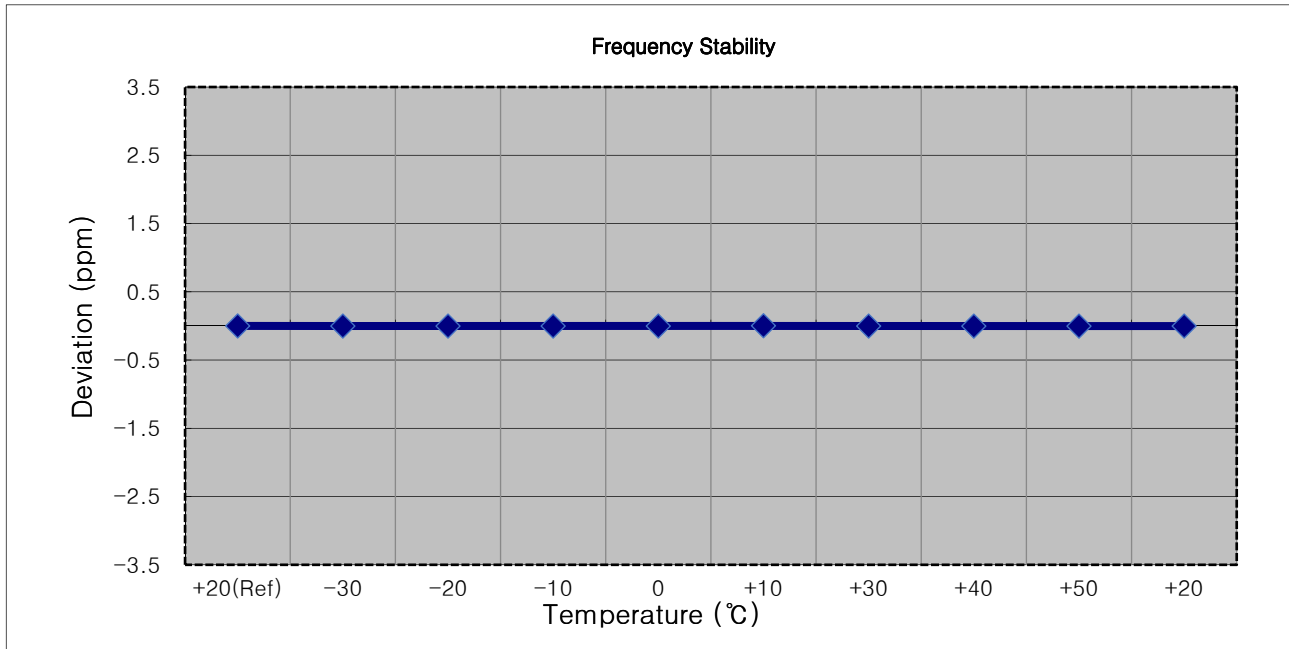






- ▣ OPERATING FREQUENCY:                    3,560,000,000
- ▣ BANDWIDTH:                                 20 MHz
- ▣ REFERENCE VOLTAGE:                    3.860 VDC
- ▣ DEVIATION LIMIT:                         Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3559 999 980	0.0	0.000 000	0.000
100%		-30	3559 999 957	-22.6	-0.000 001	-0.006
100%		-20	3559 999 959	-21.0	-0.000 001	-0.006
100%		-10	3559 999 959	-21.5	-0.000 001	-0.006
100%		0	3559 999 985	4.9	0.000 000	0.001
100%		+10	3559 999 988	7.5	0.000 000	0.002
100%		+30	3559 999 950	-29.8	-0.000 001	-0.008
100%		+40	3559 999 954	-26.3	-0.000 001	-0.007
100%		+50	3559 999 972	-7.6	0.000 000	-0.002
85%	3.600	+20	3559 999 985	5.4	0.000 000	0.002

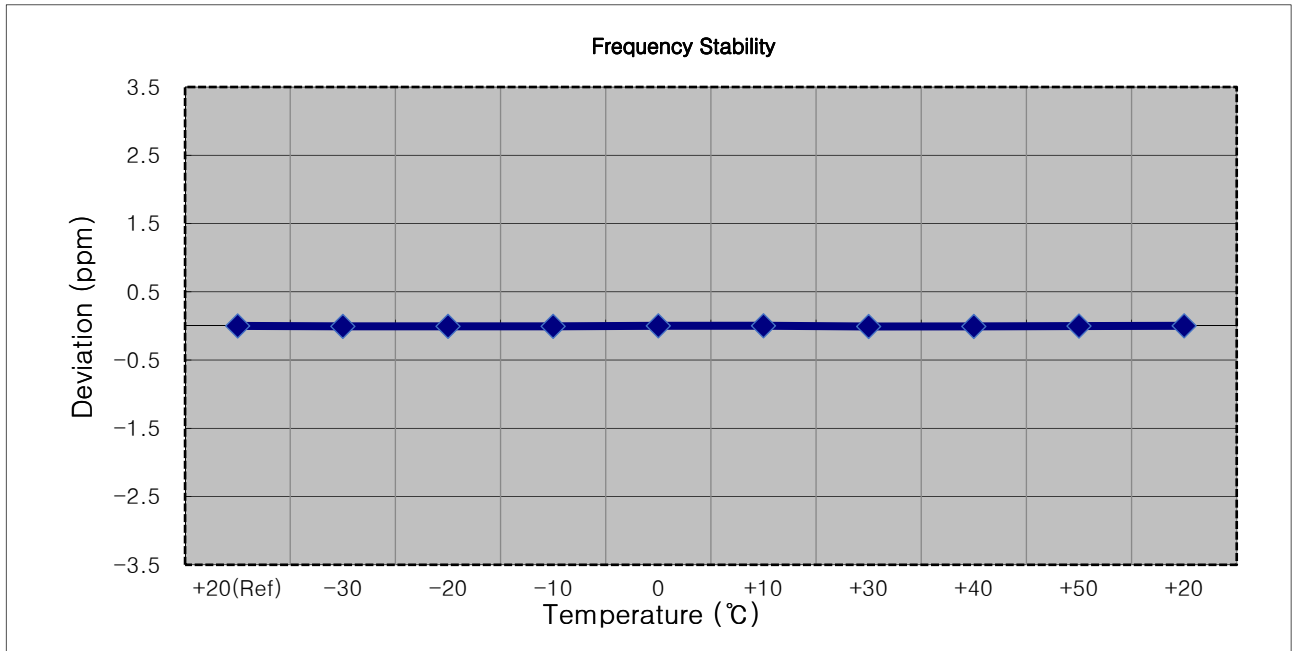




- ▣ OPERATING FREQUENCY: 3,625,000,000
- ▣ BANDWIDTH: 5 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3625 000 015	0.0	0.000 000	0.000
100%		-30	3625 000 029	14.6	0.000 000	0.004
100%		-20	3625 000 001	-13.8	0.000 000	-0.004
100%		-10	3625 000 033	18.6	0.000 001	0.005
100%		0	3625 000 003	-11.6	0.000 000	-0.003
100%		+10	3625 000 000	-15.0	0.000 000	-0.004
100%		+30	3625 000 003	-12.2	0.000 000	-0.003
100%		+40	3625 000 001	-13.8	0.000 000	-0.004
100%		+50	3625 000 004	-10.5	0.000 000	-0.003
85%		3.600	+20	3625 000 004	-11.0	0.000 000

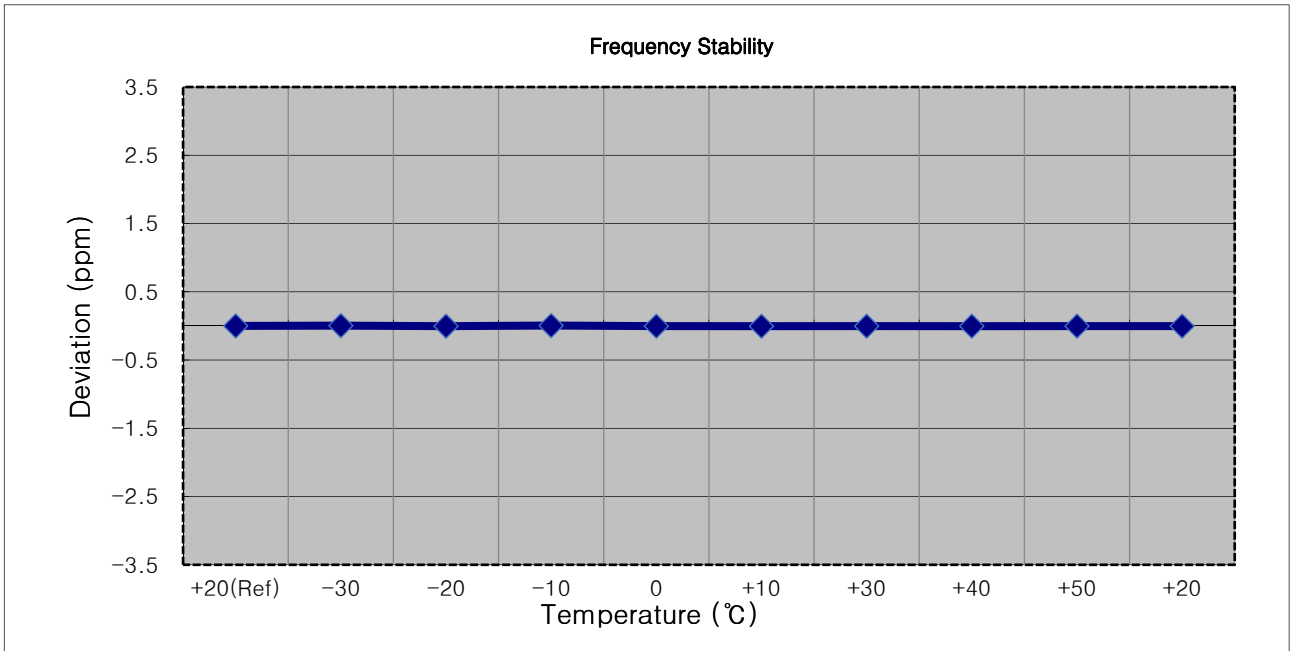


- ▣ OPERATING FREQUENCY: 3,625,000,000
- ▣ BANDWIDTH: 10 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3624 999 994	0.0	0.000 000	0.000
100%		-30	3624 999 985	-9.2	0.000 000	-0.003
100%		-20	3624 999 986	-8.0	0.000 000	-0.002
100%		-10	3624 999 986	-7.8	0.000 000	-0.002
100%		0	3624 999 988	-6.3	0.000 000	-0.002
100%		+10	3624 999 986	-7.8	0.000 000	-0.002
100%		+30	3624 999 984	-10.4	0.000 000	-0.003
100%		+40	3624 999 985	-9.7	0.000 000	-0.003
100%		+50	3624 999 989	-5.0	0.000 000	-0.001
85%	3.600	+20	3624 999 985	-8.9	0.000 000	-0.002

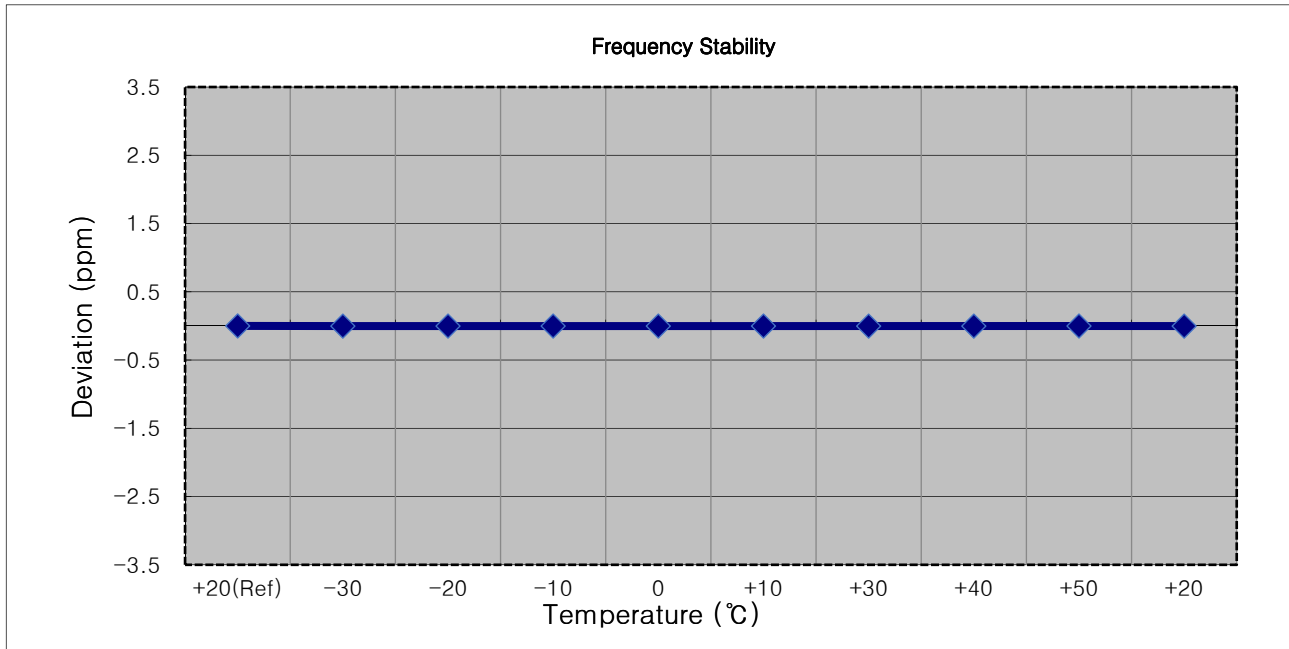

- ▣ OPERATING FREQUENCY: 3,625,000,000
- ▣ BANDWIDTH: 15 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3624 999 993	0.0	0.000 000	0.000
100%		-30	3624 999 986	-7.0	0.000 000	-0.002
100%		-20	3624 999 985	-8.1	0.000 000	-0.002
100%		-10	3624 999 982	-10.8	0.000 000	-0.003
100%		0	3624 999 979	-13.6	0.000 000	-0.004
100%		+10	3624 999 985	-7.6	0.000 000	-0.002
100%		+30	3625 000 010	16.6	0.000 000	0.005
100%		+40	3625 000 008	14.5	0.000 000	0.004
100%		+50	3625 000 011	17.7	0.000 000	0.005
85%	3.600	+20	3625 000 003	9.9	0.000 000	0.003

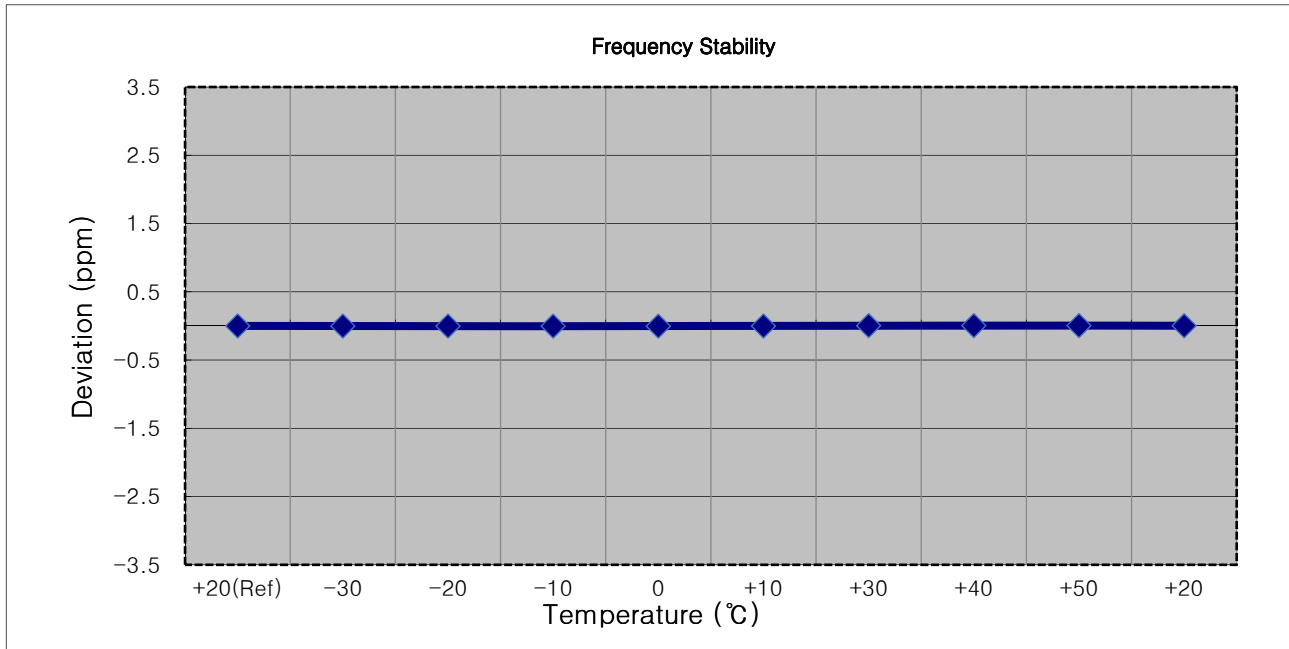



- ▣ OPERATING FREQUENCY: 3,625,000,000
- ▣ BANDWIDTH: 20 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3625 000 017	0.0	0.000 000	0.000
100%		-30	3625 000 032	15.1	0.000 000	0.004
100%		-20	3625 000 027	10.2	0.000 000	0.003
100%		-10	3625 000 031	14.7	0.000 000	0.004
100%		0	3625 000 024	7.4	0.000 000	0.002
100%		+10	3625 000 024	7.8	0.000 000	0.002
100%		+30	3625 000 023	6.0	0.000 000	0.002
100%		+40	3625 000 011	-5.4	0.000 000	-0.001
100%		+50	3625 000 011	-5.6	0.000 000	-0.002
85%		3.600	+20	3625 000 011	-5.6	0.000 000

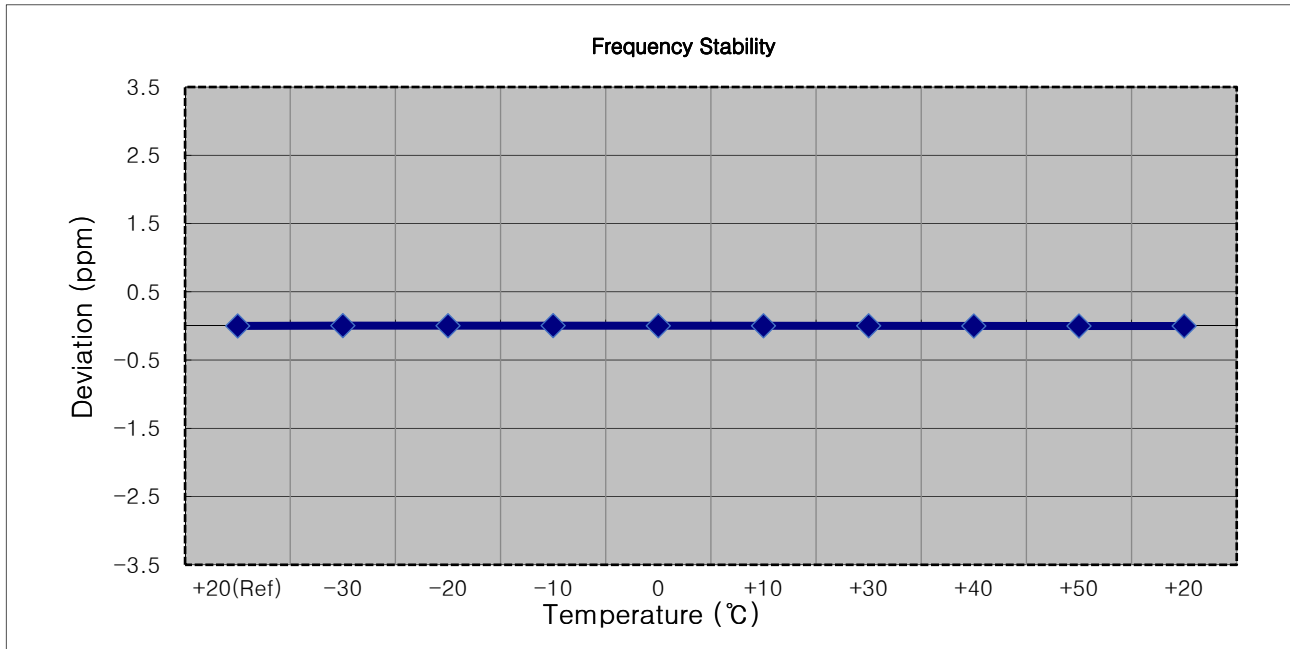




- ▣ OPERATING FREQUENCY: 3,697,500,000
- ▣ BANDWIDTH: 5 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3697 499 980	0.0	0.000 000	0.000
100%		-30	3697 499 964	-16.6	0.000 000	-0.004
100%		-20	3697 499 992	11.1	0.000 000	0.003
100%		-10	3697 499 988	7.9	0.000 000	0.002
100%		0	3697 499 960	-20.0	-0.000 001	-0.005
100%		+10	3697 499 961	-19.2	-0.000 001	-0.005
100%		+30	3697 499 990	10.0	0.000 000	0.003
100%		+40	3697 499 991	10.5	0.000 000	0.003
100%		+50	3697 499 988	7.6	0.000 000	0.002
85%	3.600	+20	3697 499 963	-17.1	0.000 000	-0.005

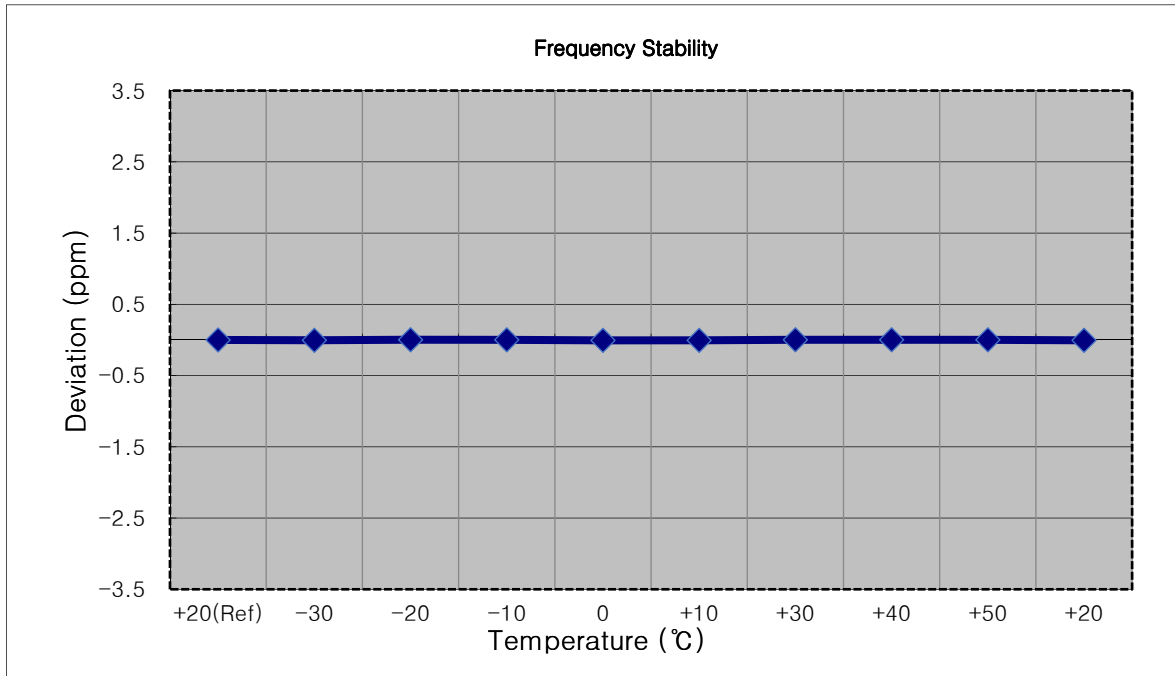


- ▣ OPERATING FREQUENCY: 3,695,000,000
- ▣ BANDWIDTH: 10 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3694 999 979	0.0	0.000 000	0.000
100%		-30	3694 999 959	-19.9	-0.000 001	-0.005
100%		-20	3694 999 957	-21.6	-0.000 001	-0.006
100%		-10	3694 999 957	-22.0	-0.000 001	-0.006
100%		0	3694 999 958	-21.2	-0.000 001	-0.006
100%		+10	3694 999 959	-20.1	-0.000 001	-0.005
100%		+30	3694 999 957	-21.8	-0.000 001	-0.006
100%		+40	3694 999 958	-20.6	-0.000 001	-0.006
100%		+50	3694 999 987	8.1	0.000 000	0.002
85%	3.600	+20	3694 999 973	-5.6	0.000 000	-0.002

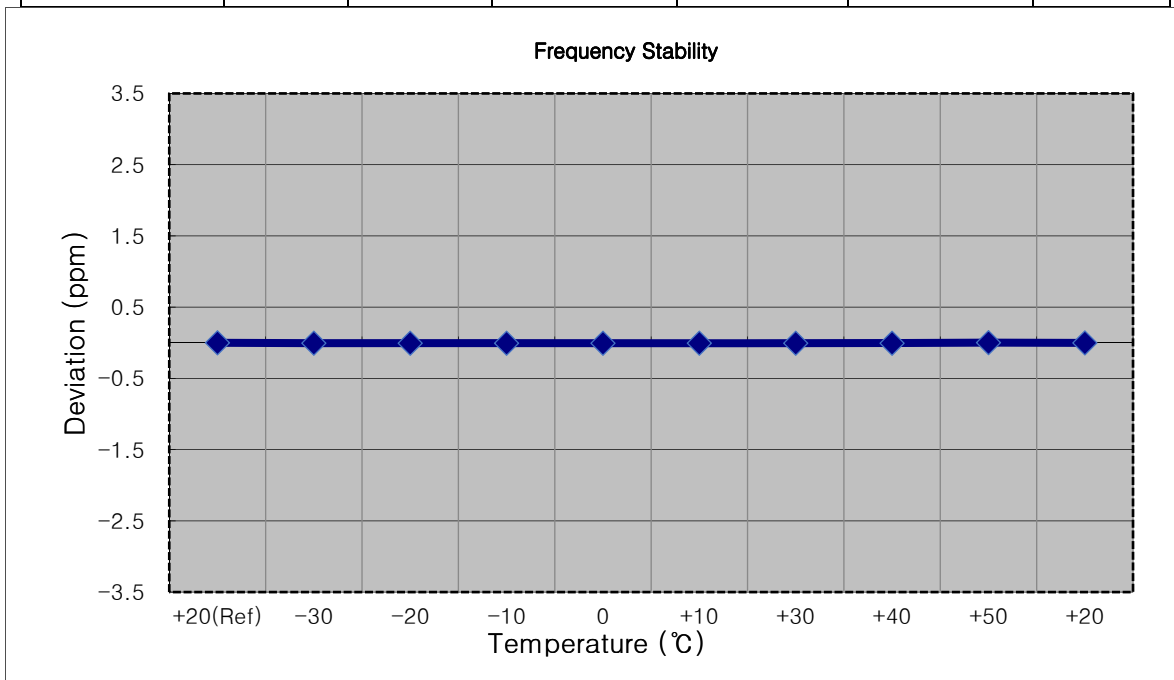

- ▣ OPERATING FREQUENCY: 3,692,500,000
- ▣ BANDWIDTH: 15 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3692 500 009	0.0	0.000 000	0.000
100%		-30	3692 500 016	7.5	0.000 000	0.002
100%		-20	3692 500 014	5.7	0.000 000	0.002
100%		-10	3692 500 012	3.1	0.000 000	0.001
100%		0	3692 500 005	-3.3	0.000 000	-0.001
100%		+10	3692 500 001	-7.8	0.000 000	-0.002
100%		+30	3692 499 998	-10.4	0.000 000	-0.003
100%		+40	3692 500 000	-8.6	0.000 000	-0.002
100%		+50	3692 500 026	16.9	0.000 000	0.005
85%		3.600	+20	3692 500 026	17.7	0.000 000

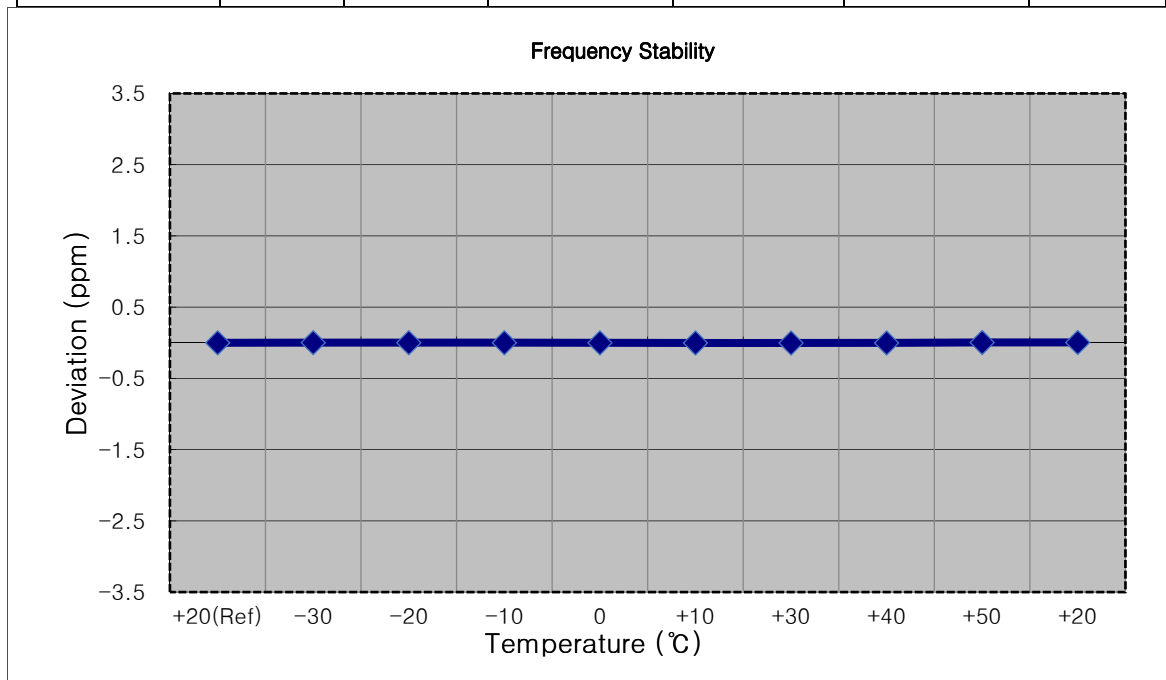



- ▣ OPERATING FREQUENCY: 3,690,000,000
- ▣ BANDWIDTH: 20 MHz
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	3690 000 007	0.0	0.000 000	0.000
100%		-30	3690 000 003	-4.8	0.000 000	-0.001
100%		-20	3689 999 998	-9.2	0.000 000	-0.002
100%		-10	3689 999 996	-11.0	0.000 000	-0.003
100%		0	3689 999 994	-13.8	0.000 000	-0.004
100%		+10	3689 999 993	-14.5	0.000 000	-0.004
100%		+30	3689 999 986	-21.4	-0.000 001	-0.006
100%		+40	3690 000 015	7.6	0.000 000	0.002
100%		+50	3690 000 013	5.8	0.000 000	0.002
85%	3.600	+20	3690 000 002	-5.0	0.000 000	-0.001

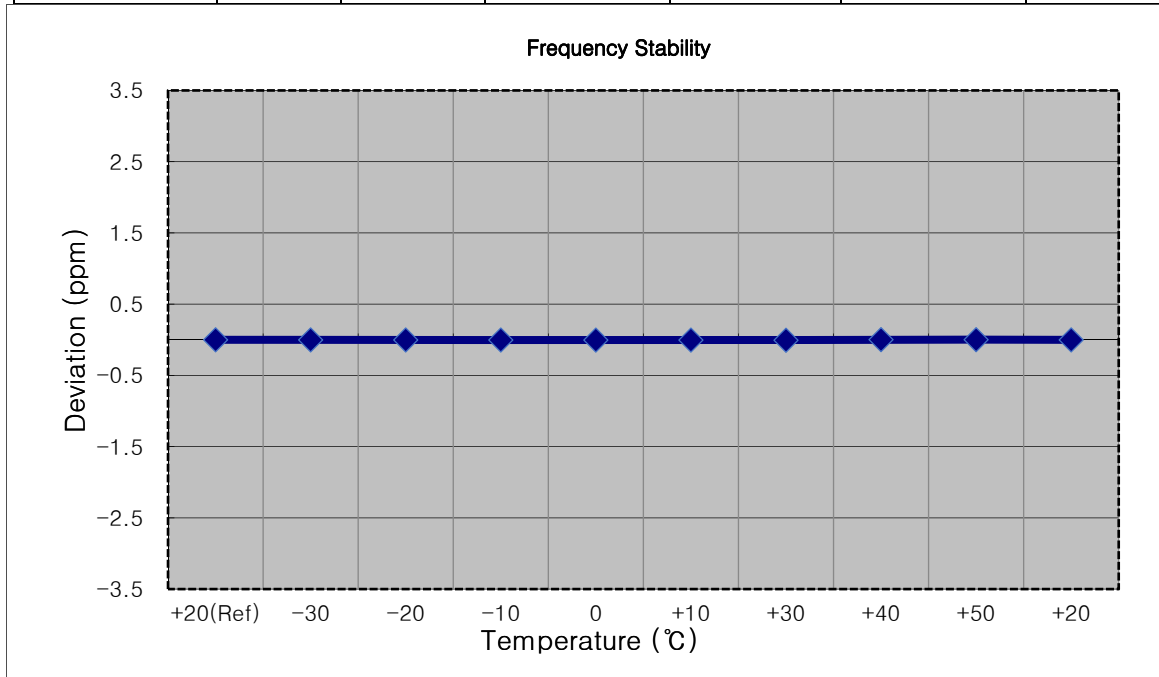


### 8.8 End User Device Additional Requirements (CBSD Protocol)

Test#1: 3570MHz(BW: 20MHz)

#### Operation Mode

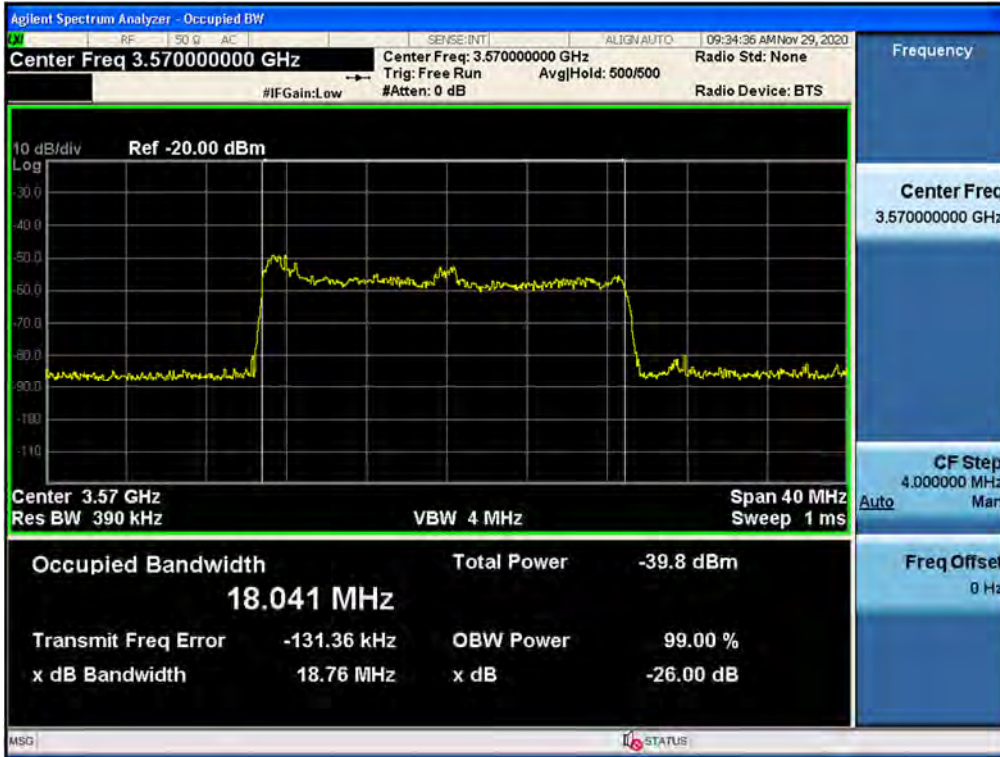

Stop Operation Within 10s

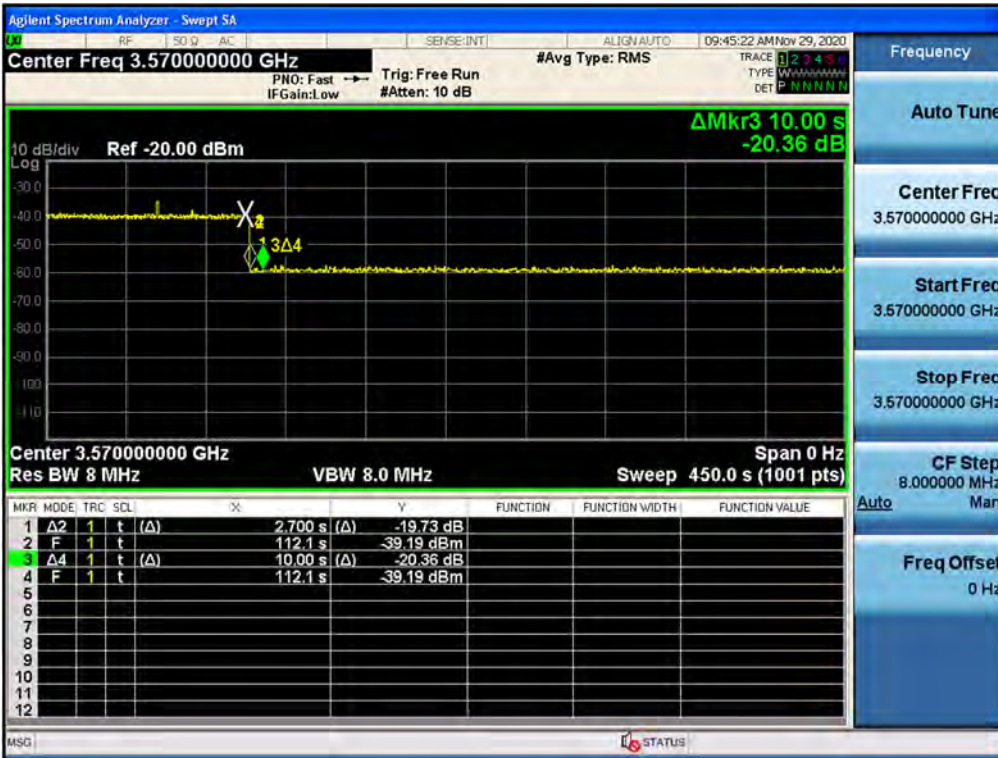

Note:


Marker 2: CBSD sends instructions to discontinue LTE operations.

Marker 1Δ2: EUT discontinues operation. (2.7s)


Marker 3Δ4: 10 seconds elapsed time from CBSD sending instructions to EUT.(10.0s)

Test#2: 3610MHz(BW: 20MHz)

Operation Mode

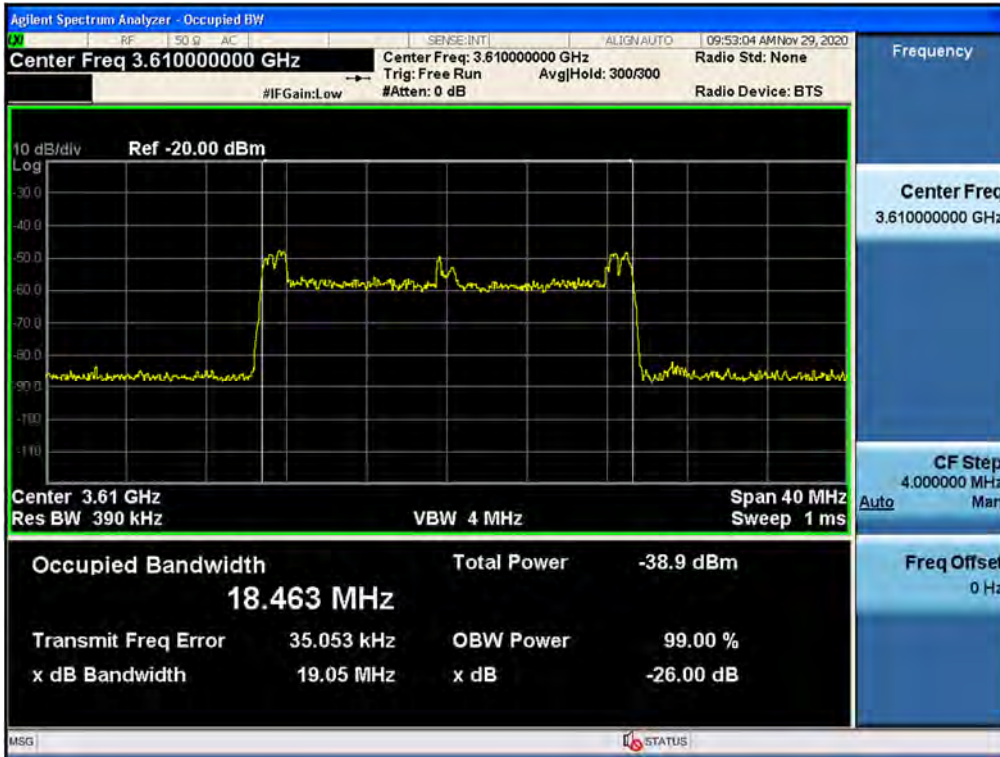

**Stop Operation Within 10s**

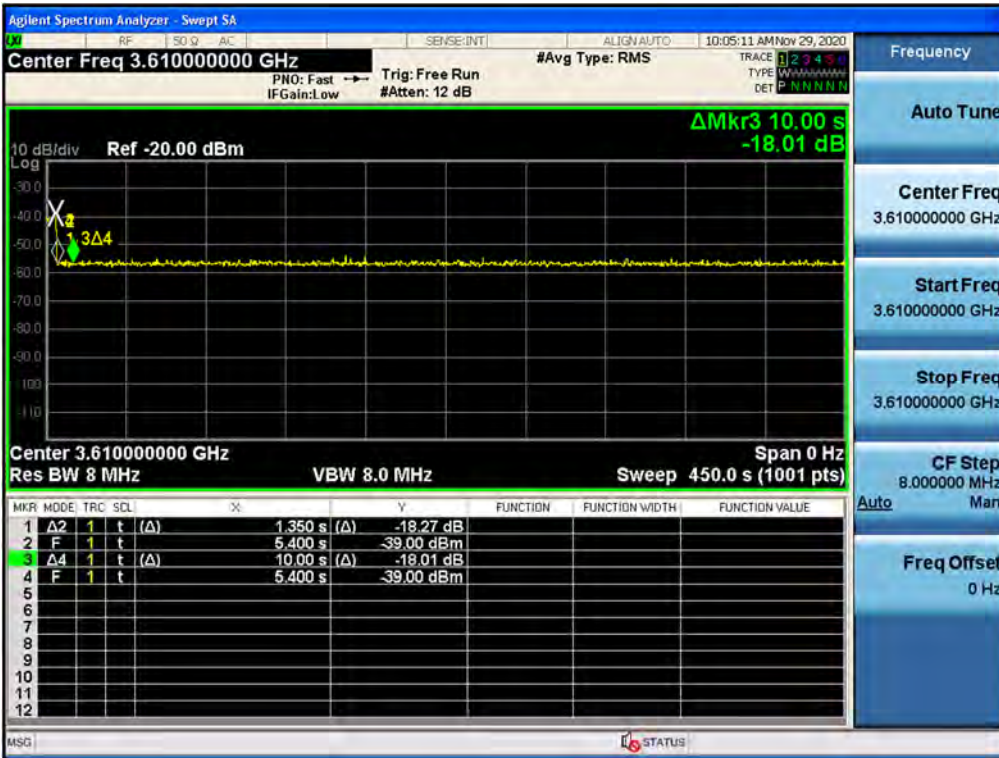

**Note:**

Marker 2: CBSD sends instructions to discontinue LTE operations.


Marker 1△2: EUT discontinues operation. (1.35s)

Marker 3△4: 10 seconds elapsed time from CBSD sending instructions to EUT.(10.0s)




## 9. TEST PLOTS

BAND 48. Occupied Bandwidth Plot (5 MHz Ch.55990 QPSK RB 25)

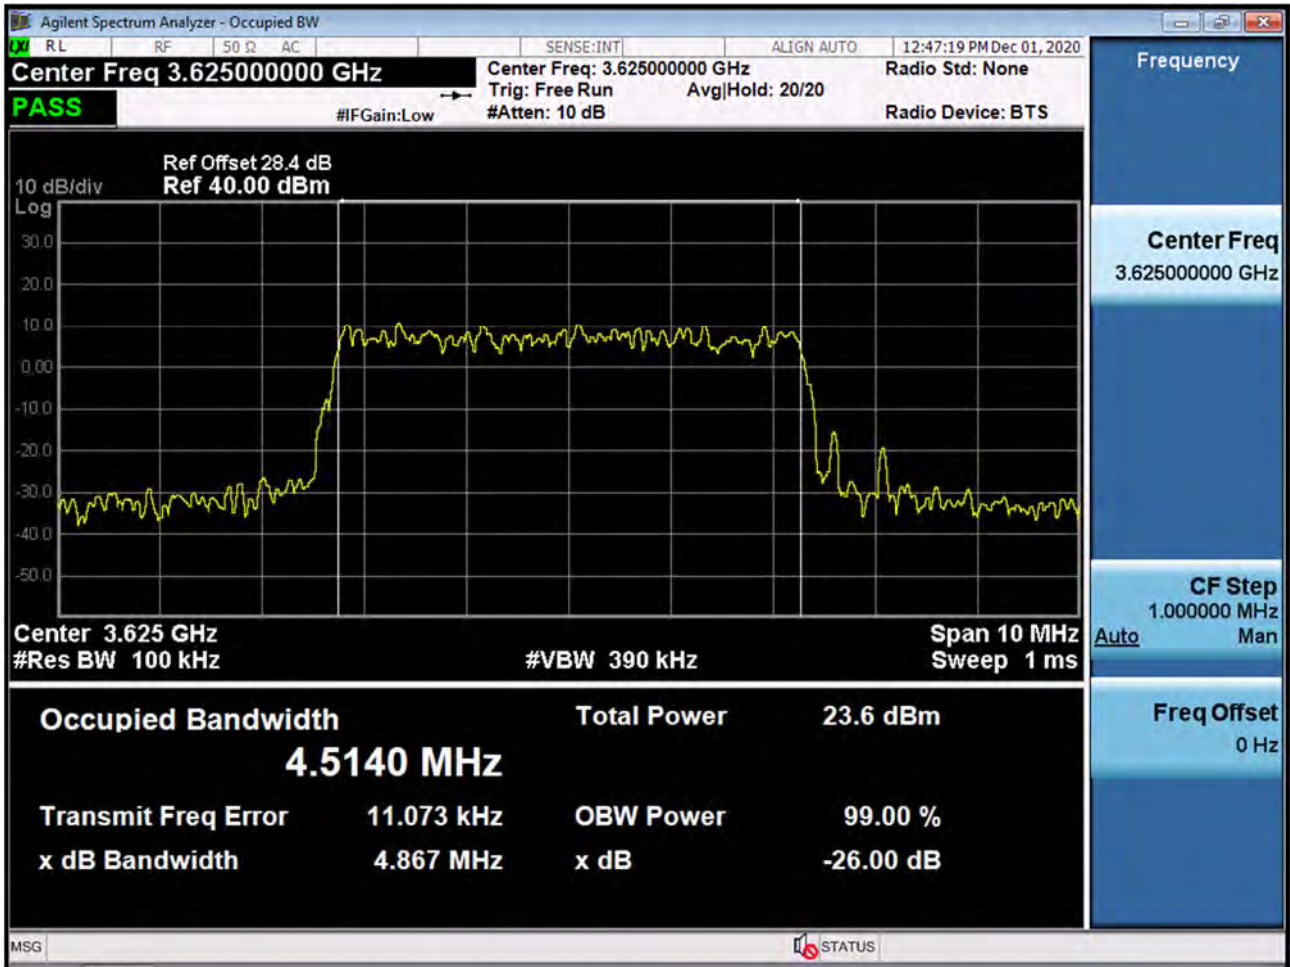




BAND 48. Occupied Bandwidth Plot (5 MHz Ch.55990 16-QAM RB 25)

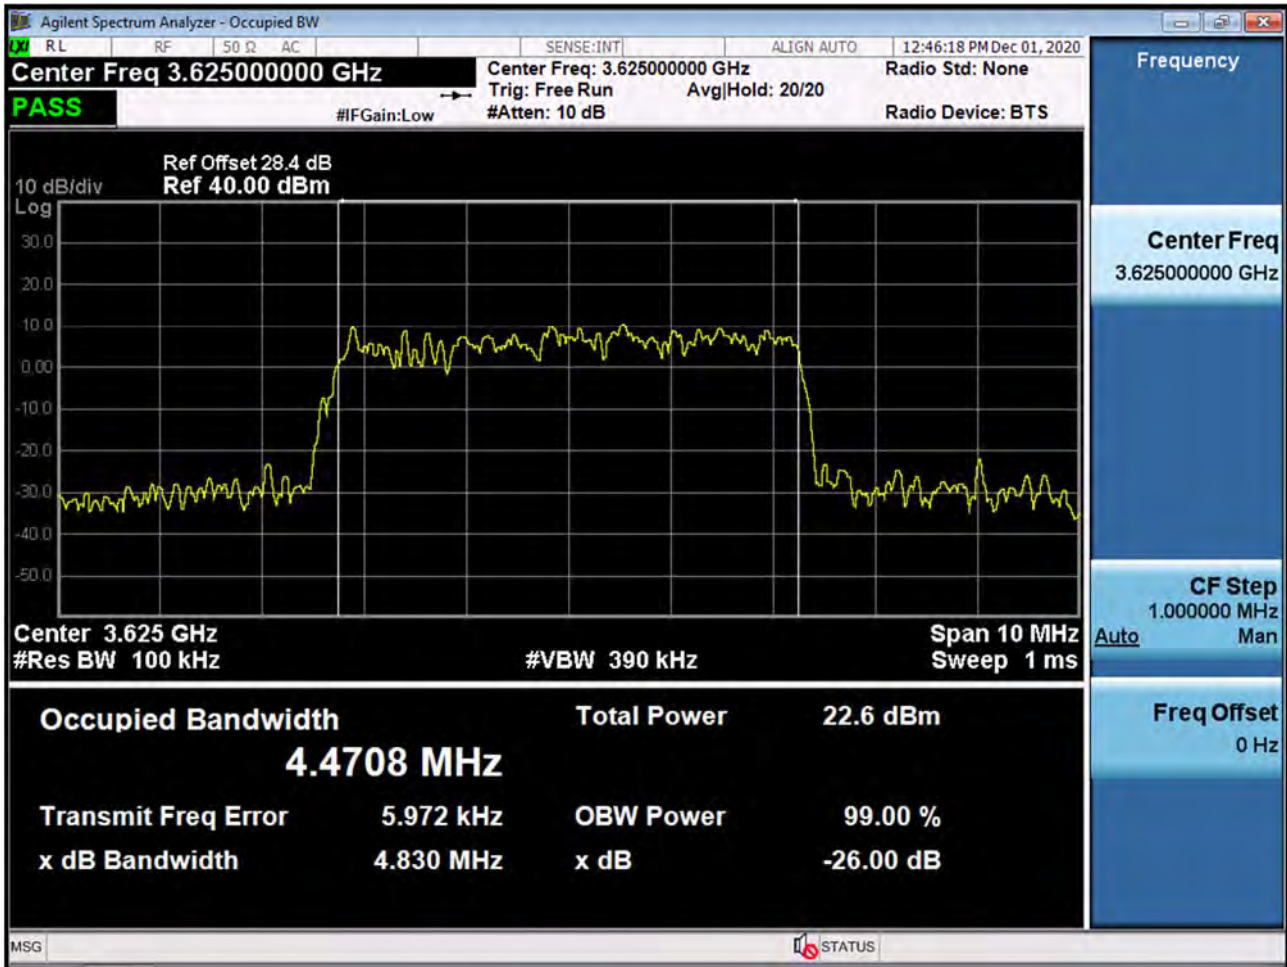





BAND 48. Occupied Bandwidth Plot (5 MHz Ch.55990 64-QAM RB 25)

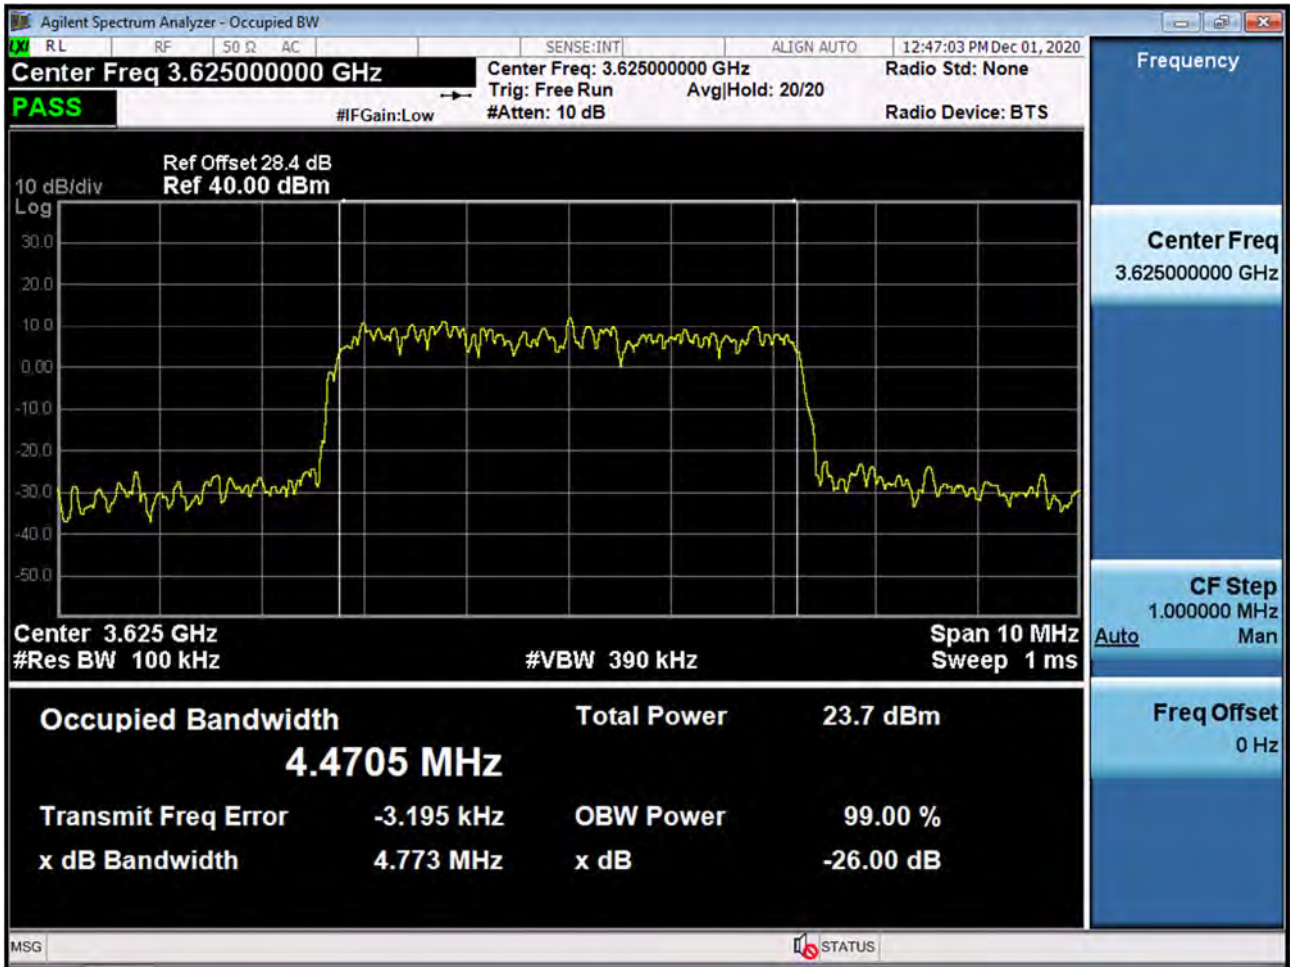


BAND 48. Occupied Bandwidth Plot (10 MHz Ch.55990 QPSK RB 50)

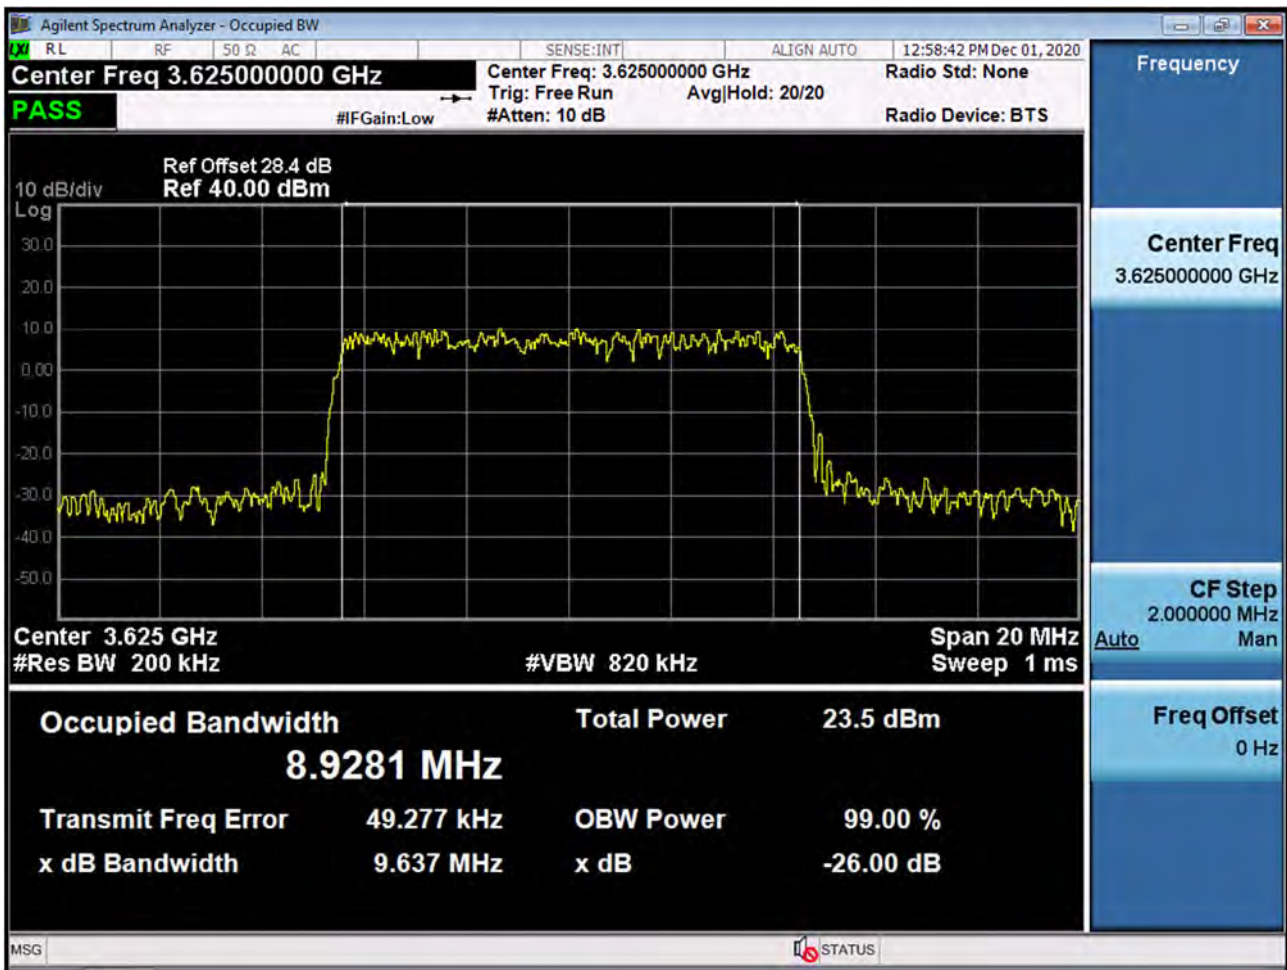

BAND 48. Occupied Bandwidth Plot (10 MHz Ch.55990 16-QAM RB 50)

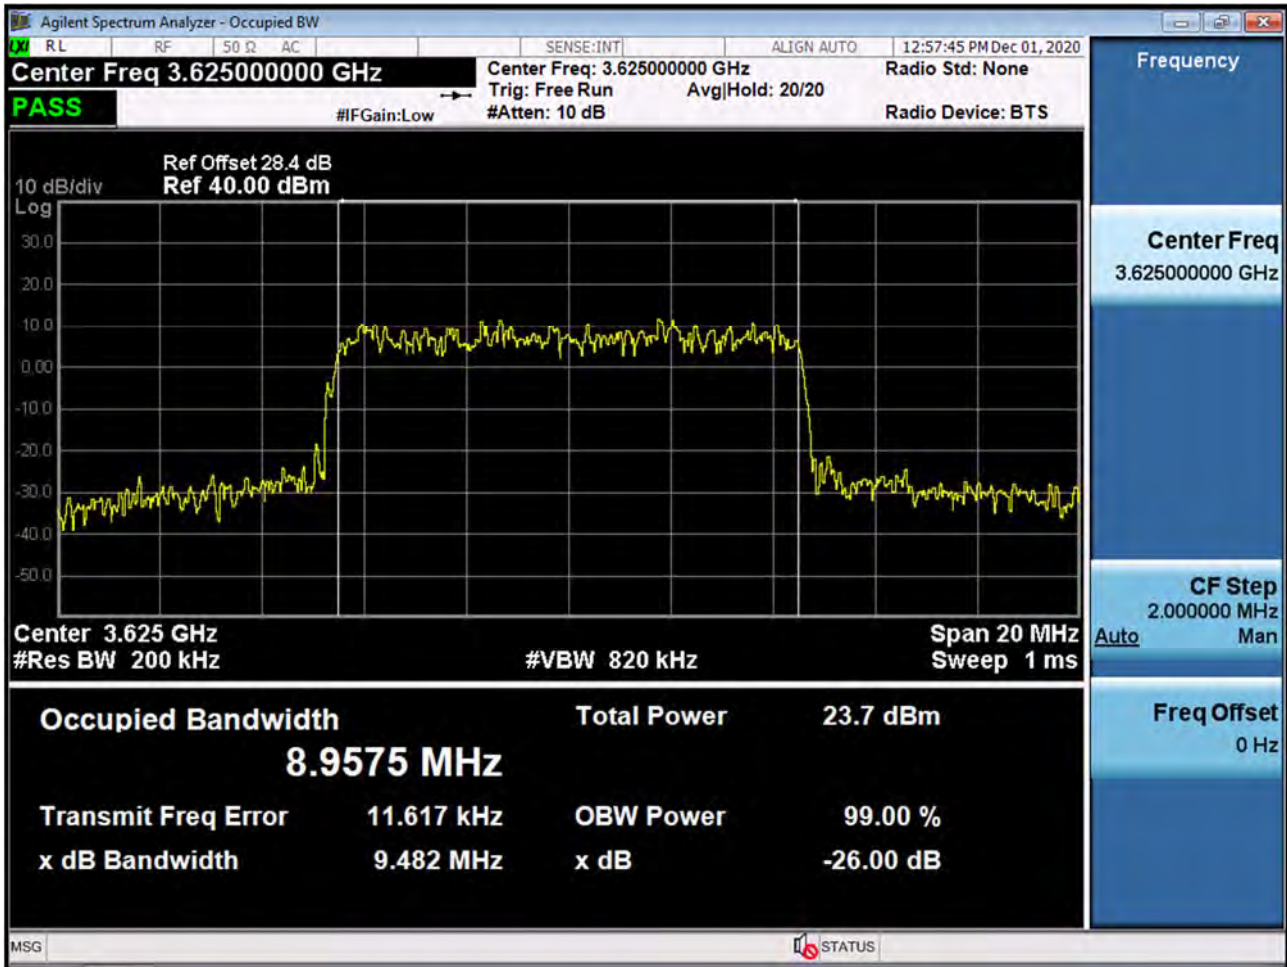


BAND 48. Occupied Bandwidth Plot (10 MHz Ch.55990 64-QAM RB 50)

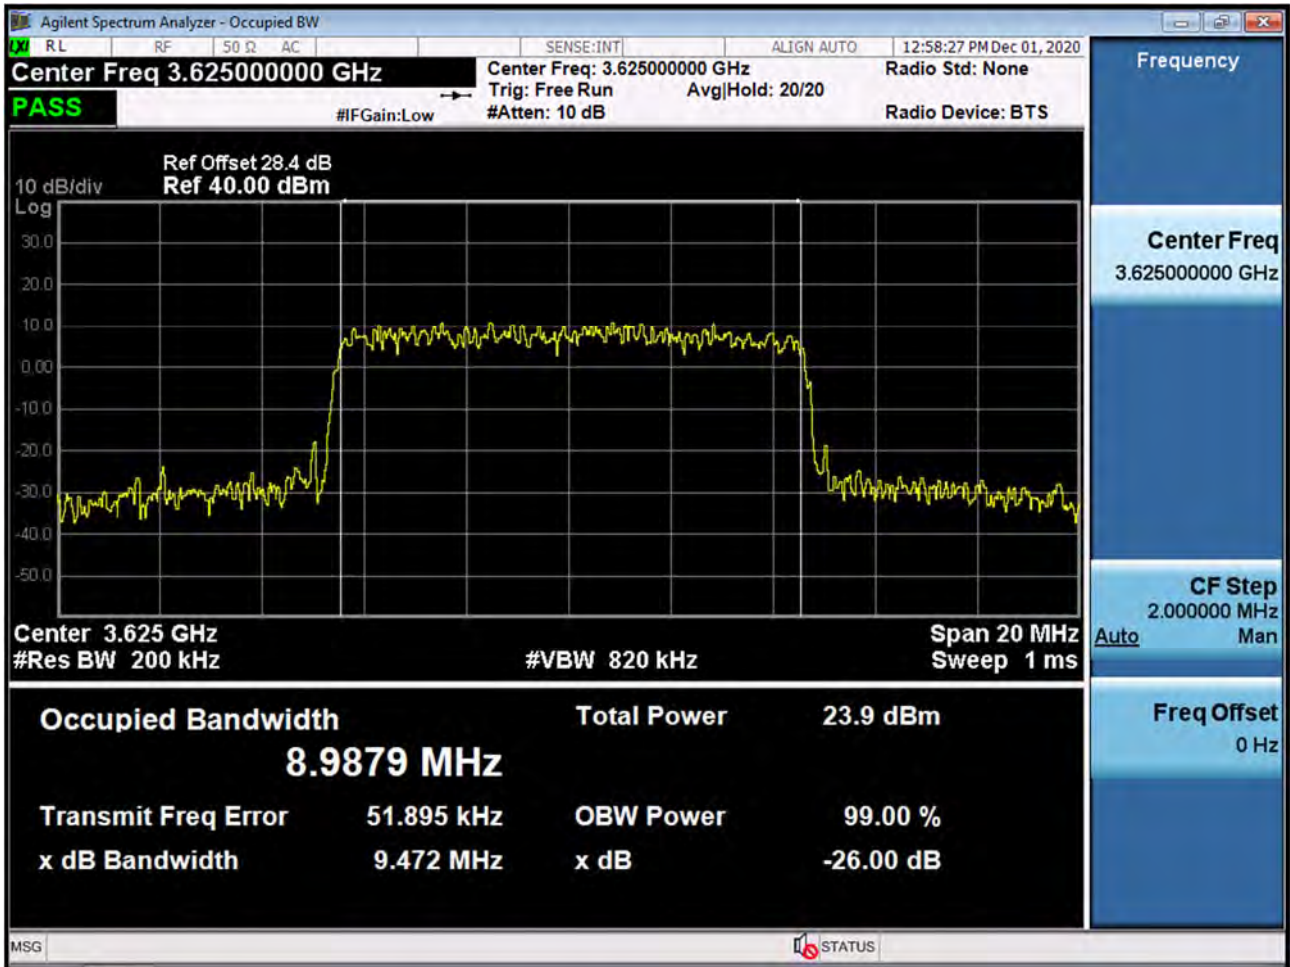





BAND 48. Occupied Bandwidth Plot (15 MHz Ch.55990 QPSK RB 75)

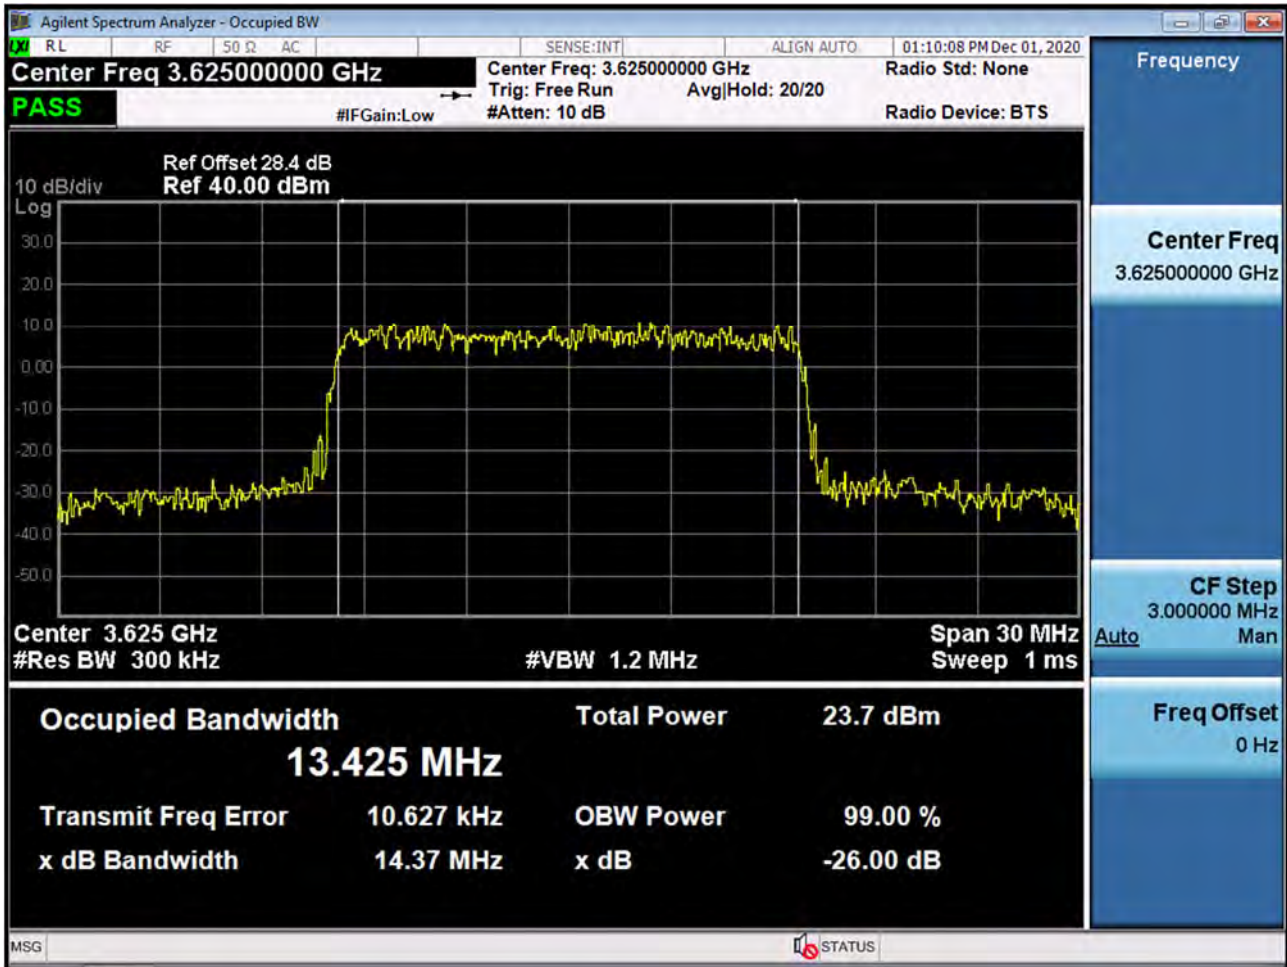


BAND 48. Occupied Bandwidth Plot (15 MHz Ch.55990 16-QAM RB 75)

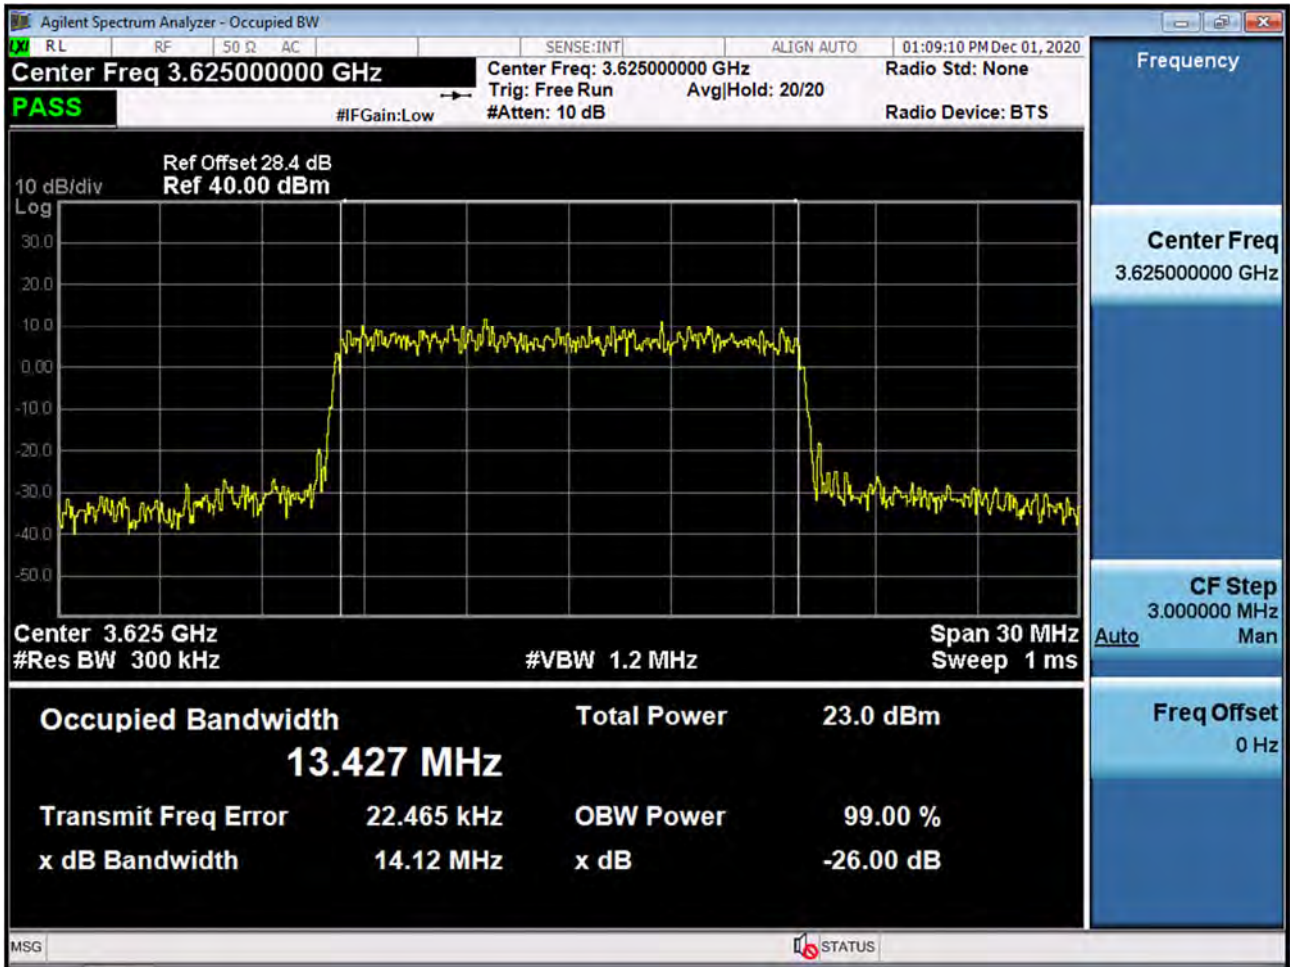

BAND 48. Occupied Bandwidth Plot (15 MHz Ch.55990 64-QAM RB 75)

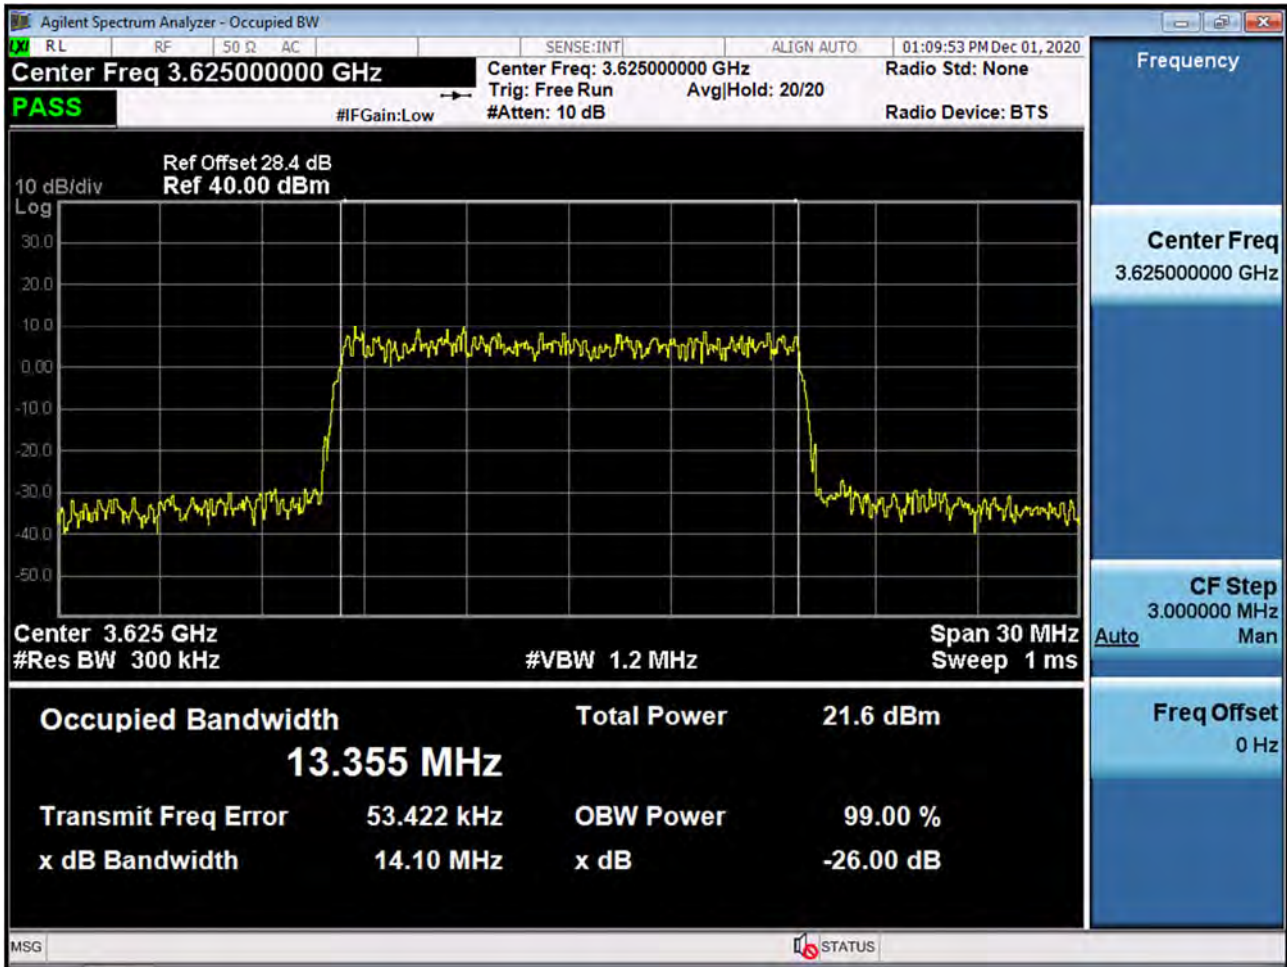


BAND 48. Occupied Bandwidth Plot (20 MHz Ch.55990 QPSK RB 100)

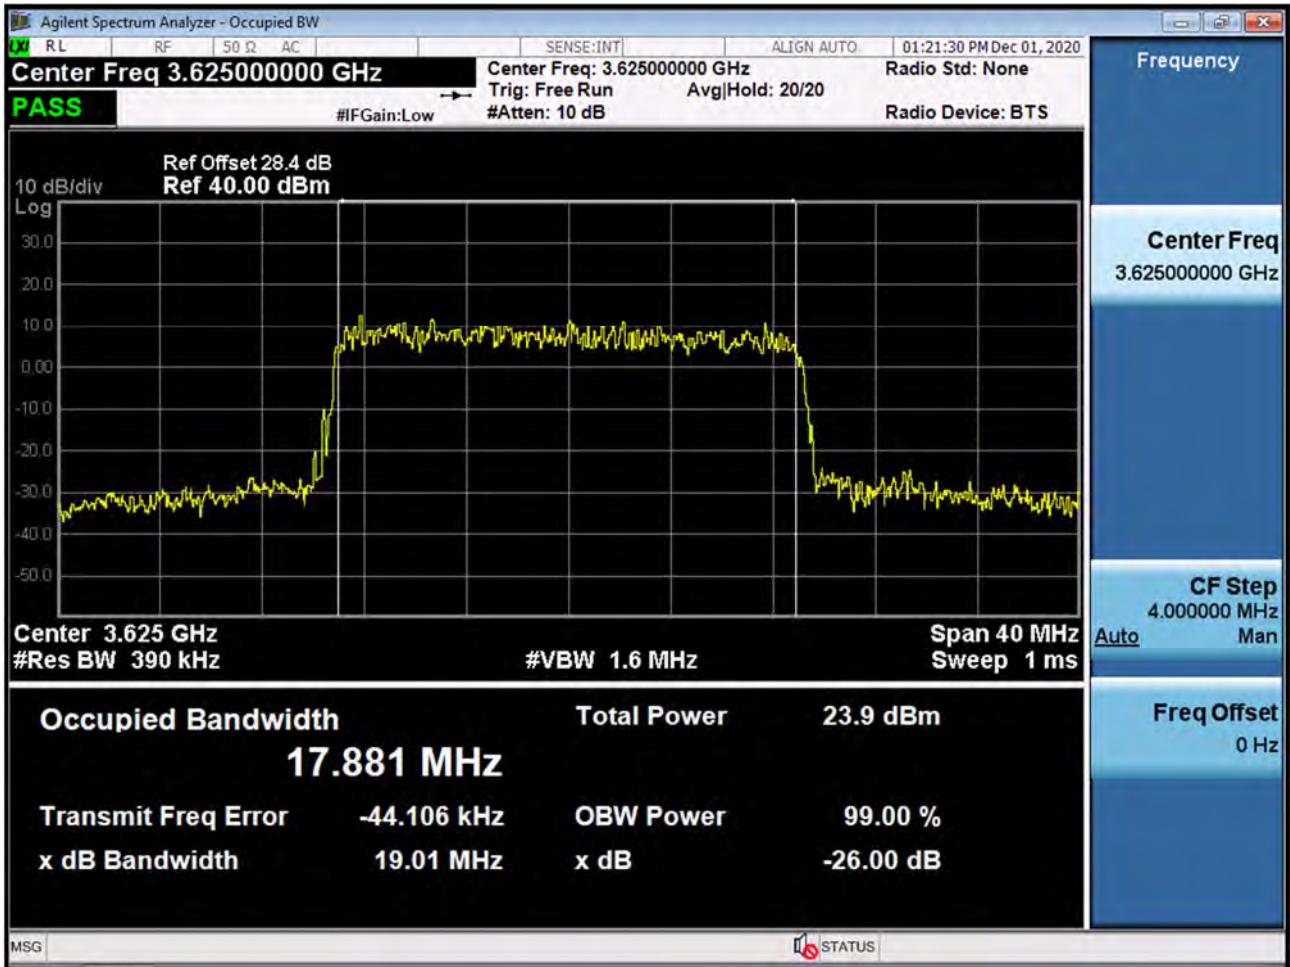





BAND 48. Occupied Bandwidth Plot (20 MHz Ch.55990 16-QAM RB 100)

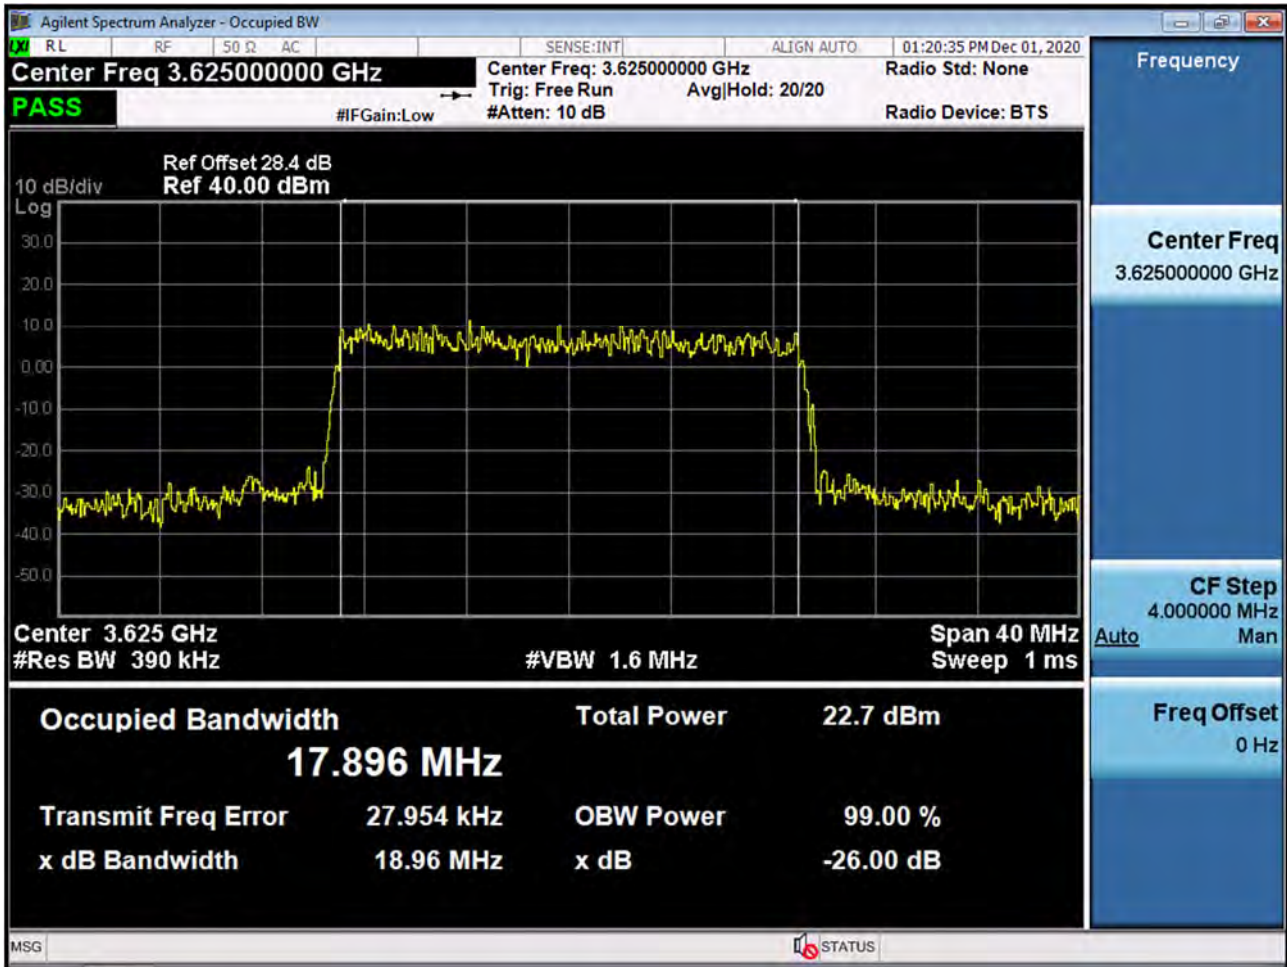


BAND 48. Occupied Bandwidth Plot (20 MHz Ch.55990 64-QAM RB 100)

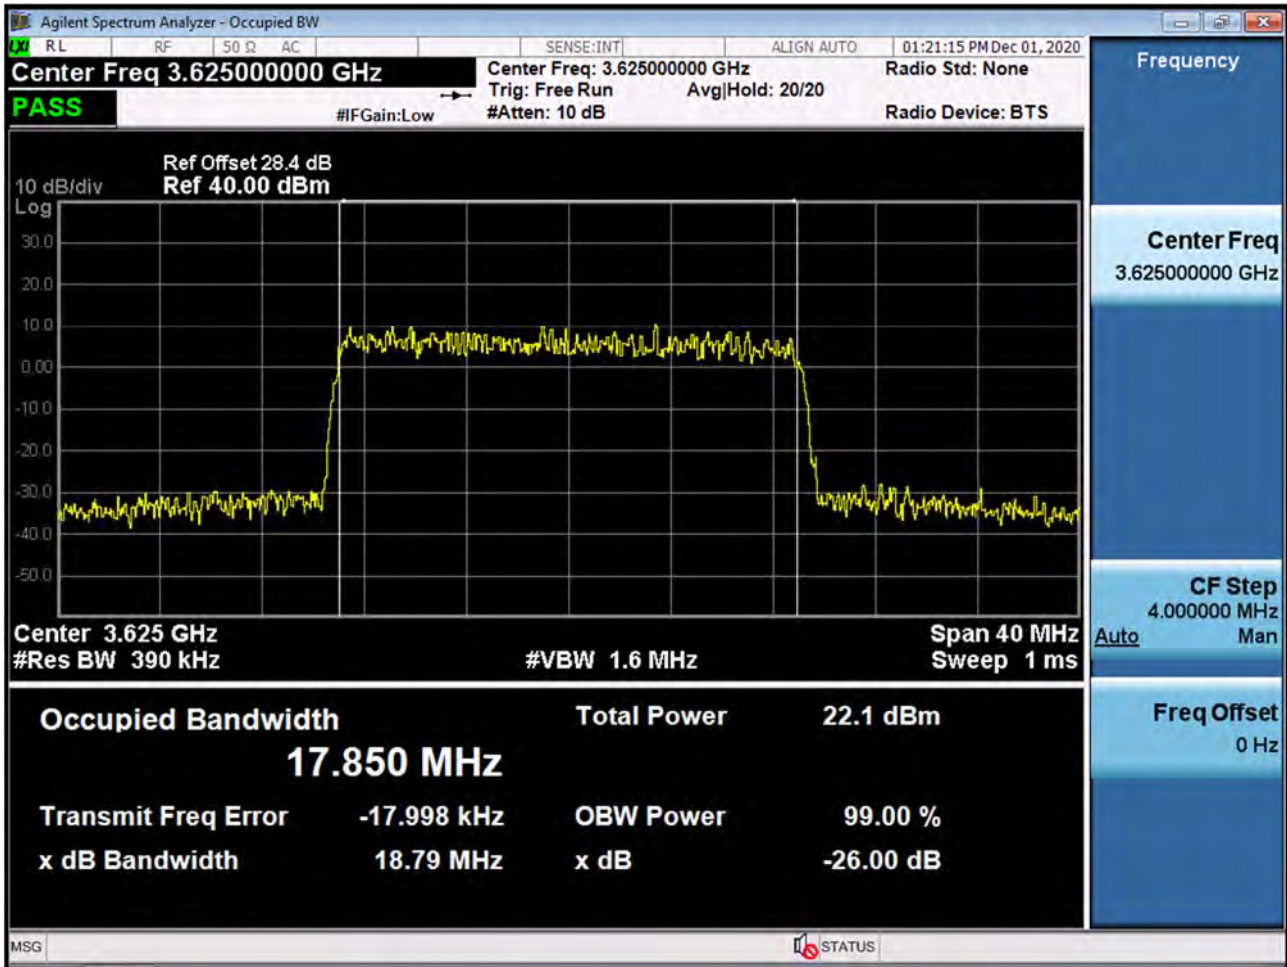

BAND 48. PAR Plot (5M BW\_Ch.55990\_QPSK\_RB25\_0)

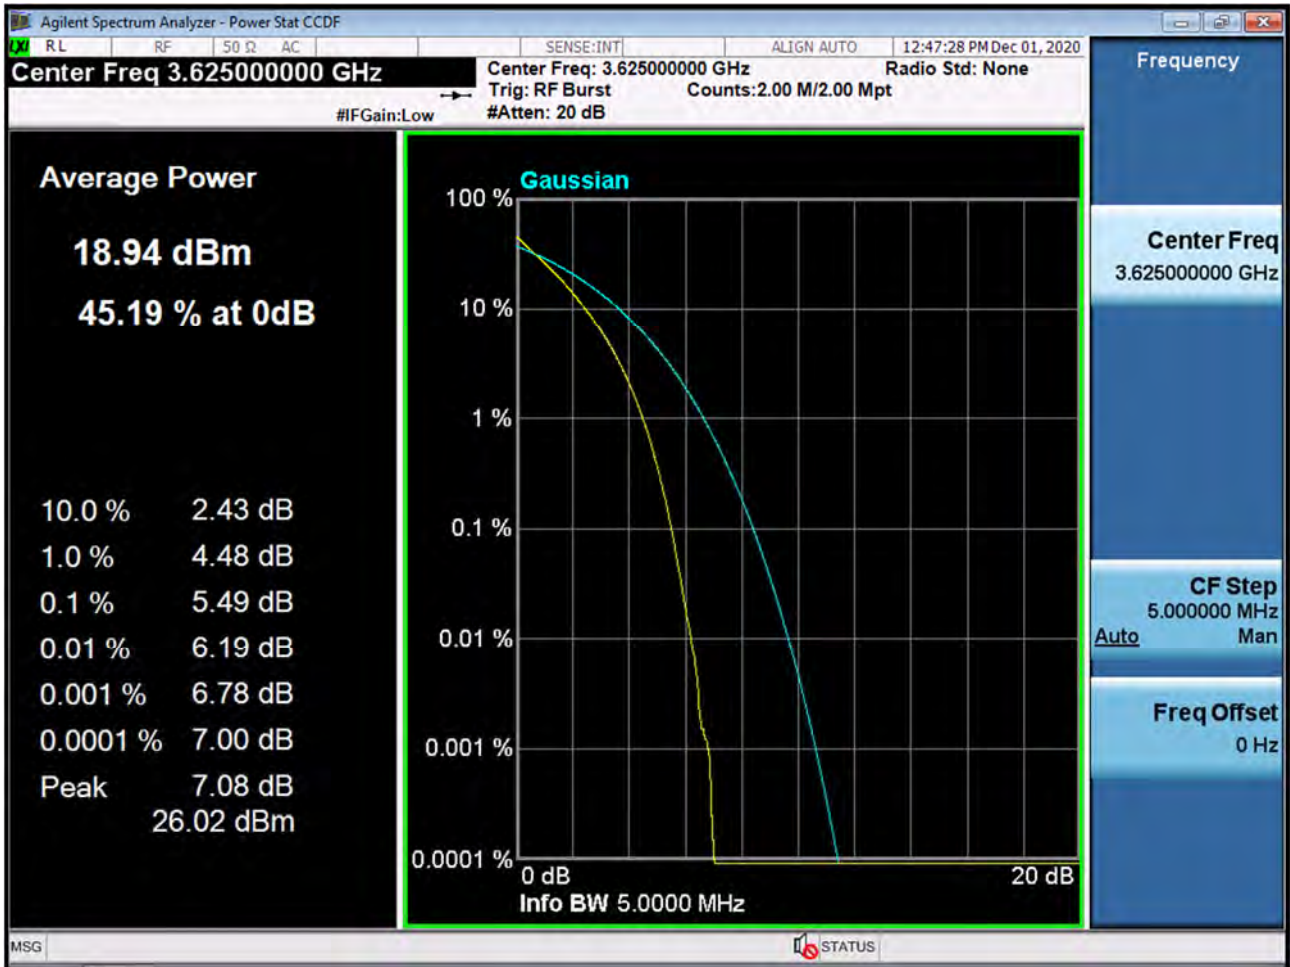


BAND 48. PAR Plot (5M BW\_Ch.55990\_16QAM\_RB25\_0)

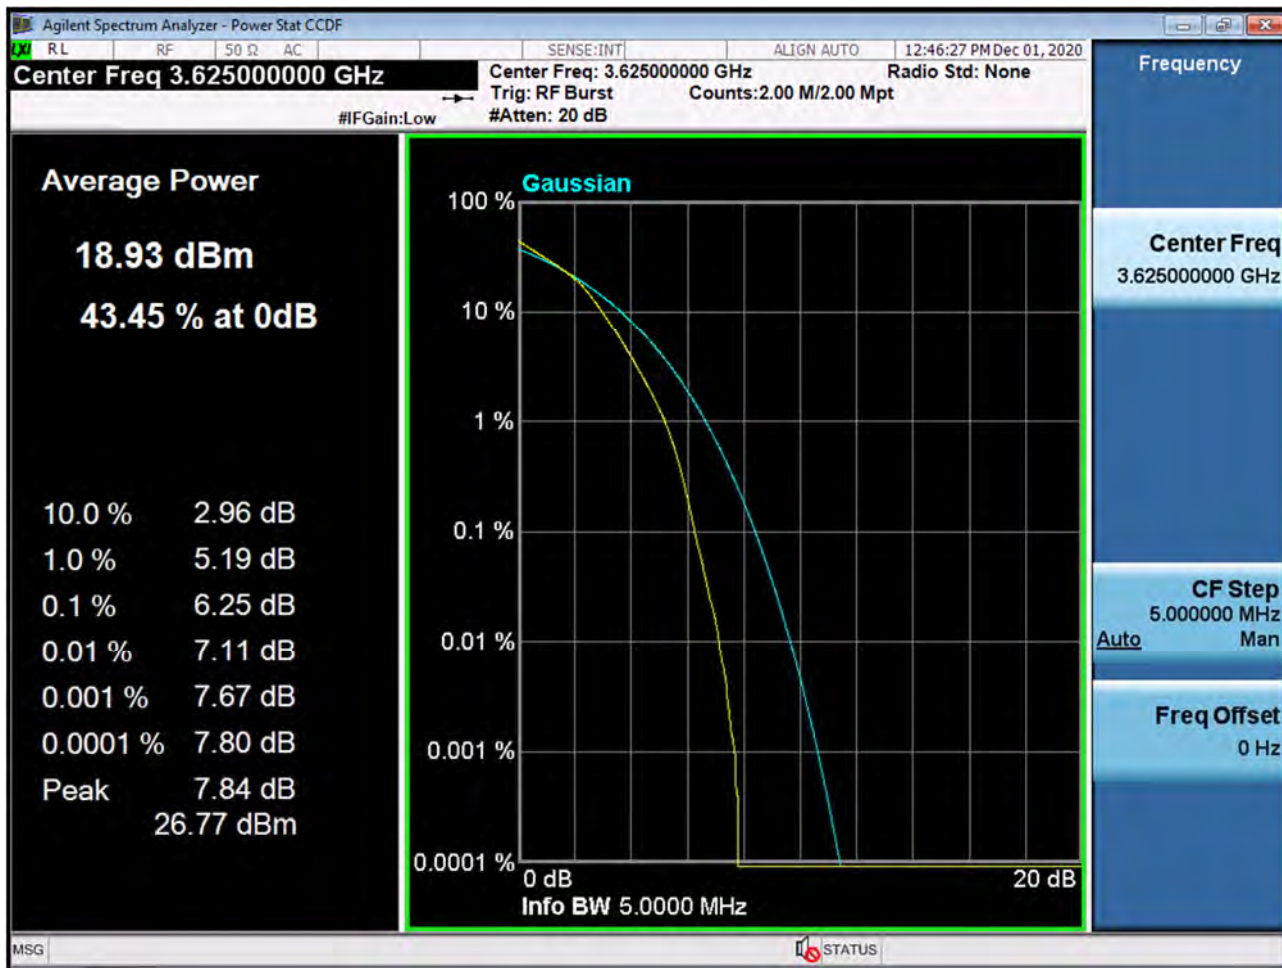





BAND 48. PAR Plot (5M BW\_Ch.55990\_64QAM\_RB25\_0)

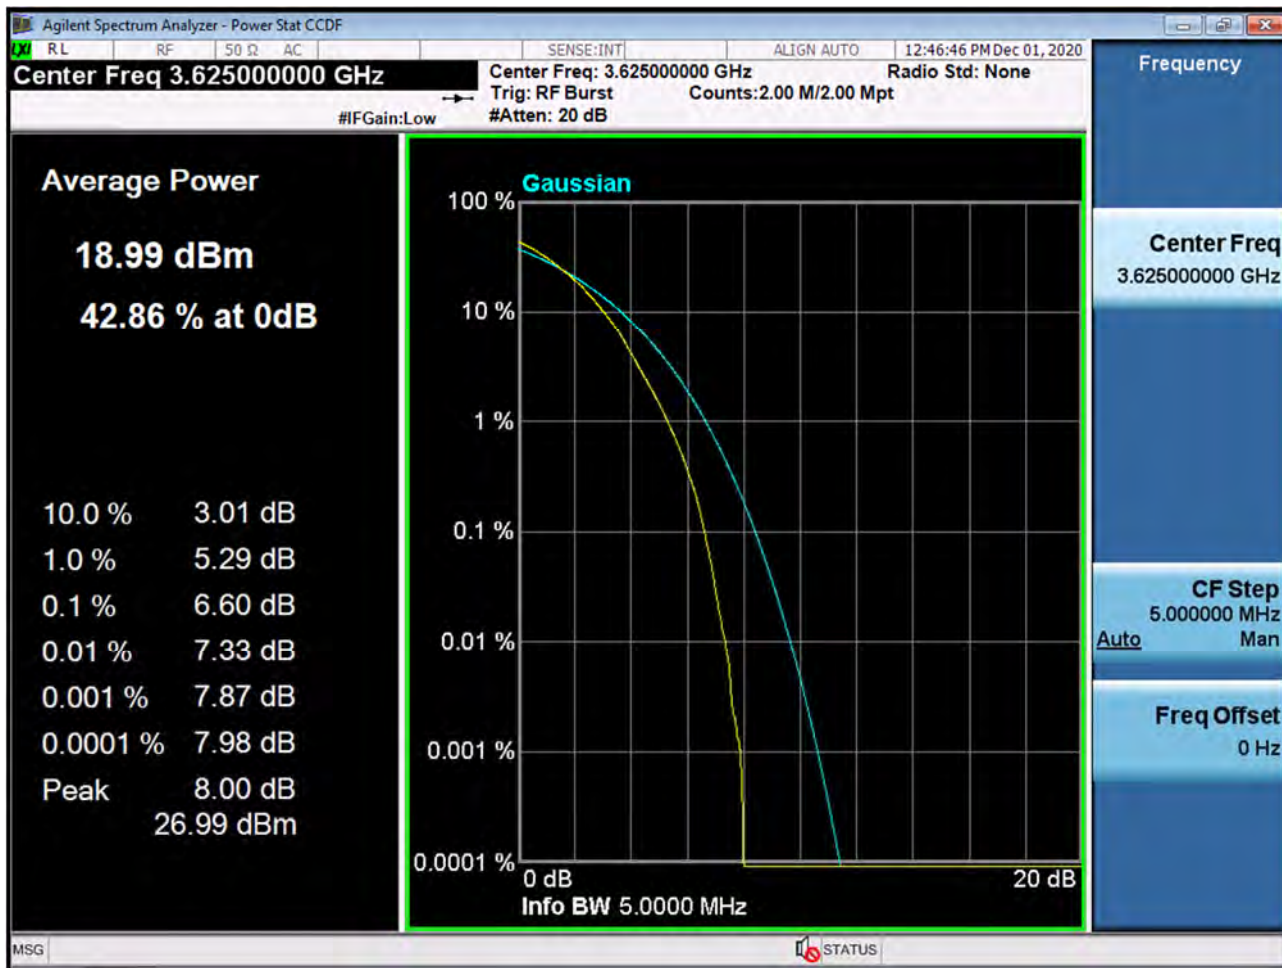


BAND 48. PAR Plot (10M BW\_Ch.55990\_QPSK\_RB50\_0)

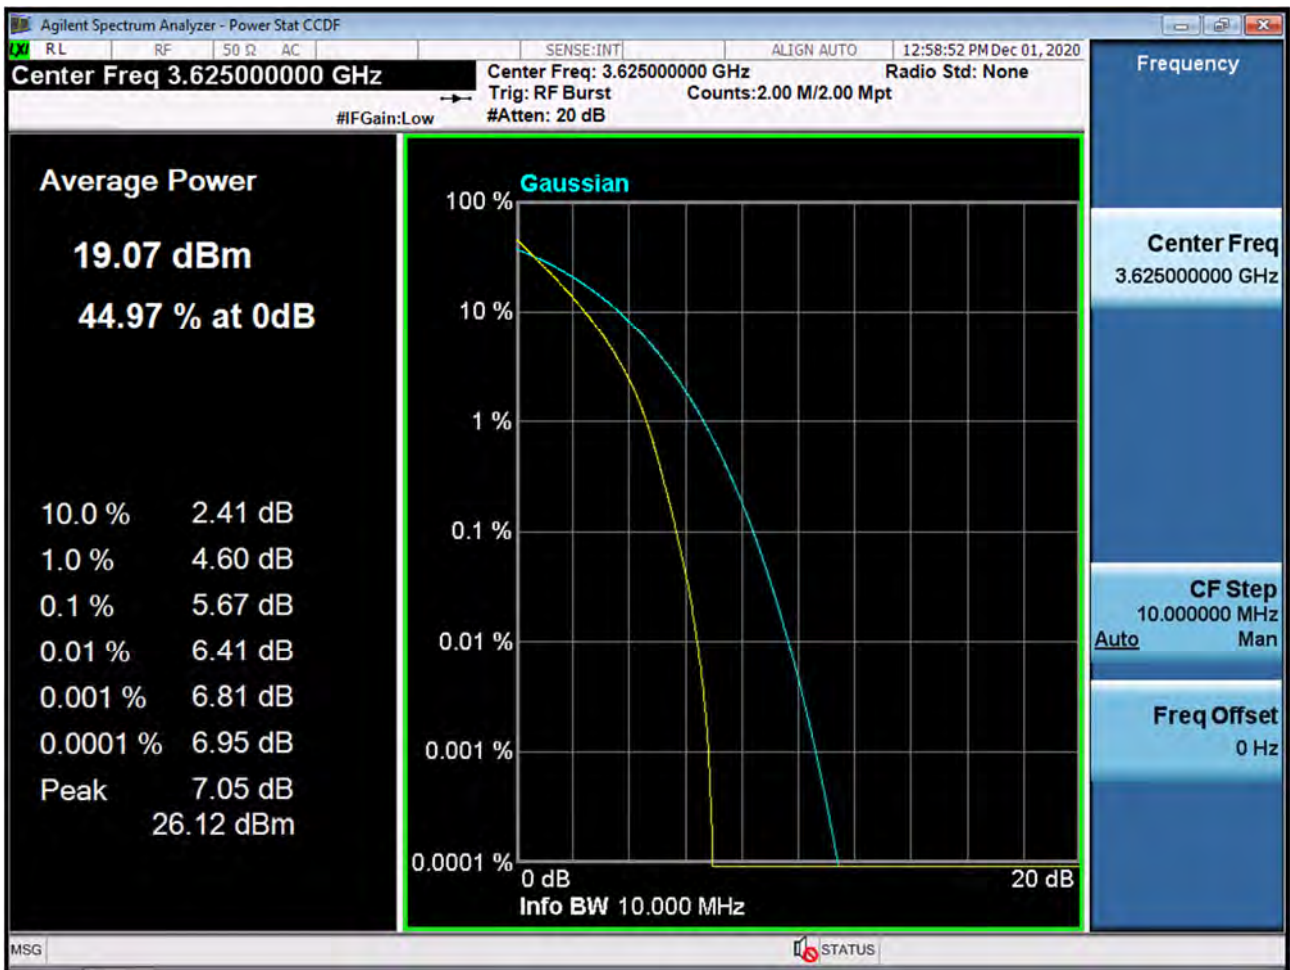

BAND 48. PAR Plot (10M BW\_Ch.55990\_16QAM\_RB50\_0)

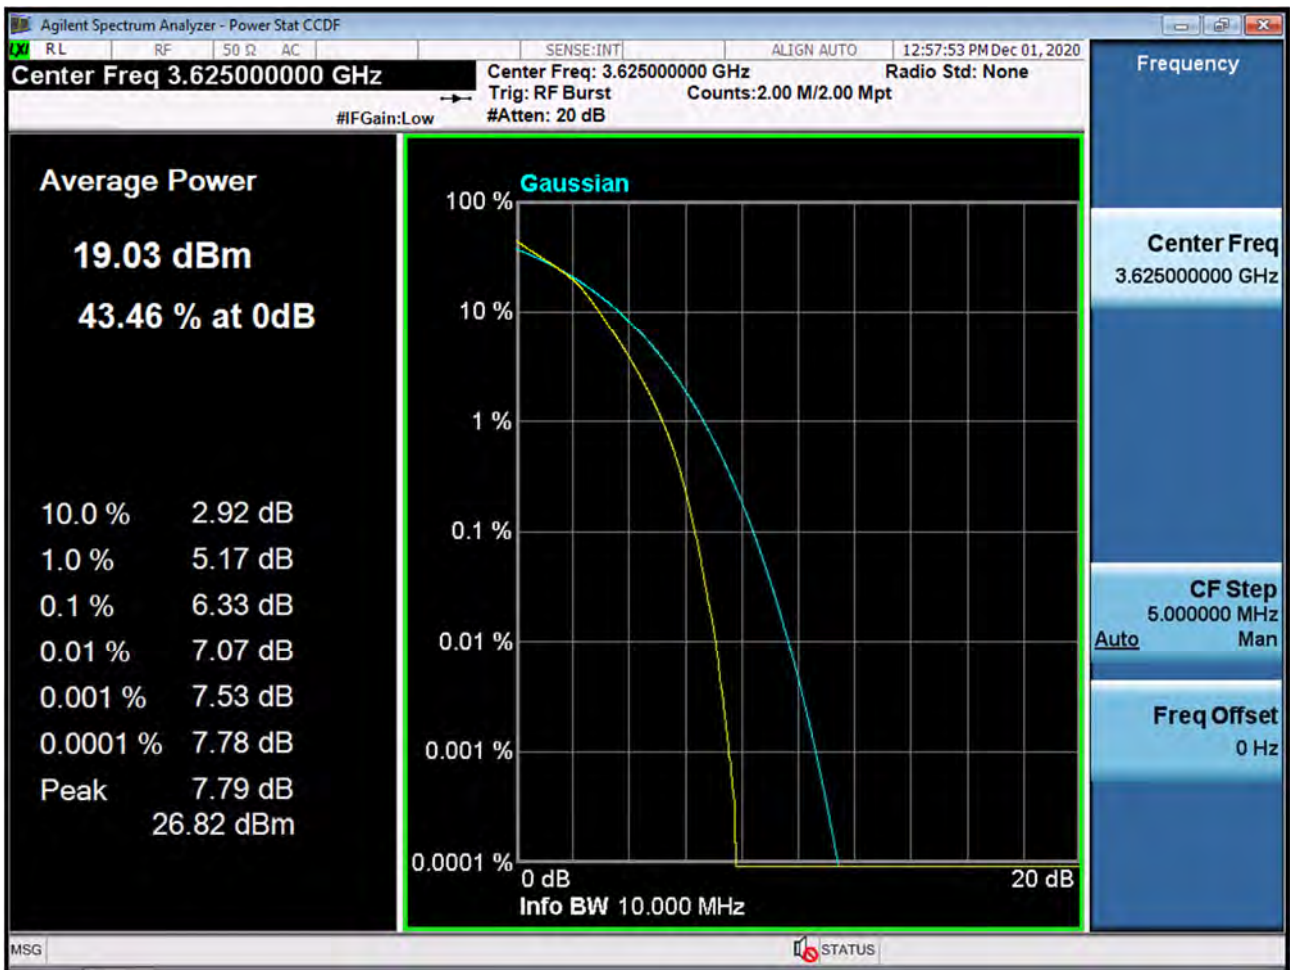


BAND 48. PAR Plot (10M BW\_Ch.55990\_64QAM\_RB50\_0)

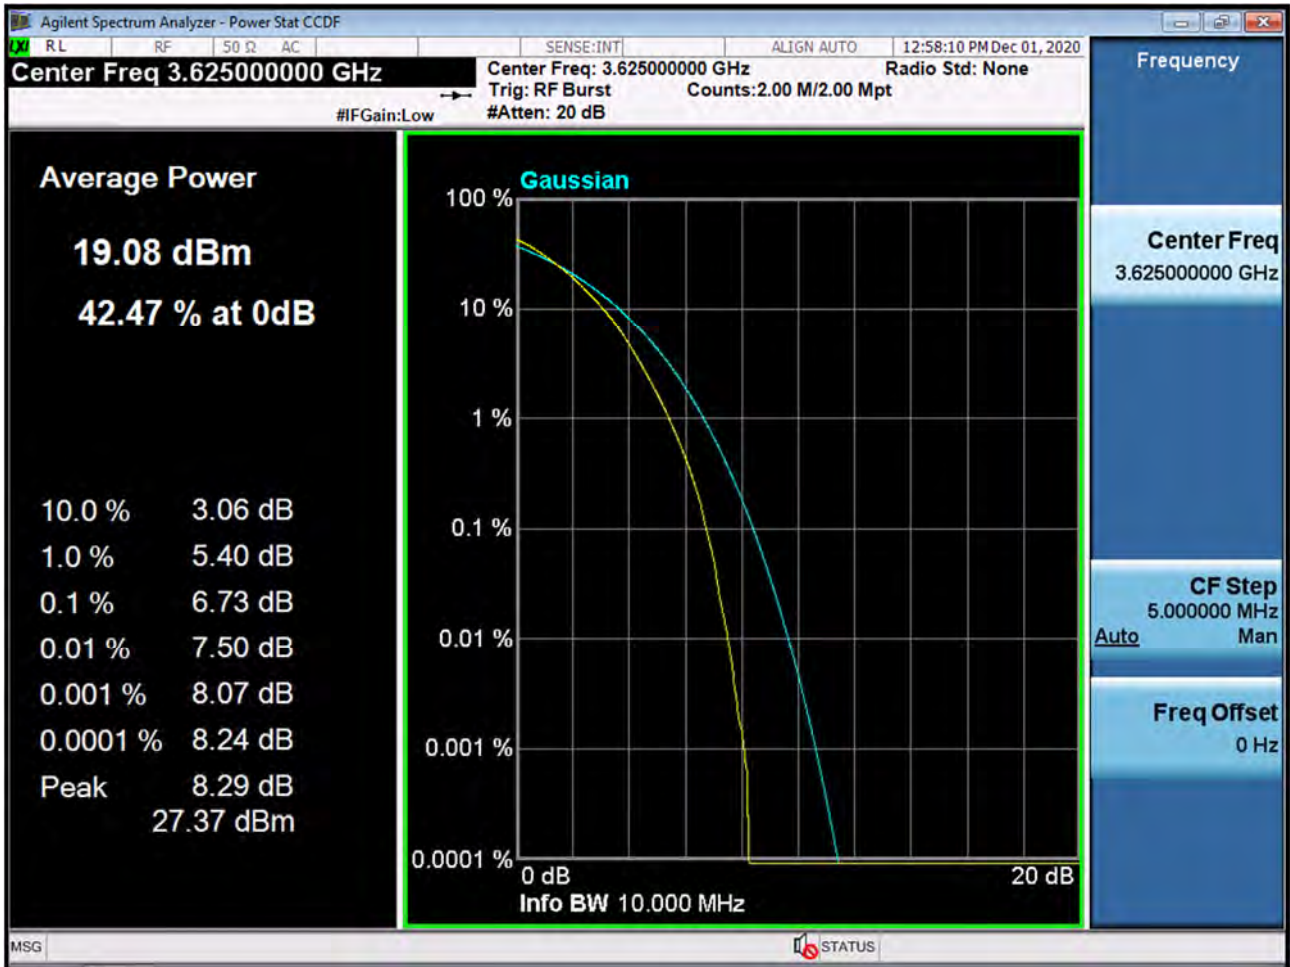





BAND 48. PAR Plot (15M BW\_Ch.55990\_QPSK\_RB75\_0)

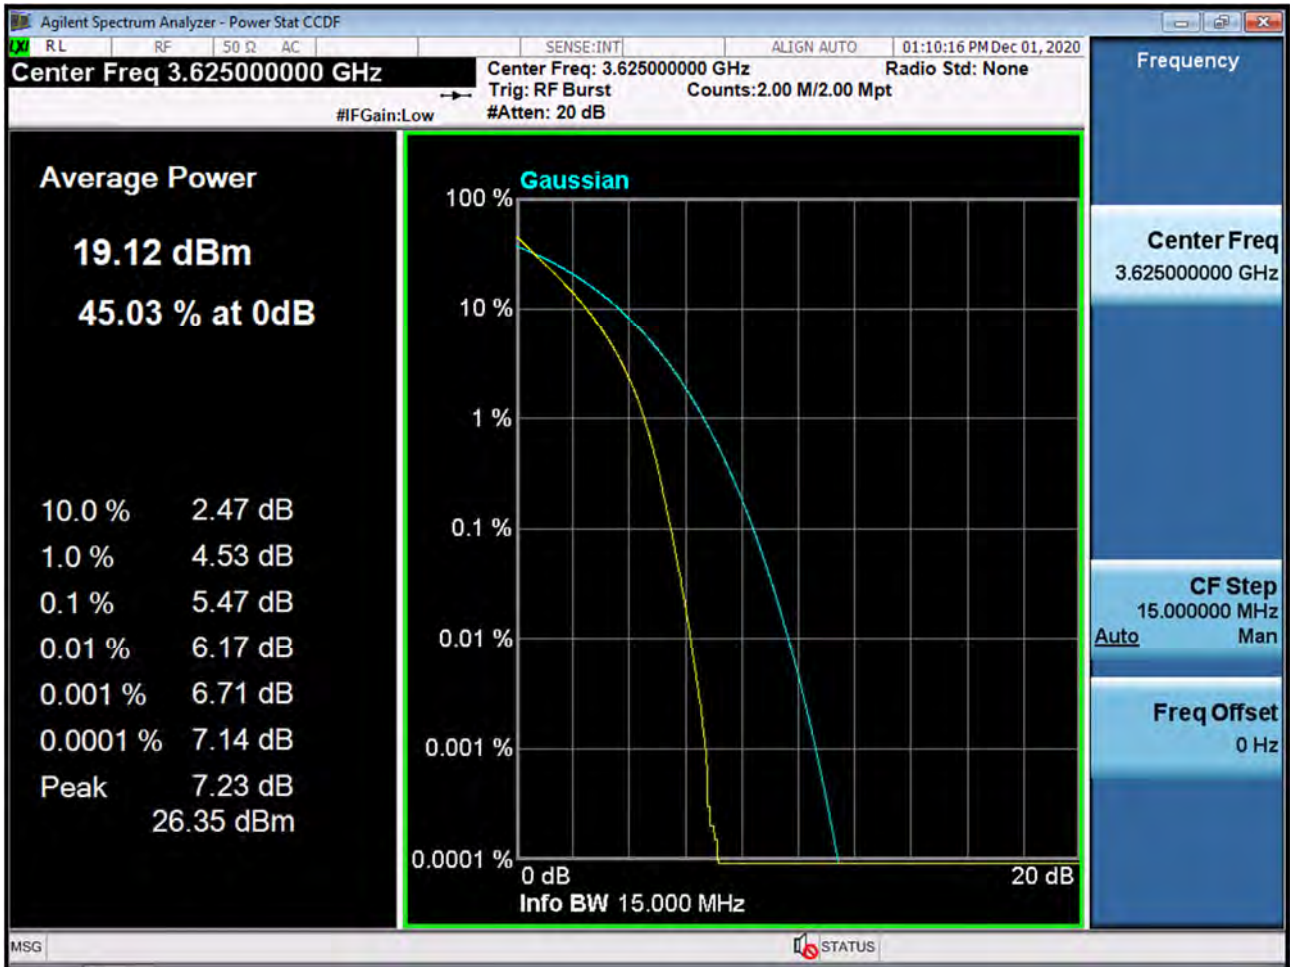


BAND 48. PAR Plot (15M BW\_Ch.55990\_16QAM\_RB75\_0)

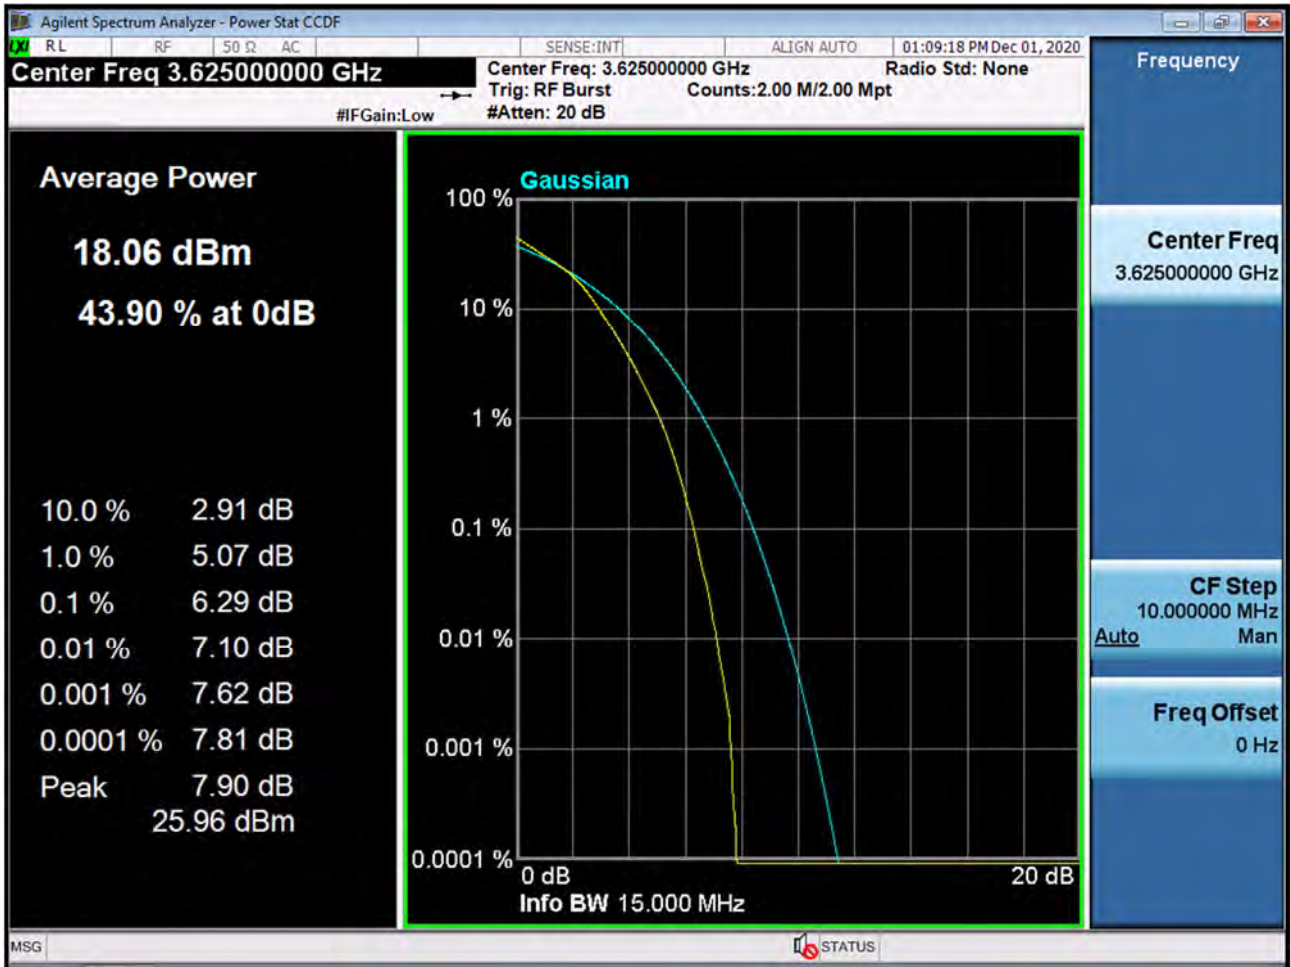

BAND 48. PAR Plot (15M BW\_Ch.55990\_64QAM\_RB75\_0)

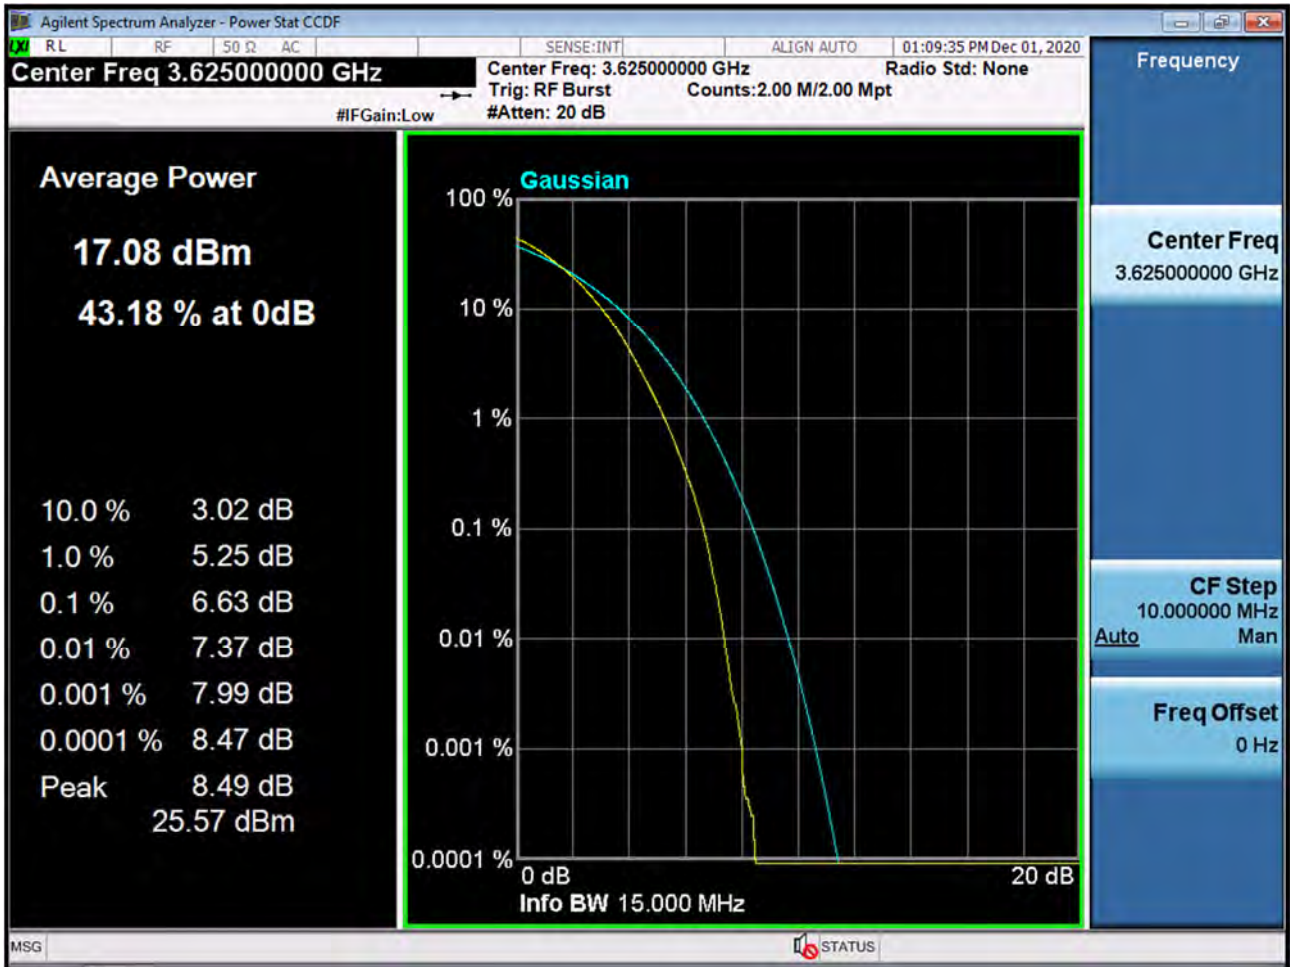


BAND 48. PAR Plot (20M BW\_Ch.55990\_QPSK\_RB100\_0)

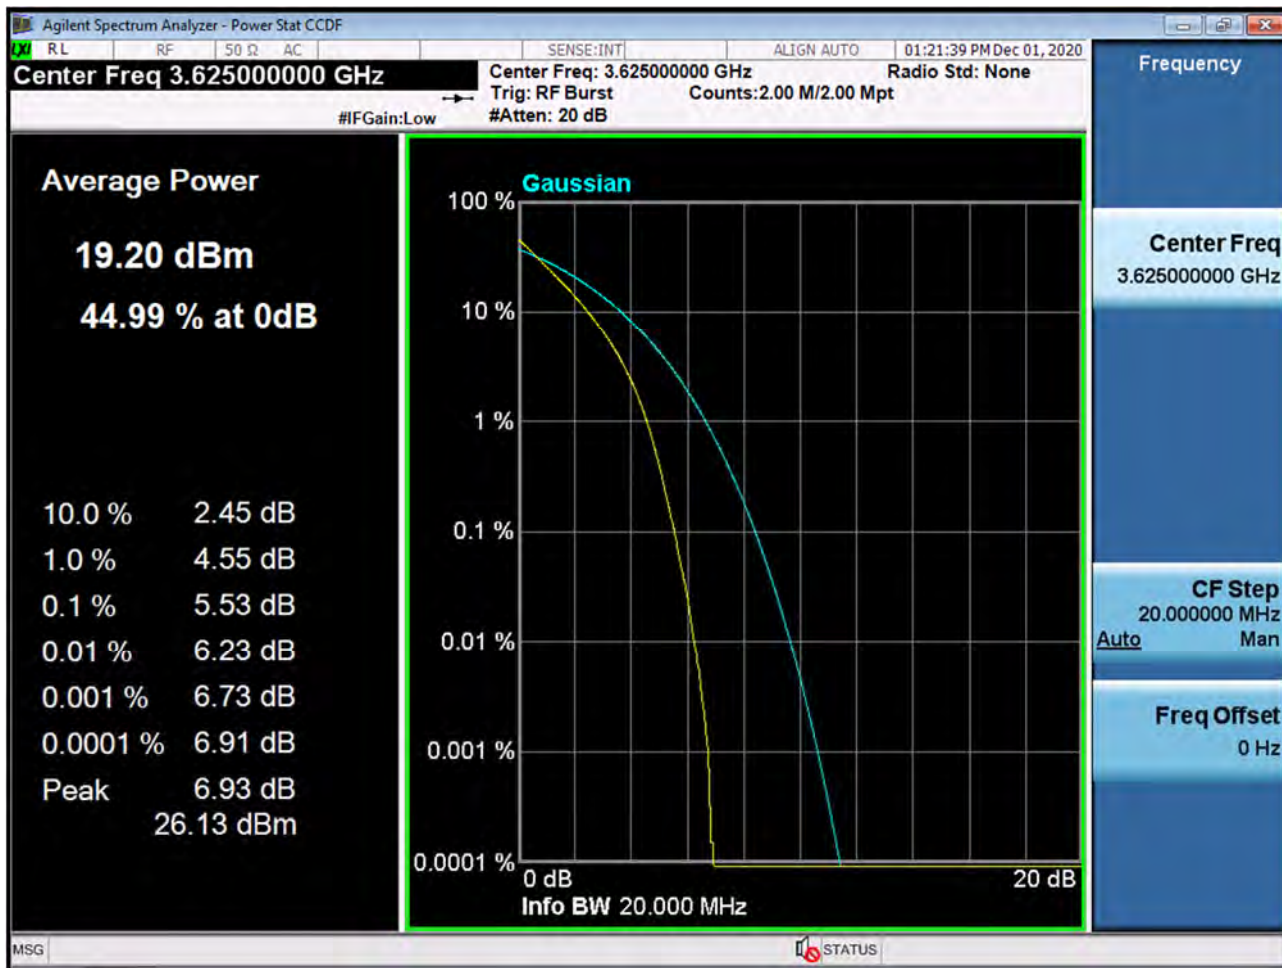




BAND 48. PAR Plot (20M BW\_Ch.55990\_16QAM\_RB100\_0)

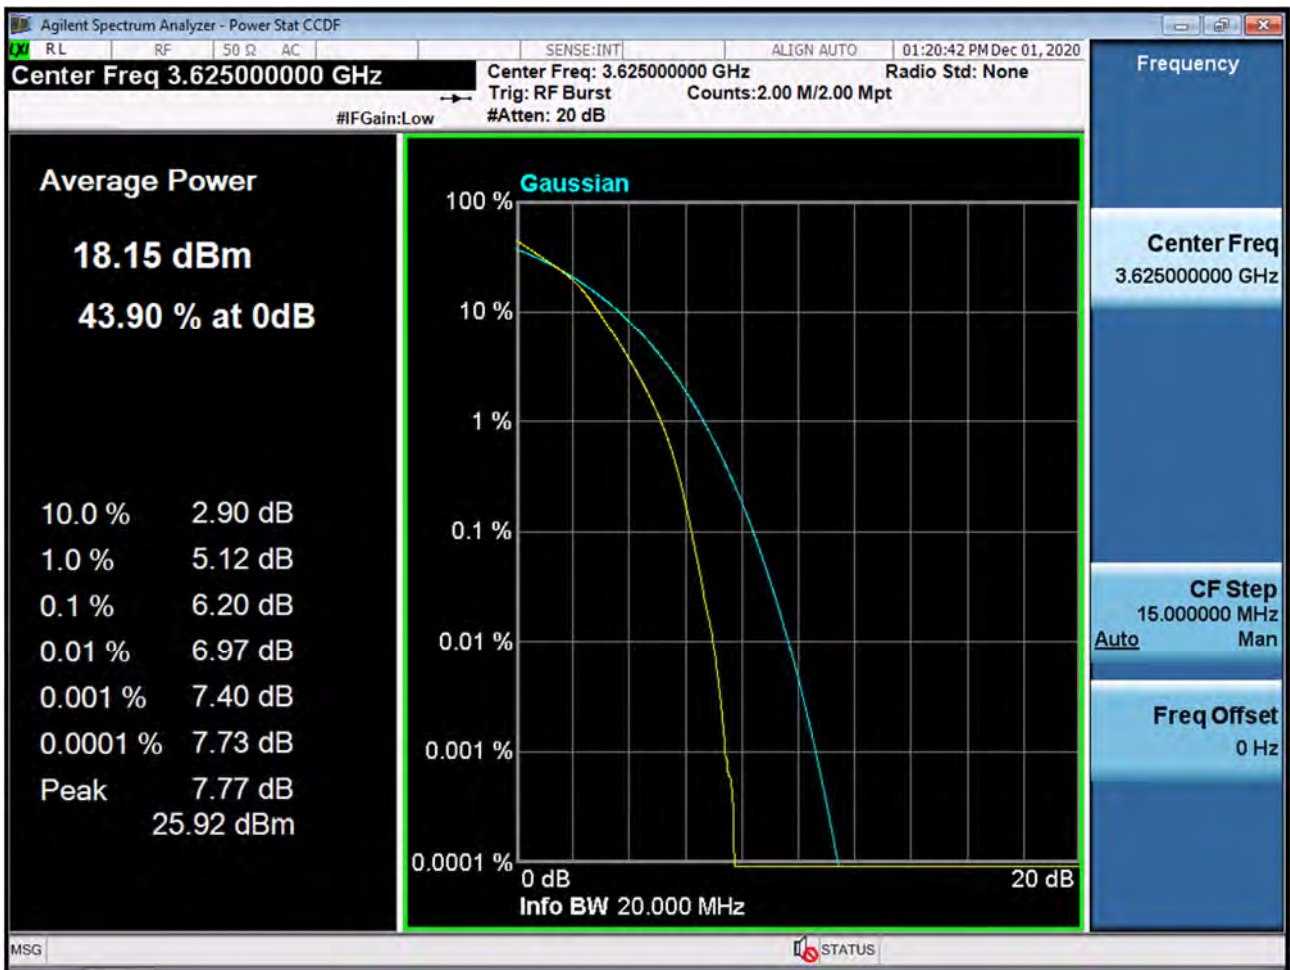

BAND 48. PAR Plot (20M BW\_Ch.55990\_64QAM\_RB100\_0)

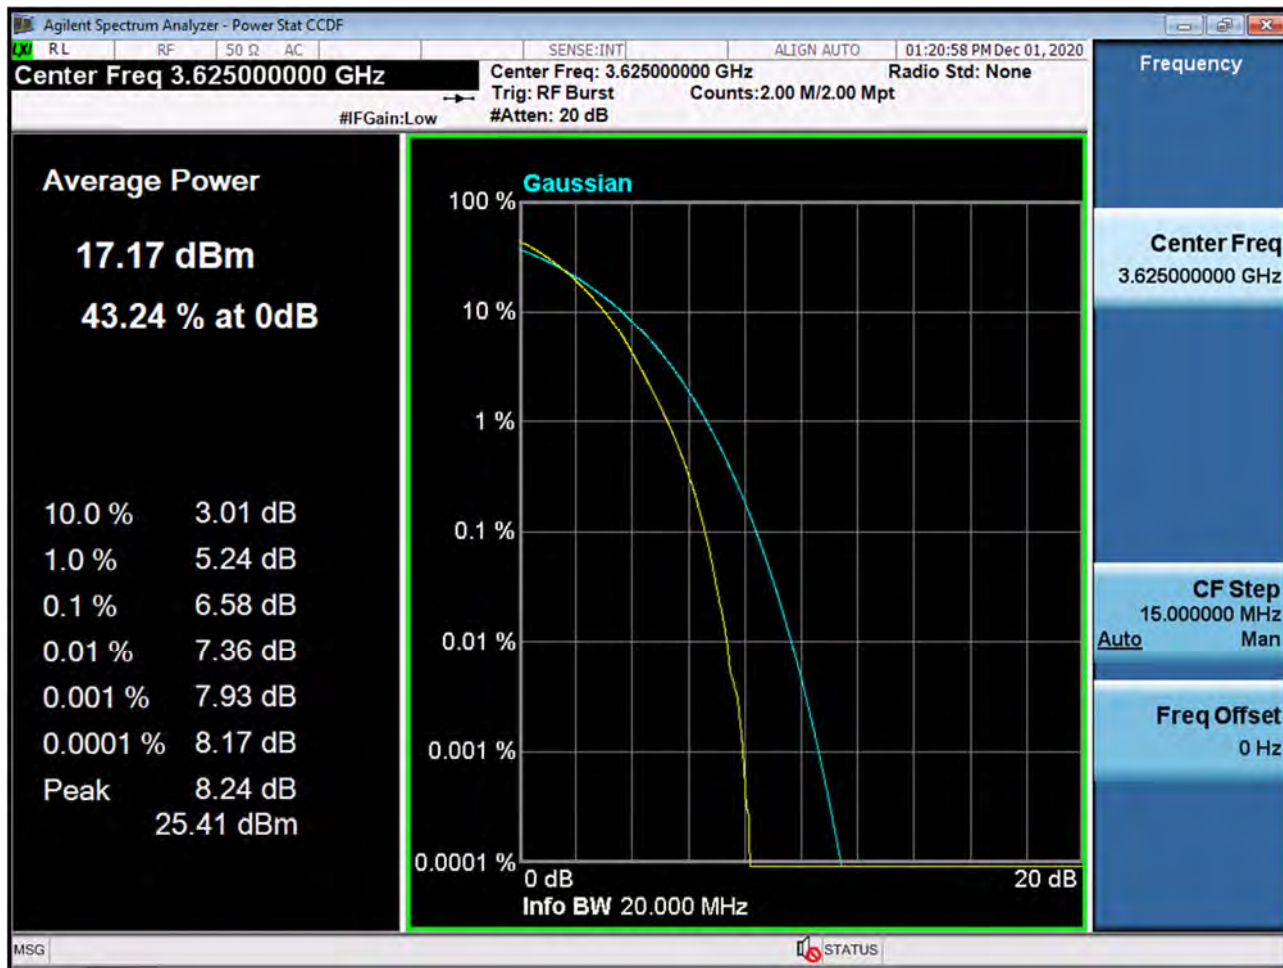

BAND 48. 5M BandEdge(Lower)\_Low\_3552.5MHz\_QPSK\_FullIRB




BAND 48.5M\_BandEdge(Upper)\_Low\_3552.5MHz\_QPSK\_FullRB







BAND 48. 5M\_BandEdge(Lower)\_Low\_3552.5MHz\_QPSK\_1RB

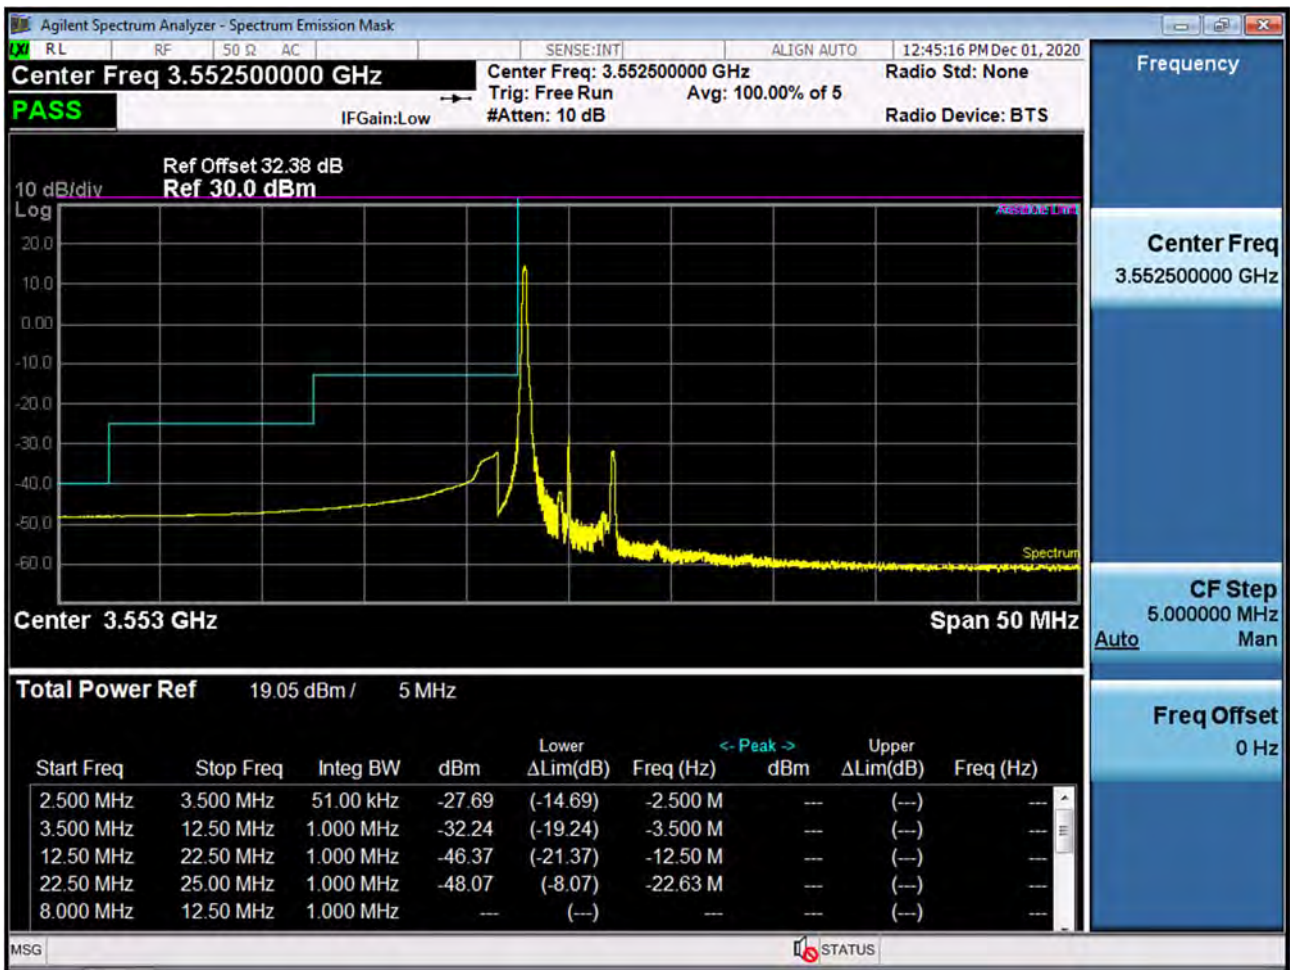


BAND 48. 5M\_BandEdge(Upper)\_Low\_3552.5MHz\_QPSK\_1RB

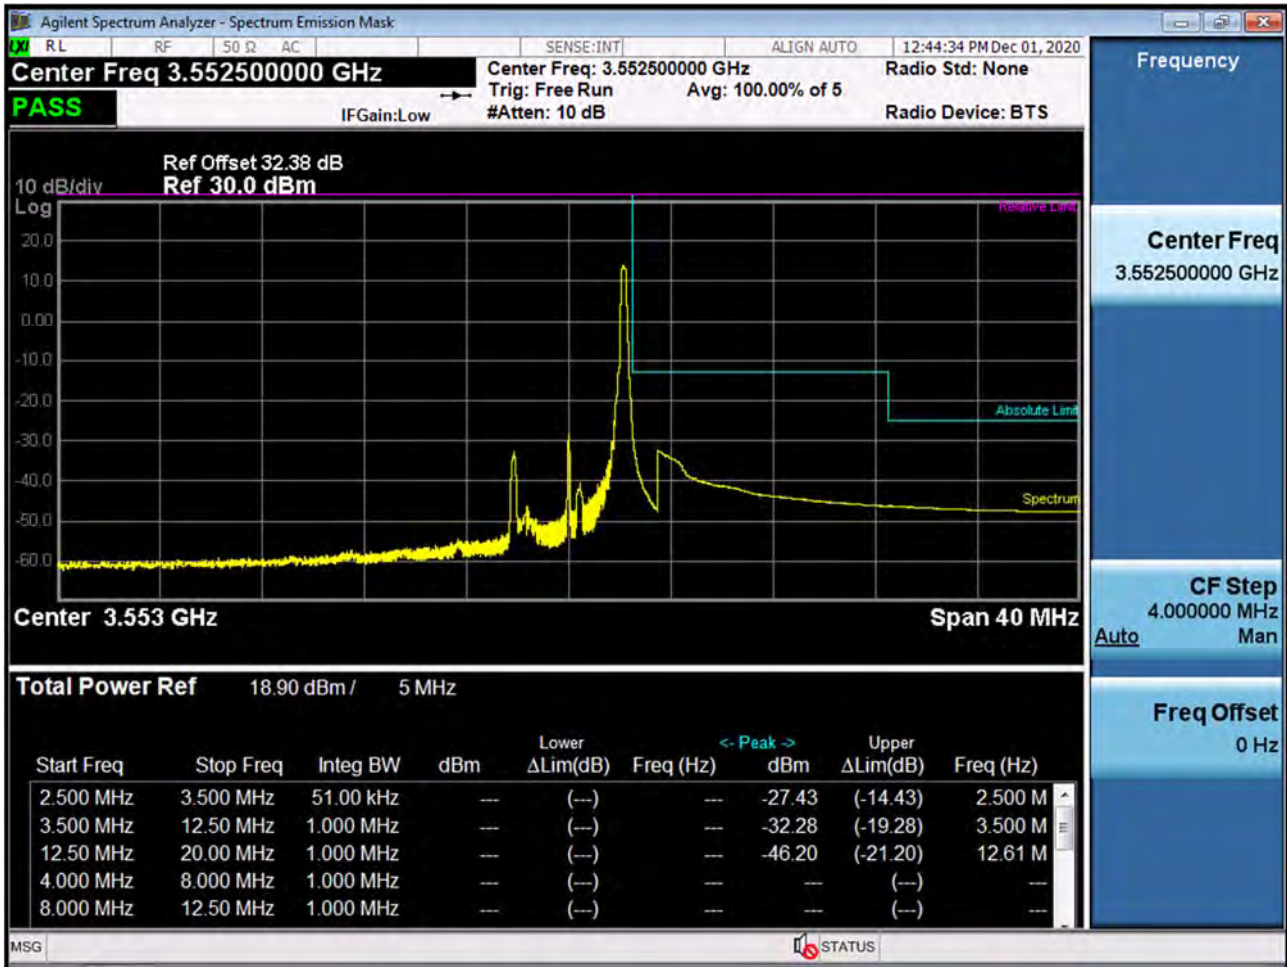

BAND 48. 5M\_BandEdge(Center)\_Mid\_3625MHz\_QPSK\_FullRB

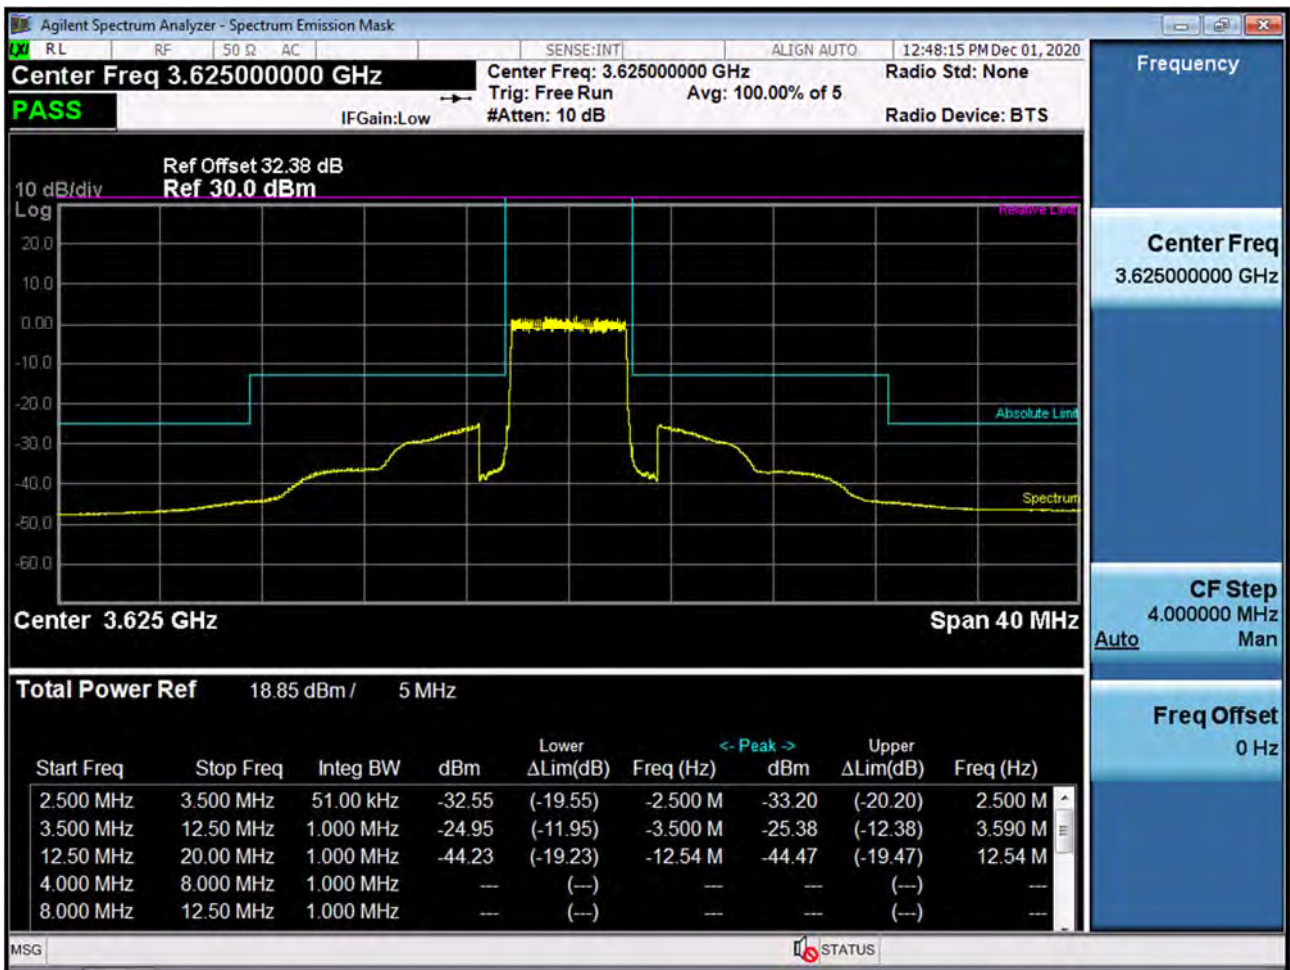


BAND 48. 5M\_BandEdge(Lower)\_Mid\_3625MHz\_QPSK\_1RB

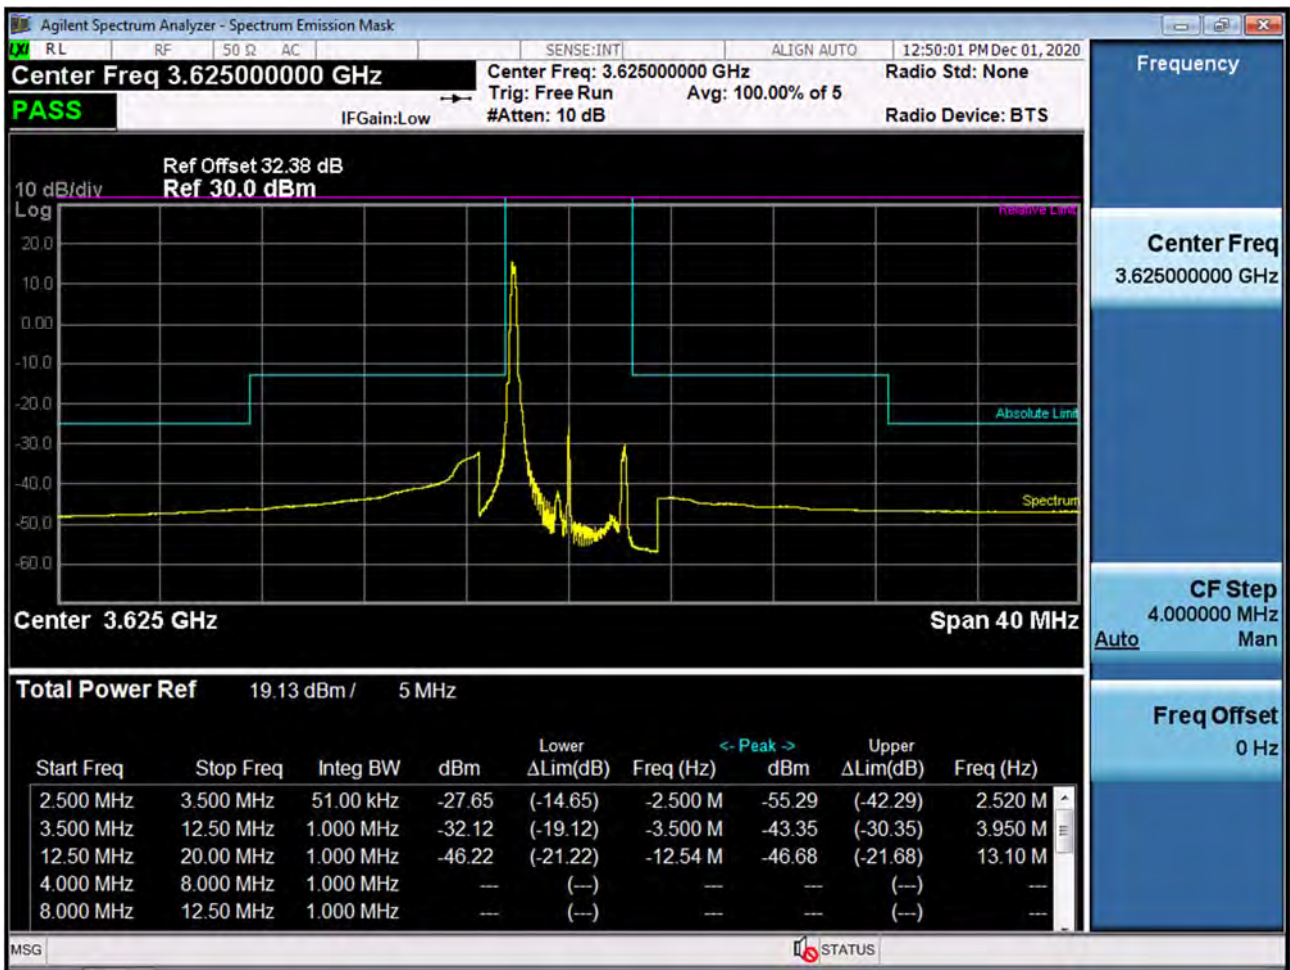



BAND 48. 5M\_BandEdge(Upper)\_Mid\_3625MHz\_QPSK\_1RB

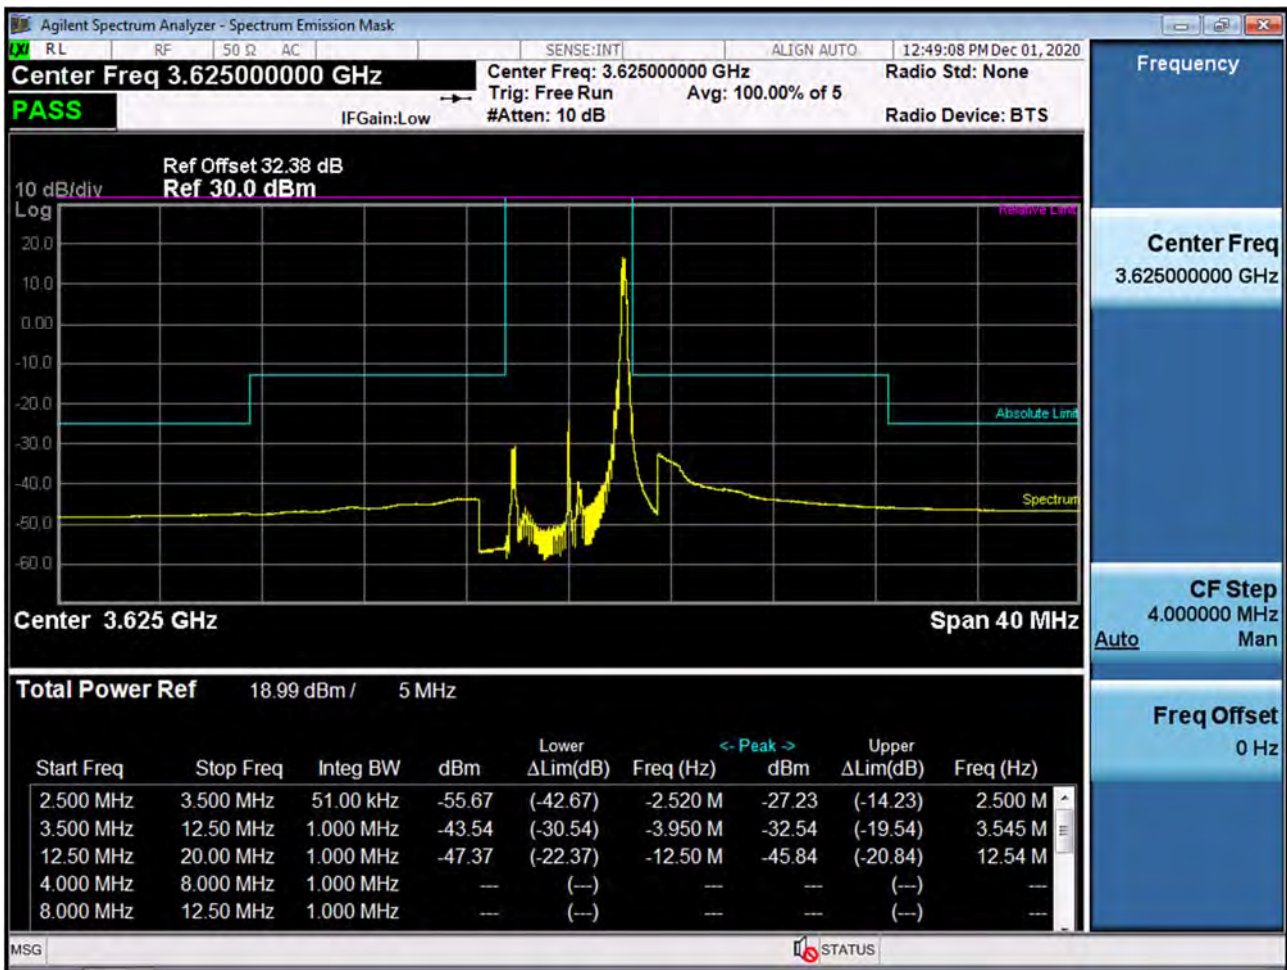


BAND 48. 5M\_BandEdge(Lower)\_High\_3697.5MHz\_QPSK\_FullRB



BAND 48. 5M\_BandEdge(Upper)\_High\_3697.5MHz\_QPSK\_FullRB




BAND 48. 5M\_BandEdge(Lower)\_High\_3697.5MHz\_QPSK\_1RB

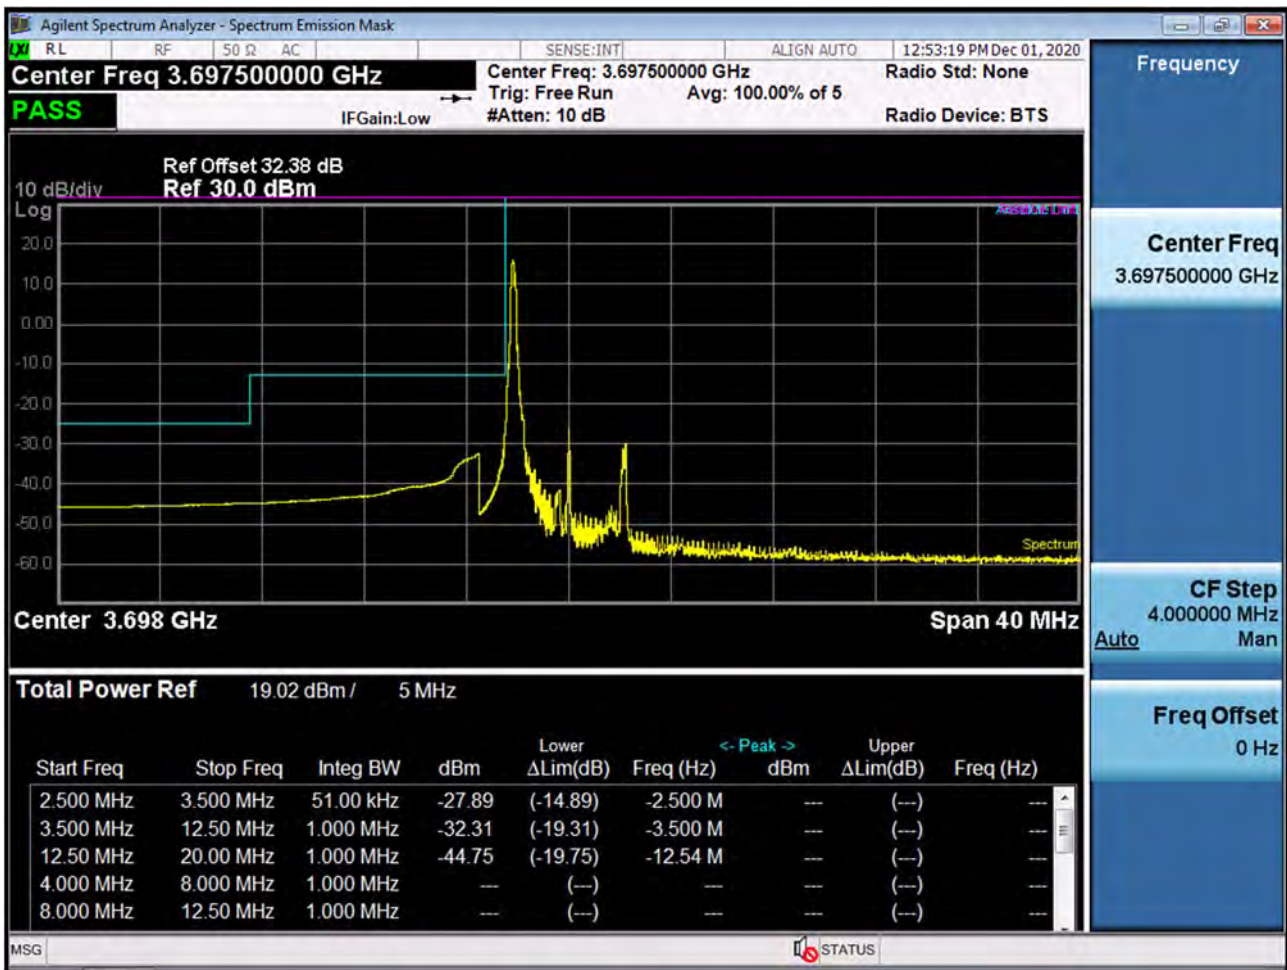




BAND 48. 5M\_BandEdge(Upper)\_High\_3697.5MHz\_QPSK\_1RB

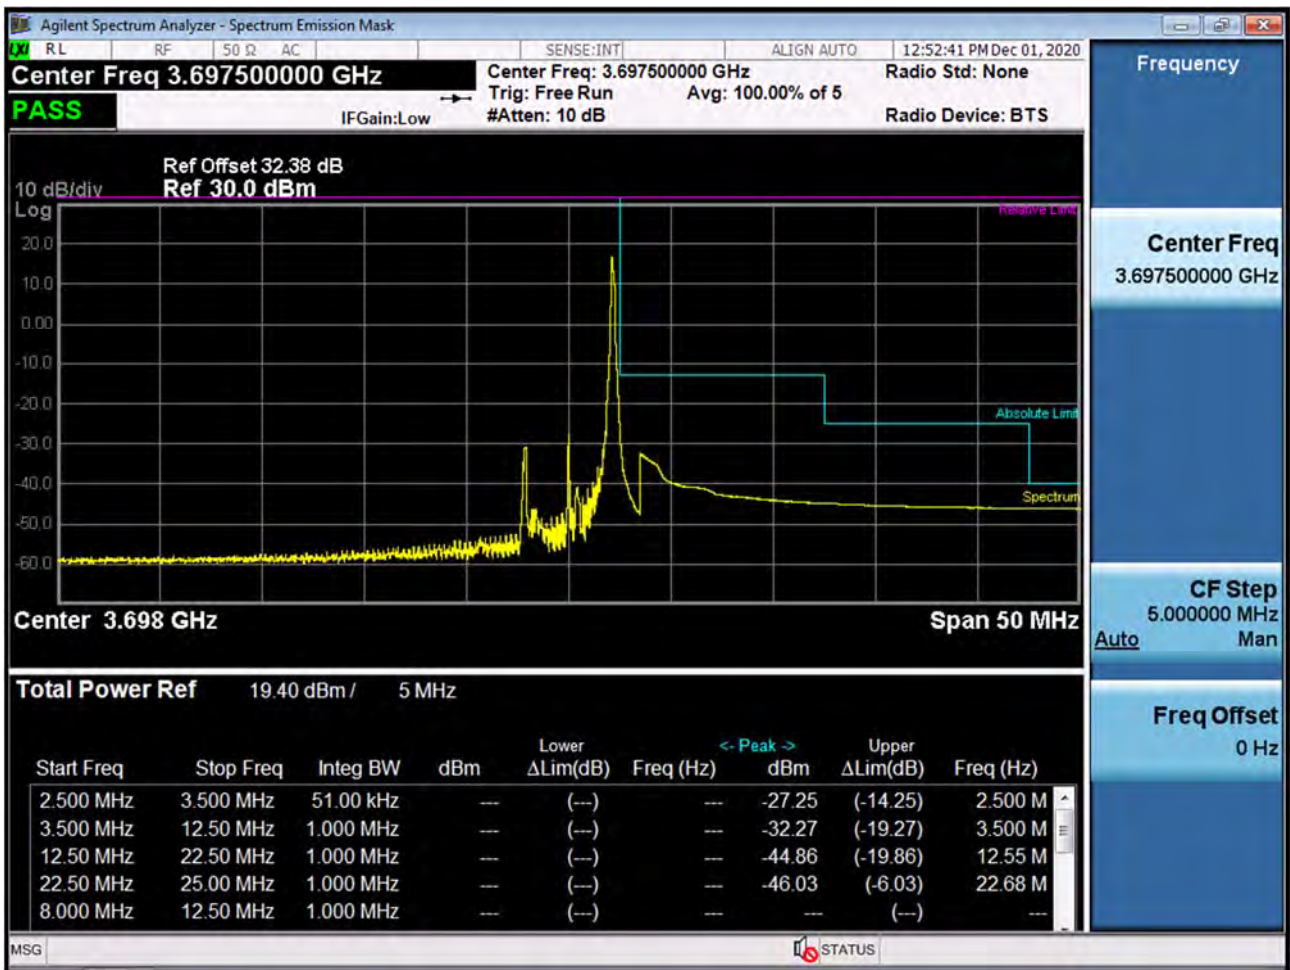

BAND 48. 10M\_BandEdge(Lower)\_Low\_3555MHz\_QPSK\_FullRB



BAND 48. 10M\_BandEdge(Upper)\_Low\_3555MHz\_QPSK\_FullRB

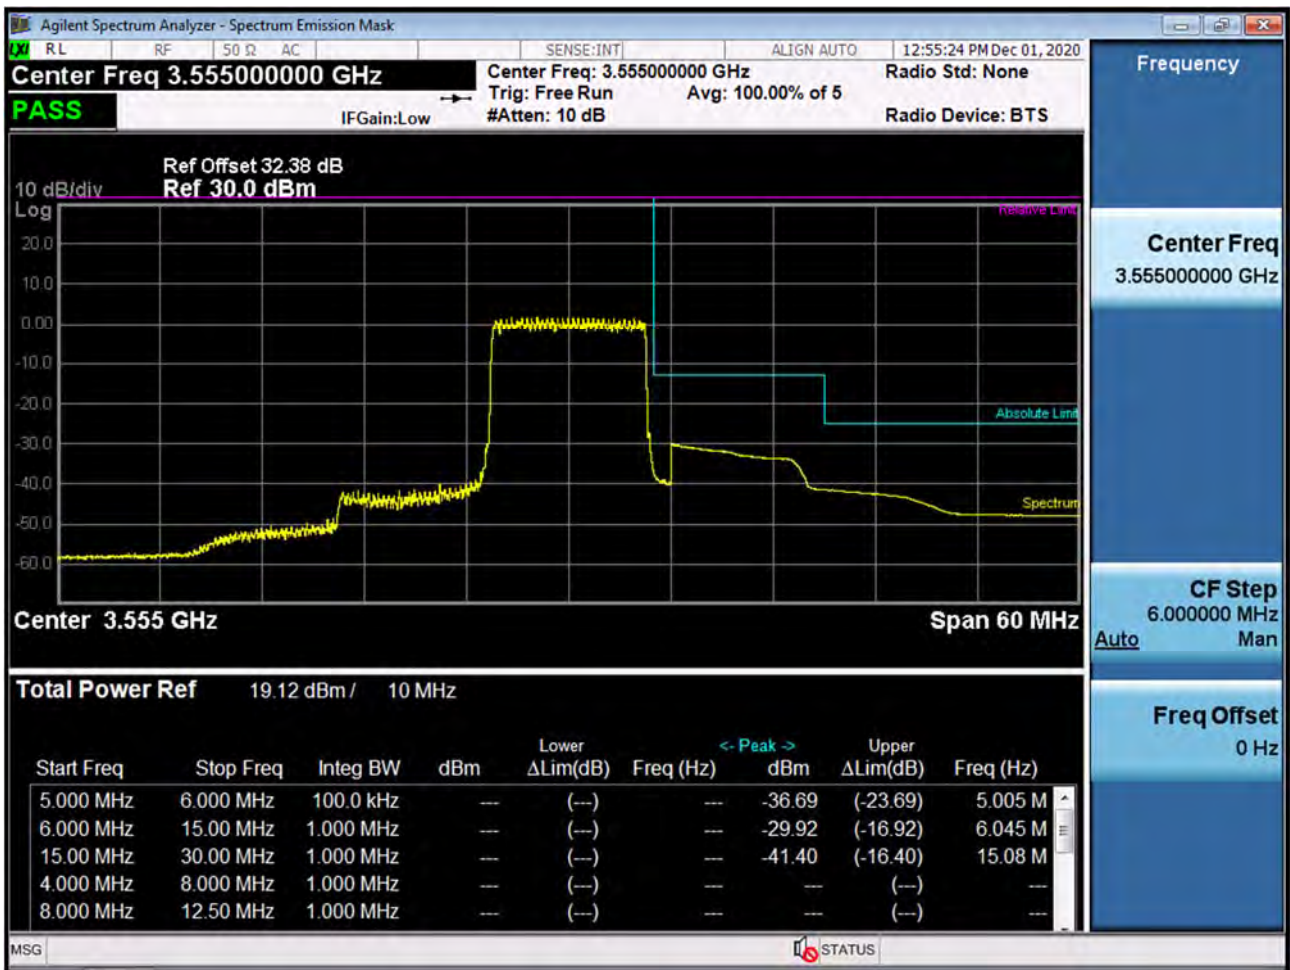


BAND 48. 10M\_BandEdge(Lower)\_Low\_3555MHz\_QPSK\_1RB







BAND 48. 10M\_BandEdge(Upper)\_Low\_3555MHz\_QPSK\_1RB

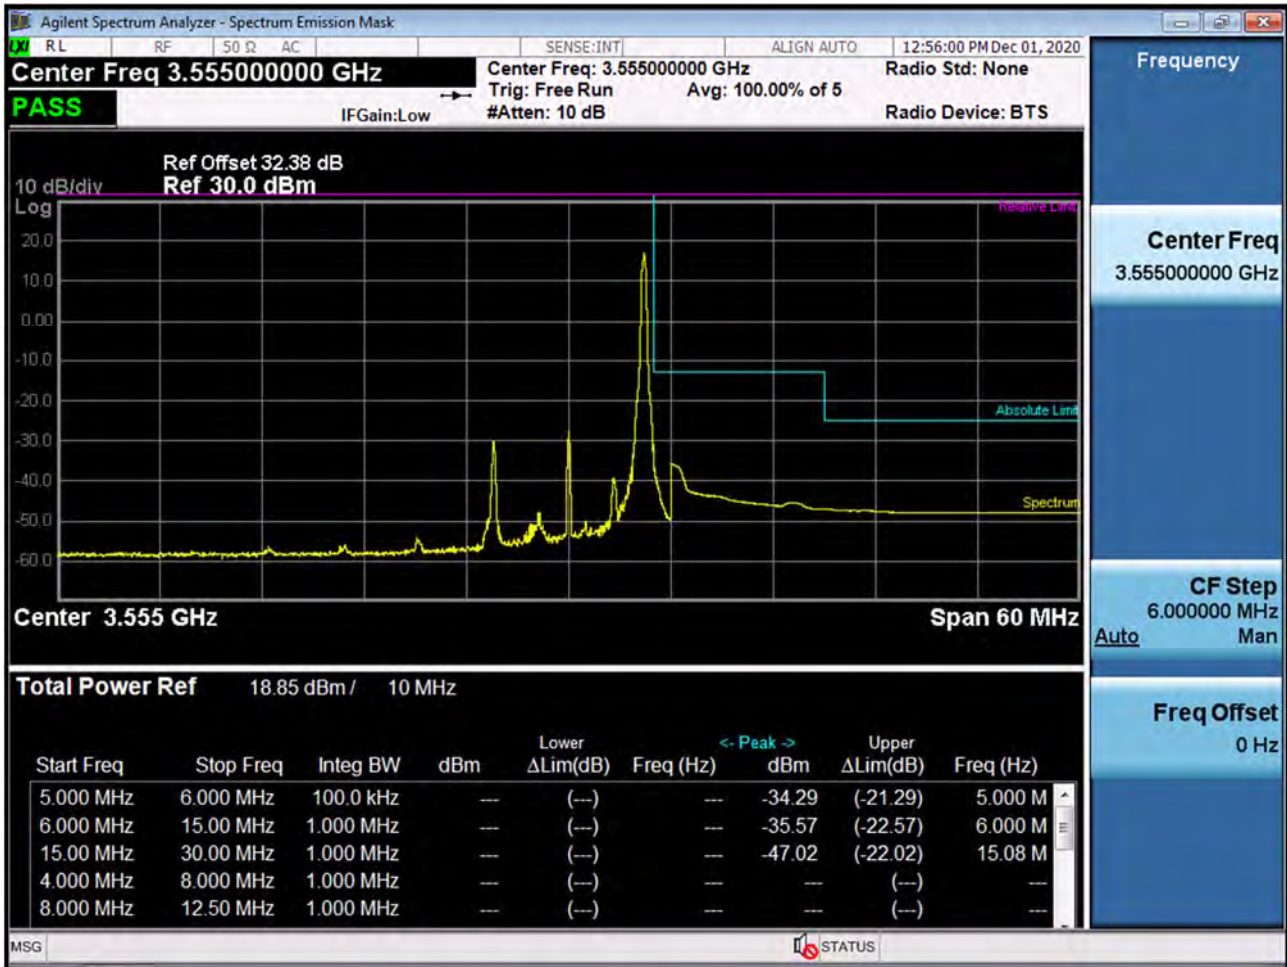

BAND 48. 10M\_BandEdge(Center)\_Mid\_3625MHz\_QPSK\_FullRB

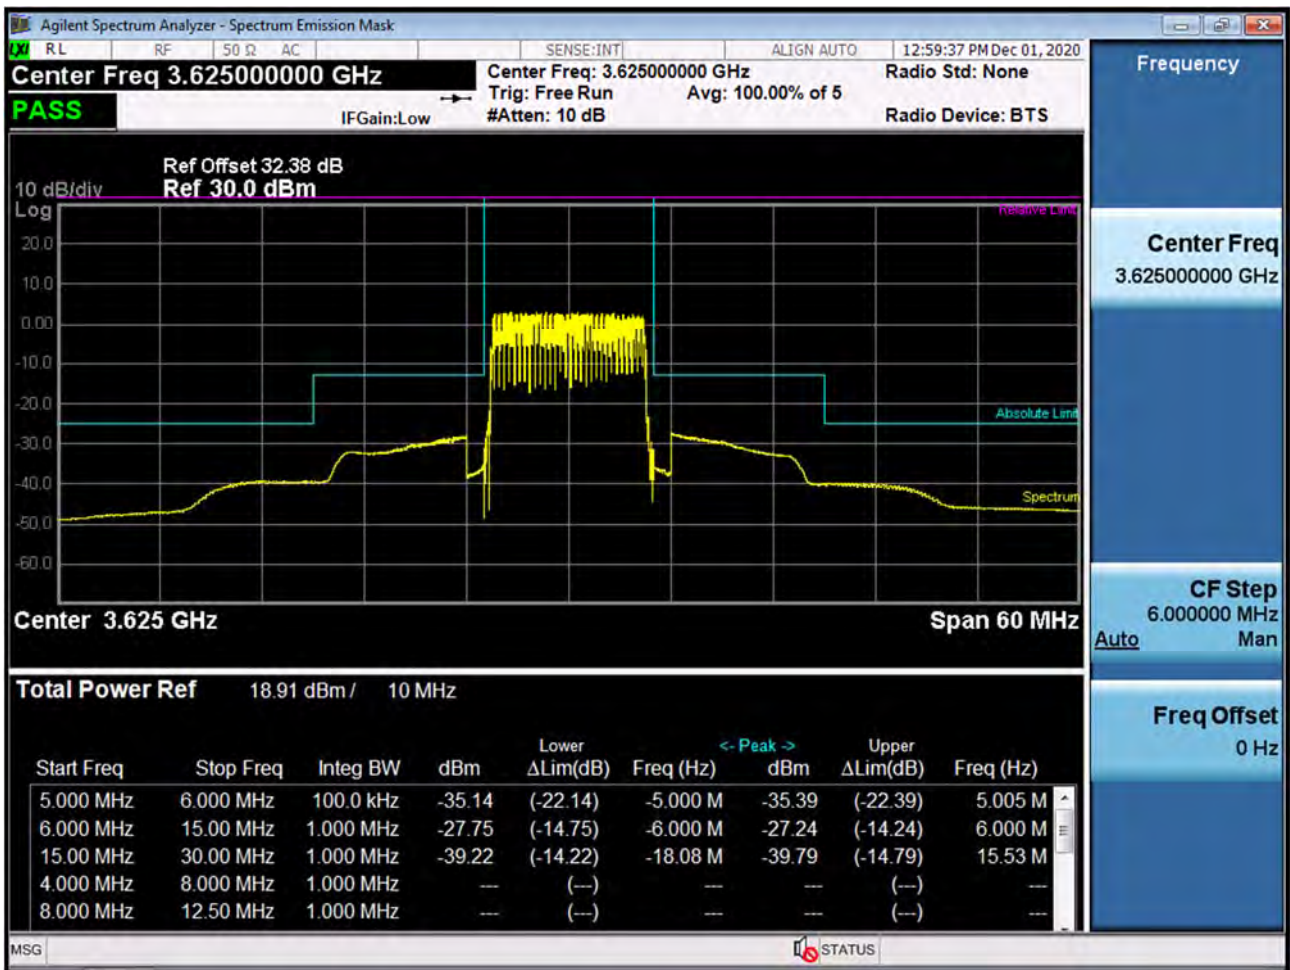


BAND 48. 10M\_BandEdge(Lower)\_Mid\_3625MHz\_QPSK\_1RB

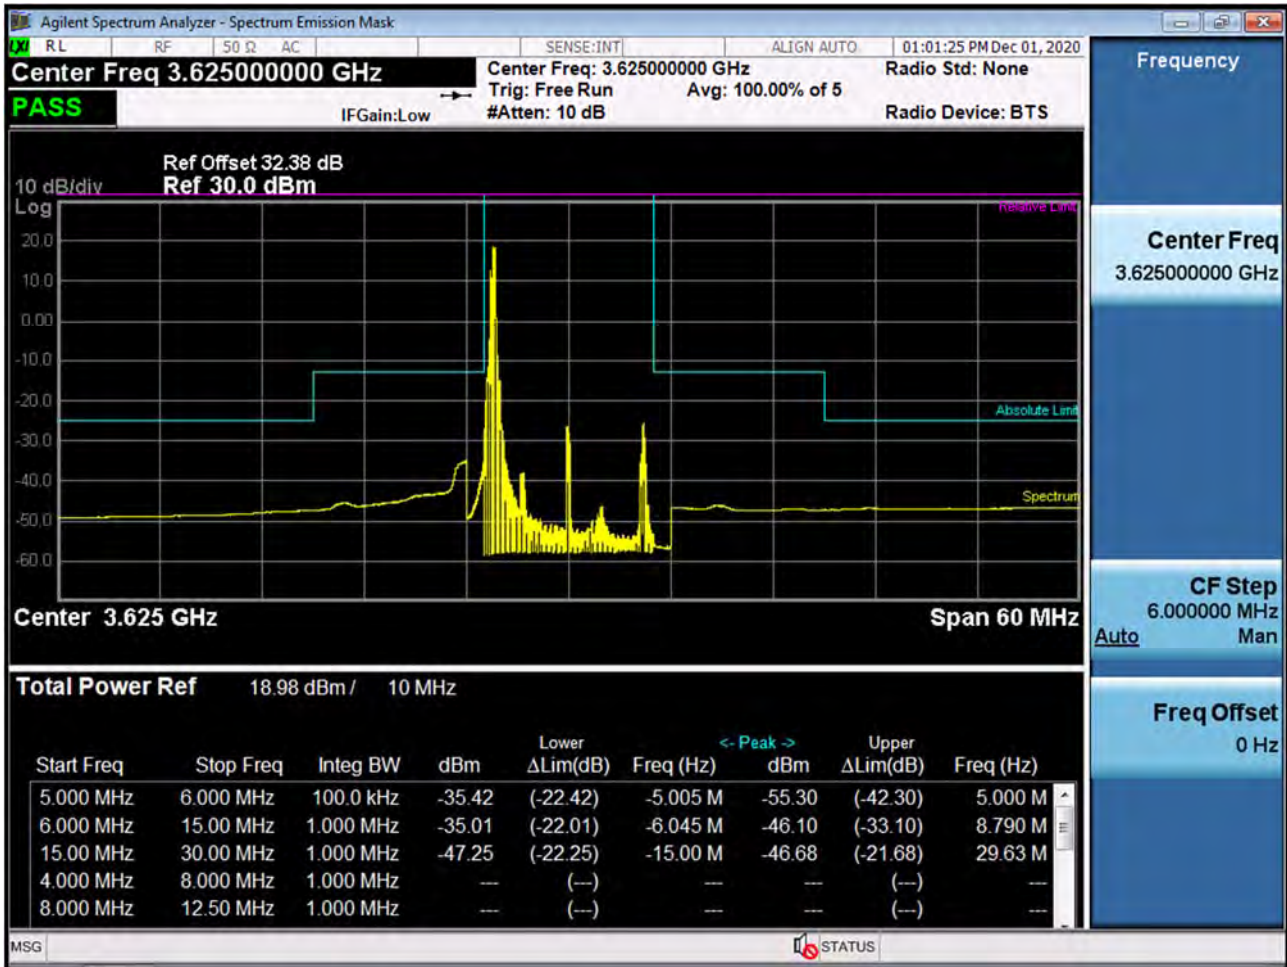



BAND 48. 10M\_BandEdge(Upper)\_Mid\_3625MHz\_QPSK\_1RB

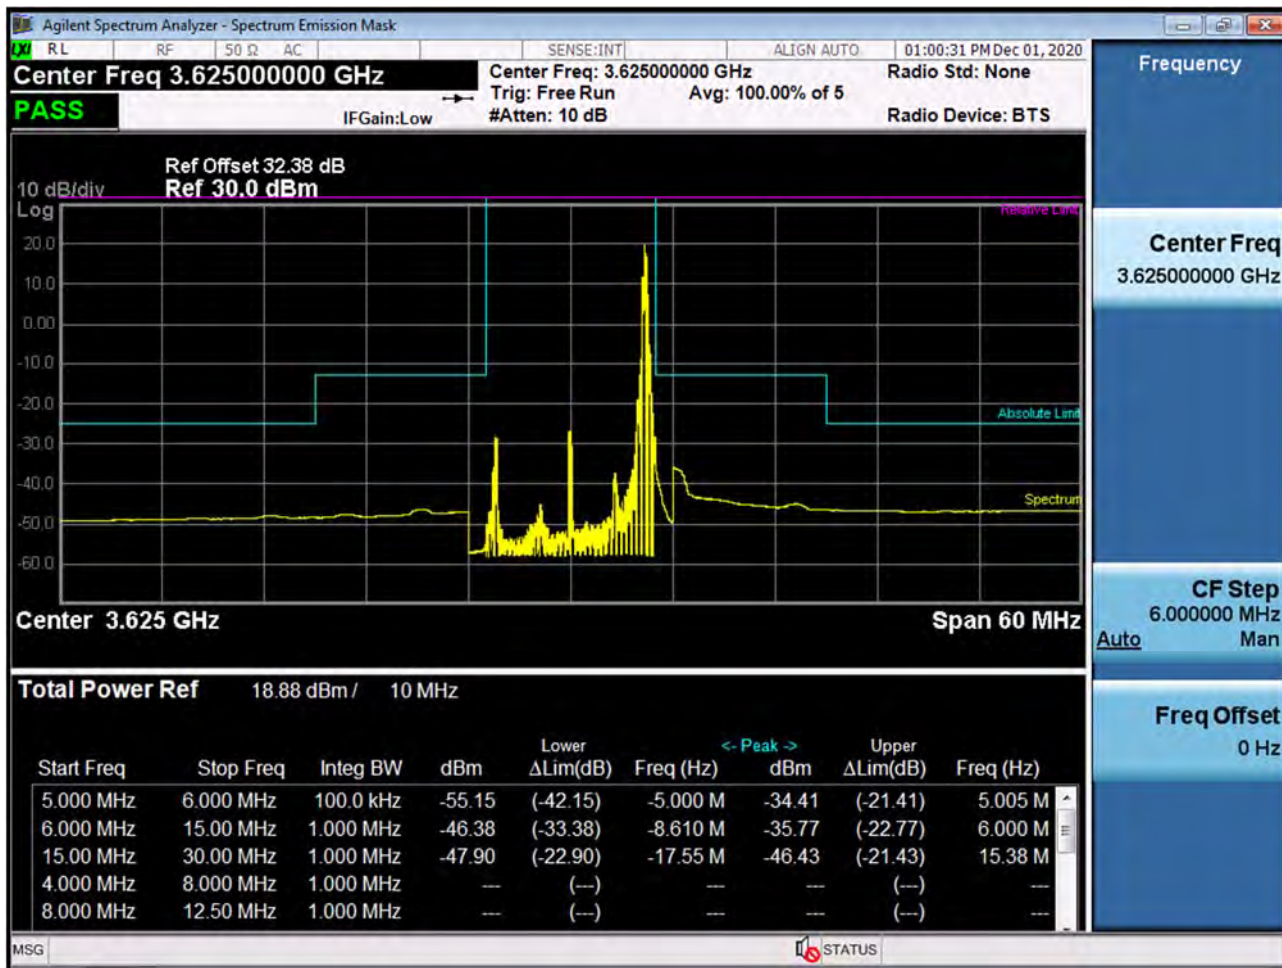




BAND 48. 10M\_BandEdge(Lower)\_High\_3695MHz\_QPSK\_FullRB




BAND 48. 10M\_BandEdge(Upper)\_High\_3695MHz\_QPSK\_FullRB



BAND 48. 10M\_BandEdge(Lower)\_High\_3695MHz\_QPSK\_1RB

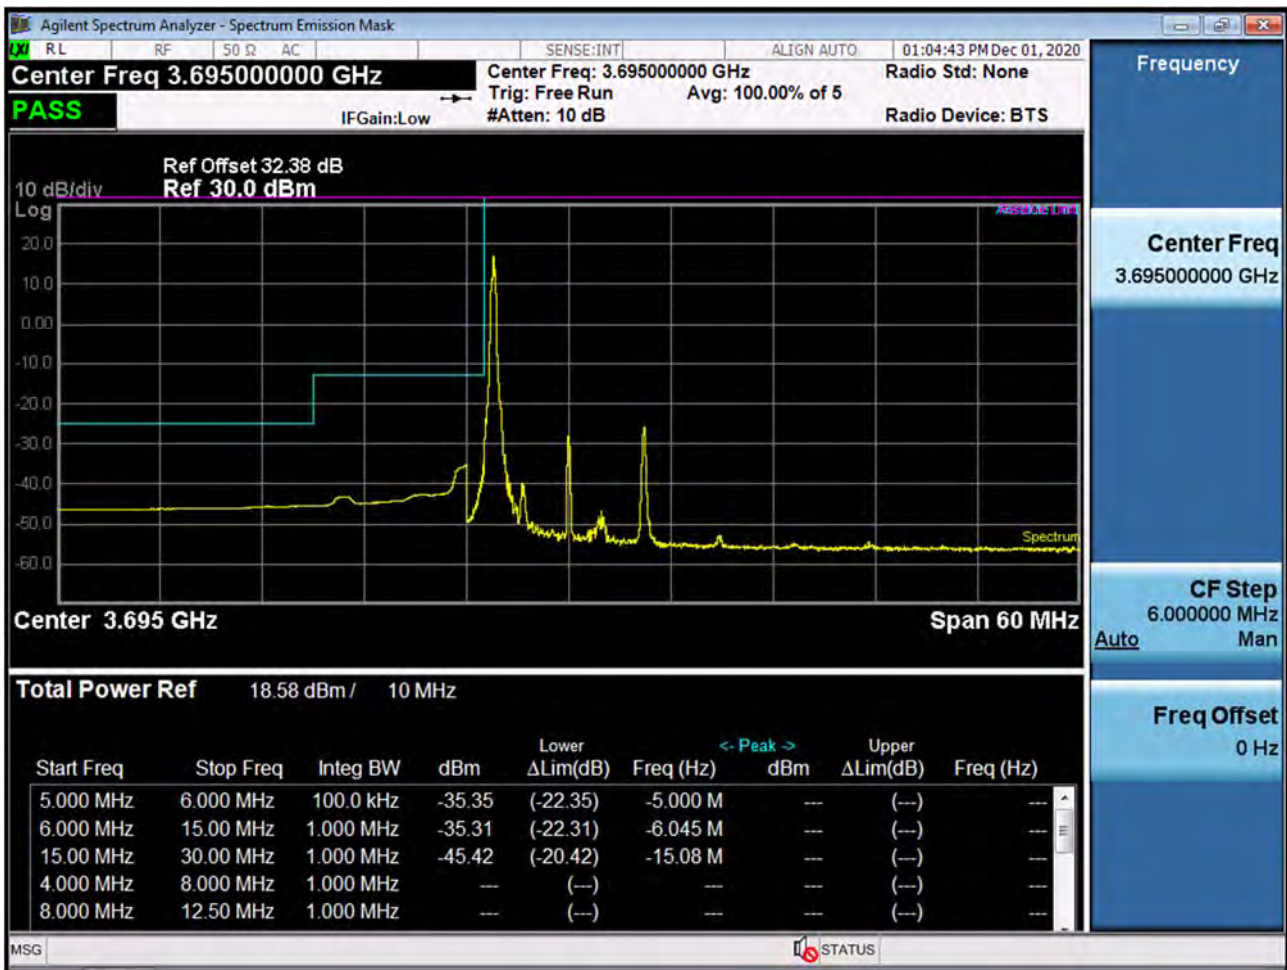

BAND 48. 10M\_BandEdge(Upper)\_High\_3695MHz\_QPSK\_1RB

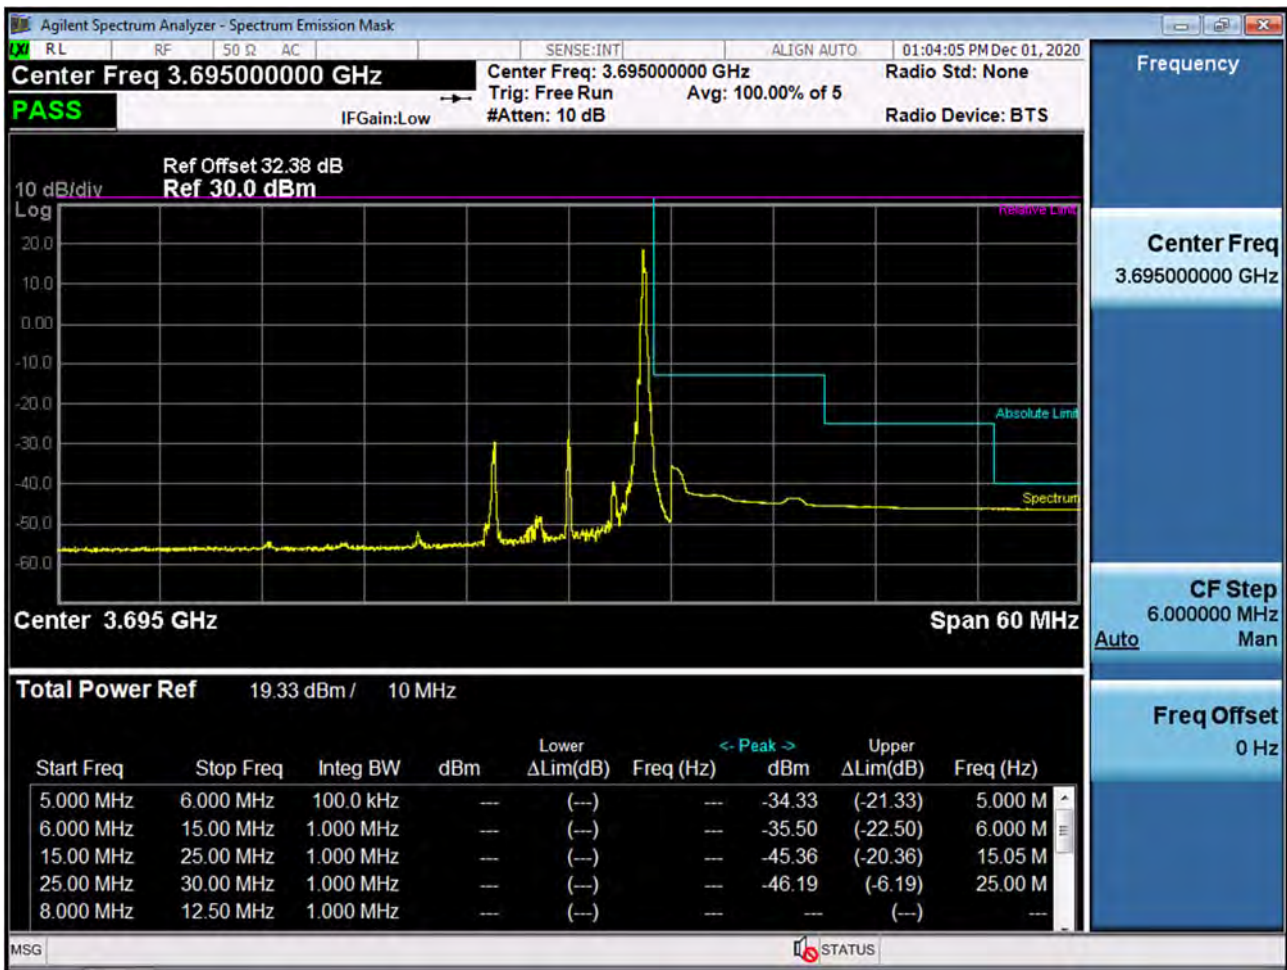





BAND 48. 15M\_BandEdge(Lower)\_Low\_3557.5MHz\_QPSK\_FullRB



BAND 48. 15M\_BandEdge(Upper)\_Low\_3557.5MHz\_QPSK\_FullRB

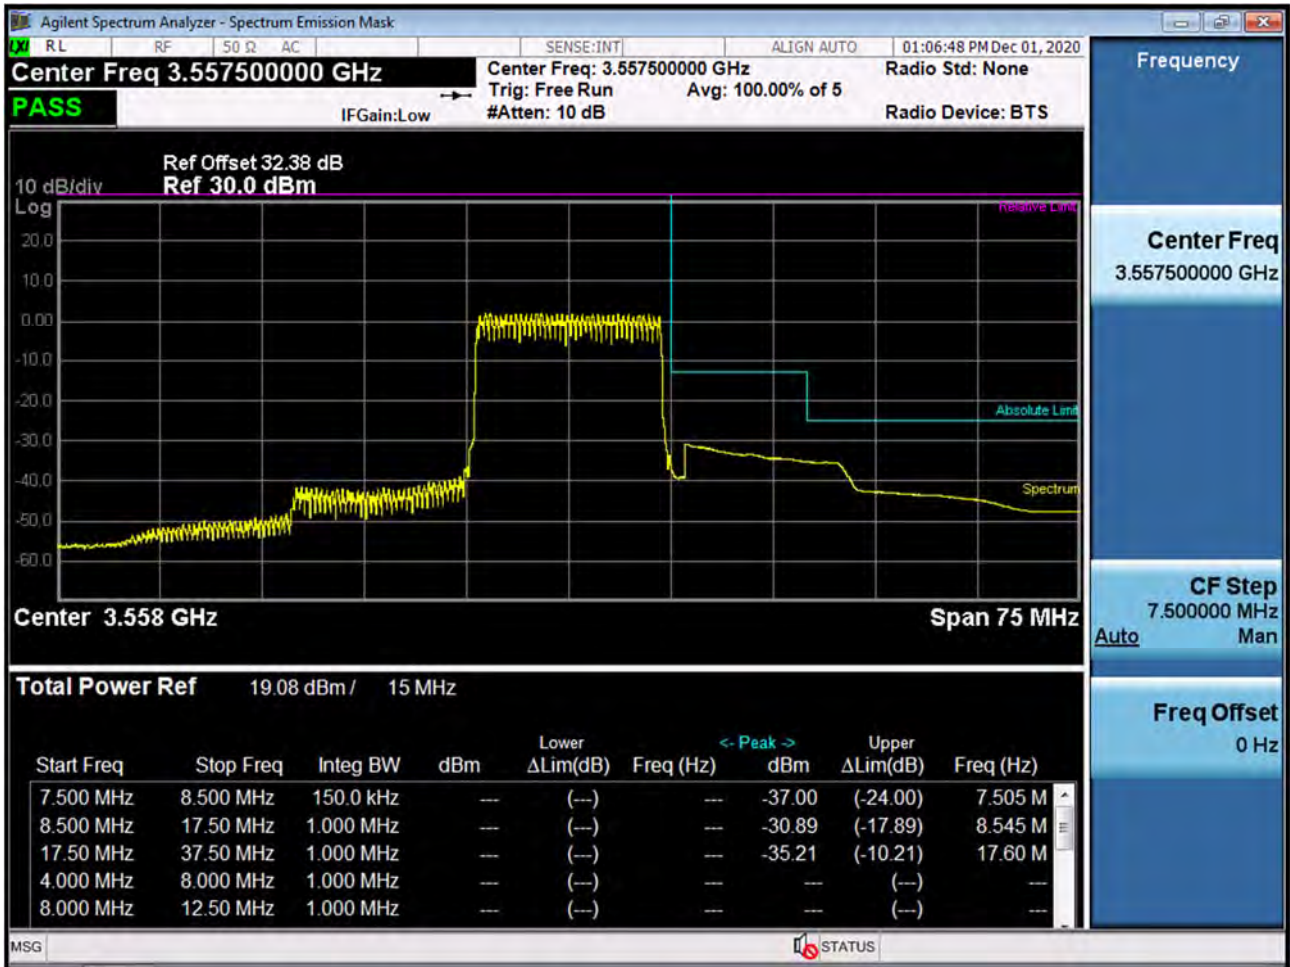

BAND 48. 15M\_BandEdge(Lower)\_Low\_3557.5MHz\_QPSK\_1RB

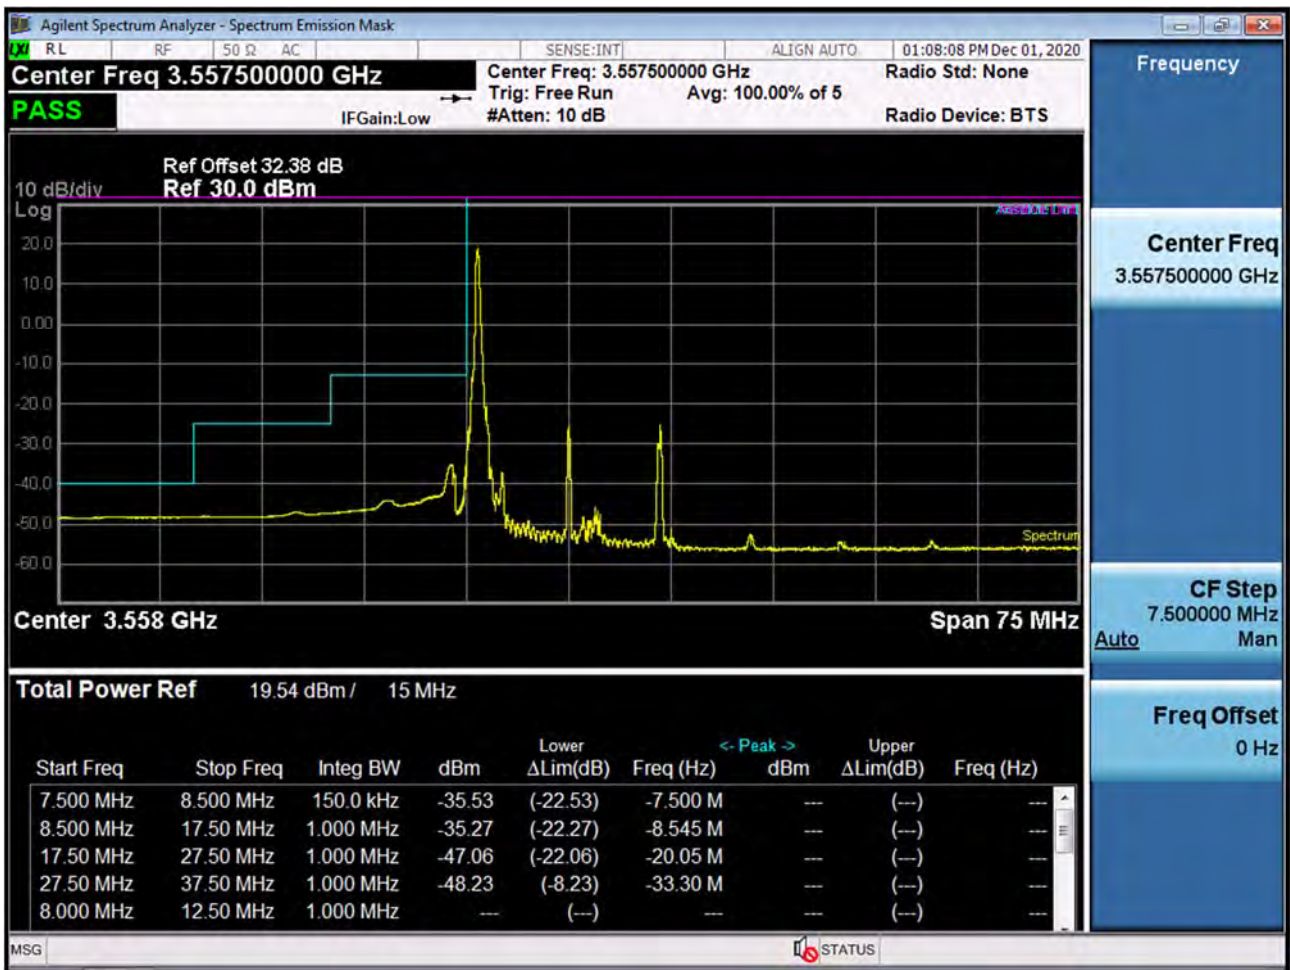


BAND 48. 15M\_BandEdge(Upper)\_Low\_3557.5MHz\_QPSK\_1RB





BAND 48. 15M\_BandEdge(Center)\_Mid\_3625MHz\_QPSK\_FullRB

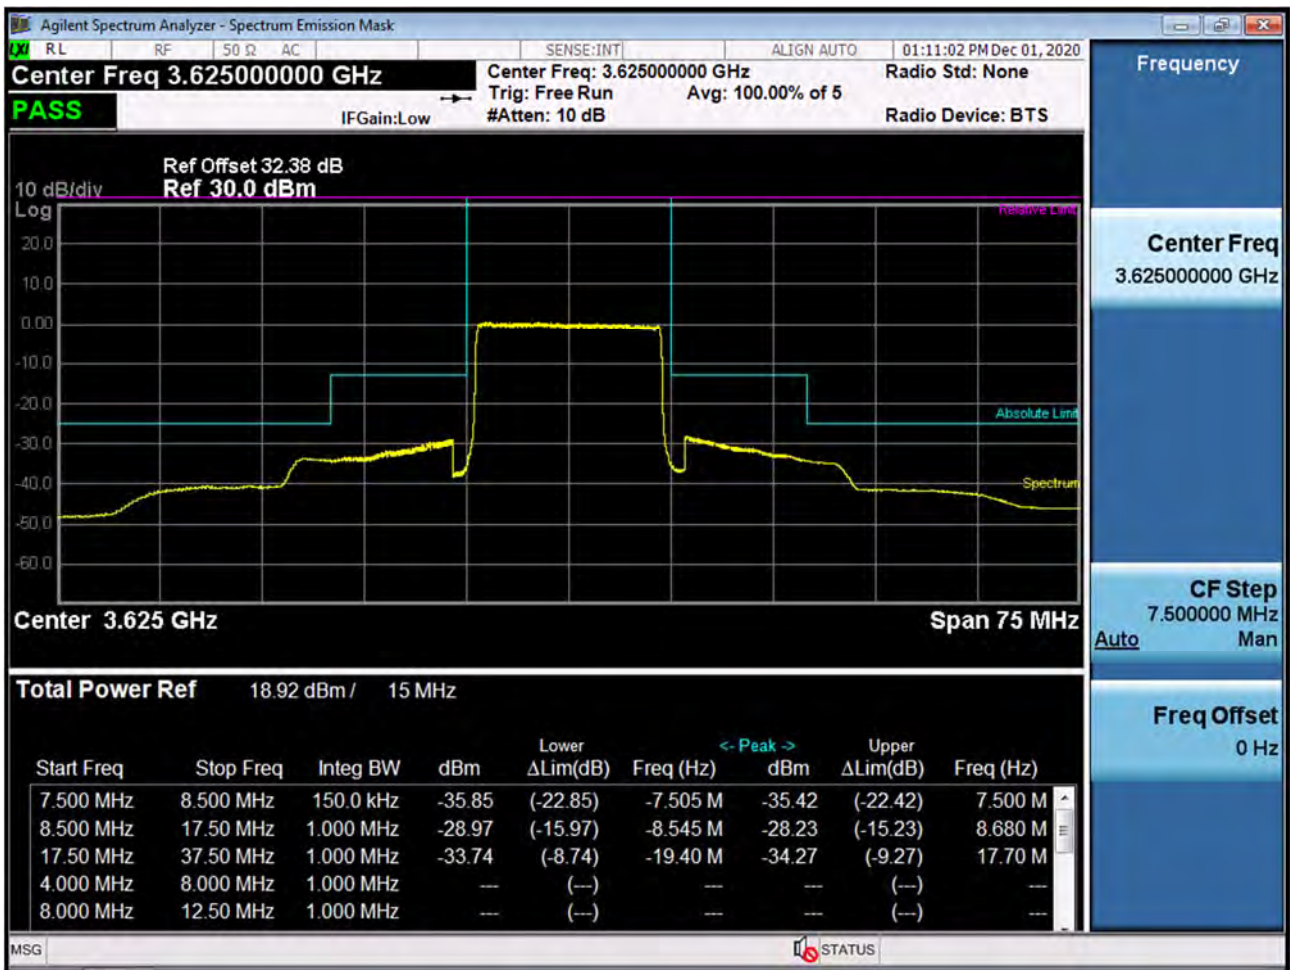


BAND 48. 15M\_BandEdge(Lower)\_Mid\_3625MHz\_QPSK\_1RB



BAND 48. 15M\_BandEdge(Upper)\_Mid\_3625MHz\_QPSK\_1RB




BAND 48. 15M\_BandEdge(Lower)\_High\_3692.5MHz\_QPSK\_FullRB

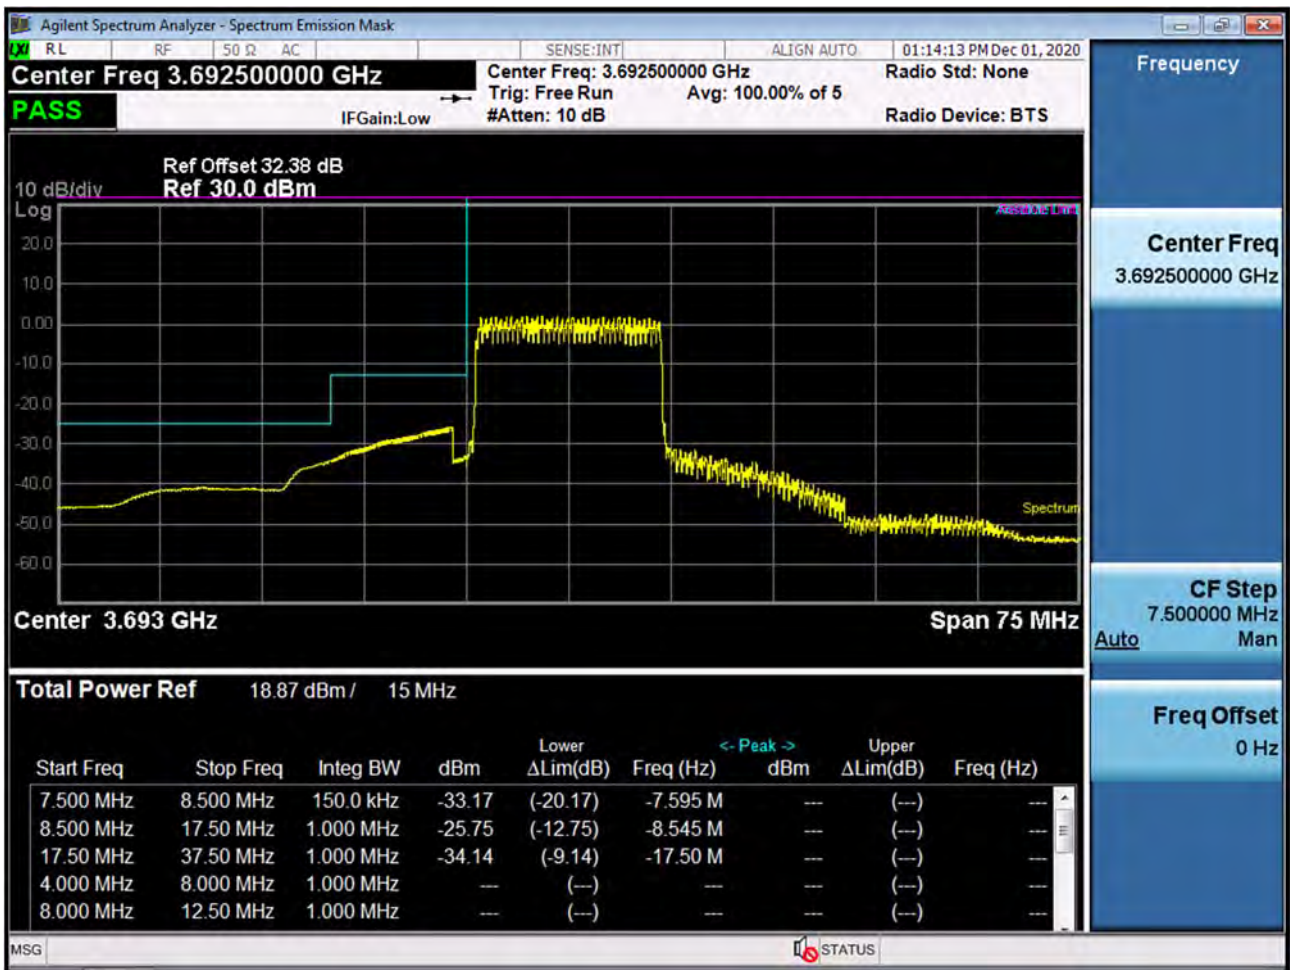





BAND 48. 15M\_BandEdge(Upper)\_High\_3692.5MHz\_QPSK\_FullIRB

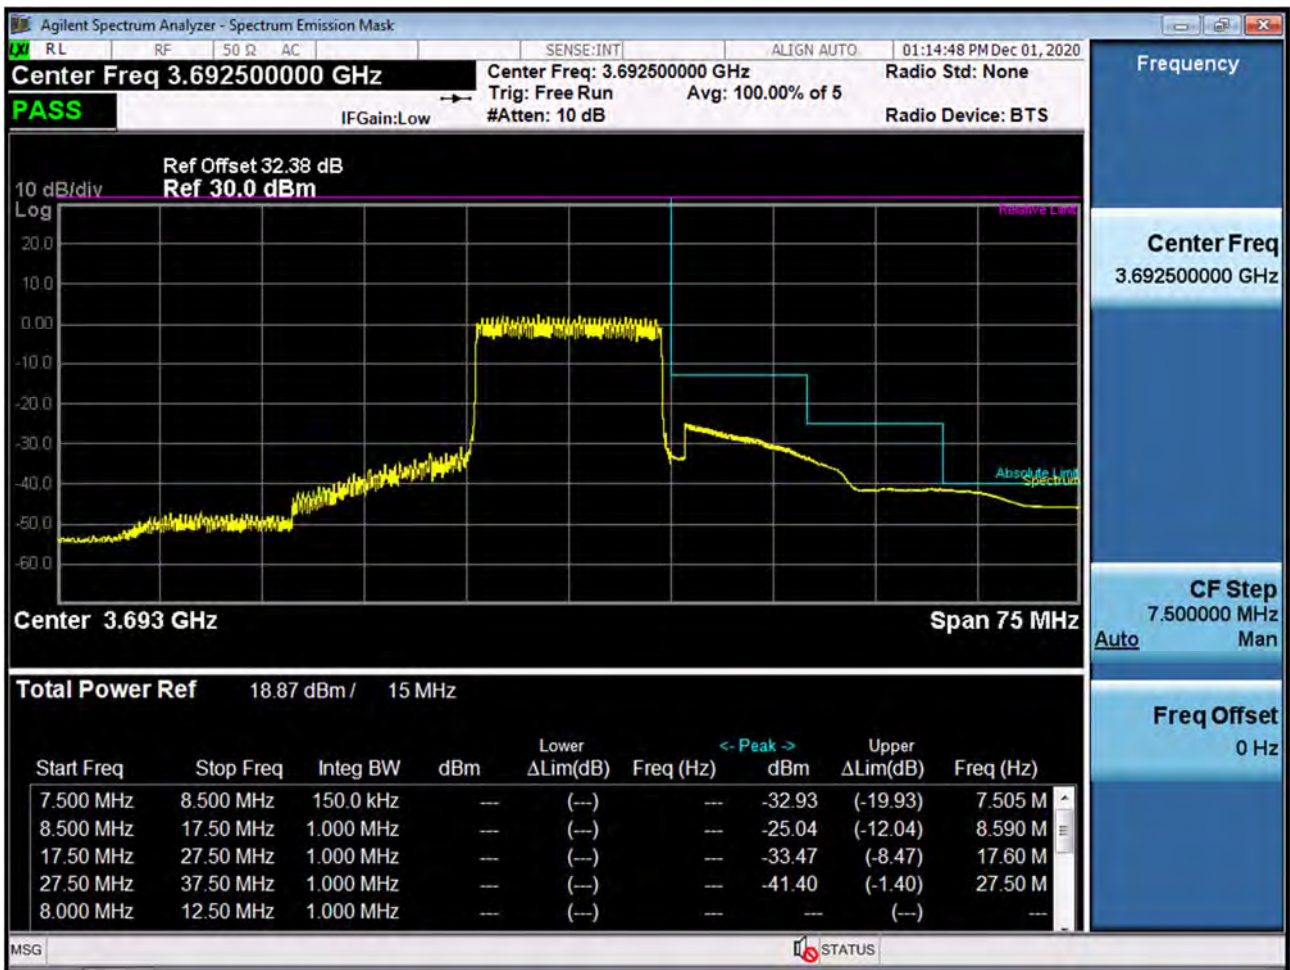

BAND 48. 15M\_BandEdge(Lower)\_High\_3692.5MHz\_QPSK\_1RB

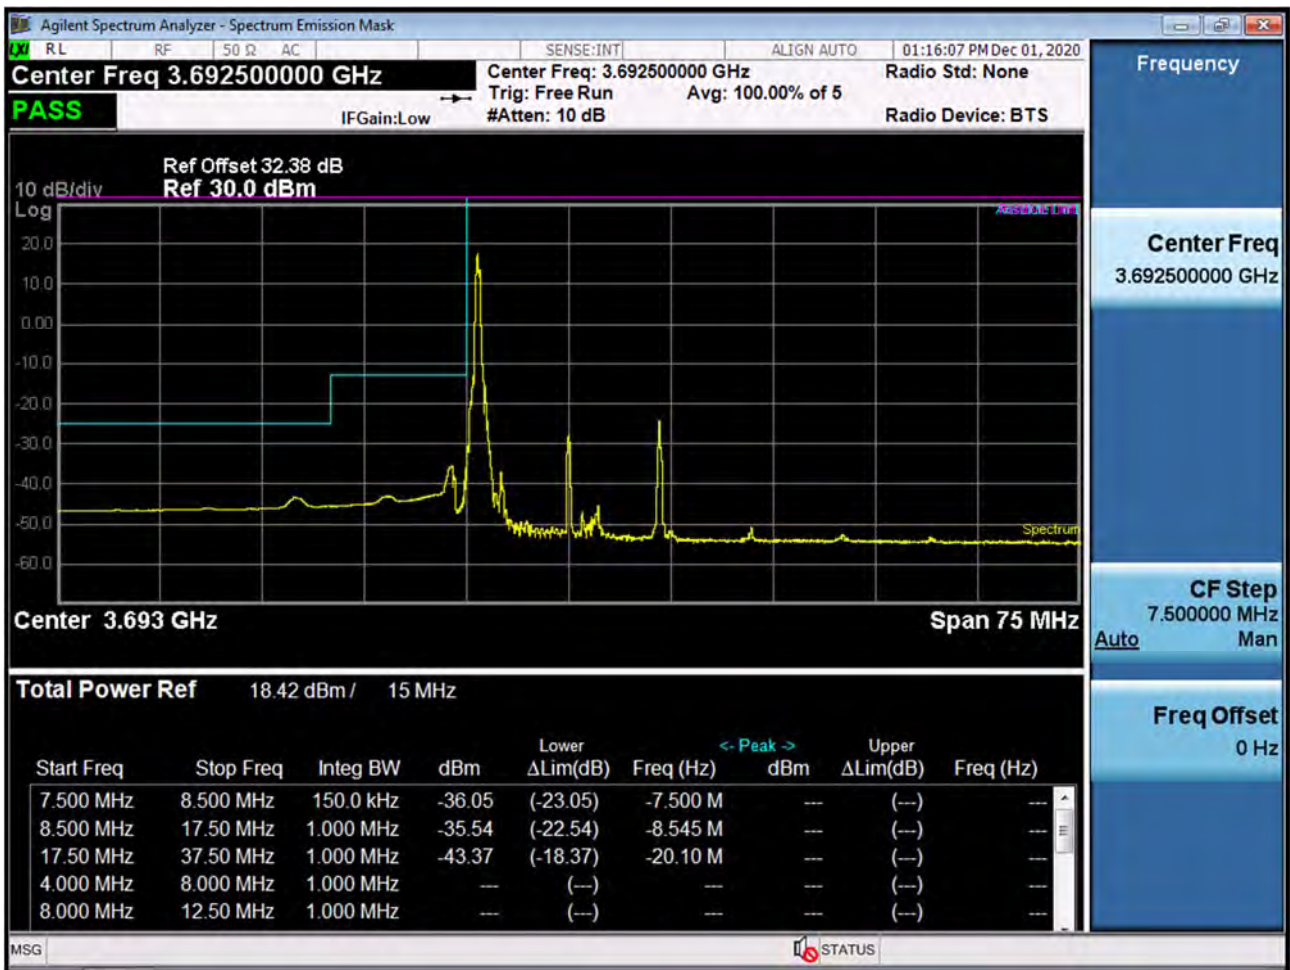

BAND 48. 15M\_BandEdge(Upper)\_High\_3692.5MHz\_QPSK\_1RB

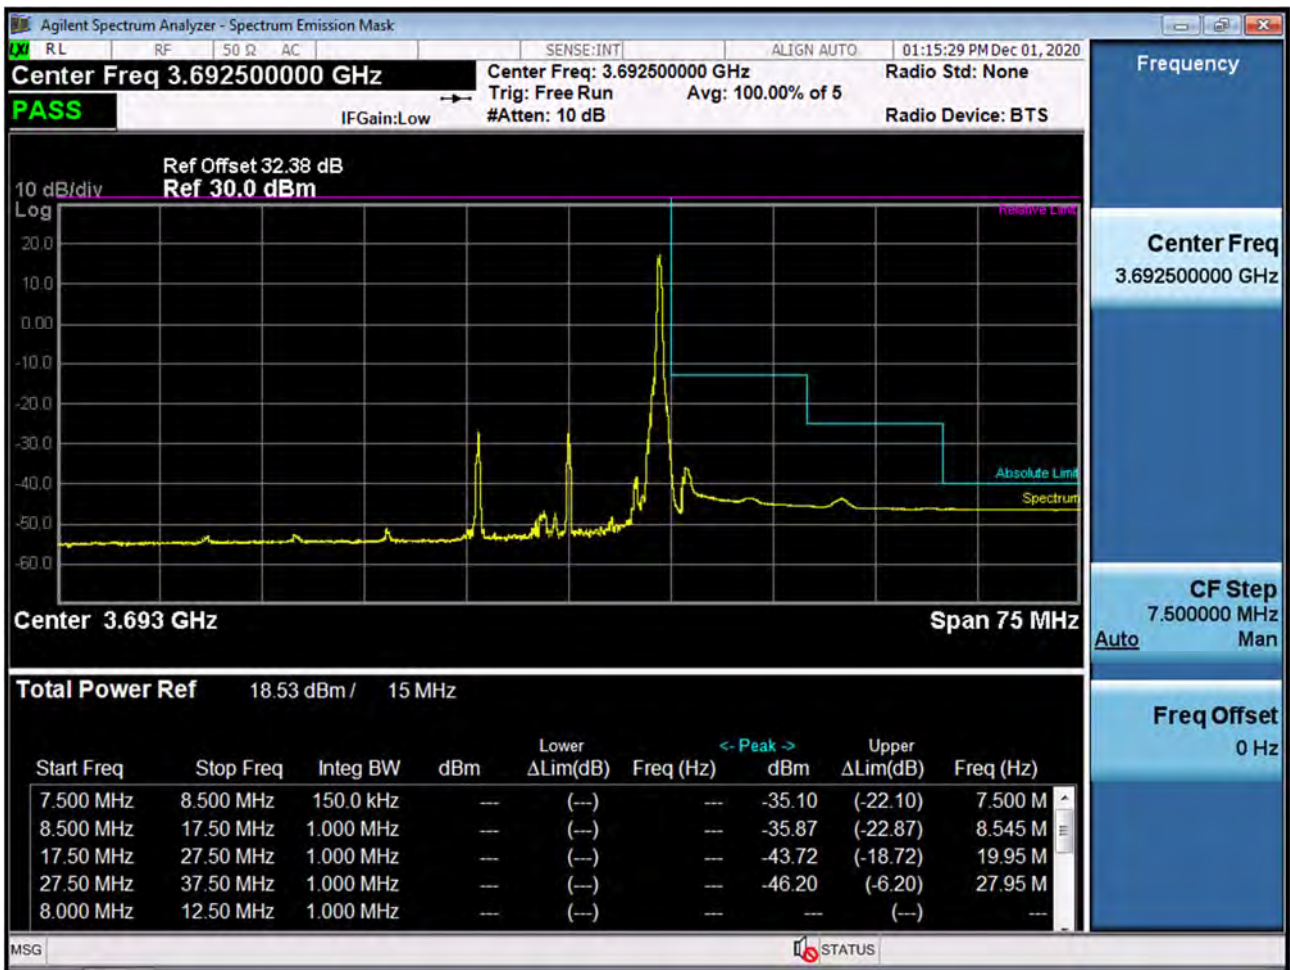




BAND 48. 20M\_BandEdge(Lower)\_Low\_3560MHz\_QPSK\_FullIRB




BAND 48. 20M\_BandEdge(Upper)\_Low\_3560MHz\_QPSK\_FullRB



BAND 48. 20M\_BandEdge(Lower)\_Low\_3560MHz\_QPSK\_1RB

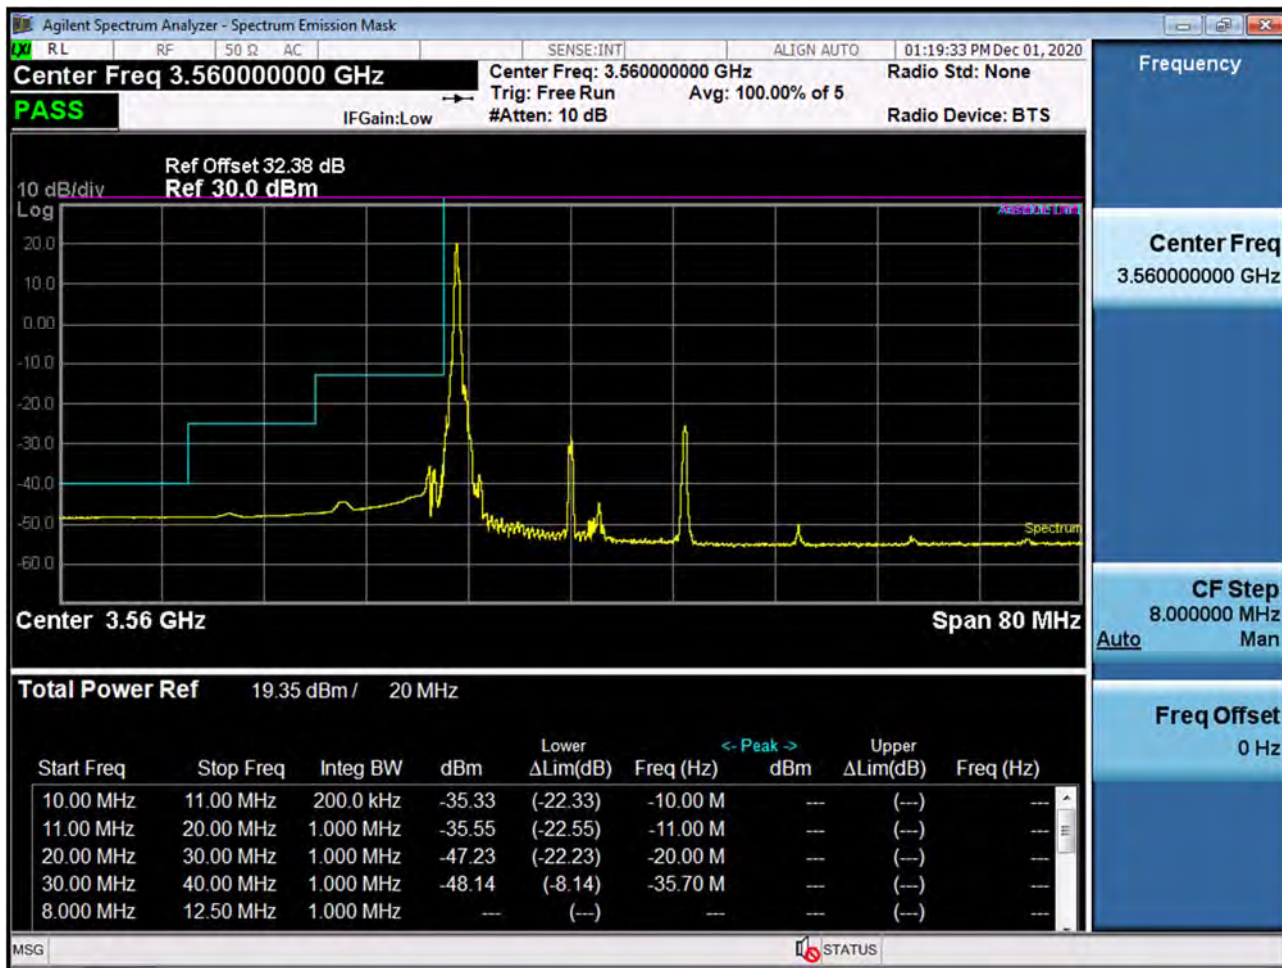


BAND 48. 20M\_BandEdge(Upper)\_Low\_3560MHz\_QPSK\_1RB

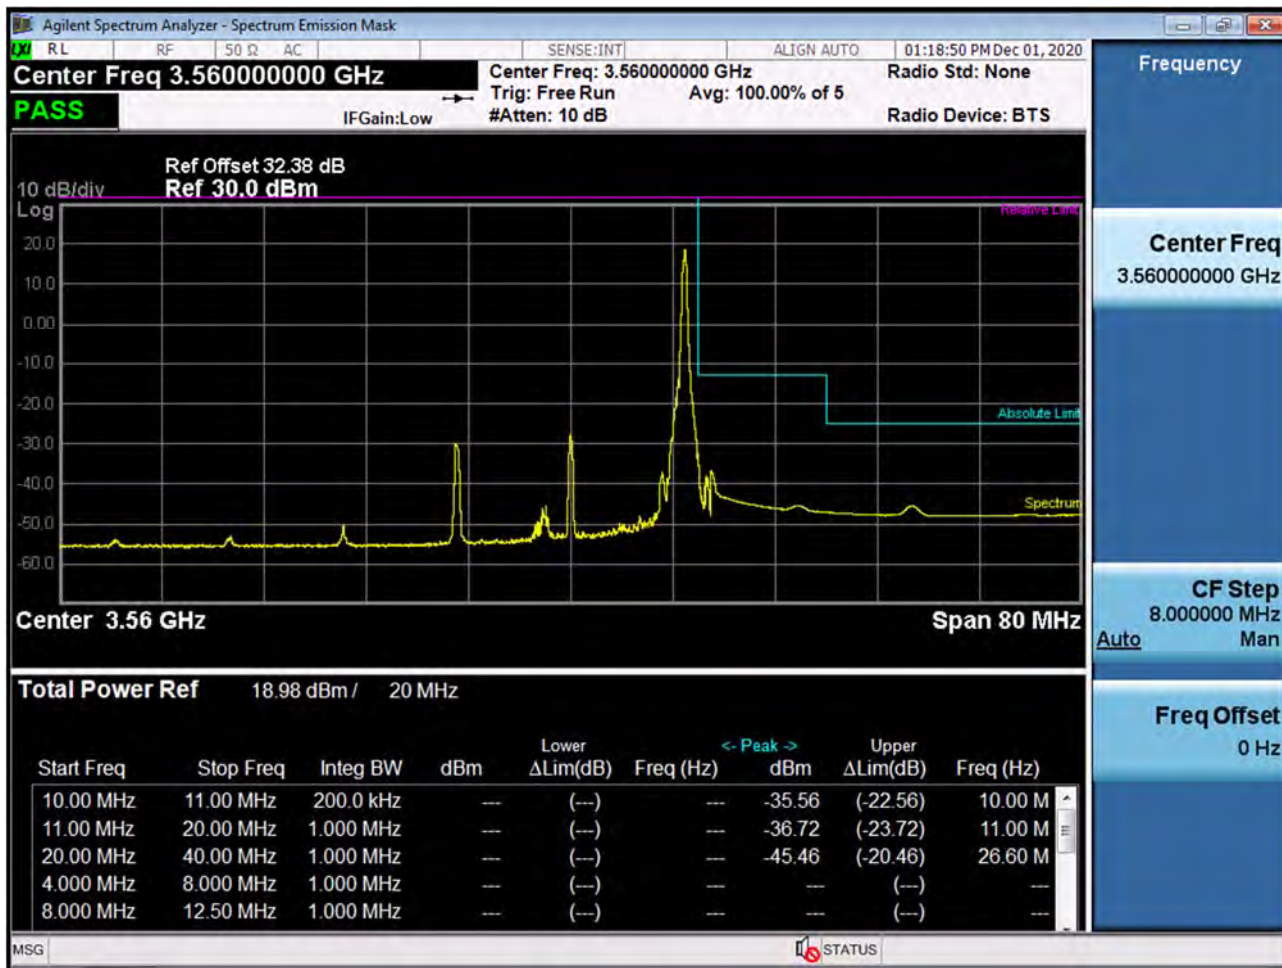




BAND 48. 20M\_BandEdge(Center)\_Mid\_3625MHz\_QPSK\_FullRB

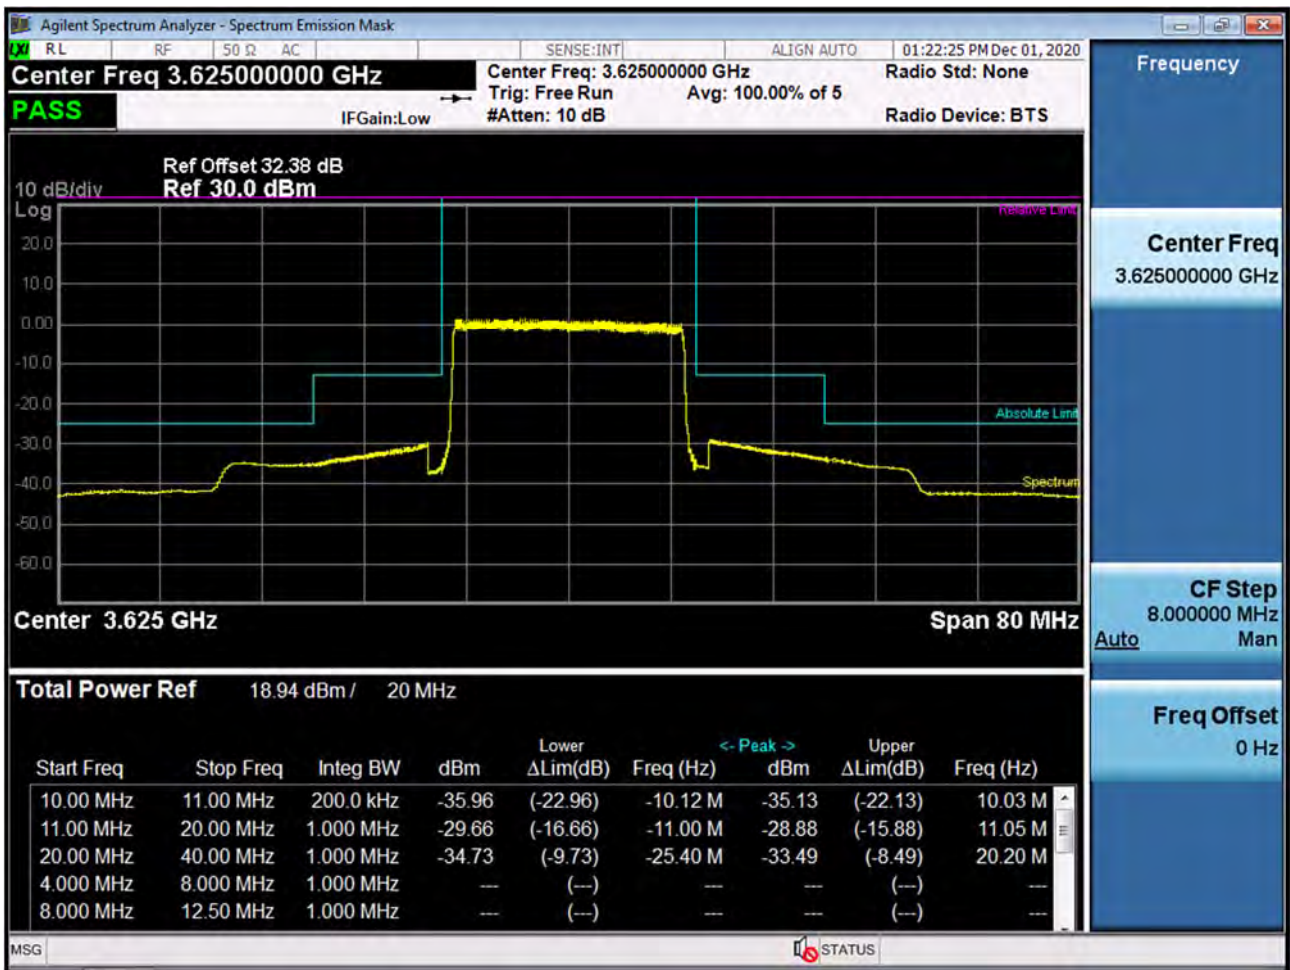


BAND 48. 20M\_BandEdge(Lower)\_Mid\_3625MHz\_QPSK\_1RB

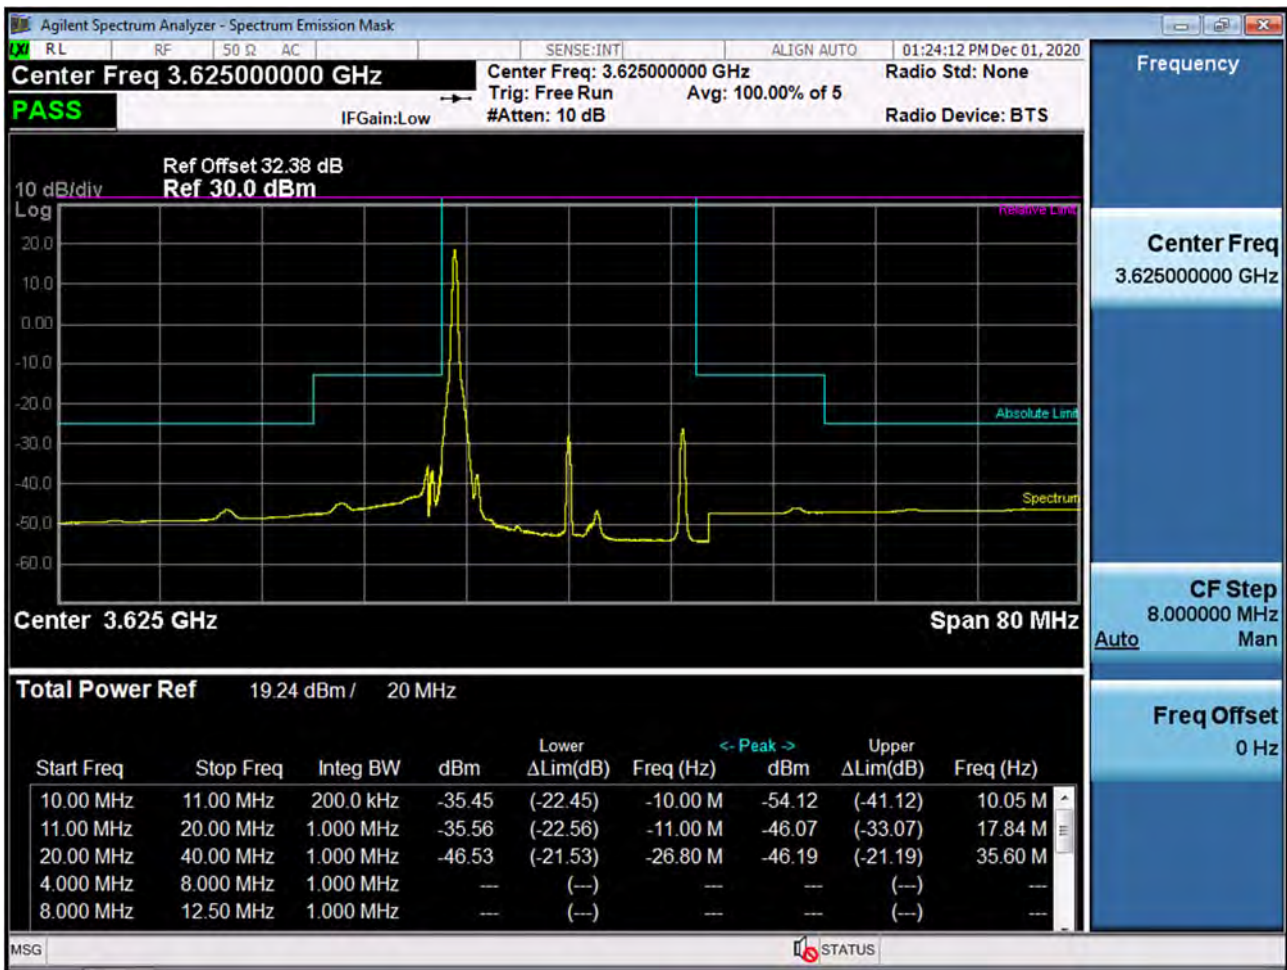



BAND 48. 20M\_BandEdge(Upper)\_Mid\_3625MHz\_QPSK\_1RB

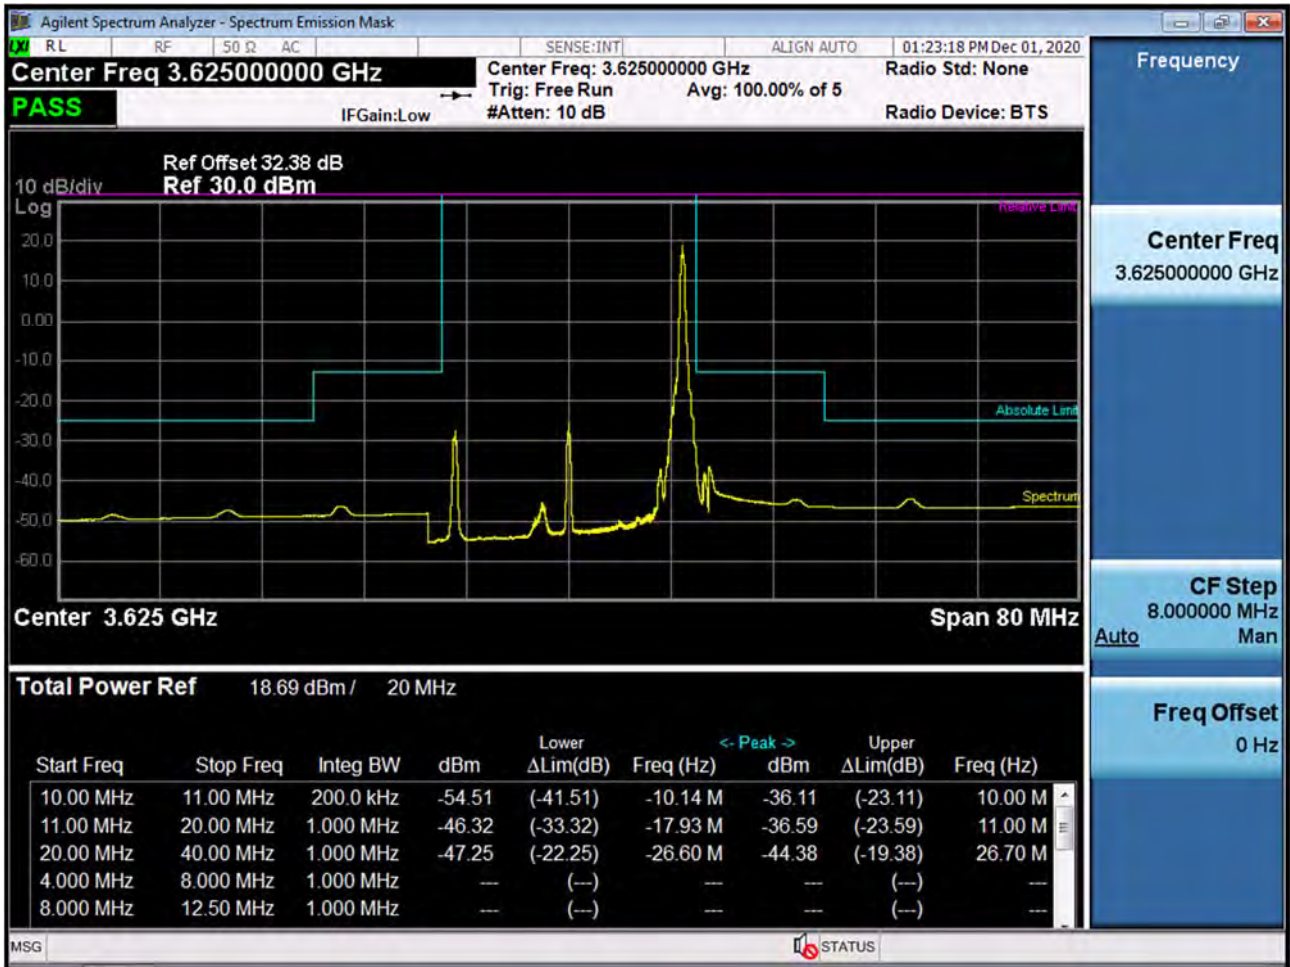


BAND 48. 20M\_BandEdge(Lower)\_High\_3690MHz\_QPSK\_FullRB



BAND 48. 20M\_BandEdge(Upper)\_High\_3690MHz\_QPSK\_FullRB




BAND 48. 20M\_BandEdge(Lower)\_High\_3690MHz\_QPSK\_1RB

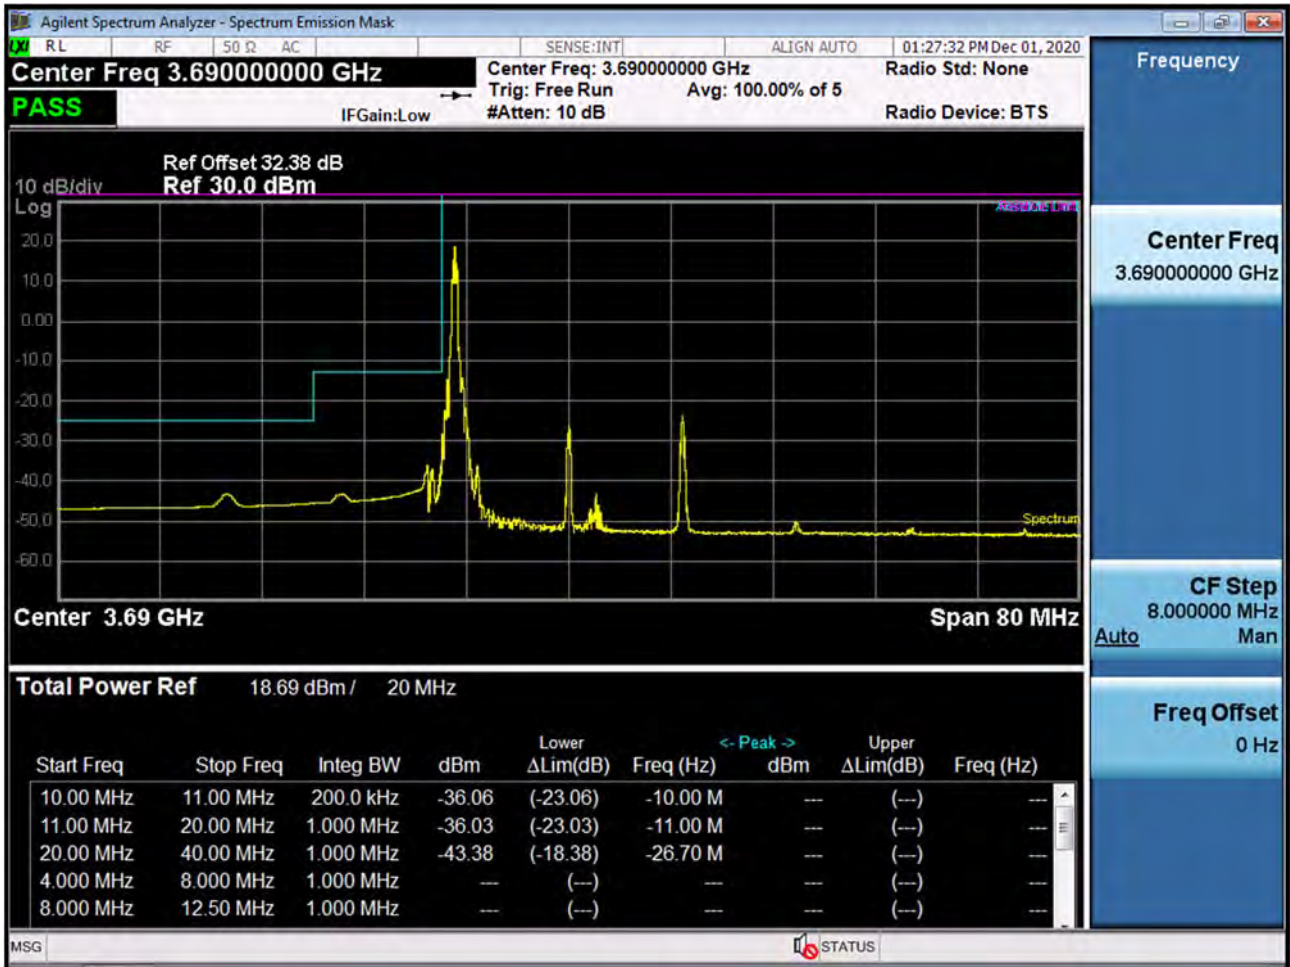




BAND 48. 20M\_BandEdge(Upper)\_High\_3690MHz\_QPSK\_1RB

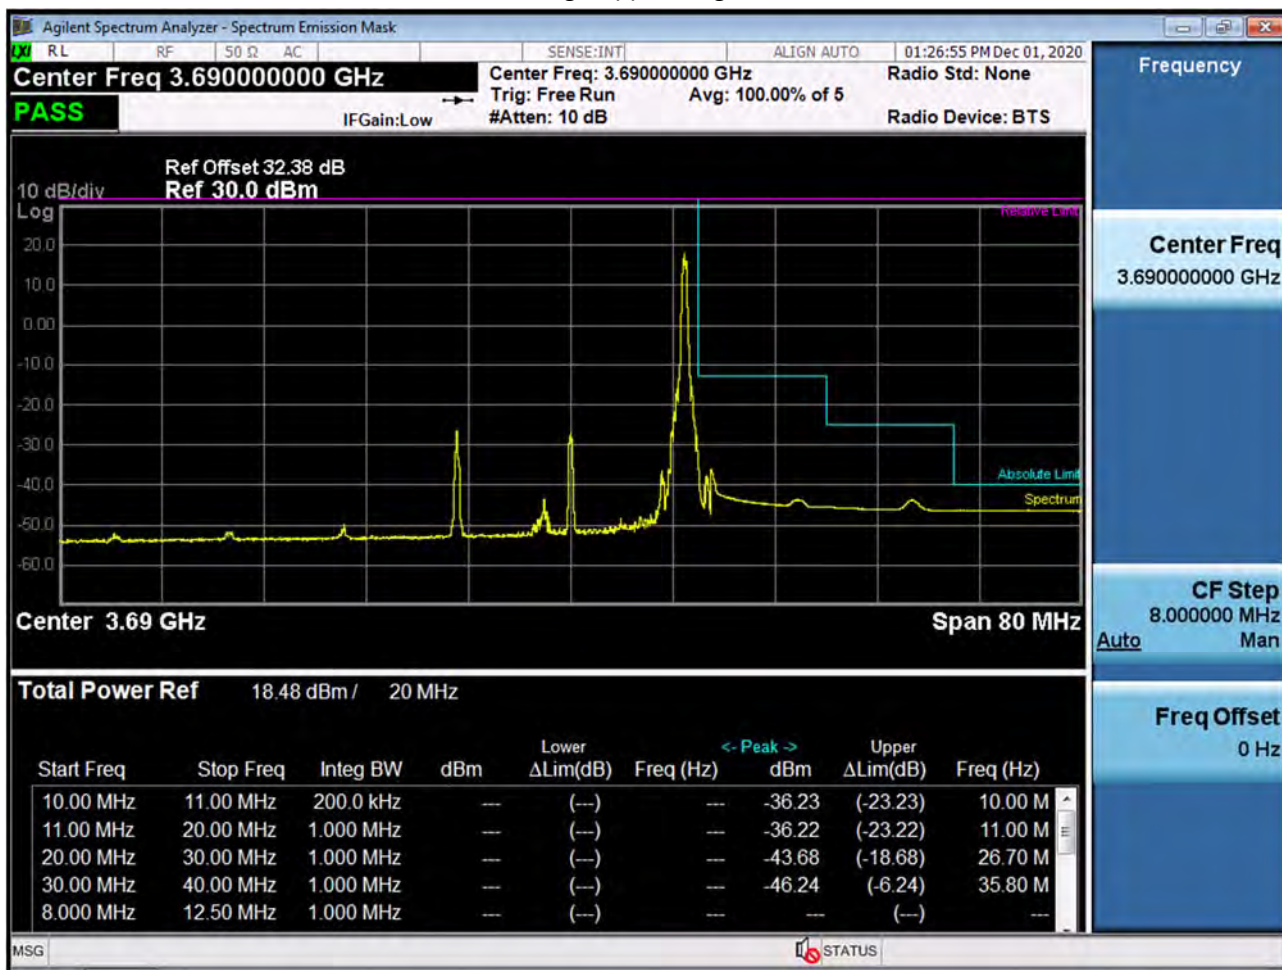


BAND 48. Conducted Spurious Plot 1 (5 MHz Ch.55265 QPSK RB 1, Offset 0)

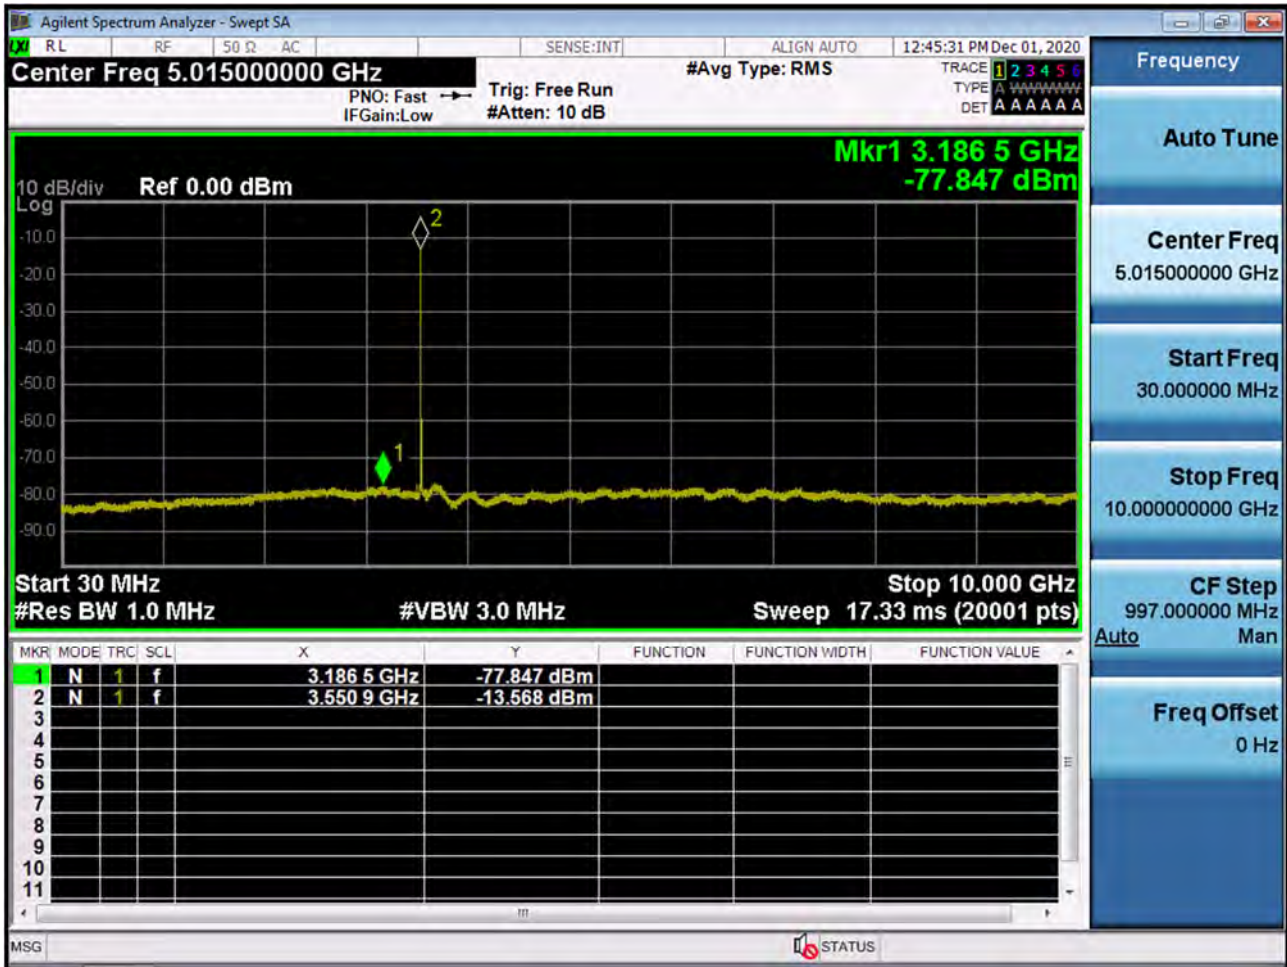




BAND 48. Conducted Spurious Plot 2 (5 MHz Ch. 55265 QPSK RB 1, Offset 0)

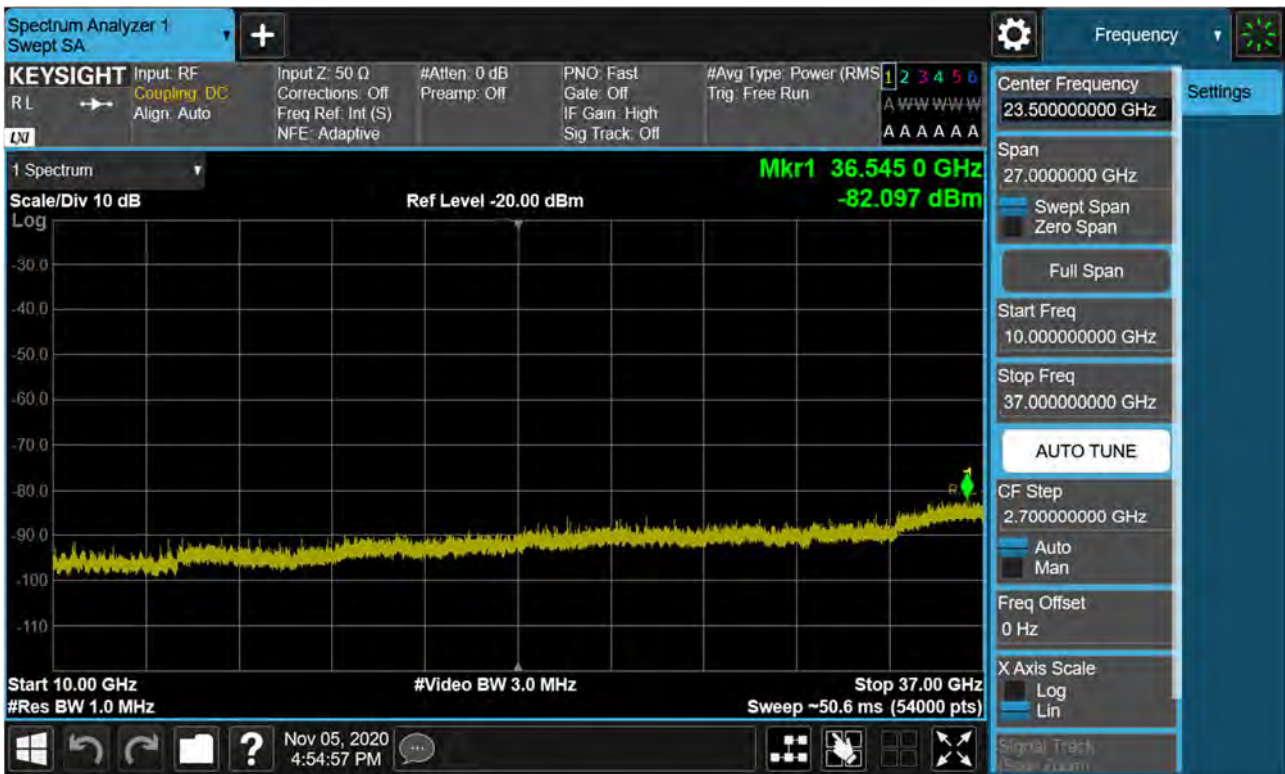


BAND 48. Conducted Spurious Plot 1 (5 MHz Ch.55990 QPSK RB 1, Offset 0)

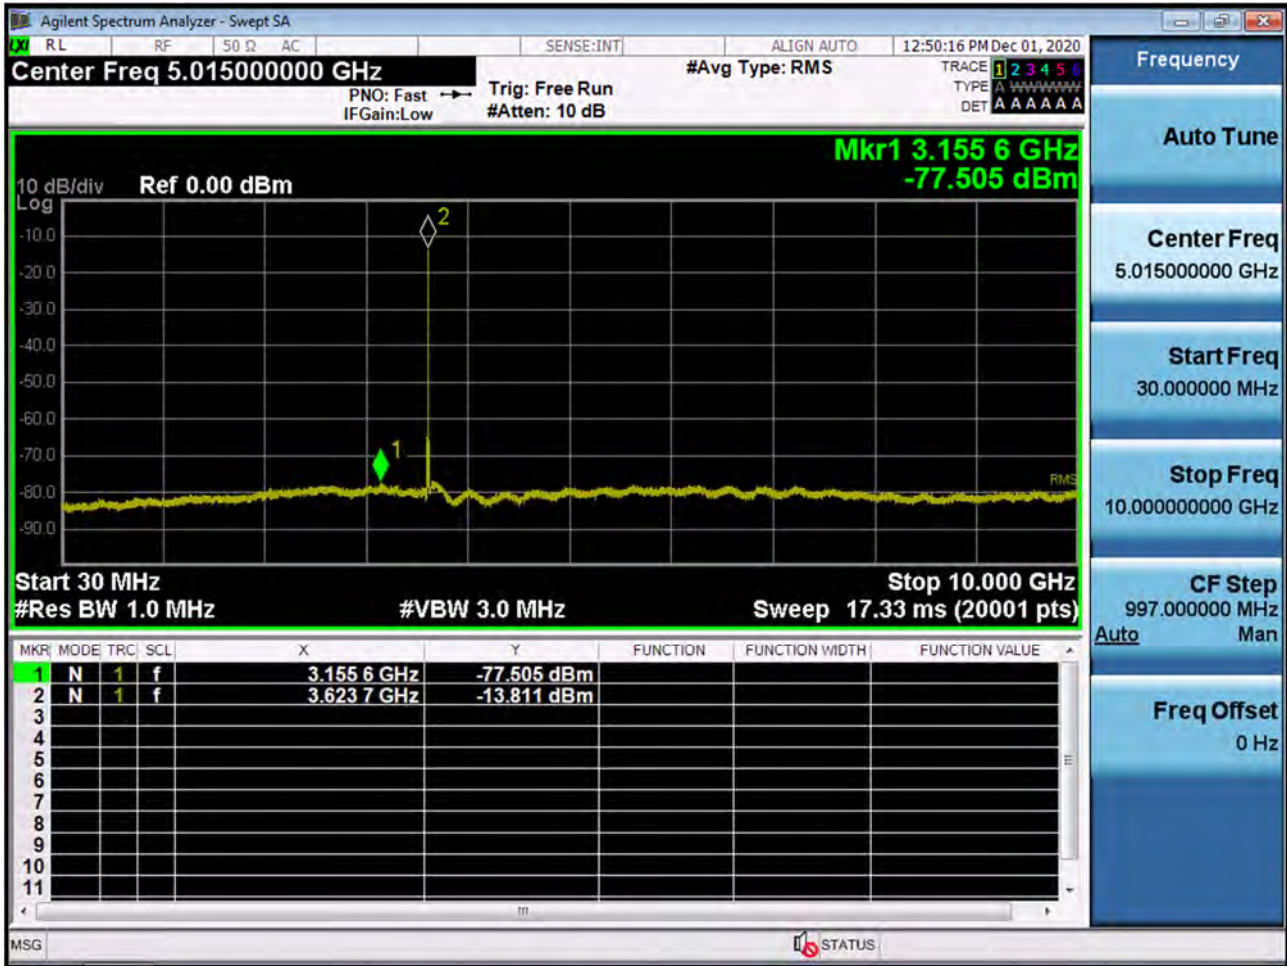

BAND 48. Conducted Spurious Plot 2 (5 MHz Ch. 55990 QPSK RB 1, Offset 0)




BAND 48. Conducted Spurious Plot 1 (5 MHz Ch.56715 QPSK RB 1, Offset 0)

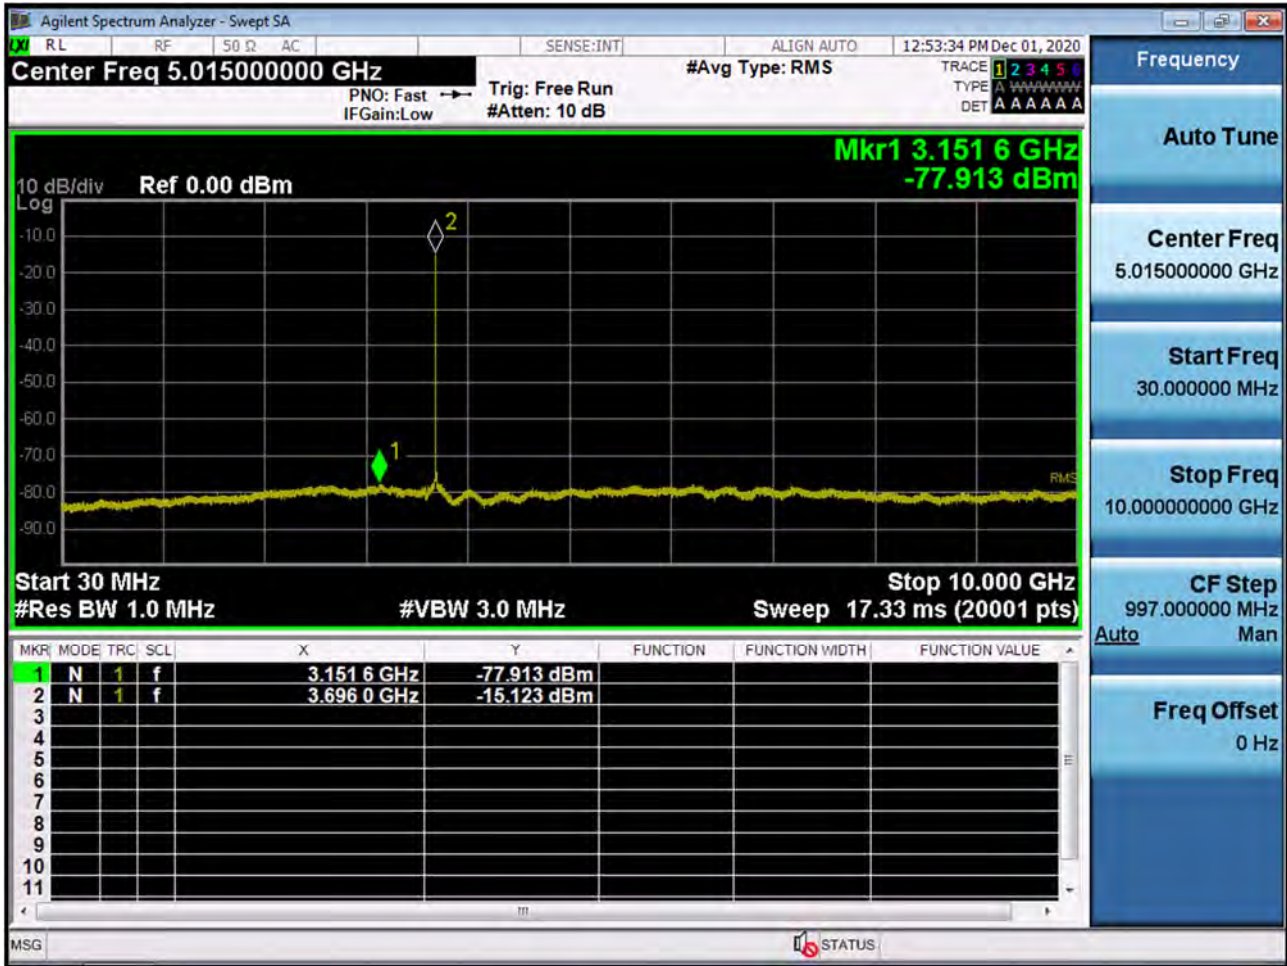




BAND 48. Conducted Spurious Plot 2 (5 MHz Ch. 56715 QPSK RB 1, Offset 0)

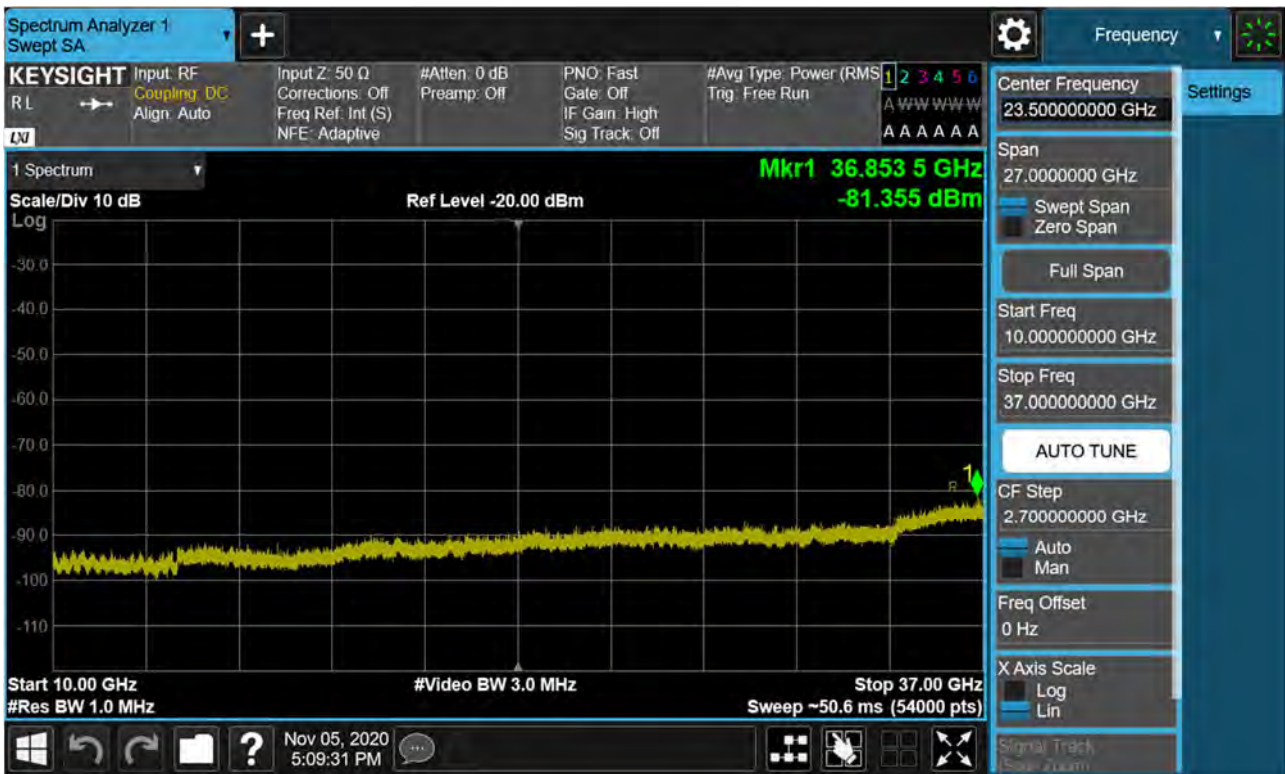

BAND 48. Conducted Spurious Plot 1 (10 MHz Ch.55290 QPSK RB 1, Offset 0)

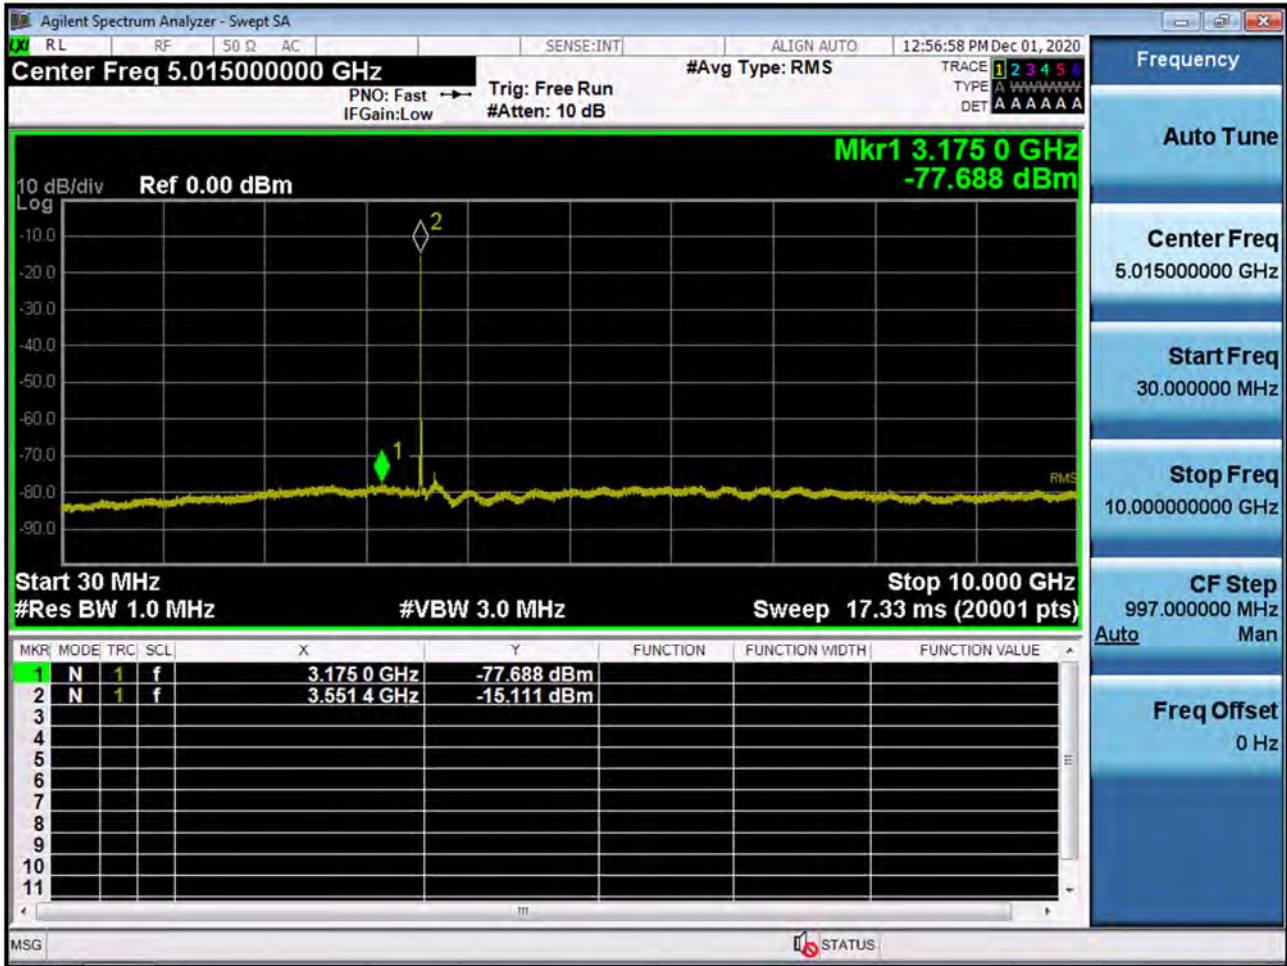





BAND 48. Conducted Spurious Plot 2 (10 MHz Ch. 55290 QPSK RB 1, Offset 0)




BAND 48. Conducted Spurious Plot 1 (10 MHz Ch.55990 QPSK RB 1, Offset 0)

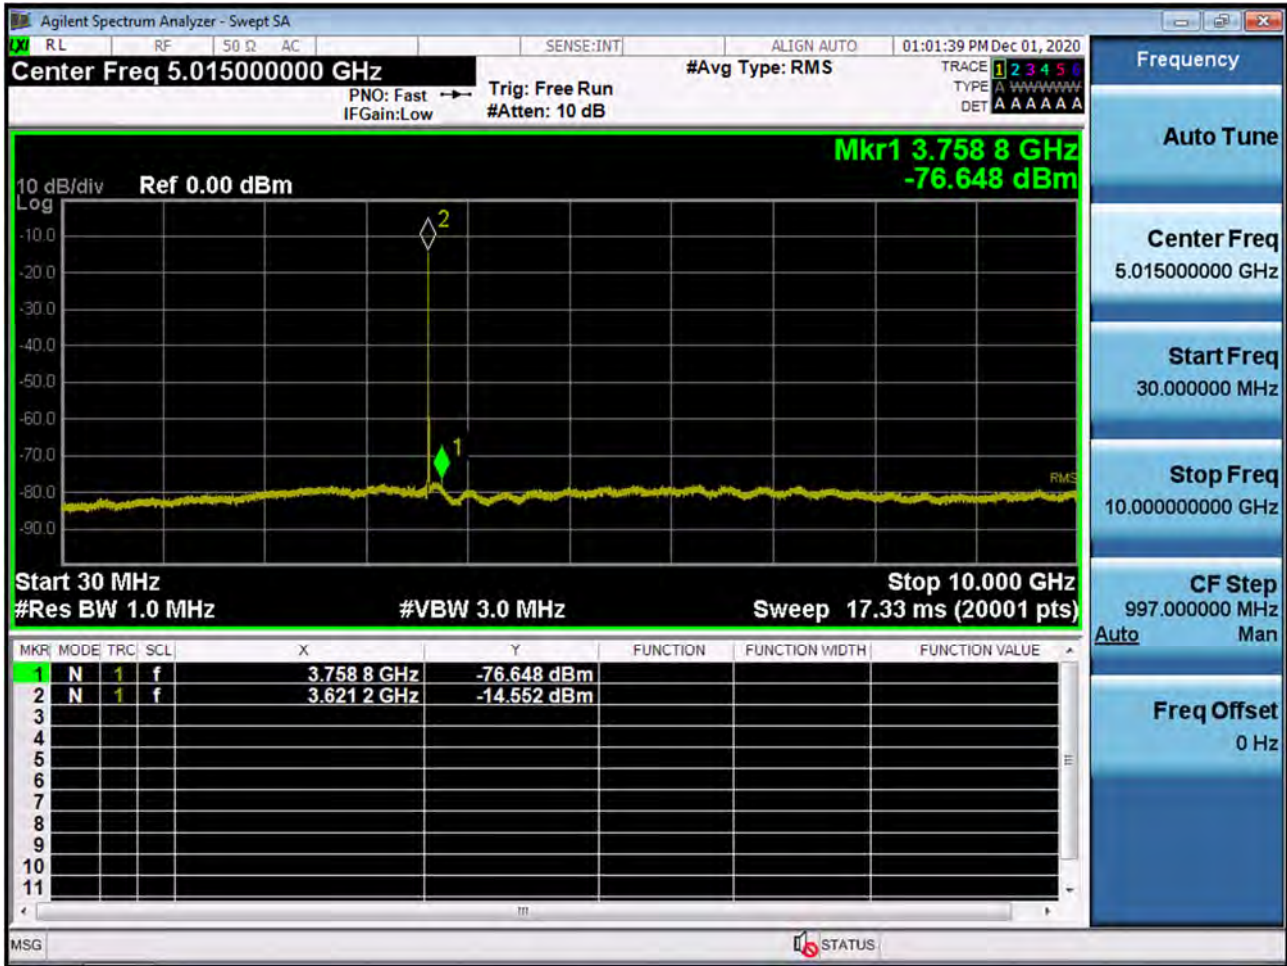

BAND 48. Conducted Spurious Plot 2 (10 MHz Ch. 55990 QPSK RB 1, Offset 0)

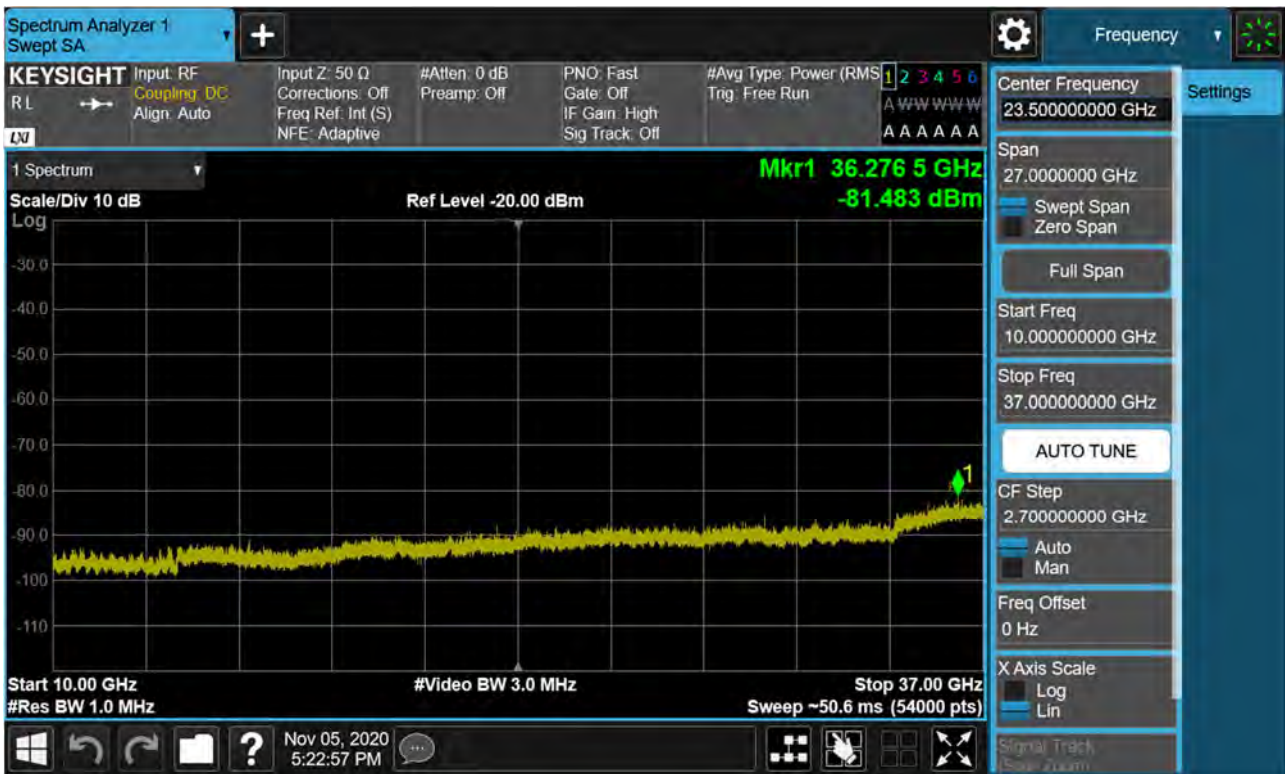

BAND 48. Conducted Spurious Plot 1 (10 MHz Ch. 56690 QPSK RB 1, Offset 0)

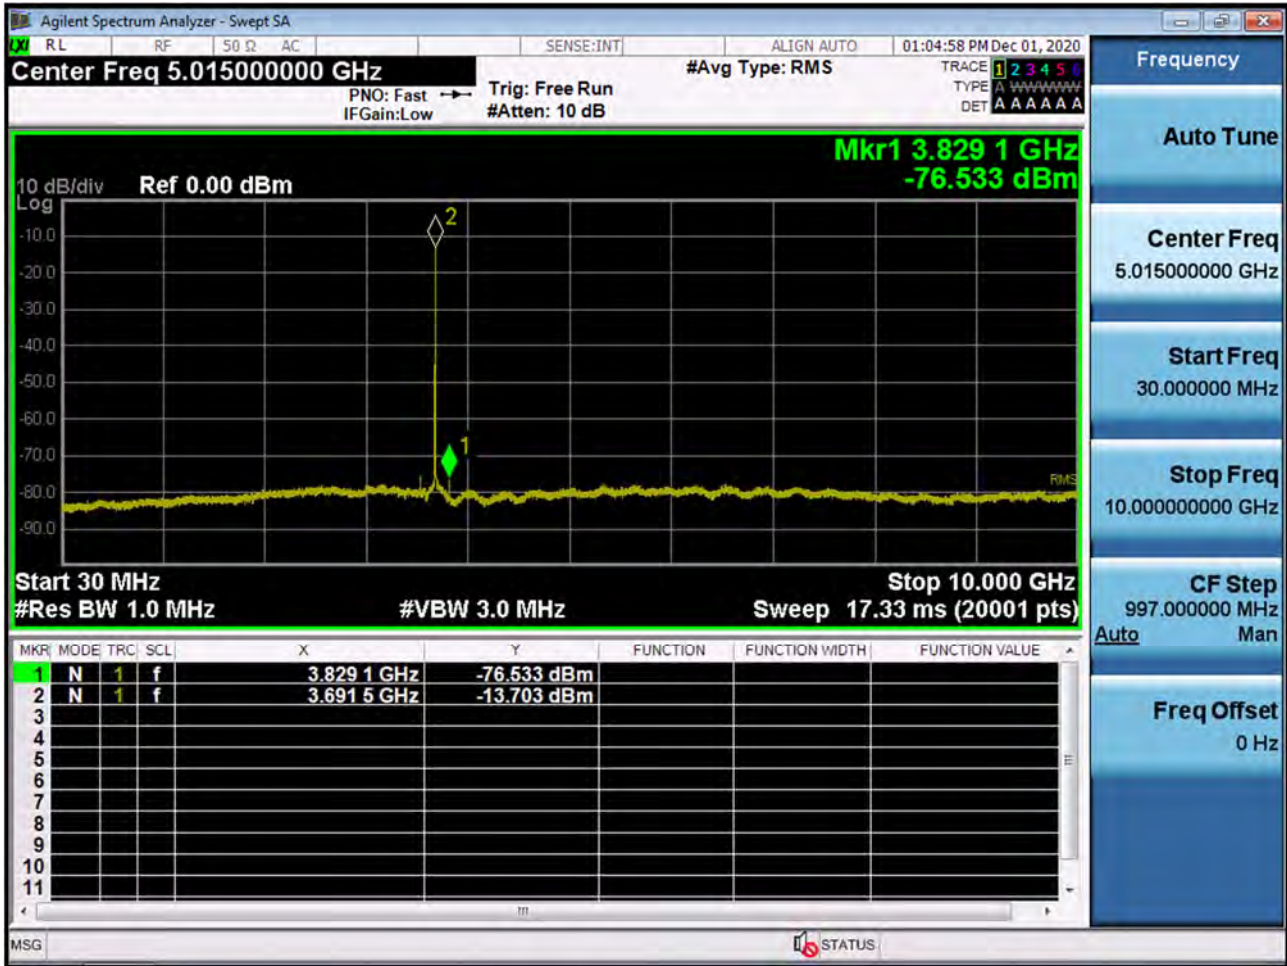




BAND 48. Conducted Spurious Plot 2 (10 MHz Ch. 56690 QPSK RB 1, Offset 0)



BAND 48. Conducted Spurious Plot 1 (15 MHz Ch.55315 QPSK RB 1, Offset 0)

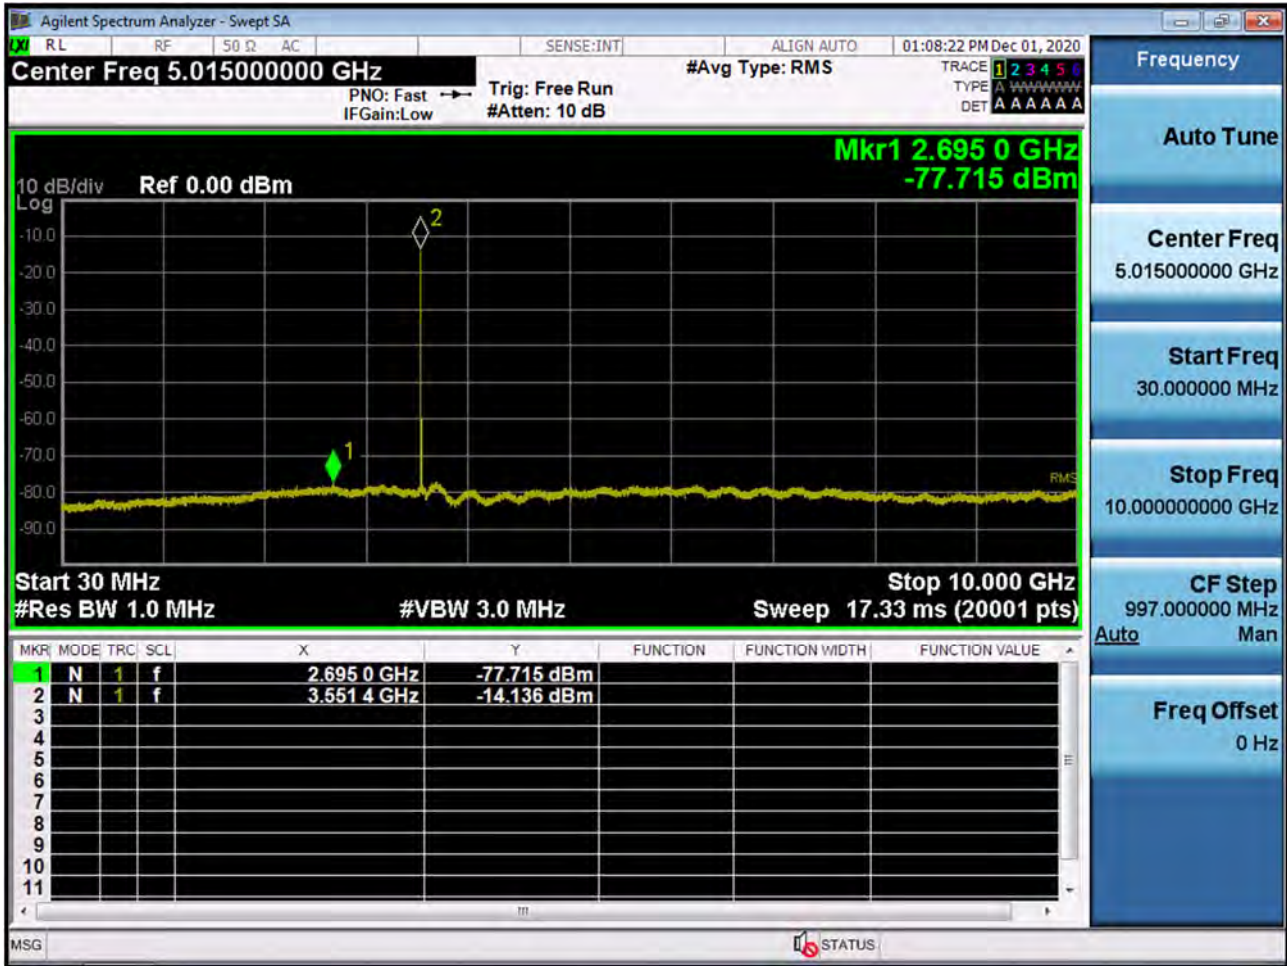



BAND 48. Conducted Spurious Plot 2 (15 MHz Ch. 55315 QPSK RB 1, Offset 0)

