


13.2.4 Rear tilt (Edge1 side):WWAN WCDMA B4 full power + WLAN5.8GHz Ant 1 + WLAN5.8GHz Ant 2  
Rear tilt (Edge1 side)

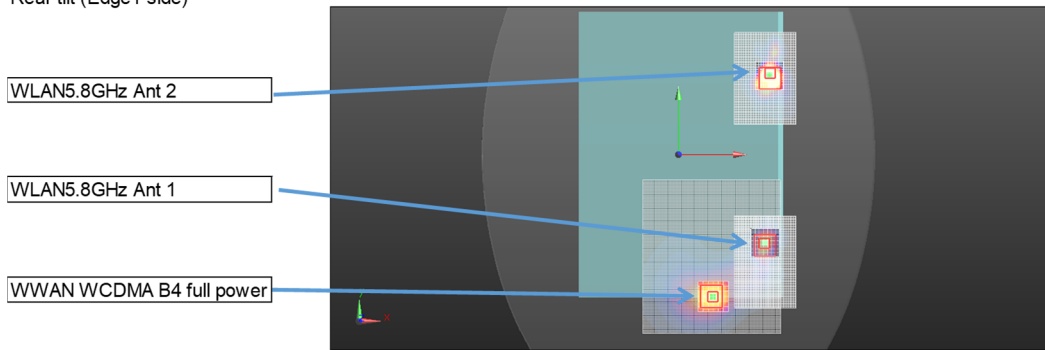

Mode	Ant	No	X mm	Y mm	Z mm	Combination	d: Calculated distance (mm)
WWAN WCDMA B4 full power	#1	1	36.00	-138.00	-3.29		
WLAN5.8GHz	Ant 1	2	83.80	-85.60	1.29	No1+No2	71.07
WLAN5.8GHz	Ant 2	3	88.60	81.60	1.51	No1+No3	225.86


The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.637	0.336		No.1 + No.2	0.973	71.07	0.014	No
Rear tilt(Edge 1 side)	0.637		0.729	No.1 + No.3	1.366	225.86	0.007	No

### 13.3 WCDMA band 5

#### 13.3.1 Rear:WWAN WCDMA B5 full power + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2

Rear

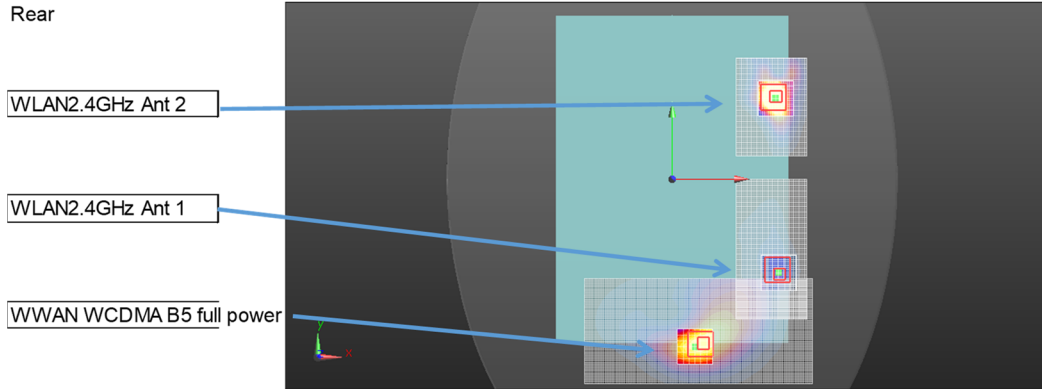


Mode	Ant	No	X mm	Y mm	Z mm	Combination	d: Calculated distance (mm)
WWAN WCDMA B5 full	#1	1	25.50	-140.50	-3.64		
WLAN2.4GHz	Ant 1	2	92.00	-82.40	1.43	No1+No2	88.45
WLAN2.4GHz	Ant 2	3	88.60	72.20	1.32	No1+No3	221.92

The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear	0.646	0.120		No.1 + No.2	0.766	88.45	0.008	No
Rear	0.646		0.852	No.1 + No.3	1.498	221.92	0.008	No

#### 13.3.2 Rear tilt (Edge1 side):WWAN WCDMA B5 full power + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2

Rear tilt (Edge1 side)

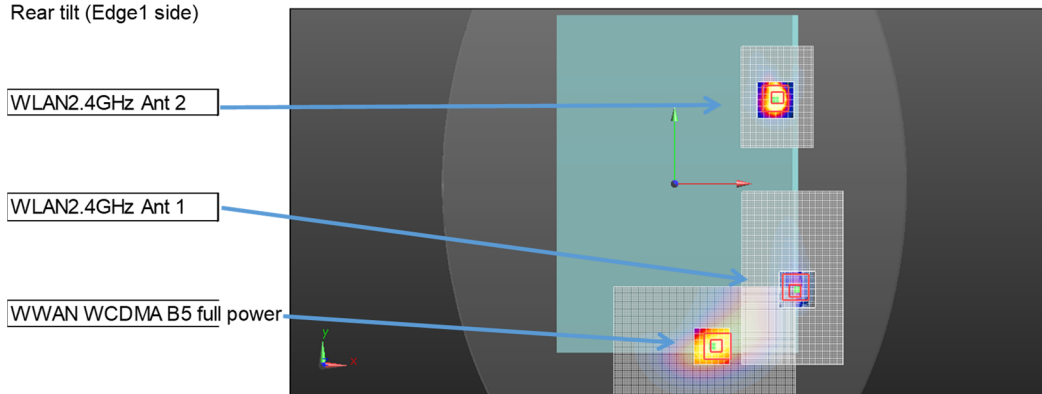


Mode	Ant	No	X mm	Y mm	Z mm	Combination	d: Calculated distance (mm)
WWAN WCDMA B5 full	#1	1	33.00	-134.50	-3.59		
WLAN2.4GHz	Ant 1	2	99.60	-89.60	1.60	No1+No2	80.49
WLAN2.4GHz	Ant 2	3	85.80	71.60	1.19	No1+No3	212.81

The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.849	0.240		No.1 + No.2	1.089	80.49	0.014	No
Rear tilt(Edge 1 side)	0.849		0.938	No.1 + No.3	1.787	212.81	0.011	No

13.3.3 Rear tilt (Edge1 side):WWAN WCDMA B5 full power + WLAN5.3GHz Ant 1 + WLAN5.3GHz Ant 2  
Rear tilt (Edge1 side)

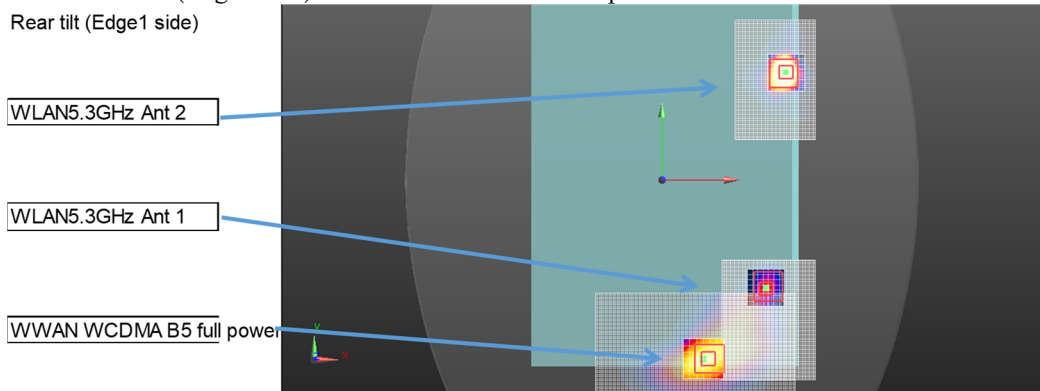


Mode	Ant	No	X	Y	Z	Combination	d: Calculated distance (mm)
			mm	mm	mm		
WWAN WCDMA B5 full	#1	1	33.00	-134.50	-3.59		
WLAN5.3GHz	Ant 1	2	78.40	-82.20	0.95	No1+No2	69.41
WLAN5.3GHz	Ant 2	3	94.20	79.80	1.49	No1+No3	222.93

The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.849	0.238		No.1 + No.2	1.087	69.41	0.016	No
Rear tilt(Edge 1 side)	0.849		0.830	No.1 + No.3	1.679	222.93	0.010	No

13.3.4 Rear tilt (Edge1 side):WWAN WCDMA B5 full power + WLAN5.3GHz Ant 1 + WLAN5.3GHz Ant 2  
Rear tilt (Edge1 side)

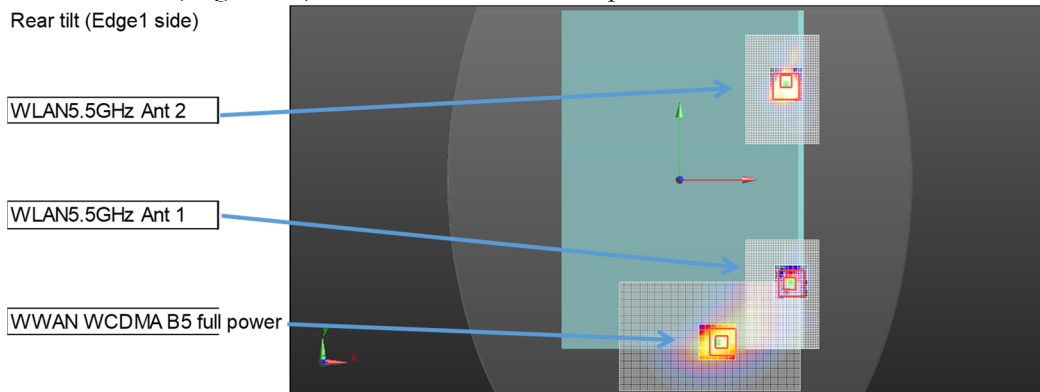


Mode	Ant	No	X	Y	Z	Combination	d: Calculated distance (mm)
			mm	mm	mm		
WWAN WCDMA B5 full	#1	1	33.00	-134.50	-3.59		
WLAN5.5GHz	Ant 1	2	90.80	-86.20	1.28	No1+No2	75.48
WLAN5.5GHz	Ant 2	3	87.60	82.60	1.32	No1+No3	223.91

The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.849	0.313		No.1 + No.2	1.162	75.48	0.017	No
Rear tilt(Edge 1 side)	0.849		0.808	No.1 + No.3	1.657	223.91	0.010	No

13.3.5 Rear tilt (Edge1 side):WWAN WCDMA B5 full power + WLAN5.8GHz Ant 1 + WLAN5.8GHz Ant 2

Rear tilt (Edge1 side)

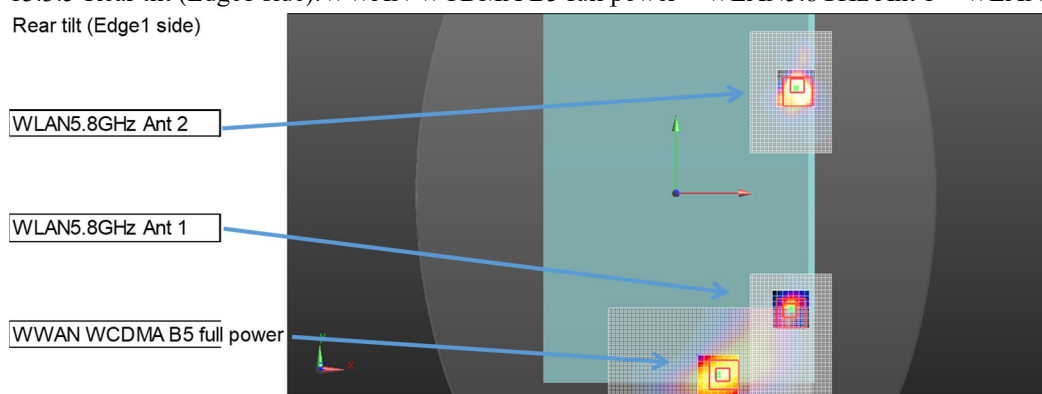

Mode	Ant	No	X mm	Y mm	Z mm	Combination	d: Calculated distance (mm)
WWAN WCDMA B5 full	#1	1	33.00	-134.50	-3.59		
WLAN5.8GHz	Ant 1	2	83.80	-85.60	1.29	No1+No2	70.68
WLAN5.8GHz	Ant 2	3	88.60	81.60	1.51	No1+No3	223.20


The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.849	0.336		No.1 + No.2	1.185	70.68	0.018	No
Rear tilt(Edge 1 side)	0.849		0.729	No.1 + No.3	1.578	223.20	0.009	No

### 13.4 LTE band 2

#### 13.4.1 Rear tilt (Edge1 side):WWAN LTE B2 full power + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2

Rear tilt (Edge1 side)

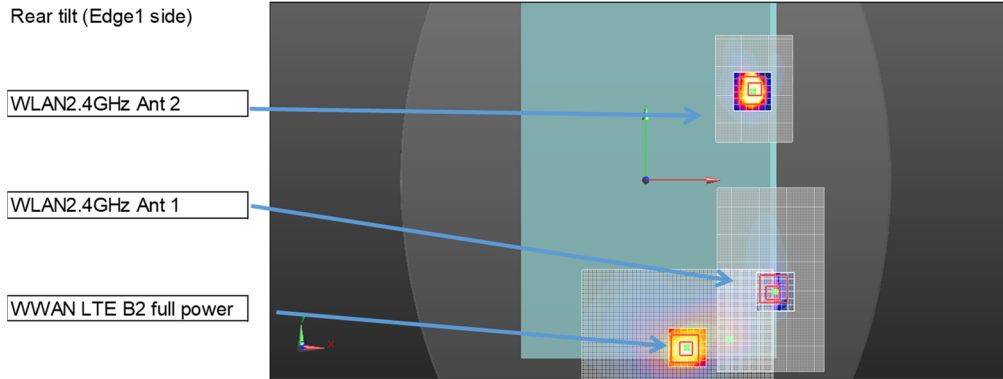


Mode	Ant	No	X	Y	Z	Combination	d: Calculated distance (mm)
			mm	mm	mm		
WWAN LTE B2 full power	#1	1	32.50	-133.50	-3.06		
WLAN2.4GHz	Ant 1	2	99.60	-89.60	1.60	No1+No2	80.32
WLAN2.4GHz	Ant 2	3	85.80	71.60	1.19	No1+No3	211.96

The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.813	0.240		No.1 + No.2	1.053	80.32	0.013	No
Rear tilt(Edge 1 side)	0.813		0.938	No.1 + No.3	1.751	211.96	0.011	No

#### 13.4.2 Rear tilt (Edge1 side):WWAN LTE B2 full power + WLAN5.3GHz Ant 1 + WLAN5.3GHz Ant 2

Rear tilt (Edge1 side)

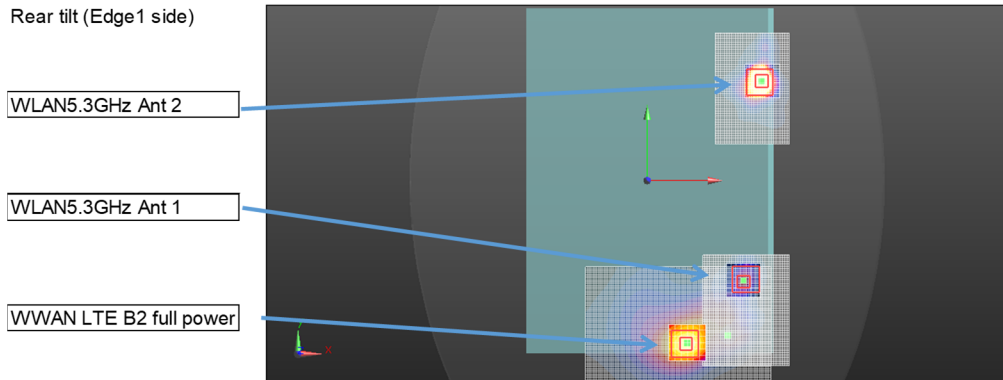


Mode	Ant	No	X	Y	Z	Combination	d: Calculated distance (mm)
			mm	mm	mm		
WWAN LTE B2 full power	#1	1	32.50	-133.50	-3.06		
WLAN5.3GHz	Ant 1	2	78.40	-82.20	0.95	No1+No2	68.95
WLAN5.3GHz	Ant 2	3	94.20	79.80	1.49	No1+No3	222.09

The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.813	0.238		No.1 + No.2	1.051	68.95	0.016	No
Rear tilt(Edge 1 side)	0.813		0.830	No.1 + No.3	1.643	222.09	0.009	No

13.4.3 Rear tilt (Edge1 side):WWAN LTE B2 full power + WLAN5.5GHz Ant 1 + WLAN5.5GHz Ant 2

Rear tilt (Edge1 side)

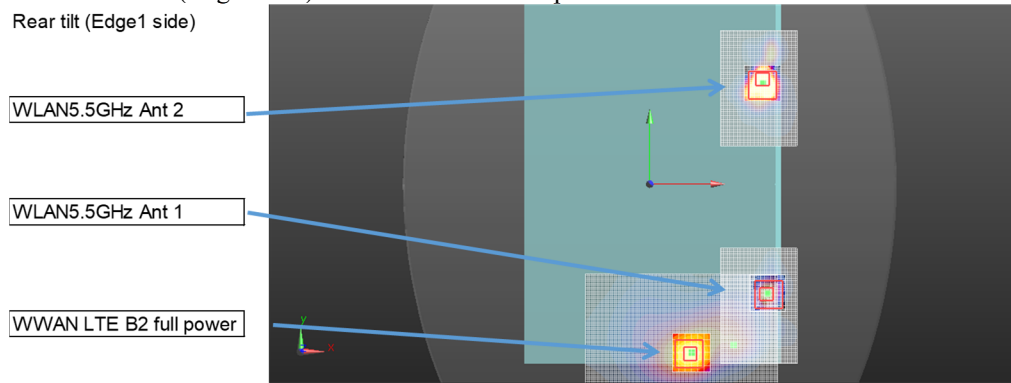


Mode	Ant	No	X mm	Y mm	Z mm	Combination	d: Calculated distance (mm)
WWAN LTE B2 full power	#1	1	32.50	-133.50	-3.06		
WLAN5.5GHz	Ant 1	2	90.80	-86.20	1.28	No1+No2	75.20
WLAN5.5GHz	Ant 2	3	87.60	82.60	1.32	No1+No3	223.06

The Peak Location Separation Distance is computed by using the formula below:  
 $\text{SQRT}((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	$\Sigma$ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR ( $\leq 0.04$ )	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.813	0.313		No.1 + No.2	1.126	75.20	0.016	No
Rear tilt(Edge 1 side)	0.813		0.808	No.1 + No.3	1.621	223.06	0.009	No

13.4.4 Rear tilt (Edge1 side):WWAN LTE B2 full power + WLAN5.8GHz Ant 1 + WLAN5.8GHz Ant 2

Rear tilt (Edge1 side)

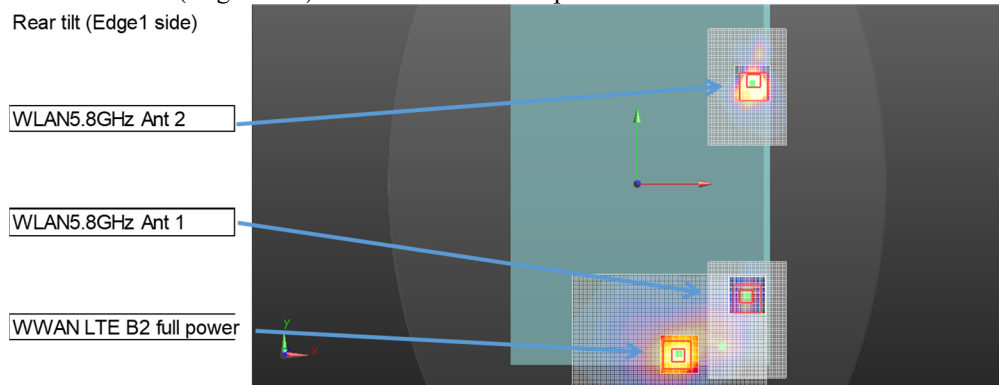

Mode	Ant	No	X mm	Y mm	Z mm	Combination	d: Calculated distance (mm)
WWAN LTE B2 full powe	#1	1	32.50	-133.50	-3.06		
WLAN5.8GHz	Ant 1	2	83.80	-85.60	1.29	No1+No2	70.32
WLAN5.8GHz	Ant 2	3	88.60	81.60	1.51	No1+No3	222.34


The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.813	0.336		No.1 + No.2	1.149	70.32	0.018	No
Rear tilt(Edge 1 side)	0.813		0.729	No.1 + No.3	1.542	222.34	0.009	No

### 13.5 LTE band 4

#### 13.5.1 Rear: WWAN LTE B4 full power + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2

Rear

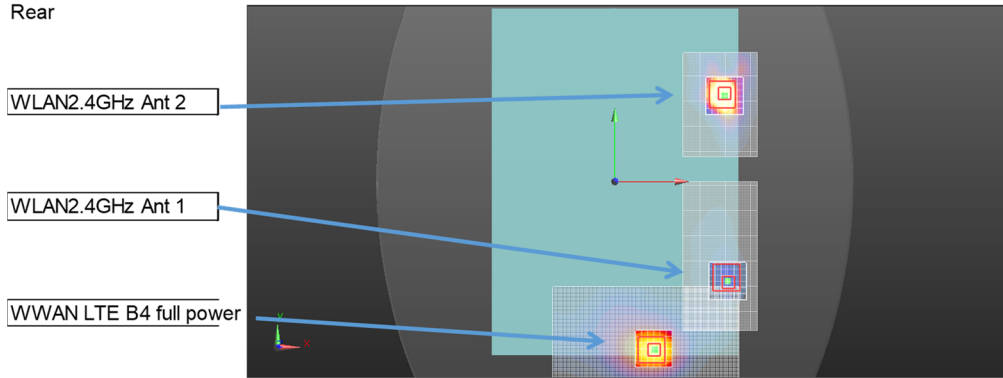


Mode	Ant	No	X mm	Y mm	Z mm	Combination	d: Calculated distance (mm)
WWAN LTE B4 full pow	#1	1	32.50	-136.00	0.11		
WLAN2.4GHz	Ant 1	2	92.00	-82.40	1.43	No1+No2	80.09
WLAN2.4GHz	Ant 2	3	88.60	72.20	1.32	No1+No3	215.63

The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear	0.677	0.120		No.1 + No.2	0.797	80.09	0.009	No
Rear	0.677		0.852	No.1 + No.3	1.529	215.63	0.009	No

#### 13.5.2 Rear tilt (Edge1 side): WWAN LTE B4 full power + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2

Rear tilt (Edge1 side)

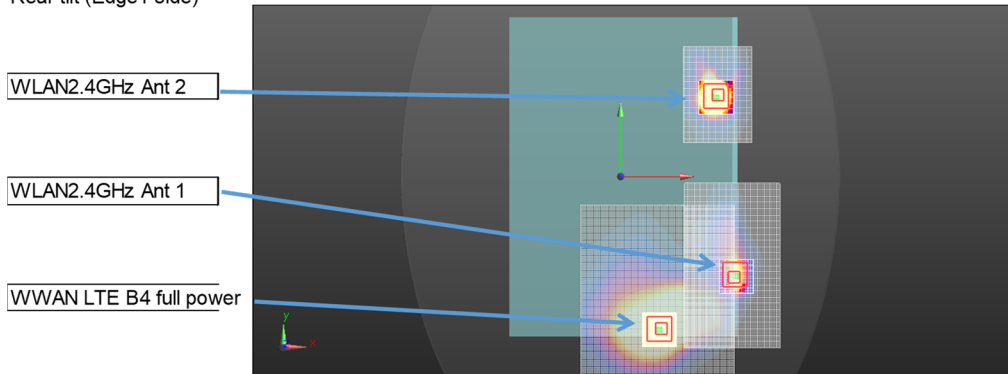

Mode	Ant	No	X mm	Y mm	Z mm	Combination	d: Calculated distance (mm)
WWAN LTE B4 full pow	#1	1	37.00	-133.50	0.11		
WLAN2.4GHz	Ant 1	2	99.60	-89.60	1.60	No1+No2	76.47
WLAN2.4GHz	Ant 2	3	85.80	71.60	1.19	No1+No3	210.83

The Peak Location Separation Distance is computed by using the formula below:  
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Test Position	No.1 WWAN #1	No.2 WLAN Ant 1	No.3 WLAN Ant 2	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
Rear tilt(Edge 1 side)	0.957	0.240		No.1 + No.2	1.197	76.47	0.017	No
Rear tilt(Edge 1 side)	0.957		0.938	No.1 + No.3	1.895	210.83	0.012	No