

RF EXPOSURE TEST REPORT

Test Report No. 15169635H-A

Customer	Panasonic Corporation of North America
Description of EUT	Wireless Module (Tested inside of Panasonic Personal Computer FZ-G2)
Model Number of EUT	WW21A
FCC ID	ACJ9TGWW21A
Test Regulation	FCC47CFR 2.1093
Test Result	Complied
Issue Date	September 9, 2024
Remarks	Part 1 Test Under Static Transmission Scenario *The highest reported value SPLSR: 0.03 Simultaneous transmission: 1.58 W/kg _{1g} TER: 0.99

Representative test engineer



Tomohisa Nakagawa
Engineer

Approved by



Takayuki Shimada
Leader



CERTIFICATE 5107.02

The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
 There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers RF Exposure technical requirements.
- It does not cover administrative issues such as Manual or non RF Exposure test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 15169635H-A

Revision	Test report No.	Date	Page Revised Contents
- (Original)	15169635H-A	September 9, 2024	-

Reference: Abbreviations (Including words undescribed in this report)

AAN	Asymmetric Artificial Network	GPS	Global Positioning System
AC	Alternating Current	Hori.	Horizontal
AM	Amplitude Modulation	ICES	Interference-Causing Equipment Standard
AMN	Artificial Mains Network	I/O	Input/Output
Amp, AMP	Amplifier	IEC	International Electrotechnical Commission
ANSI	American National Standards Institute	IEEE	Institute of Electrical and Electronics Engineers
Ant, ANT	Antenna	IF	Intermediate Frequency
AP	Access Point	ILAC	International Laboratory Accreditation Conference
ASK	Amplitude Shift Keying	ISED	Innovation, Science and Economic Development Canada
Atten., ATT	Attenuator	ISN	Impedance Stabilization Network
AV	Average	ISO	International Organization for Standardization
BPSK	Binary Phase-Shift Keying	JAB	Japan Accreditation Board
BR	Bluetooth Basic Rate	LAN	Local Area Network
BT	Bluetooth	LCL	Longitudinal Conversion Loss
BT LE	Bluetooth Low Energy	LIMS	Laboratory Information Management System
BW	BandWidth	LISN	Line Impedance Stabilization Network
C.F	Correction Factor	MRA	Mutual Recognition Arrangement
Cal Int	Calibration Interval	N/A	Not Applicable
CAV	CISPR AV	NIST	National Institute of Standards and Technology
CCK	Complementary Code Keying	NS	No signal detect.
CDN	Coupling Decoupling Network	NSA	Normalized Site Attenuation
Ch., CH	Channel	OBW	Occupied BandWidth
CISPR	Comite International Special des Perturbations Radioelectriques	OFDM	Orthogonal Frequency Division Multiplexing
Corr.	Correction	PER	Packet Error Rate
CPE	Customer premise equipment	PK	Peak
CW	Continuous Wave	P _{LT}	long-term flicker severity
DBPSK	Differential BPSK	POHC(A)	Partial Odd Harmonic Current
DC	Direct Current	Pol., Pola.	Polarization
DET	Detector	PR-ASK	Phase Reversal ASK
D-factor	Distance factor	P _{ST}	short-term flicker severity
Dmax	maximum absolute voltage change during an observation period	QAM	Quadrature Amplitude Modulation
DQPSK	Differential QPSK	QP	Quasi-Peak
DSSS	Direct Sequence Spread Spectrum	QPSK	Quadrature Phase Shift Keying
DUT	Device Under Test	r.m.s., RMS	Root Mean Square
EDR	Enhanced Data Rate	RBW	Resolution BandWidth
e.i.r.p., EIRP	Equivalent Isotropically Radiated Power	RE	Radio Equipment
EM clamp	Electromagnetic clamp	REV	Reverse
EMC	ElectroMagnetic Compatibility	RF	Radio Frequency
EMI	ElectroMagnetic Interference	RFID	Radio Frequency Identifier
EMS	ElectroMagnetic Susceptibility	RNSS	Radio Navigation Satellite Service
EN	European Norm	RSS	Radio Standards Specifications
e.r.p., ERP	Effective Radiated Power	Rx	Receiving
ETSI	European Telecommunications Standards Institute	SINAD	Ratio of (Signal + Noise + Distortion) to (Noise + Distortion)
EU	European Union	S/N	Signal to Noise ratio
EUT	Equipment Under Test	SA, S/A	Spectrum Analyzer
Fac.	Factor	SG	Signal Generator
FCC	Federal Communications Commission	SVSWR	Site-Voltage Standing Wave Ratio
FHSS	Frequency Hopping Spread Spectrum	THC(A)	Total Harmonic Current
FM	Frequency Modulation	THD(%)	Total Harmonic Distortion
Freq.	Frequency	TR, T/R	Test Receiver
FSK	Frequency Shift Keying	Tx	Transmitting
Fund	Fundamental	VBW	Video BandWidth
FWD	Forward	Vert.	Vertical
GFSK	Gaussian Frequency-Shift Keying	WLAN	Wireless LAN
GNSS	Global Navigation Satellite System	xDSL	Generic term for all types of DSL technology
			(DSL: Digital Subscriber Line)

Contains

Section 0	Introduction	5
Section 1	Customer information	5
Section 2	Equipment under test (EUT)	6
2.1	Identification of EUT	6
2.2	Product description	6
2.3	Radio Specification	7
2.4	Others information of the host and module	8
Section 3	Definitions	9
Section 4	Test standard information	10
4.1	Test specification	10
4.2	Published RF exposure KDB procedures and companion procedures	10
4.3	Work Procedures	10
4.4	Reference	10
Section 5	Limits	11
5.1	Exposure limit for SAR (FCC)	11
5.2	For PD (Above 6 GHz) (FCC)	11
Section 6	Location	11
Section 7	Test result	12
7.1	Verdict	12
7.2	Stand-alone SAR result	12
7.3	Simultaneous transmission SAR result	12
Section 8	Uncertainty	12
Section 9	Simultaneous transmission SAR test exclusion considerations	13
9.1	Sum and SPLSR	13
9.2	Total exposure ratio	14
Appendix	Simultaneous transmission	15

Section 0 Introduction

Purpose of this document is new simultaneous transmission considerations with combination WWAN and WLAN/BT module, because WLAN/BT module is replaced to new one as new option of the host. Also this new module does not support time average SAR functionality (TAS) this condition is same as original one. Additionally WWAN module is same as original one. TAS assessment has already covered by test report issued by UL Japan

This device has three transmitters: WWAN, WLAN/BT and RFID, each SAR values are quoted from below test reports, than outside the scope of this test.

Table. WWAN original certification number

FCC certification number	ACJ9TGWW21A	Report number	14367173H-A 14367173H-B-R1 14367173H-C
ISED certification number	216H-CFWW21A	Report number	14367173H-D 14367173H-E 14367173H-F respectively part 0,1,2

In this report, it referred it as WWAN original report.

For simultaneous transmission:

WLAN / BT and RFID value is quoted from

Table. WLAN / BT original certification number

FCC certification number	ACJ9TGWL23C	Report number	15182659H-A-R2
ISED certification number	216H-CFWL23C	Report number	15182659H-B-R2

In this report, it referred it as WLAN report.

Table. RFID original certification number

FCC certification number	ACJ9TGWL23C	Report number	15182659H-A-R2*
ISED certification number	216H-CFRI20A	Report number	15182659H-B-R2*

In this report, it referred it as RFID report.

* RFID evaluation is done within the WLAN test report.

Section 1 Customer information

Company Name	Panasonic Corporation of North America
Address	Two Riverfront Plaza, Newark, New Jersey, 07102-5490, USA
Telephone Number	+1-201-348-7760
Contact Person	Ben Botros

*Remarks:

Panasonic Connect Co., Ltd. is on behalf of the applicator: Panasonic Corporation of North America (Company incorporated abroad).

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date

Section 2 Equipment under test (EUT)

2.1 Identification of EUT

Description	Wireless Module
Model Number	WW21A
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab

<Information of Host device>

Type of Equipment	Personal Computer
Model No.	FZ-G2
Remarks	Intel Core Ultra 5 processor 135U, 12M Cache, up to 4.40 GHz 10.1 inch LCD (1920 x 1200)

2.2 Product description

General Specification

Rating	DC 3.0 to 3.6 V
--------	-----------------

2.3 Radio Specification

WWAN Module

(Tested inside of Panasonic Personal Computer FZ-G2)

Wireless technologies	Dup.	Band	Mode
WCDMA	FDD	2	UMTS Rel. 99 (Data) HSDPA (Rel. 5)
	FDD	4	HSUPA (Rel. 6), HSPA+ (Rel. 7), DC-HSDPA (Rel. 8)
	FDD	5	
LTE	FDD	2	QPSK, 16QAM, 64AQM, 256QAM
	FDD	4	
	FDD	5	Downlink MIMO Support: Yes (2x2, 4x4)
	FDD	7	Supported band: B2, B4, B7, B25, B38, B41, B42, B48, B66
	FDD	12	
	FDD	13	Uplink MIMO Support: No
	FDD	14	Uplink transmission is limited to a single output stream.
	FDD	17	
	FDD	25	
	FDD	26	
	FDD (Rx only)	29	
	TDD	38	
	TDD	41	
	TDD	42	
	TDD (Rx only)	46	
	TDD	48	
	FDD	66	
	FDD	71	
LTE CA	Downlink		Uplink B42: not used in US (FCC) / B48: not used in Canada (ISED)
	Maximum 7 carriers		Maximum 2 carriers Supported combination: <Intra-band contiguous> 7C, 41C, 42C <Inter-band> not supported
5G NR (FR1)	FDD	15 kHz	n2 Pi/2 BPSK (DFT-s-OFDM), QPSK (CP-OFDM/DFT-s-OFDM), 16QAM (CP-OFDM/DFT-s-OFDM), 64QAM (CP-OFDM/DFT-s-OFDM), 256QAM (CP-OFDM/DFT-s-OFDM)
	FDD	15 kHz	n5
	TDD	30 kHz	n41
	FDD	15 kHz	n66
	FDD	15 kHz	n71
	TDD	30 kHz	n77
	TDD	30 kHz	n78
	-	-	Downlink MIMO Support: Yes (2x2, 4x4) Supported band : n2, n41, n66, n77, n78 Uplink MIMO Support: No
	-	-	Uplink transmission is limited to a single output stream.
EN-DC (LTE-FR1 Sub6) (NSA mode only)	Supported combination		
	LTE Anchor Bands for NR band n2		LTE Band 5/12/13/14/48
	LTE Anchor Bands for NR band n5		LTE Band 2/7/66
	LTE Anchor Bands for NR band n41		LTE Band 2/4/25/26/41/66
	LTE Anchor Bands for NR band n66		LTE Band 5/12/13/14/48/71
	LTE Anchor Bands for NR band n71		LTE Band 2/7/66
	LTE Anchor Bands for NR band n77		LTE Band 2/5/12/13/14/41/66
	LTE Anchor Bands for NR band n78*		LTE Band 2/4/5/7/12/13/38/41/66/71 *n78: not used in US (FCC)

WLAN Module

Model: WL23C (FCC ID and ISED Certification Number is shown in section 0)

Band & Mode	Operating Mode	Tx Frequency
WLAN 2.4 GHz	802.11b 802.11g 802.11n-20 / 40 802.11ax-20 / 40	2412 MHz ~ 2472 MHz (20 MHz BW) 2422 MHz ~ 2462 MHz (40 MHz BW)
WLAN 5 GHz	802.11a 802.11n-20 802.11ac-20 802.11ax-20	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
	802.11n-40 802.11ac-40 802.11ax-40	5190 MHz ~ 5230 MHz 5270 MHz ~ 5310 MHz 5510 MHz ~ 5710 MHz 5755 MHz ~ 5795 MHz
	802.11n-80 802.11ac-80 802.11ax-80	5210 MHz 5290 MHz 5530 MHz, 5690 MHz 5775 MHz
	802.11ac-160 802.11ax-160	5250 MHz 5570 MHz
WLAN 6 GHz	802.11ax-20 802.11ax-40 802.11ax-80 802.11ax-160	5955 MHz ~ 7115 MHz 5965 MHz ~ 7085 MHz 5985 MHz ~ 7025 MHz 6025 MHz ~ 6985 MHz
Bluetooth	BR / EDR / LE	2402 MHz ~ 2480 MHz

RFID Module

Model: RI20A (FCC ID and ISED Certification Number is shown in section 0)

Equipment Type	Transceiver
Frequency of Operation	13.56 MHz
Type of Modulation	ASK

2.4 Others information of the host and module

All information and supplementary information, such as antenna location and settings of radio, is shown in the original report.

Section 3 Definitions

This may contain the definitions which are not used in this report.

Specific Absorption Rate (SAR)	The time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ), as shown in the following equation: $SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$
Power density (PD) or S_{av}	The energy per unit time and unit area crossing a surface of area A characterized by the normal unit vector \hat{n} and averaging time. $S_{av} = \frac{1}{AT} \iint (E \times H) \cdot \hat{n} dA dT$
Absorbed power density (APD)	The APD (absorbed power density) shall be derived from the measured SAR values using the formulas in the Compliance Assessment of the Epithelial. $APD \ 1cm^2(W/m^2) = 10(kg/m^2) \times SAR_{-1g}(W/kg)$ $APD \ 4cm^2(W/m^2) = 20(kg/m^2) \times SAR_{-8g}(W/kg)$
Reported SAR / PD (IPD or APD)	Measured SAR / PD (IPD or APD) is scaled to the maximum tune-up tolerance limit and the maximum duty by the following formulas. $\text{Reported SAR, PD} = \text{Measured SAR, or PD} \times \text{scale factor for power} \times \text{scaled factor for duty(if needed)} \times \text{Compensatefactor(if needed)}$ Where: $\text{Scaled factor for duty} = \frac{1}{\text{Duty}}$ $\text{Compensate factor} = 10^{\frac{\text{measurement uncert.}[dB]}{10}} - 1 + 0.7$
Maximum Tune-up tolerance limit, Tune up limit or Tune-up limit	Maximum power including tolerance power specified by customer.

Symbol	Quantity	Unit	Dimensions
E	Electric field	volt per meter	V / m
f	Frequency	hertz	Hz
H	Magnetic field	ampere per meter	A / m
λ	Wavelength	meter	m
S	Local power density	watt per square meter	W / m ²
PD	Spatial-average power density	watt per square meter	W / m ² (mW / cm ²)
SAR	Specific Absorption Rate	watt per square meter	W / kg

Section 4 Test standard information

4.1 Test specification

<input checked="" type="checkbox"/> FCC47CFR 2.1093	RF Exposure Procedures and Equipment Authorization Policies for Portable Devices
<input type="checkbox"/> RSS-102 Issue 6	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
<input type="checkbox"/> RSS-102 Issue 5 Amendment 1	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

4.2 Published RF exposure KDB procedures and companion procedures

Name of documents	Title
<input type="checkbox"/> KDB 447498 D01(v06)	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
<input checked="" type="checkbox"/> KDB 447498 D04(v01)	Interim General RF Exposure Guidance
<input type="checkbox"/> KDB 447498 D02(v02r01)	SAR Measurement Procedures for USB Dongle Transmitters
<input type="checkbox"/> KDB 648474 D04(v01r04)	SAR Evaluation Considerations for Wireless Handsets
<input type="checkbox"/> KDB 941225 D01(v03r01)	3G SAR Measurement Procedures
<input type="checkbox"/> KDB 941225 D05(v02r05)	SAR Evaluation Considerations for LTE Devices
<input type="checkbox"/> KDB 941225 D06(v02r01)	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
<input type="checkbox"/> KDB 941225 D07(v01r02)	SAR Evaluation Procedures for UMPC Mini-Tablet Devices
<input type="checkbox"/> KDB 616217 D04(v01r02)	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
<input checked="" type="checkbox"/> KDB 865664 D01(v01r04)	SAR Measurement Requirements for 100MHz to 6 GHz
<input type="checkbox"/> KDB 248227 D01(v02r02)	SAR Guidance for IEEE 802.11 (Wi-Fi) transmitters
<input type="checkbox"/> SPR-APD Issue 1	Supplementary Procedure for Assessing Specific Absorption Rate (SAR) and Absorbed Power Density (APD) Compliance of Portable Devices in the 6 GHz Band (5925-7125 MHz)
<input type="checkbox"/> RSS-102.SAR.MEAS	Measurement Procedure for Assessing Specific Absorption Rate (SAR) Compliance in Accordance with RSS-102

4.3 Work Procedures

Name of documents	Title or details
<input checked="" type="checkbox"/> C/N: Work Instructions-ULID-003598	UL Japan, Inc.'s SAR Measurement Equipment Calibration and Inspection Work Procedure
<input checked="" type="checkbox"/> C/N: Work Instructions-ULID-003599	UL Japan, Inc.'s SAR Measurement Work Procedure
<input type="checkbox"/> IEEE Std 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
<input type="checkbox"/> IEC/IEEE 62209-1528 Edition 1.0 2020-10	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-worn wireless communication devices - Human models, instrumentation and procedures (Frequency range of 4 MHz to 10 GHz)
<input type="checkbox"/> C/N: Work Instructions-ULID-003619	UL Japan, Inc.'s Power Density Measurement Procedure
<input type="checkbox"/> IEC/IEEE 63195-1:2021	Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) - Part 1: Measurement procedure
<input type="checkbox"/> IEC/IEEE 63195-2:2021	Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) - Part 2: Computational procedure

4.4 Reference

Schmid & Partner Engineering AG, DASY Manual
TCB workshop slide decks.

Section 5 Limits

General Population / Uncontrolled Environments limit is applied.

5.1 Exposure limit for SAR (FCC)

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. because of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

5.2 For PD (Above 6 GHz) (FCC)

Frequency Range [MHz]	Power Density [mW/cm ²]	Average Time [Minutes]
(A) Limits For Occupational / Controlled Environments		
1,500 – 100,000	5	6
(B) Limits For General Population / Uncontrolled Environments		
1,500 – 100,000	1	30

Note: 1.0 mW/cm² is 10 W/m²

Section 6 Location

UL Japan, Inc. Ise EMC Lab.
Shielded room for SAR testing.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919
ISED Lab Company Number: 2973C / CAB identifier: JP0002

Section 7 Test result

7.1 Verdict

Complied
Highest result are next section.

7.2 Stand-alone SAR result

Standalone SAR results are shown in the original report.

7.3 Simultaneous transmission SAR result

Simultaneous Transmission

Body: 1.577 W/kg_{1g}

SPLSR: 0.033

TER: 0.991

Section 8 Uncertainty

This report covers simultaneous transmission, so the uncertainty itself is shown in original test report.

Section 9 Simultaneous transmission SAR test exclusion considerations

The data is shown in appendix of Simultaneous transmission.

9.1 Sum and SPLSR

KDB 447498 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based on sum of SAR, the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit, then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met. When a pair of the summation is above 1.58 W/kg for 1g SAR, then SAR to Peak Location Ratio (SPLSR) is performed, as conservative even though applicable limit is 1.6 W/kg, finally sum of SAR value is convert to TER, see next section.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR_1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR_2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of

$$Ri = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$SPLSR \leq 0.04$$

When an individual antenna transmits on two bands simultaneously, the sum of the highest *reported* SAR for the frequency bands should be used to determine SAR_1 or SAR_2 . When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures.

9.2 Total exposure ratio

Either SAR-based or MPE-based exemption may be considered for test exemption for fixed, mobile, or portable device exposure conditions; therefore, the contributions from each exemption in conjunction with the measured SAR (Evaluated_k term) shall be used to determine exemption for simultaneous transmission according to Formula is from § 1.1307(b)(3)(ii)(B).

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure\ Limit_k} \leq 1$$

Where:

a: number of fixed, mobile, or portable RF sources claiming exemption using the § 1.1307(b)(3)(i)(B) formula for P_{th}, including existing exempt transmitters and those being added.

b: number of fixed, mobile, or portable RF sources claiming exemption using the applicable § 1.1307(b)(3)(i)(C) Table 1 formula for Threshold ERP, including existing exempt transmitters and those being added.

c: number of existing fixed, mobile, or portable RF sources with known evaluation for the specified minimum distance.

P_i: the available maximum time-averaged power or the ERP, whichever is greater, for fixed, mobile, or portable RF source i at a distance between 0.5 cm and 40 cm (inclusive).

P_{th,i}: the exemption threshold power (P_{th}) according to the § 1.1307(b)(3)(i)(B) formula for fixed, mobile, or portable RF source i. Also, The P_{th} is described at section "SAR Exposure Conditions"

ERP_j: the available maximum time-averaged power or the ERP, whichever is greater, of fixed, mobile, or portable RF source j.

ERP_{th,j}: exemption threshold ERP for fixed, mobile, or portable RF source j, at a distance of at least λ/2π, according to the applicable § 1.1307(b)(3)(i)(C) Table 1 formula at the location in question.

Evaluated_k: the maximum reported SAR or MPE of fixed, mobile, or portable RF source k either in the device or at the transmitter site from an existing evaluation.

Exposure Limit_k: either the general population/uncontrolled maximum permissible exposure (MPE) or specific absorption rate (SAR) limit for each fixed, mobile, or portable sources, as applicable

Appendix Simultaneous transmission

Sum of the SAR

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
WCDMA B2	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.187	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.787	0.591	0.896	0.910	0.826	
Edge3	0.145	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.145	0.145	0.145	0.145	0.145	0.145	0.145
Edge4	0.480	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.533	0.522	0.512	0.491	0.492		
Edge4 Reduction	0.915	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.968	0.957	0.947	0.926	0.927		
Rear	0.503	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.097	0.742	1.154	1.113	1.132	
Rear Reduction	0.513	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.107	0.752	1.164	1.123	1.142	
Rear tilt(Edge1)	0.614	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.681	0.976	1.826	1.775	1.688	
Rear tilt(Edge4)	0.806	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.862	0.852	0.908	0.941	0.932	
Rear tilt(Edge4) Reduction	0.873	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.919	0.975	1.008	0.999		

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
WCDMA B4	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.174	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.774	0.578	0.883	0.897	0.813	
Edge3	0.240	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.240	0.240	0.240	0.240	0.240	0.240	
Edge4	0.775	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.828	0.817	0.807	0.786	0.787		
Edge4 Reduction	1.026	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	1.079	1.068	1.058	1.037	1.038		
Rear	0.587	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.181	0.826	1.238	1.197	1.216	
Rear Reduction	0.499	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.093	0.738	1.150	1.109	1.128	
Rear tilt(Edge1)	0.704	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.771	1.066	1.916	1.865	1.778	
Rear tilt(Edge4)	1.027	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	1.083	1.073	1.129	1.162	1.153	
Rear tilt(Edge4) Reduction	1.074	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	1.130	1.120	1.176	1.209	1.200	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
WCDMA B5	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.170	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.770	0.574	0.879	0.893	0.809	
Edge3	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.046	0.046	0.046	0.046	0.046	0.046	
Edge4	0.482	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.535	0.524	0.514	0.493	0.494		
Edge4 Reduction	0.851	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.904	0.893	0.883	0.862	0.863		
Rear	0.616	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.210	0.855	1.267	1.226	1.245	
Rear Reduction	0.320	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.914	0.559	0.971	0.930	0.949	
Rear tilt(Edge1)	0.693	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.760	1.055	1.905	1.854	1.767	
Rear tilt(Edge4)	0.815	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.871	0.861	0.917	0.950	0.941	
Rear tilt(Edge4) Reduction	0.481	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.537	0.527	0.583	0.616	0.607	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B2	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.318	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.918	0.722	1.027	1.041	0.957	
Edge3	0.147	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.147	0.147	0.147	0.147	0.147	0.147
Edge4	0.631	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.684	0.673	0.663	0.642	0.643	
Edge4 Reduction	0.864	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.917	0.906	0.896	0.875	0.876	
Rear	0.394	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.988	0.633	1.045	1.004	1.023	
Rear Reduction	0.523	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.117	0.762	1.174	1.133	1.152	
Rear tilt(Edge1)	0.891	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.958	1.253	2.103	2.052	1.965	
Rear tilt(Edge4)	0.835	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.891	0.881	0.937	0.970	0.961	
Rear tilt(Edge4) Reduction	0.827	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.883	0.873	0.929	0.962	0.953	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B4	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.120	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.720	0.524	0.829	0.843	0.759	
Edge3	0.215	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.215	0.215	0.215	0.215	0.215	
Edge4	0.858	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.911	0.900	0.890	0.869	0.870	
Edge4 Reduction	0.917	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.970	0.959	0.949	0.928	0.929	
Rear	0.466	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.060	0.705	1.117	1.076	1.095	
Rear Reduction	0.456	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.050	0.695	1.107	1.066	1.085	
Rear tilt(Edge1)	0.741	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.808	1.103	1.953	1.902	1.815	
Rear tilt(Edge4)	0.920	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.976	0.966	1.022	1.055	1.046	
Rear tilt(Edge4) Reduction	0.908	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.964	0.954	1.010	1.043	1.034	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B5	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.188	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.788	0.592	0.897	0.911	0.827	
Edge3	0.045	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.045	0.045	0.045	0.045	0.045	
Edge4	0.680	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.733	0.722	0.712	0.691	0.692	
Edge4 Reduction	0.832	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.885	0.874	0.864	0.843	0.844	
Rear	0.608	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.202	0.847	1.259	1.218	1.237	
Rear Reduction	0.351	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.945	0.590	1.002	0.961	0.980	
Rear tilt(Edge1)	0.743	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.810	1.105	1.955	1.904	1.817	
Rear tilt(Edge4)	0.737	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.793	0.783	0.839	0.872	0.863	
Rear tilt(Edge4) Reduction	0.532	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.588	0.578	0.634	0.667	0.658	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
	LTE B7	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)								
Edge1	0.125	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.725	0.529	0.834	0.848	0.764	
Edge3	0.142	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.142	0.142	0.142	0.142	0.142	
Edge4	0.457	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.510	0.499	0.489	0.468	0.469	
Edge4 Reduction	0.949	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	1.002	0.991	0.981	0.960	0.961	
Rear	0.566	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.160	0.805	1.217	1.176	1.195	
Rear Reduction	0.408	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.002	0.647	1.059	1.018	1.037	
Rear tilt(Edge1)	0.854	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.921	1.216	2.066	2.015	1.928	
Rear tilt(Edge4)	0.749	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.805	0.795	0.851	0.884	0.875	
Rear tilt(Edge4) Reduction	0.723	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.779	0.769	0.825	0.858	0.849	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
	LTE B12	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)								
Edge1	0.170	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.770	0.574	0.879	0.893	0.809	
Edge3	0.013	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.013	0.013	0.013	0.013	0.013	
Edge4	0.156	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.209	0.198	0.188	0.167	0.168	
Edge4 Reduction	0.760	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.813	0.802	0.792	0.771	0.772	
Rear	0.292	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.886	0.531	0.943	0.902	0.921	
Rear Reduction	0.214	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.808	0.453	0.865	0.824	0.843	
Rear tilt(Edge1)	0.416	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.483	0.778	1.628	1.577	1.490	
Rear tilt(Edge4)	0.359	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.415	0.405	0.461	0.494	0.485	
Rear tilt(Edge4) Reduction	0.406	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.462	0.452	0.508	0.541	0.532	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
	LTE B13	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)								
Edge1	0.251	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.851	0.655	0.960	0.974	0.890	
Edge3	0.006	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.006	0.006	0.006	0.006	0.006	
Edge4	0.309	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.362	0.351	0.341	0.320	0.321	
Edge4 Reduction	0.861	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.914	0.903	0.893	0.872	0.873	
Rear	0.453	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.047	0.692	1.104	1.063	1.082	
Rear Reduction	0.315	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.909	0.554	0.966	0.925	0.944	
Rear tilt(Edge1)	0.656	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.723	1.018	1.868	1.817	1.730	
Rear tilt(Edge4)	0.620	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.676	0.666	0.722	0.755	0.746	
Rear tilt(Edge4) Reduction	0.521	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.577	0.567	0.623	0.656	0.647	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B14	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.291	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.891	0.695	1.000	1.014	0.930	
Edge3	0.014	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.014	0.014	0.014	0.014	0.014	
Edge4	0.279	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.332	0.321	0.311	0.290	0.291	
Edge4 Reduction	0.963	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	1.016	1.005	0.995	0.974	0.975	
Rear	0.517	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.111	0.756	1.168	1.127	1.146	
Rear Reduction	0.334	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.928	0.573	0.985	0.944	0.963	
Rear tilt(Edge1)	0.740	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.807	1.102	1.952	1.901	1.814	
Rear tilt(Edge4)	0.729	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.785	0.775	0.831	0.864	0.855	
Rear tilt(Edge4) Reduction	0.549	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.605	0.595	0.651	0.684	0.675	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B14	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.167	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.767	0.571	0.876	0.890	0.806	
Edge3	0.018	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.018	0.018	0.018	0.018	0.018	
Edge4	0.118	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.171	0.160	0.150	0.129	0.130	
Edge4 Reduction	0.925	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.978	0.967	0.957	0.936	0.937	
Rear	0.279	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.873	0.518	0.930	0.889	0.908	
Rear Reduction	0.265	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.859	0.504	0.916	0.875	0.894	
Rear tilt(Edge1)	0.409	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.476	0.771	1.621	1.570	1.483	
Rear tilt(Edge4)	0.340	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.396	0.386	0.442	0.475	0.466	
Rear tilt(Edge4) Reduction	0.447	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.503	0.493	0.549	0.582	0.573	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B25	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.409	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	1.009	0.813	1.118	1.132	1.048	
Edge3	0.147	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.147	0.147	0.147	0.147	0.147	
Edge4	0.651	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.704	0.693	0.683	0.662	0.663	
Edge4 Reduction	0.885	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.938	0.927	0.917	0.896	0.897	
Rear	0.562	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.156	0.801	1.213	1.172	1.191	
Rear Reduction	0.548	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.142	0.787	1.199	1.158	1.177	
Rear tilt(Edge1)	0.882	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.949	1.244	2.094	2.043	1.956	
Rear tilt(Edge4)	0.836	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.892	0.882	0.938	0.971	0.962	
Rear tilt(Edge4) Reduction	0.853	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.909	0.899	0.955	0.988	0.979	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B26	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.205	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.805	0.609	0.914	0.928	0.844	
Edge3	0.034	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.034	0.034	0.034	0.034	0.034	
Edge4	0.540	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.593	0.582	0.572	0.551	0.552	
Edge4 Reduction	0.853	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.906	0.895	0.885	0.864	0.865	
Rear	0.621	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.215	0.860	1.272	1.231	1.250	
Rear Reduction	0.356	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.950	0.595	1.007	0.966	0.985	
Rear tilt(Edge1)	0.742	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.809	1.104	1.954	1.903	1.816	
Rear tilt(Edge4)	0.857	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.913	0.903	0.959	0.992	0.983	
Rear tilt(Edge4) Reduction	0.515	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.571	0.561	0.617	0.650	0.641	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B38	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.108	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.708	0.512	0.817	0.831	0.747	
Edge3	0.075	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.075	0.075	0.075	0.075	0.075	
Edge4	0.327	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.380	0.369	0.359	0.338	0.339	
Edge4 Reduction	0.888	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.941	0.930	0.920	0.899	0.900	
Rear	0.494	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.088	0.733	1.145	1.104	1.123	
Rear Reduction	0.469	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.063	0.708	1.120	1.079	1.098	
Rear tilt(Edge1)	0.578	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.645	0.940	1.790	1.739	1.652	
Rear tilt(Edge4)	0.569	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.625	0.615	0.671	0.704	0.695	
Rear tilt(Edge4) Reduction	0.928	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.984	0.974	1.030	1.063	1.054	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B41	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.117	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.717	0.521	0.826	0.840	0.756	
Edge3	0.075	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.075	0.075	0.075	0.075	0.075	
Edge4	0.390	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.443	0.432	0.422	0.401	0.402	
Edge4 Reduction	1.014	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	1.067	1.056	1.046	1.025	1.026	
Rear	0.474	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.068	0.713	1.125	1.084	1.103	
Rear Reduction	0.317	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.911	0.556	0.968	0.927	0.946	
Rear tilt(Edge1)	0.324	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.391	0.686	1.536	1.485	1.398	
Rear tilt(Edge4)	0.650	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.706	0.696	0.752	0.785	0.776	
Rear tilt(Edge4) Reduction	0.732	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.788	0.778	0.834	0.867	0.858	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B48		WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)								
Edge1	0.000	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.600	0.404	0.709	0.723	0.639	
Edge3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
Edge4	0.066	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.119	0.108	0.098	0.077	0.078	
Edge4 Reduction	0.531	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.584	0.573	0.563	0.542	0.543	
Rear	0.010	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.604	0.249	0.661	0.620	0.639	
Rear Reduction	0.042	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.636	0.281	0.693	0.652	0.671	
Rear tilt(Edge1)	0.026	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.093	0.388	1.238	1.187	1.100	
Rear tilt(Edge4)	0.026	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.082	0.072	0.128	0.161	0.152	
Rear tilt(Edge4) Reduction	0.130	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.186	0.176	0.232	0.265	0.256	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B66		WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)								
Edge1	0.112	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.712	0.516	0.821	0.835	0.751	
Edge3	0.211	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.211	0.211	0.211	0.211	0.211	
Edge4	0.703	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.756	0.745	0.735	0.714	0.715	
Edge4 Reduction	0.941	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.994	0.983	0.973	0.952	0.953	
Rear	0.439	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.033	0.678	1.090	1.049	1.068	
Rear Reduction	0.448	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.042	0.687	1.099	1.058	1.077	
Rear tilt(Edge1)	0.732	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.799	1.094	1.944	1.893	1.806	
Rear tilt(Edge4)	0.937	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.993	0.983	1.039	1.072	1.063	
Rear tilt(Edge4) Reduction	0.954	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	1.010	1.000	1.056	1.089	1.080	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
LTE B71		WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)								
Edge1	0.221	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.821	0.625	0.930	0.944	0.860	
Edge3	0.045	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.045	0.045	0.045	0.045	0.045	
Edge4	0.287	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.340	0.329	0.319	0.298	0.299	
Edge4 Reduction	0.828	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.881	0.870	0.860	0.839	0.840	
Rear	0.416	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.010	0.655	1.067	1.026	1.045	
Rear Reduction	0.333	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.927	0.572	0.984	0.943	0.962	
Rear tilt(Edge1)	0.499	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.566	0.861	1.711	1.660	1.573	
Rear tilt(Edge4)	0.633	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.689	0.679	0.735	0.768	0.759	
Rear tilt(Edge4) Reduction	0.518	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.574	0.564	0.620	0.653	0.644	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
NR n2	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.246	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.846	0.650	0.955	0.969	0.885	
Edge3	0.172	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.172	0.172	0.172	0.172	0.172	
Edge4	0.622	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.675	0.664	0.654	0.633	0.634	
Edge4 Reduction	1.042	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	1.095	1.084	1.074	1.053	1.054	
Rear	0.383	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.977	0.622	1.034	0.993	1.012	
Rear Reduction	0.630	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.224	0.869	1.281	1.240	1.259	
Rear tilt(Edge1)	0.826	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.893	1.188	2.038	1.987	1.900	
Rear tilt(Edge4)	0.629	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.685	0.675	0.731	0.764	0.755	
Rear tilt(Edge4) Reduction	0.889	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.945	0.935	0.991	1.024	1.015	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
NR n5	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.207	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.807	0.611	0.916	0.930	0.846	
Edge3	0.048	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.048	0.048	0.048	0.048	0.048	
Edge4	0.413	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.466	0.455	0.445	0.424	0.425	
Edge4 Reduction	0.911	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.964	0.953	0.943	0.922	0.923	
Rear	0.477	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.071	0.716	1.128	1.087	1.106	
Rear Reduction	0.382	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.976	0.621	1.033	0.992	1.011	
Rear tilt(Edge1)	0.806	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.873	1.168	2.018	1.967	1.880	
Rear tilt(Edge4)	0.838	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.894	0.884	0.940	0.973	0.964	
Rear tilt(Edge4) Reduction	0.616	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.672	0.662	0.718	0.751	0.742	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
NR n41	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.204	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.804	0.608	0.913	0.927	0.843	
Edge2	0.513	0.033	0.049	0.000	0.000	0.000	0.001	0.000	0.000	0.005	0.000	0.595	0.551	0.519	0.518	0.518	
Edge3	0.036	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.036	0.036	0.036	0.036	0.036	
Edge2 Reduction	0.725	0.033	0.049	0.000	0.000	0.000	0.001	0.000	0.000	0.005	0.000	0.807	0.763	0.731	0.730	0.730	
Rear	0.312	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.906	0.551	0.963	0.922	0.941	
Rear Reduction	0.124	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.718	0.363	0.775	0.734	0.753	
Rear tilt(Edge1)	0.824	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.891	1.186	2.036	1.985	1.898	
Rear tilt(Edge2)	0.825	0.017	0.175	0.000	0.012	0.000	0.119	0.127	0.139	0.024	0.006	1.023	0.872	0.974	0.994	0.994	
Rear tilt(Edge2) Reduction	0.435	0.017	0.175	0.000	0.012	0.000	0.119	0.127	0.139	0.024	0.006	0.633	0.482	0.584	0.604	0.604	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
NR n66	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.141	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.741	0.545	0.850	0.864	0.780	
Edge3	0.172	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.172	0.172	0.172	0.172	0.172	
Edge4	0.733	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.786	0.775	0.765	0.744	0.745	
Edge4 Reduction	0.860	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.913	0.902	0.892	0.871	0.872	
Rear	0.534	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.128	0.773	1.185	1.144	1.163	
Rear Reduction	0.469	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.063	0.708	1.120	1.079	1.098	
Rear tilt(Edge1)	0.595	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.662	0.957	1.807	1.756	1.669	
Rear tilt(Edge4)	0.822	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.878	0.868	0.924	0.957	0.948	
Rear tilt(Edge4) Reduction	0.756	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.812	0.802	0.858	0.891	0.882	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
NR n71	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.271	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.871	0.675	0.980	0.994	0.910	
Edge3	0.014	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.014	0.014	0.014	0.014	0.014	
Edge4	0.346	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.399	0.388	0.378	0.357	0.358	
Edge4 Reduction	0.869	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.922	0.911	0.901	0.880	0.881	
Rear	0.540	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.134	0.779	1.191	1.150	1.169	
Rear Reduction	0.314	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.908	0.553	0.965	0.924	0.943	
Rear tilt(Edge1)	0.658	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.725	1.020	1.870	1.819	1.732	
Rear tilt(Edge4)	0.614	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.670	0.660	0.716	0.749	0.740	
Rear tilt(Edge4) Reduction	0.587	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.643	0.633	0.689	0.722	0.713	

	Mode											BT	RFID	Sum of SAR [W/kg](1g)			
	1	2	3	4	5	6	7	8	9	10	11						
NR n77 Block A	WLAN Main 2.4 GHz	WLAN Aux 2.4 GHz	WLAN Main 5 GHz (U-NII-2a)	WLAN Main 5 GHz (U-NII-2c)	WLAN Main 5 GHz (U-NII-3)	WLAN Aux 5 GHz (U-NII-2a)	WLAN Aux 5 GHz (U-NII-2c)	WLAN Aux 5 GHz (U-NII-3)	BT	RFID	Sum of SAR [W/kg](1g)						
Edge1	0.178	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.778	0.582	0.887	0.901	0.817	
Edge3	0.045	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.045	0.045	0.045	0.045	0.045	
Edge4	0.748	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.801	0.790	0.780	0.759	0.760	
Edge4 Reduction	0.668	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.721	0.710	0.700	0.679	0.680	
Rear	0.356	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.950	0.595	1.007	0.966	0.985	
Rear Reduction	0.047	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.641	0.286	0.698	0.657	0.676	
Rear tilt(Edge1)	0.503	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.570	0.865	1.715	1.664	1.577	
Rear tilt(Edge4)	0.525	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.581	0.571	0.627	0.660	0.651	
Rear tilt(Edge4) Reduction	0.176	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.232	0.222	0.278	0.311	0.302	

	Mode											1+2+3+11	Sum of SAR [W/kg](1g)	1+2+10+11	Sum of SAR [W/kg](1g)	1+4+7+10+11	Sum of SAR [W/kg](1g)	1+5+8+10+11	Sum of SAR [W/kg](1g)
	1 NR n77 Block C	2 WLAN Main 2.4 GHz	3 WLAN Aux 2.4 GHz	4 WLAN Main 5 GHz (U-NII-2a)	5 WLAN Main 5 GHz (U-NII-2c)	6 WLAN Main 5 GHz (U-NII-3)	7 WLAN Aux 5 GHz (U-NII-2a)	8 WLAN Aux 5 GHz (U-NII-2c)	9 WLAN Aux 5 GHz (U-NII-3)	10 BT	11 RFID								
Edge1	0.045	0.380	0.220	0.578	0.609	0.509	0.107	0.090	0.106	0.024	0.000	0.645	0.449	0.754	0.768	0.684			
Edge3	0.050	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.050	0.050	0.050	0.050	0.050	0.050	0.050	
Edge4	0.890	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.943	0.932	0.922	0.901	0.902			
Edge4 Reduction	0.814	0.042	0.011	0.032	0.011	0.012	0.000	0.000	0.000	0.000	0.000	0.867	0.856	0.846	0.825	0.826			
Rear	0.422	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	1.016	0.661	1.073	1.032	1.051			
Rear Reduction	0.066	0.093	0.468	0.147	0.185	0.165	0.358	0.279	0.318	0.113	0.033	0.660	0.305	0.717	0.676	0.695			
Rear tilt(Edge1)	0.660	0.227	0.840	0.290	0.336	0.228	0.787	0.690	0.711	0.135	0.000	1.727	1.022	1.872	1.821	1.734			
Rear tilt(Edge4)	0.821	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.877	0.867	0.923	0.956	0.947			
Rear tilt(Edge4) Reduction	0.198	0.046	0.010	0.071	0.109	0.096	0.031	0.026	0.030	0.000	0.000	0.254	0.244	0.300	0.333	0.324			

The red color cells proceed next step, SPLSR.


SPLSR

For 2.4 GHz aux antenna, WLAN is worst case, so WLAN combination is listed.

For another than 2.4 GHz aux antenna, such as 5GHz aux and BT, SAR value is used WLAN + BT because transmission from same antenna, but SPLSR is calculated at peak location WLAN and BT. These are expressed as WLAN side and BT side, WLAN peak location and BT peak location respectively.

RFID is not considered because no SAR values were detected.


WCDMA B2

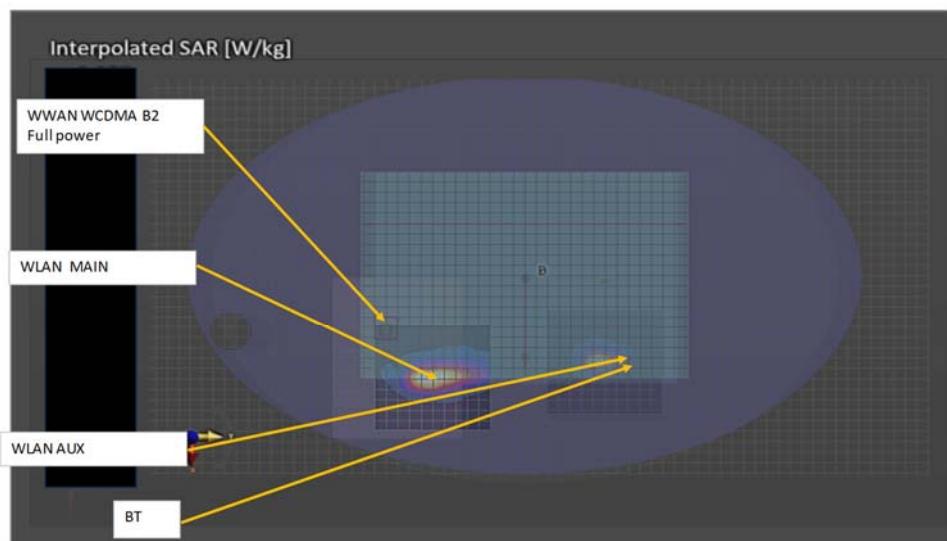

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR	Volume Scan (≤ 0.04)
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B2	MAIN	1	47	-133	-175.77	0.614	No1+No2	0.841	68.866	0.011	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.454	205.172	0.009	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B2	MAIN	1	47	-133	-175.77	0.614	No1+No2	0.904	60.128	0.014	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.536	206.112	0.009	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.536	205.517	0.009	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B2	MAIN	1	47	-133	-175.77	0.614	No1+No2	0.950	72.578	0.013	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.439	210.716	0.008	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.439	205.517	0.008	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B2	MAIN	1	47	-133	-175.77	0.614	No1+No2	0.842	60.978	0.013	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.460	210.683	0.008	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.460	205.517	0.009	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


WCDMA B4

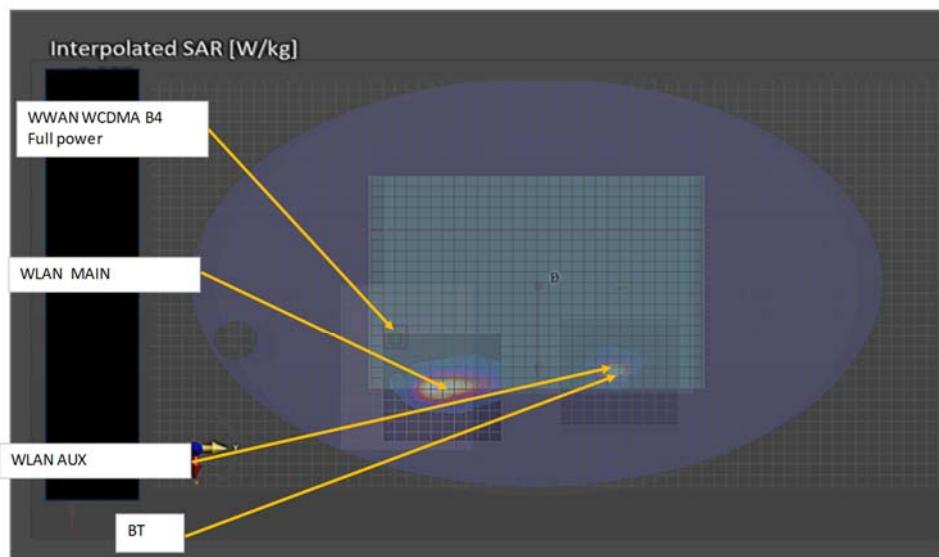

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B4	MAIN	1	37	-136.5	-180.76	0.704	No1+No2	0.931	79.084	0.011	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.544	210.669	0.009	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B4	MAIN	1	37	-136.5	-180.76	0.704	No1+No2	0.994	69.482	0.014	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.626	211.818	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.626	210.955	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B4	MAIN	1	37	-136.5	-180.76	0.704	No1+No2	1.040	82.773	0.013	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.529	216.000	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.529	210.955	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B4	MAIN	1	37	-136.5	-180.76	0.704	No1+No2	0.932	70.677	0.013	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.550	216.206	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.550	210.955	0.009	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


WCDMA B5

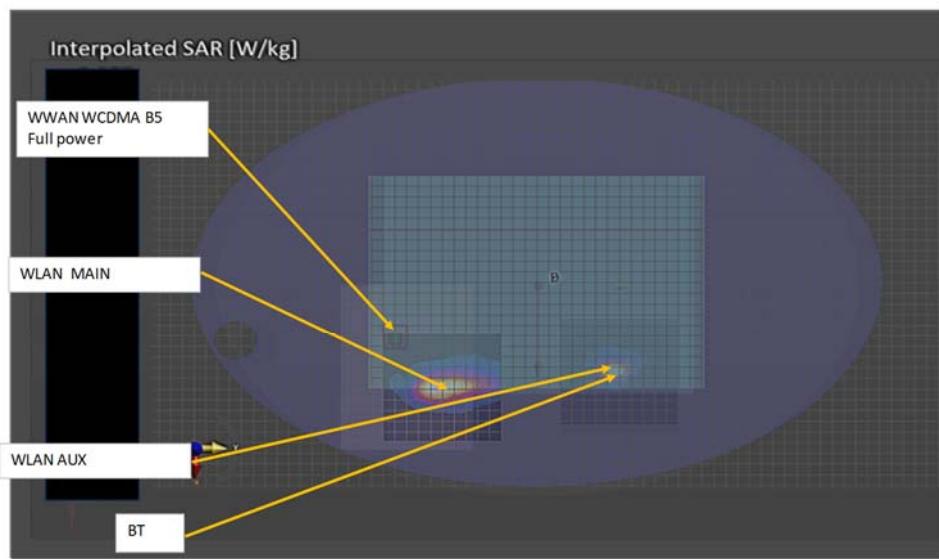

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B5	MAIN	1	50	-135.5	-175.68	0.693	No1+No2	0.920	68.337	0.013	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.533	207.136	0.009	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B5	MAIN	1	50	-135.5	-175.68	0.693	No1+No2	0.983	60.289	0.016	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.615	207.971	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.615	207.478	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B5	MAIN	1	50	-135.5	-175.68	0.693	No1+No2	1.029	71.838	0.015	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.518	212.731	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.518	207.478	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
WCDMA B5	MAIN	1	50	-135.5	-175.68	0.693	No1+No2	0.921	60.833	0.015	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.539	212.609	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.539	207.478	0.009	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B2

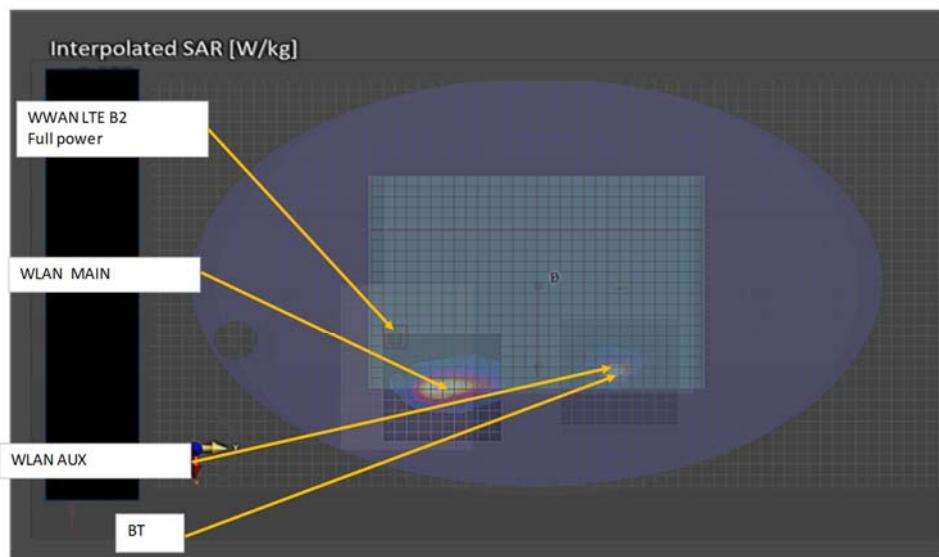

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 2	MAIN	1	64	-129.5	-180.08	0.891	No1+No2	1.118	54.692	0.022	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.731	199.487	0.011	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 2	MAIN	1	64	-129.5	-180.08	0.891	No1+No2	1.181	47.997	0.027	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.813	199.845	0.012	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.813	199.749	0.012	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 2	MAIN	1	64	-129.5	-180.08	0.891	No1+No2	1.227	57.571	0.024	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.716	205.204	0.011	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.716	199.749	0.011	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 2	MAIN	1	64	-129.5	-180.08	0.891	No1+No2	1.119	47.799	0.025	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.737	204.730	0.011	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.737	199.749	0.011	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B4

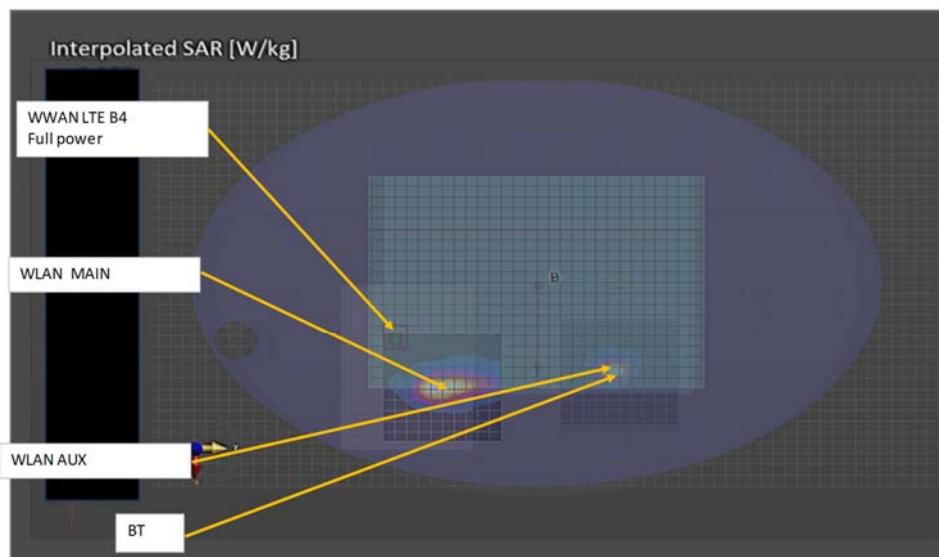

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 4	MAIN	1	38.5	-134.5	-180.63	0.741	No1+No2	0.968	76.672	0.012	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.581	208.390	0.010	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 4	MAIN	1	38.5	-134.5	-180.63	0.741	No1+No2	1.031	66.998	0.016	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.663	209.509	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.663	208.676	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 4	MAIN	1	38.5	-134.5	-180.63	0.741	No1+No2	1.077	80.392	0.014	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.566	213.739	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.566	208.676	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 4	MAIN	1	38.5	-134.5	-180.63	0.741	No1+No2	0.969	68.220	0.014	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.587	213.918	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.587	208.676	0.010	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B5

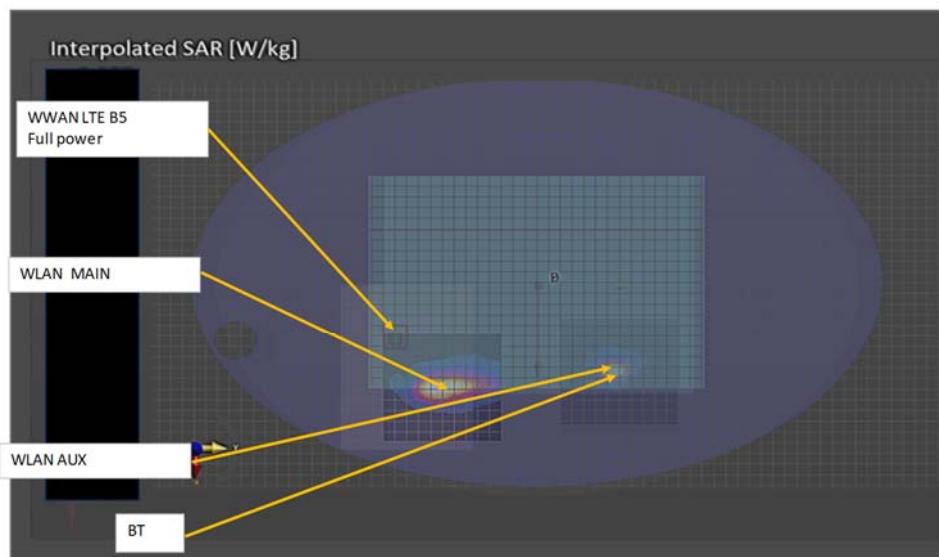

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 5	MAIN	1	39.5	-136	-180.6	0.743	No1+No2	0.970	76.810	0.012	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.583	209.644	0.010	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 5	MAIN	1	39.5	-136	-180.6	0.743	No1+No2	1.033	67.399	0.016	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.665	210.725	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.665	209.930	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 5	MAIN	1	39.5	-136	-180.6	0.743	No1+No2	1.079	80.447	0.014	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.568	215.015	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.568	209.930	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 5	MAIN	1	39.5	-136	-180.6	0.743	No1+No2	0.971	68.499	0.014	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.589	215.160	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.589	209.930	0.010	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B7

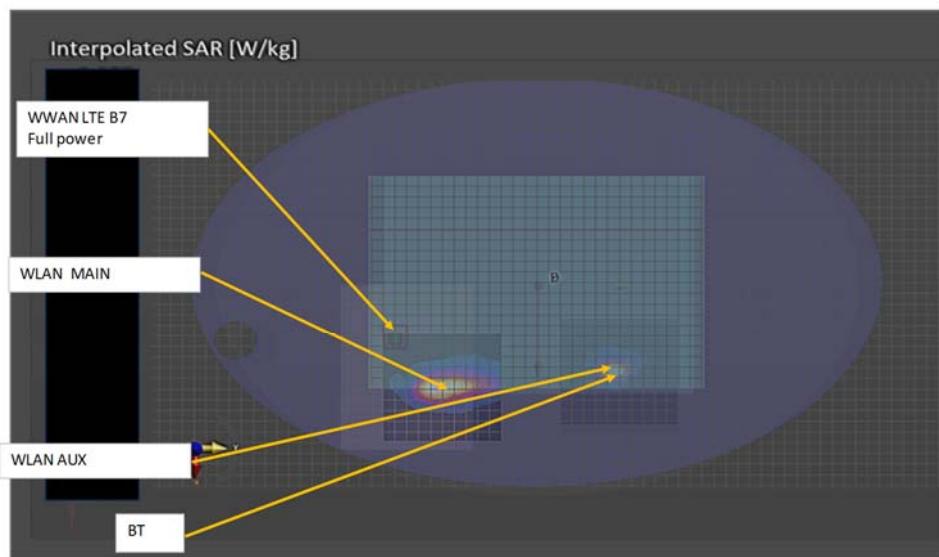

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 7	MAIN	1	34	-121.5	-180.88	0.854	No1+No2	1.081	73.536	0.015	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.694	196.793	0.011	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 7	MAIN	1	34	-121.5	-180.88	0.854	No1+No2	1.144	62.059	0.020	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.776	198.142	0.012	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.776	197.080	0.012	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 7	MAIN	1	34	-121.5	-180.88	0.854	No1+No2	1.190	77.805	0.017	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.679	202.010	0.011	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.679	197.080	0.011	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 7	MAIN	1	34	-121.5	-180.88	0.854	No1+No2	1.082	64.174	0.018	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.700	202.386	0.011	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.700	197.080	0.011	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B12

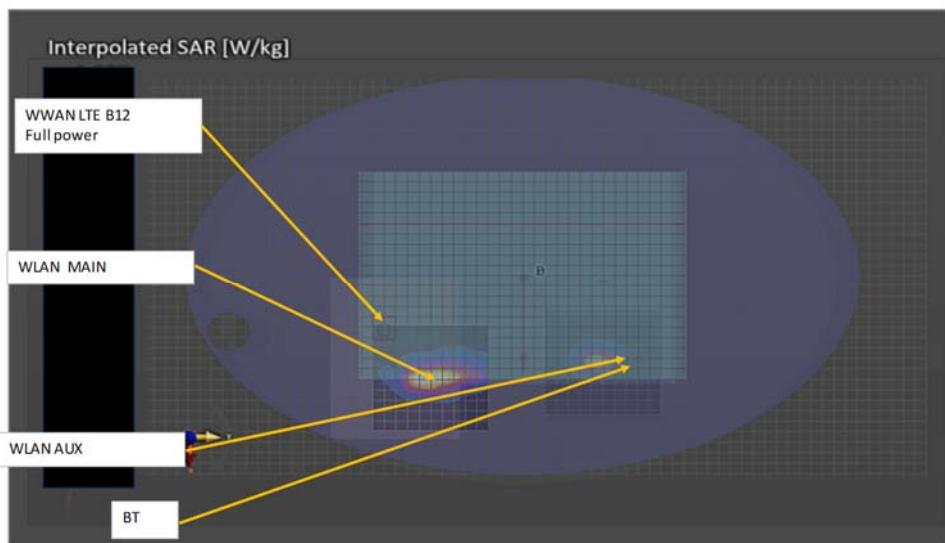

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 12	MAIN	1	60.5	-117	-180.49	0.416	No1+No2	0.706	39.339	0.015	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.338	187.968	0.008	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.338	187.710	0.008	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No


LTE B13

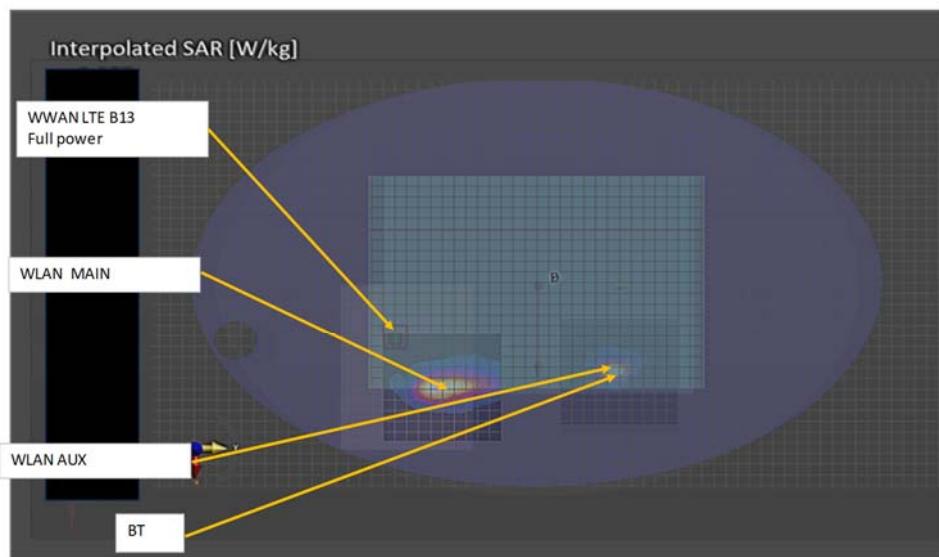

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 13	MAIN	1	40.5	-133	-180.65	0.656	No1+No2	0.883	74.183	0.011	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.496	206.506	0.009	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 13	MAIN	1	40.5	-133	-180.65	0.656	No1+No2	0.946	64.535	0.014	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.578	207.575	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.578	206.790	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 13	MAIN	1	40.5	-133	-180.65	0.656	No1+No2	0.992	77.897	0.013	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.481	211.881	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.481	206.790	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 13	MAIN	1	40.5	-133	-180.65	0.656	No1+No2	0.884	65.734	0.013	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.502	212.016	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.502	206.790	0.009	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B14

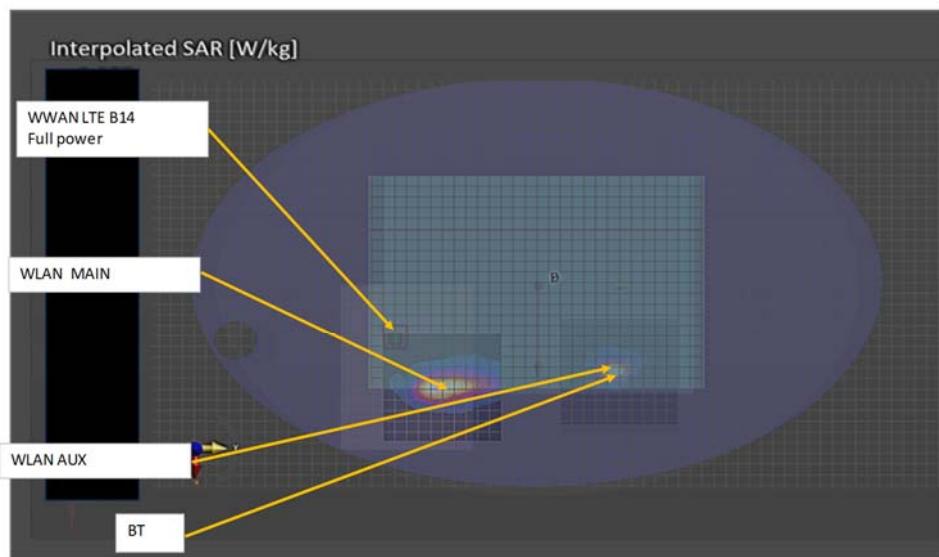

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 14	MAIN	1	41.5	-133	-180.65	0.740	No1+No2	0.967	73.396	0.013	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.580	206.303	0.010	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 14	MAIN	1	41.5	-133	-180.65	0.740	No1+No2	1.030	63.848	0.016	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.662	207.342	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.662	206.585	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 14	MAIN	1	41.5	-133	-180.65	0.740	No1+No2	1.076	77.078	0.014	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.565	211.693	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.565	206.585	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 14	MAIN	1	41.5	-133	-180.65	0.740	No1+No2	0.968	64.997	0.015	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.586	211.803	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.586	206.585	0.010	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B17

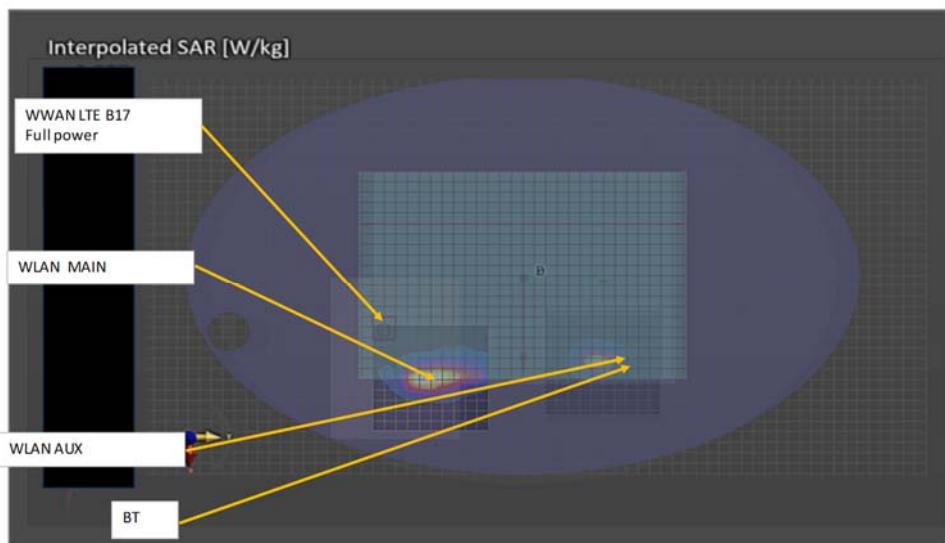

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 17	MAIN	1	56	-121	-180.63	0.409	No1+No2	0.699	45.280	0.013	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.331	192.652	0.008	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.331	192.268	0.008	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No


LTE B25

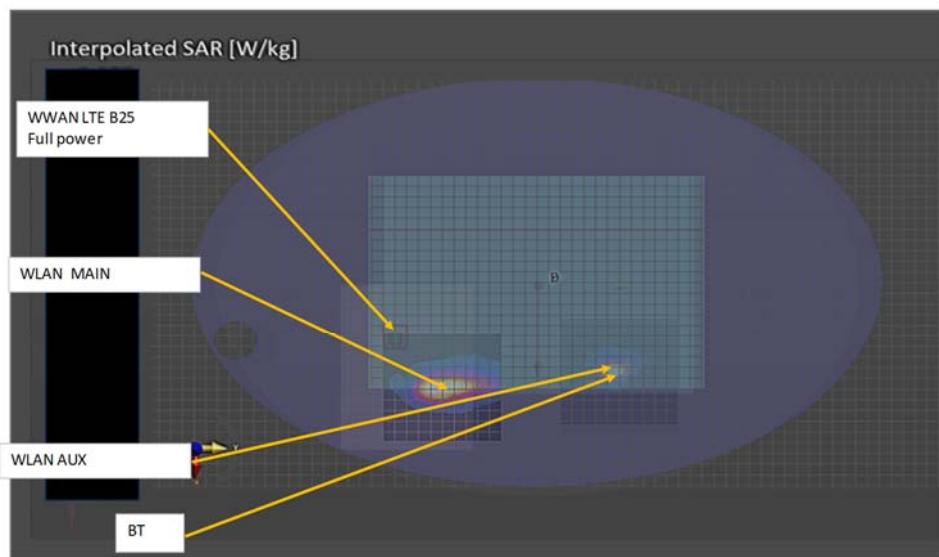

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 25	MAIN	1	37.5	-135	-180.66	0.882	No1+No2	1.109	77.768	0.015	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.722	209.094	0.011	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 25	MAIN	1	37.5	-135	-180.66	0.882	No1+No2	1.172	68.054	0.019	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.804	210.240	0.012	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.804	209.381	0.012	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 25	MAIN	1	37.5	-135	-180.66	0.882	No1+No2	1.218	81.498	0.016	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.707	214.429	0.010	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.707	209.381	0.011	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 25	MAIN	1	37.5	-135	-180.66	0.882	No1+No2	1.110	69.299	0.017	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.728	214.630	0.011	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.728	209.381	0.011	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B26

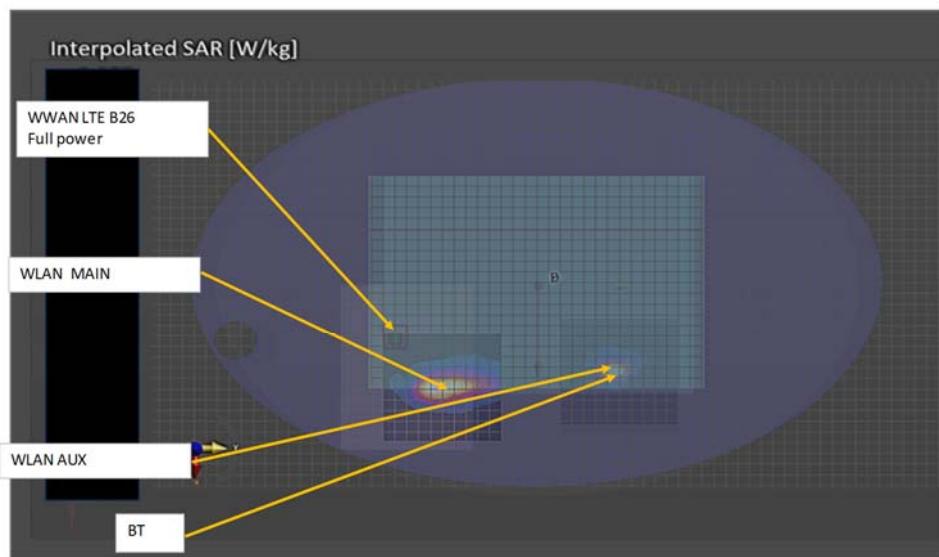

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 26	MAIN	1	50.5	-134	-175.69	0.742	No1+No2	0.969	66.939	0.014	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.582	205.576	0.010	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 26	MAIN	1	50.5	-134	-175.69	0.742	No1+No2	1.032	58.780	0.018	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.664	206.403	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.664	205.917	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 26	MAIN	1	50.5	-134	-175.69	0.742	No1+No2	1.078	70.485	0.016	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.567	211.175	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.567	205.917	0.010	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 26	MAIN	1	50.5	-134	-175.69	0.742	No1+No2	0.970	59.367	0.016	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.588	211.046	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.588	205.917	0.010	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B38

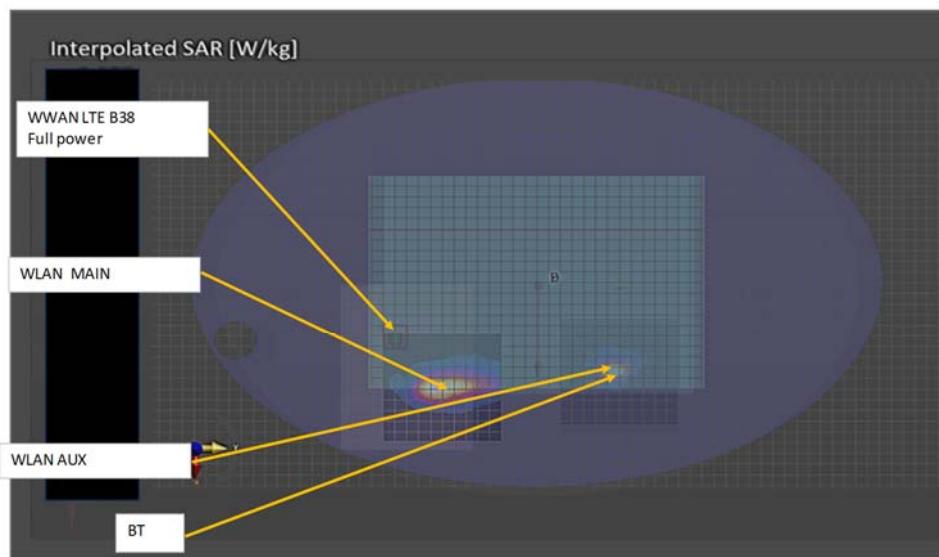

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 38	MAIN	1	21.2	-128.8	-180.93	0.578	No1+No2	0.805	88.210	0.008	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.418	207.312	0.008	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 38	MAIN	1	21.2	-128.8	-180.93	0.578	No1+No2	0.868	76.733	0.011	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.500	208.981	0.009	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.500	207.613	0.009	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 38	MAIN	1	21.2	-128.8	-180.93	0.578	No1+No2	0.914	92.486	0.009	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.403	212.344	0.008	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.403	207.613	0.008	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 38	MAIN	1	21.2	-128.8	-180.93	0.578	No1+No2	0.806	78.889	0.009	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.424	212.998	0.008	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.424	207.613	0.008	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B66

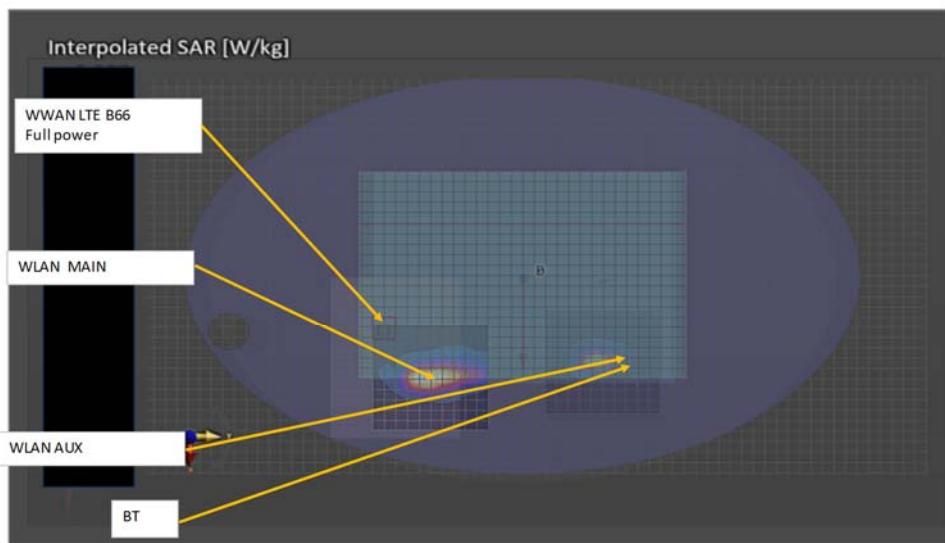

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 66	MAIN	1	38.5	-134	-180.65	0.732	No1+No2	0.959	76.371	0.012	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.572	207.902	0.009	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 66	MAIN	1	38.5	-134	-180.65	0.732	No1+No2	1.022	66.642	0.016	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.654	209.025	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.654	208.188	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 66	MAIN	1	38.5	-134	-180.65	0.732	No1+No2	1.068	80.108	0.014	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.557	213.249	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.557	208.188	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 66	MAIN	1	38.5	-134	-180.65	0.732	No1+No2	0.960	67.888	0.014	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.578	213.431	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.578	208.188	0.010	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


LTE B71

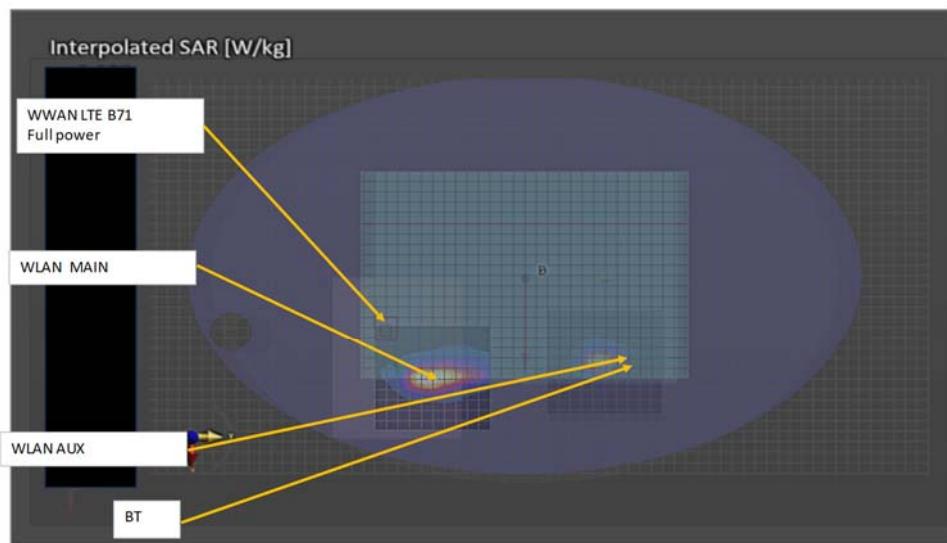

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 71	MAIN	1	34	-131.5	-179.72	0.499	No1+No2	0.789	68.144	0.010	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.421	207.742	0.008	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.421	206.758	0.008	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
LTE Band 71	MAIN	1	34	-131.5	-179.72	0.499	No1+No2	0.835	82.486	0.009	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.324	211.732	0.007	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.324	206.758	0.007	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No


NR n2

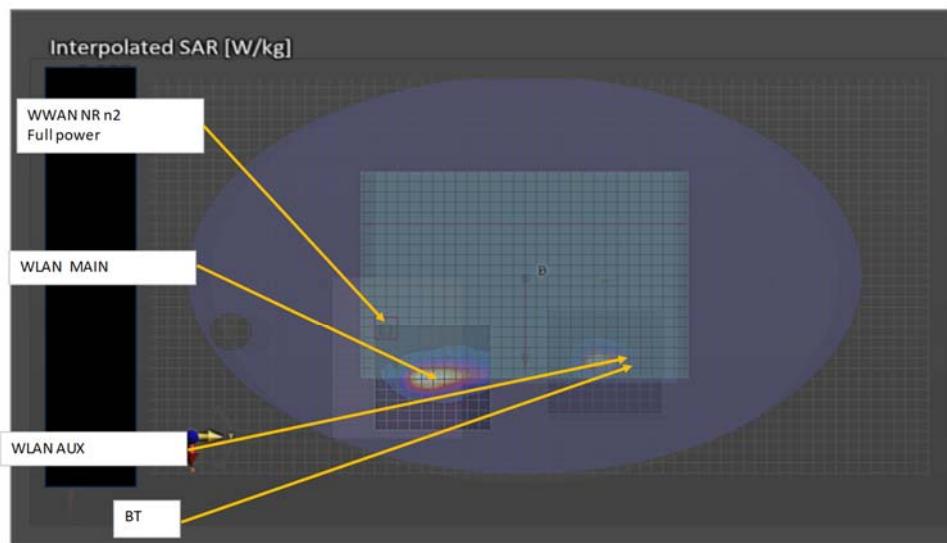

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n2	MAIN	1	30.5	-132.5	-181.08	0.826	No1+No2	1.053	82.075	0.013	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.666	208.319	0.010	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n2	MAIN	1	30.5	-132.5	-181.08	0.826	No1+No2	1.116	71.511	0.016	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.748	209.684	0.011	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.748	208.608	0.011	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n2	MAIN	1	30.5	-132.5	-181.08	0.826	No1+No2	1.162	86.053	0.015	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.651	213.525	0.010	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.651	208.608	0.010	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n2	MAIN	1	30.5	-132.5	-181.08	0.826	No1+No2	1.054	73.175	0.015	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.672	213.919	0.010	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.672	208.608	0.010	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


NR n5

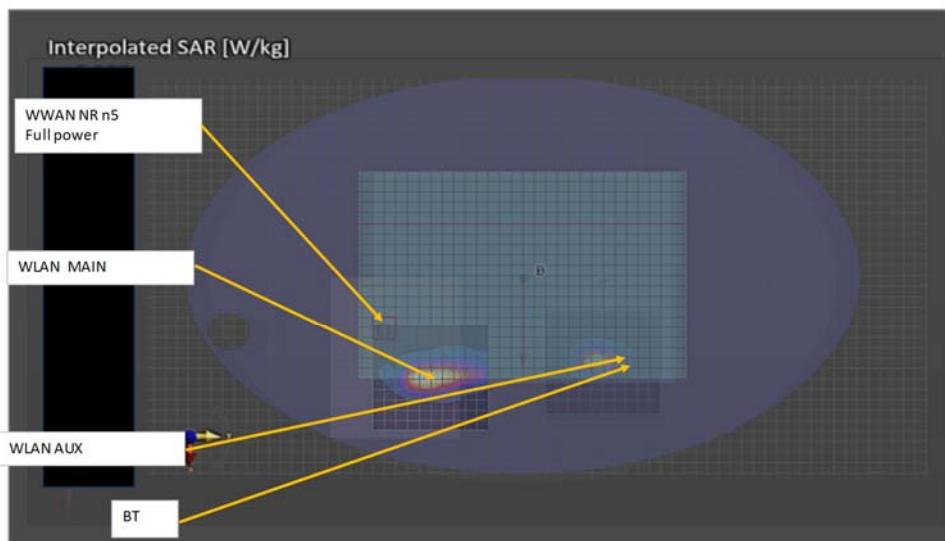

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n5	MAIN	1	50	-134.5	-180.48	0.806	No1+No2	1.033	67.934	0.015	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.646	206.241	0.010	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n5	MAIN	1	50	-134.5	-180.48	0.806	No1+No2	1.096	59.566	0.019	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.728	207.014	0.011	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.728	206.516	0.011	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n5	MAIN	1	50	-134.5	-180.48	0.806	No1+No2	1.142	71.262	0.017	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.631	211.766	0.010	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.631	206.516	0.010	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n5	MAIN	1	50	-134.5	-180.48	0.806	No1+No2	1.034	60.158	0.017	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.652	211.648	0.010	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.652	206.516	0.010	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


NR n41

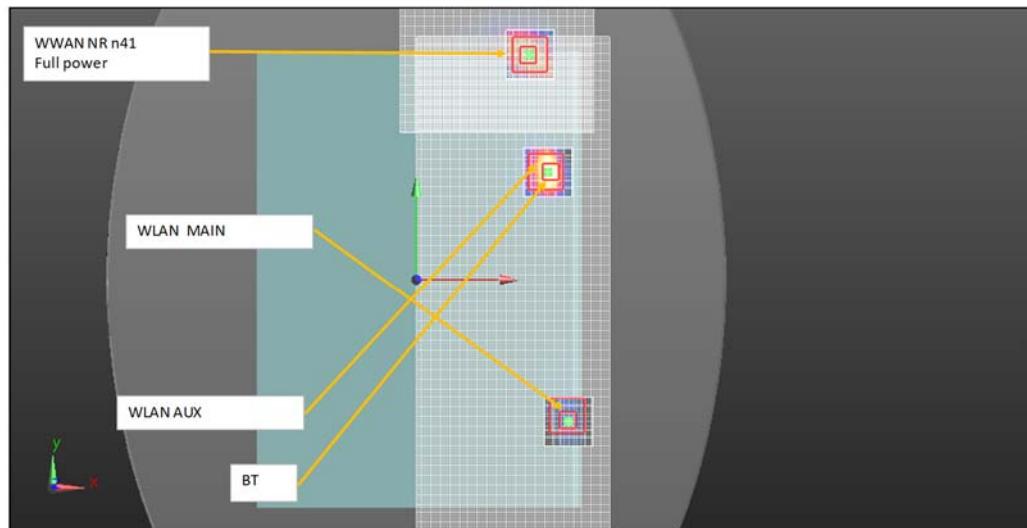

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n41	MAIN	1	69.4	138	-179.74	0.824	No1+No2	1.051	228.015	0.005	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.664	70.534	0.030	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n41	MAIN	1	69.4	138	-179.74	0.824	No1+No2	1.114	225.065	0.005	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.746	72.180	0.032	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.746	70.126	0.033	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n41	MAIN	1	69.4	138	-179.74	0.824	No1+No2	1.160	229.303	0.005	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.649	64.064	0.033	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.649	70.126	0.030	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n41	MAIN	1	69.4	138	-179.74	0.824	No1+No2	1.052	227.878	0.005	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.670	66.225	0.033	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.670	70.126	0.031	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


NR n66

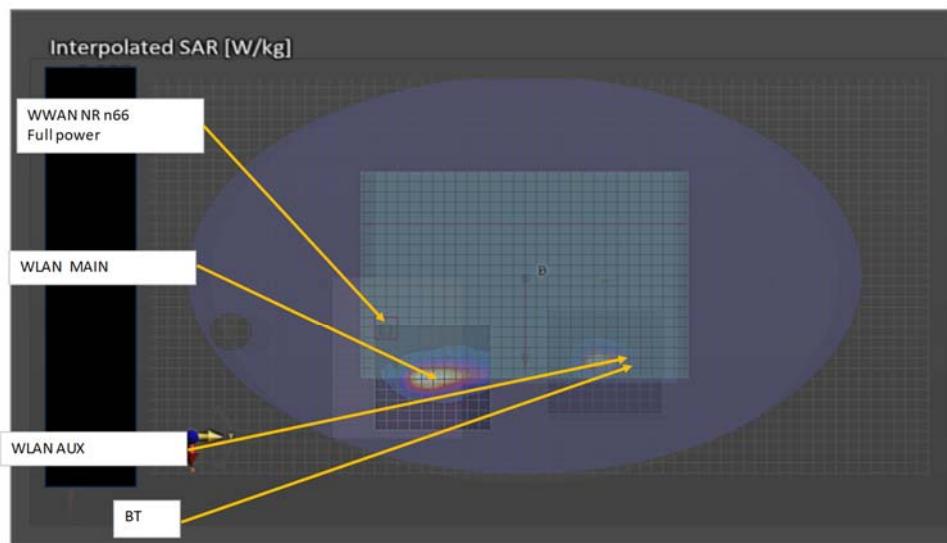

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n66	MAIN	1	35	-136.5	-180.79	0.595	No1+No2	0.822	80.667	0.009	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.435	211.115	0.008	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n66	MAIN	1	35	-136.5	-180.79	0.595	No1+No2	0.885	70.883	0.012	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.517	212.322	0.009	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.517	211.403	0.009	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n66	MAIN	1	35	-136.5	-180.79	0.595	No1+No2	0.931	84.411	0.011	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.420	216.414	0.008	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.420	211.403	0.008	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n66	MAIN	1	35	-136.5	-180.79	0.595	No1+No2	0.823	72.168	0.010	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.441	216.670	0.008	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.441	211.403	0.008	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


NR n71

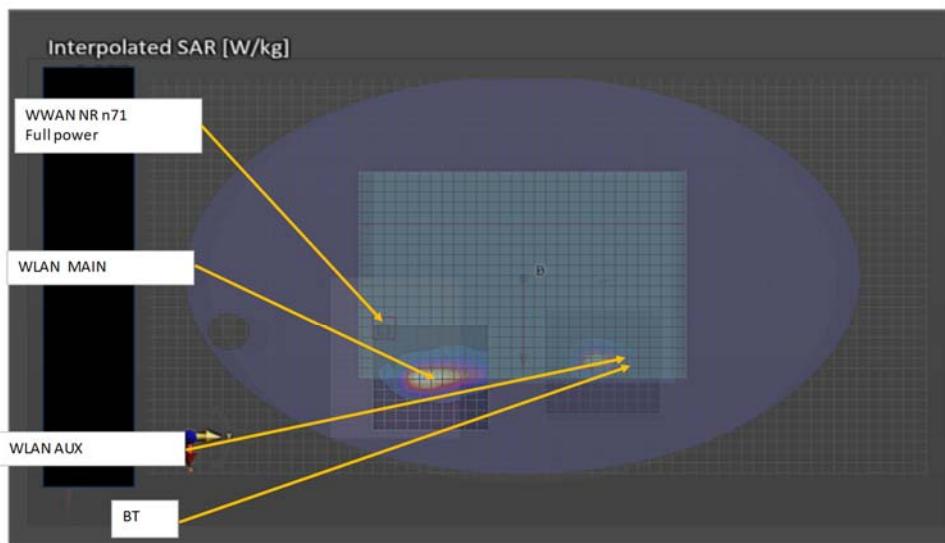

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n71	MAIN	1	40.5	-129	-180.9	0.658	No1+No2	0.885	71.851	0.012	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.498	202.603	0.009	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n71	MAIN	1	40.5	-129	-180.9	0.658	No1+No2	0.948	61.730	0.015	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.580	203.695	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.580	202.883	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n71	MAIN	1	40.5	-129	-180.9	0.658	No1+No2	0.994	75.701	0.013	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.483	207.960	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.483	202.883	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n71	MAIN	1	40.5	-129	-180.9	0.658	No1+No2	0.886	63.142	0.013	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.504	208.117	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.504	202.883	0.009	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No


NR n77 Block A

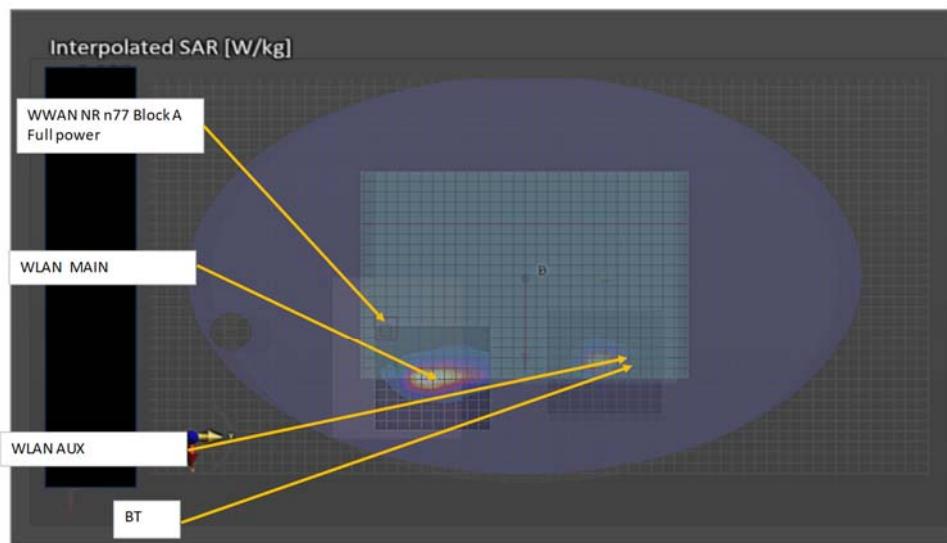

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculate d distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n77 Block A	MAIN	1	49.6	-141.4	-174.51	0.503	No1+No2	0.793	65.425	0.011	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.425	213.851	0.008	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.425	213.377	0.008	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n77 Block A	MAIN	1	49.6	-141.4	-174.51	0.503	No1+No2	0.839	76.139	0.010	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.328	218.638	0.007	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.328	213.377	0.007	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No

NR n77 Block C

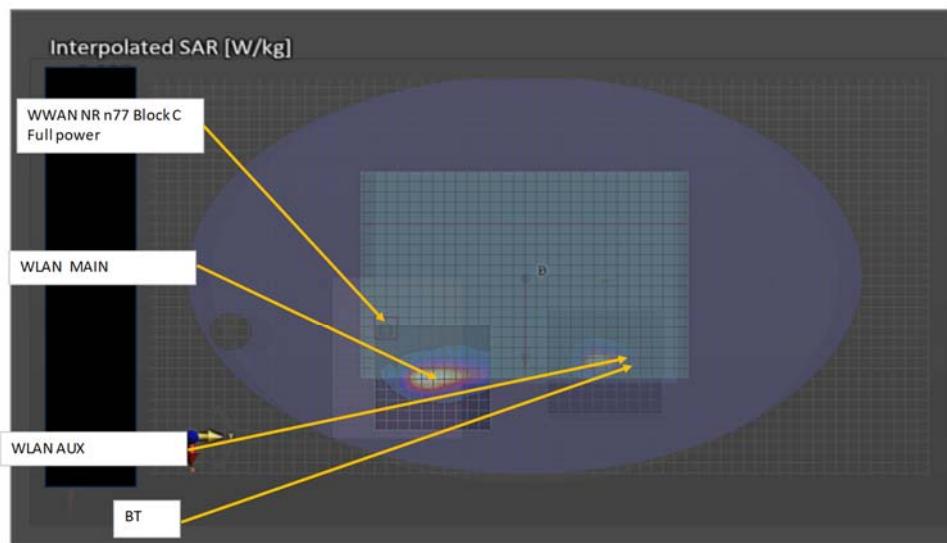

※Plot shows only worst-case scenario.

Mode	Ant	No	X (mm)	Y (mm)	Z (mm)	Scaled	Combination	Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/No)
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n77 Block C	MAIN	1	56.4	-135.8	-174.83	0.660	No1+No2	0.887	64.100	0.013	No
WLAN2.4 GHz	MAIN	2	99.1	-88	-174	0.227	No1+No3	1.500	206.509	0.009	No
WLAN2.4 GHz	AUX	3	82.9	69	-174.1	0.840	No2+No3	1.067	157.834	0.007	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n77 Block C	MAIN	1	56.4	-135.8	-174.83	0.660	No1+No2	0.950	57.087	0.016	No
WLAN5 GHz (U-NII-2a)	MAIN	2	85.1	-86.5	-177	0.290	No1+No3	1.582	207.157	0.010	No
WLAN5 GHz (U-NII-2a)+BT(WLAN side)	AUX	3	89.4	68.7	-177	0.922	No1+No4	1.582	206.855	0.010	No
WLAN5 GHz (U-NII-2a)+BT(BT side)	AUX	4	83.2	69.3	-177	0.922	No2+No3	1.212	155.260	0.009	No
							No2+No4	1.212	155.812	0.009	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n77 Block C	MAIN	1	56.4	-135.8	-174.83	0.660	No1+No2	0.996	67.354	0.015	No
WLAN5 GHz (U-NII-2c)	MAIN	2	104.4	-88.6	-177	0.336	No1+No3	1.485	212.207	0.009	No
WLAN5 GHz (U-NII-2c)+BT(WLAN side)	AUX	3	80.7	75	-177	0.825	No1+No4	1.485	206.855	0.009	No
WLAN5 GHz (U-NII-2c)+BT(BT side)	AUX	4	83.2	69.3	-177	0.825	No2+No3	1.161	165.308	0.008	No
							No2+No4	1.161	159.317	0.008	No
WWAN + WLAN Main + WLAN AUX + RFID											
NR Band n77 Block C	MAIN	1	56.4	-135.8	-174.83	0.660	No1+No2	0.888	57.191	0.015	No
WLAN5 GHz (U-NII-3)	MAIN	2	89.2	-89	-177	0.228	No1+No3	1.506	211.917	0.009	No
WLAN5 GHz (U-NII-3)+BT(WLAN side)	AUX	3	86.2	74	-177	0.846	No1+No4	1.506	206.855	0.009	No
WLAN5 GHz (U-NII-3)+BT(BT side)	AUX	4	83.2	69.3	-177	0.846	No2+No3	1.074	163.028	0.007	No
							No2+No4	1.074	158.414	0.007	No

The SPLSR is less than equal 0.04, complied.

TER

\VAN + RFID + BT

Test Position	Highest SAR	Ratio	RFID SAR	Ratio	Aux BT	Ratio
Edge1	0.409	0.256	0.000	0.000	0.024	0.015
Edge2	0.513	0.321	0.000	0.000	0.005	0.003
Edge2 Reduction	0.725	0.453	0.000	0.000	0.005	0.003
Edge3	0.240	0.150	0.000	0.000	0.000	0.000
Edge4	0.890	0.556	0.000	0.000	0.000	0.000
Edge4 Reduction	1.042	0.651	0.000	0.000	0.000	0.000
Rear	0.621	0.388	0.033	0.021	0.113	0.071
Rear Reduction	0.630	0.394	0.033	0.021	0.113	0.071
Rear tilt (Edge 1 side)	0.891	0.557	0.000	0.000	0.135	0.084
Rear tilt (Edge 2 side)	0.825	0.516	0.006	0.004	0.024	0.015
Rear tilt (Edge 2 side) Reduction	0.435	0.272	0.006	0.004	0.024	0.015
Rear tilt (Edge 4 side)	1.027	0.642	0.000	0.000	0.000	0.000
Rear tilt (Edge 4 side) Reduction	1.074	0.671	0.000	0.000	0.000	0.000

TER
0.531
0.347
0.480
0.157
0.573
0.668
0.671
0.677
0.991
0.624
0.380
0.721
0.750

WLAN(6E) + WLAN(6E)

Test Position	Main Ant	Ratio	Aux Ant	Ratio
Edge1	1.911	0.191	0.697	0.070
Edge2	0.082	0.008	0.152	0.015
Edge2 Reduction	0.082	0.008	0.152	0.015
Edge3	0.036	0.004	0.030	0.003
Edge4	0.150	0.015	0.016	0.002
Edge4 Reduction	0.150	0.015	0.016	0.002
Rear	0.801	0.080	1.119	0.112
Rear Reduction	0.801	0.080	1.119	0.112
Rear tilt (Edge 1 side)	1.209	0.121	2.288	0.229
Rear tilt (Edge 2 side)	0.060	0.006	0.832	0.083
Rear tilt (Edge 2 side) Reduction	0.060	0.006	0.832	0.083
Rear tilt (Edge 4 side)	0.651	0.065	0.136	0.014
Rear tilt (Edge 4 side) Reduction	0.651	0.065	0.136	0.014

The TER is less than 1, complied.

End of the report