



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctest.com



## MEASUREMENT REPORT

### FCC PART 15.247 / ISED RSS-247 UNII 802.11a/n/ac

**Applicant Name:**

Panasonic Corporation of North America  
Two Riverfront Plaza, 9th Floor  
Newark, NJ 07102-5490  
United States

**Date of Testing:**

1/11/2016, 2/26/2018 - 4/4/2018

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M1802070020-03.ACJ

<b>FCC ID:</b>	<b>ACJFZN1C</b>
<b>IC:</b>	<b>216A-FZN1C</b>
<b>APPLICANT:</b>	<b>Panasonic Corporation of North America</b>

**Application Type:**

Certification

**Model/HVIN:**

FZ-N1WF3

**EUT Type:**

Portable Handset

**Frequency Range:**

5180 – 5825MHz

**FCC Classification:**

Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**ISED Specification:**


RSS-247 Issue 2

**Test Procedure(s):**

ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President




<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset		Page 1 of 93


# TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description.....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration.....	6
2.4	EMI Suppression Device(s)/Modifications.....	6
3.0	DESCRIPTION OF TESTS.....	7
3.1	Evaluation Procedure.....	7
3.2	AC Line Conducted Emissions.....	7
3.3	Radiated Emissions.....	8
3.4	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS.....	9
5.0	MEASUREMENT UNCERTAINTY.....	10
6.0	TEST EQUIPMENT CALIBRATION DATA.....	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	26dB Bandwidth Measurement – 802.11a/n/ac.....	13
7.3	6dB Bandwidth Measurement – 802.11a/n/ac.....	29
7.4	UNII Output Power Measurement – 802.11a/n/ac.....	35
7.5	Maximum Power Spectral Density – 802.11a/n/ac.....	38
7.6	Radiated Spurious Emission Measurements – Above 1GHz.....	59
7.7.1	Radiated Spurious Emission Measurements.....	62
7.7.2	Radiated Band Edge Measurements (20MHz BW).....	74
7.7.3	Radiated Band Edge Measurements (40MHz BW).....	77
7.7.4	Radiated Band Edge Measurements (80MHz BW).....	80
7.7	Radiated Spurious Emissions Measurements – Below 1GHz.....	83
7.8	Line-Conducted Test Data.....	87
8.0	CONCLUSION.....	93

<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset	Page 2 of 93	



# MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Conducted Power	
			Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	25.177	14.01
2A		5260 - 5320	36.898	15.67
2C		5500 - 5700	36.644	15.64
3		5745 - 5825	36.559	15.63
1	40	5190 - 5230	16.255	12.11
2A		5270 - 5310	16.181	12.09
2C		5510 - 5670	16.069	12.06
3		5755 - 5795	15.959	12.03
1	80	5210	16.943	12.29
2A		5290	16.788	12.25
2C		5530 - 5610	16.866	12.27
3		5775	16.943	12.29

**EUT Overview**

<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset		Page 3 of 93

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

## 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset		Page 4 of 93

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Portable Handset FCC ID: ACJFZN1C**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 00030, 00050

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	140	5700	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550	155	5775
				:	:	:	:
				134	5670	159	5795
						:	:
						163	5815

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 5 of 93

**Notes:**

- 5GHz NII operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
		ANT1
5GHz	a	97.2
	n (HT20)	97.2
	ac (HT20)	96.6
	n (HT40)	94.1
	ac (HT40)	94.1
	ac (HT80)	84.2

**Table 2-4. Measured Duty Cycles**

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)  
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)  
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)  
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325, 351/390, 390/433.3 (ac – 80MHz BW)

### 2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

This device supports the use of a Rugged USB Dock. Additional radiated spurious emission measurements were performed with the EUT inserted in the Rugged USB Dock (Model: FZ-VUBN111) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset	Page 6 of 93	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset	Page 7 of 93	

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset	Page 8 of 93	



## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The EUT complies with the requirement of §15.203.

<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset		Page 9 of 93

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset	Page 10 of 93	

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL40-1	Conducted Cable Set (40GHz)	4/20/2015	Annual	4/20/2016	WL40-1
Agilent	N9030A	PXA Signal Analyzer (44GHz)	3/24/2015	Annual	3/24/2016	MY52350166
Anritsu	MA2411B	Pulse Power Sensor	10/14/2015	Biennial	10/14/2017	846215
Anritsu	ML2495A	Power Meter	10/16/2015	Annual	10/16/2017	941001
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	11/11/2014	Biennial	11/11/2016	114451

**Table 6-1. Annual Test Equipment Calibration Schedule – Conducted Test Condition**

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/21/2017	Annual	6/21/2018	RE1
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
Emco	3116	Horn Antenna (18 - 40GHz)	4/27/2015	Triennial	4/27/2018	9203-2178
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
EMCO	3160-10	Small Horn (26.5 - 40GHz)	8/23/2016	Biennial	8/23/2018	130993
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	5/19/2017	Annual	5/19/2018	251425001
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM2
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102133
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100037
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	1/22/2018	Annual	1/22/2019	N/A
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

**Table 6-2. Annual Test Equipment Calibration Schedule – Radiated Test Condition**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset	Page 11 of 93	

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Panasonic Corporation of North America  
 FCC ID: ACJFZN1C  
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.6]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.6]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.8

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “UNII Automation,” Version 4.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 1.1.5.

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 12 of 93

## 7.2 26dB Bandwidth Measurement – 802.11a/n/ac

RSS-Gen [6.2]

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer’s bandwidth measurement function is configured to measure the 26dB bandwidth.

*The 26dB bandwidth is used to determine the conducted power limits.*

### Test Procedure Used


ANSI C63.10-2013 – Section 12.4  
KDB 789033 D02 v02r01 – Section C

### Test Settings

1. The signal analyzers’ automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The “X” dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 13 of 93


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.63
	5200	40	a	6	21.63
	5240	48	a	6	22.20
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	22.42
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.73
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	22.43
	5190	38	n (40MHz)	13.5/15 (MCS0)	43.43
	5230	46	n (40MHz)	13.5/15 (MCS0)	43.09
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	82.88
Band 2A	5260	52	a	6	21.05
	5280	56	a	6	21.33
	5320	64	a	6	21.34
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	22.64
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	22.29
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	22.42
	5270	54	n (40MHz)	13.5/15 (MCS0)	42.57
	5310	62	n (40MHz)	13.5/15 (MCS0)	42.59
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	82.59
Band 2C	5500	100	a	6	21.84
	5580	116	a	6	21.51
	5700	140	a	6	21.59
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.70
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.85
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	22.45
	5510	102	n (40MHz)	13.5/15 (MCS0)	42.26
	5550	110	n (40MHz)	13.5/15 (MCS0)	42.44
	5670	134	n (40MHz)	13.5/15 (MCS0)	42.56
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	82.83

**Table 7-2. Conducted Bandwidth Measurements**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 14 of 93	

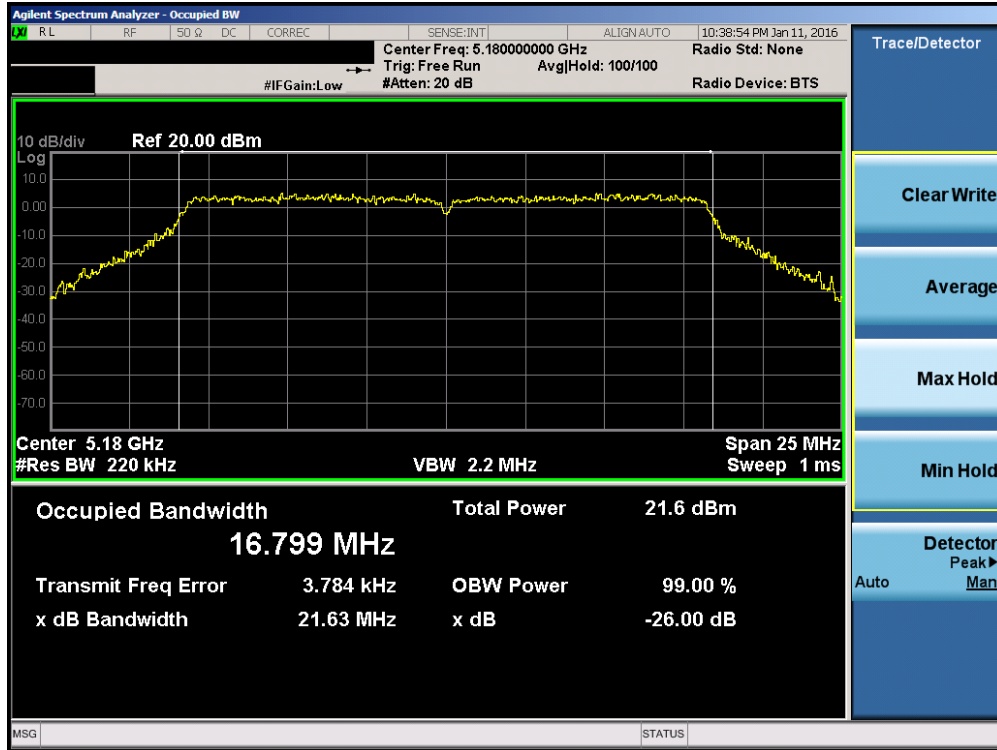


Plot 7-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

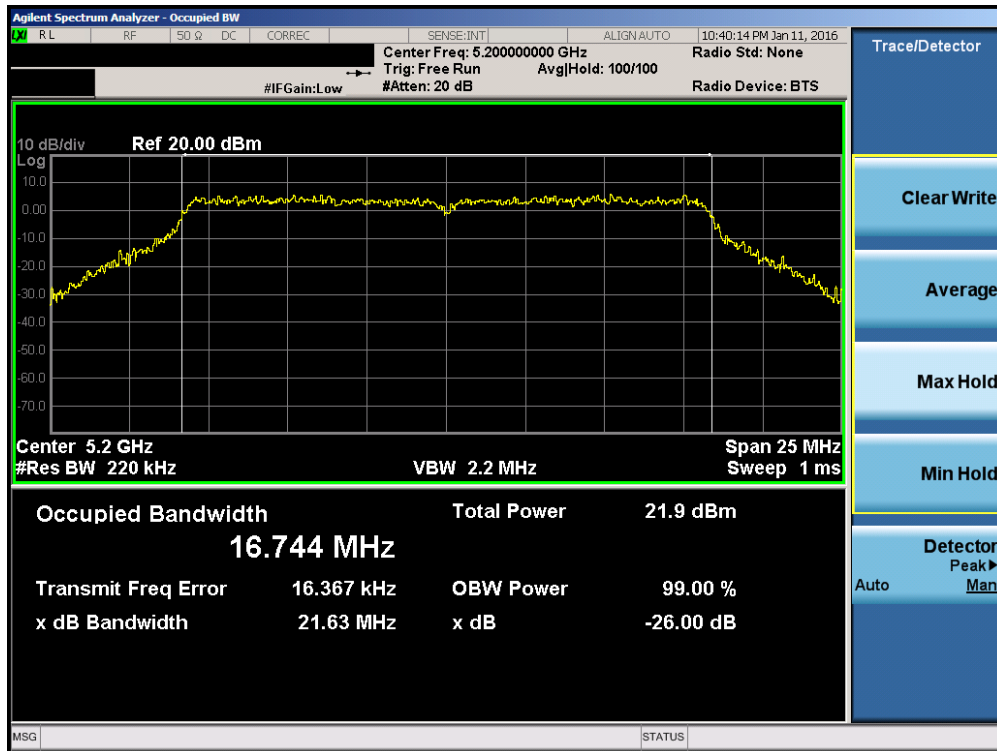


Plot 7-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 15 of 93

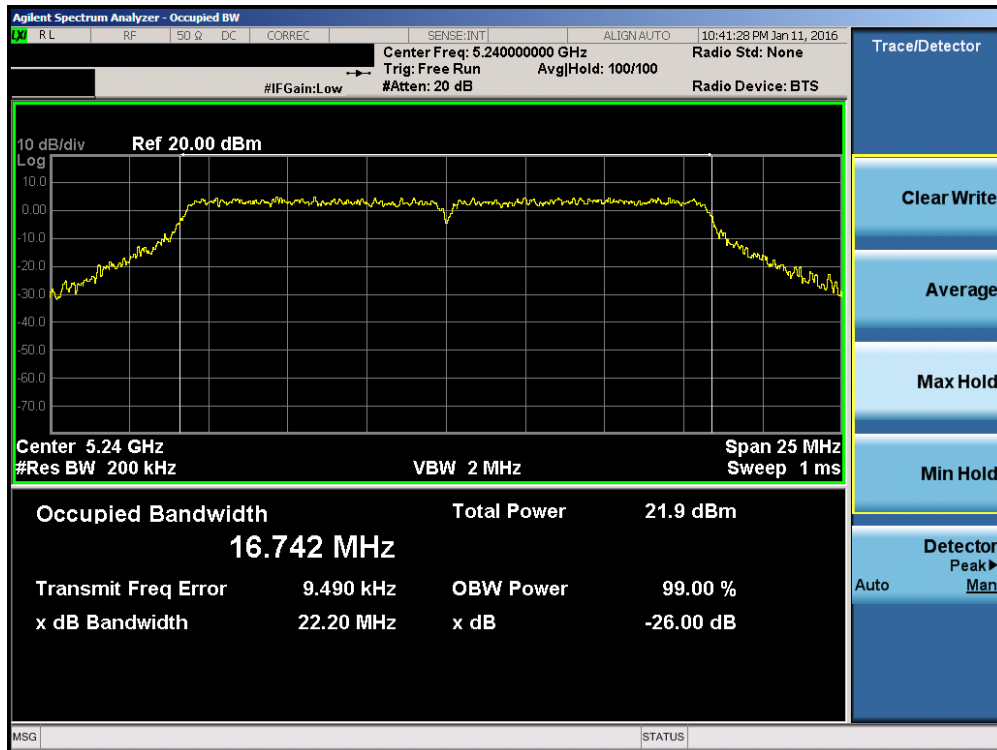


Plot 7-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

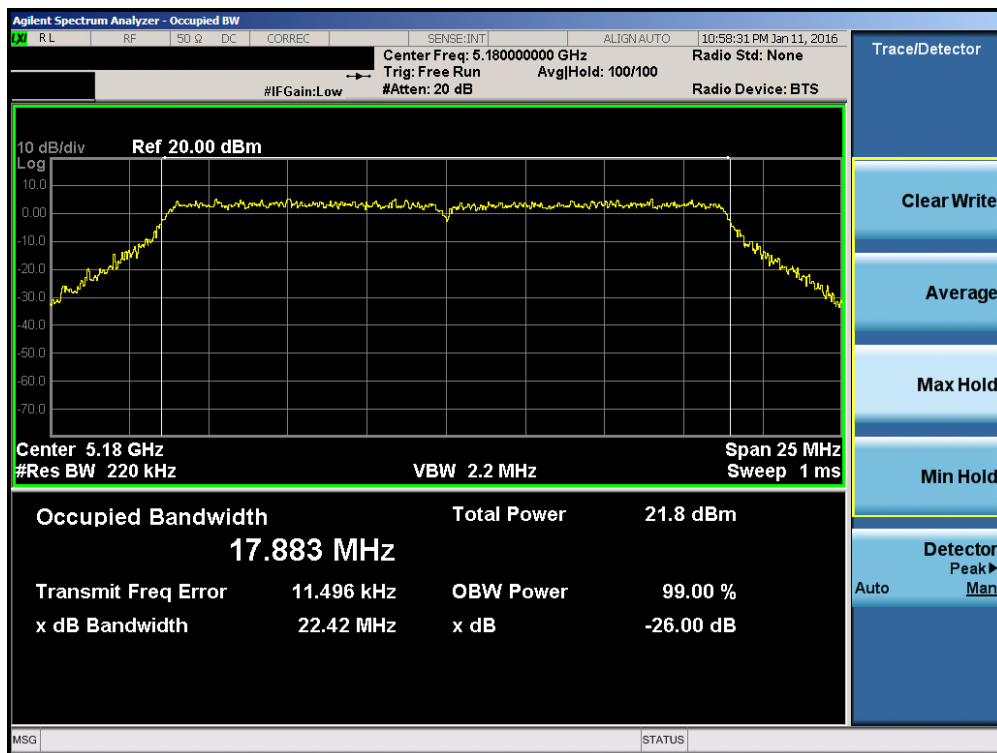


Plot 7-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 16 of 93



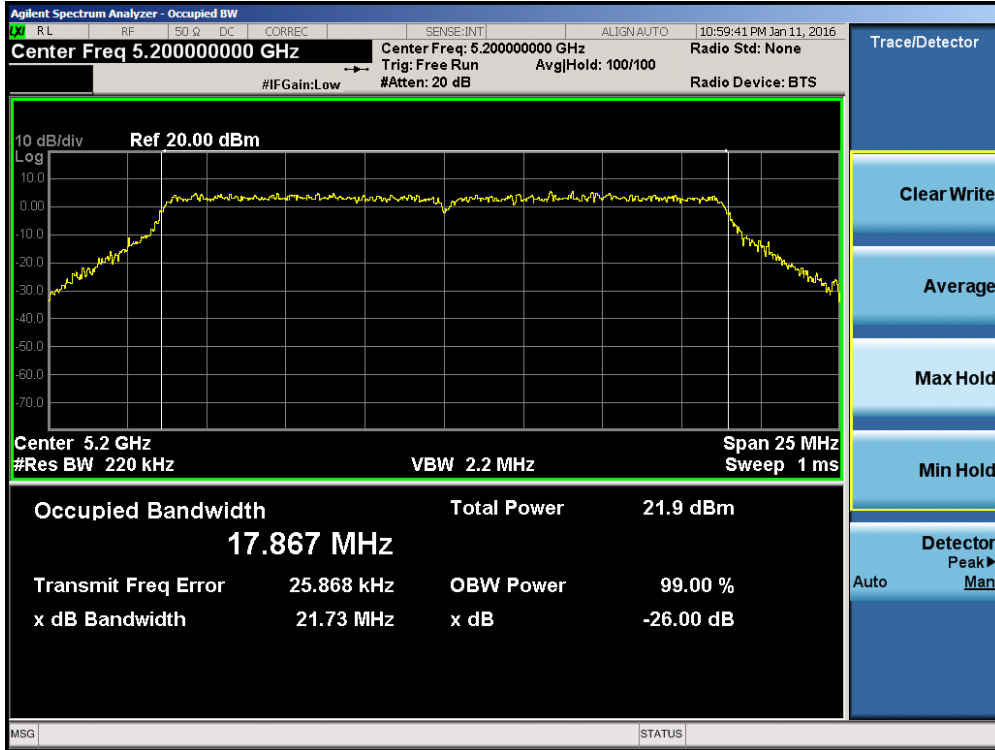


Plot 7-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

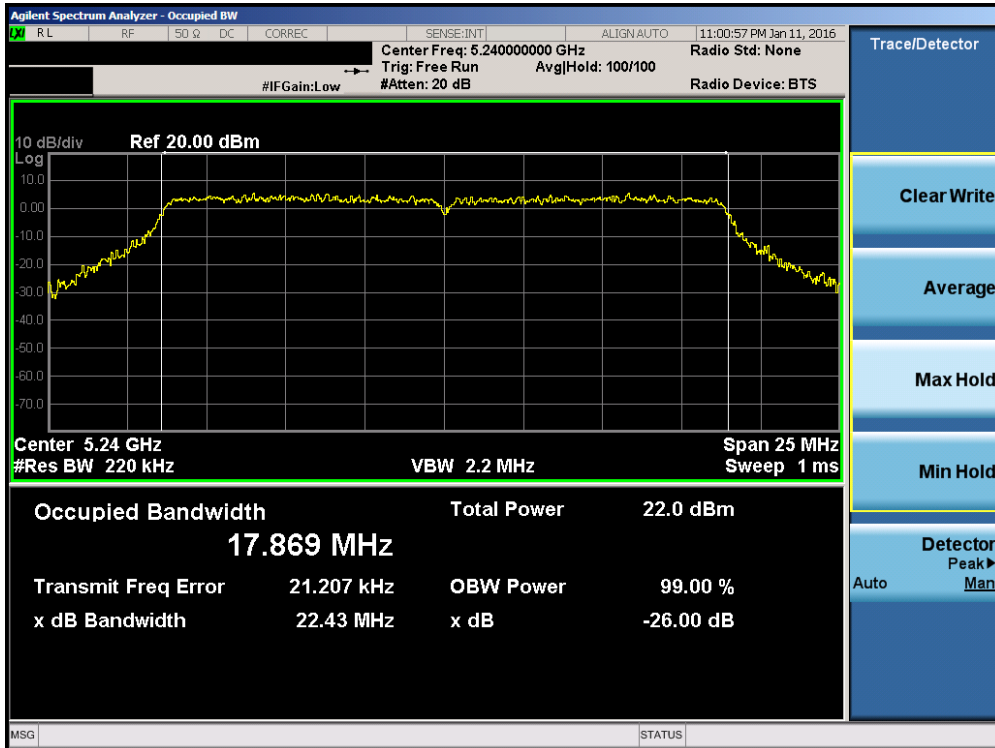


Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 17 of 93

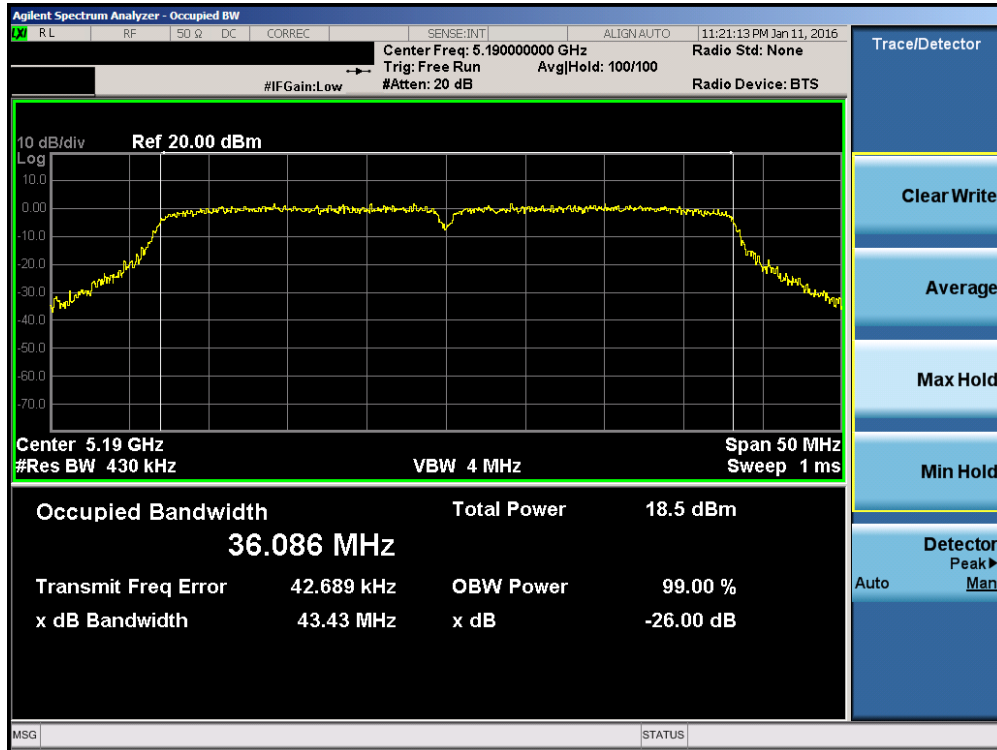


Plot 7-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

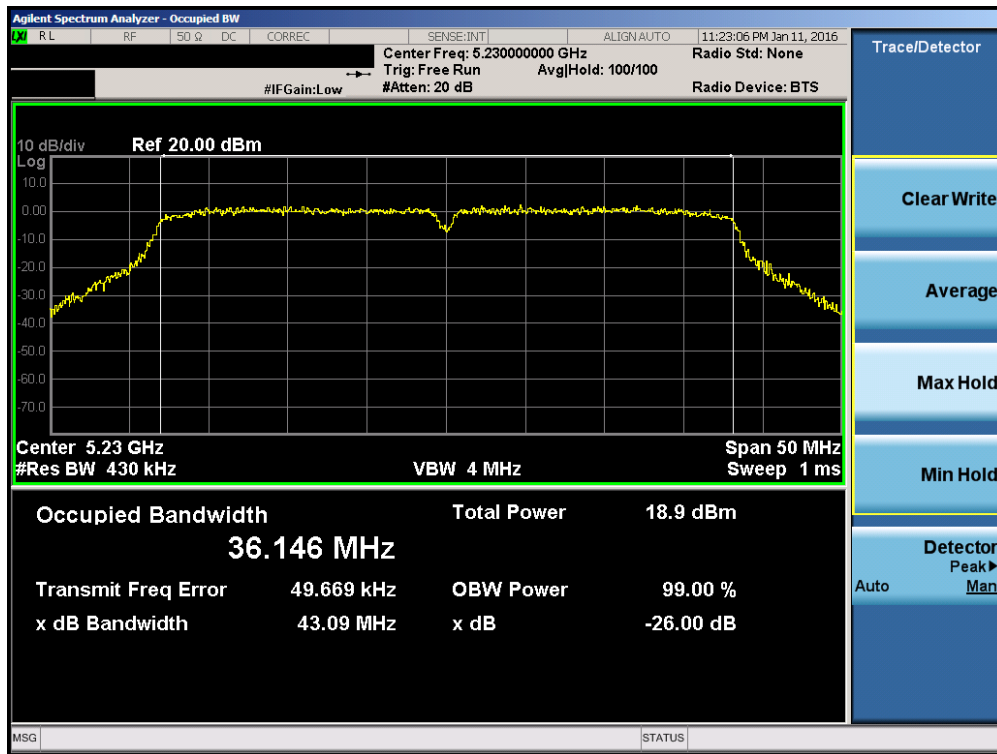


Plot 7-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 18 of 93

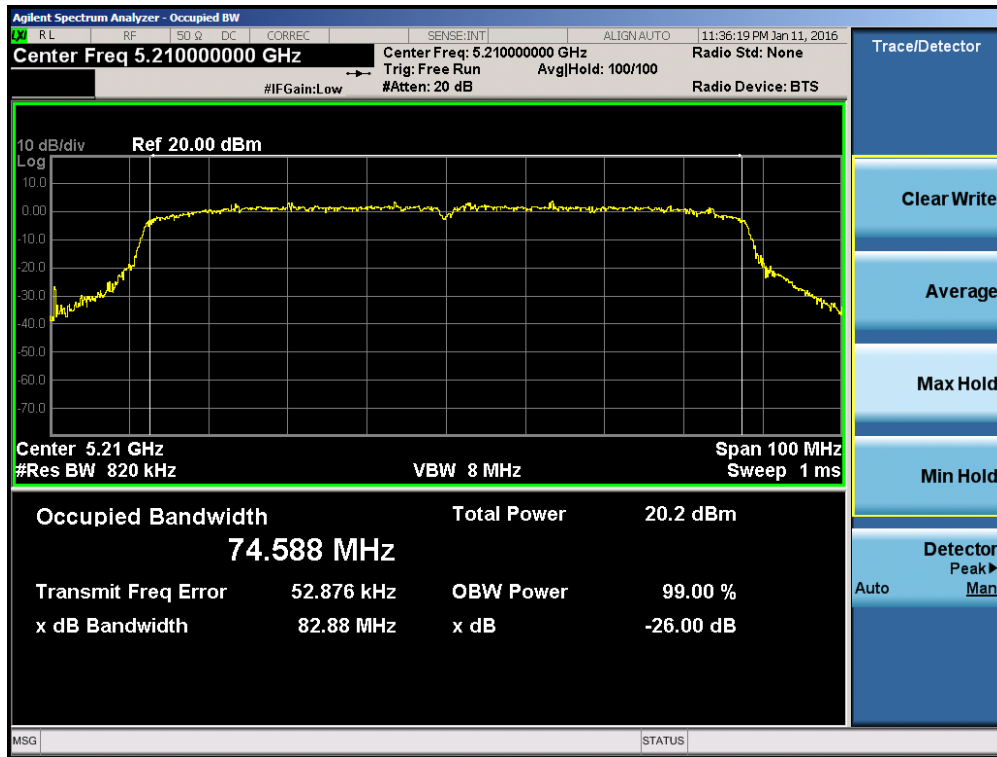


Plot 7-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

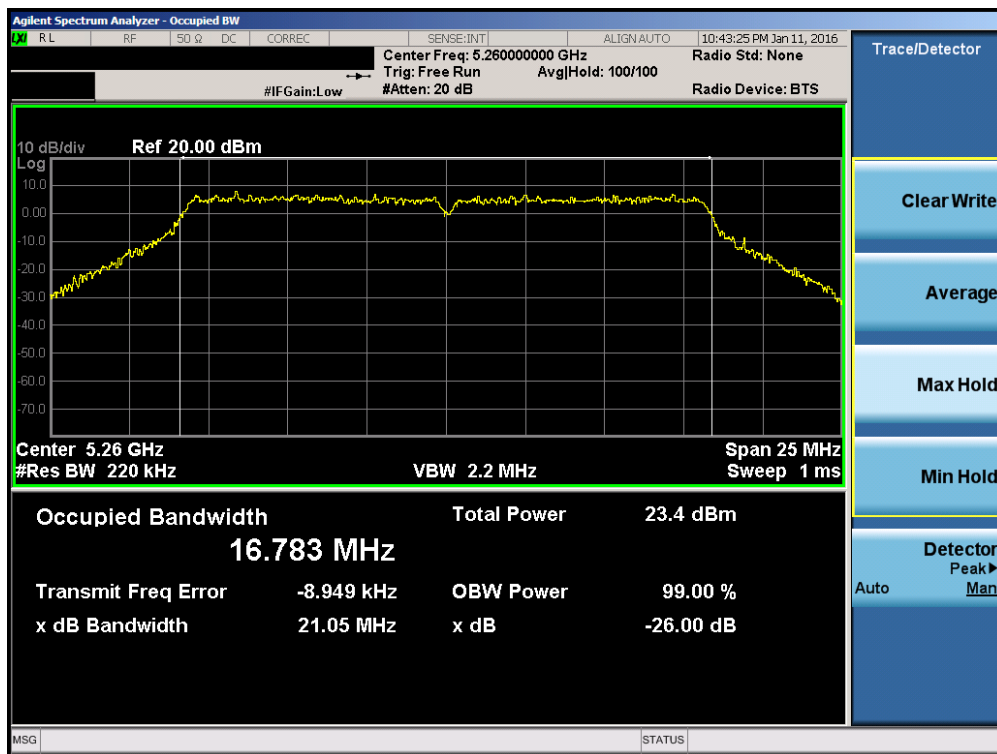


Plot 7-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 19 of 93

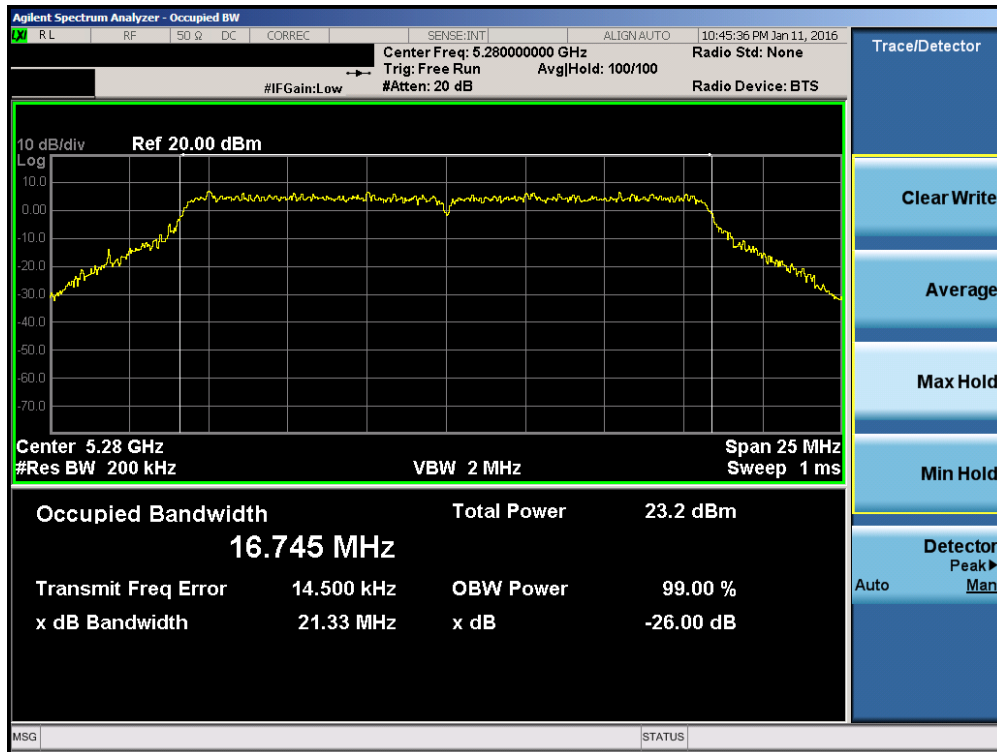


Plot 7-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

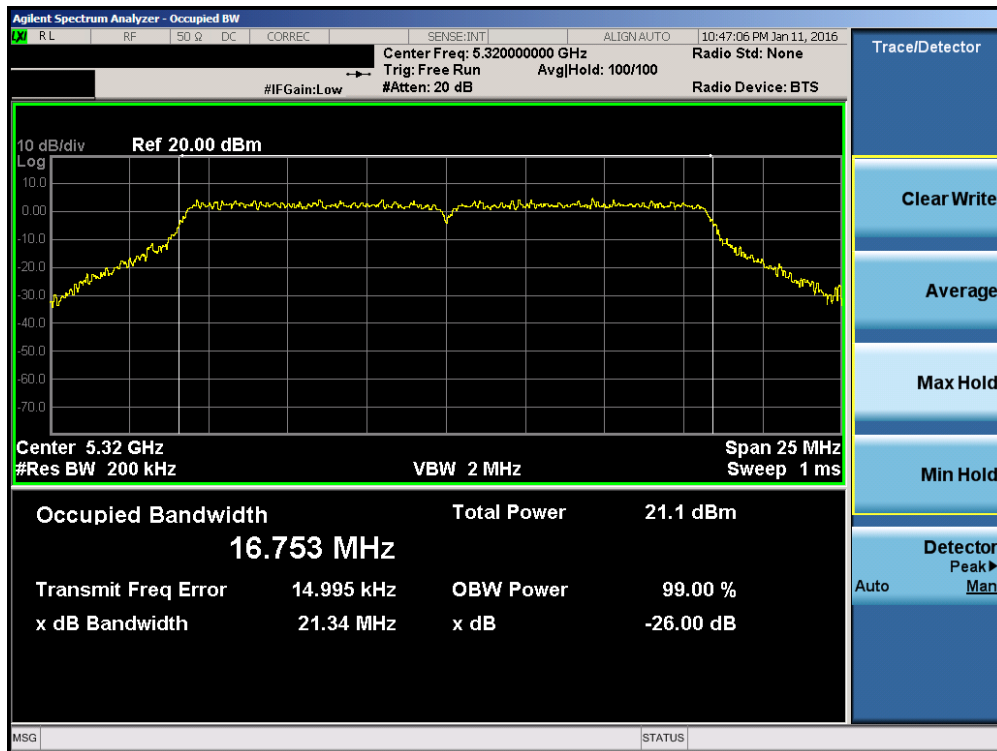


Plot 7-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 20 of 93

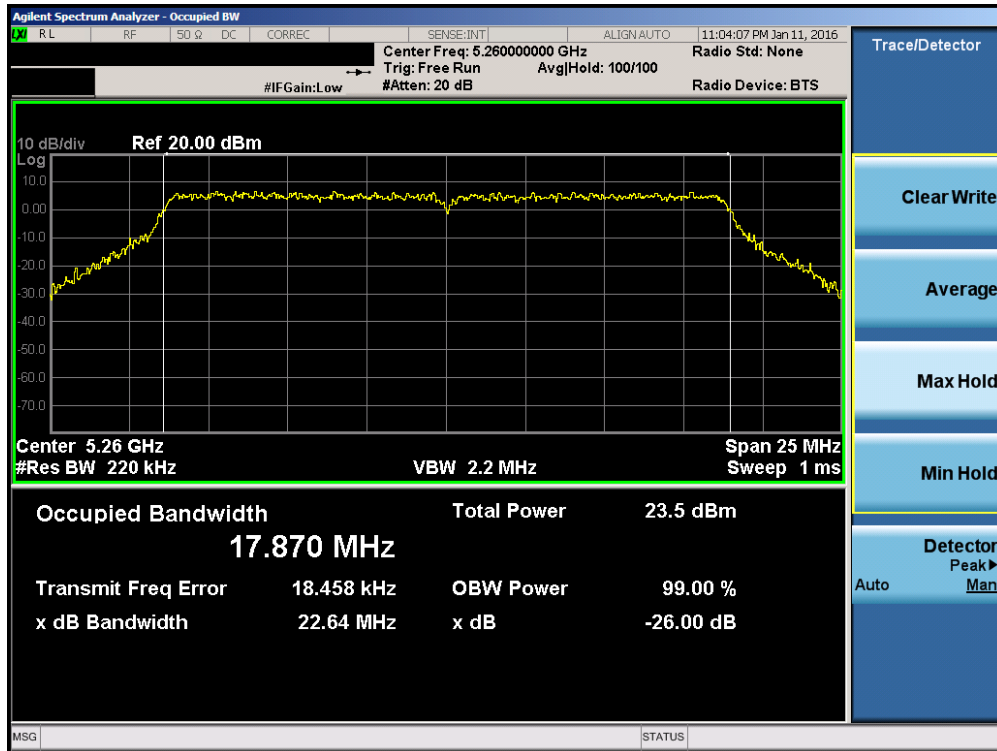


Plot 7-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

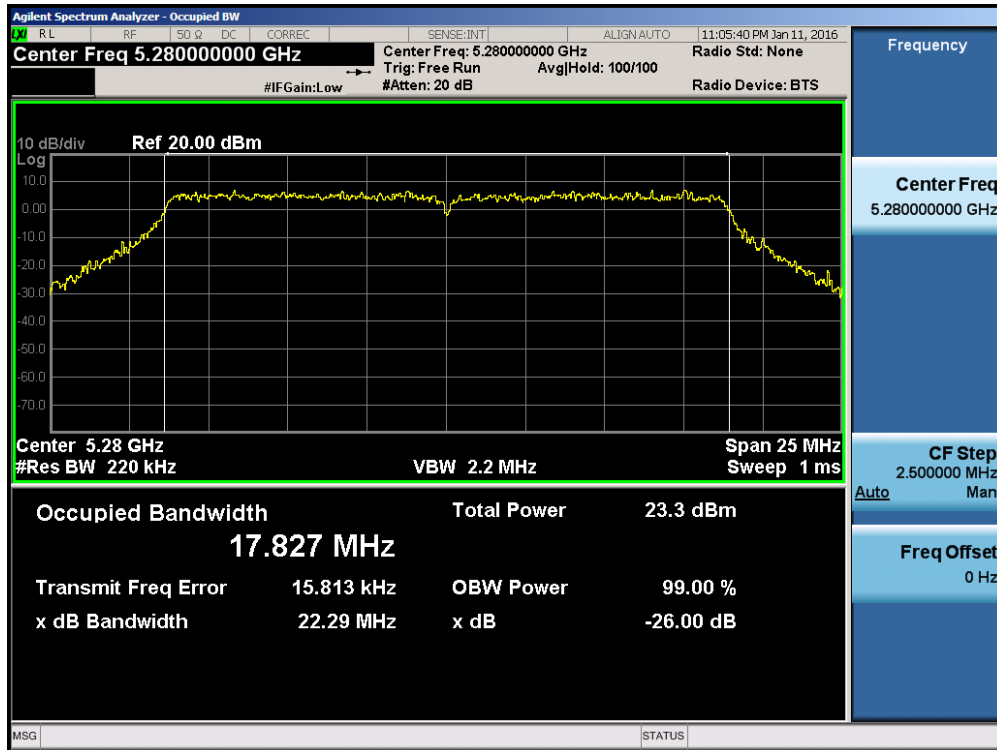


Plot 7-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 21 of 93

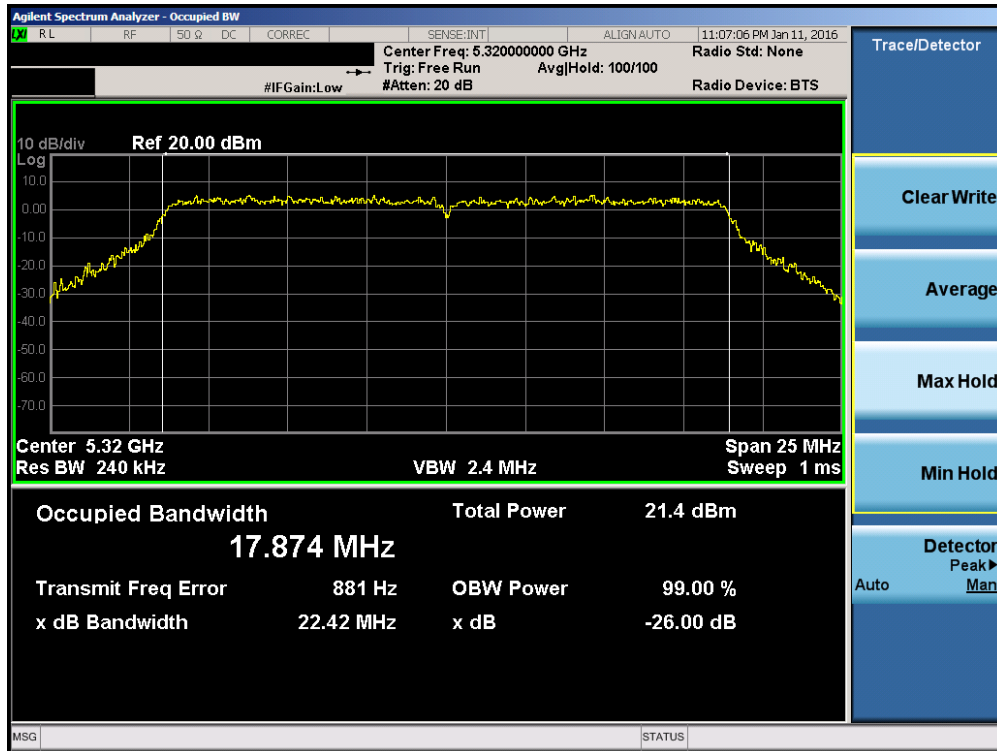


Plot 7-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

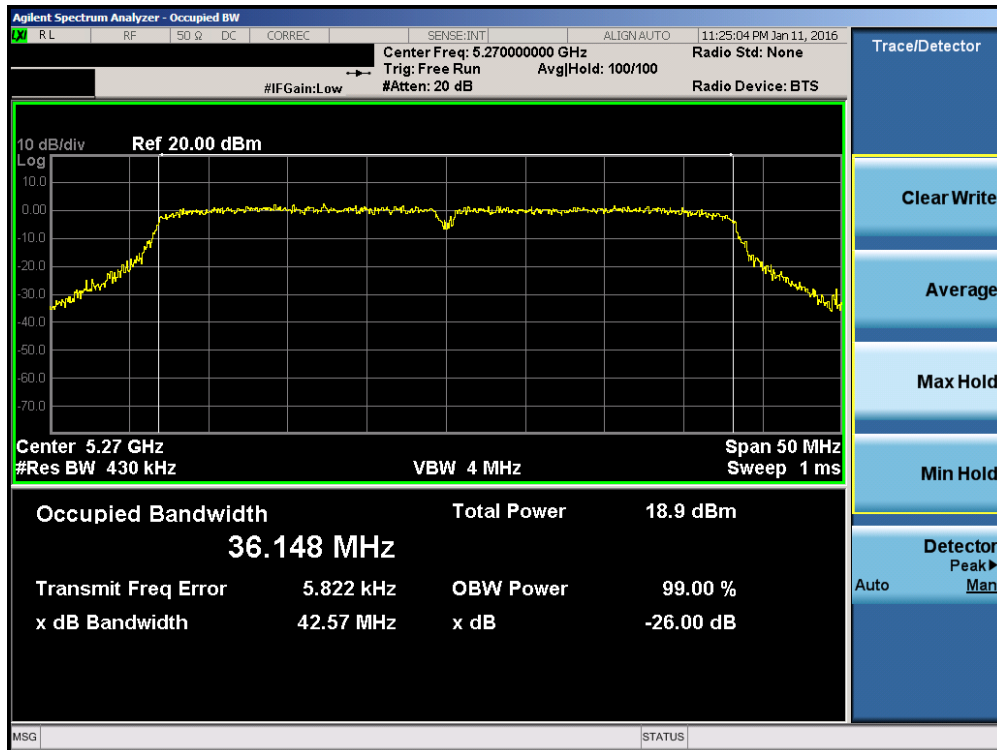


Plot 7-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 22 of 93

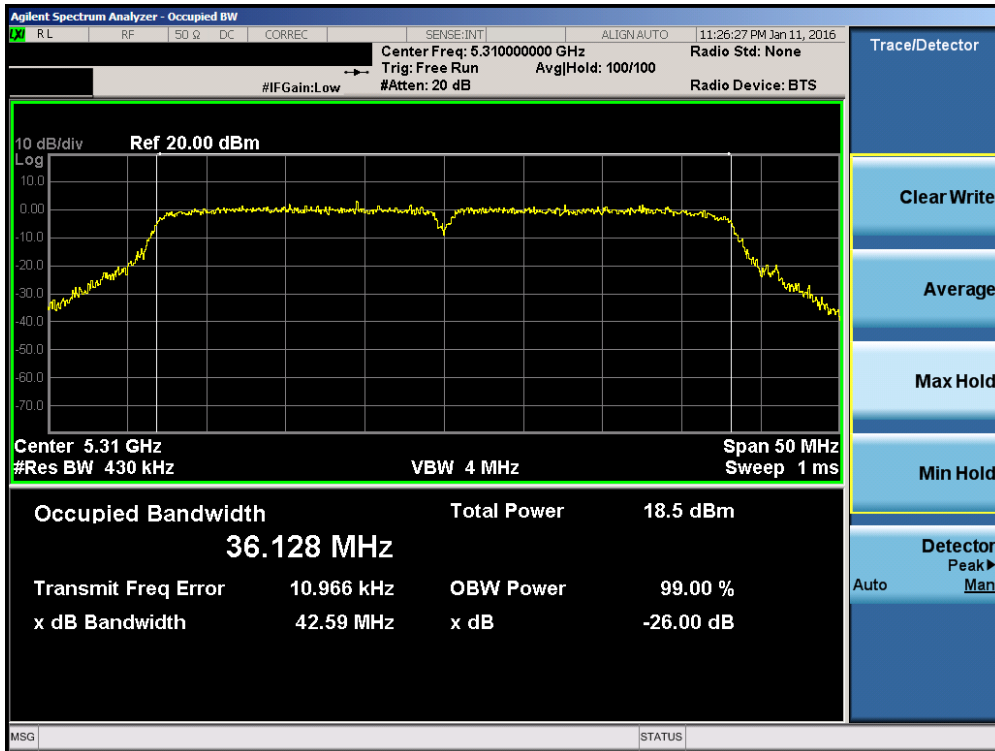


Plot 7-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

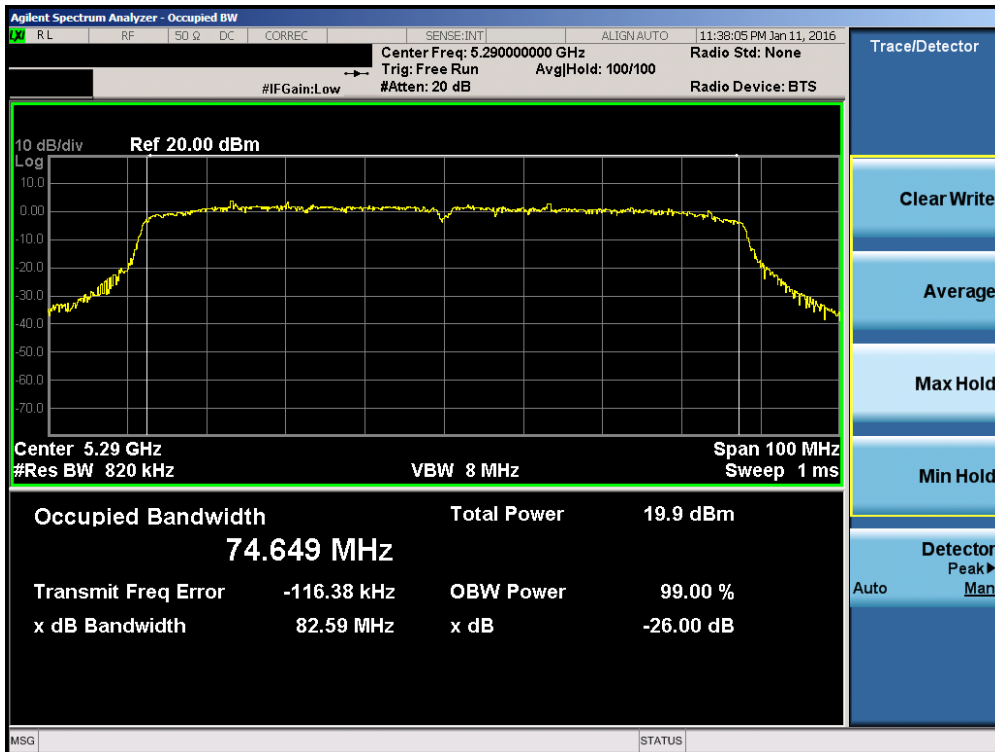


Plot 7-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 23 of 93



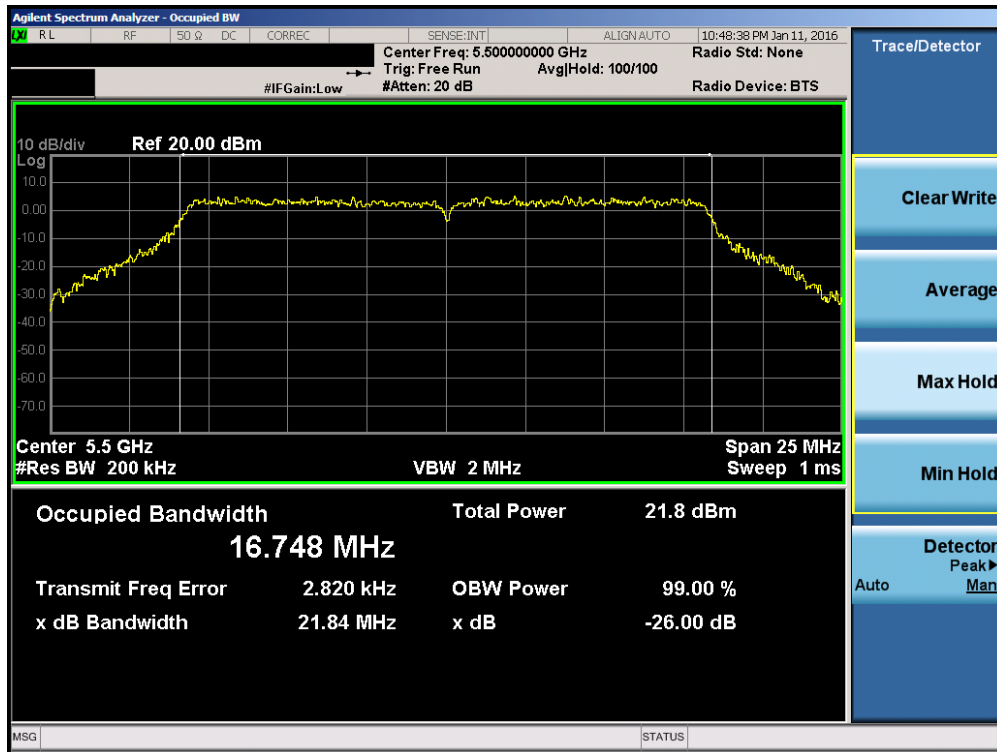


Plot 7-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

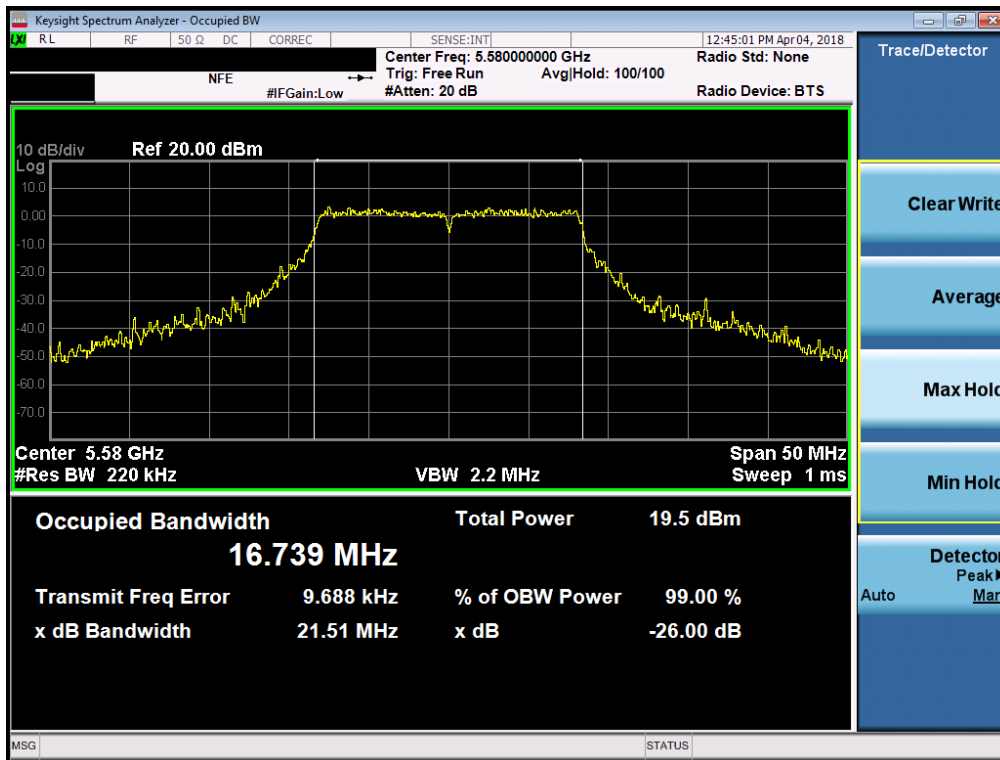


Plot 7-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 24 of 93



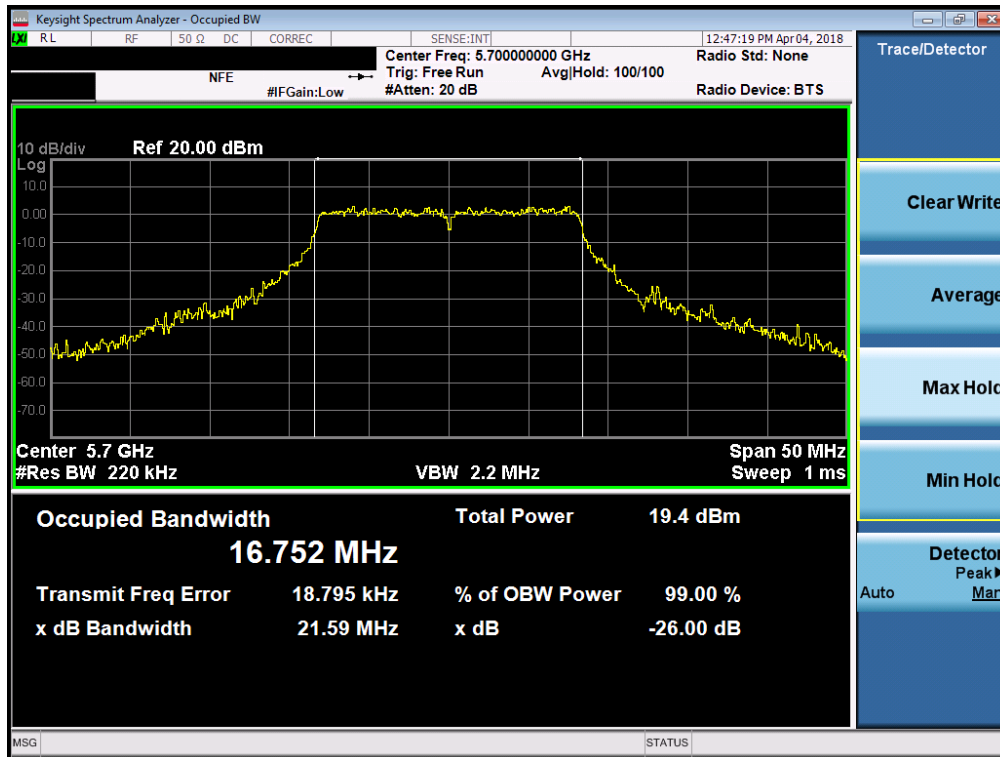


Plot 7-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 140)

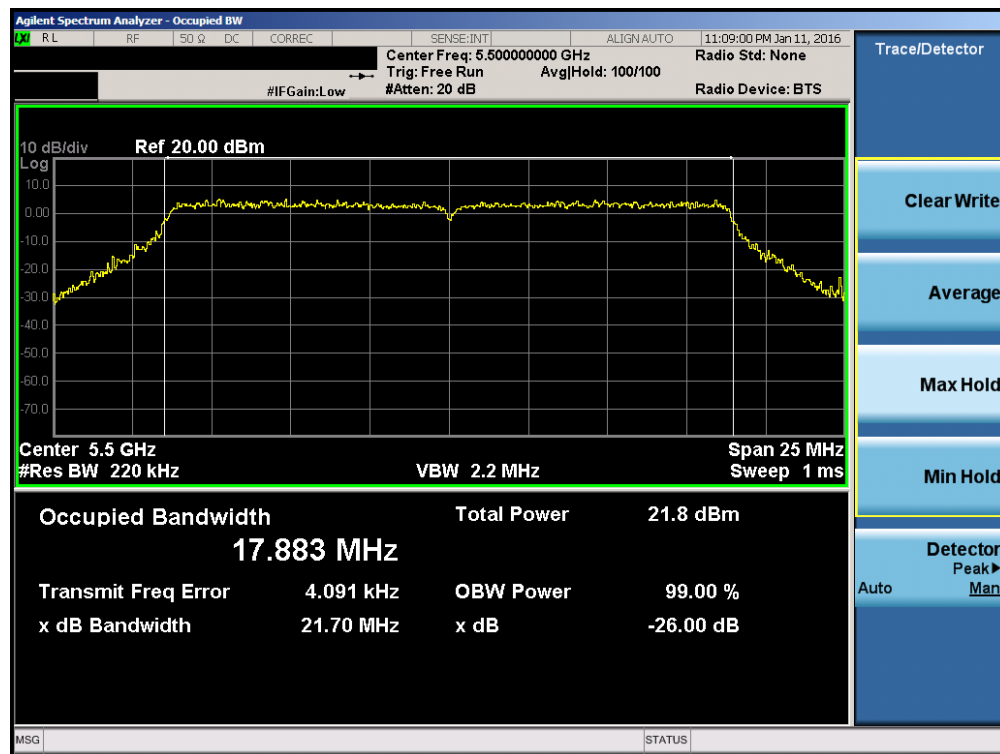


Plot 7-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 25 of 93

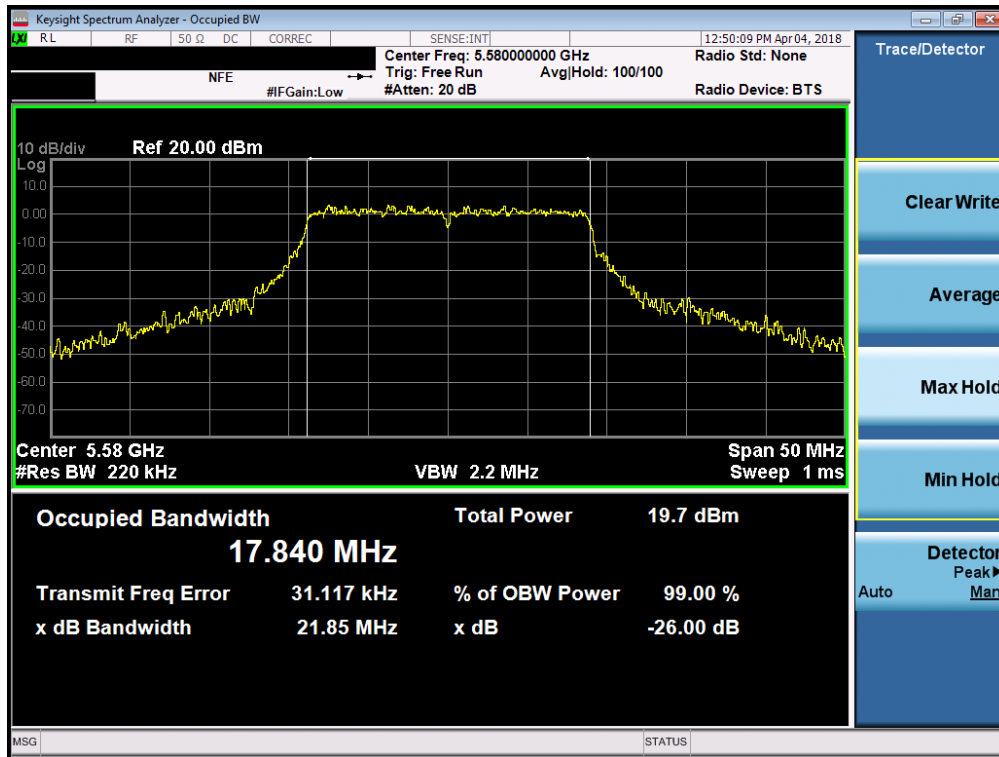


Plot 7-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

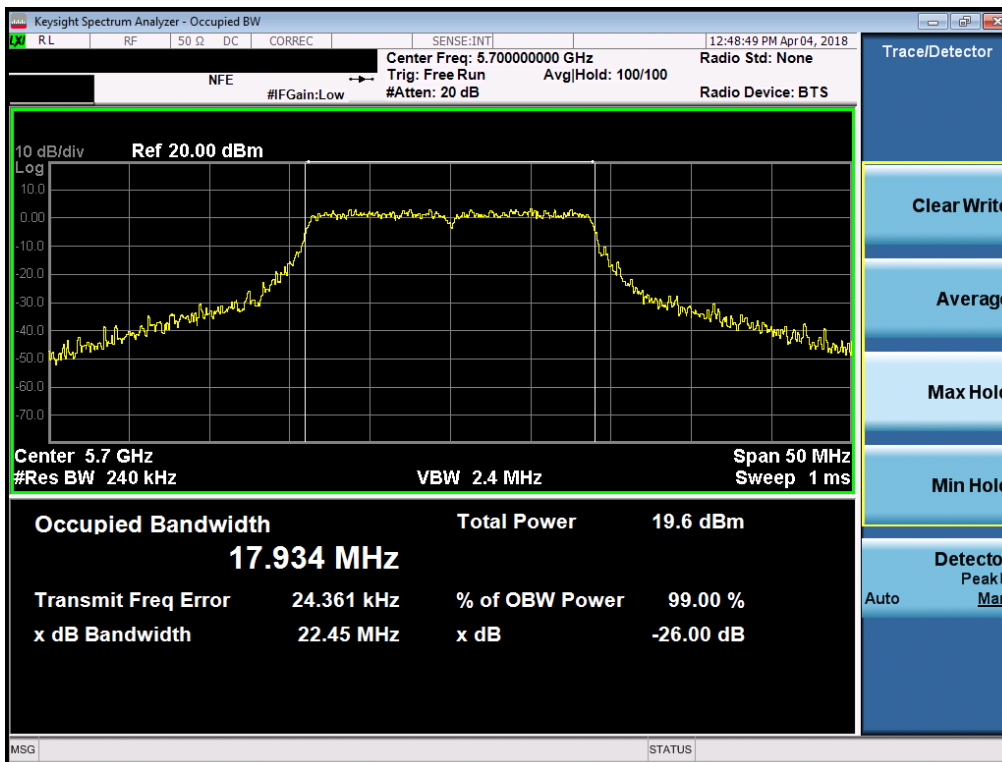


Plot 7-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 140)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 26 of 93

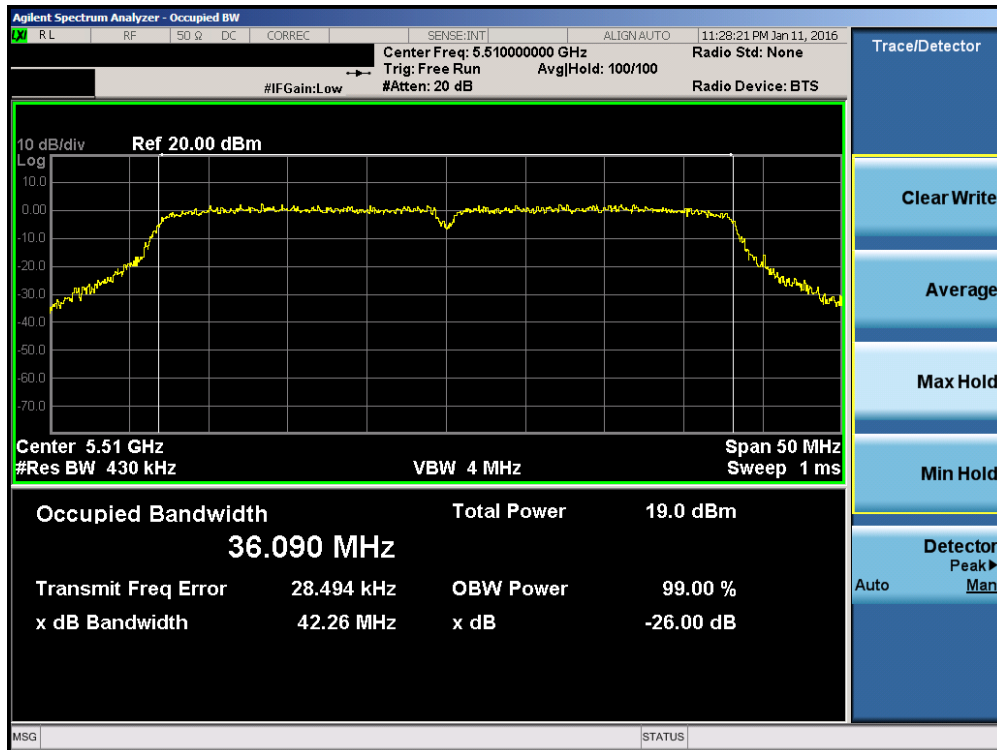


Plot 7-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

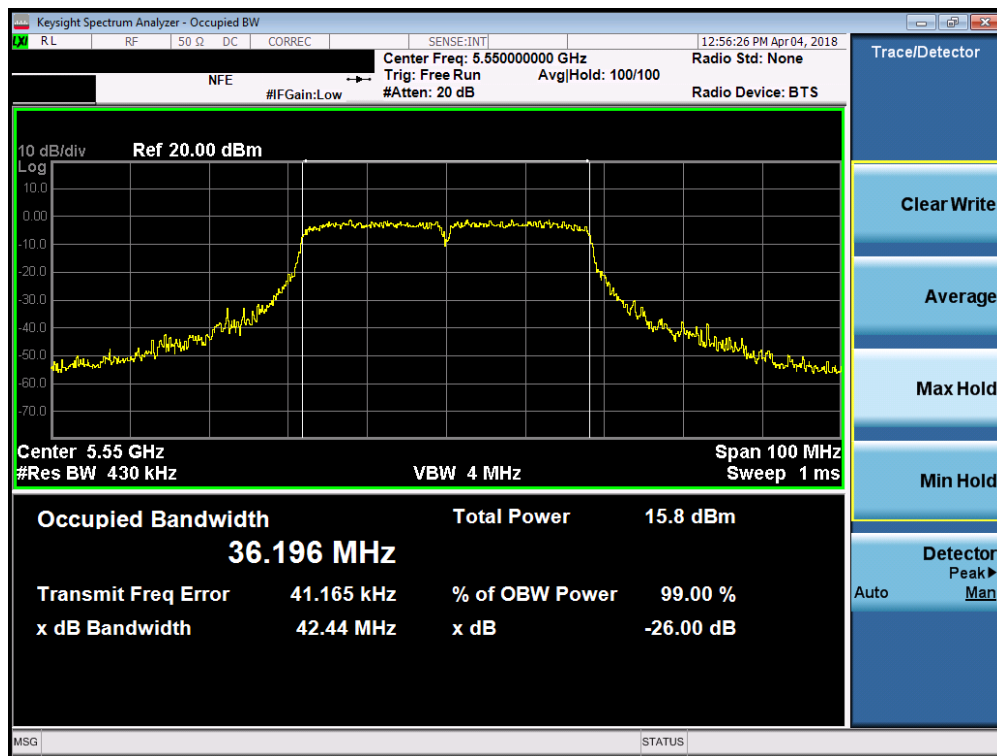


Plot 7-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 27 of 93

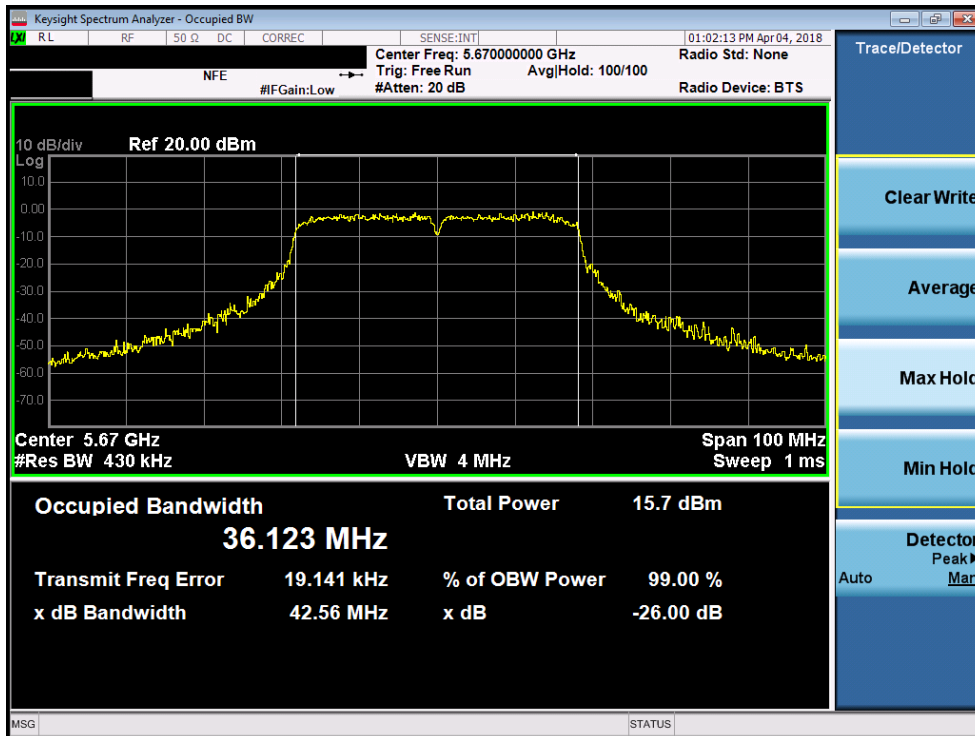

Plot 7-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)

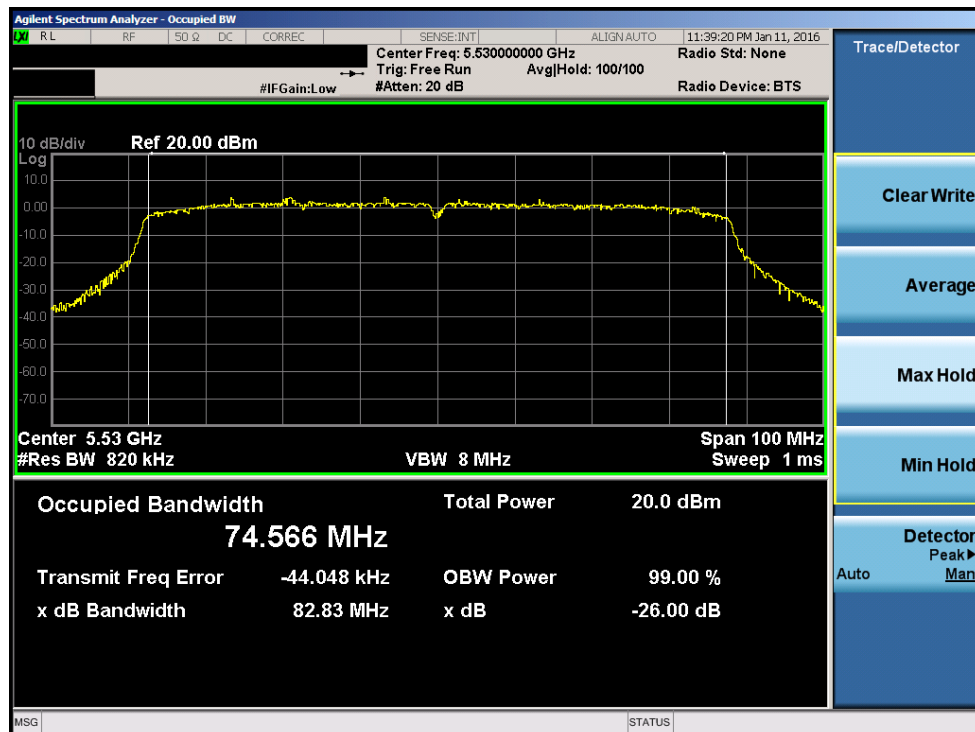

Plot 7-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 28 of 93

### 7.3 6dB Bandwidth Measurement – 802.11a/n/ac §15.407 (e); RSS-Gen [6.2]

#### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer’s bandwidth measurement function is configured to measure the 6dB bandwidth.

***In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq$  500 kHz.***

#### Test Procedure Used


ANSI C63.10-2013 – Section 6.9.2  
KDB 789033 D02 v02r01 – Section C

#### Test Settings

1. The signal analyzers’ automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to  $X = 6$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes


None.

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 29 of 93

## 6 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	a	6	16.41
	5785	157	a	6	16.52
	5825	165	a	6	16.41
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.62
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.63
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.70
	5755	151	n (40MHz)	13.5/15 (MCS0)	35.09
	5795	159	n (40MHz)	13.5/15 (MCS0)	35.33
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	82.55

**Table 7-3. Conducted Bandwidth Measurements**

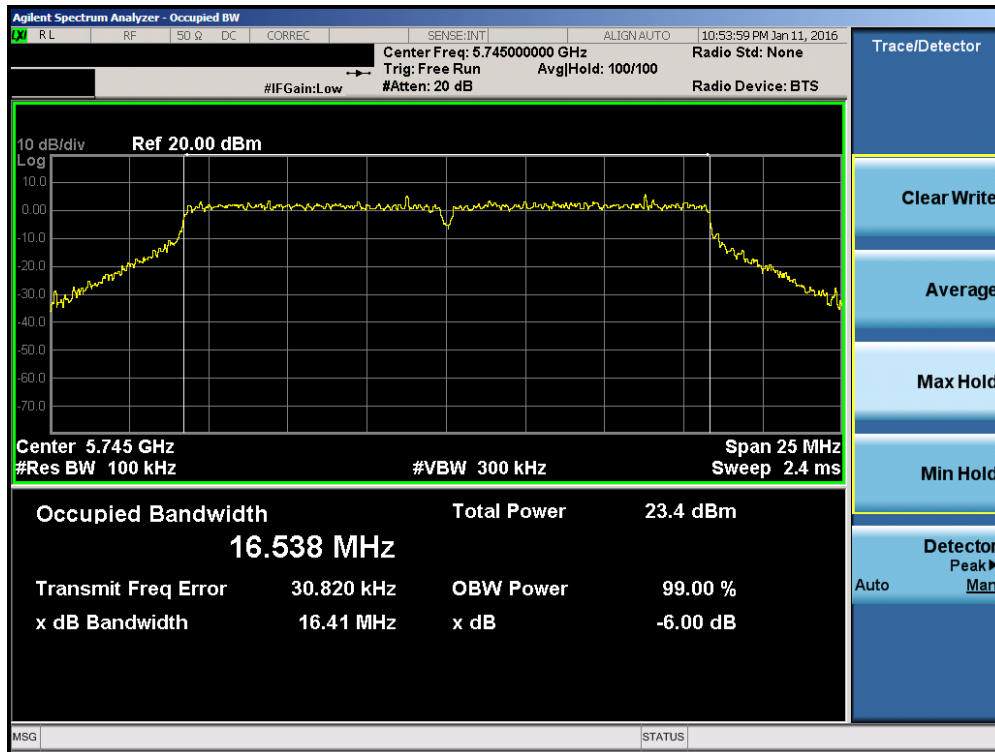


**Plot 7-29. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 30 of 93

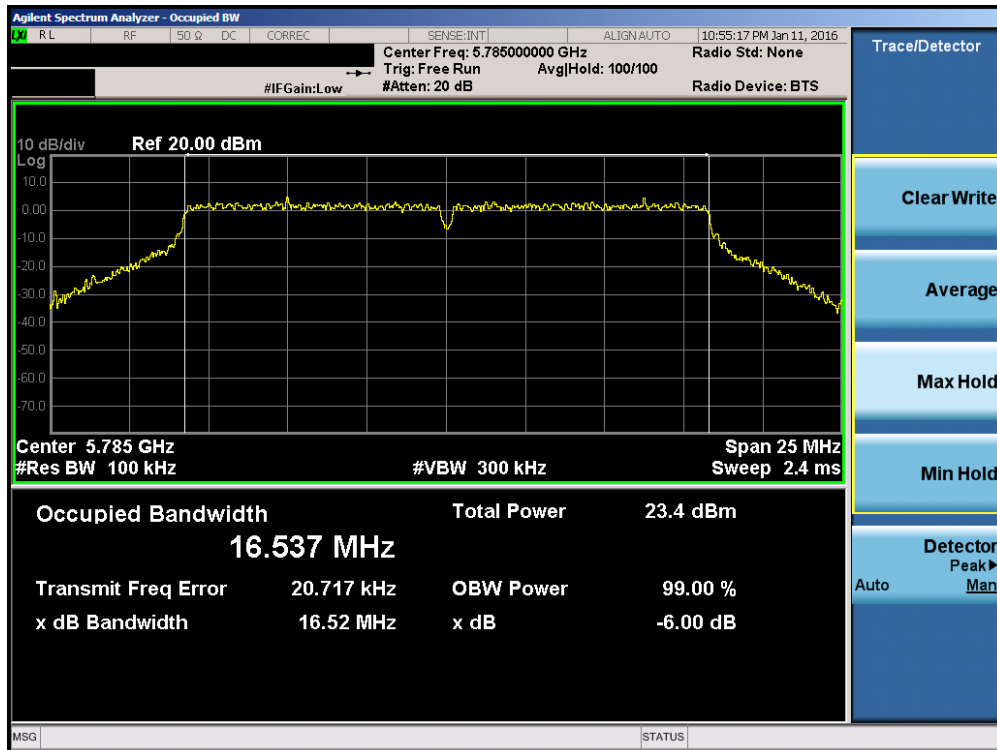


Plot 7-30. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

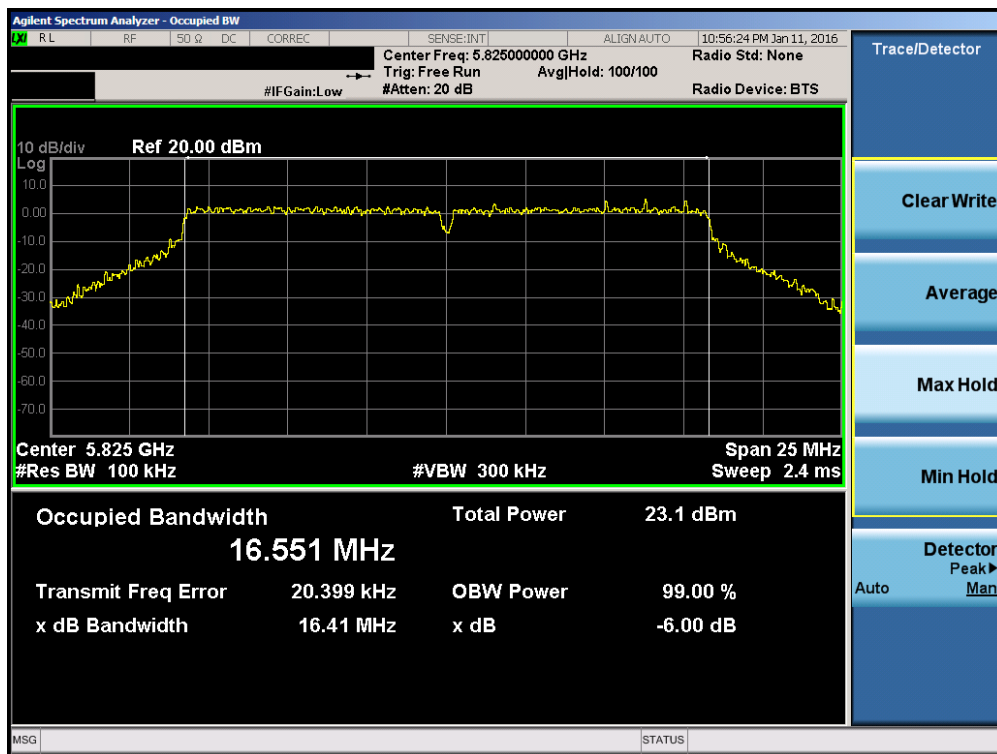


Plot 7-31. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 31 of 93



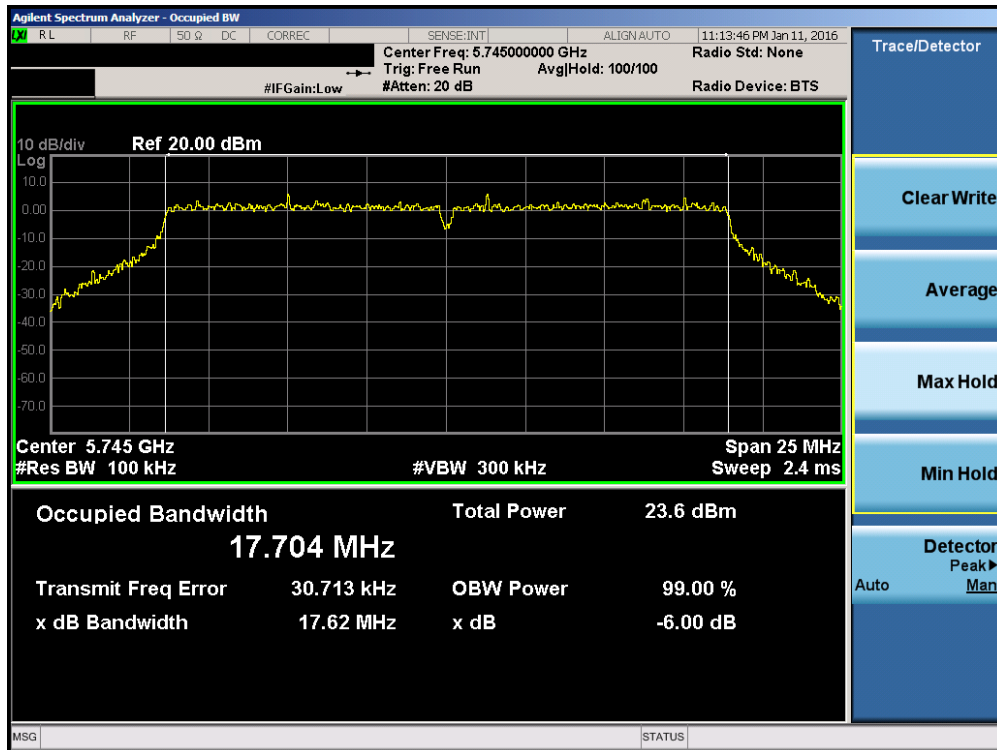


Plot 7-32. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

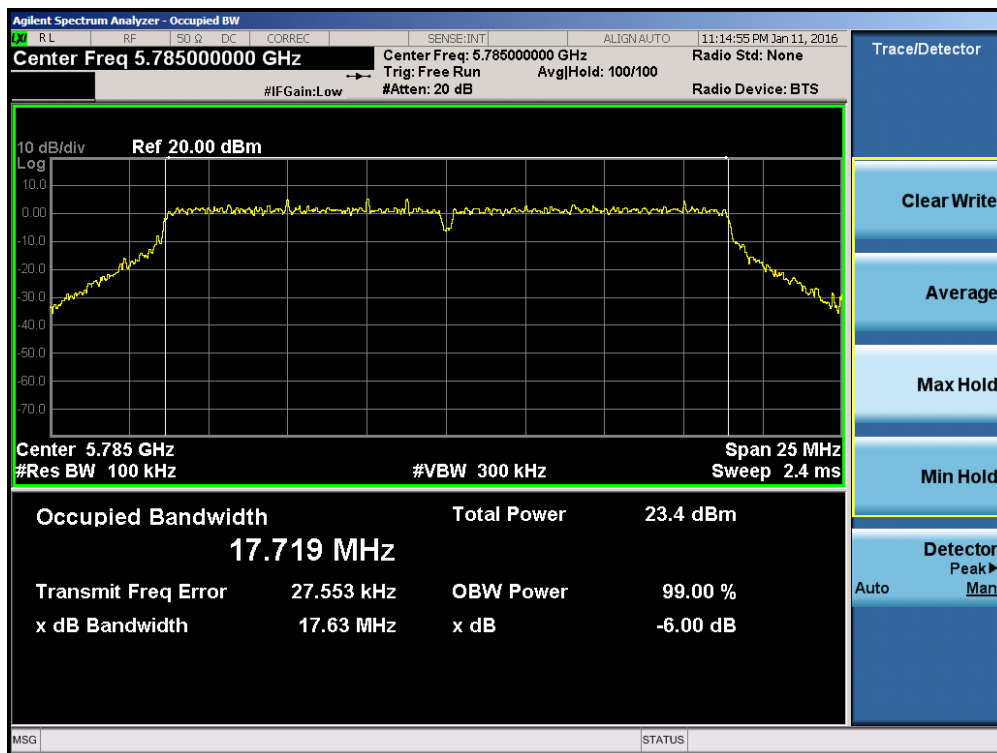


Plot 7-33. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 32 of 93



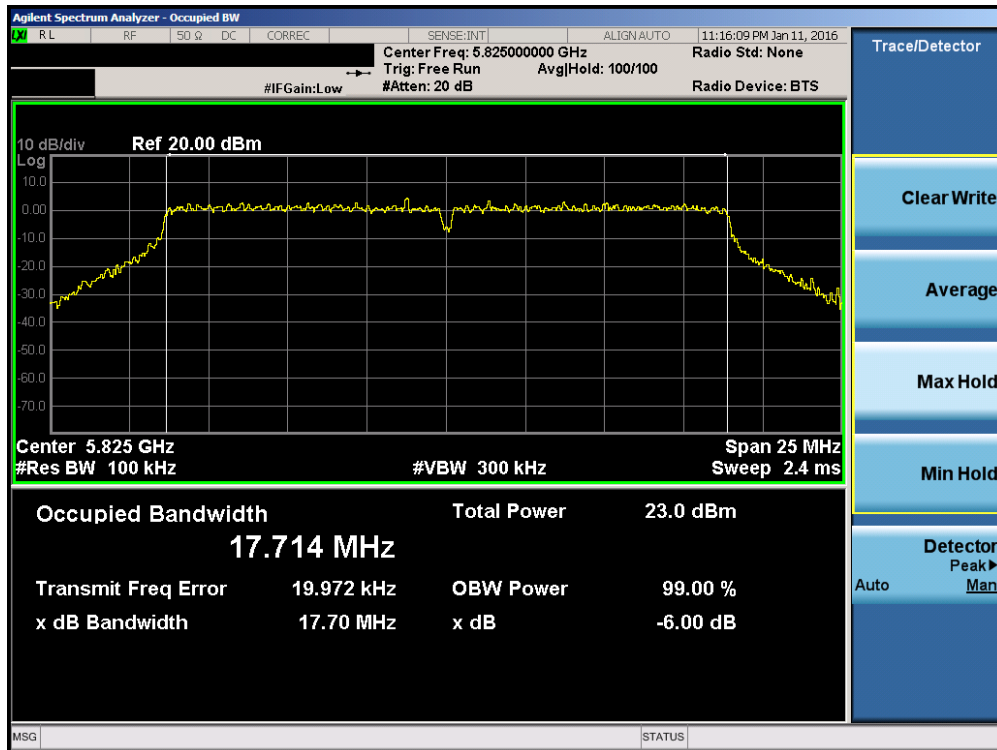


Plot 7-34. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

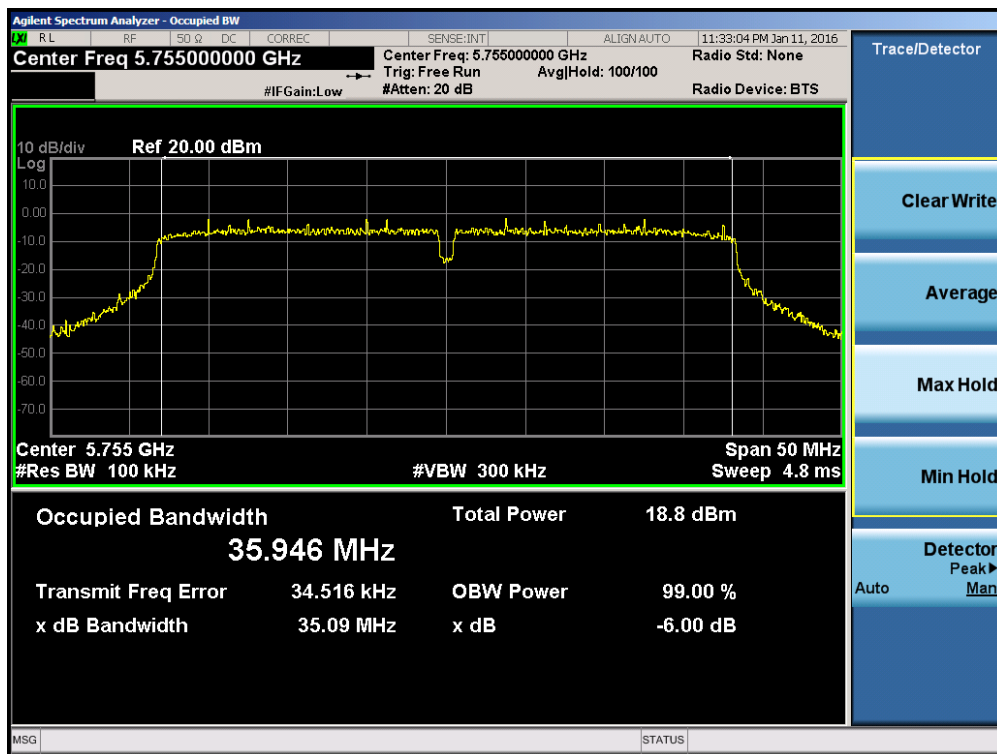


Plot 7-35. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 33 of 93

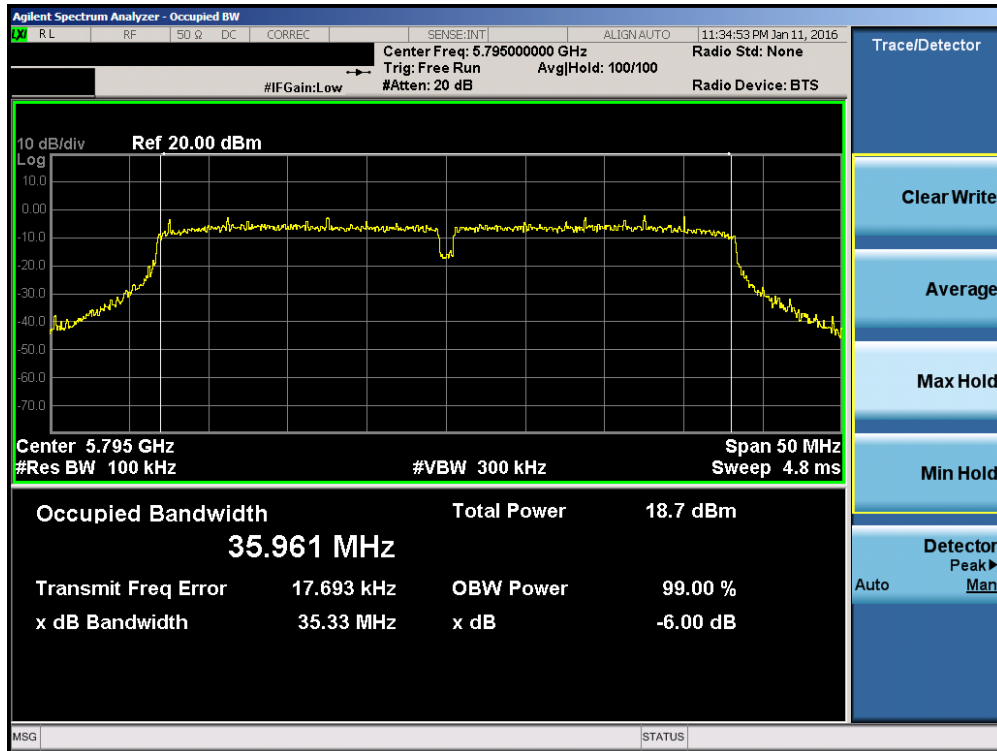

Plot 7-36. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

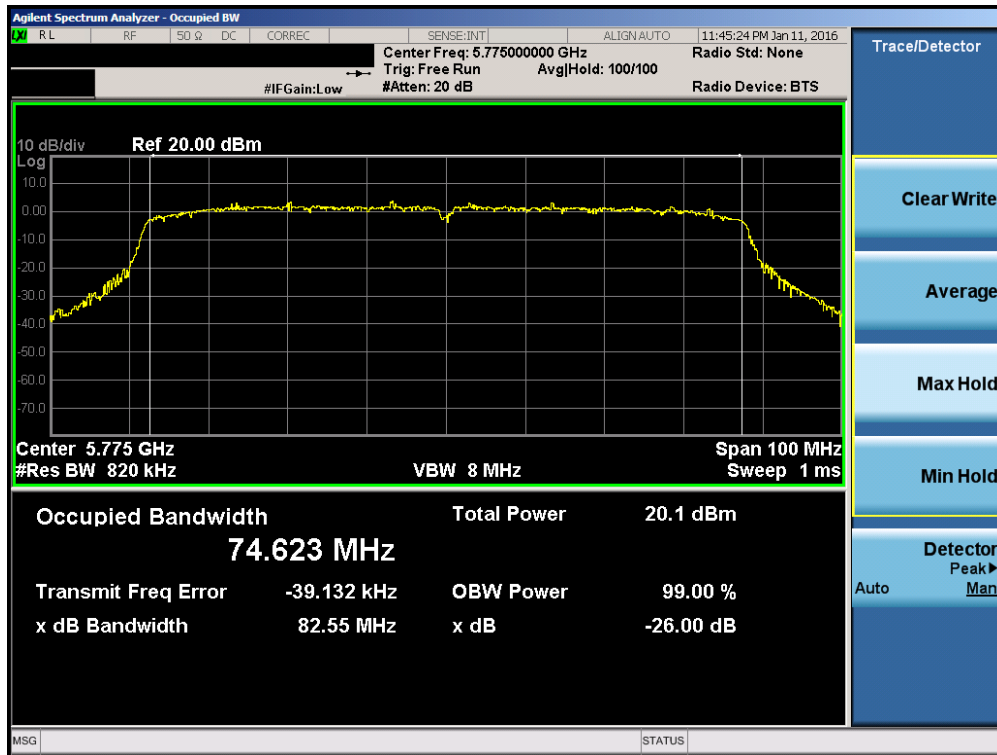

Plot 7-37. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 34 of 93

## 7.4 UNII Output Power Measurement – 802.11a/n/ac §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

***In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).***

***In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.05) = 24.23\text{dBm}$ .***

***In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.51) = 24.33\text{dBm}$ .***

***In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).***

### Test Procedure Used


ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G  
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

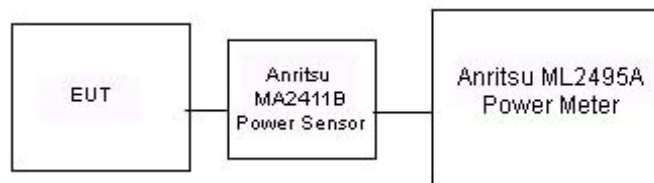

**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 35 of 93

Freq [MHz]	Channel	Detector	IEEE Transmission Mode			Conducted Power Limit [dBm]
			802.11a	802.11n	802.11ac	
5180	36	AVG	14.01	13.81	14.00	23.98
5200	40	AVG	13.94	13.92	13.90	23.98
5220	44	AVG	14.00	13.99	13.94	23.98
5240	48	AVG	13.96	13.89	13.94	23.98
5260	52	AVG	15.61	15.59	15.66	23.98
5280	56	AVG	15.67	15.53	15.55	23.98
5300	60	AVG	15.60	15.40	15.57	23.98
5320	64	AVG	13.98	13.94	13.84	23.98
5500	100	AVG	14.06	13.98	14.03	23.98
5580	116	AVG	15.64	15.56	15.61	23.98
5660	132	AVG	15.54	15.45	15.52	23.98
5700	140	AVG	14.00	13.90	13.79	23.98
5745	149	AVG	15.63	15.51	15.52	30.00
5785	157	AVG	15.57	15.55	15.42	30.00
5825	165	AVG	15.55	15.61	15.56	30.00

Table 7-4. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]
			802.11n	802.11ac	
5190	38	AVG	12.11	12.05	23.98
5230	46	AVG	12.01	11.97	23.98
5270	54	AVG	11.94	12.09	23.98
5310	62	AVG	11.97	11.98	23.98
5510	102	AVG	11.95	11.97	23.98
5550	110	AVG	11.93	12.05	23.98
5670	134	AVG	12.00	11.92	23.98
5755	151	AVG	11.88	12.03	30.00
5795	159	AVG	12.03	11.97	30.00

Table 7-5. 40MHz BW (UNII) Maximum Conducted Output Power

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset			Page 36 of 93

Freq [MHz]	Channel	Detector	IEEE Transmission Mode	Conducted Power Limit [dBm]
			802.11ac	
5210	42	AVG	12.29	23.98
5290	58	AVG	12.25	23.98
5530	106	AVG	12.17	23.98
5775	155	AVG	12.29	30.00

**Table 7-6. 80MHz BW (UNII) Maximum Conducted Output Power**

<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Panasonic</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset		Page 37 of 93

**7.5 Maximum Power Spectral Density – 802.11a/n/ac**  
§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

**Test Overview and Limit**

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

***In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.***

***In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.***

**Test Procedure Used**


ANSI C63.10-2013 – Section 12.3.2.2  
 KDB 789033 D02 v02r01 – Section F

**Test Settings**

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times$  (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

**Test Notes**

None

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 38 of 93

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	4.86	11.0	-6.14
	5200	40	a	6	4.86	11.0	-6.14
	5240	48	a	6	5.11	11.0	-5.89
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	4.70	11.0	-6.30
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	4.71	11.0	-6.29
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	4.79	11.0	-6.21
	5190	38	n (40MHz)	13.5/15 (MCS0)	-1.86	11.0	-12.86
	5230	46	n (40MHz)	13.5/15 (MCS0)	-1.36	11.0	-12.36
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.11	11.0	-14.11
Band 2A	5260	52	a	6	6.51	11.0	-4.49
	5280	56	a	6	6.33	11.0	-4.68
	5320	64	a	6	4.56	11.0	-6.44
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	6.17	11.0	-4.83
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	6.19	11.0	-4.81
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	4.18	11.0	-6.82
	5270	54	n (40MHz)	13.5/15 (MCS0)	-1.30	11.0	-12.30
	5310	62	n (40MHz)	13.5/15 (MCS0)	-1.61	11.0	-12.61
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.10	11.0	-14.10
Band 2C	5500	100	a	6	5.03	11.0	-5.97
	5580	116	a	6	2.57	11.0	-8.43
	5700	140	a	6	2.16	11.0	-8.84
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	4.80	11.0	-6.20
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	2.56	11.0	-8.44
	5700	140	n (20MHz)	6.5/7.2 (MCS0)	1.95	11.0	-9.05
	5510	102	n (40MHz)	13.5/15 (MCS0)	-1.16	11.0	-12.16
	5550	110	n (40MHz)	13.5/15 (MCS0)	-4.43	11.0	-15.43
	5670	134	n (40MHz)	13.5/15 (MCS0)	-4.72	11.0	-15.72
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-3.14	11.0	-14.14

Table 7-7. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density	Margin [dB]
Band 1	5180	36	a	6	4.86	2.00	6.86	10.0	-3.14
	5200	40	a	6	4.86	2.00	6.86	10.0	-3.14
	5240	48	a	6	5.11	2.00	7.11	10.0	-2.89
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	4.70	2.00	6.70	10.0	-3.30
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	4.71	2.00	6.71	10.0	-3.29
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	4.79	2.00	6.79	10.0	-3.21
	5190	38	n (40MHz)	13.5/15 (MCS0)	-1.86	2.00	0.14	10.0	-9.86
	5230	46	n (40MHz)	13.5/15 (MCS0)	-1.36	2.00	0.64	10.0	-9.36
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.11	2.00	-1.11	10.0	-11.11

Table 7-8. Band 1 e.i.r.p. Conducted Power Spectral Density Measurements (ISED)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 39 of 93



Plot 7-38. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

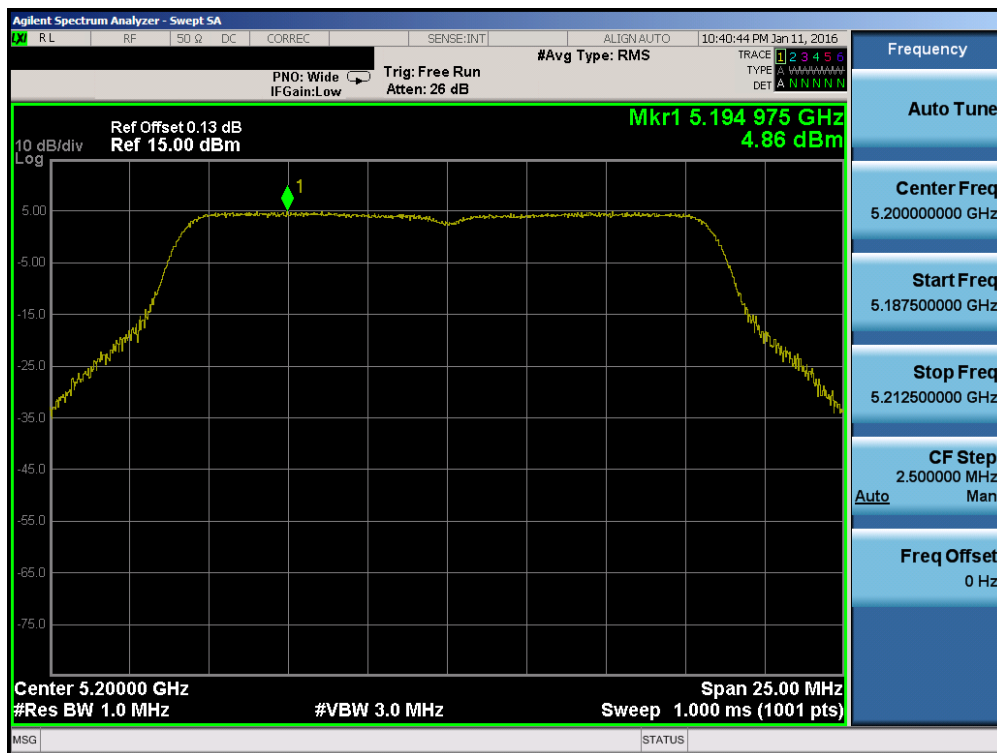


Plot 7-39. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 40 of 93






Plot 7-40. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

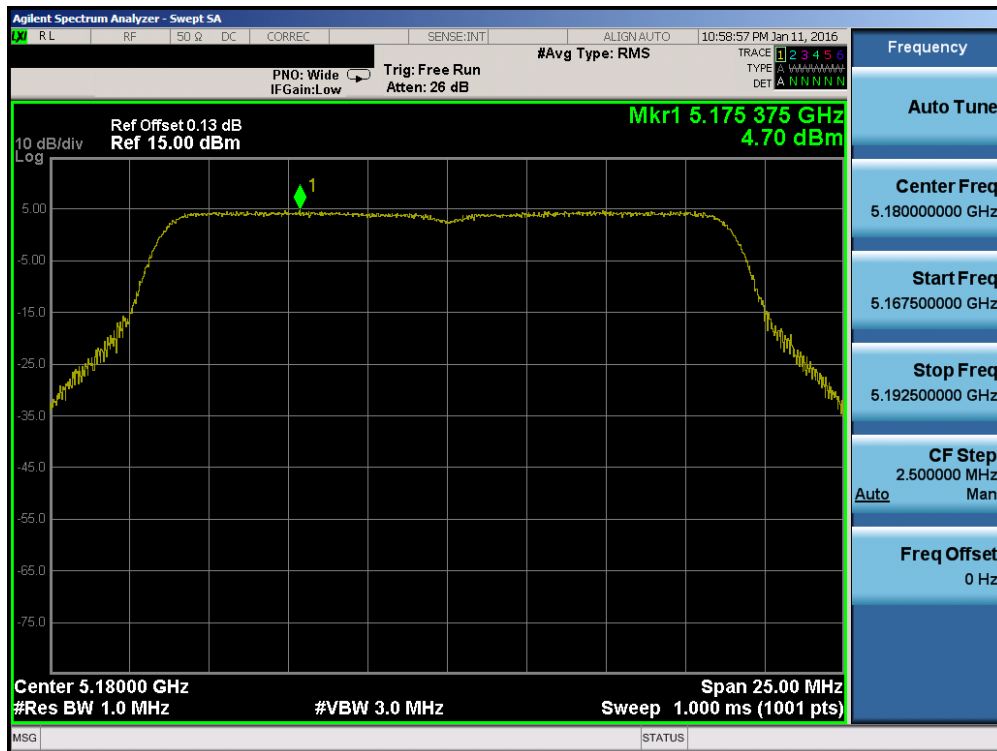


Plot 7-41. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 41 of 93

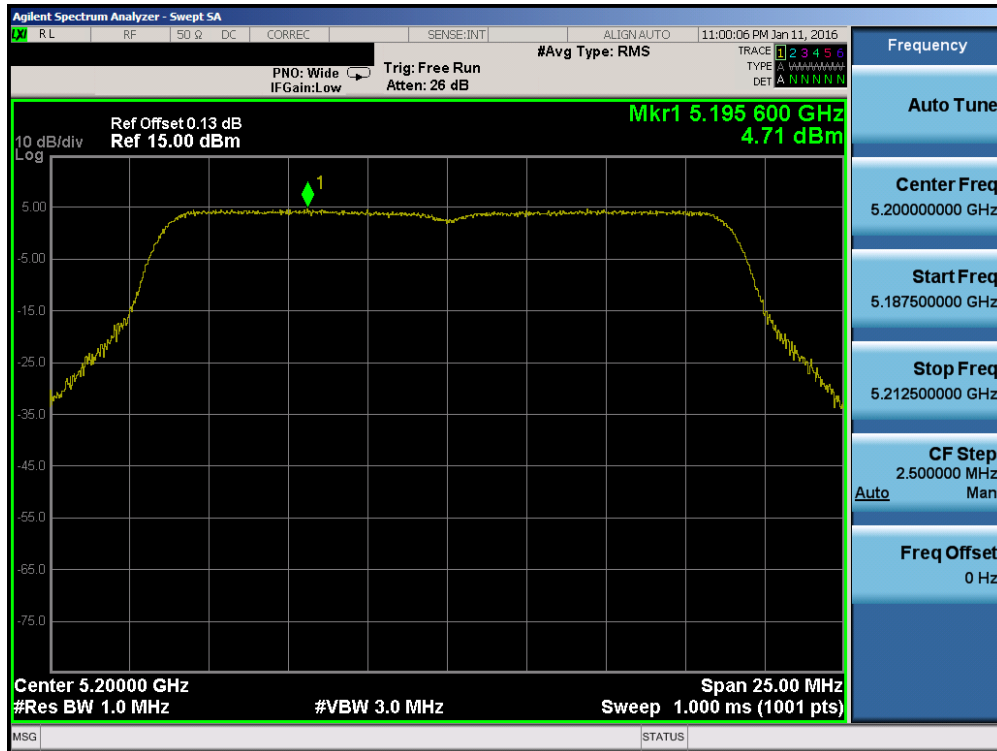

Plot 7-42. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

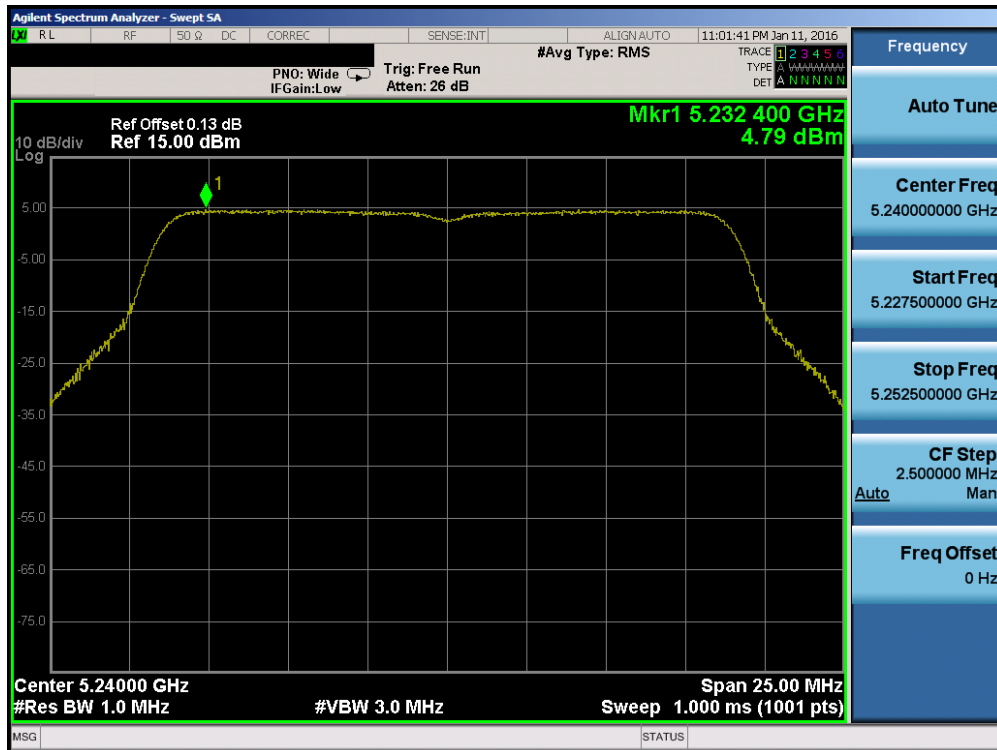


Plot 7-43. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)


FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 42 of 93





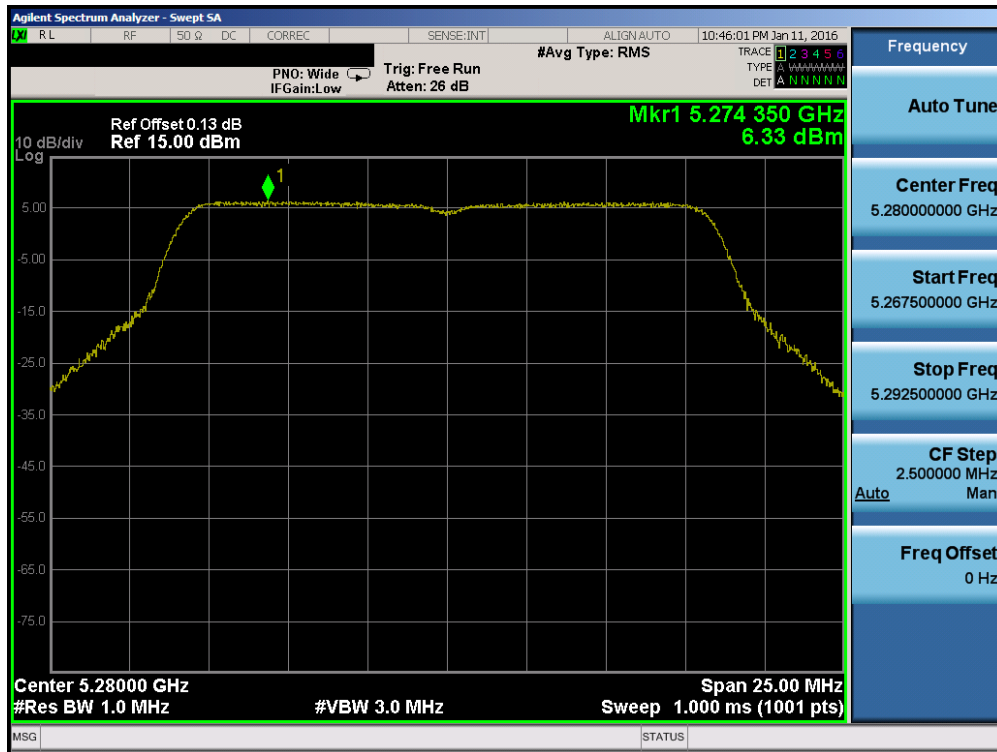


Plot 7-48. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

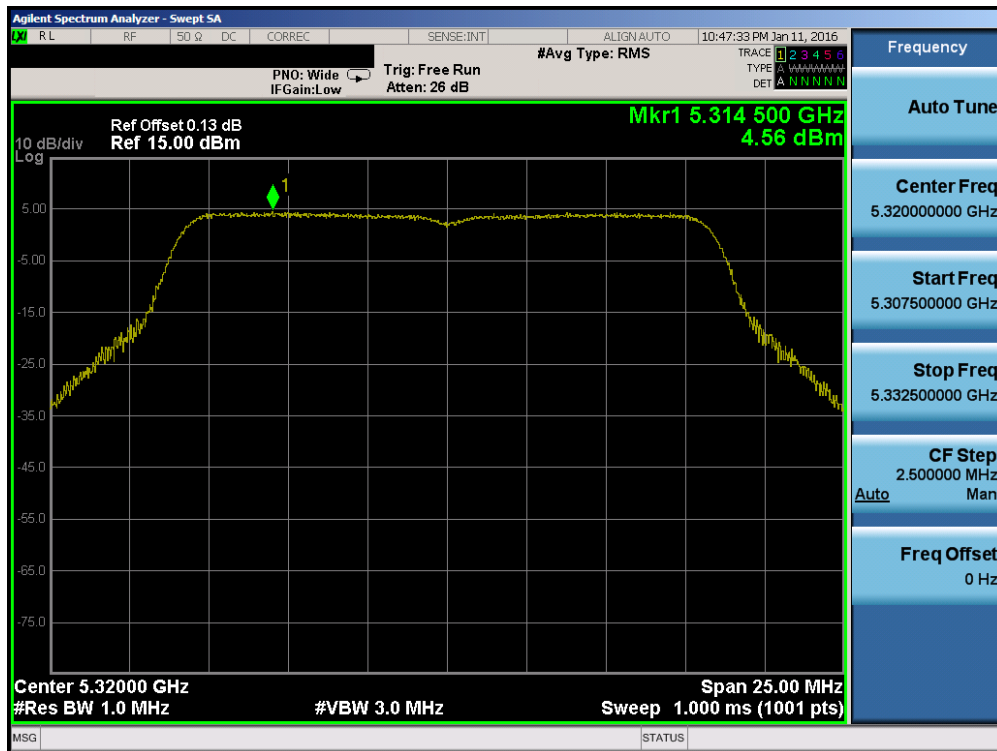


Plot 7-49. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 45 of 93

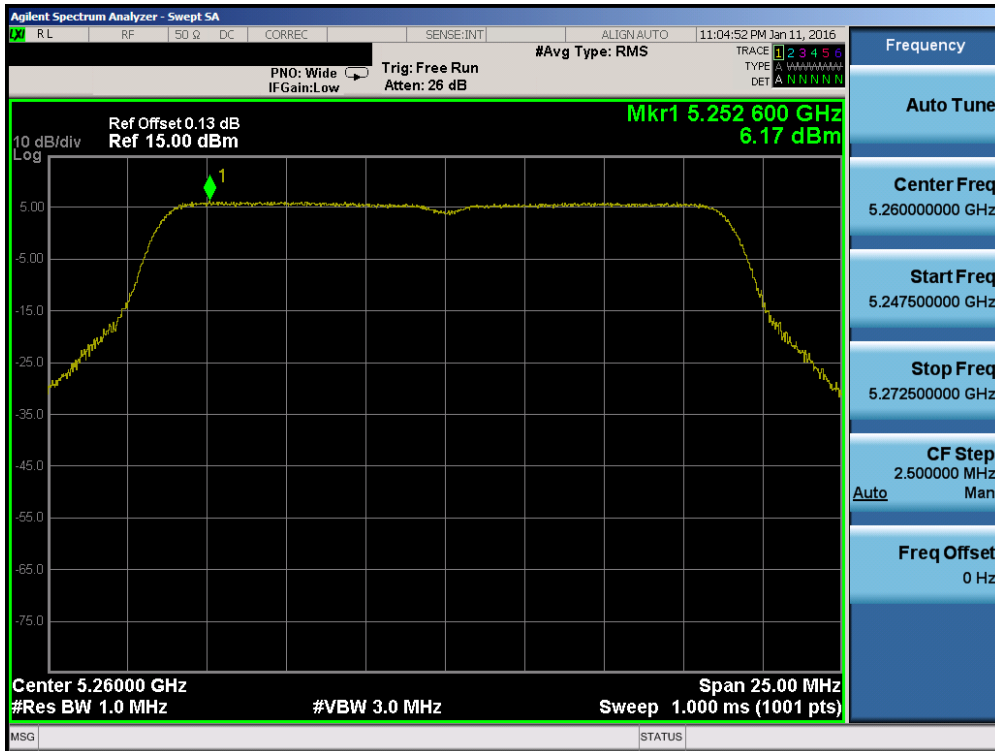


Plot 7-50. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

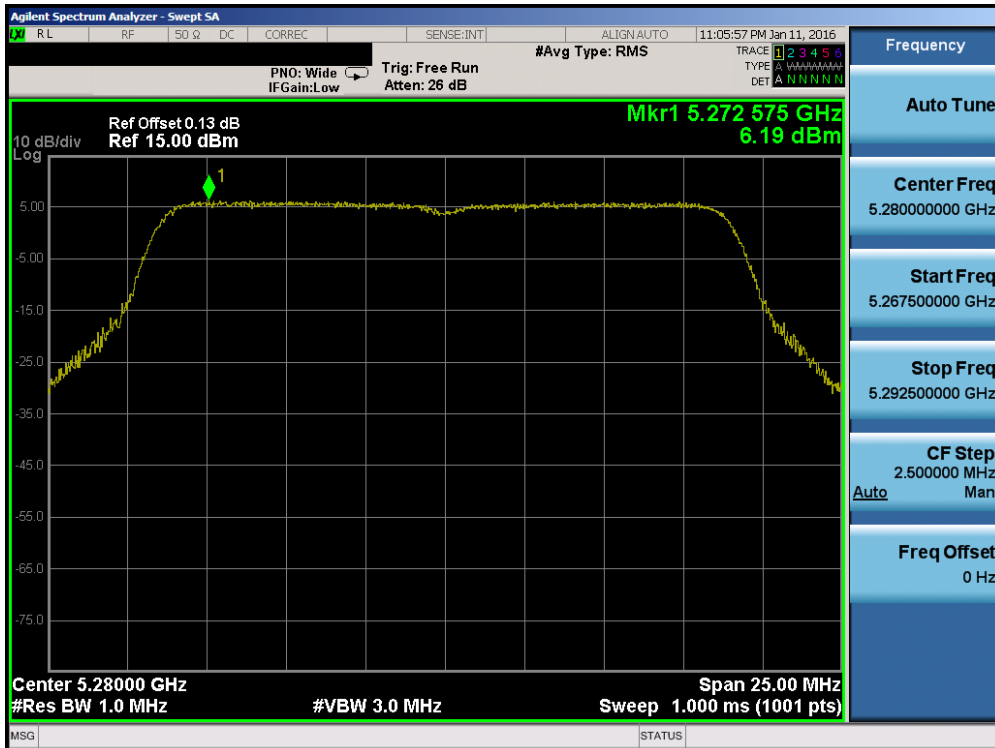


Plot 7-51. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 46 of 93

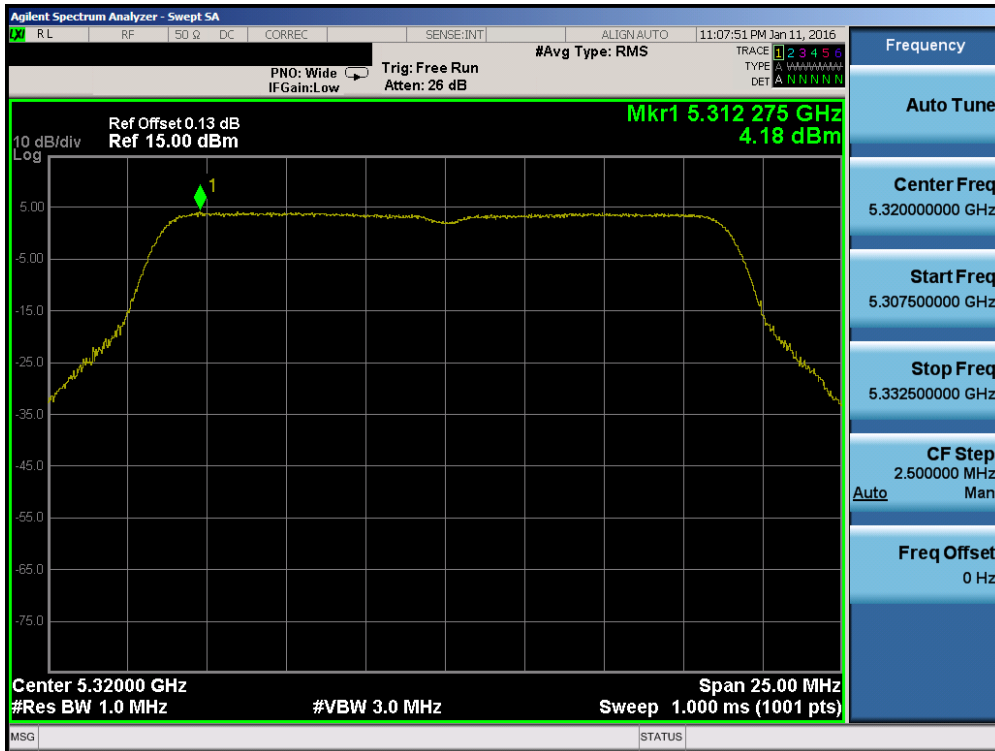


Plot 7-52. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

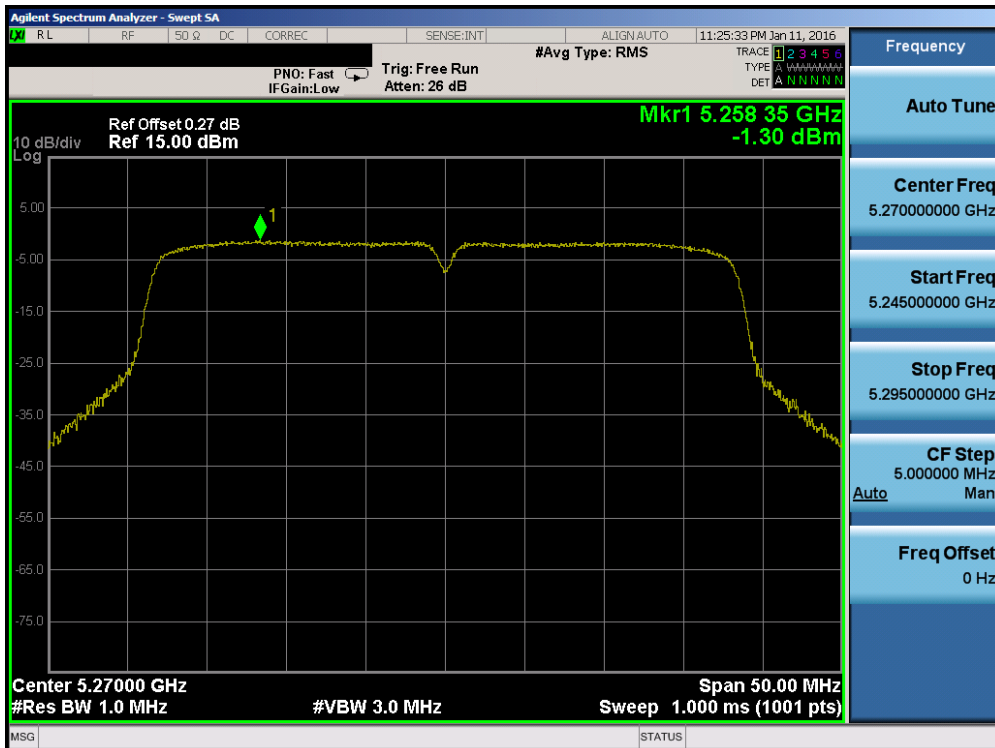


Plot 7-53. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 47 of 93



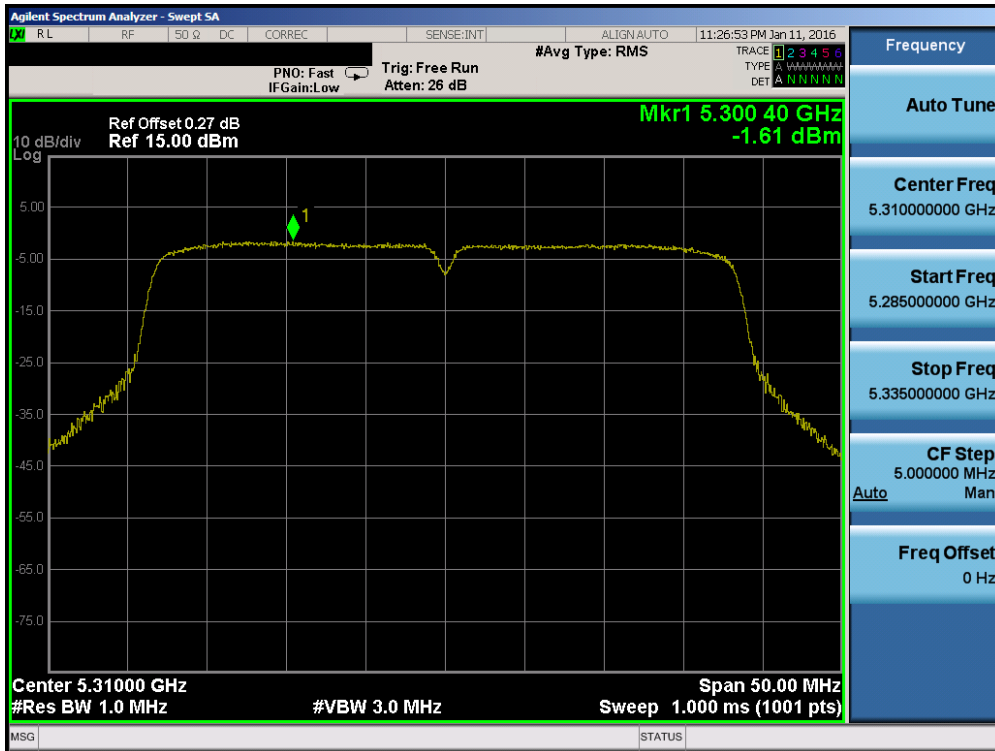

Plot 7-54. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

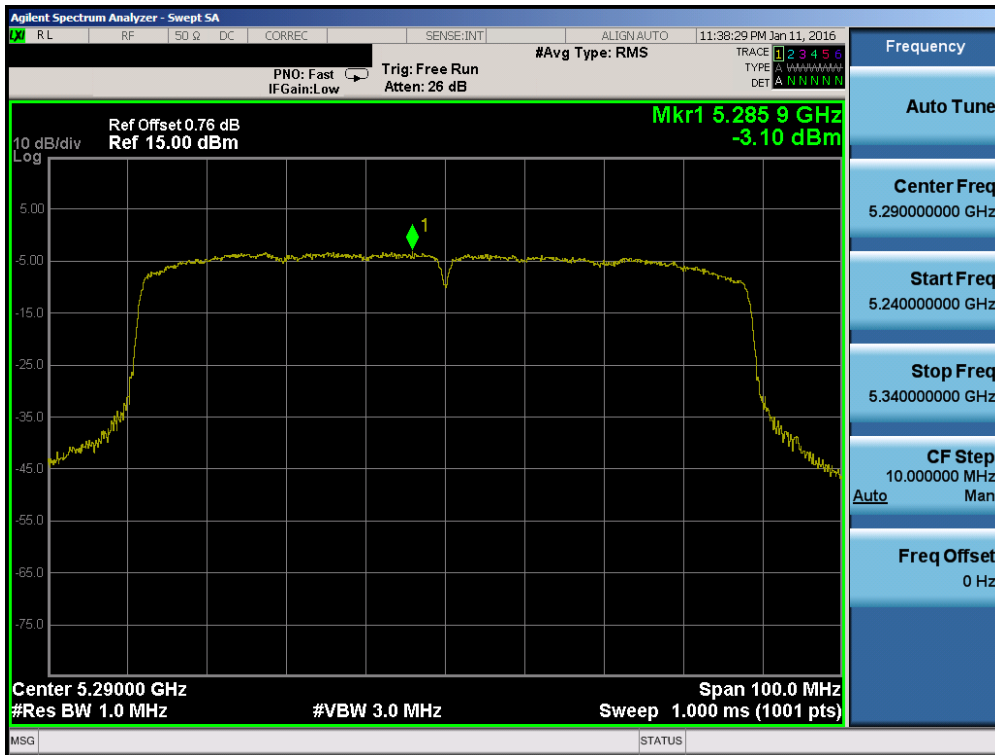


Plot 7-55. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 48 of 93






Plot 7-56. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

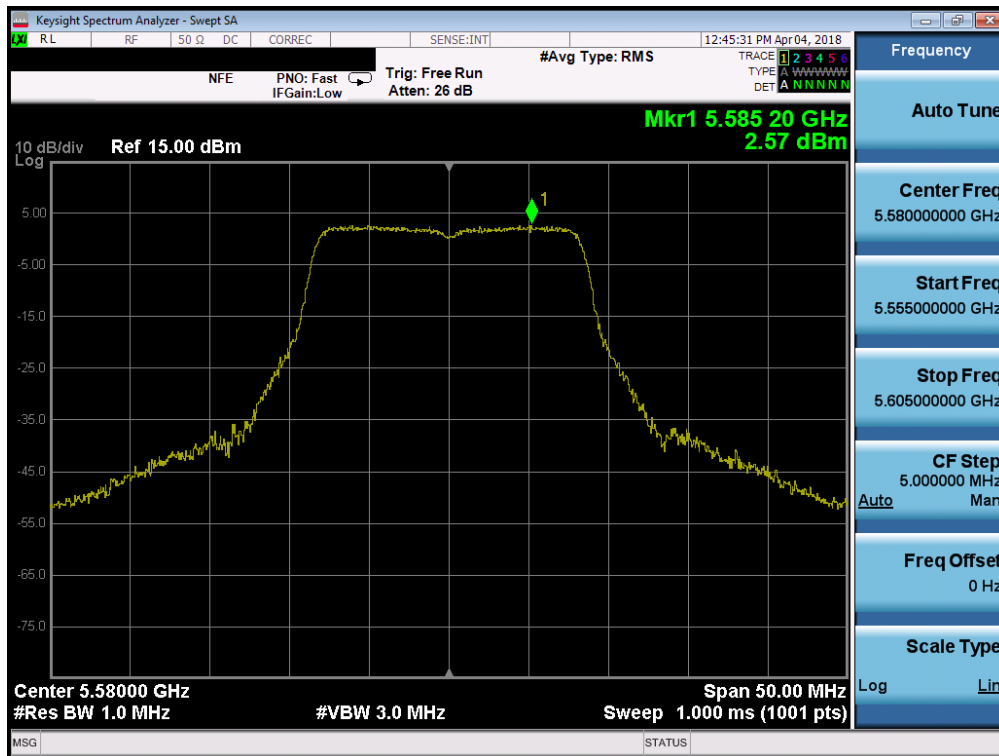


Plot 7-57. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 49 of 93

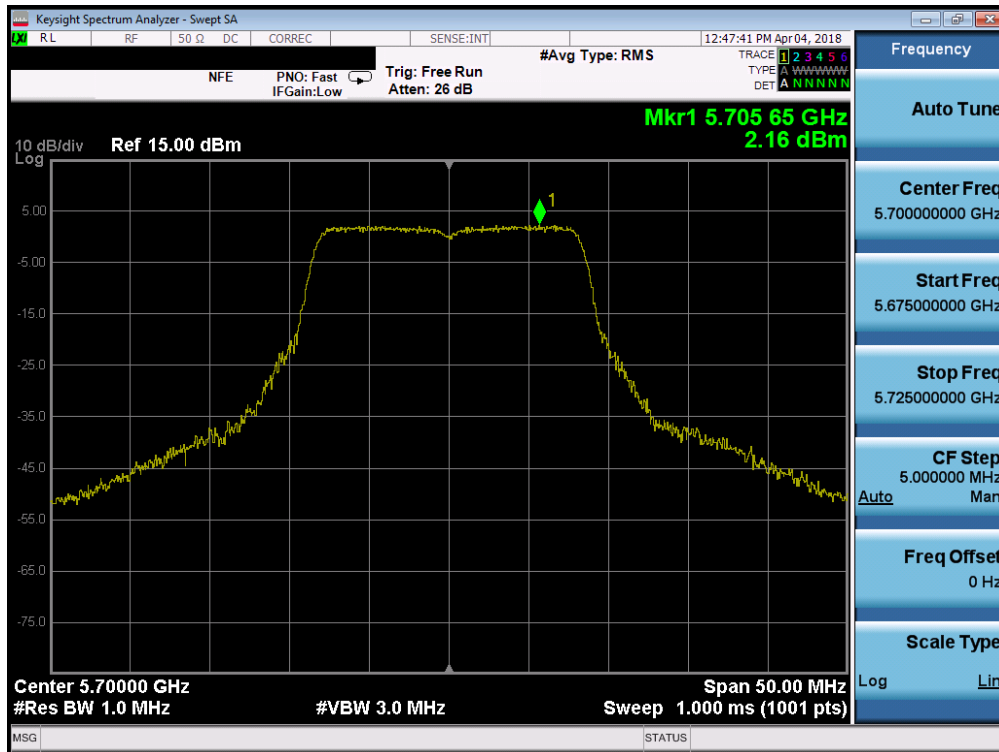


Plot 7-58. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 140)

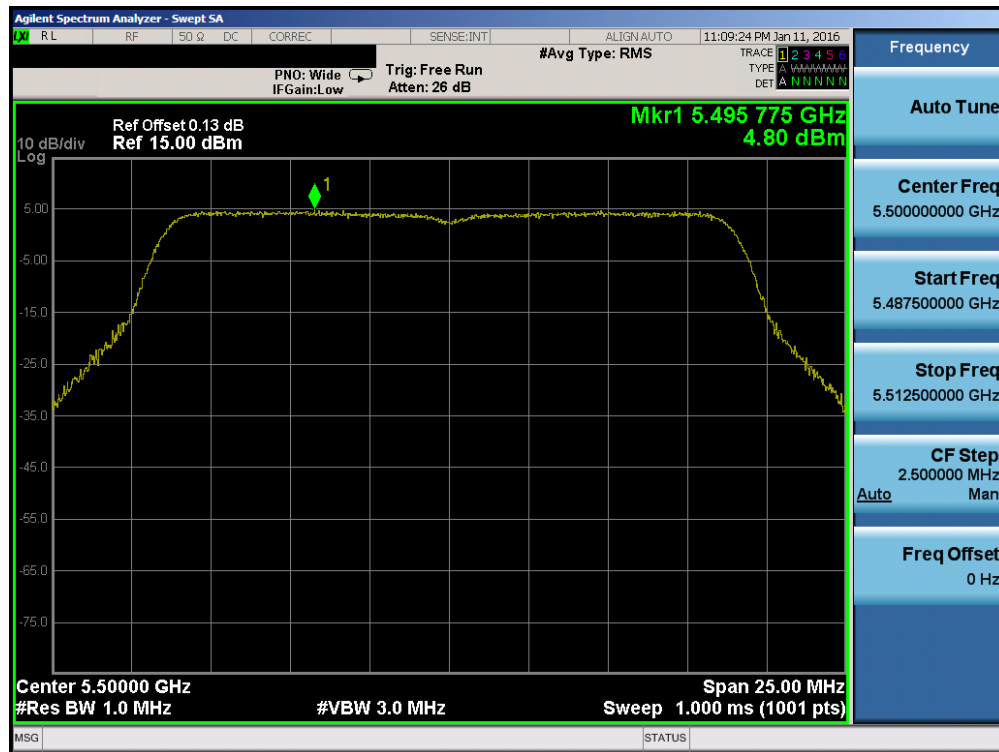


Plot 7-59. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 50 of 93

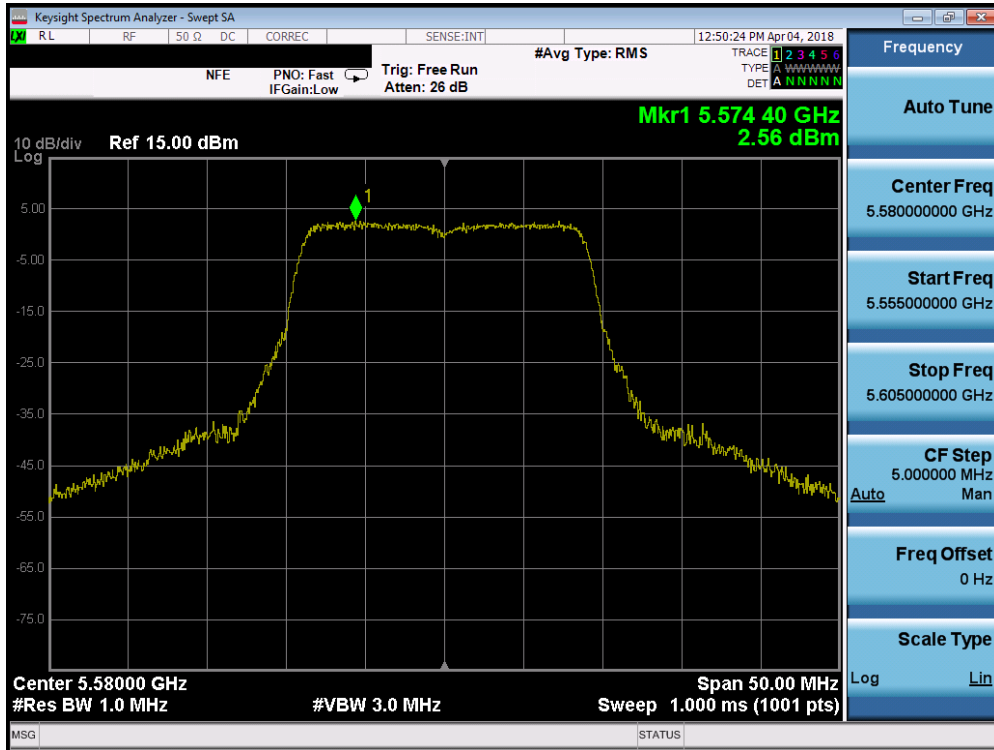


Plot 7-60. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

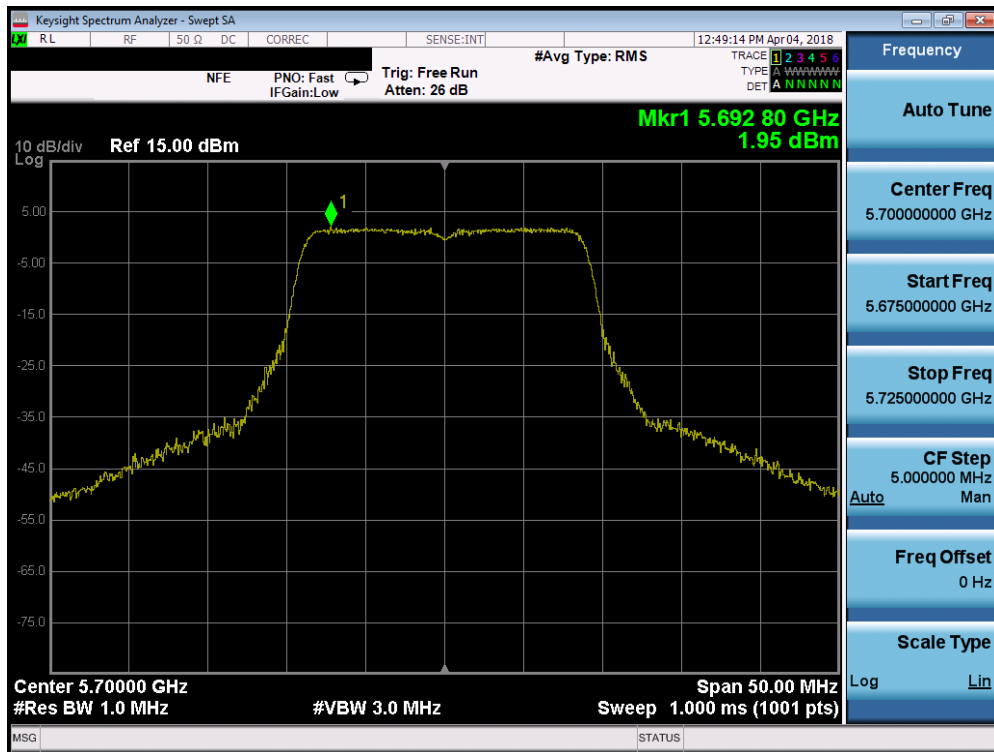


Plot 7-61. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 140)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 51 of 93

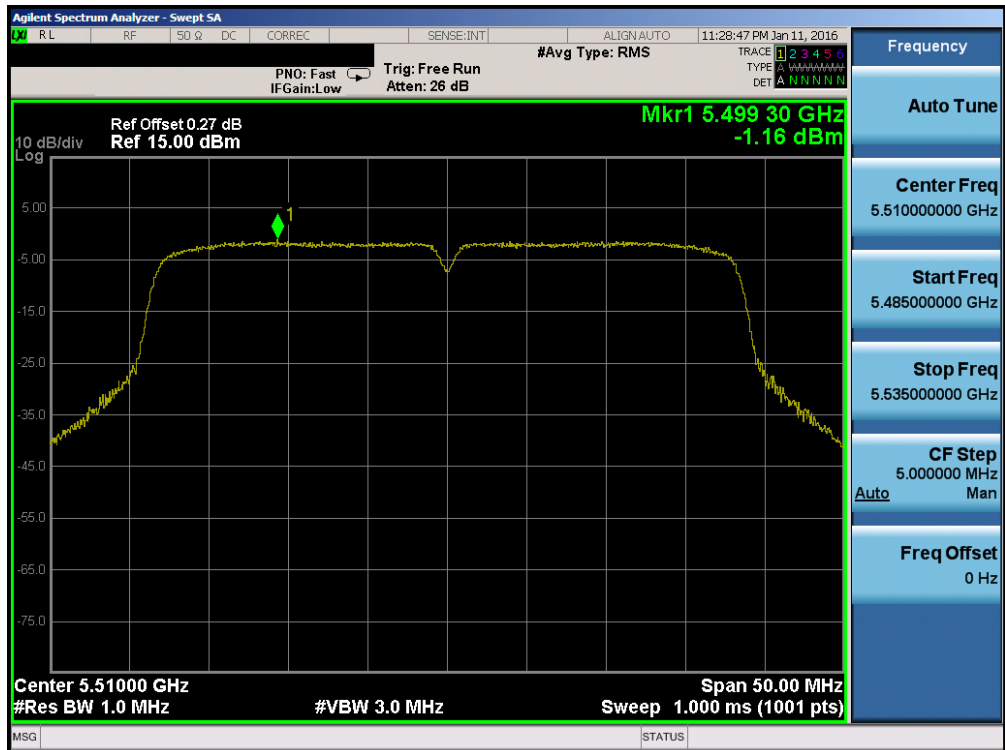


Plot 7-62. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

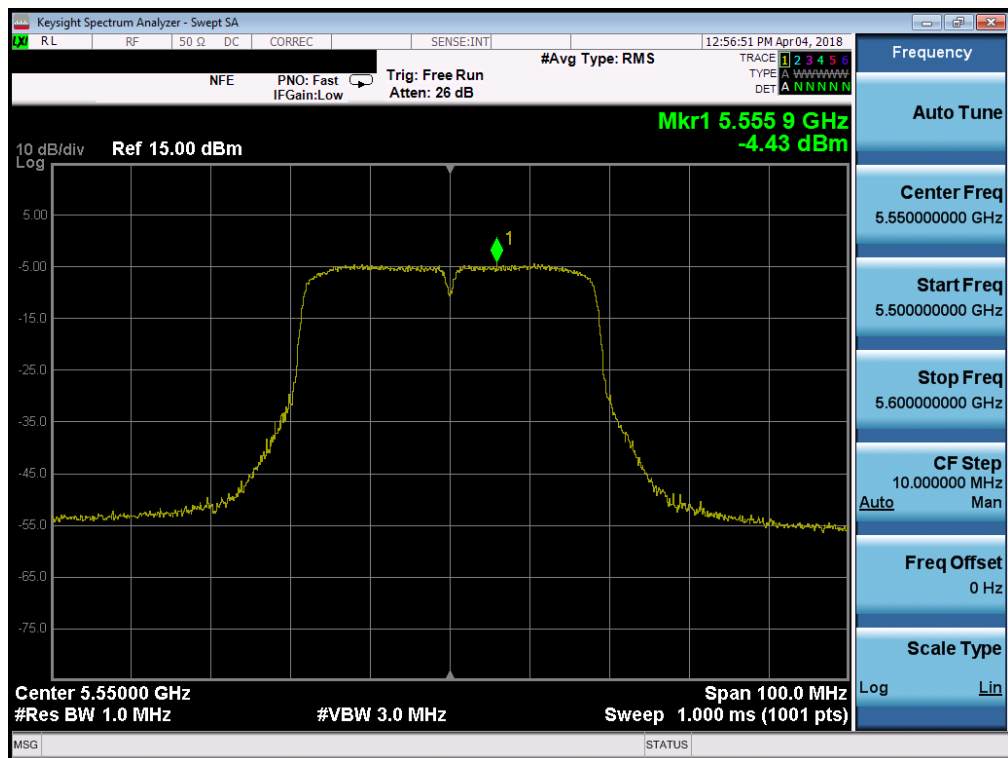

Plot 7-63. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: ACJFZN1C	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 52 of 93

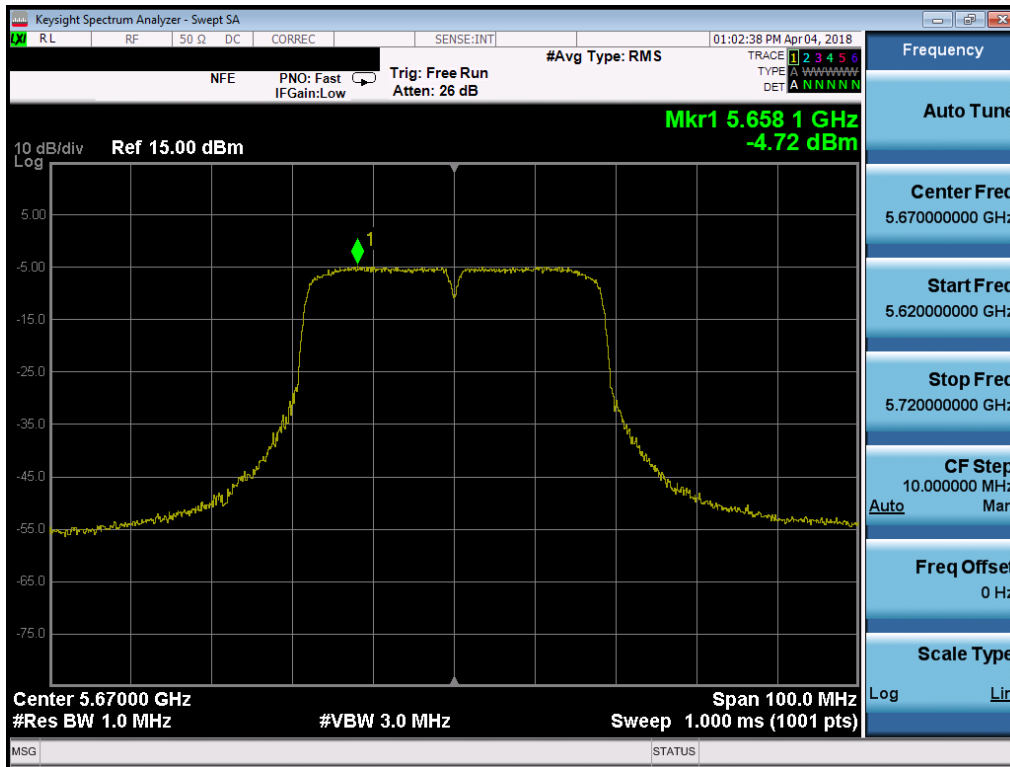

Plot 7-64. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)



Plot 7-65. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 53 of 93

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
<b>Band 3</b>	5745	149	a	6	3.82	30.0	-26.18	Pass
	5785	157	a	6	3.34	30.0	-26.66	Pass
	5825	165	a	6	3.18	30.0	-26.82	Pass
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	3.66	30.0	-26.34	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	3.02	30.0	-26.98	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	2.77	30.0	-27.23	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-4.30	30.0	-34.30	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-4.11	30.0	-34.11	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-5.77	30.0	-35.77	Pass

**Table 7-9. Band 3 Conducted Power Spectral Density Measurements**




**Plot 7-66. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 54 of 93




Plot 7-67. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

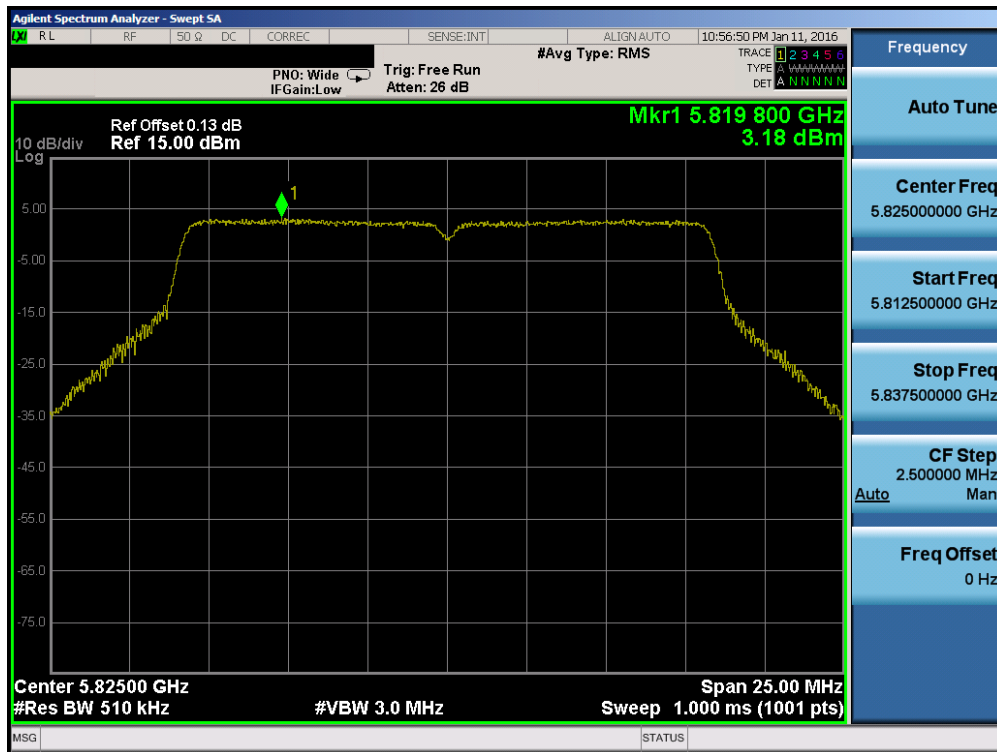

Plot 7-68. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 55 of 93



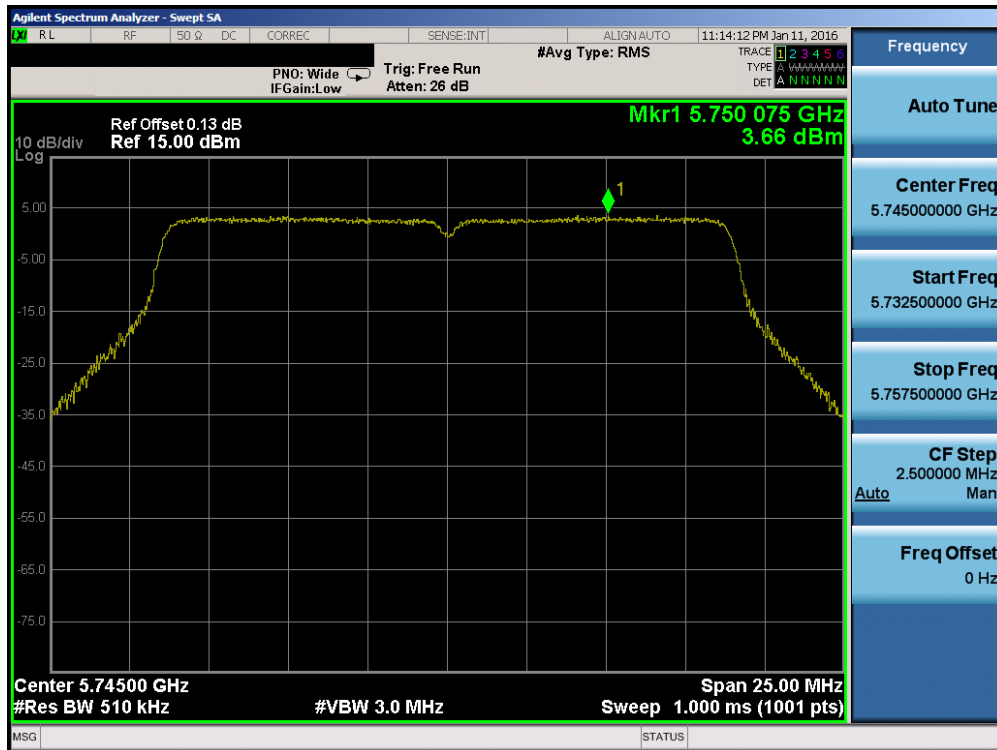

Plot 7-69. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)




Plot 7-70. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 56 of 93






Plot 7-71. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

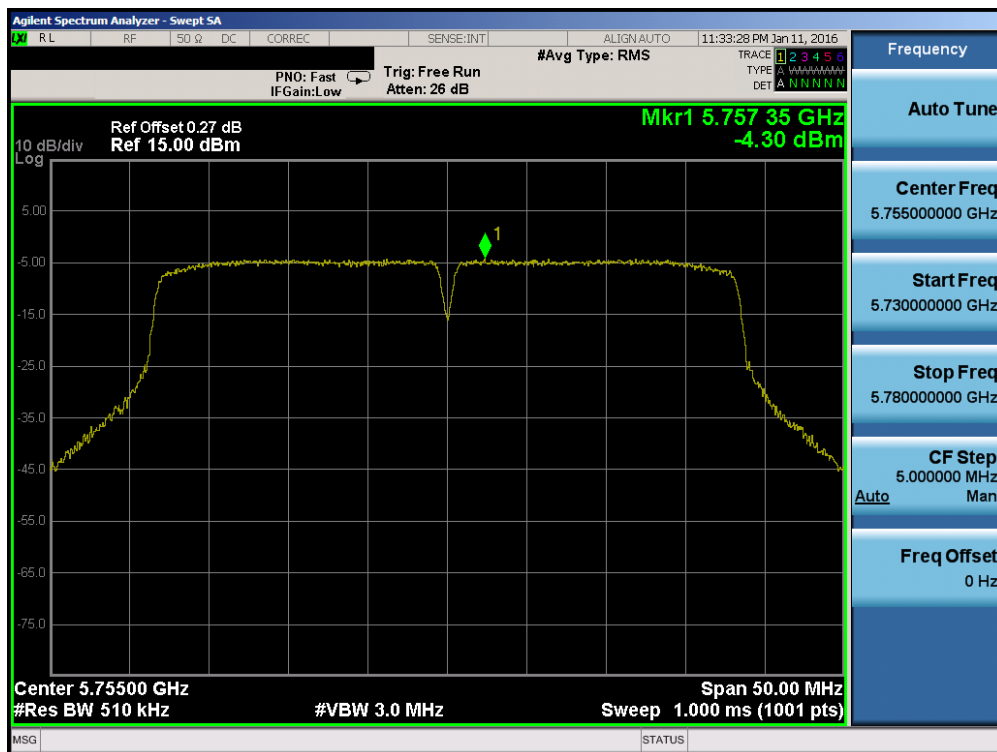


Plot 7-72. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 57 of 93

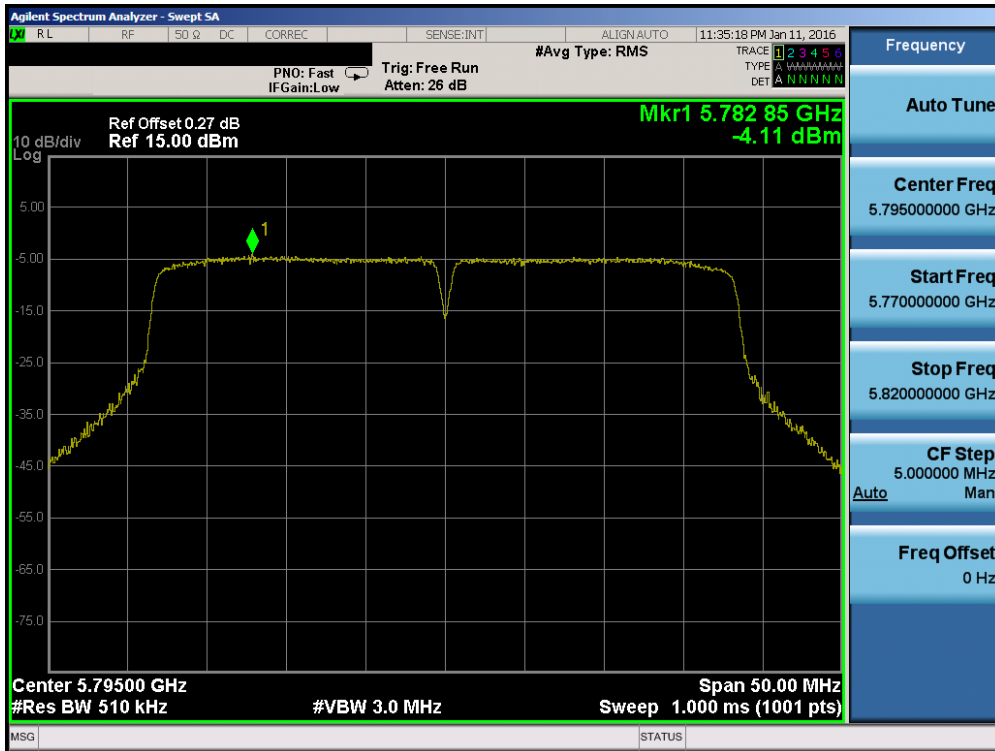

Plot 7-73. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

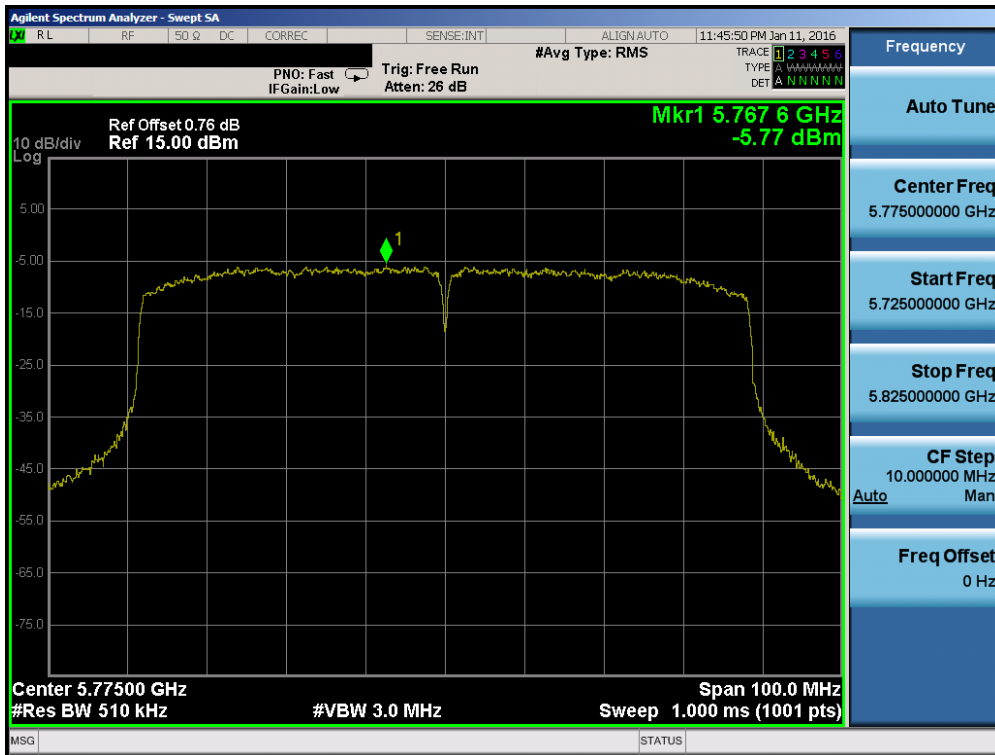

Plot 7-74. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 58 of 93

## 7.6 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.**

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-10 per Section 15.209 and RSS-Gen (8.9).**

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-10. Radiated Limits

### Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5  
KDB 789033 D02 v02r01 – Section G

### Test Settings

#### Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 59 of 93

### Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

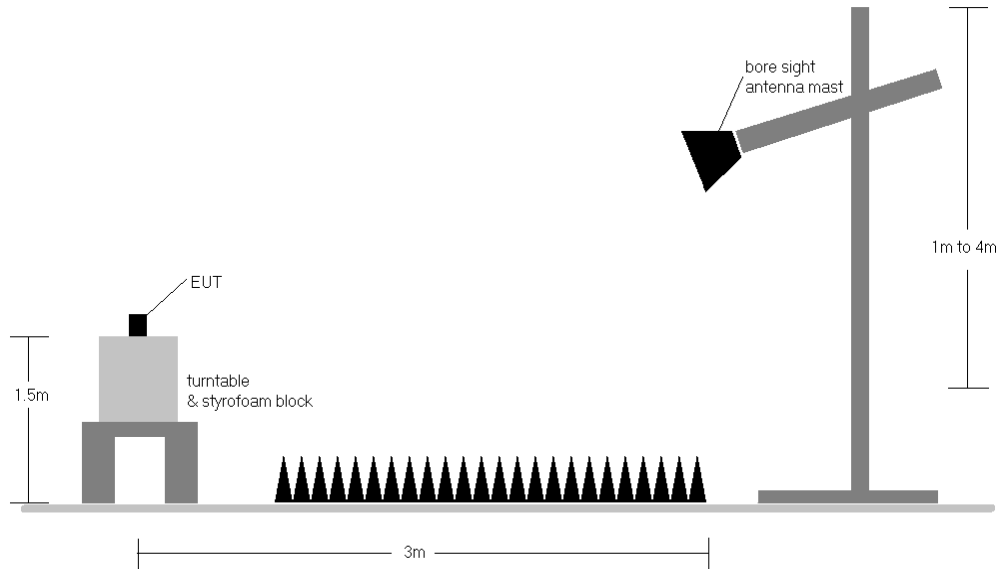

**Figure 7-5. Test Instrument & Measurement Setup**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 60 of 93

**Test Notes**

1. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-10.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-10. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBµV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBµV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

**Sample Calculations**

**Determining Spurious Emissions Levels**

- Field Strength Level  $_{[dB_{\mu V/m}]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB_{\mu V/m}]} - \text{Limit }_{[dB_{\mu V/m}]}$


**Radiated Band Edge Measurement Offset**

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6 was calculated using the formula:  


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 61 of 93

### 7.7.1 Radiated Spurious Emission Measurements

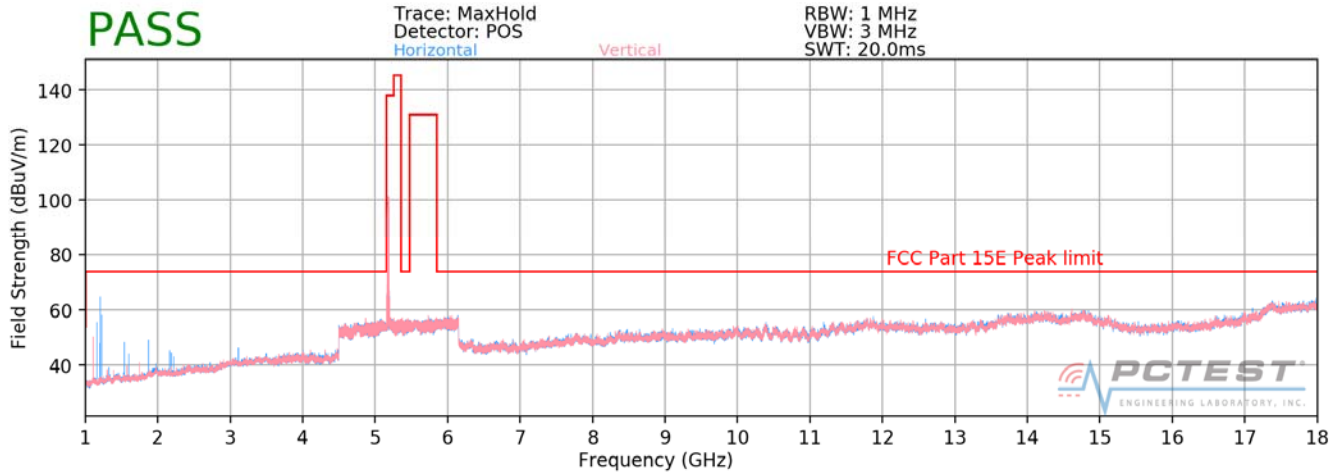


Plot 7-75. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40)

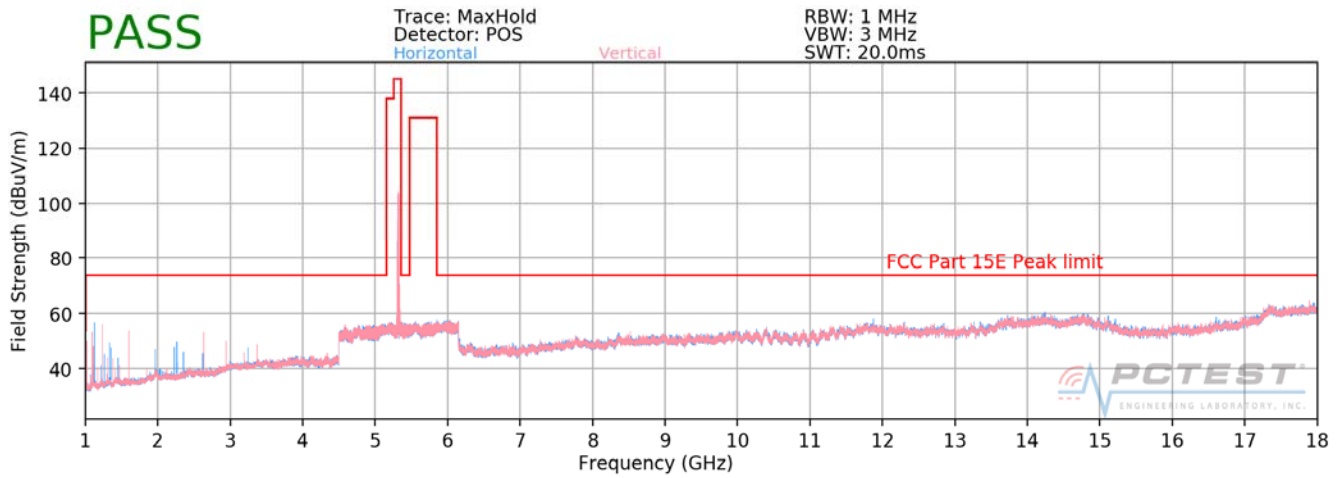


Plot 7-76. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 64)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 62 of 93

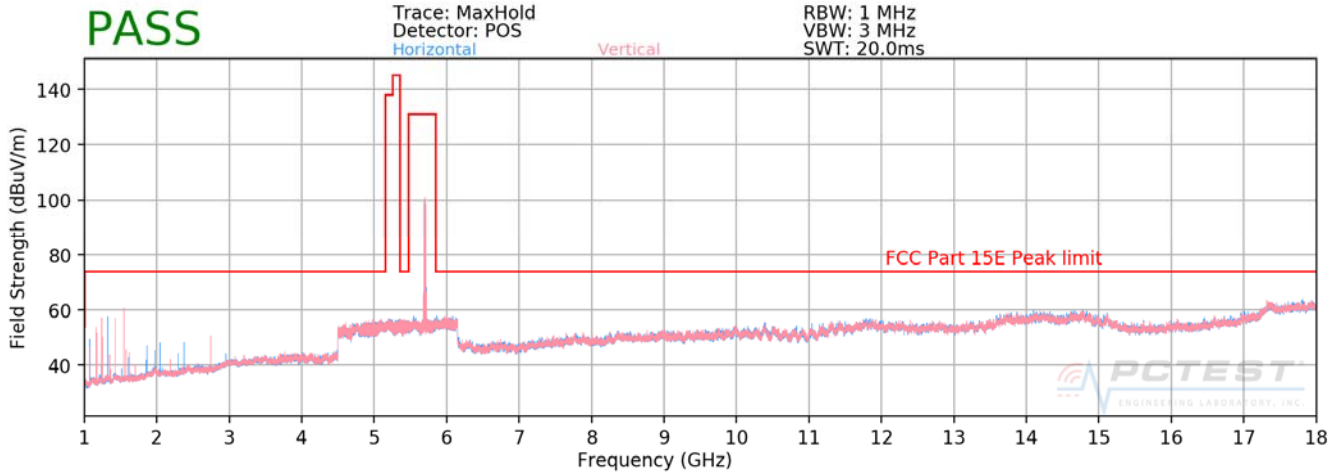


**Plot 7-77. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 140)**

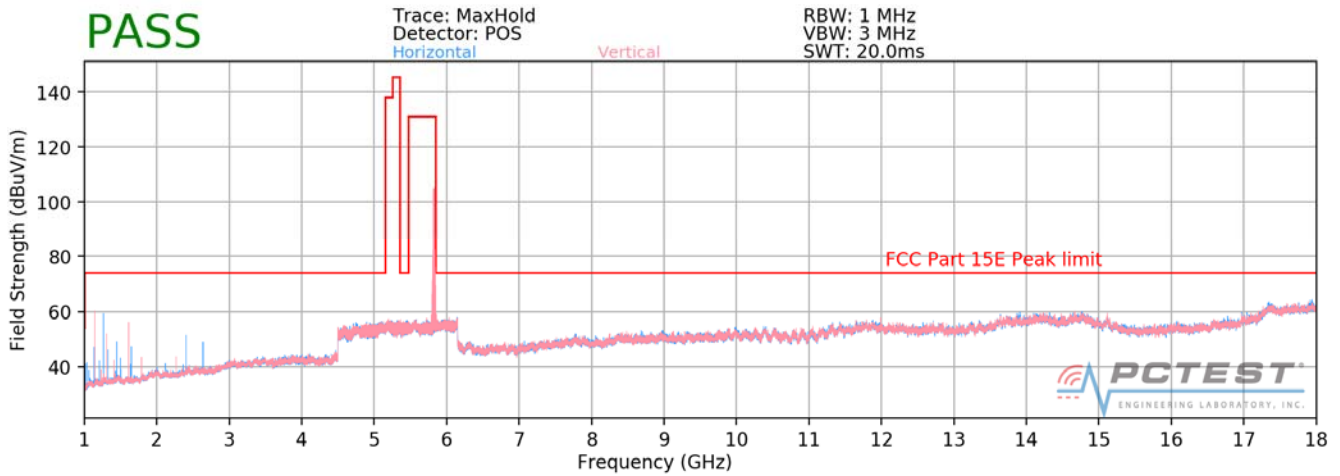


**Plot 7-78. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 165)**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 63 of 93

### Radiated Spurious Emissions Measurements (Above 18GHz)

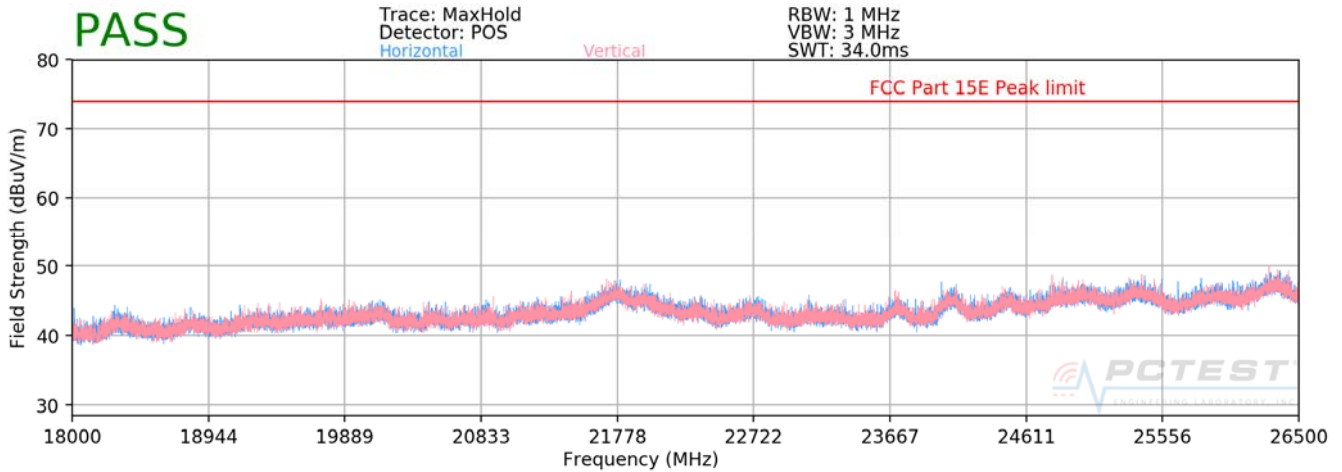

Plot 7-79. Radiated Spurious Plot 18GHz - 26.5GHz (802.11a)

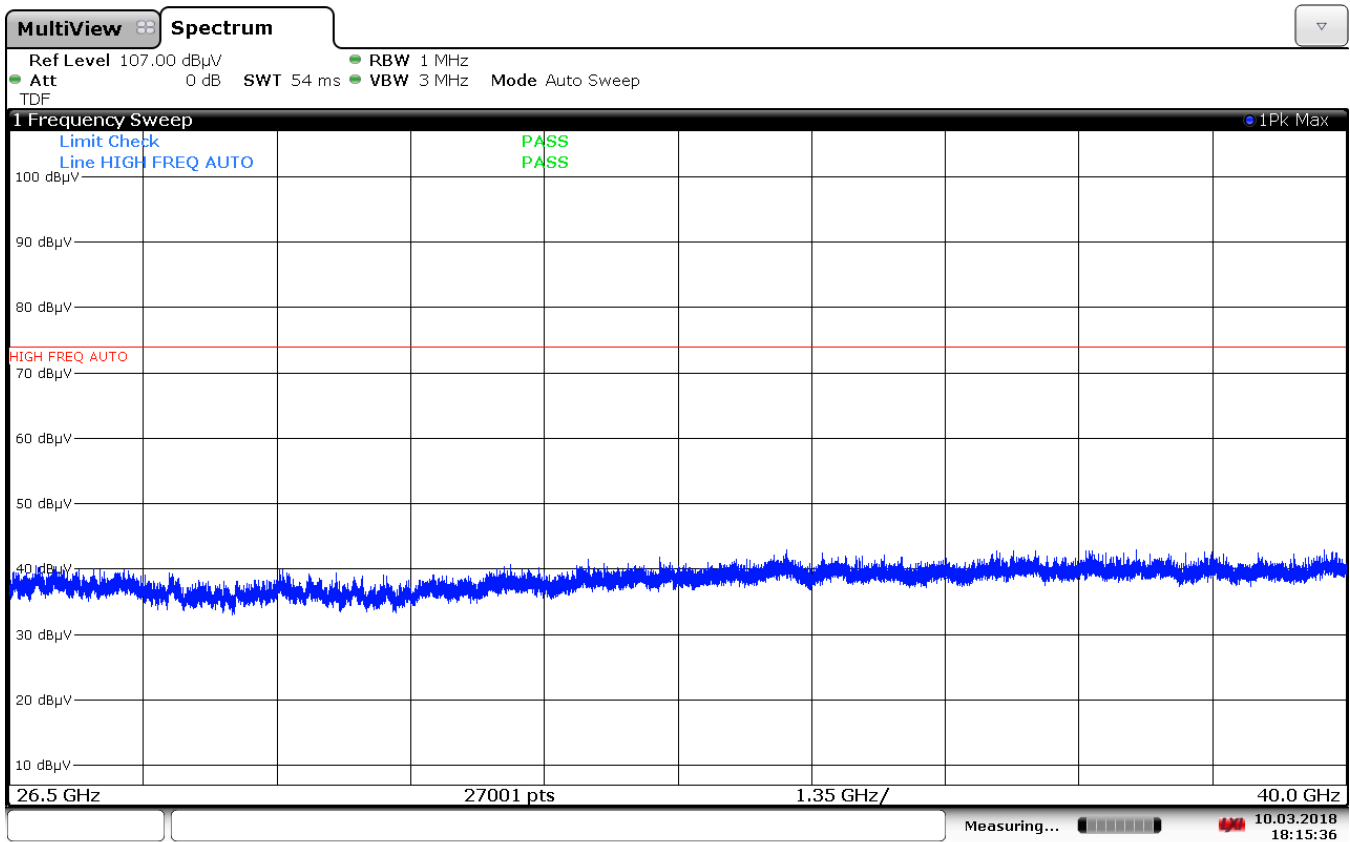


18:15:37 10.03.2018

Plot 7-80. Radiated Spurious Plot 26.5GHz - 40GHz (802.11a) (H)

FCC ID: ACJFZN1C	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 64 of 93



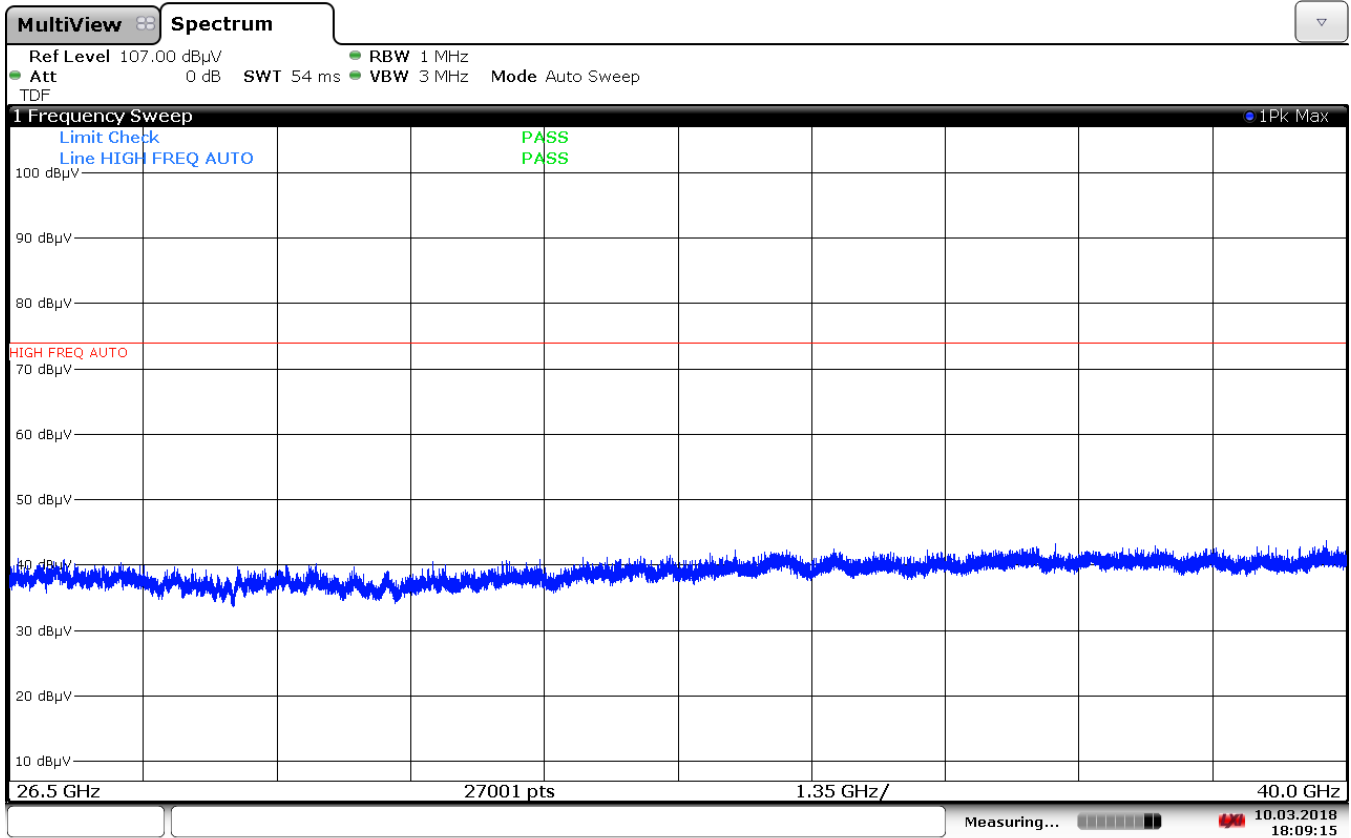

18:09:15 10.03.2018

**Plot 7-81. Radiated Spurious Plot 26.5GHz - 40GHz (802.11a) (V)**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 65 of 93

## Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	V	111	44	-66.39	13.94	0.00	54.55	68.20	-13.65
* 15540.00	Average	V	-	-	-83.67	15.04	0.00	38.37	53.98	-15.61
* 15540.00	Peak	V	-	-	-71.90	15.04	0.00	50.14	73.98	-23.84
* 20720.00	Average	V	100	280	-75.44	-1.60	-9.54	20.41	53.98	-33.57
* 20720.00	Peak	V	100	280	-65.96	-1.60	-9.54	29.89	73.98	-44.09
25900.00	Peak	V	-	-	-63.77	-1.08	-9.54	32.61	68.20	-35.59

Table 7-11. Radiated Measurements

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	V	110	212	-67.25	15.29	0.00	55.04	68.20	-13.16
* 15600.00	Average	V	-	-	-83.62	14.89	0.00	38.27	53.98	-15.71
* 15600.00	Peak	V	-	-	-71.49	14.89	0.00	50.40	73.98	-23.58
* 20800.00	Average	V	100	273	-75.35	-1.59	-9.54	20.52	53.98	-33.46
* 20800.00	Peak	V	100	273	-66.18	-1.59	-9.54	29.69	73.98	-44.29
26000.00	Peak	V	-	-	-64.43	-0.94	-9.54	32.09	68.20	-36.11

Table 7-12. Radiated Measurements

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset			Page 66 of 93

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	111	206	-68.17	12.59	0.00	51.42	68.20	-16.78
* 15720.00	Average	V	-	-	-83.57	15.58	0.00	39.01	53.98	-14.97
* 15720.00	Peak	V	-	-	-71.93	15.58	0.00	50.65	73.98	-23.33
* 20960.00	Average	V	100	280	-75.71	-1.63	-9.54	20.12	53.98	-33.86
* 20960.00	Peak	V	100	280	-66.31	-1.63	-9.54	29.52	73.98	-44.46
26200.00	Peak	V	-	-	-64.17	-0.92	-9.54	32.36	68.20	-35.84

**Table 7-13. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	109	196	-67.88	15.29	0.00	54.41	68.20	-13.79
* 15600.00	Average	V	-	-	-84.21	14.89	0.00	37.68	53.98	-16.30
* 15600.00	Peak	V	-	-	-71.55	14.89	0.00	50.34	73.98	-23.64
* 20800.00	Average	V	100	290	-74.67	-1.59	-9.54	21.20	53.98	-32.78
* 20800.00	Peak	V	100	290	-65.70	-1.59	-9.54	30.17	73.98	-43.81
26000.00	Peak	V	-	-	-64.91	-0.94	-9.54	31.61	68.20	-36.59

**Table 7-14. Radiated Measurements with Rugged USB Dock**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset			Page 67 of 93

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	110	208	-68.01	14.63	0.00	53.62	68.20	-14.58
* 15780.00	Average	V	-	-	-84.14	14.95	0.00	37.81	53.98	-16.17
* 15780.00	Peak	V	-	-	-72.10	14.95	0.00	49.85	73.98	-24.13
* 21040.00	Average	V	100	310	-74.94	-1.62	-9.54	20.90	53.98	-33.08
* 21040.00	Peak	V	100	310	-65.76	-1.62	-9.54	30.08	73.98	-43.90
26300.00	Peak	V	-	-	-64.23	-0.81	-9.54	32.41	68.20	-35.79

**Table 7-15. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	109	208	-67.98	13.65	0.00	52.67	68.20	-15.53
* 15840.00	Average	V	-	-	-83.31	15.26	0.00	38.95	53.98	-15.03
* 15840.00	Peak	V	-	-	-71.75	15.26	0.00	50.51	73.98	-23.47
* 21120.00	Average	V	100	280	-75.41	-1.58	-9.54	20.47	53.98	-33.51
* 21120.00	Peak	V	100	280	-66.56	-1.58	-9.54	29.32	73.98	-44.66
26400.00	Peak	V	-	-	-64.42	-0.60	-9.54	32.43	68.20	-35.77

**Table 7-16. Radiated Measurements**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 68 of 93	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 10640.00	Average	V	109	257	-73.22	13.23	0.00	47.01	53.98	-6.97
* 10640.00	Peak	V	109	257	-66.88	13.23	0.00	53.35	73.98	-20.63
* 15960.00	Average	V	-	-	-85.20	16.32	0.00	38.12	53.98	-15.86
* 15960.00	Peak	V	-	-	-72.34	16.32	0.00	50.98	73.98	-23.00
* 21280.00	Average	V	100	239	-75.21	-1.50	-9.54	20.74	53.98	-33.24
* 21280.00	Peak	V	100	239	-65.18	-1.50	-9.54	30.77	73.98	-43.21
26600.00	Peak	V	-	-	-48.96	-17.85	-9.54	30.65	68.20	-37.55

**Table 7-17. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 10640.00	Average	V	109	198	-75.35	13.23	0.00	44.88	53.98	-9.10
* 10640.00	Peak	V	109	198	-68.11	13.23	0.00	52.12	73.98	-21.86
* 15960.00	Average	V	-	-	-84.05	16.32	0.00	39.27	53.98	-14.71
* 15960.00	Peak	V	-	-	-72.16	16.32	0.00	51.16	73.98	-22.82
* 21280.00	Average	V	100	242	-73.95	-1.50	-9.54	22.00	53.98	-31.98
* 21280.00	Peak	V	100	242	-65.40	-1.50	-9.54	30.55	73.98	-43.43
26600.00	Peak	V	-	-	-49.20	-17.85	-9.54	30.41	68.20	-37.79

**Table 7-18. Radiated Measurements with Rugged USB Dock**

FCC ID: ACJFZN1C	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset	Page 69 of 93	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	109	188	-73.16	13.26	0.00	47.10	53.98	-6.87
* 11000.00	Peak	V	109	188	-66.45	13.26	0.00	53.81	73.98	-20.16
16500.00	Peak	V	-	-	-71.49	16.37	0.00	51.88	68.20	-16.32
22000.00	Peak	V	100	261	-64.97	-1.12	-9.54	31.37	68.20	-36.83
27500.00	Peak	V	-	-	-49.27	-18.34	-9.54	29.85	68.20	-38.35

**Table 7-19. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5580MHz  
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	V	110	188	-71.61	14.30	0.00	49.69	53.98	-4.29
* 11160.00	Peak	V	110	188	-66.51	14.30	0.00	54.79	73.98	-19.19
16740.00	Peak	V	-	-	-71.85	17.77	0.00	52.92	68.20	-15.28
* 22320.00	Average	V	100	262	-75.93	-1.43	-9.54	20.10	53.98	-33.88
* 22320.00	Peak	V	100	262	-66.65	-1.43	-9.54	29.38	73.98	-44.60
27900.00	Peak	V	-	-	-49.55	-18.80	-9.54	29.11	68.20	-39.09

**Table 7-20. Radiated Measurements**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 70 of 93

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5700MHz  
 Channel: 140

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11400.00	Average	V	110	194	-70.49	15.32	0.00	51.83	53.98	-2.15
* 11400.00	Peak	V	110	194	-65.58	15.32	0.00	56.74	73.98	-17.24
17100.00	Peak	V	-	-	-71.52	19.25	0.00	54.73	68.20	-13.47
* 22800.00	Average	V	100	199	-75.42	-1.17	-9.54	20.87	53.98	-33.11
* 22800.00	Peak	V	100	199	-66.21	-1.17	-9.54	30.08	73.98	-43.90
28500.00	Peak	V	-	-	-48.16	-18.49	-9.54	30.80	68.20	-37.40

**Table 7-21. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5700MHz  
 Channel: 140

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11400.00	Average	V	277	8	-73.12	15.32	0.00	49.20	53.98	-4.78
* 11400.00	Peak	V	277	8	-67.15	15.32	0.00	55.17	73.98	-18.81
17100.00	Peak	V	-	-	-71.69	19.25	0.00	54.56	68.20	-13.64
* 22800.00	Average	V	100	208	-74.32	-1.17	-9.54	21.97	53.98	-32.01
* 22800.00	Peak	V	100	208	-65.46	-1.17	-9.54	30.83	73.98	-43.15
28500.00	Peak	V	-	-	-48.78	-18.49	-9.54	30.18	68.20	-38.02

**Table 7-22. Radiated Measurements with Rugged USB Dock**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 71 of 93	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11490.00	Average	V	113	191	-70.38	14.43	0.00	51.05	53.98	-2.93
* 11490.00	Peak	V	113	191	-66.19	14.43	0.00	55.24	73.98	-18.74
17235.00	Peak	V	-	-	-72.77	20.61	0.00	54.84	68.20	-13.36
* 22980.00	Average	V	100	153	-75.03	-1.38	-9.54	21.05	53.98	-32.93
* 22980.00	Peak	V	100	153	-65.23	-1.38	-9.54	30.85	73.98	-43.13
28725.00	Peak	V	-	-	-49.36	-18.78	-9.54	29.32	68.20	-38.88

**Table 7-23. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11570.00	Average	V	110	196	-70.02	15.34	0.00	52.32	53.98	-1.66
* 11570.00	Peak	V	110	196	-65.53	15.34	0.00	56.81	73.98	-17.17
17355.00	Peak	V	-	-	-74.03	23.38	0.00	56.35	68.20	-11.85
23140.00	Peak	V	100	205	-64.61	-1.17	-9.54	31.68	68.20	-36.52
28925.00	Peak	V	-	-	-47.63	-19.19	-9.54	30.63	68.20	-37.57

**Table 7-24. Radiated Measurements**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 72 of 93	



Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11650.00	Average	V	113	190	-69.94	16.67	0.00	53.73	53.98	-0.25
* 11650.00	Peak	V	113	190	-65.41	16.67	0.00	58.26	73.98	-15.72
17475.00	Peak	V	-	-	-71.92	22.23	0.00	57.31	68.20	-10.89
23300.00	Peak	V	100	200	-65.87	-1.05	-9.54	30.54	68.20	-37.66
29125.00	Peak	V	-	-	-49.40	-19.41	-9.54	28.64	68.20	-39.56

**Table 7-25. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11650.00	Average	V	316	196	-73.83	16.67	0.00	49.84	53.98	-4.14
* 11650.00	Peak	V	316	196	-67.28	16.67	0.00	56.39	73.98	-17.59
17475.00	Peak	V	-	-	-72.17	22.23	0.00	57.06	68.20	-11.14
23300.00	Peak	V	100	207	-65.58	-1.05	-9.54	30.83	68.20	-37.37
29125.00	Peak	V	-	-	-49.05	-19.41	-9.54	28.99	68.20	-39.21


**Table 7-26. Radiated Measurements with Rugged USB Dock**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 73 of 93	


## 7.7.2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	6.5 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

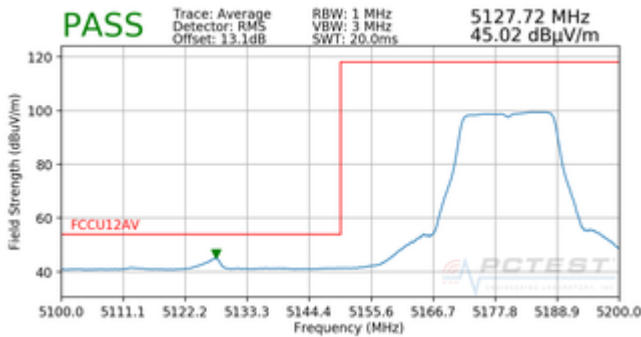


Plot 7-82. Radiated Lower Band Edge Plot (Average – UNII Band 1)

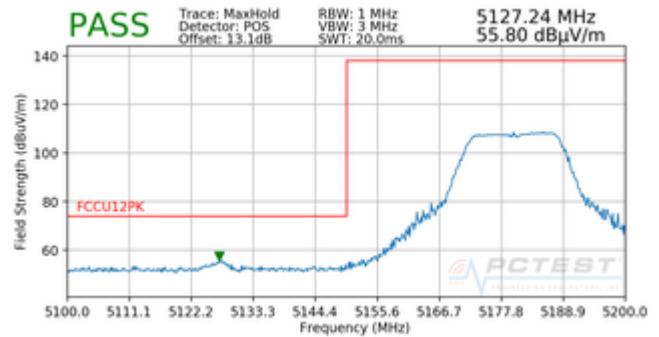


Plot 7-83. Radiated Lower Band Edge Plot (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	6.5 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

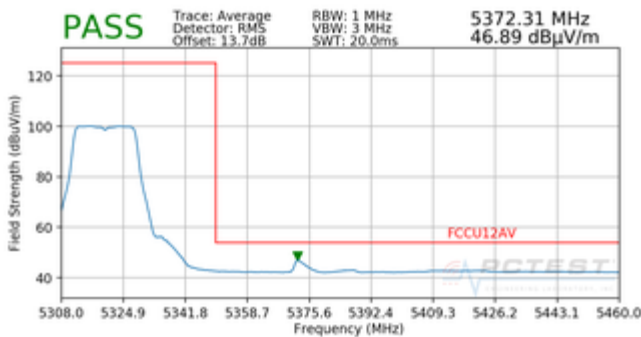


Plot 7-84. Radiated Upper Band Edge Plot (Average – UNII Band 2A)

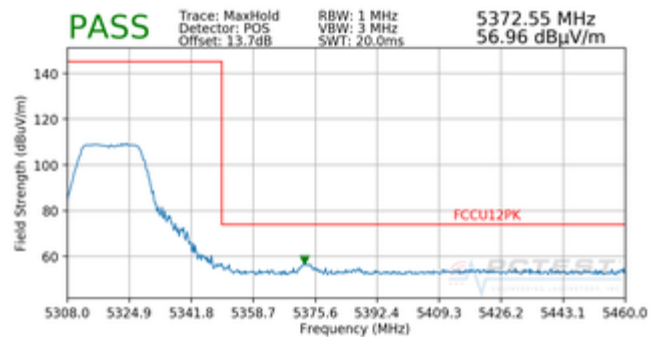


Plot 7-85. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 74 of 93

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 6.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

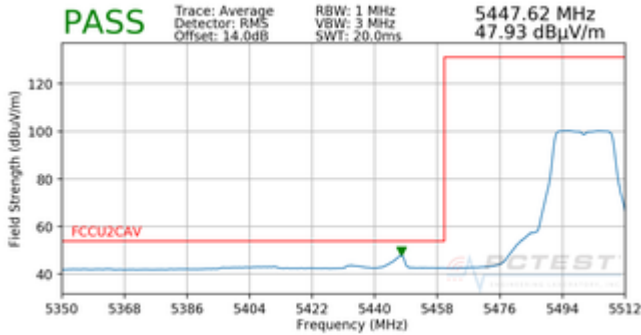


**Plot 7-86. Radiated Lower Band Edge Plot (Average – UNII Band 2C)**

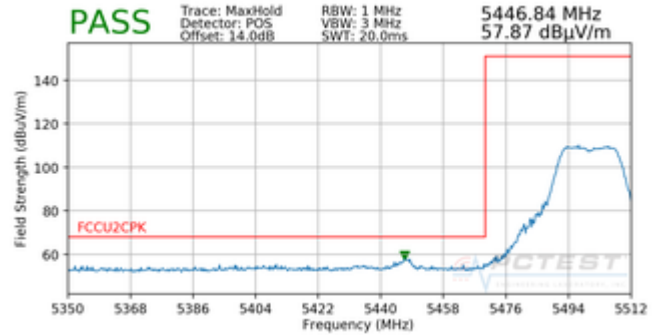


**Plot 7-87. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 6.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5700MHz  
 Channel: 140

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 6.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

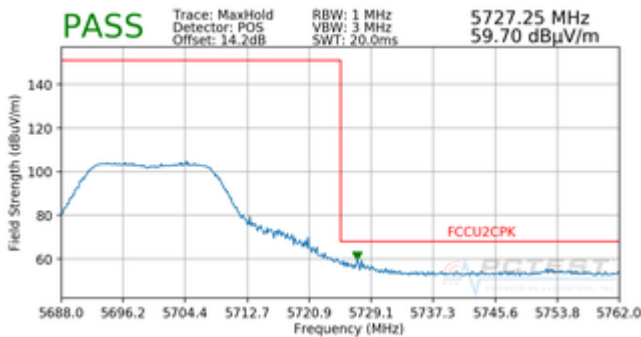


**Plot 7-88. Radiated Upper Band Edge Plot (Average – UNII Band 2C)**

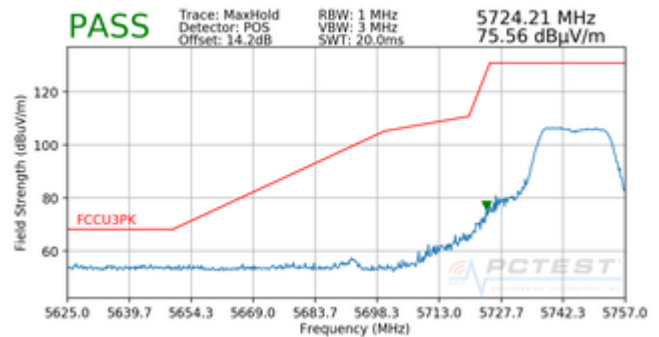

**Plot 7-89. Radiated Lower Band Edge Plot (Peak – UNII Band 3)**


FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 75 of 93

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 6.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

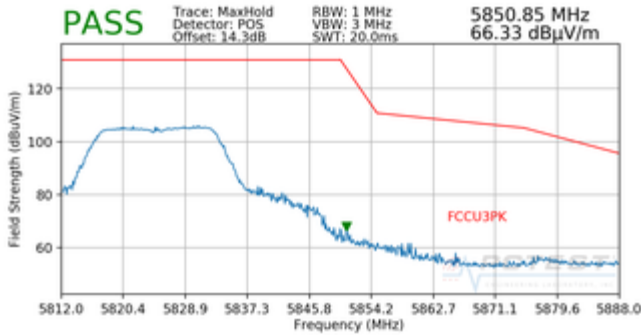


**Plot 7-90. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 6.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

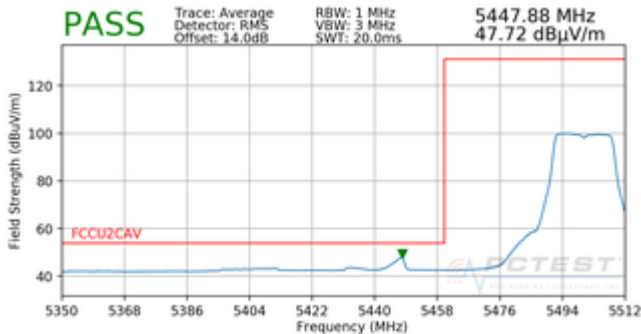

**Plot 7-91. Radiated Band Edge Plot (Average – Rugged USB Dock)**

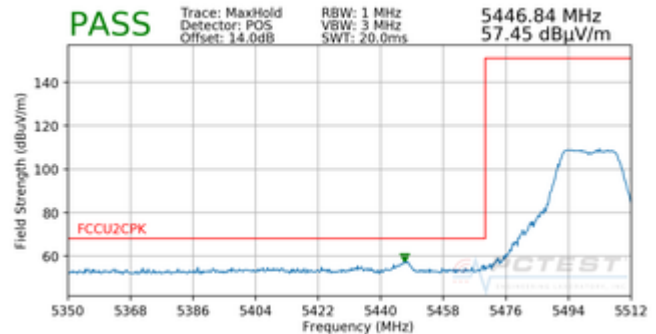


**Plot 7-92. Radiated Band Edge Plot (Peak – Rugged USB Dock)**


FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 76 of 93

### 7.7.3 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	13.5 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

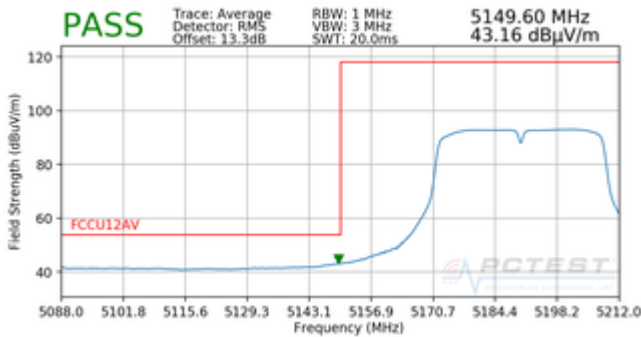


Plot 7-93. Radiated Lower Band Edge Plot (Average – UNII Band 1)

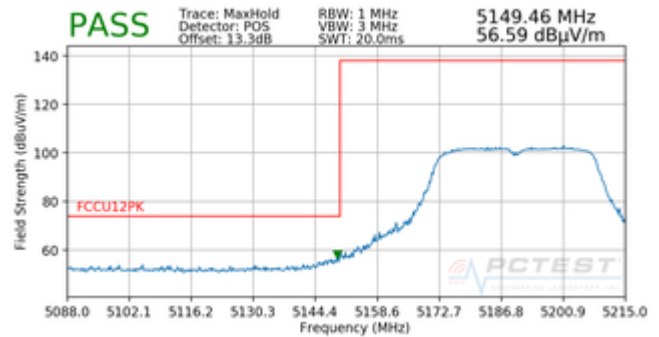


Plot 7-94. Radiated Lower Band Edge Plot (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	13.5 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

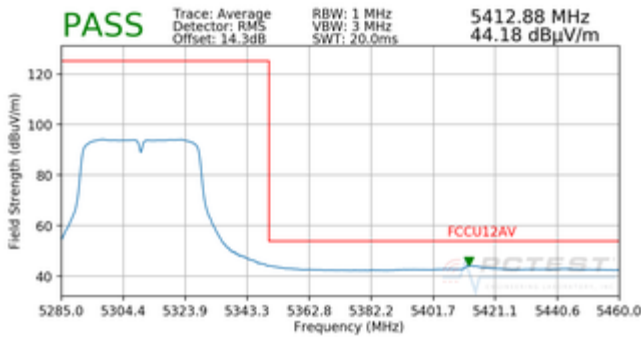


Plot 7-95. Radiated Upper Band Edge Plot (Average – UNII Band 2A)

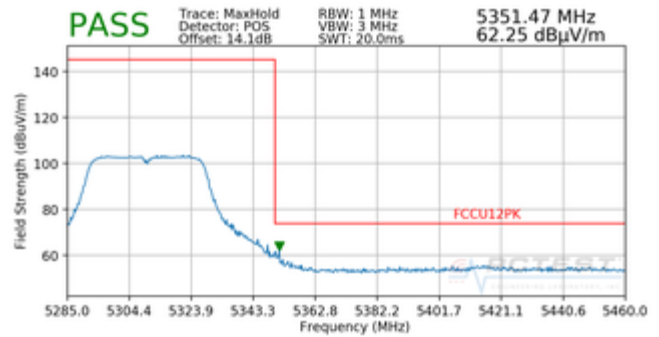


Plot 7-96. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 77 of 93

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 13.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

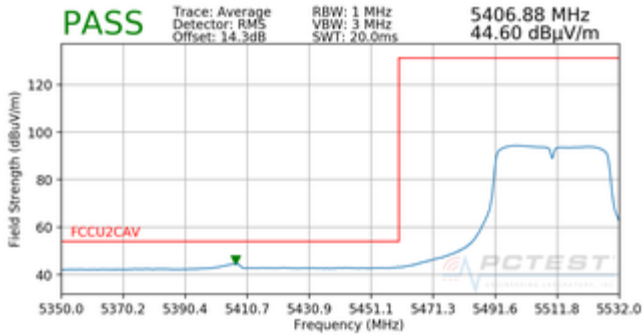


**Plot 7-97. Radiated Lower Band Edge Plot (Average – UNII Band 2C)**

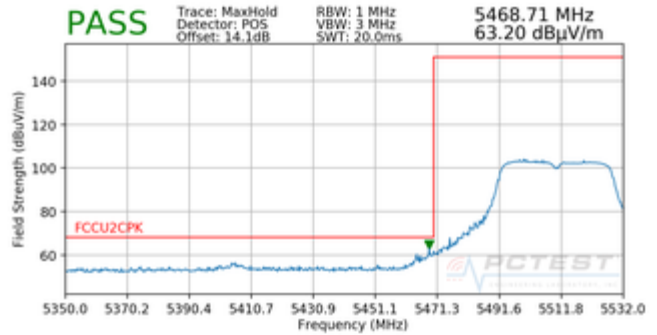


**Plot 7-98. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 13.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5670MHz  
 Channel: 134

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 13.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5755MHz  
 Channel: 151

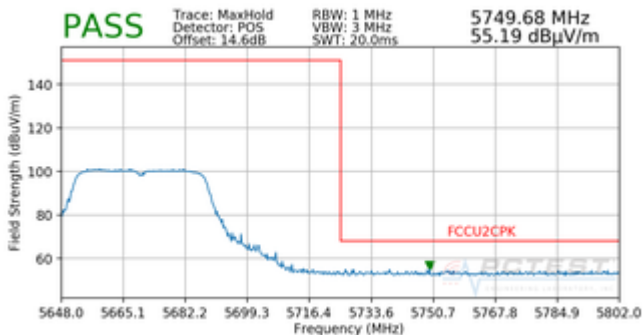


**Plot 7-99. Radiated Upper Band Edge Plot (Average – UNII Band 2C)**

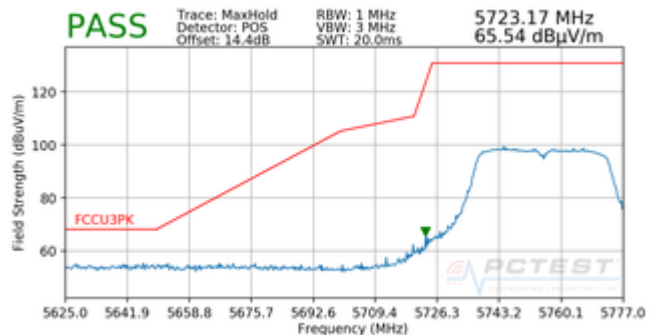

**Plot 7-100. Radiated Lower Band Edge Plot (Peak – UNII Band 3)**


FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 78 of 93

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 13.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

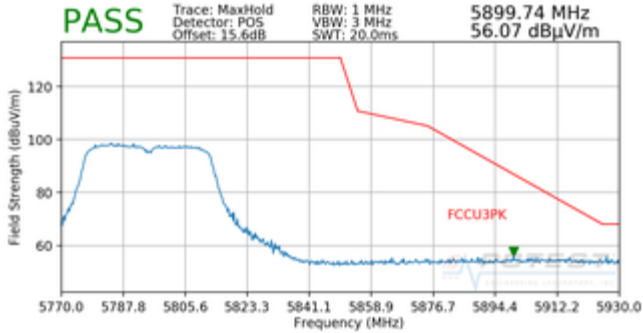


**Plot 7-101. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 13.5 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

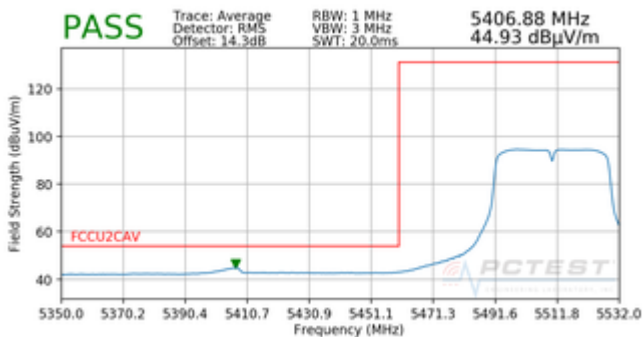

**Plot 7-102. Radiated Band Edge Plot (Average – Rugged USB Dock)**

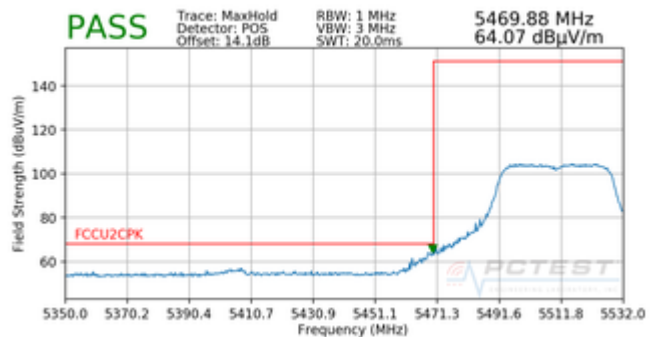


**Plot 7-103. Radiated Band Edge Plot (Peak – Rugged USB Dock)**


FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 79 of 93

### 7.7.4 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	29.3 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

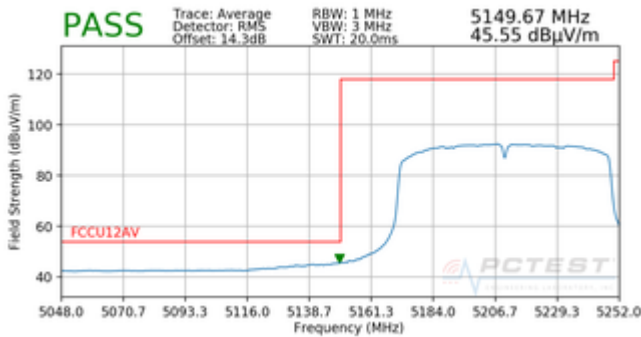


**Plot 7-104. Radiated Lower Band Edge Plot (Average – UNII Band 1)**

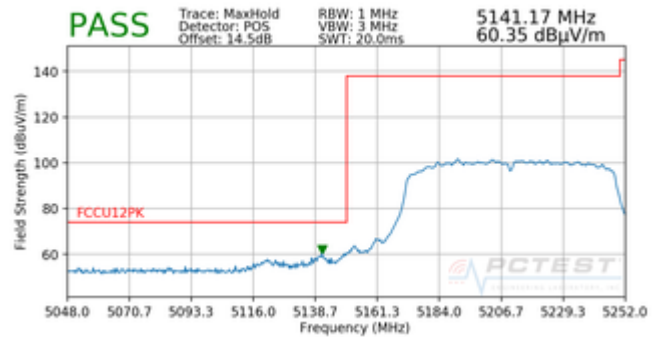


**Plot 7-105. Radiated Lower Band Edge Plot (Peak – UNII Band 1)**

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	29.3 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

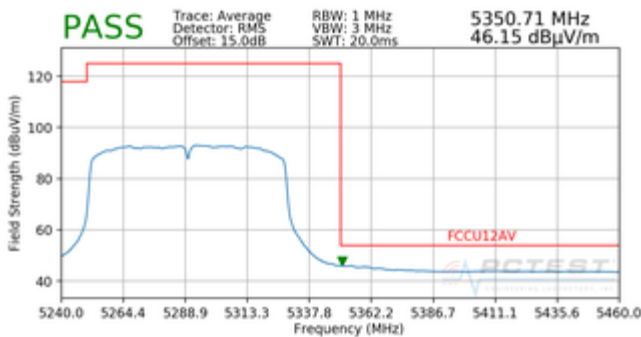

**Plot 7-106. Radiated Upper Band Edge Plot (Average – UNII Band 2A)**

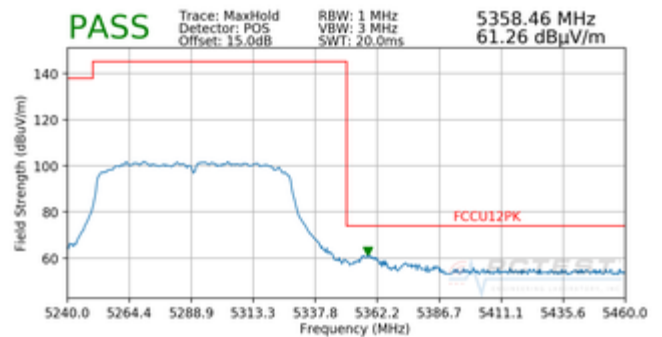


**Plot 7-107. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)**


FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 80 of 93



Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: 29.3 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

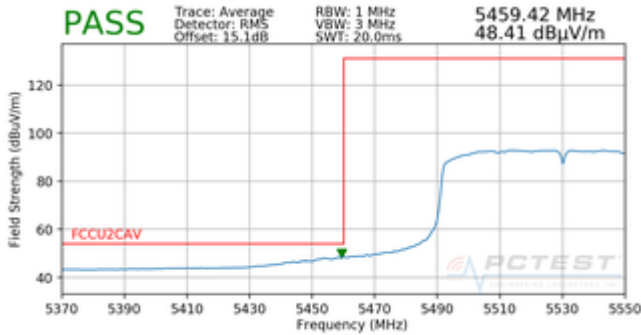


**Plot 7-108. Radiated Lower Band Edge Plot (Average – UNII Band 2C)**

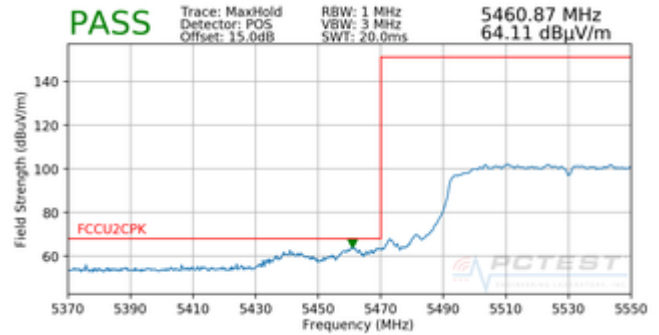


**Plot 7-109. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: 29.3 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

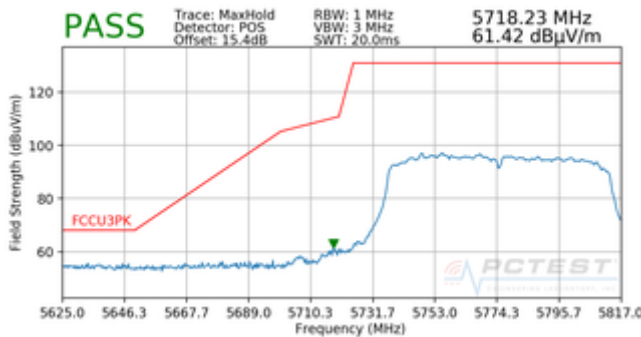


**Plot 7-110. Radiated Lower Band Edge Plot (Peak – UNII Band 3)**

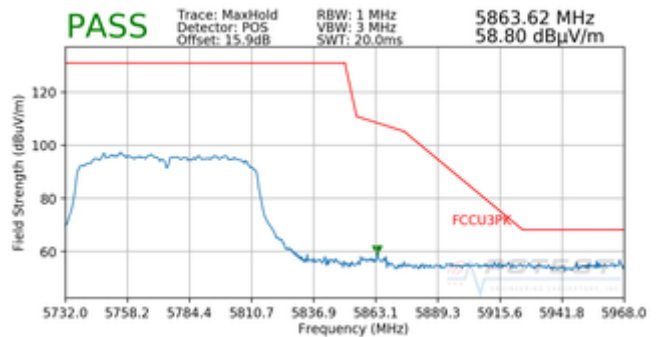


**Plot 7-111. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 81 of 93

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: 29.3 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

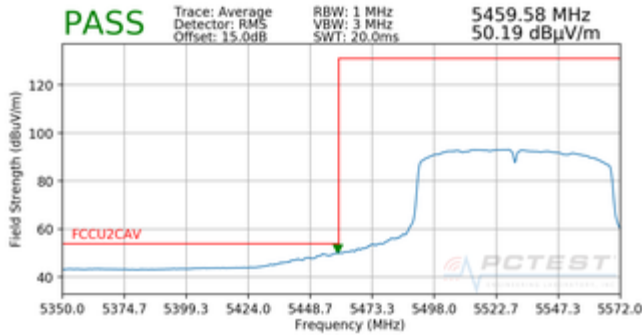

**Plot 7-112. Radiated Band Edge Plot (Average – Rugged USB Dock)**

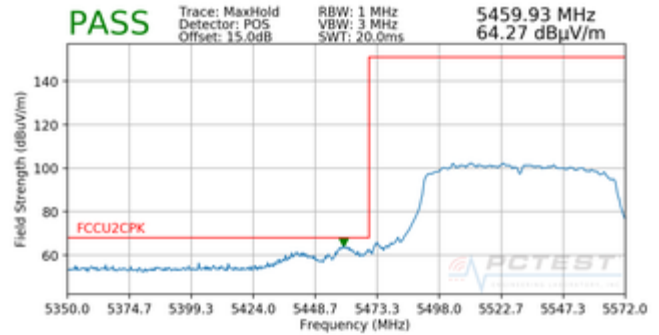

**Plot 7-113. Radiated Band Edge Plot (Peak – Rugged USB Dock)**

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 82 of 93

## 7.7 Radiated Spurious Emissions Measurements – Below 1GHz §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-27 per Section 15.209 and RSS-Gen (8.9).**

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-27. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings


#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset	Page 83 of 93	

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

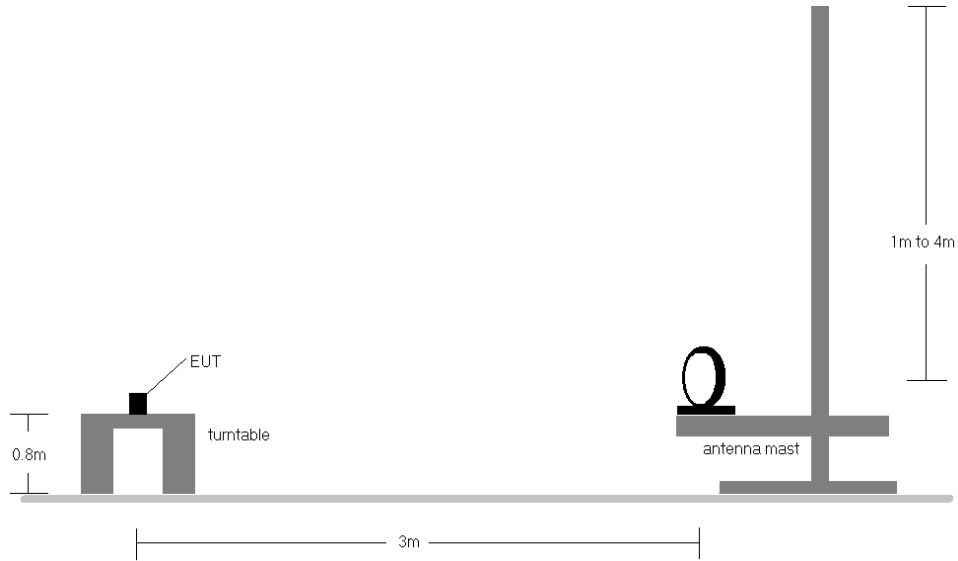

**Figure 7-6. Radiated Test Setup < 30MHz**

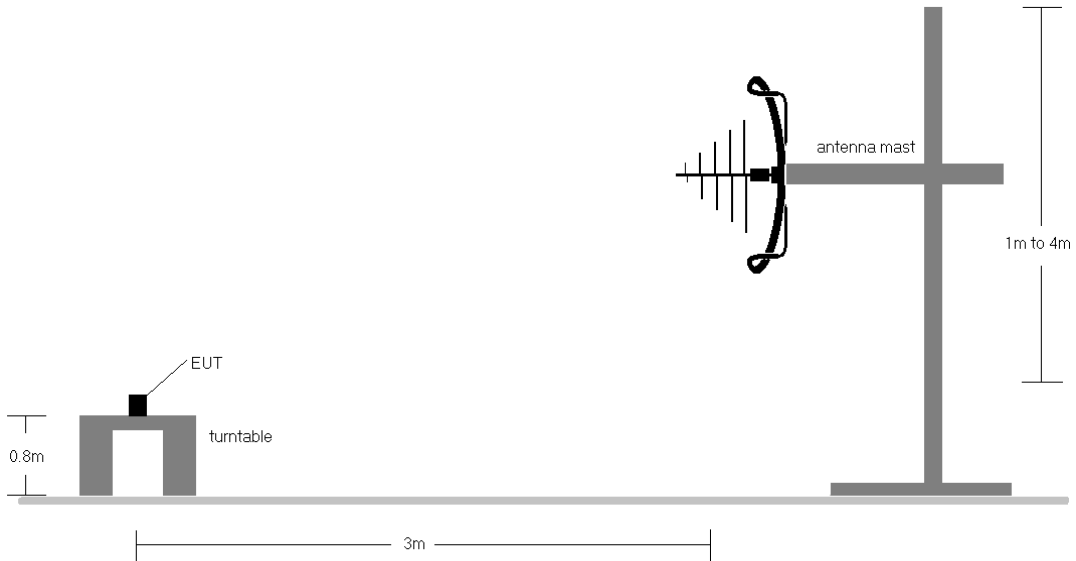

**Figure 7-7. Radiated Test Setup < 1GHz**


<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Panasonic</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset		Page 84 of 93

**Test Notes**

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-27.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: ACJFZN1C		<p align="center"><b>MEASUREMENT REPORT (CERTIFICATION)</b></p> <p align="right"><b>Panasonic</b></p>	<p><b>Approved by:</b> Quality Manager</p>
<p><b>Test Report S/N:</b> 1M1802070020-03.ACJ</p>	<p><b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018</p>	<p><b>EUT Type:</b> Portable Handset</p>	<p>Page 85 of 93</p>

**Radiated Spurious Emissions Measurements (Below 1GHz)**  
§15.209; RSS-Gen [8.9]

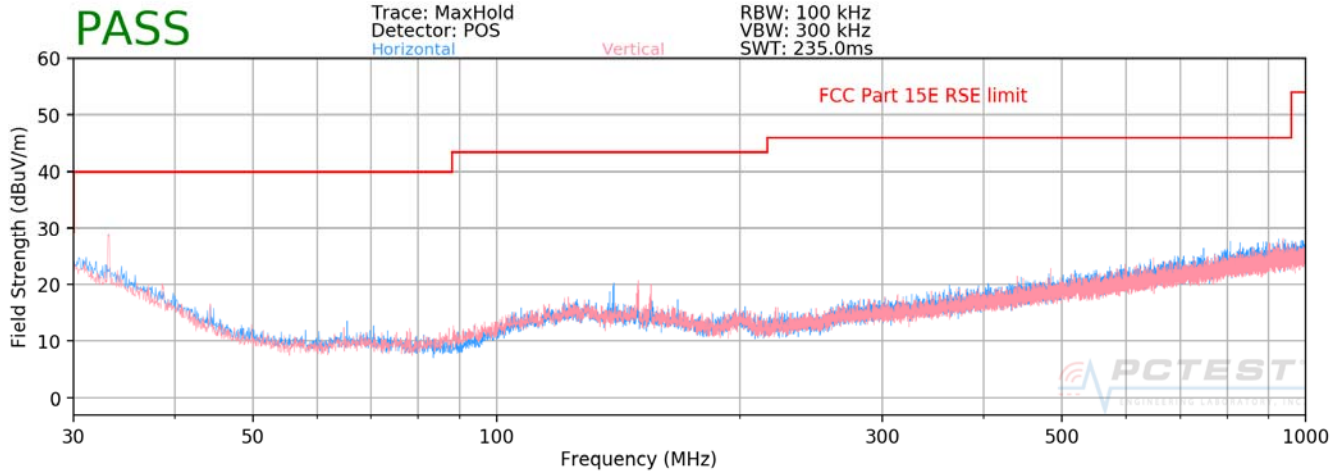

**Plot 7-114. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157)**

<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Panasonic</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset		Page 86 of 93

## 7.8 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-28. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset	Page 87 of 93	

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

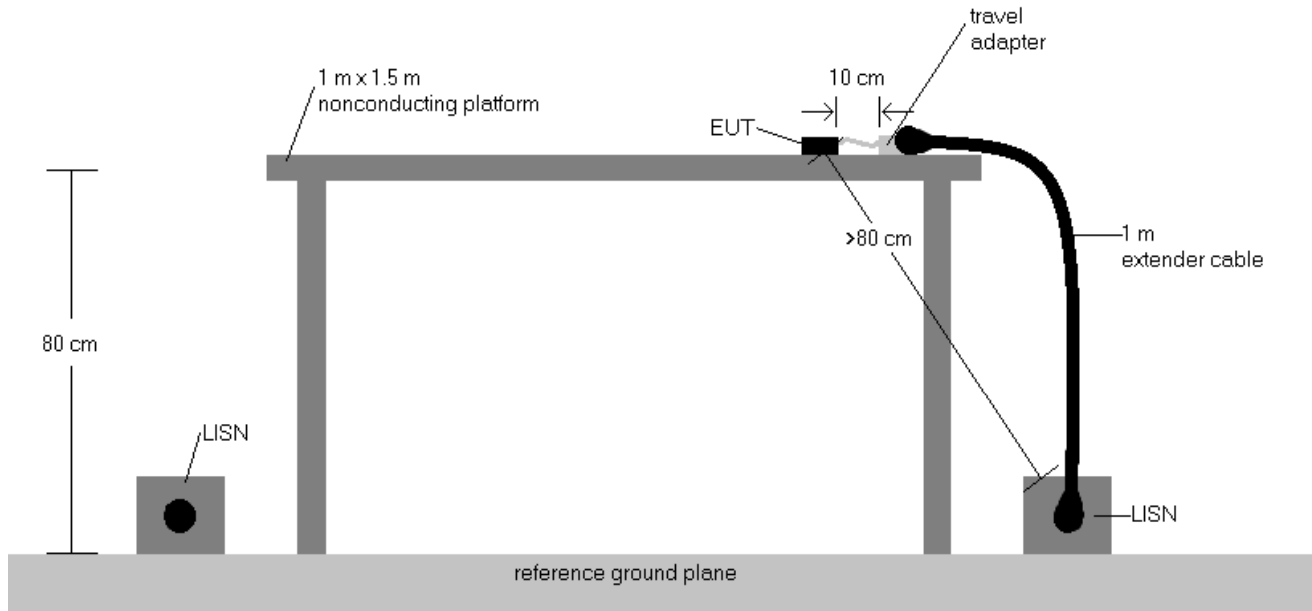



Figure 7-8. Test Instrument & Measurement Setup

### Test Notes


1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 88 of 93



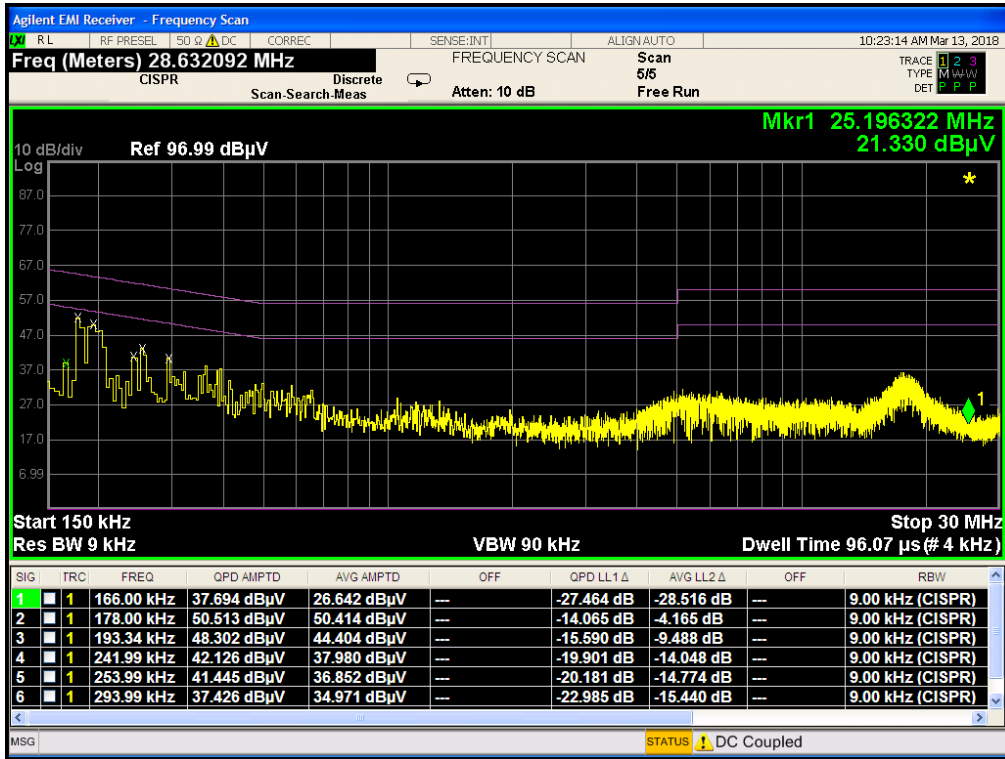


Plot 7-115. Line Conducted Plot with 802.11a UNII Band 1 (L1)

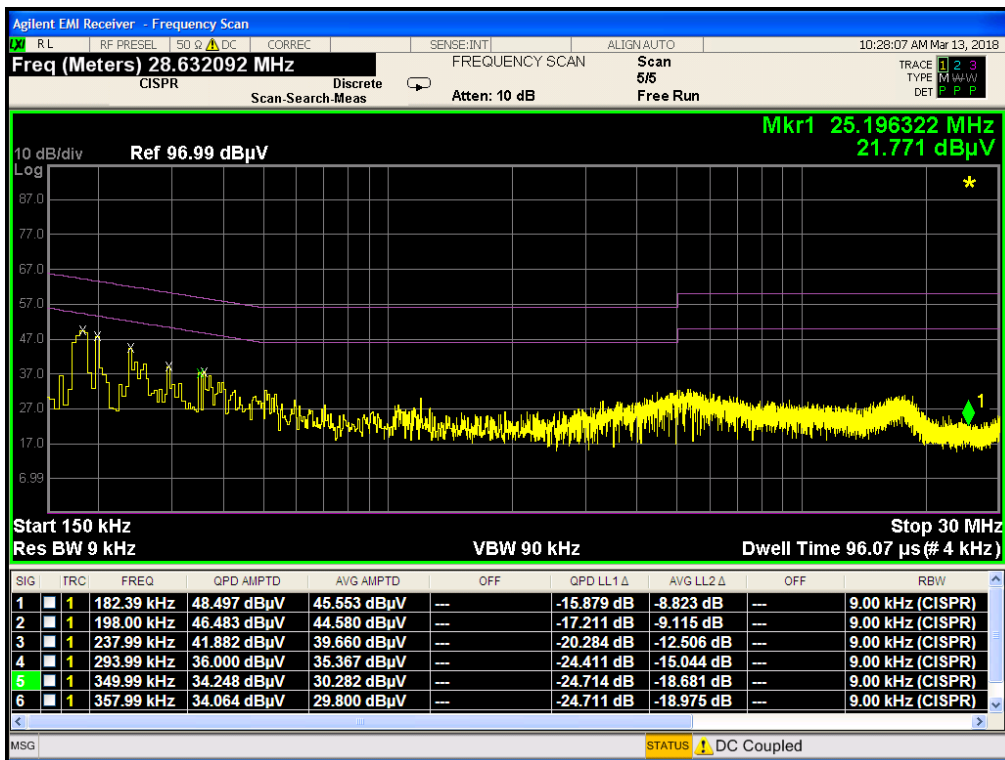


Plot 7-116. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 89 of 93

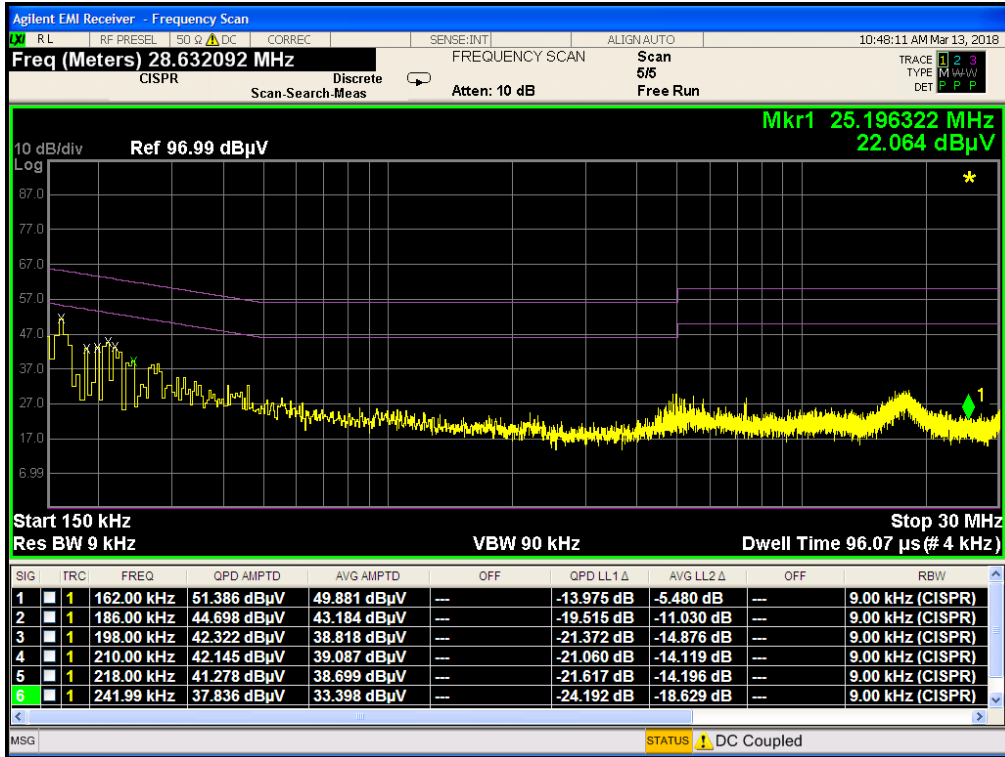


Plot 7-117. Line Conducted Plot with 802.11a UNII Band 2A (L1)

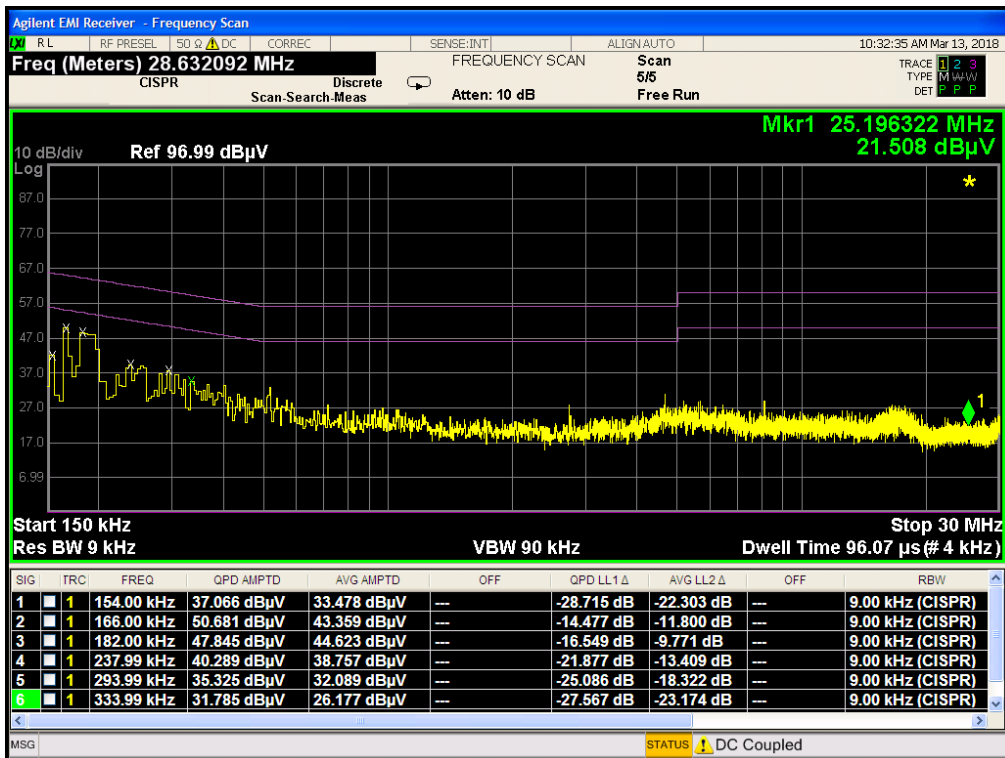


Plot 7-118. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)	<b>Panasonic</b>	Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 90 of 93

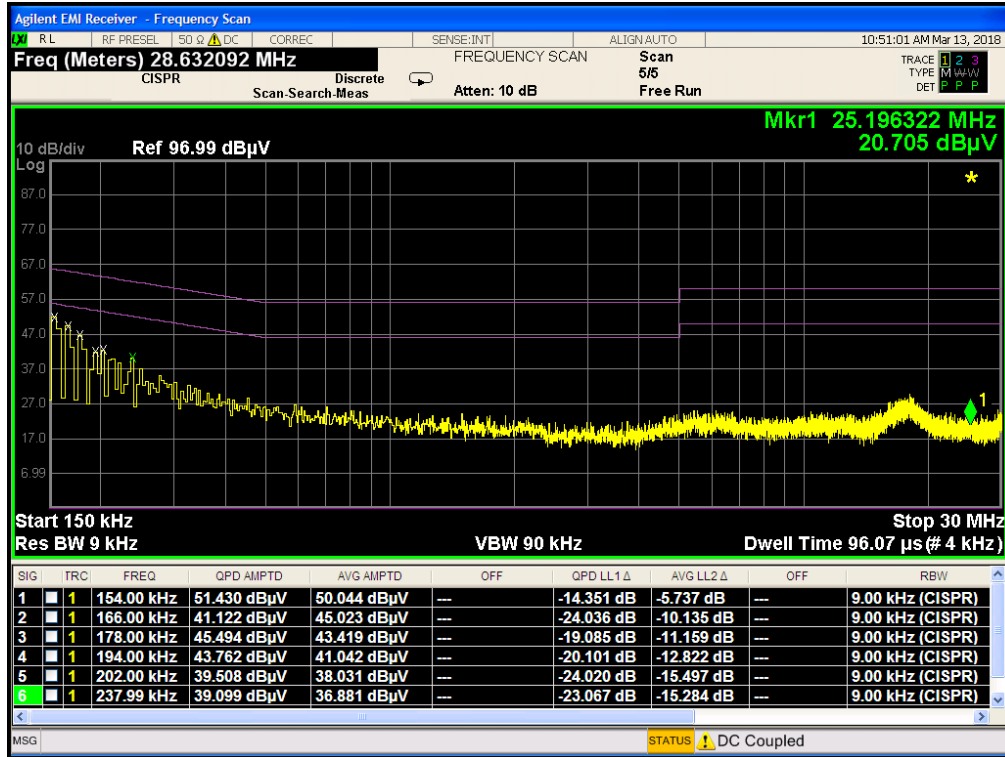


Plot 7-119. Line Conducted Plot with 802.11a UNII Band 2C (L1)

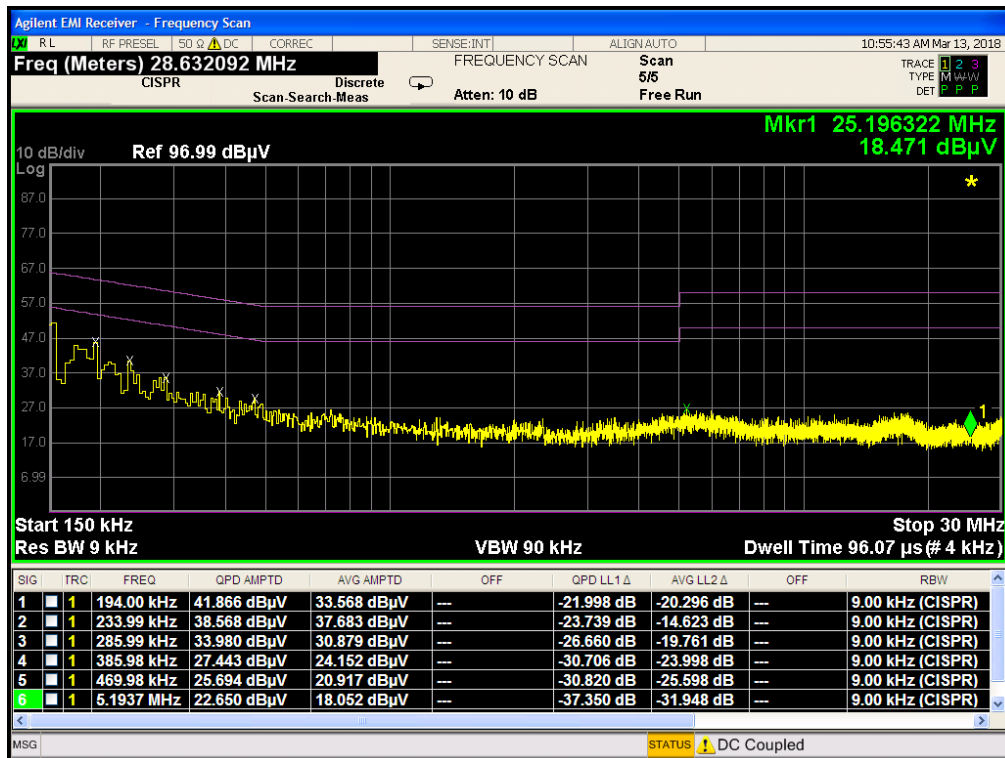


Plot 7-120. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 91 of 93

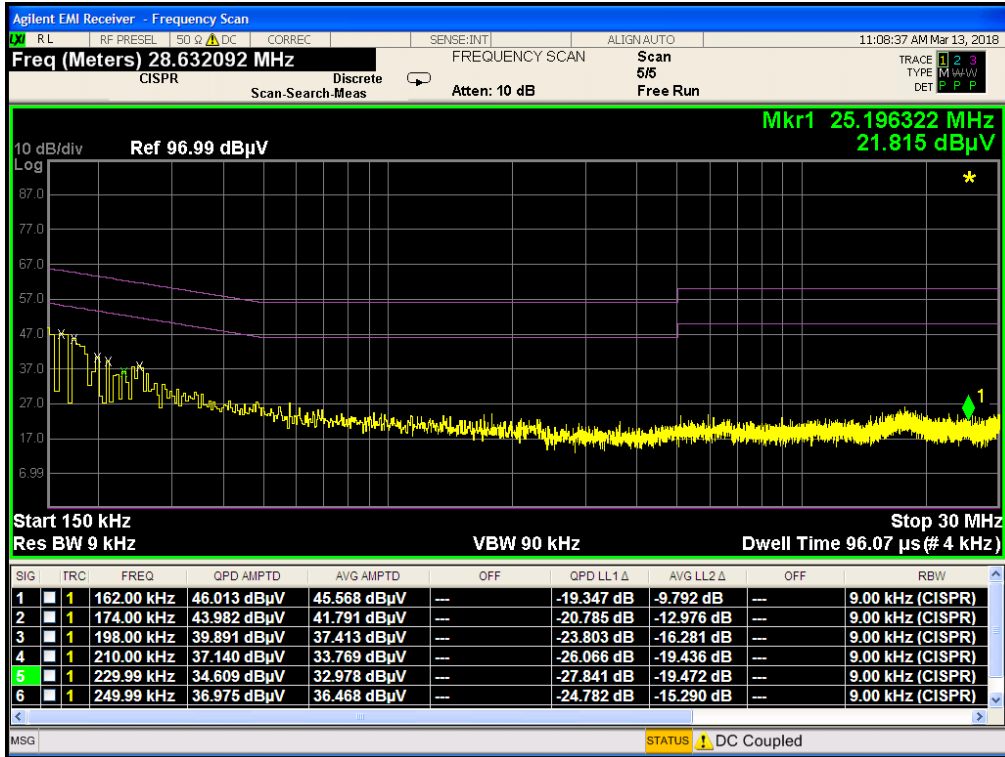

Plot 7-121. Line Conducted Plot with 802.11a UNII Band 3 (L1)

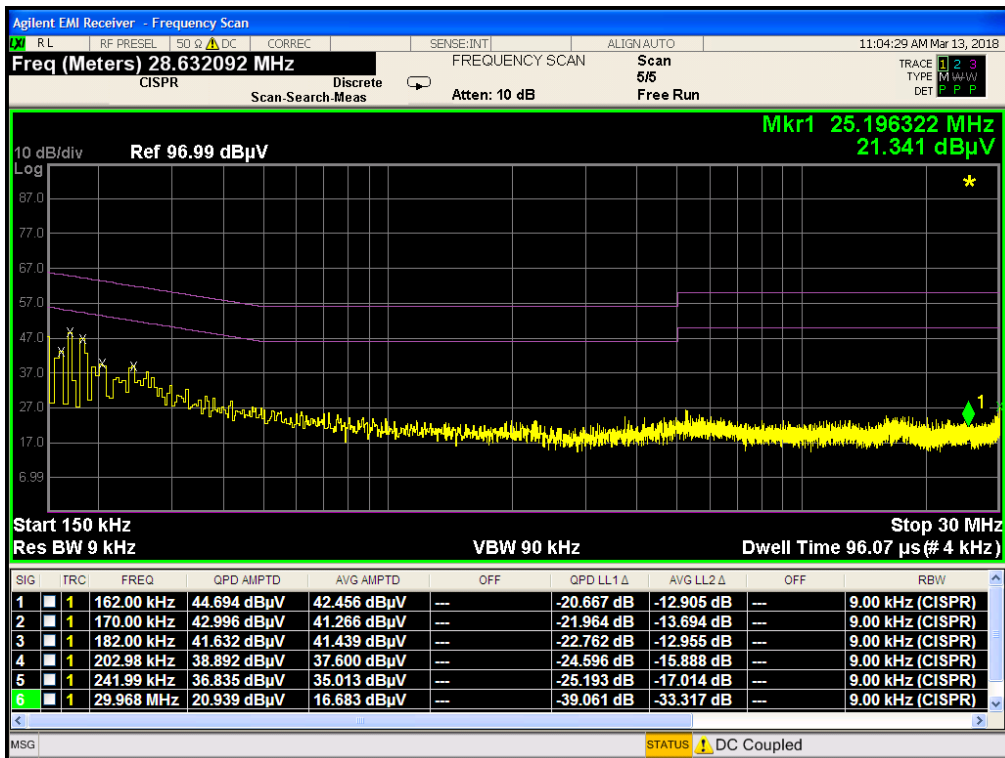

Plot 7-122. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: ACJFZN1C		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802070020-03.ACJ	Test Dates: 1/11/2016, 2/26/2018 - 4/4/2018	EUT Type: Portable Handset		Page 92 of 93

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Panasonic Portable Handset FCC ID: ACJFZN1C** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

<b>FCC ID:</b> ACJFZN1C		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1802070020-03.ACJ	<b>Test Dates:</b> 1/11/2016, 2/26/2018 - 4/4/2018	<b>EUT Type:</b> Portable Handset		Page 93 of 93