



FCC SAR TEST REPORT

FCC ID : ACJFZN1E
Equipment : Tablet Computer
Brand Name : Panasonic
Model Name : FZ-N1KB
Marketing Name : FZ-N1
Applicant : Panasonic Corporation of North America
Two Riverfront Plaza, 9th Floor, Newark, NJ 07102-5490
Manufacturer : Panasonic Mobile Communications Co., Ltd.
600 Saedo-cho, Tsuzuki-ku, Yokohama City 224-8539, Japan
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Apr. 22, 2020 and testing was started from Apr. 30, 2020 and completed on May 17, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information 5
3.1 General Information 5
3.2 General LTE SAR Test and Reporting Considerations 6
4. RF Exposure Limits..... 8
4.1 Uncontrolled Environment..... 8
4.2 Controlled Environment..... 8
5. Specific Absorption Rate (SAR)..... 9
5.1 Introduction 9
5.2 SAR Definition..... 9
6. System Description and Setup10
6.1 E-Field Probe11
6.2 Data Acquisition Electronics (DAE)11
6.3 Phantom.....12
6.4 Device Holder.....13
7. Measurement Procedures14
7.1 Spatial Peak SAR Evaluation14
7.2 Power Reference Measurement.....15
7.3 Area Scan15
7.4 Zoom Scan.....16
7.5 Volume Scan Procedures.....16
7.6 Power Drift Monitoring.....16
8. Test Equipment List17
9. System Verification18
9.1 Tissue Simulating Liquids.....18
9.2 Tissue Verification19
9.3 System Performance Check Results.....20
10. RF Exposure Positions22
10.1 Ear and handset reference point22
10.2 Definition of the cheek position23
10.3 Definition of the tilt position24
10.4 Body Worn Accessory24
10.5 Product Specific Exposure25
10.6 Wireless Router.....25
11. UMTS/LTE Output Power (Unit: dBm)26
12. WiFi/Bluetooth Output Power (Unit: dBm)44
13. Antenna Location49
14. SAR Test Results50
14.1 Head SAR52
14.2 Hotspot SAR55
14.3 Body Worn Accessory SAR.....57
14.4 Product Specific SAR.....60
14.5 Repeated SAR Measurement61
15. Simultaneous Transmission Analysis.....62
15.1 Head Exposure Conditions63
15.2 Hotspot Exposure Conditions.....64
15.3 Body-Worn Accessory Exposure Conditions65
15.4 Product Specific Exposure Conditions65
16. Uncertainty Assessment66
17. References.....66
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Panasonic Corporation of North America, Tablet Computer, FZ-N1KB, are as follows.

Table with columns: Equipment Class, Frequency Band, Highest SAR Summary (Head, Body-worn, Hotspot, Product Specific), Highest Simultaneous Transmission. Rows include Licensed (WCDMA II, V, LTE Bands), DTS, NII, DSS, and Date of Testing.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.(FCC) This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
FCC KDB 941225 D06 Hotspot Mode SAR v02r01
FCC KDB 941225 D07 UMPC Mini Tablet v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Tablet Computer
Brand Name	Panasonic
Model Name	FZ-N1KB
Marketing Name	FZ-N1
FCC ID	ACJFZN1E
IMEI Code	355444110002194
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz RFID : 13.56 MHz
Mode	RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE RFID:ASK
EUT Stage	Identical Prototype



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	ACJFZN1E																																																														
Equipment Name	Tablet Computer																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																														
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM																																																														
LTE Voice / Data requirements	Data only / Voice and Data																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 11.																																																														
LTE Carrier Aggregation Additional Information	This device supports maximum of 2 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23305		790.5		23330		793					
M	23330		793									
H	23355		795.5									
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

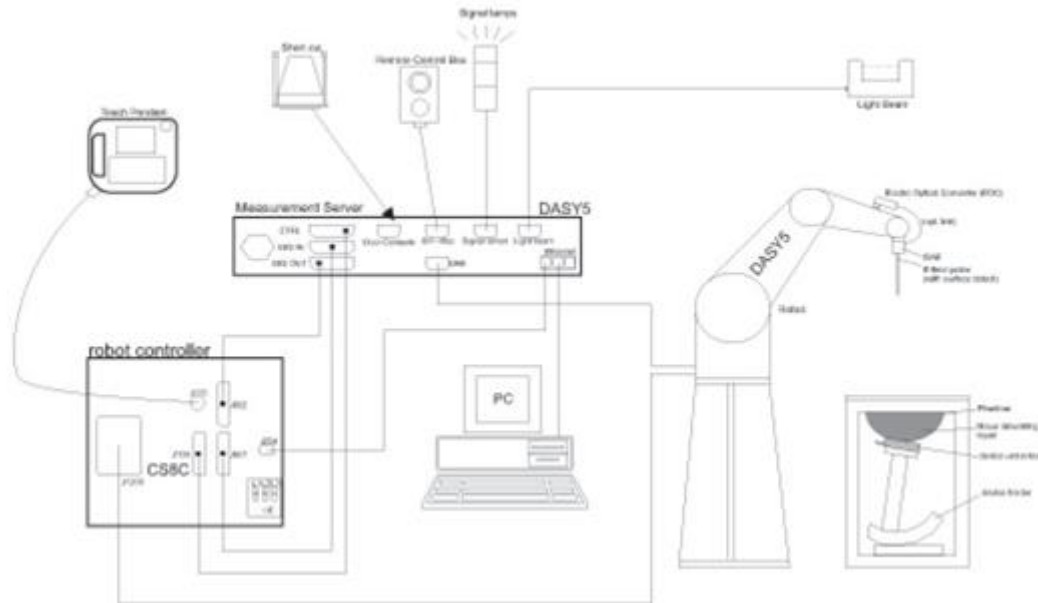


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


6.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

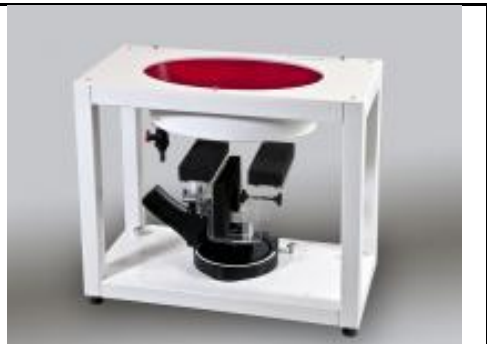Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1750MHz System Validation Kit	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 09, 2020
SPEAG	2450MHz System Validation Kit	D2450V2	929	Nov. 21, 2019	Nov. 20, 2020
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 25, 2020
SPEAG	Data Acquisition Electronics	DAE4	316	Dec. 20, 2019	Dec. 19, 2020
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 17, 2019	Sep. 16, 2020
SPEAG	Data Acquisition Electronics	DAE4	854	May. 21, 2019	May. 20, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Dec. 18, 2019	Dec. 17, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 22, 2019	Jul. 21, 2020
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 27, 2019	May. 26, 2020
R&S	BT Base Station	CBT32	100519	Jun. 04, 2019	Jun. 03, 2020
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 18, 2019	Sep. 17, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 10, 2019	Sep. 09, 2020
Anritsu	Power Meter	ML2495A	1036004	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Sensor	MA2411B	1027253	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2019	Aug. 26, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 27, 2019	Jun. 26, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2019	Oct. 15, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 12, 2019	Aug. 11, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D750V2, SN: 1107, D1750V2, SN: 1112, D1900V2, SN: 5d041 and D5GHzV2, SN: 1006 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

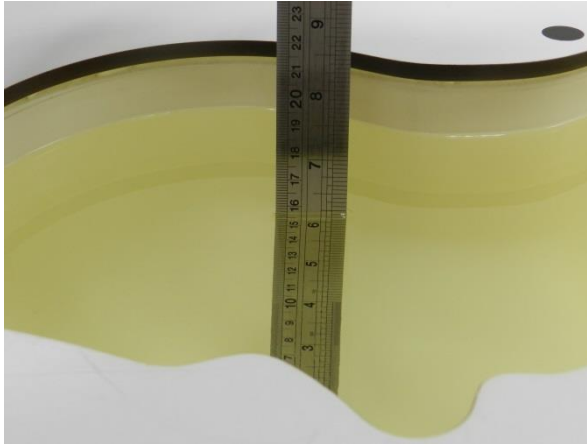


Fig 10.1 Photo of Liquid Height for Head SAR

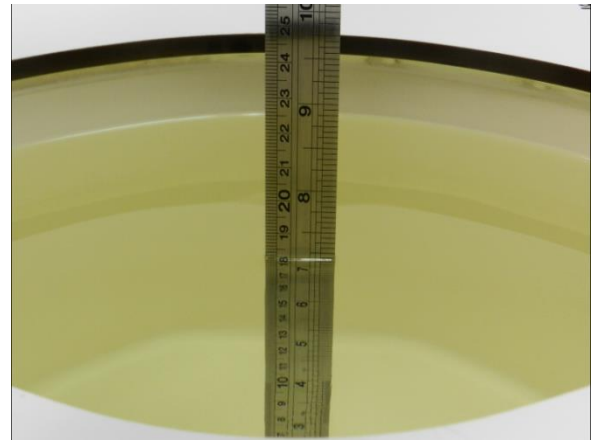


Fig 10.2 Photo of Liquid Height for Body SAR

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.4	0.889	42.299	0.89	41.90	-0.11	0.95	±5	2020/5/1
750	22.6	0.898	42.908	0.89	41.90	0.90	2.41	±5	2020/5/5
835	22.4	0.899	42.474	0.90	41.50	-0.11	2.35	±5	2020/5/1
835	22.6	0.896	40.993	0.90	41.50	-0.44	-1.22	±5	2020/5/5
1750	22.6	1.389	41.369	1.37	40.10	1.39	3.16	±5	2020/5/1
1750	22.5	1.360	40.072	1.37	40.10	-0.73	-0.07	±5	2020/5/6
1750	22.6	1.376	41.302	1.37	40.10	0.44	3.00	±5	2020/5/7
1900	22.5	1.416	38.866	1.40	40.00	1.14	-2.84	±5	2020/4/30
1900	22.5	1.453	39.427	1.40	40.00	3.79	-1.43	±5	2020/5/6
1900	22.6	1.433	38.773	1.40	40.00	2.36	-3.07	±5	2020/5/7
2450	22.4	1.834	40.345	1.80	39.20	1.89	2.92	±5	2020/5/8
2450	22.5	1.809	37.954	1.80	39.20	0.50	-3.18	±5	2020/5/17
5250	22.1	4.885	36.480	4.71	35.95	3.72	1.47	±5	2020/5/2
5250	22.6	4.641	36.875	4.71	35.95	-1.46	2.57	±5	2020/5/17
5600	22.4	5.120	36.105	5.07	35.50	0.99	1.70	±5	2020/5/10
5600	22.6	5.000	36.375	5.07	35.50	-1.38	2.46	±5	2020/5/17
5750	22.6	5.158	36.166	5.22	35.35	-1.19	2.31	±5	2020/5/17



9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Table with 10 columns: Date, Frequency (MHz), Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). It contains 20 rows of test data.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/5/7	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE4 Sn316	5.04	21.20	20.16	-4.91
2020/5/2	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE4 Sn854	2.38	23.20	23.8	2.59
2020/5/10	5600	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE4 Sn854	2.44	23.20	24.4	5.17

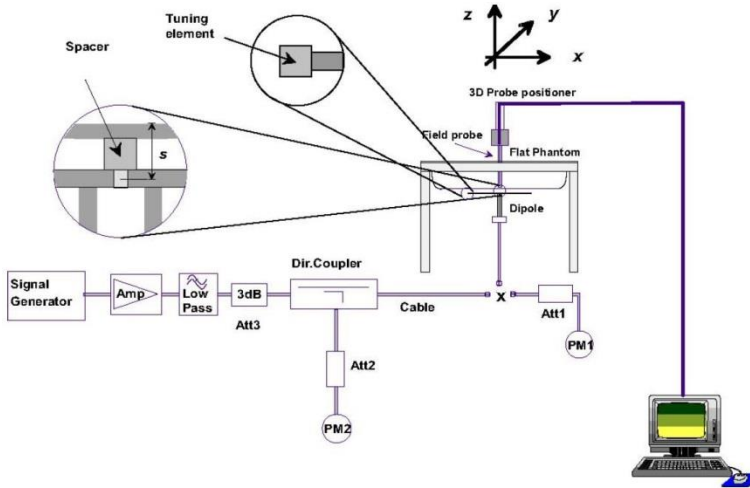


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

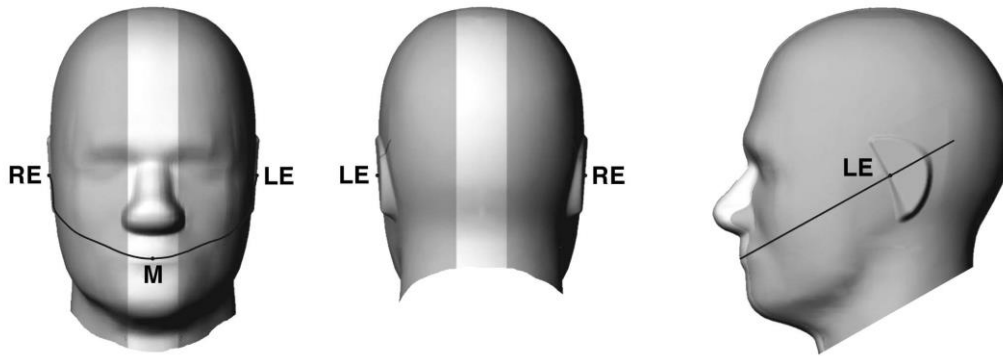


Fig 9.1.1 Front, back, and side views of SAM twin phantom

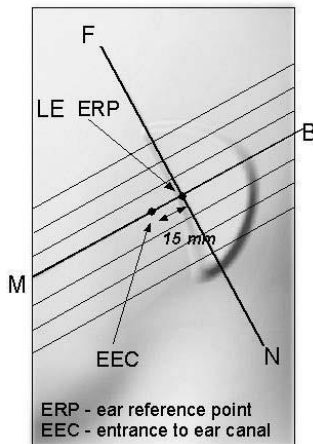


Fig 9.1.2 Close-up side view of phantom showing the ear region.

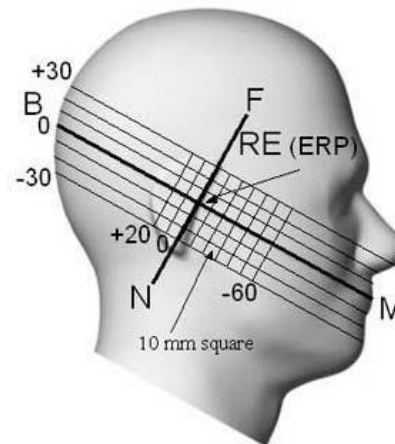


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

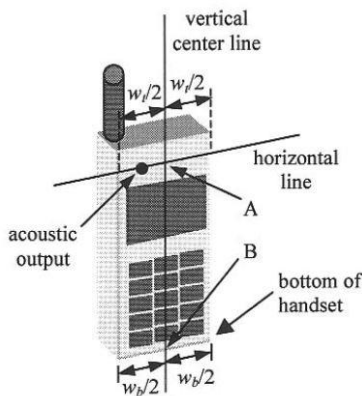


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

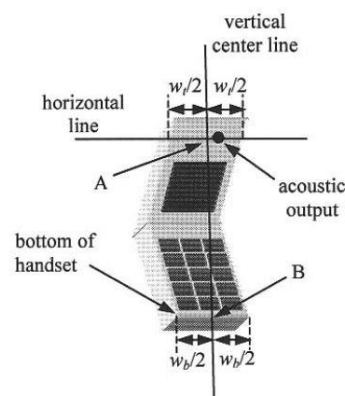


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

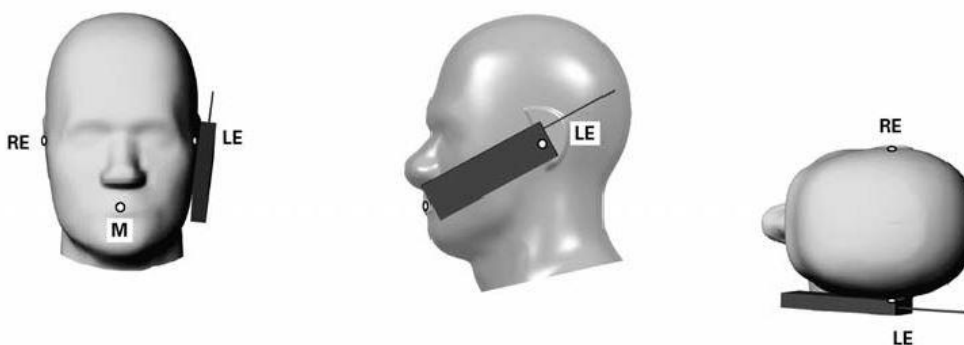


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

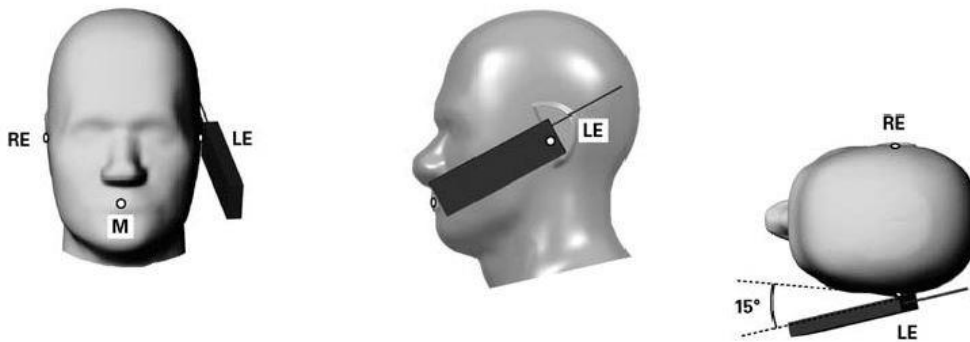


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

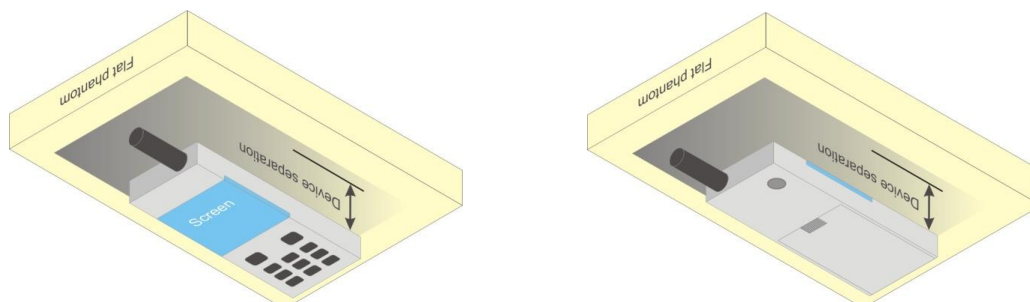


Fig 9.4 Body Worn Position



10.5 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. UMTS/LTE Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.59	23.61	23.42	24.50	23.65	23.80	23.27	24.50
3GPP Rel 99	RMC 12.2Kbps	23.60	23.62	23.43	24.50	23.66	23.81	23.27	24.50
3GPP Rel 6	HSDPA Subtest-1	22.57	22.60	22.43	24.50	22.65	22.78	22.27	24.50
3GPP Rel 6	HSDPA Subtest-2	22.57	22.59	22.44	24.50	22.64	22.77	22.28	24.50
3GPP Rel 6	HSDPA Subtest-3	22.07	22.09	21.94	24.00	22.14	22.27	21.77	24.00
3GPP Rel 6	HSDPA Subtest-4	22.07	22.08	21.93	24.00	22.14	22.28	21.77	24.00
3GPP Rel 6	HSUPA Subtest-1	22.57	22.59	22.43	24.50	22.66	22.79	22.29	24.50
3GPP Rel 6	HSUPA Subtest-2	20.57	20.58	20.44	22.50	20.66	20.79	20.28	22.50
3GPP Rel 6	HSUPA Subtest-3	21.58	21.59	21.43	23.50	21.66	21.78	21.28	23.50
3GPP Rel 6	HSUPA Subtest-4	20.57	20.58	20.44	22.50	20.66	20.78	20.28	22.50
3GPP Rel 6	HSUPA Subtest-5	22.57	22.59	22.42	24.50	22.65	22.78	22.28	24.50



<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 4 SAR test was covered by Band 66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<LTE Band 2>

Channel	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)			
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.06	23.09	23.01	24.5	0
20	QPSK	1	49	22.96	22.76	22.89		
20	QPSK	1	99	22.94	23.02	22.96		
20	QPSK	50	0	22.08	22.16	21.99	23.5	1
20	QPSK	50	24	22.07	21.90	21.98		
20	QPSK	50	50	21.91	21.83	21.95		
20	QPSK	100	0	21.96	22.01	22.00	23.5	1
20	16QAM	1	0	22.50	22.49	22.32		
20	16QAM	1	49	22.29	22.25	22.24		
20	16QAM	1	99	22.28	22.36	22.28	22.5	2
20	16QAM	50	0	21.22	21.02	21.05		
20	16QAM	50	24	21.13	21.00	21.07		
20	16QAM	50	50	21.01	20.95	20.99	22.5	2
20	16QAM	100	0	21.06	21.00	21.05		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.98	22.99	22.93	24.5	0
15	QPSK	1	37	22.85	22.69	22.74		
15	QPSK	1	74	22.75	22.87	22.88		
15	QPSK	36	0	22.02	21.76	21.75	23.5	1
15	QPSK	36	20	21.91	21.81	21.82		
15	QPSK	36	39	21.88	21.65	21.77		
15	QPSK	75	0	21.77	21.87	21.86	23.5	1
15	16QAM	1	0	22.49	22.50	22.26		
15	16QAM	1	37	22.27	22.20	22.19		
15	16QAM	1	74	22.17	22.25	22.12	22.5	2
15	16QAM	36	0	21.15	21.00	20.89		
15	16QAM	36	20	21.01	20.82	20.93		
15	16QAM	36	39	20.90	20.89	20.88	22.5	2
15	16QAM	75	0	20.97	20.89	20.98		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.98	22.81	22.77	24.5	0
10	QPSK	1	25	22.75	22.50	22.57		
10	QPSK	1	49	22.71	22.67	22.83		
10	QPSK	25	0	21.94	21.68	21.61	23.5	1
10	QPSK	25	12	21.73	21.77	21.74		
10	QPSK	25	25	21.81	21.51	21.69		
10	QPSK	50	0	21.60	21.84	21.71	23.5	1
10	16QAM	1	0	22.35	22.17	22.17		
10	16QAM	1	25	22.15	22.19	22.11		
10	16QAM	1	49	21.99	22.05	21.94	22.5	2
10	16QAM	25	0	20.96	20.83	20.80		
10	16QAM	25	12	20.99	20.82	20.91		
10	16QAM	25	25	20.82	20.72	20.81		



10	16QAM	50	0	20.79	20.75	20.86		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.81	22.80	22.62	24.5	0
5	QPSK	1	12	22.73	22.54	22.51		
5	QPSK	1	24	22.58	22.56	22.76		
5	QPSK	12	0	21.83	21.62	21.55	23.5	1
5	QPSK	12	7	21.68	21.75	21.69		
5	QPSK	12	13	21.81	21.51	21.61		
5	QPSK	25	0	21.55	21.74	21.64		
5	16QAM	1	0	22.11	22.05	22.03	23.5	1
5	16QAM	1	12	22.05	22.06	22.06		
5	16QAM	1	24	21.99	21.91	21.87		
5	16QAM	12	0	20.93	20.68	20.65	22.5	2
5	16QAM	12	7	20.81	20.75	20.78		
5	16QAM	12	13	20.65	20.65	20.65		
5	16QAM	25	0	20.75	20.57	20.66		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.78	22.70	22.54	24.5	0
3	QPSK	1	8	22.94	22.84	22.75		
3	QPSK	1	14	22.88	22.82	23.05		
3	QPSK	8	0	22.06	21.82	21.79	23.5	1
3	QPSK	8	4	21.98	22.03	21.91		
3	QPSK	8	7	22.09	21.73	21.85		
3	QPSK	15	0	21.84	21.94	21.94		
3	16QAM	1	0	22.36	22.28	22.23	23.5	1
3	16QAM	1	8	22.26	22.36	22.31		
3	16QAM	1	14	22.22	22.21	22.10		
3	16QAM	8	0	21.18	20.94	20.85	22.5	2
3	16QAM	8	4	21.03	21.04	21.04		
3	16QAM	8	7	20.85	20.94	20.88		
3	16QAM	15	0	20.95	20.83	20.96		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.59	22.59	22.41	24.5	0
1.4	QPSK	1	3	22.48	22.11	22.32		
1.4	QPSK	1	5	22.37	22.41	22.49		
1.4	QPSK	3	0	21.56	21.40	21.45		
1.4	QPSK	3	1	21.60	21.44	21.46		
1.4	QPSK	3	3	21.57	21.25	21.34	23.5	1
1.4	QPSK	6	0	21.15	21.38	21.42		
1.4	16QAM	1	0	22.05	22.01	22.00	23.5	1
1.4	16QAM	1	3	21.79	21.83	21.93		
1.4	16QAM	1	5	21.92	21.79	21.76		
1.4	16QAM	3	0	20.59	20.39	20.53		
1.4	16QAM	3	1	20.59	20.55	20.59		
1.4	16QAM	3	3	20.49	20.48	20.48		
1.4	16QAM	6	0	20.39	20.45	20.40	22.5	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)		
Channel				20050	20175	20300				
Frequency (MHz)				1720	1732.5	1745				
20	QPSK	1	0	23.05	23.06	23.01	24.5	0		
20	QPSK	1	49	22.95	22.93	22.94				
20	QPSK	1	99	22.85	22.99	23.02				
20	QPSK	50	0	21.61	21.70	21.52	23.5	1		
20	QPSK	50	24	21.85	21.66	21.64				
20	QPSK	50	50	21.81	21.55	21.88				
20	QPSK	100	0	21.89	21.75	21.95	23.5	1		
20	16QAM	1	0	22.16	22.29	21.93				
20	16QAM	1	49	22.36	22.06	22.36				
20	16QAM	1	99	22.14	22.01	22.09	22.5	2		
20	16QAM	50	0	21.15	21.03	21.14				
20	16QAM	50	24	21.09	20.87	21.08				
20	16QAM	50	50	20.94	20.73	21.01	22.5	2		
20	16QAM	100	0	21.02	21.07	21.23				
Channel				20025	20175	20325			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5				
15	QPSK	1	0	22.94	22.90	22.84	24.5	0		
15	QPSK	1	37	22.83	22.80	22.93				
15	QPSK	1	74	22.83	22.95	22.91				
15	QPSK	36	0	21.61	21.54	21.55	23.5	1		
15	QPSK	36	20	21.70	21.57	21.59				
15	QPSK	36	39	21.61	21.58	21.71				
15	QPSK	75	0	21.82	21.56	21.93	23.5	1		
15	16QAM	1	0	22.11	22.19	21.80				
15	16QAM	1	37	22.21	21.89	22.18				
15	16QAM	1	74	21.99	21.89	21.89	22.5	2		
15	16QAM	36	0	21.14	21.02	21.14				
15	16QAM	36	20	20.96	20.73	20.92				
15	16QAM	36	39	20.89	20.77	20.86	22.5	2		
15	16QAM	75	0	20.89	20.97	21.22				
Channel				20000	20175	20350			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750				
10	QPSK	1	0	22.82	22.78	22.71	24.5	0		
10	QPSK	1	25	22.73	22.69	22.91				
10	QPSK	1	49	22.64	22.91	22.72				
10	QPSK	25	0	21.52	21.51	21.53	23.5	1		
10	QPSK	25	12	21.63	21.62	21.55				
10	QPSK	25	25	21.51	21.54	21.67				
10	QPSK	50	0	21.75	21.55	21.91	23.5	1		
10	16QAM	1	0	21.97	22.05	21.65				
10	16QAM	1	25	22.03	21.70	22.02				
10	16QAM	1	49	21.95	21.89	21.82	22.5	2		
10	16QAM	25	0	21.04	20.94	21.08				
10	16QAM	25	12	20.94	20.69	20.85				
10	16QAM	25	25	20.70	20.69	20.68	22.5	2		
Channel				20000	20175	20350			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750				
10	QPSK	1	0	22.82	22.78	22.71	24.5	0		
10	QPSK	1	25	22.73	22.69	22.91				
10	QPSK	1	49	22.64	22.91	22.72				
10	QPSK	25	0	21.52	21.51	21.53	23.5	1		
10	QPSK	25	12	21.63	21.62	21.55				
10	QPSK	25	25	21.51	21.54	21.67				
10	QPSK	50	0	21.75	21.55	21.91	23.5	1		
10	16QAM	1	0	21.97	22.05	21.65				
10	16QAM	1	25	22.03	21.70	22.02				
10	16QAM	1	49	21.95	21.89	21.82	22.5	2		
10	16QAM	25	0	21.04	20.94	21.08				
10	16QAM	25	12	20.94	20.69	20.85				
10	16QAM	25	25	20.70	20.69	20.68	22.5	2		



10	16QAM	50	0	20.74	20.78	21.15		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.71	22.78	22.52	24.5	0
5	QPSK	1	12	22.72	22.68	22.80		
5	QPSK	1	24	22.57	22.83	22.72		
5	QPSK	12	0	21.58	21.57	21.51	23.5	1
5	QPSK	12	7	21.60	21.66	21.62		
5	QPSK	12	13	21.54	21.59	21.62		
5	QPSK	25	0	21.67	21.66	21.75		
5	16QAM	1	0	21.86	21.58	21.52	23.5	1
5	16QAM	1	12	21.89	21.60	21.86		
5	16QAM	1	24	21.92	21.72	21.76		
5	16QAM	12	0	20.81	20.83	20.82	22.5	2
5	16QAM	12	7	20.78	20.61	20.79		
5	16QAM	12	13	20.68	20.59	20.61		
5	16QAM	25	0	20.60	20.69	21.09		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.59	22.76	22.53	24.5	0
3	QPSK	1	8	22.69	22.58	22.79		
3	QPSK	1	14	22.53	22.70	22.54		
3	QPSK	8	0	21.58	21.57	21.56	23.5	1
3	QPSK	8	4	21.83	21.61	21.64		
3	QPSK	8	7	21.58	21.51	21.62		
3	QPSK	15	0	21.72	21.66	21.73		
3	16QAM	1	0	22.06	22.24	21.86	23.5	1
3	16QAM	1	8	22.26	21.83	22.19		
3	16QAM	1	14	22.28	21.95	22.06		
3	16QAM	8	0	21.16	21.13	21.16	22.5	2
3	16QAM	8	4	21.19	20.98	21.09		
3	16QAM	8	7	21.02	20.75	20.98		
3	16QAM	15	0	21.00	21.01	21.42		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.52	22.59	22.26	24.5	0
1.4	QPSK	1	3	22.56	22.55	22.65		
1.4	QPSK	1	5	22.50	22.58	22.46		
1.4	QPSK	3	0	21.24	21.17	21.22		
1.4	QPSK	3	1	21.36	21.03	21.10		
1.4	QPSK	3	3	21.00	20.98	21.46	23.5	1
1.4	16QAM	1	0	21.61	21.68	21.44	23.5	1
1.4	16QAM	1	3	21.72	21.39	21.65		
1.4	16QAM	1	5	21.78	21.46	21.49		
1.4	16QAM	3	0	20.58	20.67	20.72		
1.4	16QAM	3	1	20.59	20.45	20.62		
1.4	16QAM	3	3	20.42	20.35	20.57		
1.4	16QAM	6	0	20.43	20.42	20.91		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.85	23.88	23.84	24.5	0
10	QPSK	1	25	23.79	23.74	23.68		
10	QPSK	1	49	23.61	23.57	23.45		
10	QPSK	25	0	22.86	22.81	22.80	23.5	1
10	QPSK	25	12	22.89	22.85	22.63		
10	QPSK	25	25	22.88	22.89	22.78		
10	QPSK	50	0	23.17	22.82	22.91	23.5	1
10	16QAM	1	0	23.01	23.30	23.12		
10	16QAM	1	25	23.07	23.11	22.84		
10	16QAM	1	49	22.97	22.91	22.88	22.5	2
10	16QAM	25	0	22.14	21.92	22.08		
10	16QAM	25	12	22.26	21.92	21.87		
10	16QAM	25	25	22.12	21.97	21.88	22.5	2
10	16QAM	50	0	22.25	21.91	22.02		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.46	23.85	23.73	24.5	0
5	QPSK	1	12	23.76	23.69	23.48		
5	QPSK	1	24	23.80	23.41	23.45		
5	QPSK	12	0	22.81	22.68	22.75	23.5	1
5	QPSK	12	7	22.71	22.69	22.49		
5	QPSK	12	13	22.86	22.84	22.78		
5	QPSK	25	0	23.16	22.73	22.79	23.5	1
5	16QAM	1	0	22.74	23.13	23.03		
5	16QAM	1	12	23.07	23.05	22.73		
5	16QAM	1	24	23.12	22.88	22.79	22.5	2
5	16QAM	12	0	22.10	21.79	21.65		
5	16QAM	12	7	22.06	21.89	21.83		
5	16QAM	12	13	22.01	21.90	21.73	22.5	2
5	16QAM	12	13	22.01	21.90	21.73		
5	16QAM	25	0	22.17	21.85	21.85		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.54	23.75	23.72	24.5	0
3	QPSK	1	8	23.70	23.73	23.60		
3	QPSK	1	14	23.65	23.48	23.25		
3	QPSK	8	0	22.77	22.79	22.75	23.5	1
3	QPSK	8	4	22.79	22.80	22.51		
3	QPSK	8	7	22.68	22.80	22.78		
3	QPSK	15	0	23.03	22.76	22.88	23.5	1
3	16QAM	1	0	22.95	23.14	23.10		
3	16QAM	1	8	22.97	22.91	22.79		
3	16QAM	1	14	22.86	22.91	22.80	22.5	2
3	16QAM	8	0	21.98	21.92	21.91		
3	16QAM	8	4	22.11	21.92	21.81		
3	16QAM	8	7	22.10	21.97	21.83	22.5	2
3	16QAM	8	4	22.11	21.92	21.81		
3	16QAM	8	7	22.10	21.97	21.83		



3	16QAM	15	0	22.11	21.75	21.95		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.41	23.71	23.62	24.5	0
1.4	QPSK	1	3	23.66	23.71	23.55		
1.4	QPSK	1	5	23.47	23.29	23.25		
1.4	QPSK	3	0	22.64	22.64	22.56		
1.4	QPSK	3	1	22.63	22.73	22.55		
1.4	QPSK	3	3	22.68	22.66	22.66		
1.4	QPSK	6	0	22.98	22.70	22.85	23.5	1
1.4	16QAM	1	0	22.83	22.94	23.02	23.5	1
1.4	16QAM	1	3	22.92	22.88	22.78		
1.4	16QAM	1	5	22.67	22.78	22.78		
1.4	16QAM	3	0	21.95	21.76	21.74		
1.4	16QAM	3	1	22.02	21.87	21.61		
1.4	16QAM	3	3	21.95	21.90	21.72		
1.4	16QAM	6	0	21.99	21.64	21.79	22.5	2



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.08	23.11	23.05	24.5	0
10	QPSK	1	25	23.04	22.96	22.78		
10	QPSK	1	49	22.97	22.81	22.69		
10	QPSK	25	0	22.02	22.05	21.96	23.5	1
10	QPSK	25	12	22.04	22.05	21.97		
10	QPSK	25	25	22.02	21.99	21.83		
10	QPSK	50	0	22.11	22.03	21.95	23.5	1
10	16QAM	1	0	22.48	22.44	22.30		
10	16QAM	1	25	22.37	22.32	22.12		
10	16QAM	1	49	22.32	22.16	21.98	22.5	2
10	16QAM	25	0	21.22	21.14	21.04		
10	16QAM	25	12	21.21	21.15	21.05		
10	16QAM	25	25	21.17	21.10	20.92	22.5	2
10	16QAM	25	49	21.17	21.12	21.04		
10	16QAM	50	0	21.17	21.12	21.04		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.00	23.02	22.91	24.5	0
5	QPSK	1	12	23.00	22.95	22.78		
5	QPSK	1	24	22.90	22.65	22.64		
5	QPSK	12	0	21.94	21.90	21.89	23.5	1
5	QPSK	12	7	22.00	21.96	21.87		
5	QPSK	12	13	21.91	21.87	21.66		
5	QPSK	25	0	21.97	22.02	21.85	23.5	1
5	16QAM	1	0	22.29	22.31	22.23		
5	16QAM	1	12	22.20	22.30	21.99		
5	16QAM	1	24	21.90	22.03	21.83	22.5	2
5	16QAM	12	0	21.05	21.07	21.04		
5	16QAM	12	7	21.12	21.06	21.02		
5	16QAM	12	13	21.14	20.91	20.72	22.5	2
5	16QAM	12	25	21.04	21.05	20.86		
5	16QAM	25	0	21.04	21.05	20.86		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.94	22.97	22.84	24.5	0
3	QPSK	1	8	22.91	22.94	22.65		
3	QPSK	1	14	22.86	22.53	22.54		
3	QPSK	8	0	21.91	21.89	21.86	23.5	1
3	QPSK	8	4	21.96	21.85	21.86		
3	QPSK	8	7	21.86	21.81	21.61		
3	QPSK	15	0	21.85	21.88	21.78	23.5	1
3	16QAM	1	0	22.28	22.29	22.11		
3	16QAM	1	8	22.01	22.12	21.87		
3	16QAM	1	14	21.99	21.85	21.79	22.5	2
3	16QAM	8	0	20.94	21.01	20.91		
3	16QAM	8	4	20.96	20.87	20.88		
3	16QAM	8	7	20.94	20.87	20.65	22.5	2
3	16QAM	8	4	20.96	20.87	20.88		
3	16QAM	8	7	20.94	20.87	20.65		



3	16QAM	15	0	20.89	20.99	20.79		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.87	22.99	22.82	24.5	0
1.4	QPSK	1	3	22.77	22.82	22.57		
1.4	QPSK	1	5	22.67	22.53	22.58		
1.4	QPSK	3	0	21.71	21.85	21.70		
1.4	QPSK	3	1	21.79	21.84	21.75		
1.4	QPSK	3	3	21.86	21.75	21.60		
1.4	QPSK	6	0	21.80	21.86	21.61	23.5	1
1.4	16QAM	1	0	22.18	22.19	22.11	23.5	1
1.4	16QAM	1	3	21.83	21.92	21.84		
1.4	16QAM	1	5	21.92	21.69	21.71		
1.4	16QAM	3	0	20.81	20.95	20.87		
1.4	16QAM	3	1	20.94	20.69	20.85		
1.4	16QAM	3	3	20.74	20.81	20.69		
1.4	16QAM	6	0	20.69	20.94	20.74	22.5	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	23.18			24.5	0
10	QPSK	1	25	23.08				
10	QPSK	1	49	23.10				
10	QPSK	25	0	22.15			23.5	1
10	QPSK	25	12	22.12				
10	QPSK	25	25	22.04				
10	QPSK	50	0	22.13				
10	16QAM	1	0	22.40			23.5	1
10	16QAM	1	25	22.45				
10	16QAM	1	49	22.42				
10	16QAM	25	0	21.26			22.5	2
10	16QAM	25	12	21.25				
10	16QAM	25	25	21.17				
10	16QAM	50	0	21.25				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.12	23.14	23.12	24.5	0
5	QPSK	1	12	22.81	22.89	22.89		
5	QPSK	1	24	22.99	22.99	22.96		
5	QPSK	12	0	22.07	22.11	22.08	23.5	1
5	QPSK	12	7	22.03	22.05	22.03		
5	QPSK	12	13	21.83	21.91	21.82		
5	QPSK	25	0	22.03	22.05	22.05		
5	16QAM	1	0	22.33	22.37	22.34	23.5	1
5	16QAM	1	12	22.19	22.28	22.21		
5	16QAM	1	24	22.26	22.33	22.31		
5	16QAM	12	0	21.13	21.17	21.08	22.5	2
5	16QAM	12	7	21.00	21.02	20.95		
5	16QAM	12	13	21.06	21.08	21.01		
5	16QAM	25	0	21.04	21.05	21.03		



<LTE Band 14>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0	23.16			24.5	0
10	QPSK	1	25	23.10				
10	QPSK	1	49	23.13				
10	QPSK	25	0	22.21			23.5	1
10	QPSK	25	12	22.18				
10	QPSK	25	25	22.13				
10	QPSK	50	0	22.18			23.5	1
10	16QAM	1	0	22.50				
10	16QAM	1	25	22.45				
10	16QAM	1	49	22.49			22.5	2
10	16QAM	25	0	21.34				
10	16QAM	25	12	21.29				
10	16QAM	25	25	21.24				
10	16QAM	50	0	21.27				
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	23.05	23.12	23.02	24.5	0
5	QPSK	1	12	22.96	22.96	22.92		
5	QPSK	1	24	23.00	23.00	22.95		
5	QPSK	12	0	22.06	22.12	22.03	23.5	1
5	QPSK	12	7	22.11	22.12	22.08		
5	QPSK	12	13	21.91	21.97	21.90		
5	QPSK	25	0	22.11	22.12	22.02	23.5	1
5	16QAM	1	0	22.31	22.41	22.35		
5	16QAM	1	12	22.30	22.32	22.26		
5	16QAM	1	24	22.32	22.40	22.33	22.5	2
5	16QAM	12	0	21.18	21.22	21.20		
5	16QAM	12	7	21.00	21.12	21.04		
5	16QAM	12	13	21.04	21.13	21.13		
5	16QAM	25	0	20.99	21.08	21.02		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.00	23.11	23.05	24.5	0
20	QPSK	1	49	22.74	22.63	22.92		
20	QPSK	1	99	22.69	22.73	22.61		
20	QPSK	50	0	21.92	22.06	22.00	23.5	1
20	QPSK	50	24	21.81	21.72	21.99		
20	QPSK	50	50	21.76	21.69	21.70		
20	QPSK	100	0	21.80	21.84	21.83	23.5	1
20	16QAM	1	0	22.14	22.15	22.15		
20	16QAM	1	49	22.07	22.03	22.18		
20	16QAM	1	99	21.94	22.05	21.88	22.5	2
20	16QAM	50	0	20.98	20.89	21.16		
20	16QAM	50	24	20.90	20.87	21.05		
20	16QAM	50	50	20.85	20.78	20.70	22.5	2
20	16QAM	100	0	20.91	20.84	20.88		
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.89	22.93	22.92	24.5	0
15	QPSK	1	37	22.72	22.53	22.78		
15	QPSK	1	74	22.62	22.58	22.54		
15	QPSK	36	0	21.80	21.60	21.98	23.5	1
15	QPSK	36	20	21.70	21.61	21.79		
15	QPSK	36	39	21.63	21.58	21.68		
15	QPSK	75	0	21.63	21.61	21.77	23.5	1
15	16QAM	1	0	21.99	22.10	21.99		
15	16QAM	1	37	21.94	21.85	22.11		
15	16QAM	1	74	21.91	21.91	21.72	22.5	2
15	16QAM	36	0	20.97	20.85	20.97		
15	16QAM	36	20	20.80	20.69	21.03		
15	16QAM	36	39	20.74	20.60	20.66	22.5	2
15	16QAM	75	0	20.81	20.78	20.82		
Channel				132022	132322	132622		
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.77	22.87	22.86	24.5	0
10	QPSK	1	25	22.52	22.51	22.63		
10	QPSK	1	49	22.59	22.53	22.56		
10	QPSK	25	0	21.67	21.53	21.82	23.5	1
10	QPSK	25	12	21.67	21.58	21.79		
10	QPSK	25	25	21.59	21.57	21.68		
10	QPSK	50	0	21.59	21.55	21.67	23.5	1
10	16QAM	1	0	21.92	21.90	21.87		
10	16QAM	1	25	21.82	21.71	21.97		
10	16QAM	1	49	21.75	21.83	21.71	22.5	2
10	16QAM	25	0	20.89	20.72	20.79		
10	16QAM	25	12	20.67	20.51	20.93		
10	16QAM	25	25	20.68	20.58	20.62		



10	16QAM	50	0	20.62	20.61	20.63		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.67	22.78	22.76	24.5	0
5	QPSK	1	12	22.63	22.70	22.73		
5	QPSK	1	24	22.72	22.56	22.66		
5	QPSK	12	0	21.68	21.64	21.97	23.5	1
5	QPSK	12	7	21.71	21.55	21.94		
5	QPSK	12	13	21.77	21.54	21.78		
5	QPSK	25	0	21.67	21.65	21.87		
5	16QAM	1	0	21.92	22.04	21.93	23.5	1
5	16QAM	1	12	21.90	21.73	22.08		
5	16QAM	1	24	21.94	21.85	21.77		
5	16QAM	12	0	21.00	20.82	20.99	22.5	2
5	16QAM	12	7	20.68	20.60	21.09		
5	16QAM	12	13	20.76	20.59	20.67		
5	16QAM	25	0	20.75	20.77	20.68		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.51	22.64	22.74	24.5	0
3	QPSK	1	8	22.68	22.84	22.94		
3	QPSK	1	14	22.50	22.53	22.66		
3	QPSK	8	0	22.70	22.48	22.58	23.5	1
3	QPSK	8	4	21.66	21.55	21.90		
3	QPSK	8	7	21.70	21.68	21.89		
3	QPSK	15	0	21.63	21.58	21.64		
3	16QAM	1	0	21.60	21.54	21.80	23.5	1
3	16QAM	1	8	21.77	21.86	21.87		
3	16QAM	1	14	21.85	21.64	21.90		
3	16QAM	8	0	21.87	21.80	21.74	22.5	2
3	16QAM	8	4	20.84	20.81	20.97		
3	16QAM	8	7	20.51	20.52	20.95		
3	16QAM	15	0	20.60	20.53	20.54		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.42	22.53	22.56	24.5	0
1.4	QPSK	1	3	22.13	22.29	22.42		
1.4	QPSK	1	5	22.41	22.21	22.24		
1.4	QPSK	3	0	21.35	21.31	21.53		
1.4	QPSK	3	1	21.50	21.14	21.55		
1.4	QPSK	3	3	21.38	21.18	21.31	23.5	1
1.4	16QAM	1	0	21.37	21.46	21.52	23.5	1
1.4	16QAM	1	3	21.54	21.44	21.62		
1.4	16QAM	1	5	21.67	21.46	21.41		
1.4	16QAM	3	0	20.57	20.54	20.59		
1.4	16QAM	3	1	20.25	20.13	20.59		
1.4	16QAM	3	3	20.30	20.23	20.27		
1.4	16QAM	6	0	20.40	20.18	20.28		



<LTE Carrier Aggregation combinations>

General Note:

- 1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
- 2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation	
Inter-Band	
Band 2	CA_2A-5A
	CA_2A-12A
Band 4	4A-5A
	4A-12A

2CC Downlink Carrier Aggregation		
Band 66	Intra-Band Contiguous	Intra-Band non-Contiguous
	CA_66B	66A-66A
	CA_66C	

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC						SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		2	20	1880	18900	QPSK	1	0	5	10	881.5	2525	23.05	23.09
		2	20	1880	18900	QPSK	1	0	12	10	737.5	5095	23.02	23.09
		2	20	1880	18900	QPSK	1	0	13	10	751	5230	23.01	23.06
		4	20	1732.5	20175	QPSK	1	0	5	10	881.5	2525	23.01	23.06
		4	20	1732.5	20175	QPSK	1	0	12	10	737.5	5095	23.02	23.06
		4	20	1732.5	20175	QPSK	1	0	13	10	751	5230	22.99	23.06
Intra-Band	Non-Contiguous	66	20	1745	132322	QPSK	1	0	66	5	2197.5	67311	23.05	23.11
	Contiguous	66	20	1745	132322	QPSK	1	0	66	10	2154.90	66885	23.06	23.11
		66	20	1745	132322	QPSK	1	0	66	20	2164.80	66984	23.06	23.11



12. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	19.40	19.50	98.97
		6	2437	19.40	19.50	
		11	2462	19.10	19.50	
	802.11g 6Mbps	1	2412	14.20	14.50	94.75
		6	2437	18.20	18.50	
		11	2462	14.30	14.50	
	802.11n-HT20 MCS0	1	2412	13.20	13.50	94.13
		6	2437	18.30	18.50	
		11	2462	13.30	13.50	
	802.11ac-VHT20 MCS0	1	2412	13.10	13.50	94.62
		6	2437	18.20	18.50	
		11	2462	13.20	13.50	



<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.10	17.50	94.72
		40	5200	16.80	17.50	
		44	5220	16.80	17.50	
		48	5240	17.20	17.50	
	802.11n-HT20 MCS0	36	5180	17.10	17.50	94.62
		40	5200	17.10	17.50	
		44	5220	17.10	17.50	
		48	5240	17.30	17.50	
	802.11n-HT40 MCS0	38	5190	15.70	16.00	90.80
		46	5230	17.20	17.50	
	802.11ac-VHT20 MCS0	36	5180	17.00	17.50	94.62
		40	5200	17.00	17.50	
		44	5220	17.00	17.50	
		48	5240	17.20	17.50	
	802.11ac-VHT40 MCS0	38	5190	15.60	16.00	91.38
		46	5230	17.10	17.50	
802.11ac-VHT80 MCS0	42	5210	15.60	16.00	88.53	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	18.20	18.50	94.72
		56	5280	18.20	18.50	
		60	5300	18.30	18.50	
		64	5320	18.30	18.50	
	802.11n-HT20 MCS0	52	5260	18.20	18.50	94.62
		56	5280	18.20	18.50	
		60	5300	18.20	18.50	
		64	5320	18.20	18.50	
	802.11n-HT40 MCS0	54	5270	17.40	17.50	90.80
		62	5310	17.40	17.50	
	802.11ac-VHT20 MCS0	52	5260	18.10	18.50	94.62
		56	5280	18.10	18.50	
		60	5300	18.10	18.50	
		64	5320	18.10	18.50	
	802.11ac-VHT40 MCS0	54	5270	17.30	17.50	91.38
		62	5310	17.30	17.50	
802.11ac-VHT80 MCS0	58	5290	17.40	17.50	88.53	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	18.40	18.50	94.72
		116	5580	18.40	18.50	
		124	5620	18.40	18.50	
		132	5660	18.40	18.50	
		140	5700	18.40	18.50	
	802.11n-HT20 MCS0	100	5500	18.30	18.50	94.62
		116	5580	18.40	18.50	
		124	5620	18.30	18.50	
		132	5660	18.30	18.50	
140		5700	18.30	18.50		
802.11n-HT40 MCS0	102	5510	17.20	17.50	90.80	
	110	5550	17.20	17.50		
	126	5630	17.20	17.50		
	134	5670	17.20	17.50		
802.11ac-VHT20 MCS0	100	5500	18.20	18.50	94.62	
	116	5580	18.30	18.50		
	124	5620	18.20	18.50		
	132	5660	18.20	18.50		
	140	5700	18.20	18.50		
802.11ac-VHT40 MCS0	102	5510	17.10	17.50	91.38	
	110	5550	17.10	17.50		
	126	5630	17.10	17.50		
	134	5670	17.10	17.50		
802.11ac-VHT80 MCS0	106	5530	17.20	17.50	88.53	
	122	5610	17.20	17.50		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	18.50	18.50	94.72
		157	5785	18.30	18.50	
		165	5825	18.50	18.50	
	802.11n-HT20 MCS0	149	5745	18.50	18.50	94.62
		157	5785	18.50	18.50	
		165	5825	18.40	18.50	
	802.11n-HT40 MCS0	151	5755	17.30	17.50	90.80
		159	5795	17.50	17.50	
	802.11ac-VHT20 MCS0	149	5745	18.40	18.50	94.62
157		5785	18.40	18.50		
165		5825	18.30	18.50		
802.11ac-VHT40 MCS0	151	5755	17.20	17.50	91.38	
	159	5795	17.40	17.50		
802.11ac-VHT80 MCS0	155	5775	17.20	17.50	88.53	




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)			Tune-up Limit		
			1Mbps	2Mbps	3Mbps	1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	8.89	6.18	6.19	10.00	8.10	8.10
	CH 39	2441	8.08	5.06	5.07	9.30	7.10	7.10
	CH 78	2480	8.69	6.16	6.17	9.30	7.40	7.40


Mode	Channel	Frequency (MHz)	Average power (dBm)		Tune-up Limit	
			1Mbps	2Mbps	1Mbps	2Mbps
LE	CH 00	2402	-2.70	-2.70	1.60	1.60
	CH 19	2440	-3.30	-3.30	1.10	1.10
	CH 39	2480	-1.60	-1.60	1.60	1.60

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.13% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

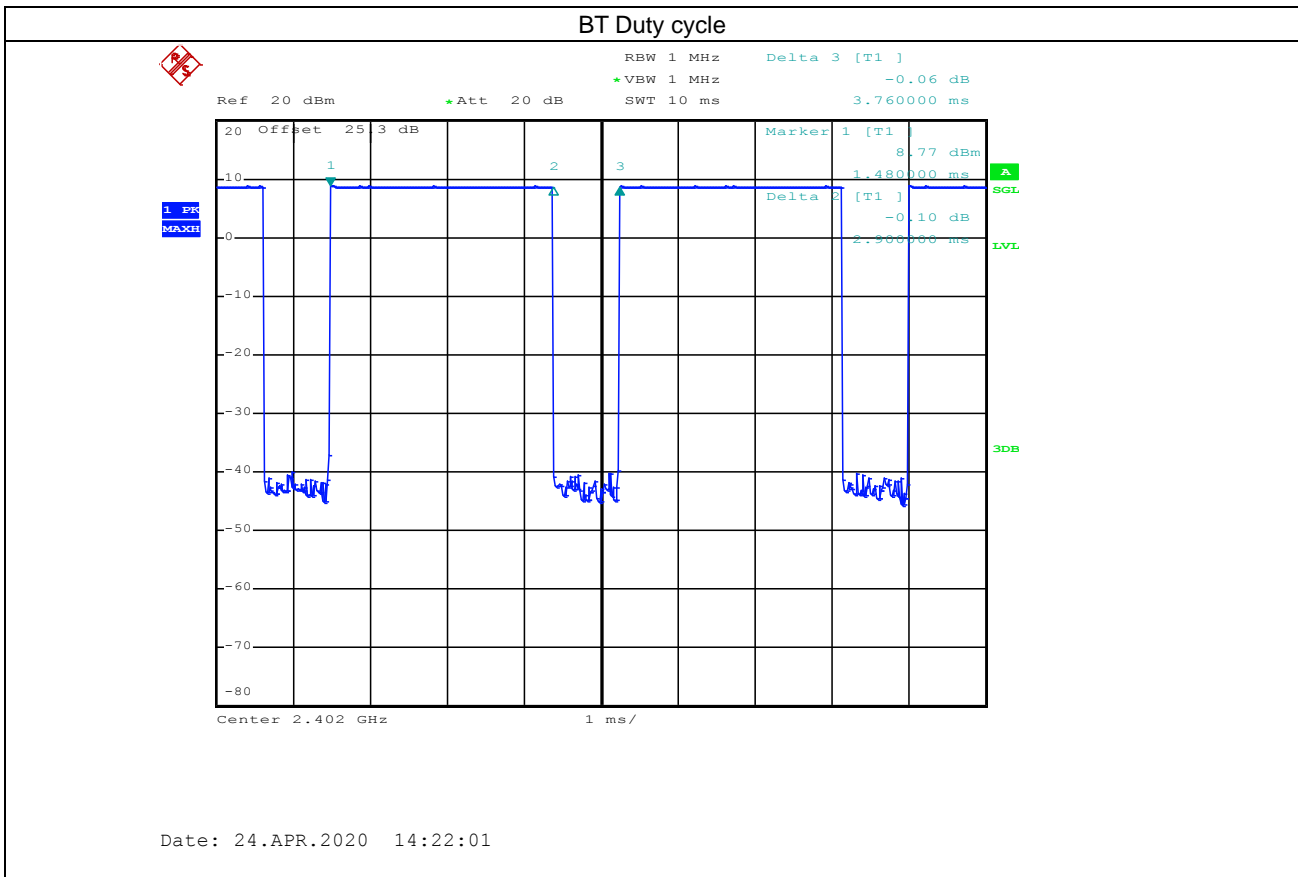

13. Antenna Location

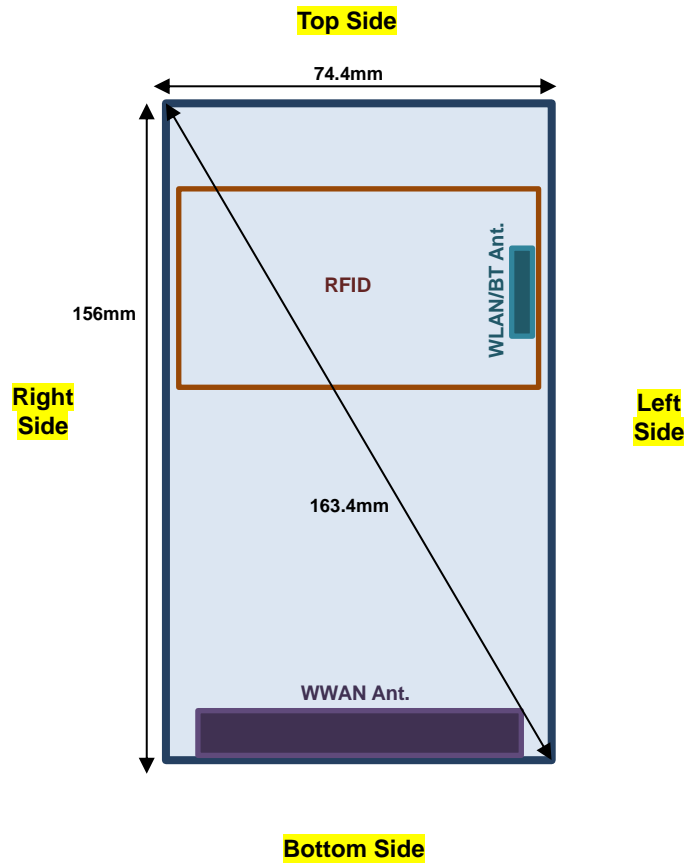

Back View

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device only bottom side SAR for WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of WCDMA B2, therefore product specific SAR is necessary.
6. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA , and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA .

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 4 SAR test was covered by Band 66; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. Since the same RF amplifier and antenna is used for WiFi / Bluetooth transmitter and the Bluetooth output power is least 2 dB below the output power of WiFi, therefore, for Bluetooth SAR testing is selected worst position from each exposure condition to be tested.



14.1 Head SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	23.62	24.50	1.225	-0.01	0.382	0.468
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	23.60	24.50	1.230	0.09	0.153	0.188
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9538	1907.6	23.43	24.50	1.279	-0.07	0.272	0.348
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	23.62	24.50	1.225	0.08	0.201	0.246
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	23.62	24.50	1.225	0.04	0.286	0.350
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	23.62	24.50	1.225	-0.11	0.218	0.267
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4182	836.4	23.81	24.50	1.172	0.01	0.420	0.492
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4182	836.4	23.81	24.50	1.172	0.09	0.248	0.291
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4182	836.4	23.81	24.50	1.172	-0.10	0.445	0.522
02	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	23.66	24.50	1.213	0.14	0.456	0.553
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	23.27	24.50	1.327	0.14	0.386	0.512
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4182	836.4	23.81	24.50	1.172	0.10	0.228	0.267

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	18900	1880	23.09	24.50	1.384	0.01	0.415	0.574
03	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	18700	1860	23.06	24.50	1.393	0.15	0.426	0.593
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	19100	1900	23.01	24.50	1.409	0.01	0.346	0.488
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	18900	1880	22.16	23.50	1.361	-0.06	0.307	0.418
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	18900	1880	23.09	24.50	1.384	-0.04	0.233	0.322
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	18900	1880	22.16	23.50	1.361	-0.01	0.174	0.237
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	18900	1880	23.09	24.50	1.384	0.12	0.342	0.473
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	18900	1880	22.16	23.50	1.361	-0.04	0.257	0.350
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	18900	1880	23.09	24.50	1.384	-0.04	0.334	0.462
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	18900	1880	22.16	23.50	1.361	0.02	0.248	0.338
04	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	23.88	24.50	1.153	-0.08	0.463	0.534
	LTE Band 5	10M	QPSK	25	25	Right Cheek	0mm	20525	836.5	22.89	23.50	1.151	0.04	0.353	0.406
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	23.88	24.50	1.153	-0.04	0.204	0.235
	LTE Band 5	10M	QPSK	25	25	Right Tilted	0mm	20525	836.5	22.89	23.50	1.151	-0.05	0.149	0.171
	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	23.88	24.50	1.153	-0.12	0.404	0.466
	LTE Band 5	10M	QPSK	25	25	Left Cheek	0mm	20525	836.5	22.89	23.50	1.151	0.01	0.307	0.353
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	23.88	24.50	1.153	-0.12	0.168	0.194
	LTE Band 5	10M	QPSK	25	25	Left Tilted	0mm	20525	836.5	22.89	23.50	1.151	-0.10	0.124	0.143
05	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	23.11	24.50	1.377	-0.13	0.232	0.320
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	23095	707.5	22.05	23.50	1.396	-0.10	0.166	0.232
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	23.11	24.50	1.377	-0.08	0.113	0.156
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	23095	707.5	22.05	23.50	1.396	-0.08	0.087	0.121
	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	23.11	24.50	1.377	-0.11	0.221	0.304
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	23095	707.5	22.05	23.50	1.396	-0.09	0.171	0.239
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	23.11	24.50	1.377	-0.06	0.220	0.303
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	23095	707.5	22.05	23.50	1.396	-0.08	0.171	0.239



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	23.18	24.50	1.355	0.02	0.401	0.543
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	22.15	23.50	1.365	0.01	0.341	0.465
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	23.18	24.50	1.355	0.02	0.257	0.348
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	22.15	23.50	1.365	0.09	0.224	0.306
06	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	23.18	24.50	1.355	0.01	0.440	0.596
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	22.15	23.50	1.365	0.15	0.353	0.482
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	23.18	24.50	1.355	0.00	0.257	0.348
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	22.15	23.50	1.365	0.10	0.218	0.297
	LTE Band 14	10M	QPSK	1	0	Right Cheek	0mm	23330	793	23.16	24.50	1.361	0.15	0.301	0.410
	LTE Band 14	10M	QPSK	25	0	Right Cheek	0mm	23330	793	22.21	23.50	1.346	0.07	0.237	0.319
	LTE Band 14	10M	QPSK	1	0	Right Tilted	0mm	23330	793	23.16	24.50	1.361	0.10	0.206	0.280
	LTE Band 14	10M	QPSK	25	0	Right Tilted	0mm	23330	793	22.21	23.50	1.346	0.14	0.159	0.214
07	LTE Band 14	10M	QPSK	1	0	Left Cheek	0mm	23330	793	23.16	24.50	1.361	-0.07	0.392	0.534
	LTE Band 14	10M	QPSK	25	0	Left Cheek	0mm	23330	793	22.21	23.50	1.346	0.14	0.239	0.322
	LTE Band 14	10M	QPSK	1	0	Left Tilted	0mm	23330	793	23.16	24.50	1.361	0.19	0.166	0.226
	LTE Band 14	10M	QPSK	25	0	Left Tilted	0mm	23330	793	22.21	23.50	1.346	0.17	0.129	0.174
	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	132322	1745	23.11	24.50	1.377	0.16	0.344	0.474
	LTE Band 66	20M	QPSK	50	0	Right Cheek	0mm	132322	1745	22.06	23.50	1.393	0.12	0.276	0.385
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	132322	1745	23.11	24.50	1.377	0.14	0.420	0.578
	LTE Band 66	20M	QPSK	50	0	Right Tilted	0mm	132322	1745	22.06	23.50	1.393	0.20	0.341	0.475
08	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132322	1745	23.11	24.50	1.377	0.09	0.450	0.620
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132072	1720	23.00	24.50	1.413	0.04	0.384	0.542
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132572	1770	23.05	24.50	1.396	0.02	0.443	0.619
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	132322	1745	22.06	23.50	1.393	0.11	0.394	0.549
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	132322	1745	23.11	24.50	1.377	0.11	0.441	0.607
	LTE Band 66	20M	QPSK	50	0	Left Tilted	0mm	132322	1745	22.06	23.50	1.393	0.15	0.395	0.550

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	6	2437	19.40	19.50	1.023	98.97	1.010	0.06	0.409	0.423
09	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	1	2412	19.40	19.50	1.023	98.97	1.010	0.15	0.436	0.451
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	11	2462	19.10	19.50	1.096	98.97	1.010	-0.12	0.329	0.364
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	6	2437	19.40	19.50	1.023	98.97	1.010	0.04	0.157	0.162
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	6	2437	19.40	19.50	1.023	98.97	1.010	-0.08	0.230	0.238
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	6	2437	19.40	19.50	1.023	98.97	1.010	0.08	0.104	0.107
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	64	5320	18.30	18.50	1.047	94.72	1.056	0.18	0.080	0.088
10	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	52	5260	18.20	18.50	1.072	94.72	1.056	-0.12	0.091	0.103
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	56	5280	18.20	18.50	1.072	94.72	1.056	0.14	0.084	0.095
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	60	5300	18.30	18.50	1.047	94.72	1.056	0.16	0.075	0.083
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	64	5320	18.30	18.50	1.047	94.72	1.056	0.11	0.045	0.050
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	64	5320	18.30	18.50	1.047	94.72	1.056	0.01	0.075	0.083
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	64	5320	18.30	18.50	1.047	94.72	1.056	0.01	0.059	0.065
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	100	5500	18.40	18.50	1.023	94.72	1.056	0.15	0.032	0.035
11	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	116	5580	18.40	18.50	1.023	94.72	1.056	0.19	0.033	0.036
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	124	5620	18.40	18.50	1.023	94.72	1.056	0.09	0.028	0.030
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	132	5660	18.40	18.50	1.023	94.72	1.056	-0.04	0.029	0.031
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	140	5700	18.40	18.50	1.023	94.72	1.056	0.16	0.032	0.035
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	100	5500	18.40	18.50	1.023	94.72	1.056	-0.12	0.018	0.020
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	100	5500	18.40	18.50	1.023	94.72	1.056	0.15	0.025	0.027
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	100	5500	18.40	18.50	1.023	94.72	1.056	0.16	0.028	0.031
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	149	5745	18.50	18.50	1.000	94.72	1.056	-0.15	0.043	0.046
12	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	157	5785	18.30	18.50	1.047	94.72	1.056	0.17	0.044	0.049
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	165	5825	18.50	18.50	1.000	94.72	1.056	-0.11	0.043	0.046
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	149	5745	18.50	18.50	1.000	94.72	1.056	0.13	0.025	0.027
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	149	5745	18.50	18.50	1.000	94.72	1.056	0.11	0.034	0.036
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	149	5745	18.50	18.50	1.000	94.72	1.056	0.16	0.040	0.042

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	Bluetooth	1Mbps	Right Cheek	0mm	00	2402	8.89	10.00	1.291	77.13	1.080	0.08	0.014	0.020
	Bluetooth	1Mbps	Right Cheek	0mm	39	2441	8.08	9.30	1.324	77.13	1.080	0.09	0.011	0.016
	Bluetooth	1Mbps	Right Cheek	0mm	78	2480	8.69	9.30	1.151	77.13	1.080	0.04	0.012	0.015
	Bluetooth	1Mbps	Right Tilted	0mm	00	2402	8.89	10.00	1.291	77.13	1.080	-0.01	0.012	0.017
	Bluetooth	1Mbps	Left Cheek	0mm	00	2402	8.89	10.00	1.291	77.13	1.080	0.11	0.001	0.001
	Bluetooth	1Mbps	Left Tilted	0mm	00	2402	8.89	10.00	1.291	77.13	1.080	-0.12	0.001	0.001



14.2 Hotspot SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	23.62	24.50	1.225	-0.01	0.718	0.879
	WCDMA II	RMC 12.2Kbps	Front	10mm	9262	1852.4	23.60	24.50	1.230	0.07	1.020	1.255
14	WCDMA II	RMC 12.2Kbps	Front	10mm	9538	1907.6	23.43	24.50	1.279	0.13	1.010	1.292
	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	23.62	24.50	1.225	0.01	0.423	0.518
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	9400	1880	23.62	24.50	1.225	0.02	0.214	0.262
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	9400	1880	23.62	24.50	1.225	0.02	0.216	0.265
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	23.62	24.50	1.225	0.02	0.414	0.507
	WCDMA V	RMC 12.2Kbps	Front	10mm	4182	836.4	23.81	24.50	1.172	-0.06	0.352	0.413
15	WCDMA V	RMC 12.2Kbps	Front	10mm	4132	826.4	23.66	24.50	1.213	-0.04	0.404	0.490
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	23.27	24.50	1.327	-0.04	0.307	0.408
	WCDMA V	RMC 12.2Kbps	Back	10mm	4182	836.4	23.81	24.50	1.172	-0.02	0.335	0.393
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4182	836.4	23.81	24.50	1.172	-0.05	0.227	0.266
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	4182	836.4	23.81	24.50	1.172	-0.04	0.272	0.319
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4182	836.4	23.81	24.50	1.172	-0.06	0.047	0.055

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	18900	1880	23.09	24.50	1.384	-0.08	0.776	1.074
	LTE Band 2	20M	QPSK	1	0	Front	10mm	18700	1860	23.06	24.50	1.393	0.07	0.740	1.031
16	LTE Band 2	20M	QPSK	1	0	Front	10mm	19100	1900	23.01	24.50	1.409	-0.02	0.786	1.108
	LTE Band 2	20M	QPSK	50	0	Front	10mm	18900	1880	22.16	23.50	1.361	-0.03	0.604	0.822
	LTE Band 2	20M	QPSK	50	0	Front	10mm	18700	1860	22.08	23.50	1.387	-0.04	0.577	0.800
	LTE Band 2	20M	QPSK	50	0	Front	10mm	19100	1900	21.99	23.50	1.416	-0.05	0.626	0.886
	LTE Band 2	20M	QPSK	100	0	Front	10mm	18900	1880	22.01	23.50	1.409	0.00	0.605	0.853
	LTE Band 2	20M	QPSK	1	0	Back	10mm	18900	1880	23.09	24.50	1.384	-0.07	0.370	0.512
	LTE Band 2	20M	QPSK	50	0	Back	10mm	18900	1880	22.16	23.50	1.361	-0.11	0.282	0.384
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	18900	1880	23.09	24.50	1.384	-0.08	0.139	0.192
	LTE Band 2	20M	QPSK	50	0	Left Side	10mm	18900	1880	22.16	23.50	1.361	-0.04	0.140	0.191
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	18900	1880	23.09	24.50	1.384	-0.04	0.294	0.407
	LTE Band 2	20M	QPSK	50	0	Right Side	10mm	18900	1880	22.16	23.50	1.361	-0.01	0.222	0.302
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	18900	1880	23.09	24.50	1.384	-0.04	0.363	0.502
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	18900	1880	22.16	23.50	1.361	-0.14	0.282	0.384
	LTE Band 5	10M	QPSK	1	0	Front	10mm	20525	836.5	23.88	24.50	1.153	-0.02	0.488	0.563
	LTE Band 5	10M	QPSK	25	25	Front	10mm	20525	836.5	22.89	23.50	1.151	-0.04	0.417	0.480
17	LTE Band 5	10M	QPSK	1	0	Back	10mm	20525	836.5	23.88	24.50	1.153	-0.02	0.614	0.708
	LTE Band 5	10M	QPSK	25	25	Back	10mm	20525	836.5	22.89	23.50	1.151	-0.04	0.512	0.589
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	20525	836.5	23.88	24.50	1.153	0.03	0.358	0.413
	LTE Band 5	10M	QPSK	25	25	Left Side	10mm	20525	836.5	22.89	23.50	1.151	-0.04	0.411	0.473
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	20525	836.5	23.88	24.50	1.153	-0.06	0.365	0.421
	LTE Band 5	10M	QPSK	25	25	Right Side	10mm	20525	836.5	22.89	23.50	1.151	-0.04	0.358	0.412
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	20525	836.5	23.88	24.50	1.153	-0.06	0.053	0.061
	LTE Band 5	10M	QPSK	25	25	Bottom Side	10mm	20525	836.5	22.89	23.50	1.151	-0.02	0.042	0.048



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	23.11	24.50	1.377	-0.14	0.323	0.445
	LTE Band 12	10M	QPSK	25	0	Front	10mm	23095	707.5	22.05	23.50	1.396	-0.09	0.243	0.339
18	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	23.11	24.50	1.377	0.01	0.450	0.620
	LTE Band 12	10M	QPSK	25	0	Back	10mm	23095	707.5	22.05	23.50	1.396	-0.04	0.354	0.494
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	23095	707.5	23.11	24.50	1.377	-0.04	0.247	0.340
	LTE Band 12	10M	QPSK	25	0	Left Side	10mm	23095	707.5	22.05	23.50	1.396	-0.05	0.196	0.274
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	23095	707.5	23.11	24.50	1.377	-0.05	0.234	0.322
	LTE Band 12	10M	QPSK	25	0	Right Side	10mm	23095	707.5	22.05	23.50	1.396	-0.03	0.188	0.263
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	23.11	24.50	1.377	-0.05	0.021	0.029
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10mm	23095	707.5	22.05	23.50	1.396	-0.05	0.015	0.021
	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	23.18	24.50	1.355	-0.06	0.472	0.640
	LTE Band 13	10M	QPSK	25	0	Front	10mm	23230	782	22.15	23.50	1.365	-0.06	0.391	0.534
19	LTE Band 13	10M	QPSK	1	0	Back	10mm	23230	782	23.18	24.50	1.355	-0.08	0.533	0.722
	LTE Band 13	10M	QPSK	25	0	Back	10mm	23230	782	22.15	23.50	1.365	-0.06	0.453	0.618
	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	23230	782	23.18	24.50	1.355	0.02	0.391	0.530
	LTE Band 13	10M	QPSK	25	0	Left Side	10mm	23230	782	22.15	23.50	1.365	-0.05	0.335	0.457
	LTE Band 13	10M	QPSK	1	0	Right Side	10mm	23230	782	23.18	24.50	1.355	-0.07	0.377	0.511
	LTE Band 13	10M	QPSK	25	0	Right Side	10mm	23230	782	22.15	23.50	1.365	-0.01	0.324	0.442
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	23230	782	23.18	24.50	1.355	0.04	0.031	0.042
	LTE Band 13	10M	QPSK	25	0	Bottom Side	10mm	23230	782	22.15	23.50	1.365	-0.08	0.026	0.035
	LTE Band 14	10M	QPSK	1	0	Front	10mm	23330	793	23.16	24.50	1.361	-0.05	0.487	0.663
	LTE Band 14	10M	QPSK	25	0	Front	10mm	23330	793	22.21	23.50	1.346	-0.06	0.391	0.526
20	LTE Band 14	10M	QPSK	1	0	Back	10mm	23330	793	23.16	24.50	1.361	-0.06	0.523	0.712
	LTE Band 14	10M	QPSK	25	0	Back	10mm	23330	793	22.21	23.50	1.346	-0.05	0.415	0.559
	LTE Band 14	10M	QPSK	1	0	Left Side	10mm	23330	793	23.16	24.50	1.361	-0.07	0.388	0.528
	LTE Band 14	10M	QPSK	25	0	Left Side	10mm	23330	793	22.21	23.50	1.346	-0.10	0.306	0.412
	LTE Band 14	10M	QPSK	1	0	Right Side	10mm	23330	793	23.16	24.50	1.361	0.08	0.386	0.526
	LTE Band 14	10M	QPSK	25	0	Right Side	10mm	23330	793	22.21	23.50	1.346	-0.02	0.307	0.413
	LTE Band 14	10M	QPSK	1	0	Bottom Side	10mm	23330	793	23.16	24.50	1.361	-0.03	0.032	0.044
	LTE Band 14	10M	QPSK	25	0	Bottom Side	10mm	23330	793	22.21	23.50	1.346	-0.10	0.023	0.031
	LTE Band 66	20M	QPSK	1	0	Front	10mm	132322	1745	23.11	24.50	1.377	0.06	0.632	0.870
	LTE Band 66	20M	QPSK	1	0	Front	10mm	132072	1720	23.00	24.50	1.413	0.00	0.658	0.929
21	LTE Band 66	20M	QPSK	1	0	Front	10mm	132572	1770	23.05	24.50	1.396	0.08	0.811	1.132
	LTE Band 66	20M	QPSK	50	0	Front	10mm	132322	1745	22.06	23.50	1.393	0.05	0.560	0.780
	LTE Band 66	20M	QPSK	100	0	Front	10mm	132322	1745	21.84	23.50	1.396	0.05	0.554	0.774
	LTE Band 66	20M	QPSK	1	0	Back	10mm	132322	1745	23.11	24.50	1.377	0.03	0.356	0.490
	LTE Band 66	20M	QPSK	50	0	Back	10mm	132322	1745	22.06	23.50	1.393	-0.16	0.295	0.411
	LTE Band 66	20M	QPSK	1	0	Left Side	10mm	132322	1745	23.11	24.50	1.377	-0.01	0.224	0.308
	LTE Band 66	20M	QPSK	50	0	Left Side	10mm	132322	1745	22.06	23.50	1.393	0.06	0.190	0.265
	LTE Band 66	20M	QPSK	1	0	Right Side	10mm	132322	1745	23.11	24.50	1.377	0.06	0.331	0.456
	LTE Band 66	20M	QPSK	50	0	Right Side	10mm	132322	1745	22.06	23.50	1.393	-0.01	0.293	0.408
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	132322	1745	23.11	24.50	1.377	-0.03	0.285	0.393
	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	132322	1745	22.06	23.50	1.393	0.05	0.224	0.312

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	6	2437	19.40	19.50	1.023	98.97	1.010	0.04	0.128	0.132
22	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	6	2437	19.40	19.50	1.023	98.97	1.010	-0.11	0.476	0.492
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	19.40	19.50	1.023	98.97	1.010	-0.01	0.433	0.448
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	11	2462	19.10	19.50	1.096	98.97	1.010	-0.08	0.353	0.391
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	6	2437	19.40	19.50	1.023	98.97	1.010	0.01	0.473	0.489
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	6	2437	19.40	19.50	1.023	98.97	1.010	0.08	0.095	0.098
	WLAN5GHz	802.11a 6Mbps	Front	10mm	48	5240	17.20	17.50	1.072	94.72	1.056	-0.11	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Back	10mm	48	5240	17.20	17.50	1.072	94.72	1.056	0.11	0.207	0.234
23	WLAN5GHz	802.11a 6Mbps	Back	10mm	36	5180	17.10	17.50	1.096	94.72	1.056	0.14	0.214	0.247
	WLAN5GHz	802.11a 6Mbps	Back	10mm	40	5200	16.80	17.50	1.175	94.72	1.056	0.08	0.186	0.230
	WLAN5GHz	802.11a 6Mbps	Back	10mm	44	5220	16.80	17.50	1.175	94.72	1.056	0.06	0.181	0.225
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	48	5240	17.20	17.50	1.072	94.72	1.056	0.15	0.172	0.195
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	48	5240	17.20	17.50	1.072	94.72	1.056	0.16	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Front	10mm	149	5745	18.50	18.50	1.000	94.72	1.056	-0.12	0.001	0.001
24	WLAN5GHz	802.11a 6Mbps	Back	10mm	149	5745	18.50	18.50	1.000	94.72	1.056	-0.06	0.208	0.220
	WLAN5GHz	802.11a 6Mbps	Back	10mm	157	5785	18.30	18.50	1.047	94.72	1.056	-0.13	0.185	0.205
	WLAN5GHz	802.11a 6Mbps	Back	10mm	165	5825	18.50	18.50	1.000	94.72	1.056	0.01	0.186	0.196
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	149	5745	18.50	18.50	1.000	94.72	1.056	0.15	0.192	0.203
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	149	5745	18.50	18.50	1.000	94.72	1.056	0.17	0.001	0.001

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	00	2402	8.89	10.00	1.291	77.13	1.080	-0.01	0.001	0.001
	Bluetooth	1Mbps	Back	10mm	00	2402	8.89	10.00	1.291	77.13	1.080	0.13	0.011	0.015
	Bluetooth	1Mbps	Back	10mm	39	2441	8.08	9.30	1.324	77.13	1.080	0.06	0.013	0.018
25	Bluetooth	1Mbps	Back	10mm	78	2480	8.69	9.30	1.151	77.13	1.080	0.06	0.015	0.019
	Bluetooth	1Mbps	Left Side	10mm	00	2402	8.89	10.00	1.291	77.13	1.080	0.00	0.010	0.014
	Bluetooth	1Mbps	Top Side	10mm	00	2402	8.89	10.00	1.291	77.13	1.080	-0.04	0.001	0.001

14.3 Body Worn Accessory SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	-	9400	1880	23.62	24.50	1.225	-0.01	0.718	0.879
	WCDMA II	RMC 12.2Kbps	Front	10mm	-	9262	1852.4	23.60	24.50	1.230	0.07	1.020	1.255
26	WCDMA II	RMC 12.2Kbps	Front	10mm	-	9538	1907.6	23.43	24.50	1.279	0.13	1.010	1.292
	WCDMA II	RMC 12.2Kbps	Front	10mm	Headset	9538	1907.6	23.43	24.50	1.279	0.02	1.000	1.279
	WCDMA II	RMC 12.2Kbps	Back	10mm	-	9400	1880	23.62	24.50	1.225	0.01	0.423	0.518
	WCDMA V	RMC 12.2Kbps	Front	10mm	-	4182	836.4	23.81	24.50	1.172	-0.06	0.352	0.413
27	WCDMA V	RMC 12.2Kbps	Front	10mm	-	4132	826.4	23.66	24.50	1.213	-0.04	0.404	0.490
	WCDMA V	RMC 12.2Kbps	Front	10mm	-	4233	846.6	23.27	24.50	1.327	-0.04	0.307	0.408
	WCDMA V	RMC 12.2Kbps	Back	10mm	-	4182	836.4	23.81	24.50	1.172	-0.02	0.335	0.393



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	-	18900	1880	23.09	24.50	1.384	-0.08	0.776	1.074
	LTE Band 2	20M	QPSK	1	0	Front	10mm	-	18700	1860	23.06	24.50	1.393	0.07	0.740	1.031
28	LTE Band 2	20M	QPSK	1	0	Front	10mm	-	19100	1900	23.01	24.50	1.409	-0.02	0.786	1.108
	LTE Band 2	20M	QPSK	50	0	Front	10mm	-	18900	1880	22.16	23.50	1.361	-0.03	0.604	0.822
	LTE Band 2	20M	QPSK	50	0	Front	10mm	-	18700	1860	22.08	23.50	1.387	-0.04	0.577	0.800
	LTE Band 2	20M	QPSK	50	0	Front	10mm	-	19100	1900	21.99	23.50	1.416	-0.05	0.626	0.886
	LTE Band 2	20M	QPSK	100	0	Front	10mm	-	18900	1880	22.01	23.50	1.409	0.00	0.605	0.853
	LTE Band 2	20M	QPSK	1	0	Back	10mm	-	18900	1880	23.09	24.50	1.384	-0.07	0.370	0.512
	LTE Band 2	20M	QPSK	50	0	Back	10mm	-	18900	1880	22.16	23.50	1.361	-0.11	0.282	0.384
	LTE Band 5	10M	QPSK	1	0	Front	10mm	-	20525	836.5	23.88	24.50	1.153	-0.02	0.488	0.563
	LTE Band 5	10M	QPSK	25	25	Front	10mm	-	20525	836.5	22.89	23.50	1.151	-0.04	0.417	0.480
29	LTE Band 5	10M	QPSK	1	0	Back	10mm	-	20525	836.5	23.88	24.50	1.153	-0.02	0.614	0.708
	LTE Band 5	10M	QPSK	25	25	Back	10mm	-	20525	836.5	22.89	23.50	1.151	-0.04	0.512	0.589
	LTE Band 12	10M	QPSK	1	0	Front	10mm	-	23095	707.5	23.11	24.50	1.377	-0.14	0.323	0.445
	LTE Band 12	10M	QPSK	25	0	Front	10mm	-	23095	707.5	22.05	23.50	1.396	-0.09	0.243	0.339
30	LTE Band 12	10M	QPSK	1	0	Back	10mm	-	23095	707.5	23.11	24.50	1.377	0.01	0.450	0.620
	LTE Band 12	10M	QPSK	25	0	Back	10mm	-	23095	707.5	22.05	23.50	1.396	-0.04	0.354	0.494
	LTE Band 13	10M	QPSK	1	0	Front	10mm	-	23230	782	23.18	24.50	1.355	-0.06	0.472	0.640
	LTE Band 13	10M	QPSK	25	0	Front	10mm	-	23230	782	22.15	23.50	1.365	-0.06	0.391	0.534
31	LTE Band 13	10M	QPSK	1	0	Back	10mm	-	23230	782	23.18	24.50	1.355	-0.08	0.533	0.722
	LTE Band 13	10M	QPSK	25	0	Back	10mm	-	23230	782	22.15	23.50	1.365	-0.06	0.453	0.618
	LTE Band 14	10M	QPSK	1	0	Front	10mm	-	23330	793	23.16	24.50	1.361	-0.05	0.487	0.663
	LTE Band 14	10M	QPSK	25	0	Front	10mm	-	23330	793	22.21	23.50	1.346	-0.06	0.391	0.526
32	LTE Band 14	10M	QPSK	1	0	Back	10mm	-	23330	793	23.16	24.50	1.361	-0.06	0.523	0.712
	LTE Band 14	10M	QPSK	25	0	Back	10mm	-	23330	793	22.21	23.50	1.346	-0.05	0.415	0.559
	LTE Band 66	20M	QPSK	1	0	Front	10mm	-	132322	1745	23.11	24.50	1.377	0.06	0.632	0.870
	LTE Band 66	20M	QPSK	1	0	Front	10mm	-	132072	1720	23.00	24.50	1.413	0.00	0.658	0.929
33	LTE Band 66	20M	QPSK	1	0	Front	10mm	-	132572	1770	23.05	24.50	1.396	0.08	0.811	1.132
	LTE Band 66	20M	QPSK	50	0	Front	10mm	-	132322	1745	22.06	23.50	1.393	0.05	0.560	0.780
	LTE Band 66	20M	QPSK	100	0	Front	10mm	-	132322	1745	21.84	23.50	1.396	0.05	0.554	0.774
	LTE Band 66	20M	QPSK	1	0	Back	10mm	-	132322	1745	23.11	24.50	1.377	0.03	0.356	0.490
	LTE Band 66	20M	QPSK	50	0	Back	10mm	-	132322	1745	22.06	23.50	1.393	-0.16	0.295	0.411



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	-	6	2437	19.40	19.50	1.023	98.97	1.010	0.04	0.128	0.132
34	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	-	6	2437	19.40	19.50	1.023	98.97	1.010	-0.11	0.476	0.492
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	-	1	2412	19.40	19.50	1.023	98.97	1.010	-0.01	0.433	0.448
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	-	11	2462	19.10	19.50	1.096	98.97	1.010	-0.08	0.353	0.391
	WLAN5GHz	802.11a 6Mbps	Front	10mm	-	64	5320	18.30	18.50	1.047	94.72	1.056	0.00	0.020	0.022
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	64	5320	18.30	18.50	1.047	94.72	1.056	0.15	0.281	0.311
35	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	52	5260	18.20	18.50	1.072	94.72	1.056	-0.04	0.361	0.408
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	56	5280	18.20	18.50	1.072	94.72	1.056	0.04	0.332	0.376
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	60	5300	18.30	18.50	1.047	94.72	1.056	0.15	0.303	0.335
	WLAN5GHz	802.11a 6Mbps	Front	10mm	-	100	5500	18.40	18.50	1.023	94.72	1.056	0.01	0.024	0.026
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	100	5500	18.40	18.50	1.023	94.72	1.056	0.02	0.190	0.205
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	116	5580	18.40	18.50	1.023	94.72	1.056	0.05	0.242	0.262
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	124	5620	18.40	18.50	1.023	94.72	1.056	0.07	0.231	0.250
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	132	5660	18.40	18.50	1.023	94.72	1.056	-0.07	0.224	0.242
36	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	140	5700	18.40	18.50	1.023	94.72	1.056	-0.13	0.254	0.274
	WLAN5GHz	802.11a 6Mbps	Front	10mm	-	149	5745	18.50	18.50	1.000	94.72	1.056	-0.12	0.001	0.001
37	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	149	5745	18.50	18.50	1.000	94.72	1.056	-0.06	0.208	0.220
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	157	5785	18.30	18.50	1.047	94.72	1.056	-0.13	0.185	0.205
	WLAN5GHz	802.11a 6Mbps	Back	10mm	-	165	5825	18.50	18.50	1.000	94.72	1.056	0.01	0.186	0.196

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	-	00	2402	8.89	10.00	1.291	77.13	1.080	-0.01	0.001	0.001
	Bluetooth	1Mbps	Back	10mm	-	00	2402	8.89	10.00	1.291	77.13	1.080	0.13	0.011	0.015
	Bluetooth	1Mbps	Back	10mm	-	39	2441	8.08	9.30	1.324	77.13	1.080	0.06	0.013	0.018
38	Bluetooth	1Mbps	Back	10mm	-	78	2480	8.69	9.30	1.151	77.13	1.080	0.06	0.015	0.019



14.4 Product Specific SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	0mm	9400	1880	23.62	24.50	1.225	0.08	2.280	2.792
39	WCDMA II	RMC 12.2Kbps	Front	0mm	9262	1852.4	23.60	24.50	1.230	0.13	2.590	3.186
	WCDMA II	RMC 12.2Kbps	Front	0mm	9538	1907.6	23.43	24.50	1.279	0.04	2.350	3.007

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front	0mm	64	5320	18.30	18.50	1.047	94.72	1.056	0.00	0.038	0.042
	WLAN5GHz	802.11a 6Mbps	Back	0mm	64	5320	18.30	18.50	1.047	94.72	1.056	0.12	0.326	0.360
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	64	5320	18.30	18.50	1.047	94.72	1.056	-0.06	0.413	0.457
40	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	52	5260	18.20	18.50	1.072	94.72	1.056	0.09	0.600	0.679
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	56	5280	18.20	18.50	1.072	94.72	1.056	0.07	0.544	0.616
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	60	5300	18.30	18.50	1.047	94.72	1.056	0.03	0.525	0.581
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	64	5320	18.30	18.50	1.047	94.72	1.056	0.03	0.032	0.035
	WLAN5GHz	802.11a 6Mbps	Front	0mm	100	5500	18.40	18.50	1.023	94.72	1.056	0.01	0.025	0.027
	WLAN5GHz	802.11a 6Mbps	Back	0mm	100	5500	18.40	18.50	1.023	94.72	1.056	0.06	0.198	0.214
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	100	5500	18.40	18.50	1.023	94.72	1.056	0.15	0.266	0.287
41	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	116	5580	18.40	18.50	1.023	94.72	1.056	0.06	0.296	0.320
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	124	5620	18.40	18.50	1.023	94.72	1.056	0.09	0.274	0.296
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	132	5660	18.40	18.50	1.023	94.72	1.056	-0.11	0.281	0.304
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	140	5700	18.40	18.50	1.023	94.72	1.056	0.05	0.286	0.309
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	100	5500	18.40	18.50	1.023	94.72	1.056	0.01	0.018	0.019



14.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Front	10mm	9262	1852.4	23.60	24.50	1.230	0.07	1.020	-	1.255
2nd	WCDMA II	RMC 12.2Kbps	Front	10mm	9262	1852.4	23.60	24.50	1.230	0.05	1.010	1.01	1.243
1st	LTE Band 66	20M_QPSK_1_0	Front	10mm	132572	1770	23.05	24.50	1.396	0.08	0.811	-	1.132
2nd	LTE Band 66	20M_QPSK_1_0	Front	10mm	132572	1770	23.05	24.50	1.396	0.01	0.810	1.00	1.131

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Front	0mm	9262	1852.4	23.60	24.50	1.230	0.13	2.590	-	3.186
2nd	WCDMA II	RMC 12.2Kbps	Front	0mm	9262	1852.4	23.60	24.50	1.230	0.16	2.540	1.02	3.125

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured* SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA+ Bluetooth	Yes	Yes	Yes	Yes
4.	LTE + Bluetooth	Yes	Yes	Yes	Yes
5.	WCDMA + WLAN5GHz	Yes	Yes	Yes	Yes
6.	LTE + WLAN5GHz	Yes	Yes	Yes	Yes

General Note:

1. This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. All licensed modes share the same antenna part and cannot transmit simultaneously
4. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)			
WCDMA	WCDMA II	Right Cheek	0.468	0.451	0.103	0.020	0.919	0.571	0.488
		Right Tilted	0.246	0.162	0.050	0.017	0.408	0.296	0.263
		Left Cheek	0.350	0.238	0.083	0.001	0.588	0.433	0.351
		Left Tilted	0.267	0.107	0.065	0.001	0.374	0.332	0.268
	WCDMA V	Right Cheek	0.492	0.451	0.103	0.020	0.943	0.595	0.512
		Right Tilted	0.291	0.162	0.050	0.017	0.453	0.341	0.308
		Left Cheek	0.553	0.238	0.083	0.001	0.791	0.636	0.554
		Left Tilted	0.267	0.107	0.065	0.001	0.374	0.332	0.268
LTE	LTE Band 2	Right Cheek	0.593	0.451	0.103	0.020	1.044	0.696	0.613
		Right Tilted	0.322	0.162	0.050	0.017	0.484	0.372	0.339
		Left Cheek	0.473	0.238	0.083	0.001	0.711	0.556	0.474
		Left Tilted	0.462	0.107	0.065	0.001	0.569	0.527	0.463
	LTE Band 5	Right Cheek	0.534	0.451	0.103	0.020	0.985	0.637	0.554
		Right Tilted	0.235	0.162	0.050	0.017	0.397	0.285	0.252
		Left Cheek	0.466	0.238	0.083	0.001	0.704	0.549	0.467
		Left Tilted	0.194	0.107	0.065	0.001	0.301	0.259	0.195
	LTE Band 12	Right Cheek	0.320	0.451	0.103	0.020	0.771	0.423	0.340
		Right Tilted	0.156	0.162	0.050	0.017	0.318	0.206	0.173
		Left Cheek	0.304	0.238	0.083	0.001	0.542	0.387	0.305
		Left Tilted	0.303	0.107	0.065	0.001	0.410	0.368	0.304
	LTE Band 13	Right Cheek	0.543	0.451	0.103	0.020	0.994	0.646	0.563
		Right Tilted	0.348	0.162	0.050	0.017	0.510	0.398	0.365
		Left Cheek	0.596	0.238	0.083	0.001	0.834	0.679	0.597
		Left Tilted	0.348	0.107	0.065	0.001	0.455	0.413	0.349
	LTE Band 14	Right Cheek	0.410	0.451	0.103	0.020	0.861	0.513	0.430
		Right Tilted	0.280	0.162	0.050	0.017	0.442	0.330	0.297
		Left Cheek	0.534	0.238	0.083	0.001	0.772	0.617	0.535
		Left Tilted	0.226	0.107	0.065	0.001	0.333	0.291	0.227
	LTE Band 66	Right Cheek	0.474	0.451	0.103	0.020	0.925	0.577	0.494
		Right Tilted	0.578	0.162	0.050	0.017	0.740	0.628	0.595
		Left Cheek	0.620	0.238	0.083	0.001	0.858	0.703	0.621
		Left Tilted	0.607	0.107	0.065	0.001	0.714	0.672	0.608



15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)			
WCDMA	WCDMA II	Front	1.292	0.132	0.001	0.001	1.424	1.293	1.293
		Back	0.518	0.492	0.247	0.019	1.010	0.765	0.537
		Left side	0.262	0.489	0.203	0.014	0.751	0.465	0.276
		Right side	0.265				0.265	0.265	0.265
		Top side		0.098	0.001	0.001	0.098	0.001	0.001
		Bottom side	0.507				0.507	0.507	0.507
	WCDMA V	Front	0.490	0.132	0.001	0.001	0.622	0.491	0.491
		Back	0.393	0.492	0.247	0.019	0.885	0.640	0.412
		Left side	0.266	0.489	0.203	0.014	0.755	0.469	0.280
		Right side	0.319				0.319	0.319	0.319
		Top side		0.098	0.001	0.001	0.098	0.001	0.001
		Bottom side	0.055				0.055	0.055	0.055
LTE	LTE Band 2	Front	1.108	0.132	0.001	0.001	1.240	1.109	1.109
		Back	0.512	0.492	0.247	0.019	1.004	0.759	0.531
		Left side	0.192	0.489	0.203	0.014	0.681	0.395	0.206
		Right side	0.407				0.407	0.407	0.407
		Top side		0.098	0.001	0.001	0.098	0.001	0.001
		Bottom side	0.502				0.502	0.502	0.502
	LTE Band 5	Front	0.563	0.132	0.001	0.001	0.695	0.564	0.564
		Back	0.708	0.492	0.247	0.019	1.200	0.955	0.727
		Left side	0.473	0.489	0.203	0.014	0.962	0.676	0.487
		Right side	0.421				0.421	0.421	0.421
		Top side		0.098	0.001	0.001	0.098	0.001	0.001
		Bottom side	0.061				0.061	0.061	0.061
	LTE Band 12	Front	0.445	0.132	0.001	0.001	0.577	0.446	0.446
		Back	0.620	0.492	0.247	0.019	1.112	0.867	0.639
		Left side	0.340	0.489	0.203	0.014	0.829	0.543	0.354
		Right side	0.322				0.322	0.322	0.322
		Top side		0.098	0.001	0.001	0.098	0.001	0.001
		Bottom side	0.029				0.029	0.029	0.029
	LTE Band 13	Front	0.640	0.132	0.001	0.001	0.772	0.641	0.641
		Back	0.722	0.492	0.247	0.019	1.214	0.969	0.741
		Left side	0.530	0.489	0.203	0.014	1.019	0.733	0.544
		Right side	0.511				0.511	0.511	0.511
		Top side		0.098	0.001	0.001	0.098	0.001	0.001
		Bottom side	0.042				0.042	0.042	0.042
	LTE Band 14	Front	0.663	0.132	0.001	0.001	0.795	0.664	0.664
		Back	0.712	0.492	0.247	0.019	1.204	0.959	0.731
		Left side	0.528	0.489	0.203	0.014	1.017	0.731	0.542
		Right side	0.526				0.526	0.526	0.526
		Top side		0.098	0.001	0.001	0.098	0.001	0.001
		Bottom side	0.044				0.044	0.044	0.044
LTE Band 66	Front	1.132	0.132	0.001	0.001	1.264	1.133	1.133	
	Back	0.490	0.492	0.247	0.019	0.982	0.737	0.509	
	Left side	0.308	0.489	0.203	0.014	0.797	0.511	0.322	
	Right side	0.456				0.456	0.456	0.456	
	Top side		0.098	0.001	0.001	0.098	0.001	0.001	
	Bottom side	0.393				0.393	0.393	0.393	



15.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)			
WCDMA	WCDMA II	Front	1.292	0.132	0.026	0.001	1.424	1.318	1.293
		Back	0.518	0.492	0.408	0.019	1.010	0.926	0.537
		Front with Headset	1.279	0.132	0.026	0.001	1.411	1.305	1.280
	WCDMA V	Front	0.490	0.132	0.026	0.001	0.622	0.516	0.491
		Back	0.393	0.492	0.408	0.019	0.885	0.801	0.412
LTE	LTE Band 2	Front	1.108	0.132	0.026	0.001	1.240	1.134	1.109
		Back	0.512	0.492	0.408	0.019	1.004	0.920	0.531
	LTE Band 5	Front	0.563	0.132	0.026	0.001	0.695	0.589	0.564
		Back	0.708	0.492	0.408	0.019	1.200	1.116	0.727
	LTE Band 12	Front	0.445	0.132	0.026	0.001	0.577	0.471	0.446
		Back	0.620	0.492	0.408	0.019	1.112	1.028	0.639
	LTE Band 13	Front	0.640	0.132	0.026	0.001	0.772	0.666	0.641
		Back	0.722	0.492	0.408	0.019	1.214	1.130	0.741
	LTE Band 14	Front	0.663	0.132	0.026	0.001	0.795	0.689	0.664
		Back	0.712	0.492	0.408	0.019	1.204	1.120	0.731
	LTE Band 66	Front	1.132	0.132	0.026	0.001	1.264	1.158	1.133
		Back	0.490	0.492	0.408	0.019	0.982	0.898	0.509

15.4 Product Specific Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
		WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)	Bluetooth 10g SAR (W/kg)			
WCDMA II	Front	3.186	-	0.042	-	3.186	3.228	3.186
	Back	-	-	0.360	-	0.000	0.360	0.000
	Left side	-	-	0.679	-	0.000	0.679	0.000
	Right side	-	-	-	-	0.000	0.000	0.000
	Top side	-	-	0.035	-	0.000	0.035	0.000
	Bottom side	-	-	-	-	0.000	0.000	0.000

Test Engineer : Ken Lin, Sing Lim, Josh Lin and Thomas Wang



16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, "SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.