

Test Report No. 56S061183/01
dated 09 Jan 2007



Note: This report is issued subject to TÜV SÜD PSB Corporation's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH
FCC Parts 15B & C : 2006
OF A
WIRELESS SOUND SYSTEM
[Model : SB-FX85]
[FCC ID : ACJR07002]

TEST FACILITY TÜV SÜD PSB Corporation Pte Ltd,
Telecoms & EMC, Testing Group,
1 Science Park Drive, Singapore 118221

FCC REG. NO. 90937 (3m & 10m OATS)
99142 (10m Anechoic Chamber)
871638 (5m Anechoic Chamber)
325572 (10m Anechoic Chamber)

IND. CANADA REG. NO. IC 4257 (3m and 10m Anechoic Chambers)

PREPARED FOR Mr Ho Yip Leong
Panasonic AVC Networks Singapore Pte Ltd
202 Bedok South Avenue 1
Singapore 469332

Tel : (65) 6240 1891 Fax : (65) 6245 8804

QUOTATION NUMBER 56Q0601479

JOB NUMBER 56S061183

TEST PERIOD 29 Dec 2006 – 05 Jan 2007

PREPARED BY

Quek Keng Huat
Associate Engineer

APPROVED BY

Lim Cher Hwee
Assistant Vice President



Laboratory:
TÜV SÜD PSB Corporation Pte. Ltd.
Testing Group
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: testing@psbcorp.com
www.psbcorp.com
Co. Reg : 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
3 Science Park Drive
#04-01/05 The Franklin
Singapore 118223

LA-2001-0212-A
LA-2001-0213-F
LA-2001-0214-E
LA-2001-0215-B
LA-2001-0216-G
LA-2001-0217-G
LA-2006-0355-C

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.



TABLE OF CONTENTS

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING EQUIPMENT DESCRIPTION

EUT OPERATING CONDITIONS

CONDUCTED EMISSION TEST

RADIATED EMISSION TEST

SPECTRUM BANDWIDTH (6dB BANDWIDTH
MEASUREMENT) TEST

MAXIMUM PEAK POWER TEST

RF CONDUCTED SPURIOUS EMISSIONS TEST

BAND EDGE COMPLIANCE (CONDUCTED) TEST

BAND EDGE COMPLIANCE (RADIATED) TEST

PEAK POWER SPECTRAL DENSITY TEST

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

- | | |
|---------|--|
| ANNEX A | - EUT PHOTOGRAPHS / DIAGRAMS |
| ANNEX B | - FCC LABEL & POSITION |
| ANNEX C | - USER MANUAL, TECHNICAL
DESCRIPTION, BLOCK & CIRCUIT
DIAGRAMS |



TEST SUMMARY

The product was tested in accordance with the customer's specifications.

Test Results Summary

Test Standard	Description	Pass / Fail
FCC Part 15: 2006		
15.107(a), 15.207	Conducted Emissions	Pass
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)	Pass
15.247(a)(2)	Spectrum Bandwidth (6dB Bandwidth Measurement)	Pass
15.247(b)(3)	Maximum Peak Power	Pass
15.247(d)	RF Conducted Spurious Emissions	Pass
15.247(d)	Band Edge Compliance (Conducted)	Pass
15.247(d)	Band Edge Compliance (Radiated)	Pass
15.247(e)	Peak Power Spectral Density	Pass
1.1310	Maximum Permissible Exposure	Pass
15.35(c)	Duty Cycle Factor Computation	Not Applicable *See Note 5

TEST SUMMARY

Notes

1. Three channels as listed below, which respectively represent the lower, middle and upper channels of the Equipment Under Test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
Channel 0	2.412
Channel 1	2.438
Channel 2	2.464

2. All the measurements in section 15.247 were done based on conducted measurements.
3. The EUT is a Class B device when in non-transmitting state and meets the FCC Part15B Class B requirements.
4. All test measurement procedures are according to ANSI C63.4: 2003.
5. The Equipment Under Test (EUT) was tested in a continuous transmission mode, ie. 0dB duty cycle.

Modifications

1. No modifications were made.

PRODUCT DESCRIPTION

Description : The Equipment Under Test (EUT) is a **Wireless Sound System**.

Manufacturer : Panasonic AVC Networks Singapore Pte Ltd
202 Bedok South Avenue 1
Singapore 469332

Model Number : SB-FX85

FCC ID : ACJR07002

Serial Number : Nil

Microprocessor : NEC uPD78F0501

Operating / Transmitting Frequency : 2.412GHz (lower channel) to 2.464GHz (upper channel)

Clock / Oscillator Frequency : 12.288MHz, 22MHz

Modulation : DSSS

Port / Connectors : Refer to manufacturer's user manual / operating manual.

Rated Input Power : 110V 60Hz

Accessories : Nil



SUPPORTING EQUIPMENT DESCRIPTION

The EUT was tested as a stand-alone unit without any supporting equipment.

EUT OPERATING CONDITIONS

FCC Part 15

1. **Conducted Emissions**
2. **Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)**
3. **Spectrum Bandwidth (6dB Bandwidth Measurement)**
4. **Maximum Peak Power**
5. **RF Conducted Spurious Emissions**
6. **Band Edge Compliance (Conducted)**
7. **Band Edge Compliance (Radiated)**
8. **Peak Power Spectral Density**
9. **Maximum Permissible Exposure**

The EUT was exercised by operating in maximum continuous transmission in test mode, i.e transmitting at lower, middle and upper channels respectively at one time.

CONDUCTED EMISSION TEST

FCC Parts 15.107(a) and 15.207 Conducted Emission Limits

Frequency Range (MHz)	Limit Values (dBµV)	
	Quasi-peak (QP)	Average (AV)
0.15 - 0.5	66 – 56 *	56 – 46 *
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreasing linearly with the logarithm of the frequency

FCC Parts 15.107(a) and 15.207 Conducted Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Schaffner EMI Receiver – SCR1	SCR 3501	238	06 Nov 2007
Agilent EMC Analyzer-SA7	E7403A	US41160167	22 May 2007
EMCO LISN (for EUT) – LISN9	3825/2	9309-2128	15 May 2007
EMCO LISN (for supporting) – LISN6	3825/2	9309-2127	15 May 2007
R&S Pulse Limiter – PL2	ESH3-Z2	100347	15 Apr 2007
R&S Pulse Limiter – PL3	ESH3-Z2	100349	12 Jul 2007

CONDUCTED EMISSION TEST

FCC Parts 15.107(a) and 15.207 Conducted Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

FCC Parts 15.107(a) and 15.207 Conducted Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

Sample Calculation Example

At 20 MHz	Q-P limit (Class B) = 1000 μV = 60.0 dBμV
Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dBμV (Calibrated for system losses)	
Therefore, Q-P margin = 40.0 - 60.0 = -20.0	i.e. 20.0 dB below Q-P limit

CONDUCTED EMISSION TEST



Conducted Emissions Test Setup (Front View)



Conducted Emissions Test Setup (Rear View)

CONDUCTED EMISSION TEST

FCC Parts 15.107(a) and 15.207 Conducted Emission Results

Test Input Power	110V 60Hz	Temperature	23°C
Line Under Test	AC Mains	Relative Humidity	58%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

Frequency (MHz)	Q-P Value (dB μ V)	Q-P Margin (dB)	AV Value (dB μ V)	AV Margin (dB)	Line	Channel
0.1732	38.0	-26.8	37.4	-17.4	Neutral	2
0.2585	38.3	-23.2	38.2	-13.3	Neutral	2
0.5184	37.8	-18.2	30.6	-15.4	Live	2
0.5211	37.0	-19.0	30.4	-15.6	Neutral	2
0.7773	30.3	-25.8	26.4	-19.6	Neutral	2
7.8400	5.0	-55.0	4.8	-45.2	Neutral	2

Notes

- All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
9kHz - 30MHz
RBW: 10kHz VBW: 30kHz
- Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 2.4 dB.

RADIATED EMISSION TEST

FCC Part 15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6
13.36 - 13.41			

FCC Parts 15.109(a) and 15.209 Radiated Emission Limits

Frequency Range (MHz)	Quasi-Peak Limit Values (dBµV/m) @ 3m
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
Above 960	54.0*

* Above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

FCC Parts 15.109(a) and 15.209 Radiated Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
EMCO Horn Antenna – H14	3115	0003-6087	19 May 2007
R&S Test Receiver (20Hz –26.5GHz) – ESMI1	ESMI	849182/003 848926/007	04 Jul 2007
Schaffner Bilog Antenna –BL4	CBL6112B	2593	12 May 2007
Agilent Preamplifier (0.01-4GHz) – PA6	87405B	10003	12 Jan 2007
Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2007
HP Preamplifier	8449B0PTH02	3008A00516	25 Jan 2007

RADIATED EMISSION TEST

FCC Parts 15.109(a) and 15.209 Radiated Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

FCC Parts 15.109(a) and 15.209 Radiated Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 10th harmonics of the EUT fundamental frequency, using the Bi-log antenna for frequencies from 30MHz up to 3GHz, and the Horn antenna above 3GHz.

Sample Calculation Example

At 300 MHz	Q-P limit (Class B) = 200 μ V/m = 46.0 dB μ V/m
Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V/m (Calibrated level including antenna factors & cable losses)	
Therefore, Q-P margin = 40.0 - 46.0 = -6.0	i.e. 6 dB below Q-P limit

RADIATED EMISSION TEST



Radiated Emissions Test Setup (Front View)



Radiated Emissions Test Setup (Rear View)

RADIATED EMISSION TEST

FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results

Test Input Power	110V 60Hz	Temperature	23°C
Test Distance	3m	Relative Humidity	58%
		Atmospheric Pressure	1030mbar
		Tested By	Tan Say Eng

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB μ V/m)	Q-P Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)	Channel
30.8680	32.1	-7.9	22	100	V	0
36.8300	29.5	-10.5	146	115	V	0
135.1340	34.8	-8.8	124	268	H	0
184.2860	32.3	-11.3	321	111	V	0
356.3300	34.9	-11.2	58	100	H	0
380.8999	37.5	-8.6	76	100	H	0

Spurious Emissions above 1GHz

Frequency (GHz)	Peak Value (dB μ V/m)	Average Value (dB μ V/m)	Average Margin (dB)	Azimuth (Degrees)	Height (cm)	Pol (H/V)	Channel
3.2500	58.7	46.7	-7.3	12	100	V	1
4.8266	58.7	46.7	-7.3	88	100	V	0
4.8833	57.5	43.4	-10.6	36	100	V	1
6.5055	52.8	44.9	-9.1	101	100	V	1
7.2388	53.4	38.7	-15.3	0	100	V	0
10.000	54.6	39.5	-14.5	54	100	V	1

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. The transmitting antenna was found to be in the worst case condition when it was orientated in a vertical position.
3. Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
4. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
5. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 1GHz
RBW: 120kHz VBW: 1MHz
>1GHz
RBW: 1MHz VBW: 1MHz

RADIATED EMISSION TEST

6. The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33(a) for intentional radiators & Section 15.33(b) for unintentional radiators.
7. The channel in the table refers to the transmit channel of the EUT.
8. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is $\pm 4.3\text{dB}$ (for EUTs < 0.5m X 0.5m X 0.5m).

SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Limits

The EUT shows compliance to the requirements of this section, which states that the minimum bandwidth of the EUT employing digital modulation techniques shall be at least 500kHz.

FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8563E	3846A09953	14 Sep 2008


FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at Channel 0 (2.412GHz).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 6dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 6dB peak frequency at lower (f_L) and upper (f_H) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
5. The 6dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies, $|f_H - f_L|$.
6. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 1 (2.438GHz) and Channel 2 (2.464GHz) respectively.

SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

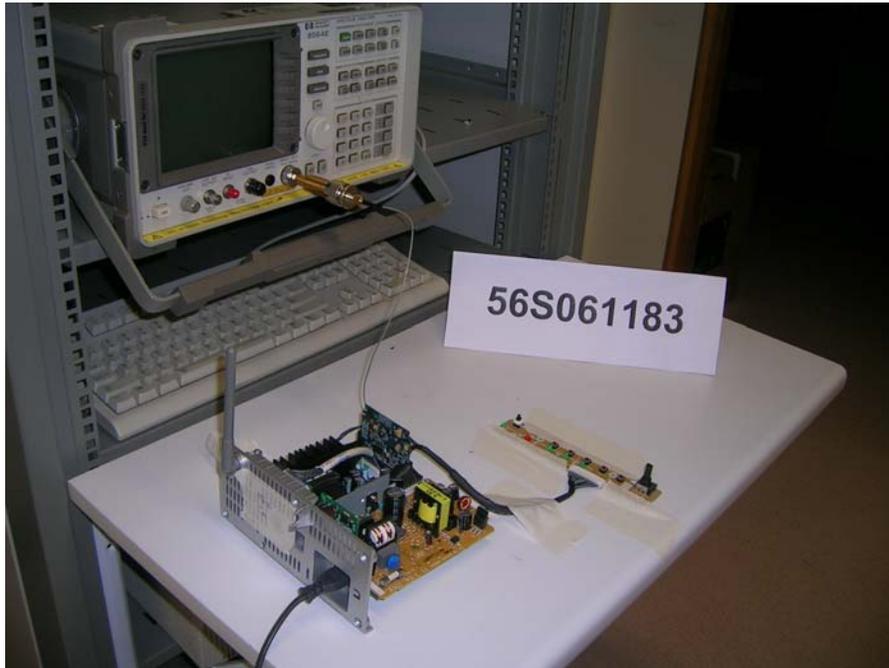

Spectrum Bandwidth (6dB Bandwidth Measurement) Test Setup



SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Results

Test Input Power	110V 60Hz	Temperature	24°C
Attached Plots	1 - 3	Relative Humidity	58%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

Channel	Channel Frequency (GHz)	6dB Bandwidth (MHz)
0	2.4120	8.170
1	2.4380	8.170
2	2.4640	8.170

MAXIMUM PEAK POWER TEST

FCC Part 15.247(b)(3) Maximum Peak Power Limits

The EUT shows compliance to the requirements of this section, which states the maximum peak power of the EUT employing digital modulation shall not exceed 1W (30dBm).

FCC Part 15.247(b)(3) Maximum Peak Power Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Universal Radio Communication Tester	CMU 200	837587/068	04 Mar 2007


FCC Part 15.247(b)(3) Maximum Peak Power Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

FCC Part 15.247(b)(3) Maximum Peak Power Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at Channel 0 (2.412GHz).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The step 2 was repeated with the transmitting frequency was set to Channel 1 (2.438GHz) and Channel 2 (2.464GHz) respectively.

MAXIMUM PEAK POWER TEST

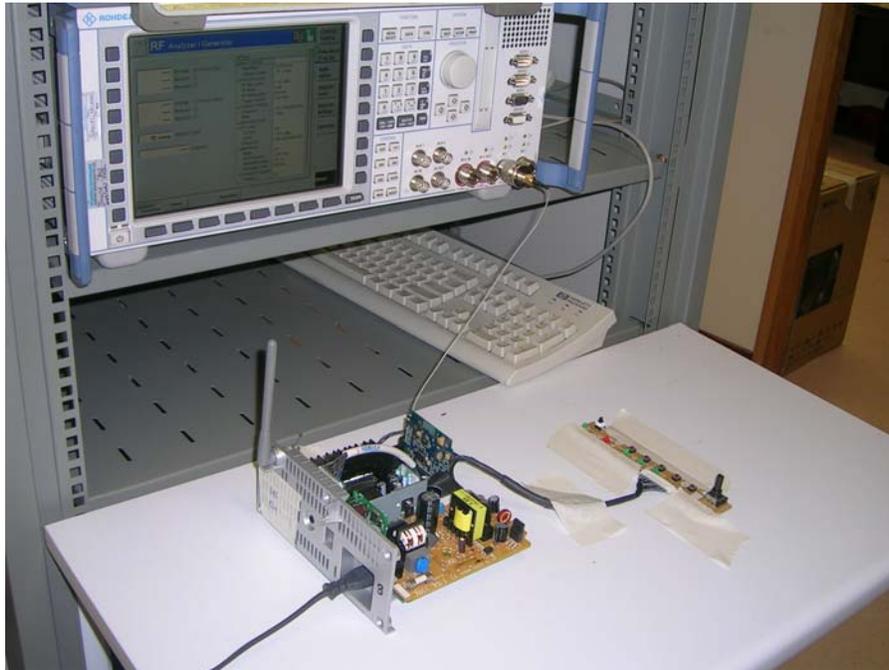

Maximum Peak Power Test Setup

MAXIMUM PEAK POWER TEST

FCC Part 15.247(b)(3) Maximum Peak Power Results

Test Input Power	110V 60Hz	Temperature	24°C
		Relative Humidity	58%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Limit (W)
0	2.4120	0.0764	1.0
1	2.4380	0.0745	1.0
2	2.4640	0.0345	1.0

Notes

1. Power analyser of Universal Radio Communication Tester was used for power measurement with peak detection as mode of measurement. The power analyser mode supports a wideband power measurement ranging from 100kHz to 2700MHz.

RF CONDUCTED SPURIOUS EMISSIONS TEST

FCC Part 15.247(d) RF Conducted Spurious Emissions Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

FCC Part 15.247(d) RF Conducted Spurious Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8563E	3846A09953	14 Sep 2008

FCC Part 15.247(d) RF Conducted Spurious Emissions Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

FCC Part 15.247(d) RF Conducted Spurious Emissions Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.412GHz).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 5GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 5GHz to 10GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 1 (2.438GHz) and Channel 2 (2.464GHz) respectively.

RF CONDUCTED SPURIOUS EMISSIONS TEST



RF Conducted Spurious Emissions Test Setup



RF CONDUCTED SPURIOUS EMISSIONS TEST

FCC Part 15.247(d) RF Conducted Spurious Emissions Results

Test Input Power	110V 60Hz	Temperature	24°C
Attached Plots	4 - 9	Relative Humidity	58%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

All spurious signals found were below the specified limit. Please refer to the attached plots.

BAND EDGE COMPLIANCE (CONDUCTED) TEST

FCC Part 15.247(d) Band Edge Compliance (Conducted) Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8563E	3846A09953	14 Sep 2008

FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2412MHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2485MHz and the any spurious emissions at the band-edge.

BAND EDGE COMPLIANCE (CONDUCTED) TEST



Band Edge Compliance Test Setup



BAND EDGE COMPLIANCE (CONDUCTED) TEST

FCC Part 15.247(d) Band Edge Compliance (Conducted) Results

Test Input Power	110V 60Hz	Temperature	28°C
Attached Plots	10 - 11	Relative Humidity	58%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

No significant signal was found and they were below the specified limit.

BAND EDGE COMPLIANCE (RADIATED) TEST

FCC Part 15.247(d) Band Edge Compliance (Radiated) Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
EMCO Horn Antenna – H14	3115	0003-6087	19 May 2007
R&S Test Receiver (20Hz –26.5GHz) – ESMI1	ESMI	849182/003 848926/007	04 Jul 2007
Schaffner Bilog Antenna –BL4	CBL6112B	2593	12 May 2007
Agilent Preamplifier (0.01-4GHz) – PA6	87405B	10003	12 Jan 2007
Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2007
HP Preamplifier	8449B0PTH02	3008A00516	25 Jan 2007

FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:
 - a. Peak Plot:
RBW = VBW = 1MHz
 - b. Average Plot
RBW = 1MHz, VBW = 10Hz
4. All other supporting equipment were powered separately from another filtered mains.

FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.

BAND EDGE COMPLIANCE (RADIATED) TEST



Band Edge Compliance (Radiated) Test Setup



BAND EDGE COMPLIANCE (RADIATED) TEST

FCC Part 15.247(d) Band Edge Compliance (Radiated) Results


Test Input Power	110V 60Hz	Temperature	28°C
Attached Plots	12 - 17	Relative Humidity	58%
		Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin

No significant signal was found and they were below the specified limit.




BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge)

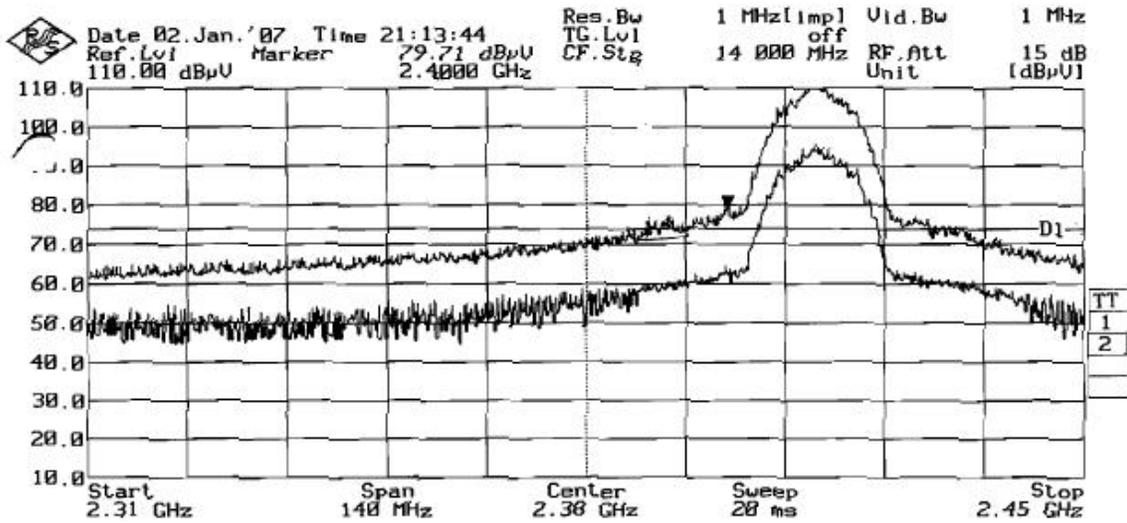

Plot 12 – Lower Band Edge at 2.4000GHz

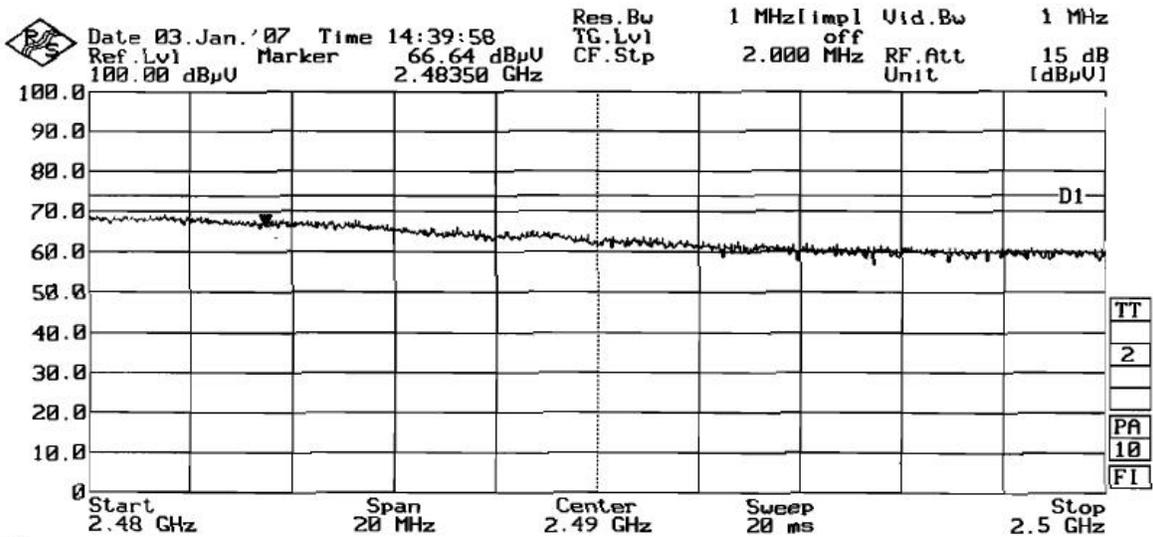


Plot 13 – Upper Band Edge at 2.4835GHz




BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (Restricted Band)

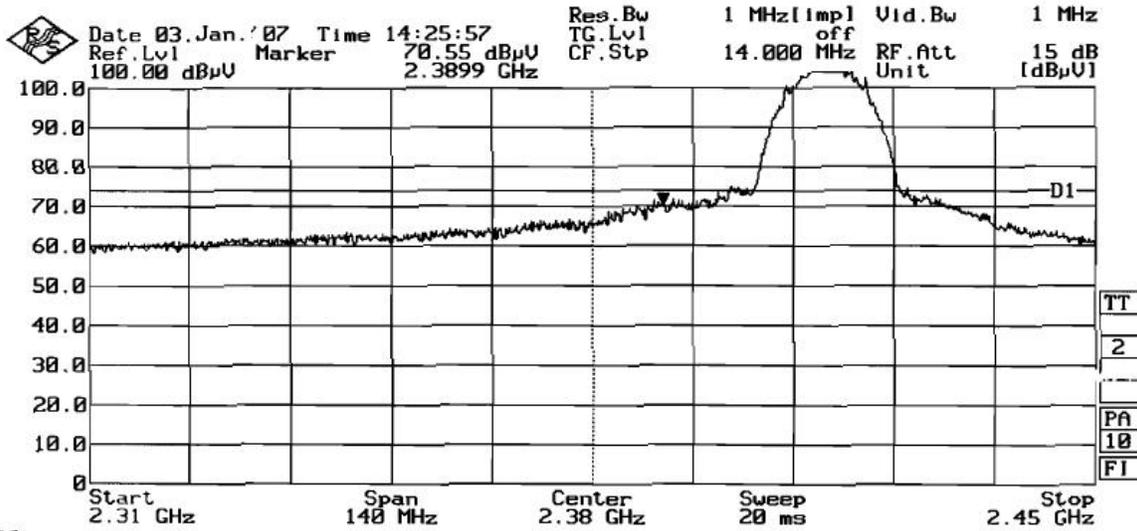


Plot 14 – Peak Plot at Lower Band Edge at 2.4000GHz

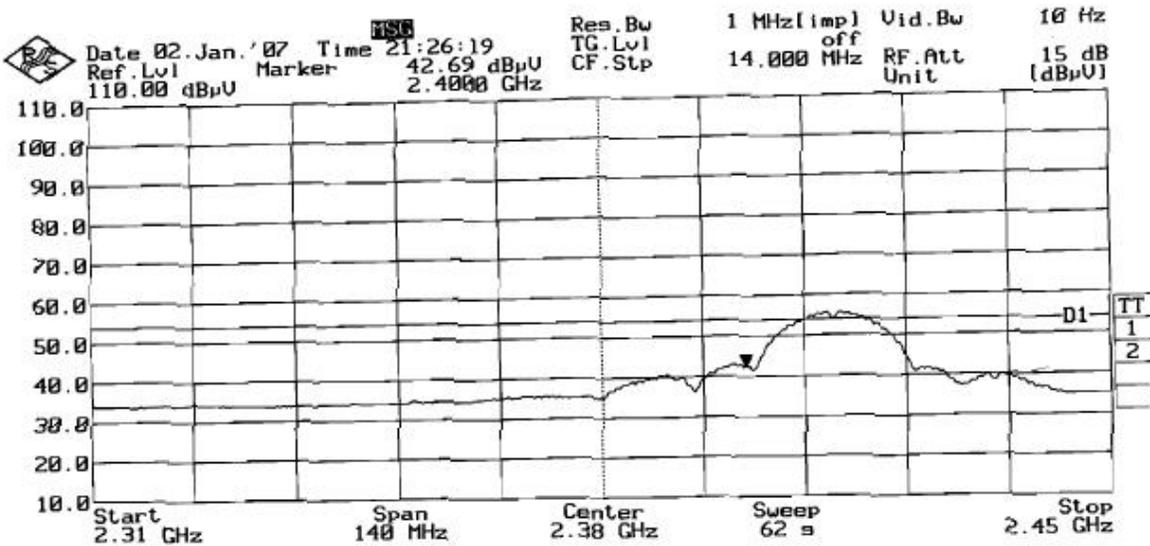


Plot 15 – Average Plot at Lower Band Edge at 2.4000GHz

BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (Restricted Band)

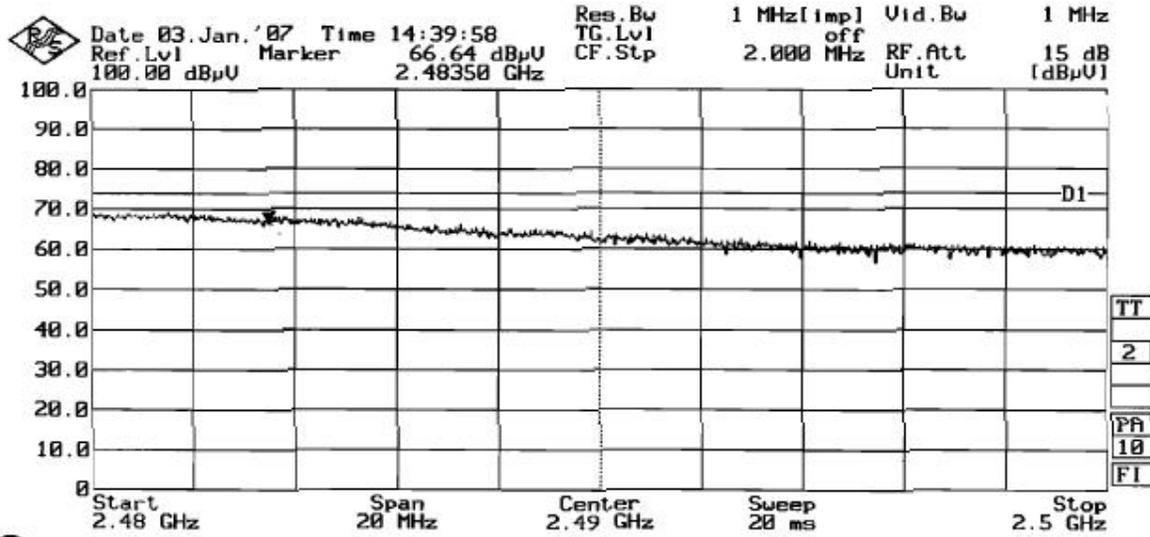

Plot 16 – Peak Plot at Upper Band Edge at 2.4835GHz

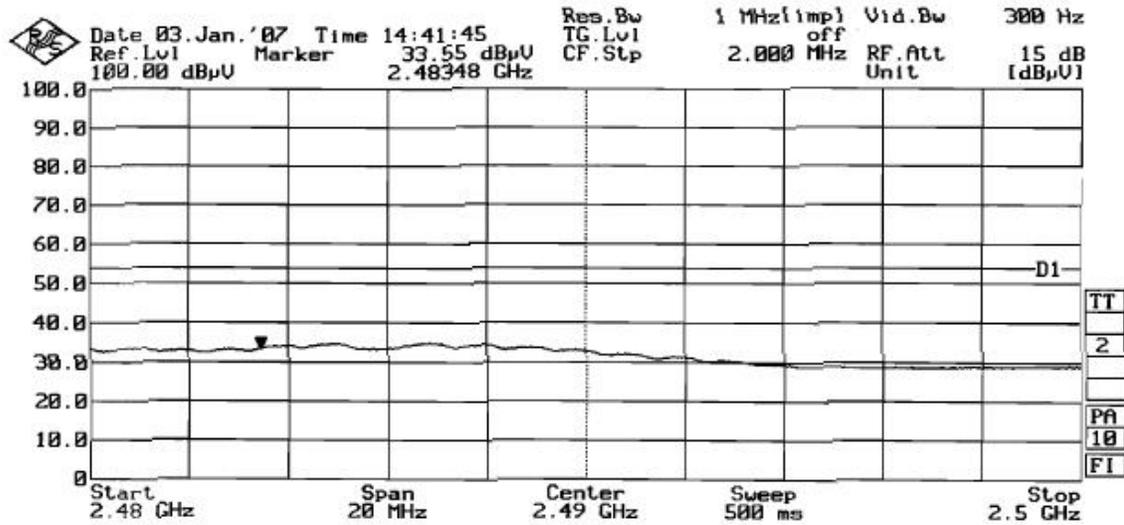

Plot 17 – Average Plot at Upper Band Edge at 2.4835GHz

PEAK POWER SPECTRAL DENSITY TEST

FCC Part 15.247(e) Peak Power Spectral Density Limits

The EUT shows compliance to the requirements of this section, which states the peak power spectral density conducted from the intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

FCC Part 15.247(e) Peak Power Spectral Density Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8563E	3846A09953	14 Sep 2008


FCC Part 15.247(e) Peak Power Spectral Density Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.

FCC Part 15.247(e) Peak Power Spectral Density Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at Channel 0 (2.412GHz).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 1 (2.438GHz) and Channel 2 (2.464GHz) respectively.

PEAK POWER SPECTRAL DENSITY TEST

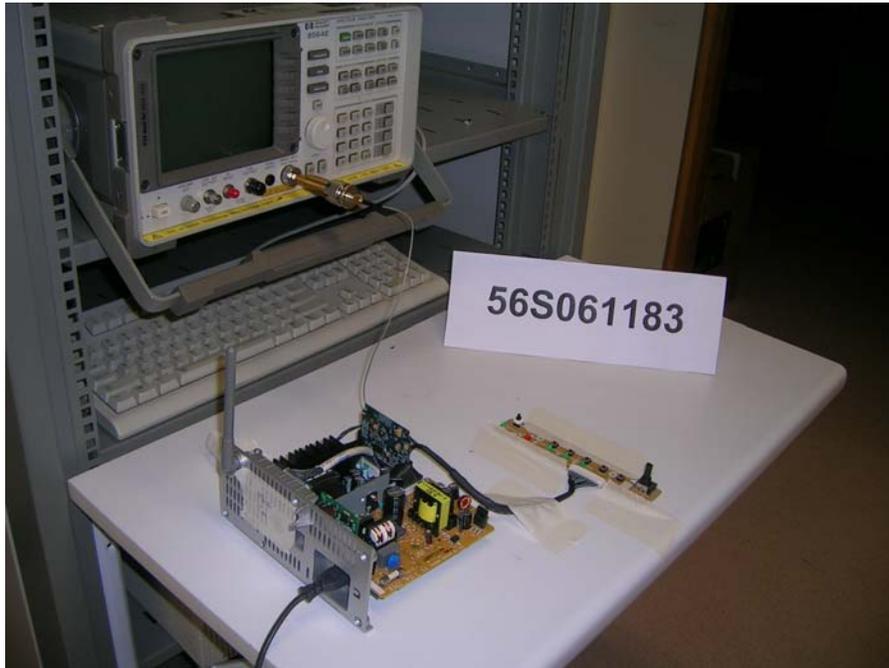

Peak Power Spectral Density Test Setup



PEAK POWER SPECTRAL DENSITY TEST

FCC Part 15.247(e) Peak Power Spectral Density Results

Test Input Power	110V 60Hz	Temperature	28°C
Attached Plots	18 - 20	Relative Humidity	58%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0	2.4120	0.502	6.3
1	2.4380	0.681	6.3
2	2.4640	0.369	6.3

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Limits

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (min)
0.3 - 1.34	614	1.63	100 ^{Note 2}	30
1.34 - 30	824 / f	2.19 / f	180 / f ² ^{Note 2}	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30
Notes				
1. f = frequency in MHz				
2. Plane wave equivalent power density				

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
PMM 8053 Portable Field Meter	8053	0220J10308	16 April 2007
PMM Electric Field Probe	EP301	0000J01105	16 April 2007

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Setup

1. The EUT and supporting equipment were set up as shown on the setup photo.
2. The relevant field probe was positioned at least 20cm away from the EUT and supporting equipment boundary.

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was first carried out at one of the positions / sides of the EUT.
3. Power density measurement (mW/cm²) was made using the field meter set to the required averaging time.
4. Steps 2 and 3 were repeated for the next position and its associate EUT operating mode, until all possible positions and modes were measured.

Sample Calculation Example

At 2400 MHz, limit = 1.0 mW/cm ²
Power density reading obtained directly from field meter = 0.3 mW/cm ² averaged over the required 30 minutes.
Therefore, margin = 0.3 – 1.0 = -0.7 mW/cm ² i.e. 0.7 mW/cm² below limit

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST



Maximum Permissible Exposure (MPE) Test Setup



MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Results

Test Input Power	110V 60Hz	Temperature	23°C
Test Distance	20cm	Relative Humidity	56%
		Atmospheric Pressure	1030mbar
		Tested By	Gary Ng

Channel	Channel Frequency (GHz)	Power Density Value (mW/cm ²)	Margin (mW/cm ²)	Averaging Time (min)	Limit (mW/cm ²)
0	2.4120	0.0038	-0.9962	30	1.0
1	2.4380	0.0048	-0.9952	30	1.0
2	2.4640	0.0040	-0.9960	30	1.0

Notes

1. All possible modes of operation were investigated. Only the worst case highest radiation levels were measured. Measurements were taken at the required averaging time. All other radiation levels were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 0.1MHz – 3GHz is ±15%.



This Report is issued under the following conditions:

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
2. Unless otherwise requested, a report shall contain only technical results. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.
3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB Corporation approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB Corporation in any way "guarantees" the later performance of the product/equipment.
4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB Corporation therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through TÜV SÜD PSB Corporation, unless the Client has authorised TÜV SÜD PSB Corporation in writing to do so.
6. TÜV SÜD PSB Corporation may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.
7. All copyright in the report shall remain with TÜV SÜD PSB Corporation and the Client shall, upon payment of TÜV SÜD PSB Corporation's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that TÜV SÜD PSB Corporation may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
8. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB Corporation has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB Corporation or to the report or results furnished by TÜV SÜD PSB Corporation in any advertisements or sales promotion.
10. Unless otherwise stated, the tests are carried out in TÜV SÜD PSB Corporation Pte Ltd, No.1 Science Park Drive Singapore 118221.

October 2006



ANNEX A

EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS



Front View



Rear View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS



Left View



Right View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS



Top View




Bottom View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

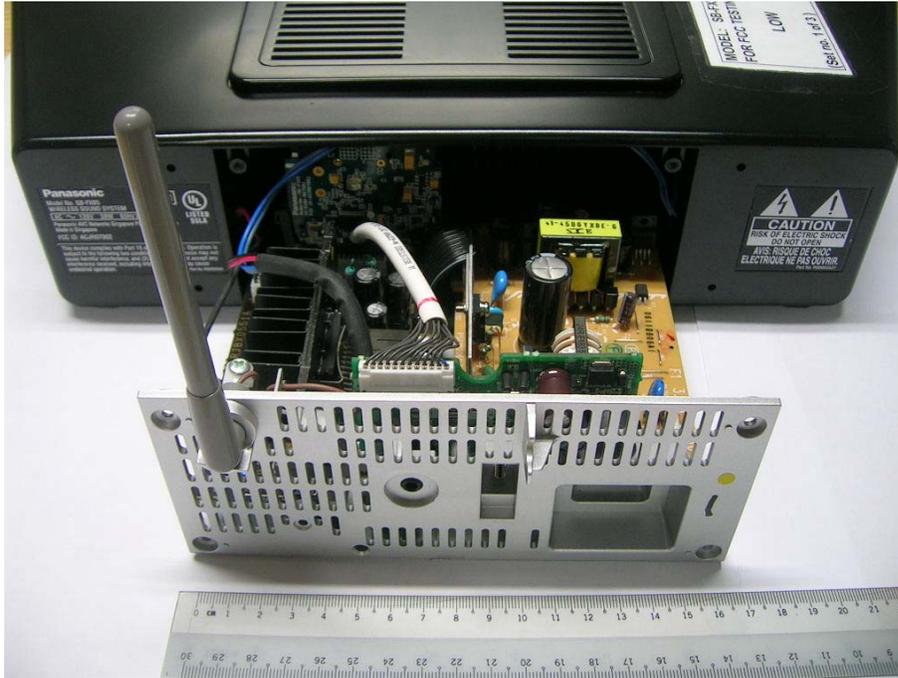

EUT Top Housing External View



EUT Top Housing Internal View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS




EUT Exploded View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

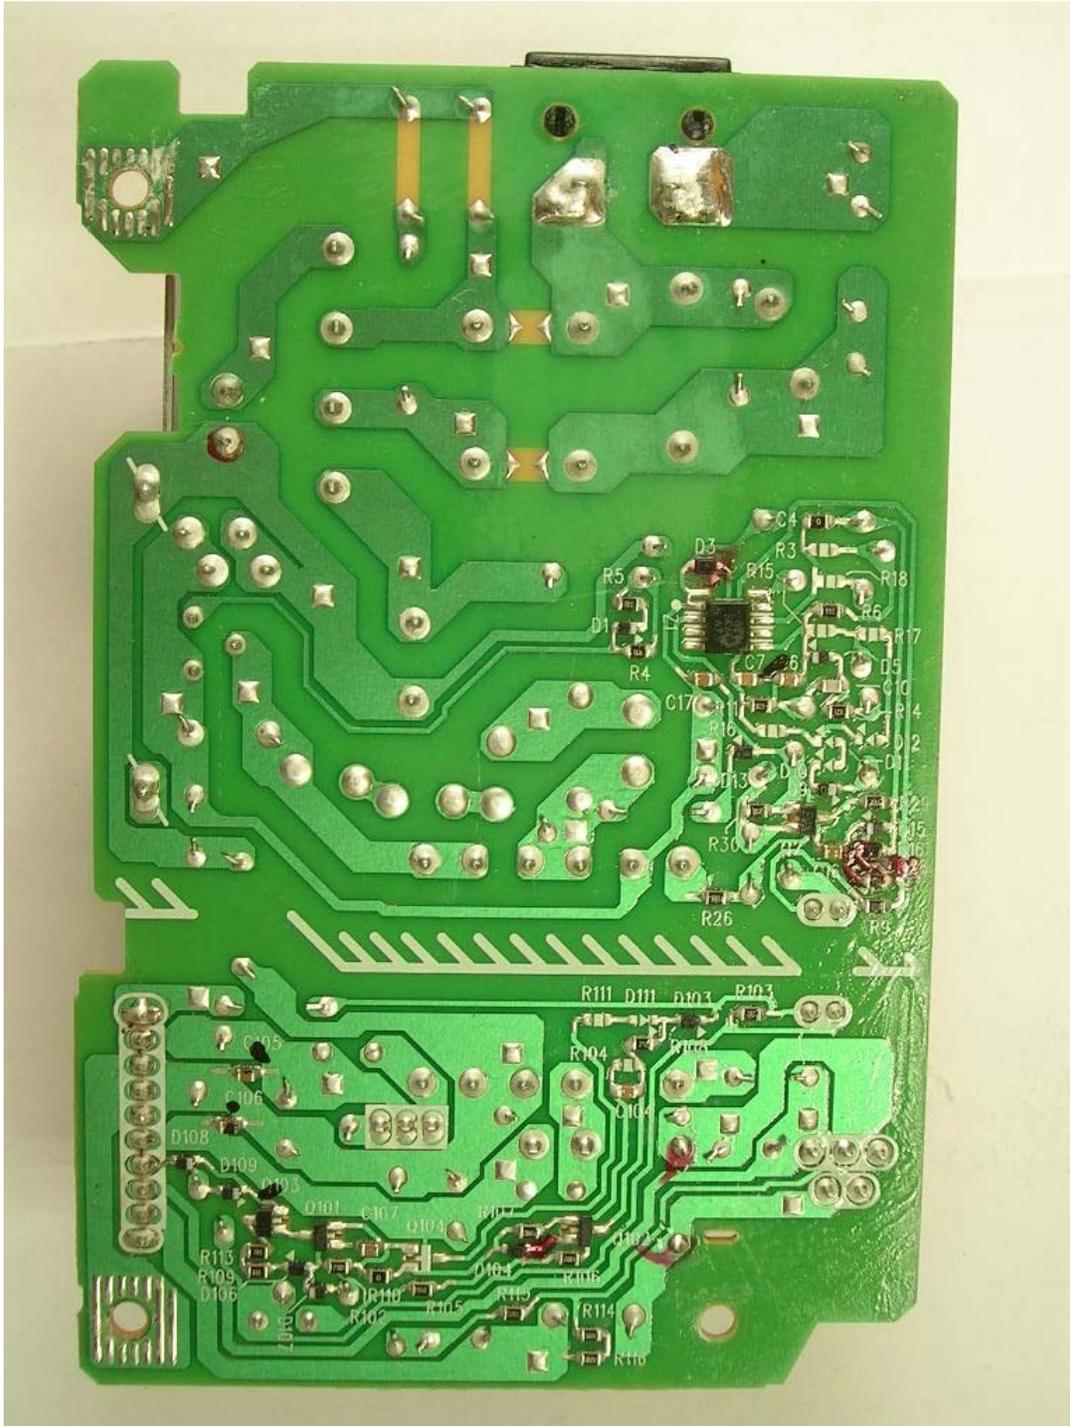


Power Supply PCB Trace Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

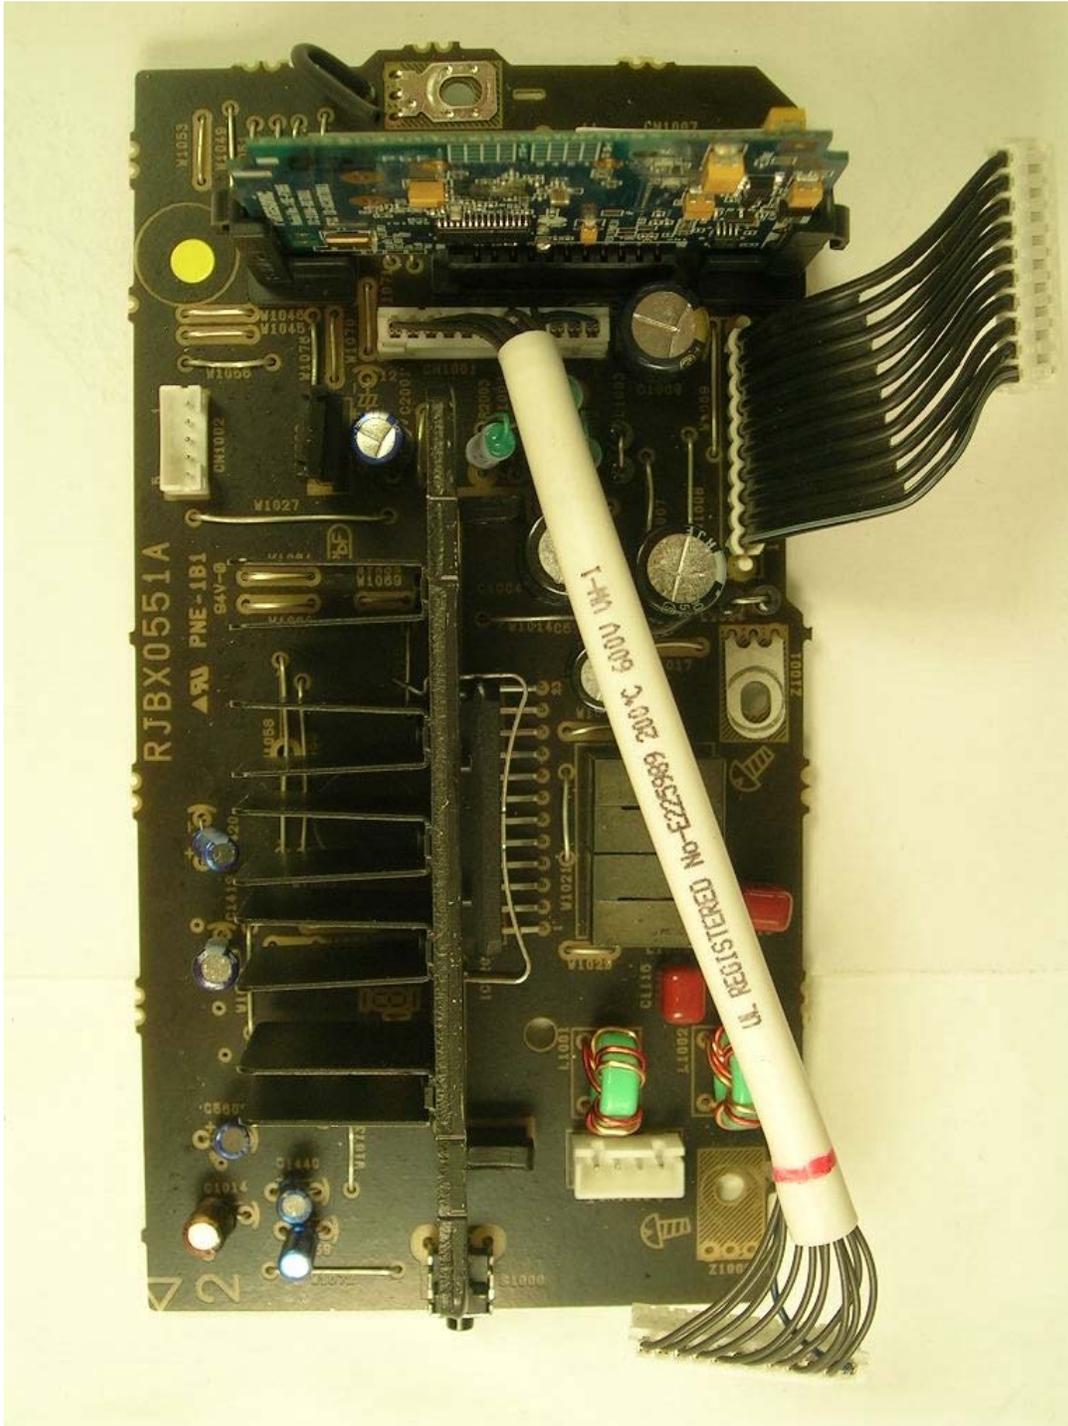


Main Board PCB Component Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

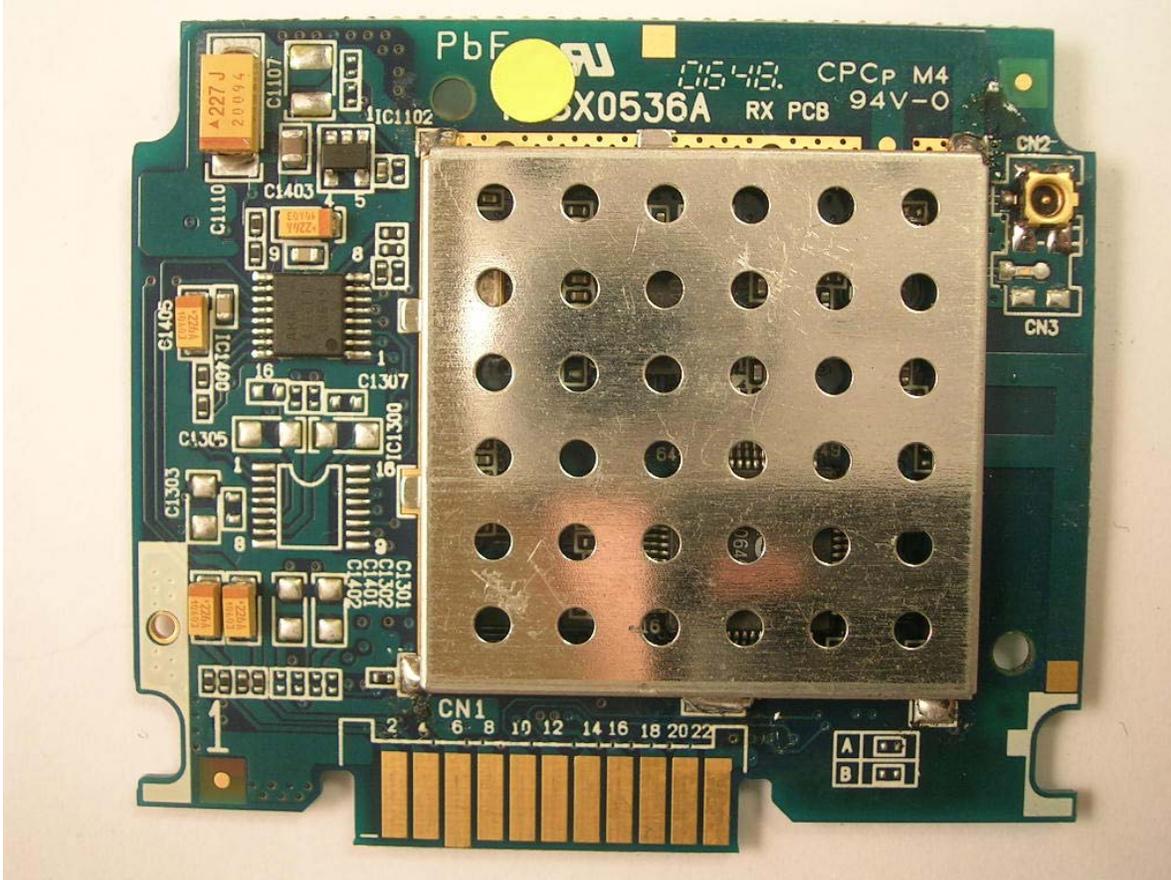


RF Module Circuit PCB Component Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

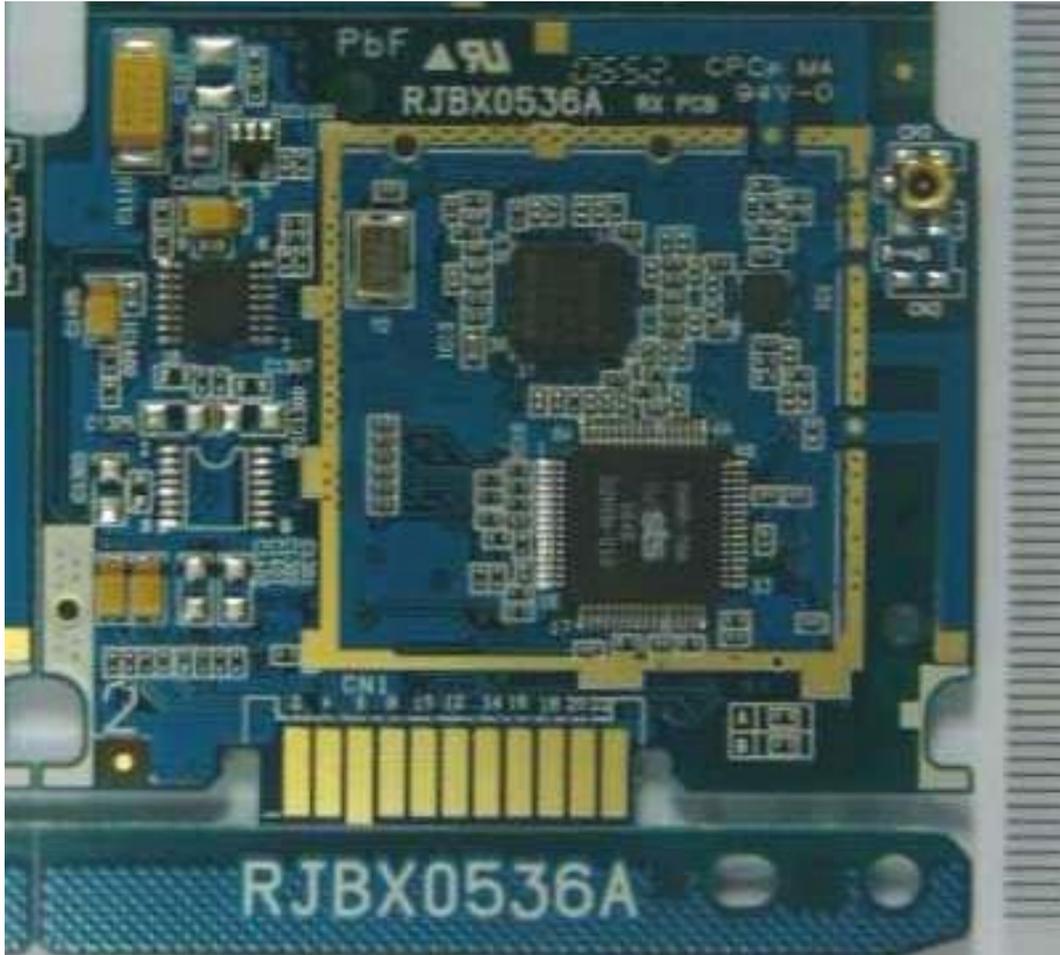


RF Module Circuit with RF Shield Removed

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

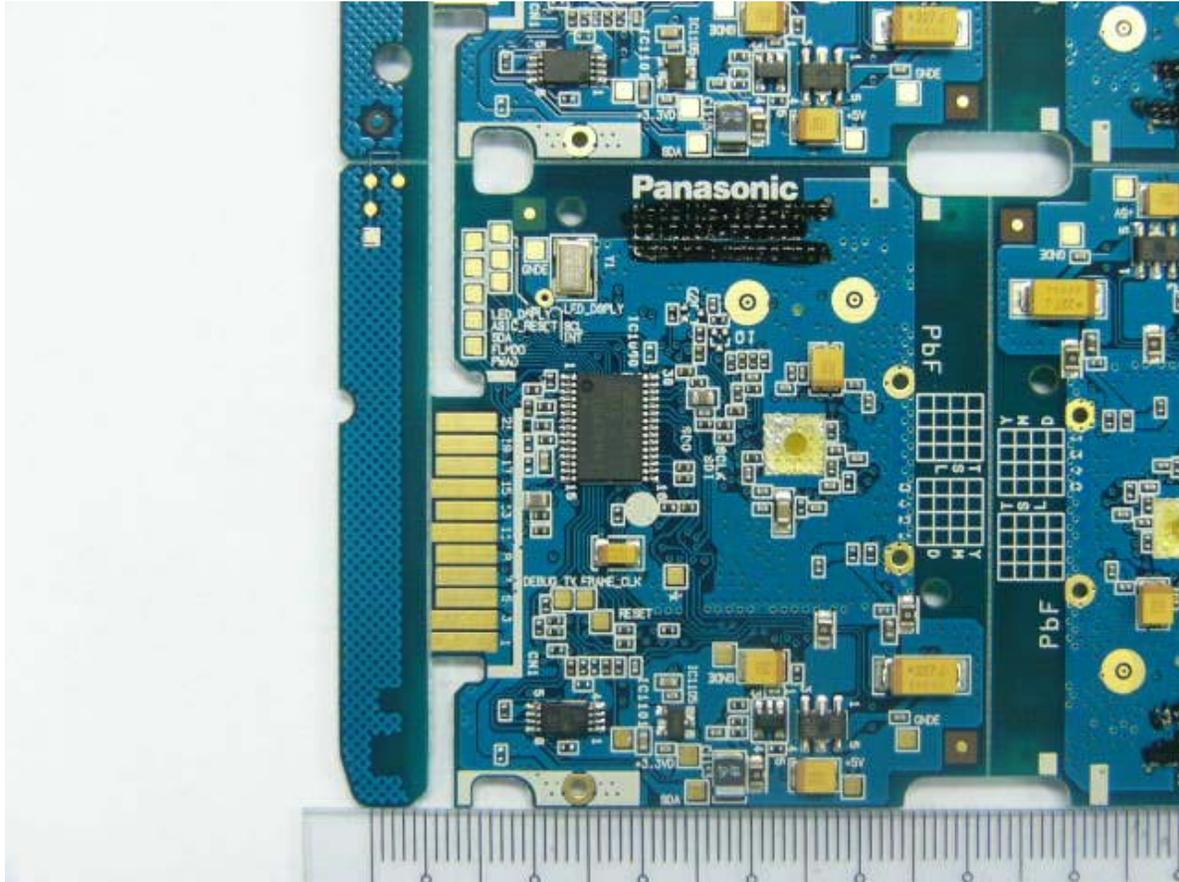


RF Module Circuit PCB Trace Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

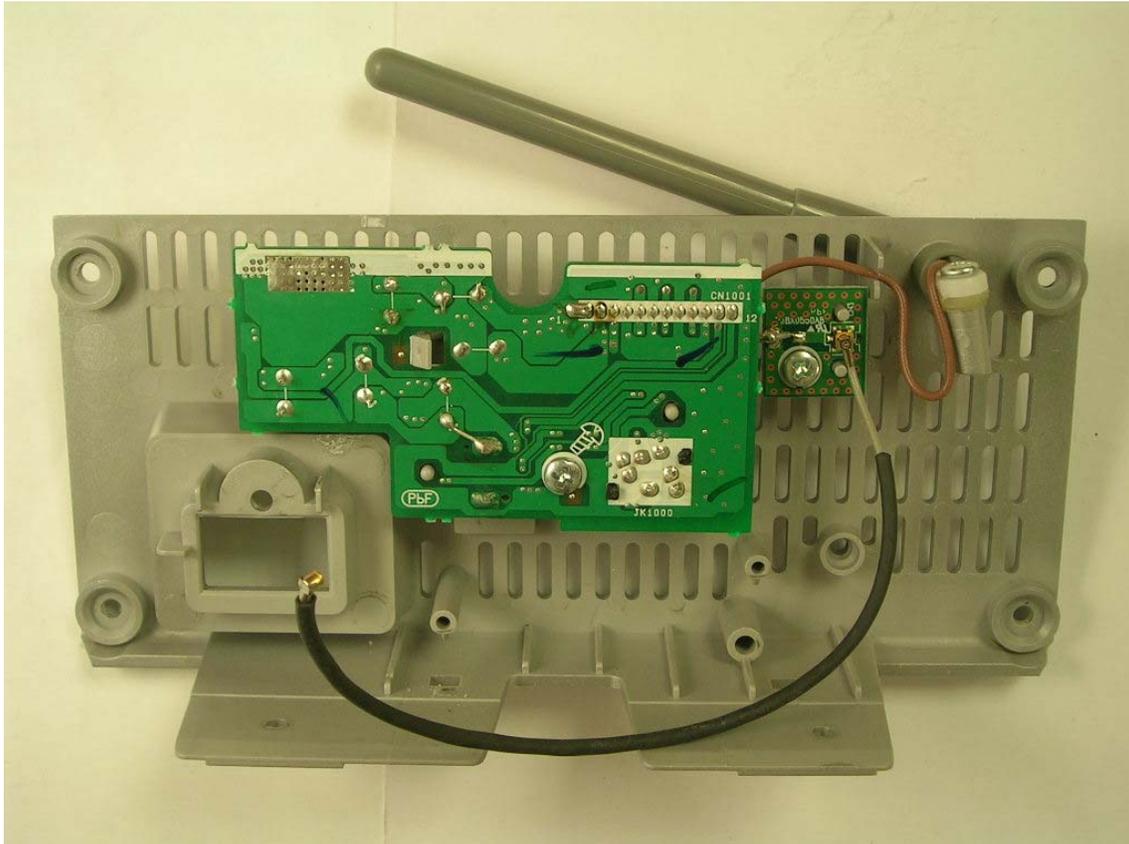


RF Antenna Connection Internal View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

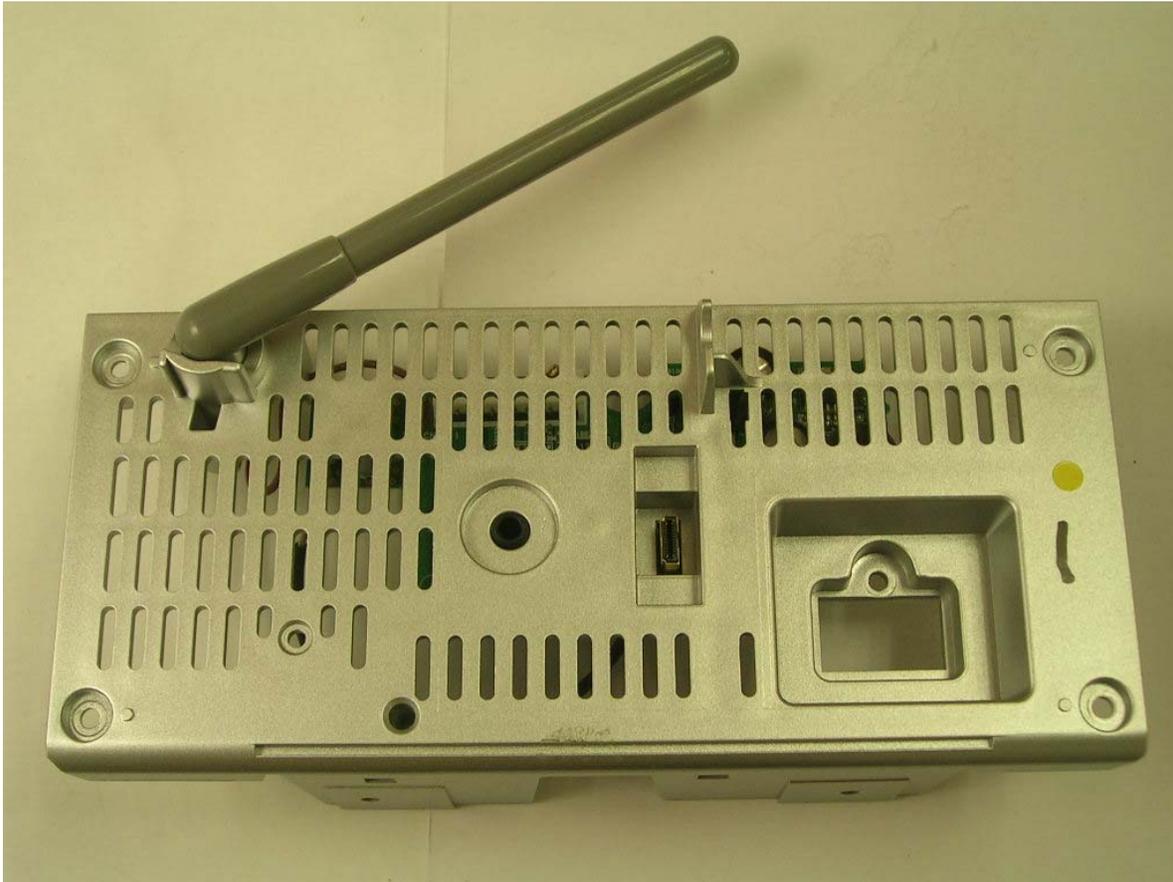


RF Antenna External View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

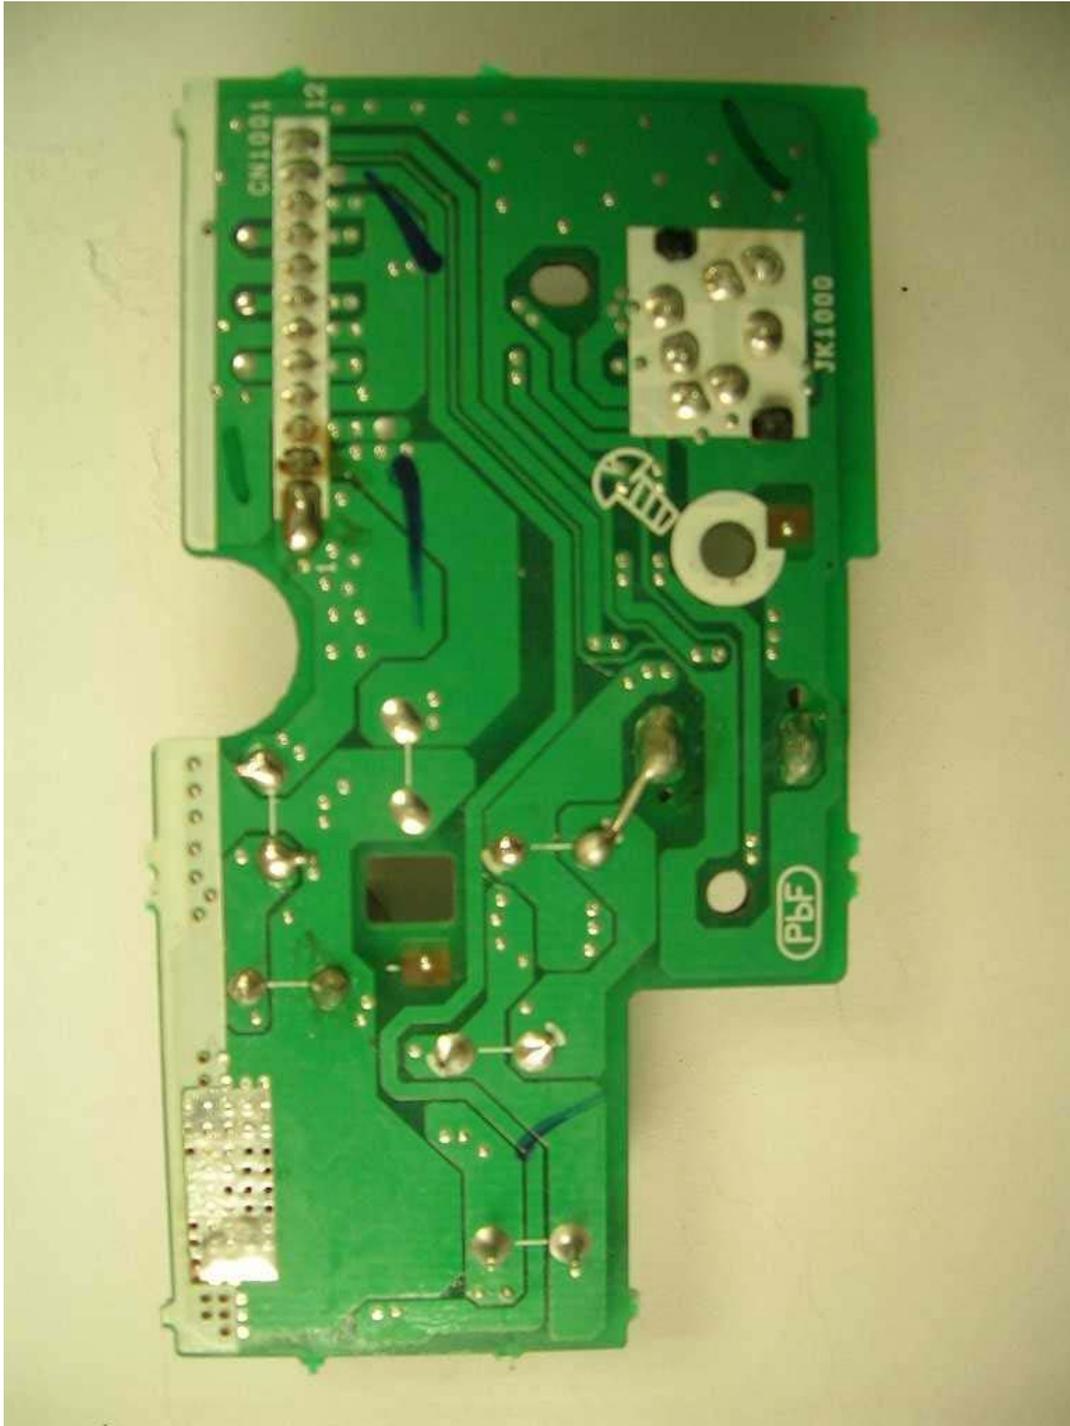


EUT PCB Trace Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

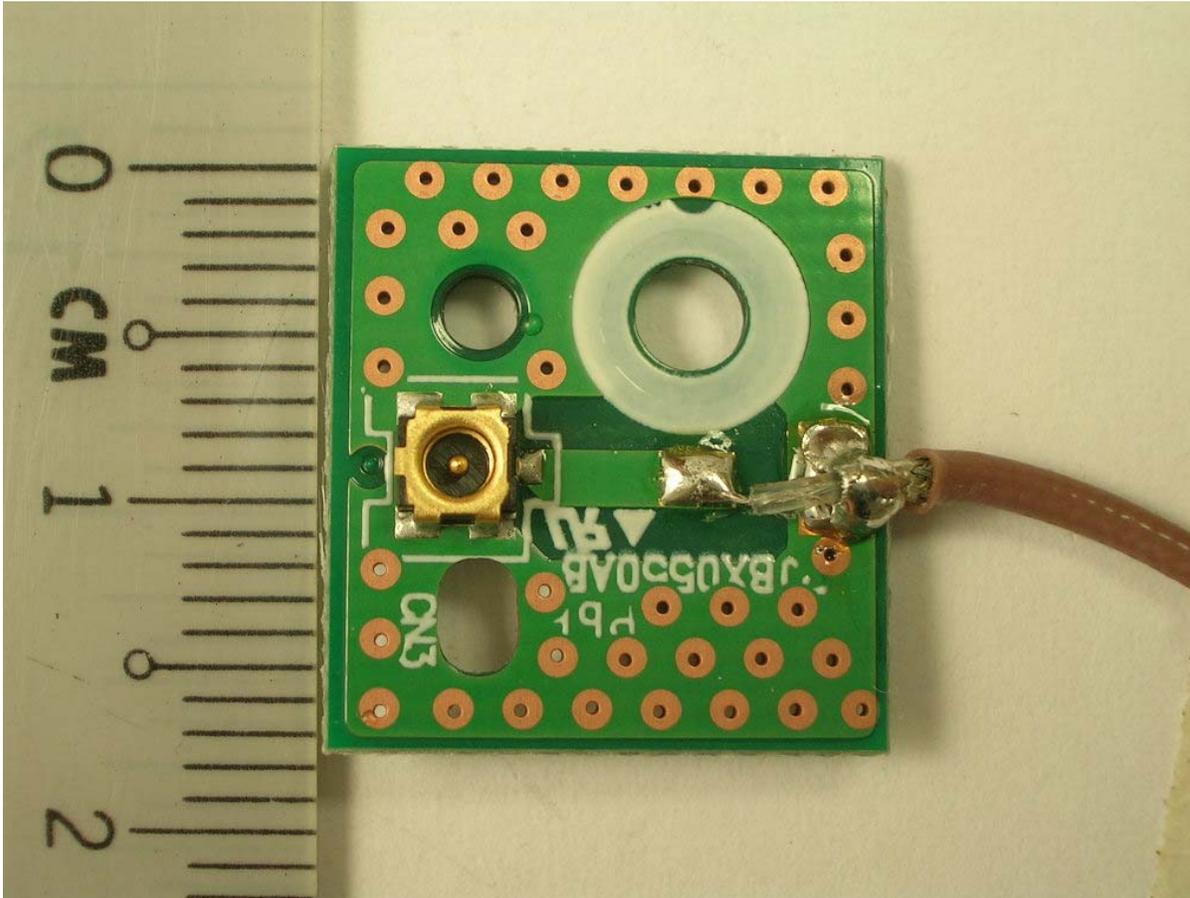


Antenna Board PCB Component Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

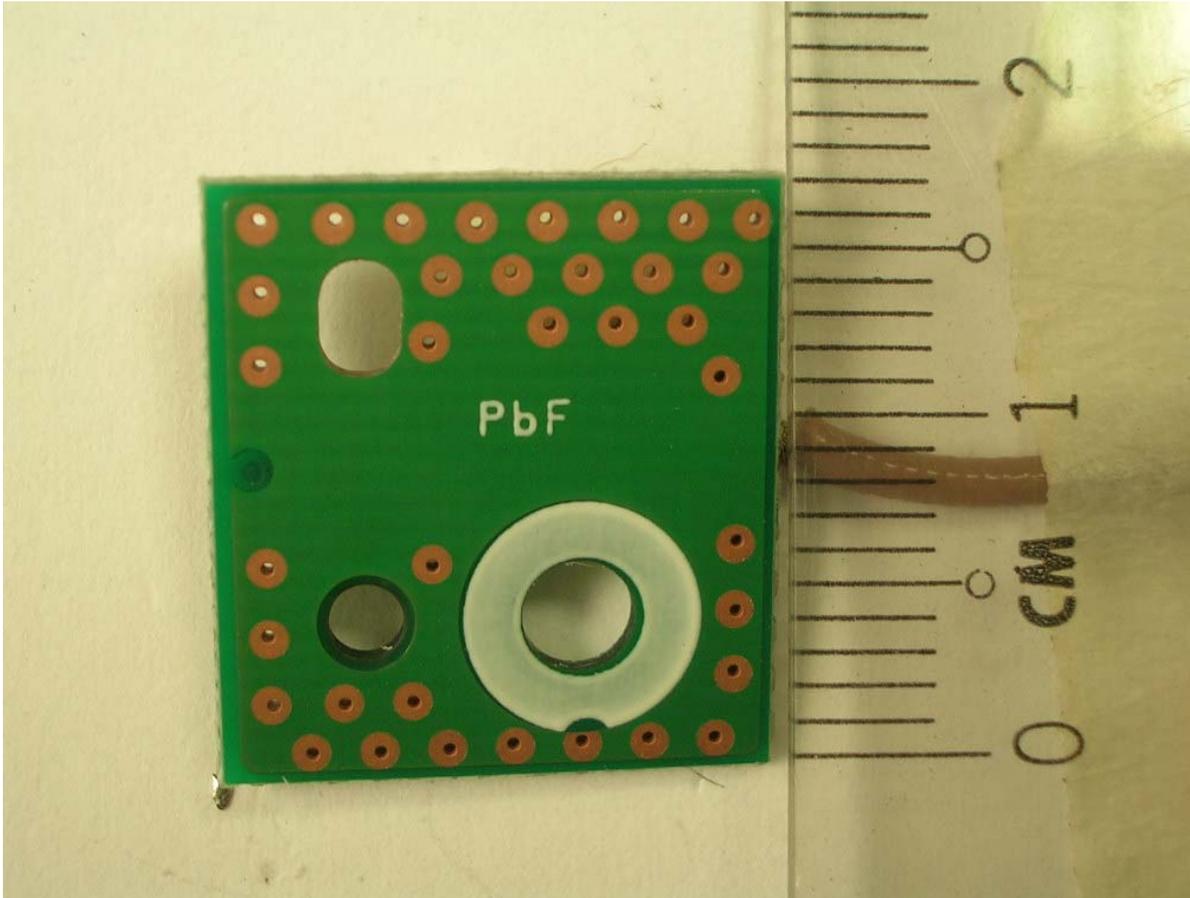


Antenna Board PCB Trace Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

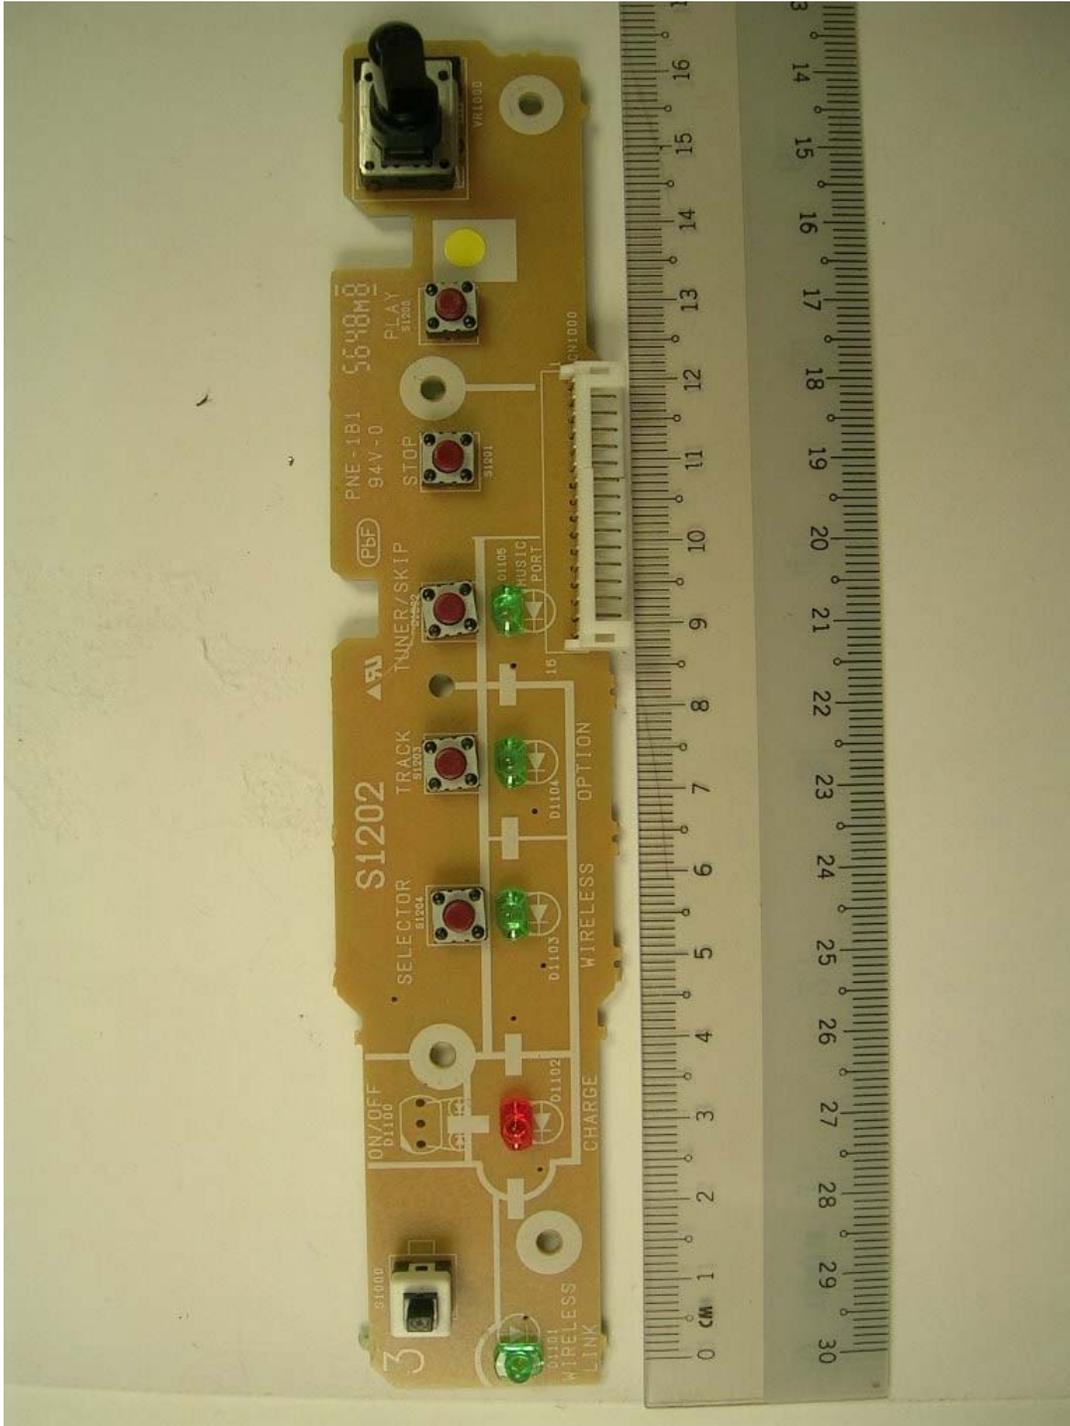


Display PCB Component Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS

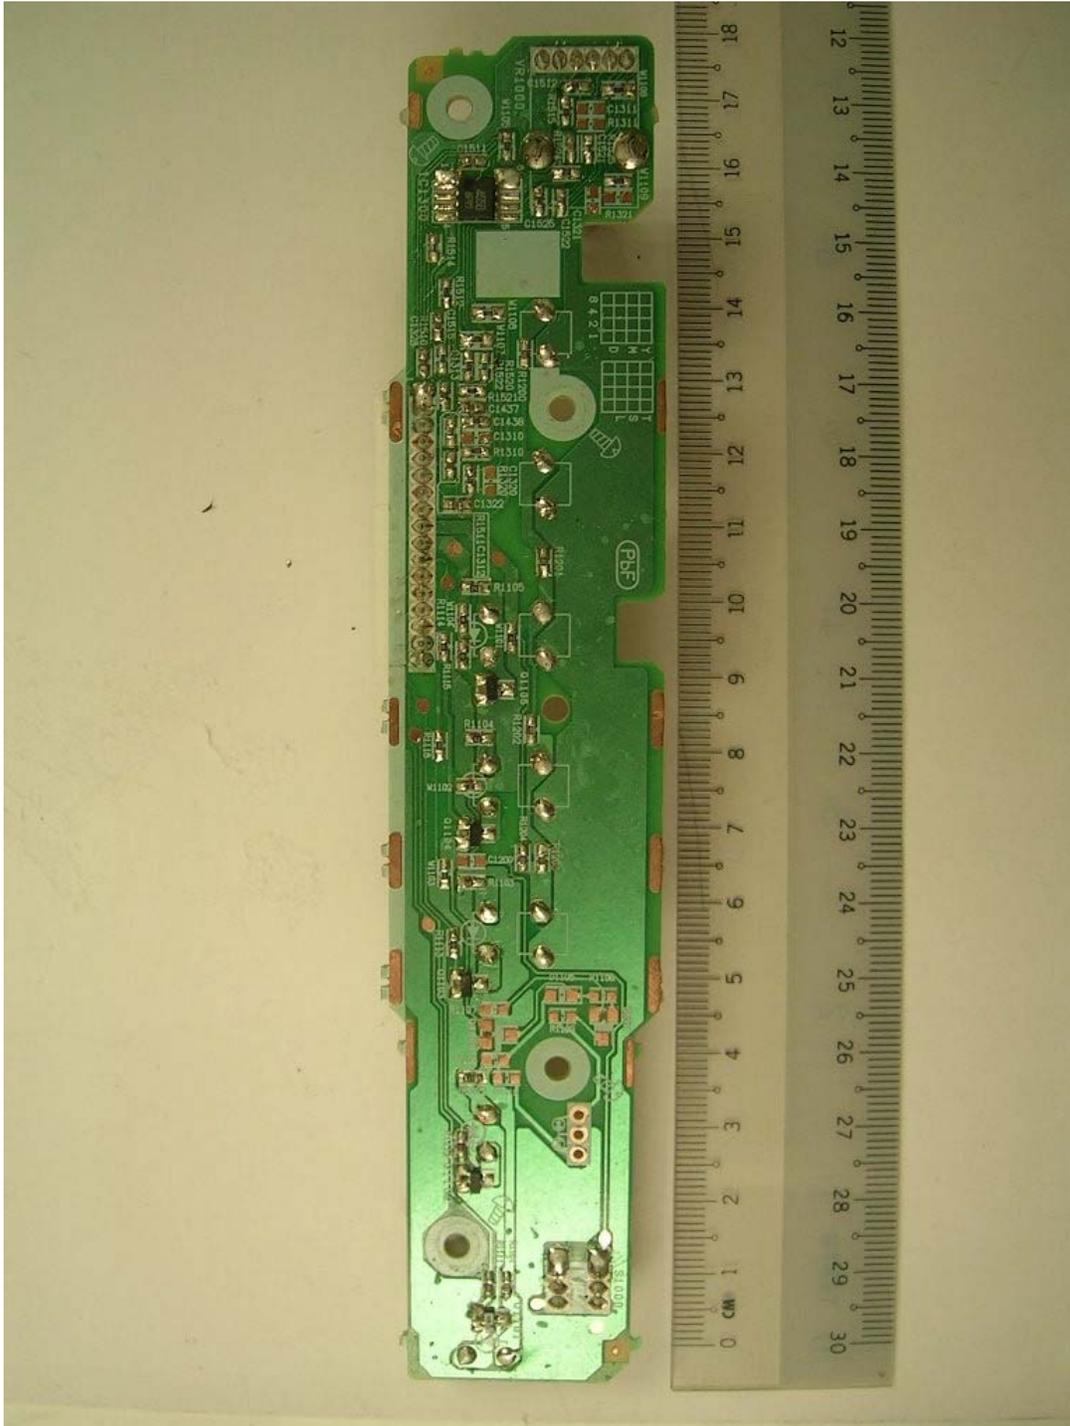

Display PCB Trace Side



ANNEX B


FCC LABEL & POSITION

FCC LABEL & POSITION


ANNEX B

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

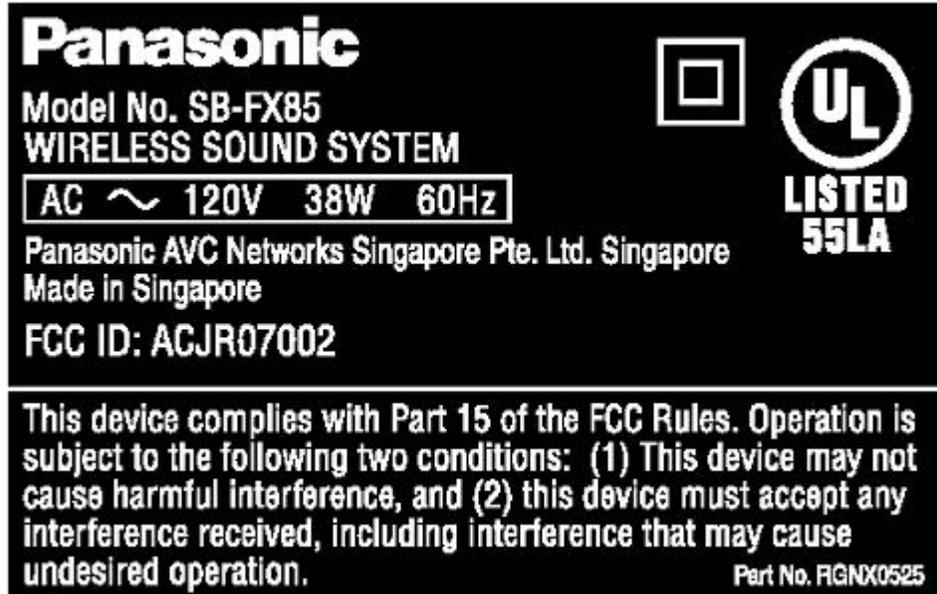

Sample Label

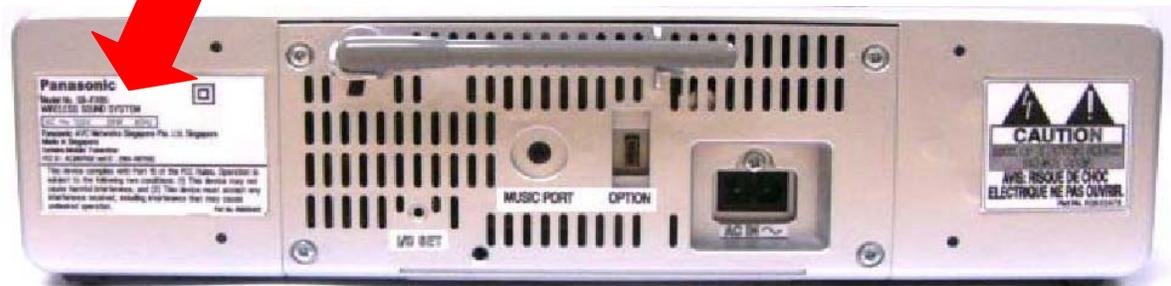

Physical Location of FCC Label on EUT



ANNEX C

**USER MANUAL
TECHNICAL DESCRIPTION
BLOCK & CIRCUIT DIAGRAMS**

(Please refer to manufacturer for details)