

# TEST REPORT



Your Ref:

Date: 03 Mar 2005

Our Ref: 56S041081/02

Page: 1 of 37

DID: +65-6885 1449

Fax: +65-6777 6409

**NOTE:** This report is issued subject to PSB Corporation's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH  
FCC Parts 15B & C : 2004  
OF A  
**DIGITAL TRANSMITTER**  
[ MODEL : SH-FX50T ]  
[ FCC ID : ACJSEFX50 ]

**TEST FACILITY** Telecoms & EMC, Testing Group, PSB Corporation Pte Ltd  
1 Science Park Drive, Singapore 118221

**FCC REG. NO.** 90937 (3m & 10m OATS)  
99142 (10m Anechoic Chamber)  
871638 (5m Anechoic Chamber)  
325572 (10m Anechoic Chamber)

**IND. CANADA REG. NO.** IC 4257 (10m Anechoic Chamber)

**PREPARED FOR** Panasonic AVC Networks Singapore Pte Ltd  
202 Bedok South Avenue 1  
Singapore 469332

Tel : 65 6249 7622 Fax : 65 6245 8804

**JOB NUMBER** 56S041081

**TEST PERIOD** 25 Feb 2005 – 02 Mar 2005

**PREPARED BY**

Lim Cher Hwee  
Engineer

**APPROVED BY**

Colin Gan  
Vice President



LA-2001-0212-A The results reported herein have been  
LA-2001-0213-F performed in accordance with the  
LA-2001-0214-E laboratory's terms of accreditation under  
LA-2001-0215-B the Singapore Accreditation Council -  
LA-2001-0216-G Singapore Laboratory Accreditation  
LA-2001-0217-G Scheme

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING  
EQUIPMENT LIST

EUT OPERATING  
CONDITION

TEST RESULTS

- ANNEX A - TEST INSTRUMENTATION & GENERAL PROCEDURES
- ANNEX B - EUT PHOTOGRAPHS / DIAGRAMS
- ANNEX C - USER MANUAL, TECHNICAL DESCRIPTION, BLOCK & CIRCUIT DIAGRAMS
- ANNEX D - FCC LABEL & POSITION

The product was tested in accordance with the customer's specifications.

**Test Results Summary**

Test Standard	Description	Pass / Fail
FCC Part 15: 2004		
15.107, 15.207	Conducted Emissions	Pass
15.205	Radiated Emissions (Restricted Band Requirements)	Pass
15.109, 15.209	Radiated Emissions (Spurious Emissions)	Pass
15.247 (a)(1)	Carrier Frequency Separation	Pass
	Spectrum Bandwidth (20dB Bandwidth Measurement)	Pass
15.247 (a)(1)(iii)	Number of Hopping Frequencies	Pass
	Average Frequency Dwell Time	Pass
15.247 (b)(1)	Maximum Peak Power	Pass
15.247 (d)	RF Conducted Spurious Emissions & Band Edge Compliance at the Transmitter Antenna Terminal	Pass
15.247 (e)	Peak Power Spectral Density	Pass
1.1310	Maximum Permissible Exposure	Pass
15.35(c)	Duty Cycle Correction Factor	Refer to page 36 for details

**Notes**

- Three channels as listed below, which respectively represent the lower, middle and upper channels of the equipment under test (EUT) were chosen and tested:  

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
Channel 1	2.403
Channel 39	2.441
Channel 78	2.480

Following channels are not used after initialisation: 0, 8, 16, 24, 32, 40, 48, 56, 64, 72 (as detailed in the Operational Description).
- All the measurements in section 15.247 were done based on conducted measurements.
- The EUT meets the verification requirement of a receiver as stated in FCC Part 15B Clause 15.101(b).

**Modifications**

No modifications were done.

Description	: The Equipment Under Test (EUT) is a <b>Digital Transmitter</b> .
Manufacturer	: Matsushita Electric Industrial Co., Ltd. Panasonic AVC Networks Singapore Pte Ltd. 202, Bedok South Avenue 1 Singapore 469332
Model Number	: SH-FX50T
FCC ID	: ACJSEFX50
IC	: 216A-SEFX50
Serial Number	: B100152
Baseband Microprocessor	: DWM 3100 (Open Solution)
Operating / Transmitting Frequency Range	: 2.400GHz to 2.480GHz
RF Power Output	: 11.7dBm (0.0148W)
Clock / Oscillator Frequency	: 32MHz
Modulation	: Gaussian Frequency Shift Keying (GFSK) with BT = 0.5
Pulse Train Cycle	: 1.25ms
Port / Connectors	: Gold finger pads [for +5V, PS Gnd, Connect, A Gnd, Mute, Right (Audio), A Gnd, Left (Audio)]
Rated Input Power	: 5V DC 120mA

**SUPPORTING EQUIPMENT DESCRIPTION**

---

The Equipment Under Test (EUT), a Wireless Modular Transceiver was tested as a stand-alone device without any supporting equipment.

**EUT OPERATING CONDITIONS**

The Digital Transmitter's power adapter was powered from 110V, 60Hz mains supply.

Tests	Description Of Operation
<ol style="list-style-type: none"> <li>1. Conducted Emissions</li> <li>2. Radiated Emissions</li> <li>3. Carrier Frequency Separation</li> <li>4. Spectrum Bandwidth (20dB Bandwidth Measurement)</li> <li>5. Number Of Hopping Frequencies</li> <li>6. Average Frequency Dwell Time</li> <li>7. Maximum Peak Power</li> <li>8. RF Conducted Spurious Emissions at the Transmitter Antenna Terminal</li> <li>9. Band Edge Compliance at the Transmitter Antenna Terminal</li> <li>10. Peak Power Spectral Density</li> <li>11. Maximum Permissible Exposure</li> <li>12. Duty Cycle Correction Factor</li> </ol>	<p>The EUT was exercised by operating in continuous transmission at lower, middle and upper channels respectively with maximum power.</p>

**FCC Part 15 (15.107 & 15.207) Class B Conducted Emission Results**

Frequency (MHz)	Q-P Value (dBµV)	Q-P Margin (dB)	AV Value (dBµV)	AV Margin (dB)	Line	Channel
0.4882	18.8	-37.5	7.0	-39.3	Live	1
0.5117	16.8	-39.2	7.0	-39.0	Neutral	39
0.7418	12.0	-44.0	6.8	-39.2	Neutral	79
0.8068	13.4	-42.6	6.6	-39.4	Live	1
1.0052	12.1	-43.9	6.5	-39.5	Live	79
28.3626	13.7	-46.3	9.4	-40.6	Neutral	79

Tested by: Lim Cher Hwee

Notes :

1. Environmental Conditions

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1029mbar
2. All possible modes of operation were investigated from 150kHz to 30MHz. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
3. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
4. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
9kHz - 30MHz  
 RBW: 10kHz                      VBW: 30kHz
5. Conducted Emissions Measurement Uncertainty  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ±2.4dB.



**Conducted Emissions Setup (Front View)**



**Conducted Emissions Setup (Rear View)**

**FCC Part 15 (15.109 & 15.209) Class B Radiated Emission (Spurious Emissions) Results**

Test Distance : 3m

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB $\mu$ V/m)	Q-P Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)
239.9830	35.0	-11.0	1	112	1.00	H
255.9820	44.8	-1.2	78	106	1.05	H
271.9820	42.9	-3.1	39	285	1.00	H
283.3600	34.3	-11.7	78	276	1.00	H
416.0000	36.6	-9.4	39	108	1.00	V
672.0310	33.6	-12.4	39	132	1.00	H

Spurious Emissions above 1GHz

Frequency (GHz)	Peak Value (dB $\mu$ V/m)	Average Value (dB $\mu$ V/m)	Average Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Pol (H/V)
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Tested by: Lim Cher Hwee

Notes :

- Environmental Conditions**

Temperature	24°C
Relative Humidity	58%
Atmospheric Pressure	1030mbar
- All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- "--" indicates no emissions were found and shows compliance to the limits as specified in section 15.209. The emissions were merely the noise floor.
- Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  

<u>30MHz - 1GHz</u>	RBW: 120kHz	VBW: 1MHz
<u>&gt;1GHz</u>	RBW: 1MHz	VBW: 1MHz

7. The peak emissions above 1GHz show compliance to the requirement stated in Section 15.35 (b).
8. The upper frequency of radiated emission investigations were according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
9. The channel in the table refers to the transmit channel of the EUT.
10. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is  $\pm 4.3\text{dB}$  (for EUTs < 0.5m X 0.5m X 0.5m).

**FCC Part 15C (15.205) Radiated Emissions (Restricted Band Requirements) Results**

Test Distance : 3m

Spurious Emissions (Restricted Band) ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB $\mu$ V/m)	Q-P Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--
--	--	--	--	--	--	--

Spurious Emissions (Restricted Band) above 1GHz

Frequency (GHz)	Peak Value (dB $\mu$ V/m)	Average Value (dB $\mu$ V/m)	Average Margin (dB)	Channel	Azimuth (Degrees)	Height (cm)	Pol (H/V)
1.4991	42.9	See Note 2	-13.1	1	360	1.00	H
4.8062	53.3	51.2	-2.8	1	360	1.00	V
4.8823	51.8	49.7	-4.3	39	180	1.00	H
4.9601	51.8	49.7	-4.3	78	195	1.00	H
7.3229	49.3	47.2	-6.8	39	355	1.00	V
--	--	--	--	--	--	--	--


Tested by: Lim Cher Hwee

Notes :

- Environmental Conditions**

Temperature	24°C
Relative Humidity	58%
Atmospheric Pressure	1030mbar
- As the measured peak shows compliance to the average limit, as such no average measurement was required and the corresponds average margin indicates the margin of the measured peak value below the average limit.
- "--" indicates no emissions were found and shows compliance to the limits as specified in section 15.209. The emissions were merely the noise floor.
- All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.

7. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
RBW: 120kHz          VBW: 1MHz  
>1GHz  
RBW: 1MHz          VBW: 1MHz
8. The peak emissions above 1GHz show compliance to the requirement stated in Section 15.35 (b).
9. The upper frequency of radiated emission investigations were according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
10. The channel in the table refers to the transmit channel of the EUT.
11. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is  $\pm 4.3\text{dB}$  (for EUTs < 0.5m X 0.5m X 0.5m).

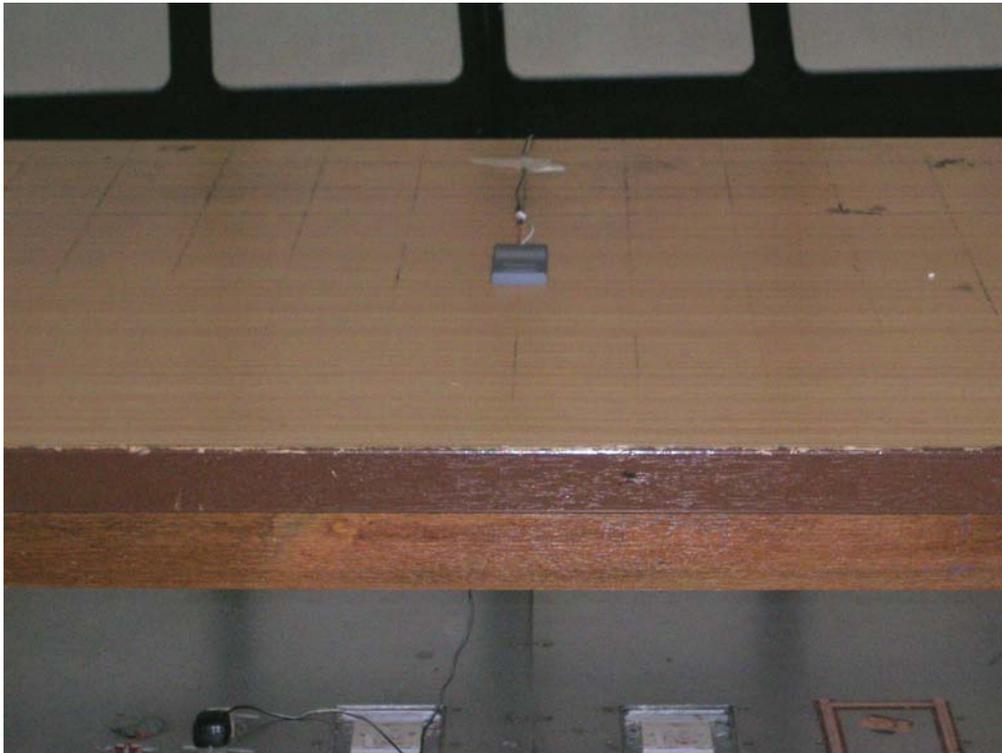

**Radiated Emissions Setup (Front View)**



**Radiated Emissions Setup (Rear View)**

**FCC Part 15C (15.247(a)(1)) Carrier Frequency Separation Results**

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.


Adjacent Channels	Channel Separation (MHz)
1 and 2 (2.403GHz and 2.404GHz)	1.015
38 and 39 (2.440GHz and 2.441GHz)	1.015
77 and 78 (2.479GHz and 2.480GHz)	1.005

Please refer to the attached Plots 1 - 3 for details.

Tested by: Lim Cher Hwee


Notes :

- |                                 |                      |          |
|---------------------------------|----------------------|----------|
| <u>Environmental Conditions</u> | Temperature          | 25°C     |
|                                 | Relative Humidity    | 59%      |
|                                 | Atmospheric Pressure | 1030mbar |

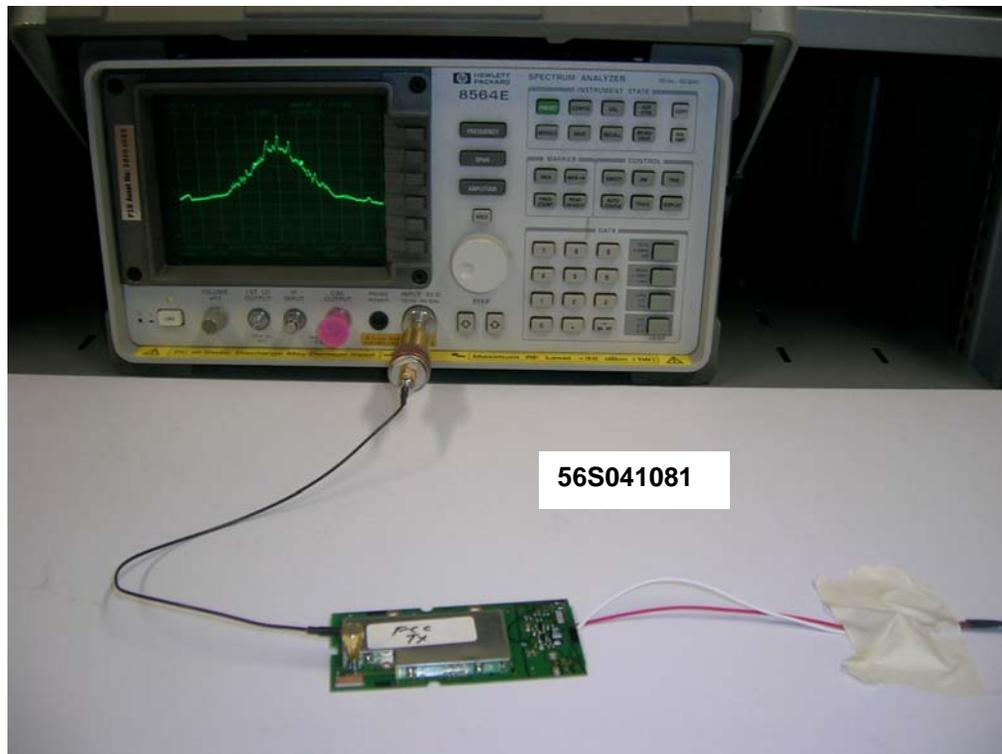


**Carrier Frequency Separation Measurement Test Setup**

CARRIER FREQUENCY SEPARATION PLOTS

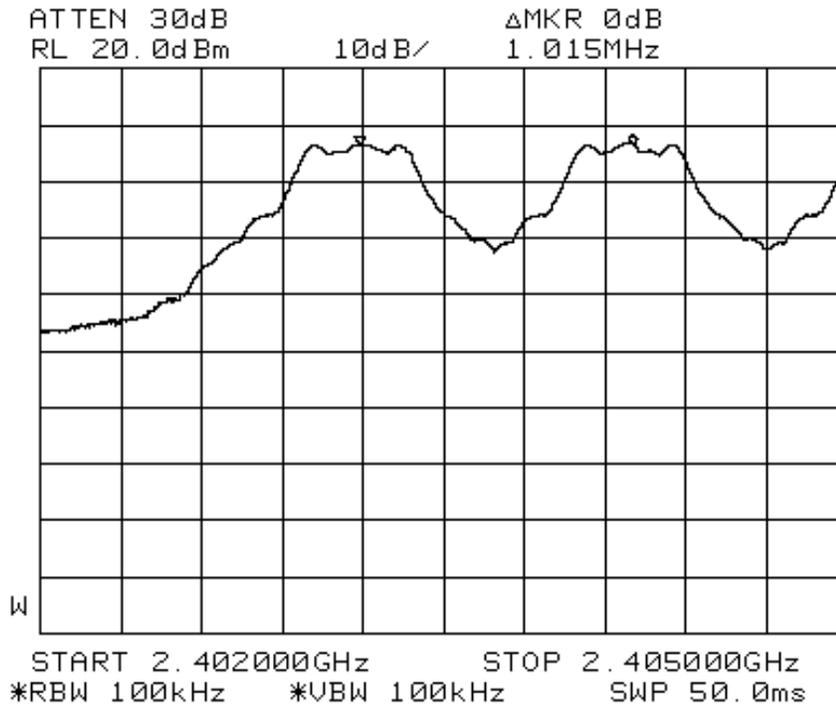

Plot 1- Channels 1 and 2 Separation

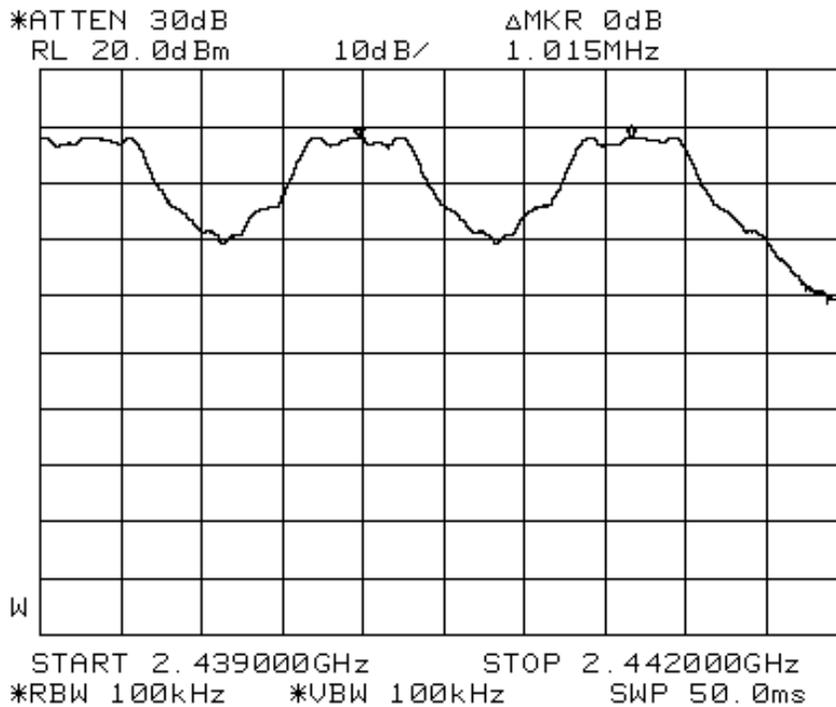

Plot 2 – Channels 38 and 39 Separation



**FCC Part 15C (15.247(a)(1)) Spectrum Bandwidth (20dB Bandwidth Measurement) Results**

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.


Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
1	2.403	0.635
39	2.441	0.695
78	2.480	0.630

Please refer to attached Plots 4 - 6 for details.

Tested by: Lim Cher Hwee

Notes :


- |    |                                 |                      |          |
|----|---------------------------------|----------------------|----------|
| 1. | <u>Environmental Conditions</u> | Temperature          | 25°C     |
|    |                                 | Relative Humidity    | 59%      |
|    |                                 | Atmospheric Pressure | 1030mbar |

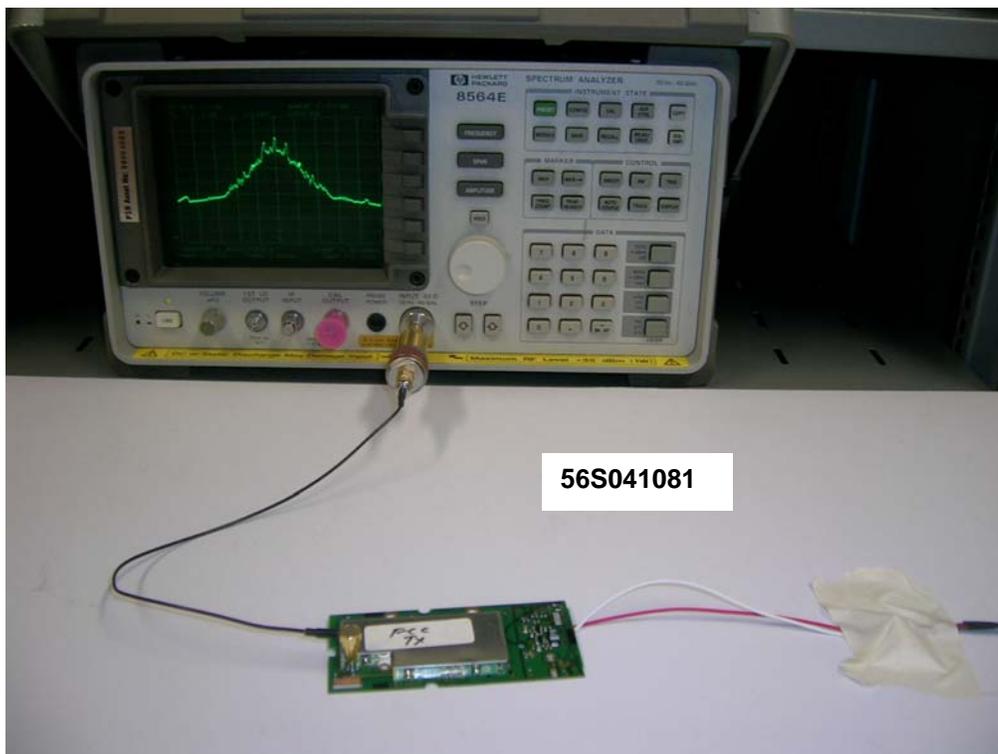

**Spectrum Bandwidth Measurement Test Setup**



SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) PLOTS

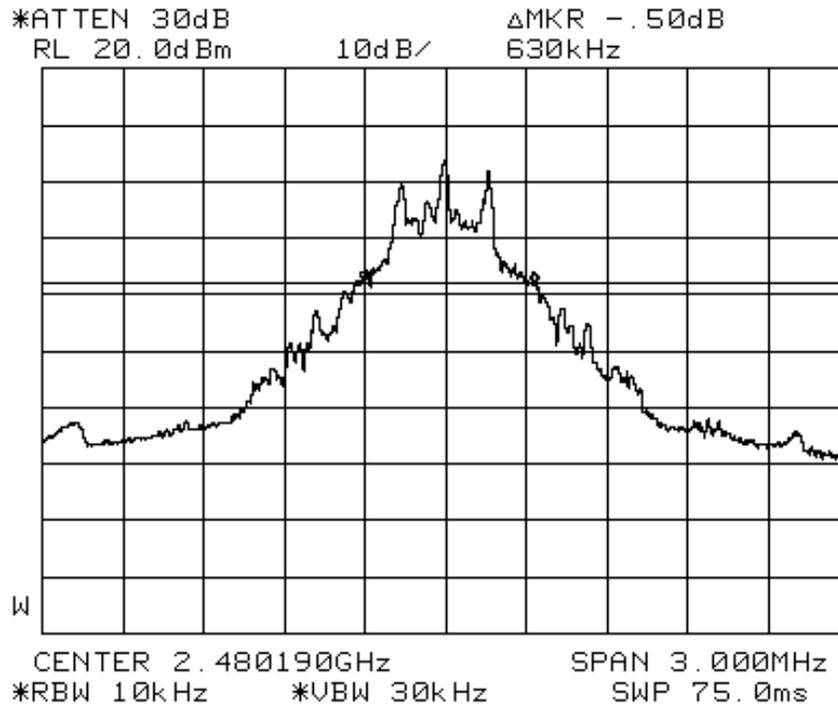

Plot 6 – Channel 78

**FCC Part 15C (15.247(a)(1)(iii)) Number of Hopping Frequencies Results**

The EUT shows compliance to the requirements of this section, which states the number of hopping frequencies shall be at least 15.

The EUT was found t to have 69 hopping frequencies.


Following channels are not used after initialisation: 0, 8, 16, 24, 32, 40, 48, 56, 64, 72 (as detailed in the Operational Description).

Please refer to the attached Plots 7 - 10 for details.

Tested by: Lim Cher Hwee

Notes :

- |    |                                 |                      |          |
|----|---------------------------------|----------------------|----------|
| 1. | <u>Environmental Conditions</u> | Temperature          | 25°C     |
|    |                                 | Relative Humidity    | 59%      |
|    |                                 | Atmospheric Pressure | 1030mbar |

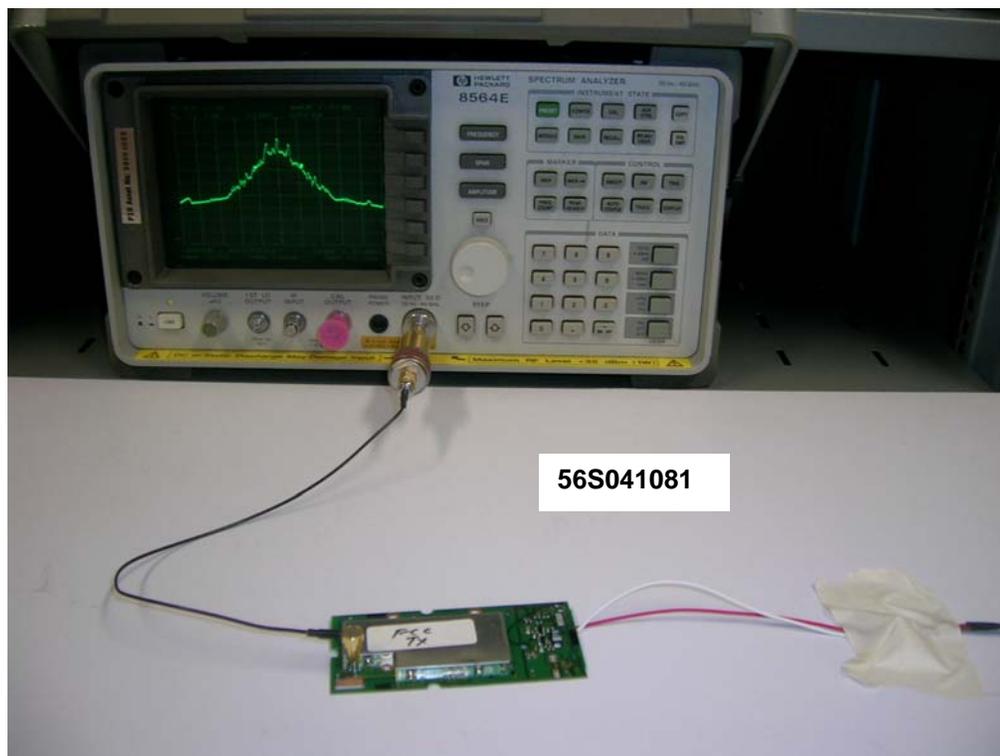

**Number of Hopping Frequencies Measurement Test Setup**





**FCC Part 15C (15.247(a)(1)(iii)) Average Frequency Dwell Time Results**

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4second multiplied by the number of hopping channels employed.

EUT hopping rate = 400 hops/s  
 Number of EUT hopping frequencies = 69 hops

Average Frequency Dwell Time = measured time slot length (l) x hopping rate (h) / number of hopping frequencies x 30 seconds period


Channel	Channel Frequency (GHz)	Measured Time Slot Length for Packet(ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
1	2.403	1.2500	0.2415	0.4
39	2.441	1.2500	0.2415	0.4
78	2.480	1.2500	0.2415	0.4

Please refer to the attached Plots 11 – 13 for measured time slot length details.

Tested by: Lim Cher Hwee

Notes :

- |                                 |                      |          |
|---------------------------------|----------------------|----------|
| <u>Environmental Conditions</u> | Temperature          | 25°C     |
|                                 | Relative Humidity    | 59%      |
|                                 | Atmospheric Pressure | 1030mbar |

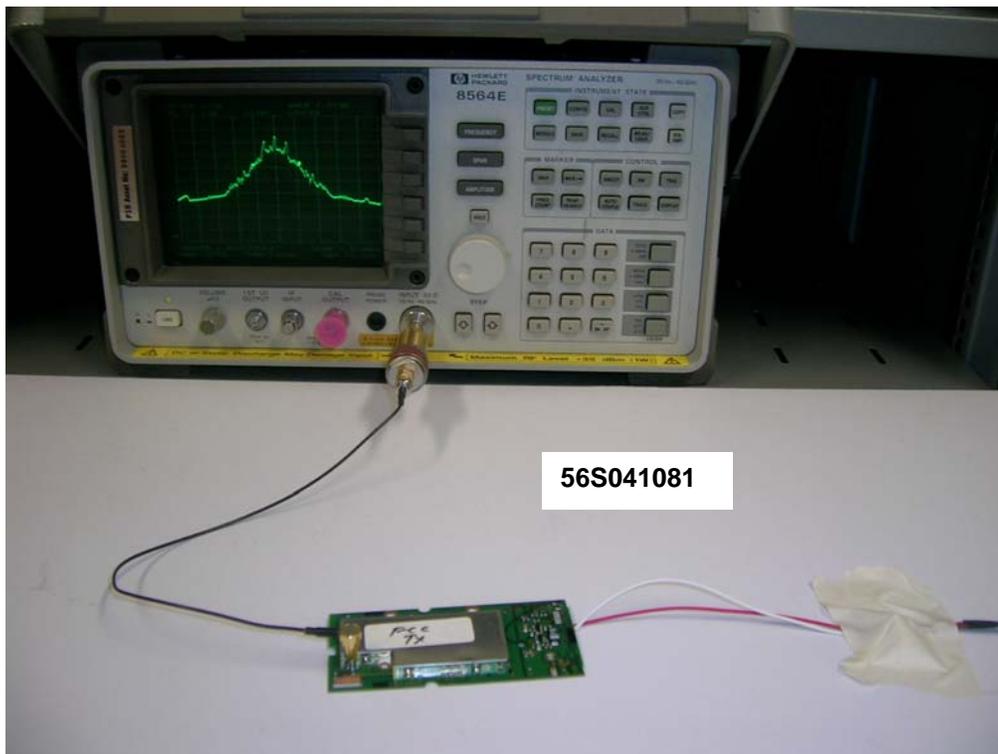

**Average Frequency Dwell Time Measurement Test Setup**





**FCC Part 15C (15.247(b)(1)) Maximum Peak Power Results**

The EUT shows compliance to the requirements of this section, which states the peak power of an intentional radiator (EUT) shall not exceed 21dBm (0.125 Watt) for other frequency hopping systems.

The maximum peak power for Channels 1, 39 and 78 at 2.403GHz, 2.441GHz and 2.480GHz respectively were investigated and found below 21dBm (0.125Watt).


Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Limit (W)
1	2.403	0.0110	0.125
39	2.441	0.0148	0.125
78	2.480	0.0079	0.125

Tested by: Lim Cher Hwee

Notes :

- Environmental Conditions

Temperature	25°C
Relative Humidity	59%
Atmospheric Pressure	1030mbar
- Power analyser of Universal Radio Communication Tester was used for power measurement with peak detection as mode of measurement. The power analyser mode supports a wideband power measurement ranging from 100kHz to 2700MHz.

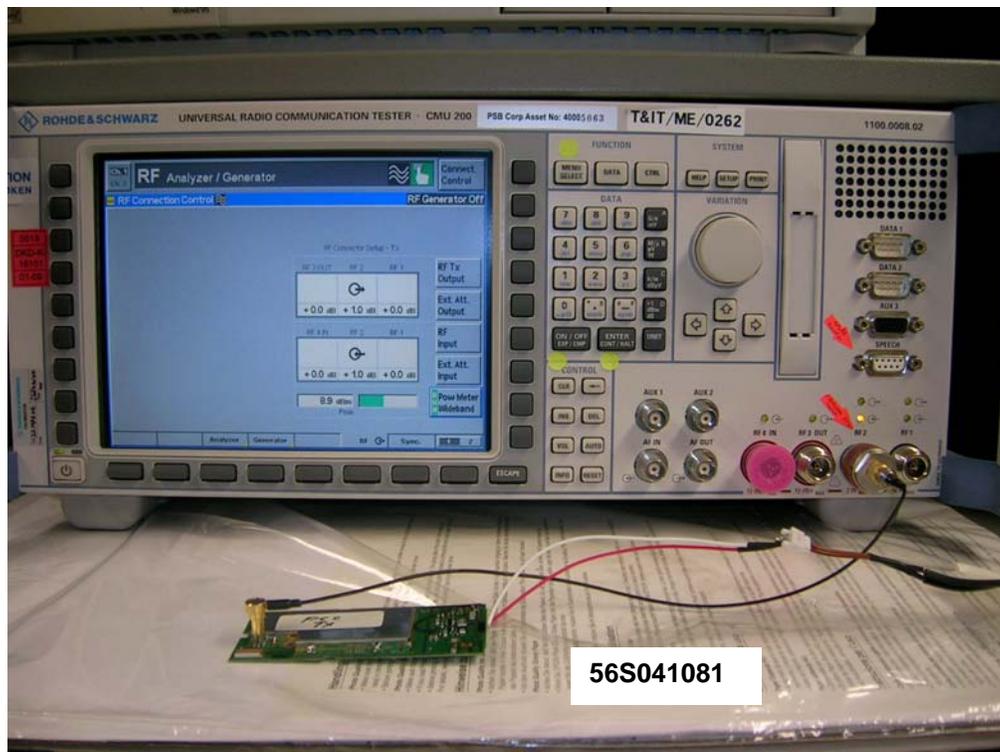

**Maximum Peak Power Measurement Test Setup**

**FCC Part 15C (15.247(d)) RF Conducted Spurious Emissions & Band Edge Compliance at the Transmitter Antenna Results**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the RF power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.


The RF conducted spurious emissions were scanned from 10MHz to 25GHz for Channels 1, 39, and 78 with channel frequency at 2.403GHz, 2.441GHz and 2.480GHz respectively. No significant signal was found and they were below the specified limit. Please refer to the attached Plots 14 – 19 for details.

The conducted spurious at lower and upper band-edges (2.4000GHz and 2.4835GHz) were scanned. The spurious emissions at band-edges were found below the specified limit. Please refer to the attached Plots 20 – 21 for details.

Tested by: Lim Cher Hwee

Notes :

- |    |                                 |                      |          |
|----|---------------------------------|----------------------|----------|
| 1. | <u>Environmental Conditions</u> | Temperature          | 25°C     |
|    |                                 | Relative Humidity    | 59%      |
|    |                                 | Atmospheric Pressure | 1030mbar |

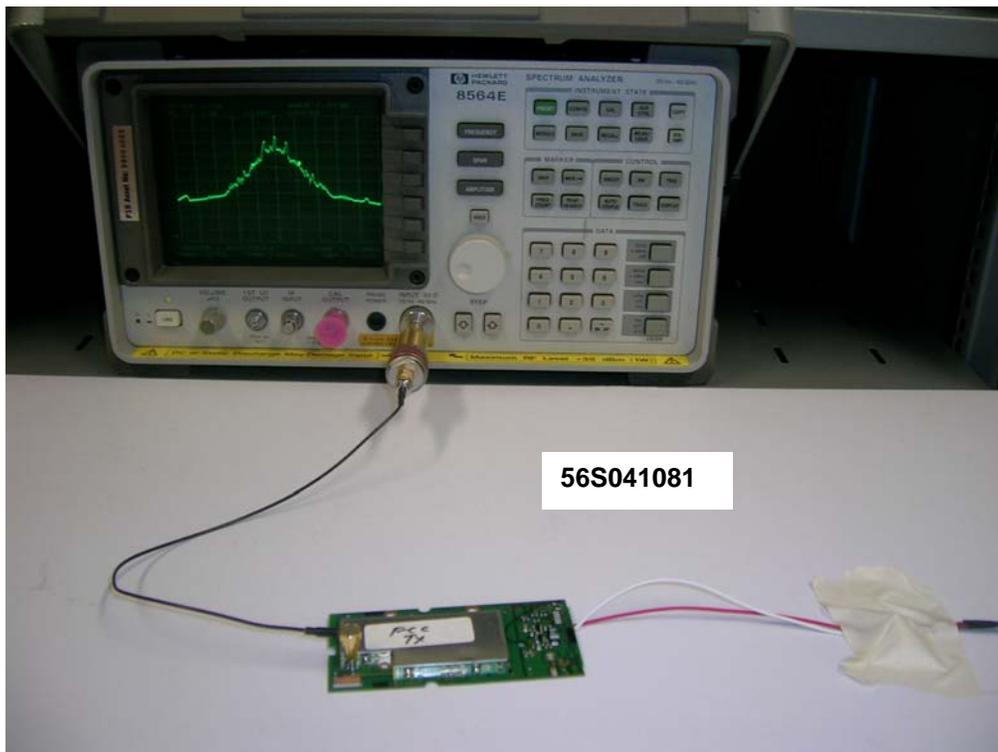


**RF Conducted Spurious & Band Edge Measurement Test Setup**






RF CONDUCTED SPURIOUS EMISSIONS PLOTS

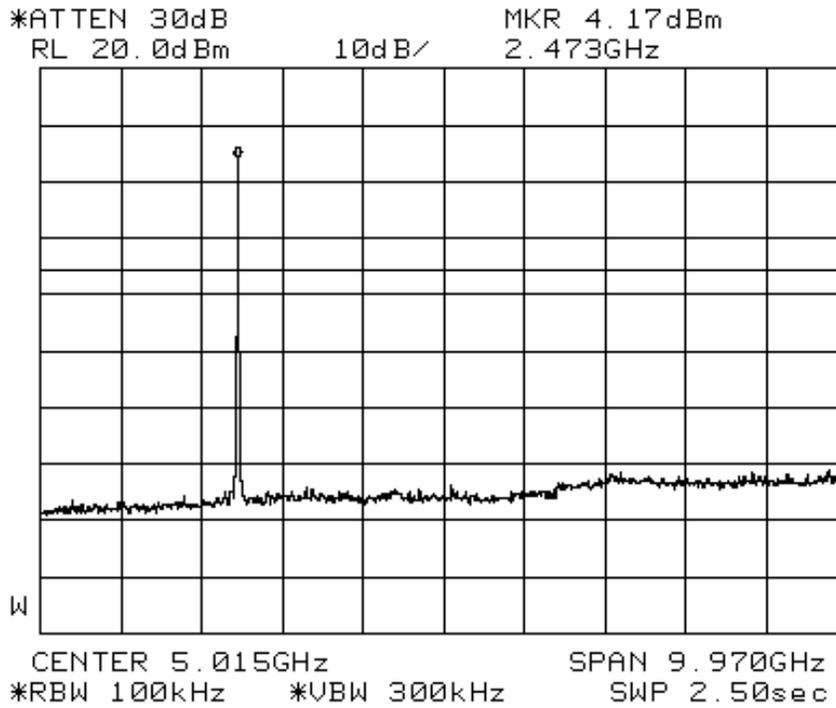

Plot 18 – Channel 78

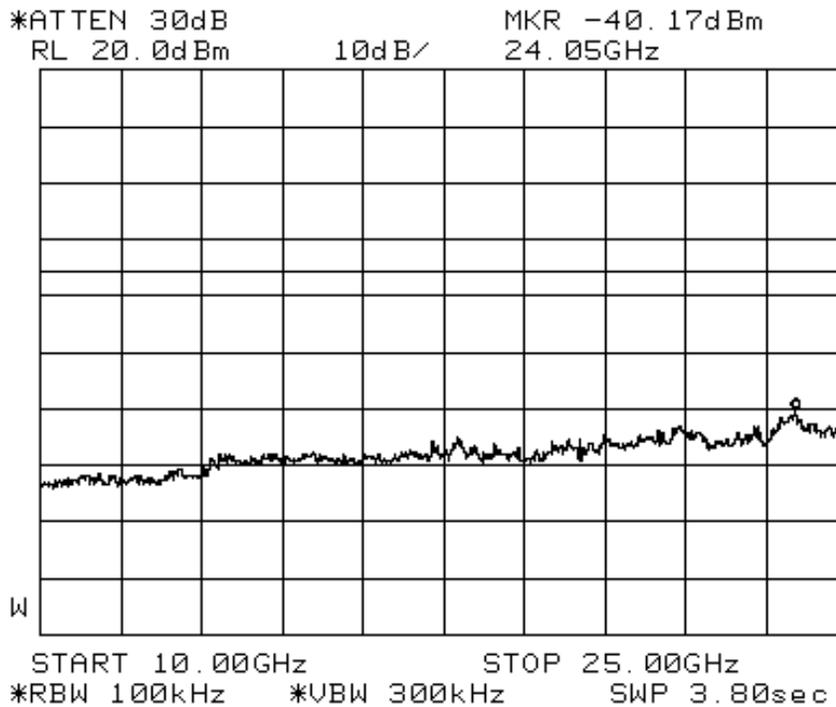

Plot 19 – Channel 78



**FCC Part 15C (15.247(e)) Peak Power Spectral Density Results**

The EUT shows compliance to the requirements of this section, which states the peak power spectral density of an intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.


Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
1	2.403	0.9268	6.3
39	2.441	1.4689	6.3
78	2.480	0.5212	6.3

Please refer to the attached Plots 22 – 24 for details.

Tested by: Lim Cher Hwee

Notes :

- |                                 |                      |          |
|---------------------------------|----------------------|----------|
| <u>Environmental Conditions</u> | Temperature          | 25°C     |
|                                 | Relative Humidity    | 59%      |
|                                 | Atmospheric Pressure | 1030mbar |

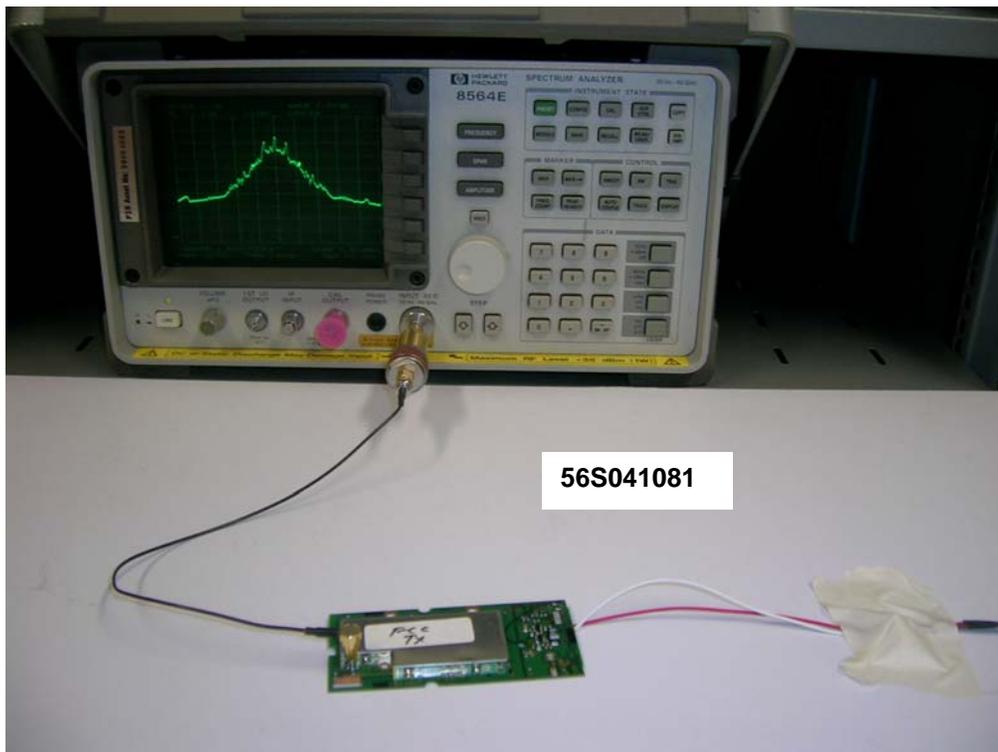

**Peak Power Spectral Density Measurement Test Setup**





**FCC Part 1.1310 Maximum Permissible Exposure (MPE) Results**

Frequency (MHz)	Power Density Value (mW/cm <sup>2</sup> )	Averaging Time (min)	Limit (mW/cm <sup>2</sup> )	Margin (mW/cm <sup>2</sup> )
2403	0.05	30	1.0	-0.95
2441	0.13	30	1.0	-0.87
2480	0.07	30	1.0	-0.93

Tested by: Gary Ng

Notes :

- Environmental Conditions

Temperature	24°C
Relative Humidity	55%
Atmospheric Pressure	1030mbar
- All possible modes of operation were investigated. Only the worst case, highest radiation levels were measured. Measurements were taken at the required averaging time. All other radiation levels were relatively insignificant.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 0.1MHz – 3GHz is ±15% .



**Maximum Permissible Exposure Measurement Test Setup**



**This Report is issued under the following conditions:**

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
2. Unless otherwise requested, a report shall contain only technical results. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.
3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that PSB Corporation approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that PSB Corporation in any way "guarantees" the later performance of the product/equipment.
4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. PSB Corporation therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through PSB Corporation, unless the Client has authorised PSB Corporation in writing to do so.
6. PSB Corporation may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.
7. All copyright in the report shall remain with PSB Corporation and the Client shall, upon payment of PSB Corporation's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that PSB Corporation may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
8. Nothing in this report shall be interpreted to mean that PSB Corporation has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to PSB Corporation or to the report or results furnished by PSB Corporation in any advertisements or sales promotion.
10. Unless otherwise stated, the tests are carried out in PSB Corporation Pte Ltd, No.1 Science Park Drive Singapore 118221.

June 2004

**ANNEX A**

**TEST INSTRUMENTATION & GENERAL PROCEDURES**

**TEST INSTRUMENTATION & GENERAL PROCEDURES**

**ANNEX A**

**3m OATS Test Instrumentation  
(Conducted EMI)**

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
R&S Test Receiver (9kHz-30MHz)	ESH3	862301/005	24 Jun 2005	x
R&S Pulse Limiter – PL1	ESH3-Z2	357.8810.52	07 Apr 2005	x
EMCO LISN (for EUT) – LISN5	3825/2	9202-1936	28 May 2005	x

**Lab 8 – 3m Anechoic Chamber Test Instrumentation  
(Radiated Emissions)**

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
R&S Test Receiver (20Hz-26.5GHz) – ESMI3	ESMI	829214/005 829550/004	01 Sep 2005	x
HP Preamplifier (for ESMI2, 0.01-3GHz) – PA8	87405A	3207A00959	01 Apr 2005	x
MITEQ Preamplifier (0.1-26.5GHz) – PA10	NSP2650-N	728230	01 Apr 2005	x
Schaffner Bilog Antenna – BL8	CBL6143	5044	19 May 2005	x
EMCO Horn Antenna – H15	3115	0003-6088	22 Jun 2005	x
Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2005	x

**Lab 7 Test Instrumentation**

**(Carrier Frequency Separation, Number Of Hopping Frequencies, Spectrum Bandwidth (20dB Bandwidth Measurement), Average Frequency Dwell Time, Maximum Peak Power, RF Conducted Spurious Emissions at the Transmitter Antenna Terminal, Band Edge Compliance at the Transmitter Antenna Terminal, Duty Cycle Correction Factor, Peak Power Density)**

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
HP Spectrum Analyzer	8564E	3846A09953	16 Dec 2005	x
R&S Universal Radio Communication Tester	CMU 200	837587/068	22 Apr 2005	x

**Lab 1 Anechoic Chamber Test Instrumentation  
(Maximum Permissible Exposure)**

<u>Instrument</u>	<u>Model</u>	<u>S/No</u>	<u>Cal Due Date</u>	
PMM 8053 Portable Field Meter	8053	0220J10308	3 Feb 2006	x
PMM Electric and Magnetic Field Analyzer	EHP-50A	1311L10515	11 Jan 2006	x

**CONDUCTED EMISSIONS TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

**Sample Calculation Example**

At 20 MHz	limit = 250 μV = 47.96 dBμV
Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB	
Q-P reading obtained directly from EMI Receiver = 40 dBμV (Calibrated for system losses)	
Therefore, Q-P margin = 40 - 47.96 = -7.96	i.e. <b>7.96 dB below limit</b>

**RADIATED EMISSIONS TEST DESCRIPTION (3m ANC)****Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to find out the EUT highest emissions relative to the limit by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces such emissions.
3. The final measurement was then carried out at the selected frequency points based on the highest emissions arrangement found from step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 25GHz, using the Bi-log antenna for frequencies from 30MHz up to 3GHz, and the Horn antenna above 3GHz.

**Sample Calculation Example**

At 300 MHz	limit = 200 $\mu$ V/m = 46 dB $\mu$ V/m
Log-periodic antenna factor & cable loss at 300 MHz = 18.511 dB	
Q-P reading obtained directly from EMI Receiver = 40 dB $\mu$ V/m (Calibrated level including antenna factors & cable losses)	
Therefore, Q-P margin = 40 - 46 = -6	i.e. <b>6 dB below limit</b>

**CARRIER FREQUENCY SEPARATION TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 100kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.402GHz and 2.405GHz with frequency sweeping set to 50ms.
3. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
4. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
  - a. 2.439GHz to 2.442GHz
  - b. 2.478GHz to 2.481GHz

**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 10kHz and 30kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 1(2.403GHz).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 20dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 20dB peak frequency at lower ( $f_L$ ) and upper ( $f_H$ ) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
5. The 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies,  $|f_H - f_L|$ .
6. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**NUMBER OF HOPPING FREQUENCIES TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
4. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 300kHz and 1MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.40GHz and 2.421GHz with frequency sweeping set to 50ms.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 5 were repeated with the following start and stop frequencies settings:
  - a. 2.420GHz to 2.441GHz
  - b. 2.440GHz to 2.461GHz
  - c. 2.460GHz to 2.4835GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.

**AVERAGE FREQUENCY DWELL TIME TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.403GHz with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet was measured using the marker-delta function of the spectrum analyser. The average dwell time of the transmitting frequency was computed as below:

$$\text{Average Frequency Dwell Time} = \frac{\text{measured time slot length (l)} \times \text{hopping rate (h)}}{\text{number of hopping frequencies} \times 30 \text{ seconds period}}$$

$$\begin{aligned} \text{where EUT hopping rate} &= 400 \text{ hops/s} \\ \text{Number of EUT hopping} &= 69 \text{ hops} \\ \text{frequencies} & \end{aligned}$$

5. The steps 2 to 4 were repeated with the center frequency of the spectrum analyser were set to 2.441GHz and 2.480GHz respectively.

**MAXIMUM PEAK POWER TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 1 (2.403GHz).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The step 2 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**RF CONDUCTED SPURIOUS EMISSIONS AT THE TRANSMITTER ANTENNA TERMINAL TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 1 (2.403GHz).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**BAND EDGE COMPLIANCE AT THE TRANSMITTER ANTENNA TERMINAL TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.40GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.

**PEAK POWER SPECTRAL DENSITY TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 1 (2.403GHz).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**DUTY CYCLE CORRECTION FACTOR DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 1(2.403GHz).
2. The on time and period of the transmission pulse were measured.
3. The steps 2 and 3 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.
4. Compute the worst-case (longest on time) duty cycle correction factor as shown below.

$$\text{Duty Cycle Factor} = 20 \log [\text{Total On time} / \text{Period}]$$

**MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST DESCRIPTION****EUT Characterisation**

EUT characterisation, over the required frequency range as given in table 1 of FCC Part 1.1310 was carried out to determine the EUT mode of operation that produces the highest possible level of radio frequency radiation.

The EUT was placed in an anechoic chamber, at a height of about 1m on a table. Its radio frequency radiation profile was observed, using a field meter with the appropriate field probe antenna attached and 20cm away from the EUT. E-field (V/m) readings are recorded, since the field meter is most sensitive at this setting. Positions where maximum E-field readings are detected are noted for the final, actual measurement.

**Test Set-up**

1. The EUT and supporting equipment were set up on top of a non-metallic table.
2. The relevant field probe was positioned at least 20cm away from the EUT and supporting equipment boundary.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected positions obtained from the EUT characterisation.
3. Power density measurement ( $\text{mW}/\text{cm}^2$ ) was made using the field meter set to the required averaging time.
4. Steps 2 and 3 were repeated for the next position and its associate EUT operating mode, until all selected positions and modes were measured.

**Sample Calculation Example**

At 2400 MHz, limit =  $1.0 \text{ mW}/\text{cm}^2$

Power density reading obtained directly from field meter =  $0.3 \text{ mW}/\text{cm}^2$  averaged over the required 30 minutes.

Therefore, margin =  $0.3 - 1.0 = -0.7 \text{ mW}/\text{cm}^2$

i.e.  **$0.7 \text{ mW}/\text{cm}^2$  below limit**

**ANNEX B**

**TEST PHOTOGRAPHS / DIAGRAMS**

EUT PHOTOGRAPHS



Top View

EUT PHOTOGRAPHS




Bottom View

EUT PHOTOGRAPHS




Housing Internal View

EUT PHOTOGRAPHS

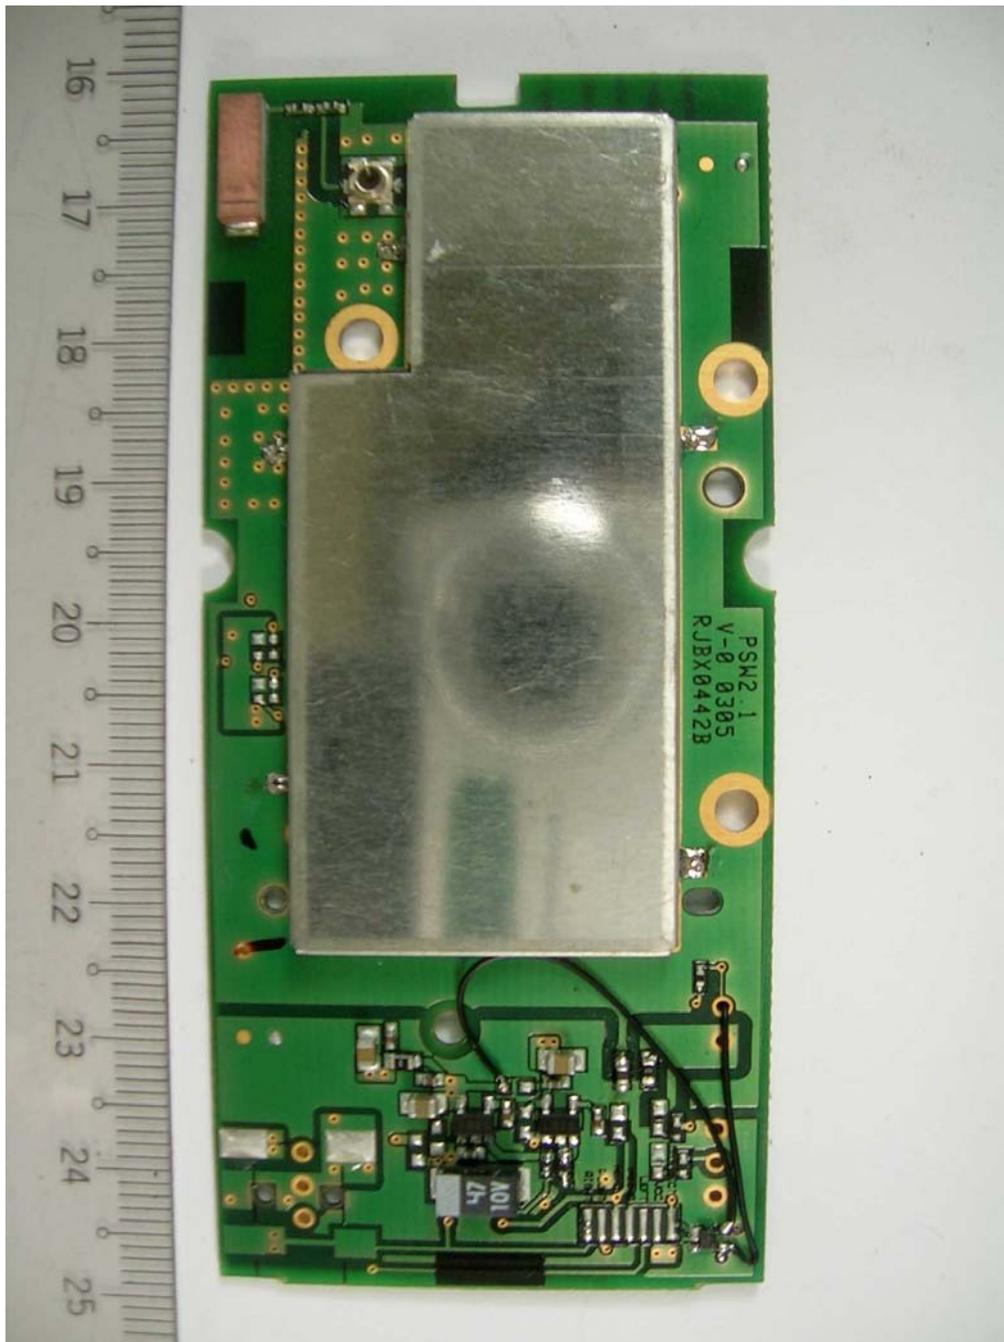

EUT PCB Top View (With RF Shield)


EUT PHOTOGRAPHS

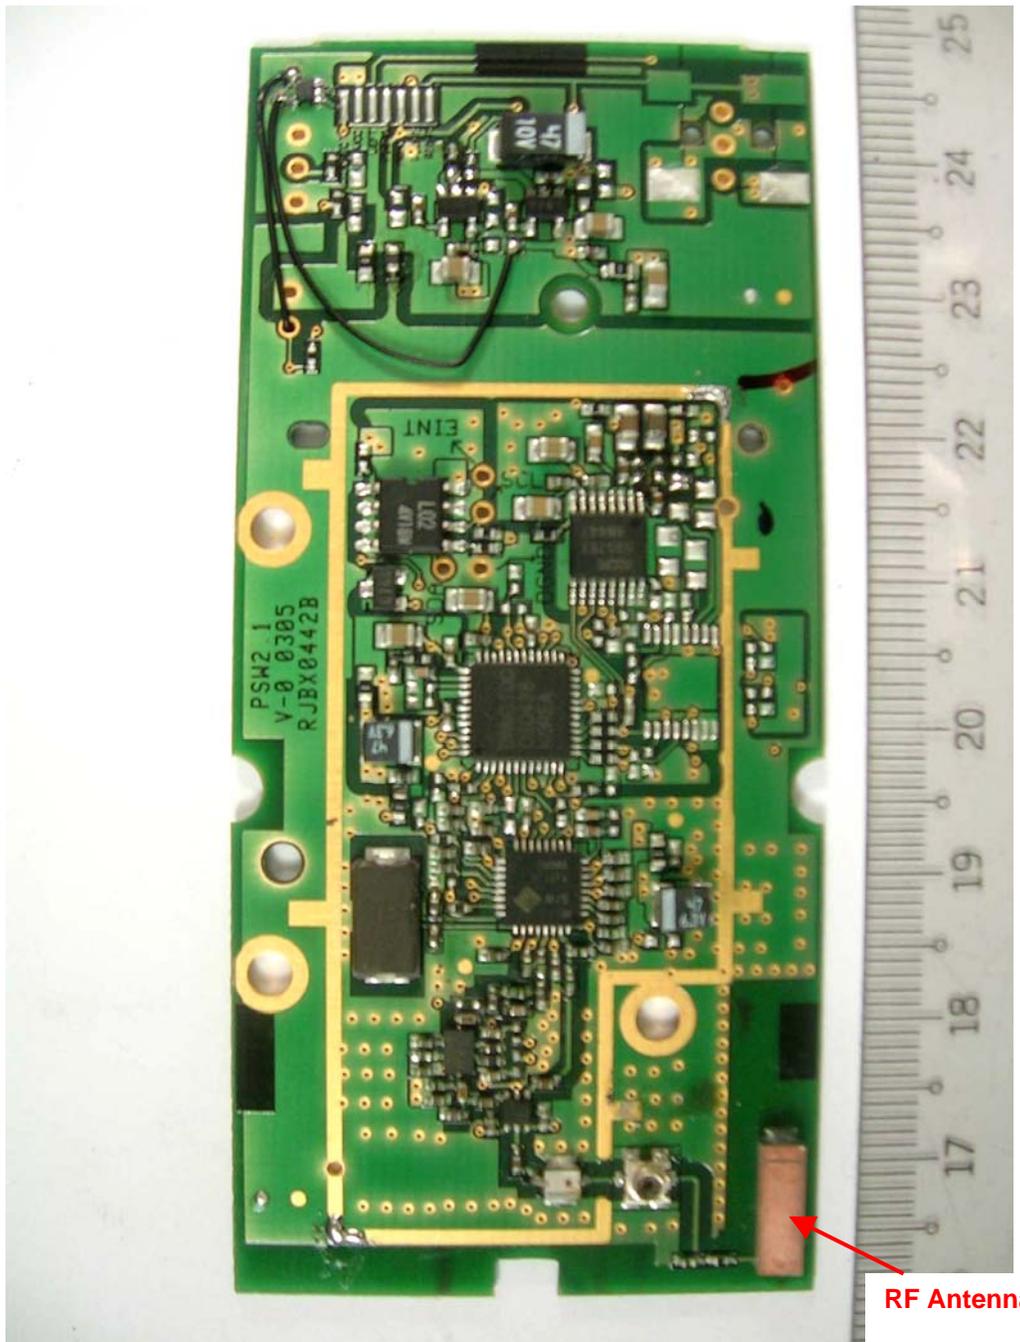

RF Antenna

EUT PCB Top View (With RF Shield Removed)

EUT PHOTOGRAPHS

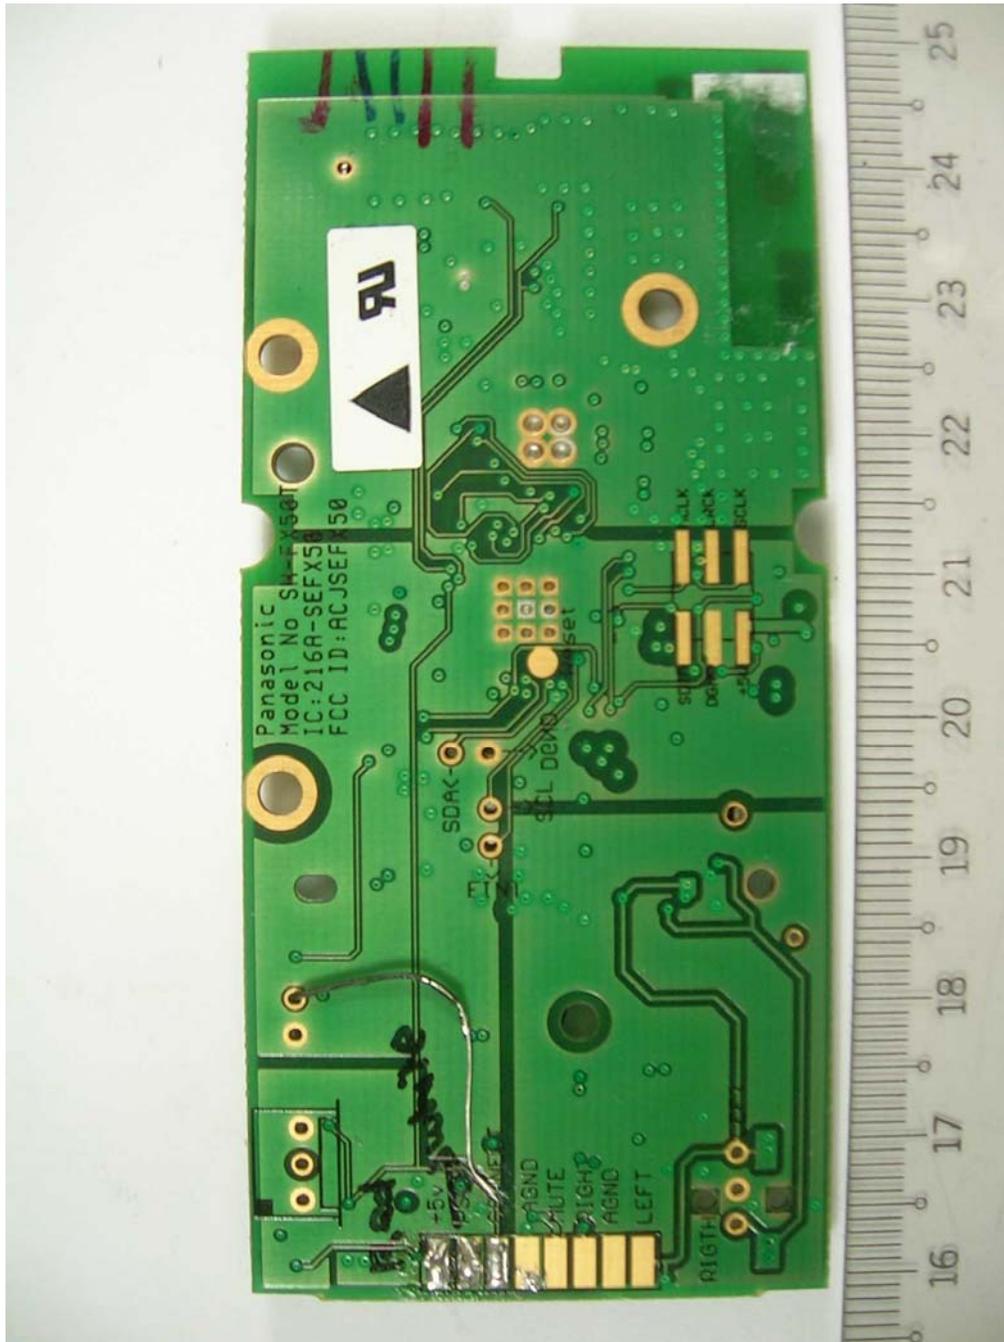

EUT PCB Bottom View

**ANNEX C**

**USER MANUAL  
TECHNICAL DESCRIPTION  
BLOCK & CIRCUIT DIAGRAMS**


(Please refer to attached copy)

**ANNEX D**

**FCC LABEL & POSITION**

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

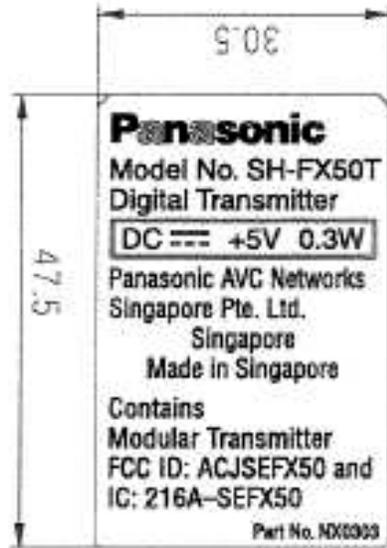

**Sample Label**



**Physical Location of FCC ID on EUT**