



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

October 23, 2015

ARRIS
101 Tournament Drive
Horsham, PA 19044

Dear Mark Hageali,

Enclosed is the EMC Wireless test report for compliance testing of the ARRIS, DCX3635 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 1).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\ARRIS\ EMC86201-FCC407 UNII 1 Rev. 2)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

Electromagnetic Compatibility Criteria Test Report

for the

**ARRIS
Model DCX3635**

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E

MET Report: EMC86201-FCC407 UNII 1 Rev. 2

October 23, 2015

Prepared For:

**ARRIS
101 Tournament Drive
Horsham, PA 19044**

**Prepared By:
MET Laboratories, Inc.**
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

for the

ARRIS
Model DCX3635

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E



Surinder Singh, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	September 29, 2015	Initial Issue.
1	October 13, 2015	Corrected FCC ID.
2	October 23, 2015	Engineer Corrections.

Table of Contents

I.	Executive Summary	1
A.	Purpose of Test	2
B.	Executive Summary	2
II.	Equipment Configuration	3
A.	Overview.....	4
B.	References.....	4
C.	Test Site	5
D.	Description of Test Sample	5
E.	Mode of Operation.....	5
F.	Method of Monitoring EUT Operation	5
G.	Modifications	5
a)	Modifications to EUT	5
b)	Modifications to Test Standard	5
H.	Disposition of EUT	5
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	6
	§ 15.203 Antenna Requirement	7
	§ 15.403(i) 26dB Bandwidth	8
	§15.407(a)(1) Maximum Conducted Output Power	15
	§15.407(a)(1) Maximum Power Spectral Density	31
	§15.407(b) & (6 - 7) Undesirable Emissions	46
	§ 15.407(b)(6) Conducted Emissions	102
	§ 15.407(f) RF Exposure	106
IV.	Test Equipment	107
V.	Certification & User's Manual Information.....	109
A.	Certification Information	110
B.	Label and User's Manual Information	114

List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing	2
Table 2. EUT Summary.....	4
Table 3. References	4
Table 4. Conducted Output Power, Test Results, 802.11a/ac/n 20 MHz	16
Table 5. Conducted Output Power, Test Results, 802.11a/ac/n 20 MHz, MIMO	17
Table 6. Conducted Output Power, Test Results, 802.11ac/n 40 MHz	17
Table 7. Conducted Output Power, Test Results, 802.11ac/n 40 MHz, MIMO	18
Table 8. Conducted Output Power, Test Results, 802.11ac 80 MHz, SISO	18
Table 9. Conducted Output Power, Test Results, 802.11ac 80 MHz, MIMO	18
Table 10. Peak Power Spectral Density, Test Results, 802.11a/ac/n 20 MHz.....	32
Table 11. Peak Power Spectral Density, Test Results, 802.11a/ac/n 20 MHz, MIMO	32
Table 12. Peak Power Spectral Density, Test Results, 802.11ac/n 40 MHz	32
Table 13. Peak Power Spectral Density, Test Results, 802.11ac/n 40 MHz, MIMO	33
Table 14. Peak Power Spectral Density, Test Results, 802.11ac 80 MHz	33
Table 15. Peak Power Spectral Density, Test Results, 802.11ac 80 MHz, MIMO	33
Table 16. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	102
Table 17. Conducted Emissions, Test Results, Phase Line	103
Table 18. Conducted Emissions, Test Results, Neutral Line.....	104
Table 19. Test Equipment List	108

List of Photographs

Photograph 1. Spurious Emissions, Test Setup	101
Photograph 2. Conducted Emissions, Test Setup	105

List of Plots

Plot 1. Occupied Bandwidth, 802.11a, 5180 MHz, Port 1	9
Plot 2. Occupied Bandwidth, 802.11a, 5200 MHz, Port 1	9
Plot 3. Occupied Bandwidth, 802.11a, 5240 MHz, Port 1	9
Plot 4. Occupied Bandwidth, 802.11ac 20 MHz, 5180 MHz, Port 1.....	10
Plot 5. Occupied Bandwidth, 802.11ac 20 MHz, 5200 MHz, Port 1.....	10
Plot 6. Occupied Bandwidth, 802.11ac 20 MHz, 5240 MHz, Port 1.....	10
Plot 7. Occupied Bandwidth, 802.11ac 40 MHz, 5190 MHz, Port 1.....	11
Plot 8. Occupied Bandwidth, 802.11ac 40 MHz, 5230 MHz, Port 1.....	11
Plot 9. Occupied Bandwidth, 802.11ac 80 MHz, 5210 MHz, Port 1.....	12
Plot 10. Occupied Bandwidth, 802.11n 20 MHz, 5180 MHz, Port 1.....	13
Plot 11. Occupied Bandwidth, 802.11n 20 MHz, 5200 MHz, Port 1.....	13
Plot 12. Occupied Bandwidth, 802.11n 20 MHz, 5240 MHz, Port 1.....	13
Plot 13. Occupied Bandwidth, 802.11n 40 MHz, 5190 MHz, Port 1	14
Plot 14. Occupied Bandwidth, 802.11n 40 MHz, 5230 MHz, Port 1	14
Plot 15. Conducted Output Power, 802.11a 20 MHz, MIMO, Channel 36.....	19
Plot 16. Conducted Output Power, 802.11a 20 MHz, MIMO, Channel 40.....	19
Plot 17. Conducted Output Power, 802.11a 20 MHz, MIMO, Channel 48.....	19
Plot 18. Conducted Output Power, 802.11a 20 MHz, SISO, Channel 36	20
Plot 19. Conducted Output Power, 802.11a 20 MHz, SISO, Channel 40	20
Plot 20. Conducted Output Power, 802.11a 20 MHz, SISO, Channel 48	20
Plot 21. Conducted Output Power, 802.11ac 20 MHz, MIMO, Channel 36	21
Plot 22. Conducted Output Power, 802.11ac 20 MHz, MIMO, Channel 40	21
Plot 23. Conducted Output Power, 802.11ac 20 MHz, MIMO, Channel 48	21
Plot 24. Conducted Output Power, 802.11ac 20 MHz, SISO, Channel 36.....	22
Plot 25. Conducted Output Power, 802.11ac 20 MHz, SISO, Channel 40.....	22
Plot 26. Conducted Output Power, 802.11ac 20 MHz, SISO, Channel 48.....	22

Plot 27. Conducted Output Power, 802.11ac 40 MHz, MIMO, Channel 36	23
Plot 28. Conducted Output Power, 802.11ac 40 MHz, MIMO, Channel 44	23
Plot 29. Conducted Output Power, 802.11ac 40 MHz, SISO, Channel 36	24
Plot 30. Conducted Output Power, 802.11ac 40 MHz, SISO, Channel 44	24
Plot 31. Conducted Output Power, 802.11ac 80 MHz, MIMO, Channel 36	25
Plot 32. Conducted Output Power, 802.11ac 80 MHz, SISO, Channel 36	26
Plot 33. Conducted Output Power, 802.11n 20 MHz, MIMO, Channel 36	27
Plot 34. Conducted Output Power, 802.11n 20 MHz, MIMO, Channel 40	27
Plot 35. Conducted Output Power, 802.11n 20 MHz, MIMO, Channel 48	27
Plot 36. Conducted Output Power, 802.11n 20 MHz, SISO, Channel 36	28
Plot 37. Conducted Output Power, 802.11n 20 MHz, SISO, Channel 40	28
Plot 38. Conducted Output Power, 802.11n 20 MHz, SISO, Channel 48	28
Plot 39. Conducted Output Power, 802.11n 40 MHz, MIMO, Channel 36	29
Plot 40. Conducted Output Power, 802.11n 40 MHz, MIMO, Channel 44	29
Plot 41. Conducted Output Power, 802.11n 40 MHz, SISO, Channel 36	30
Plot 42. Conducted Output Power, 802.11n 40 MHz, SISO, Channel 44	30
Plot 43. Peak Power Spectral Density, 802.11a 20 MHz, MIMO, Channel 36	34
Plot 44. Peak Power Spectral Density, 802.11a 20 MHz, MIMO, Channel 40	34
Plot 45. Peak Power Spectral Density, 802.11a 20 MHz, MIMO, Channel 48	34
Plot 46. Peak Power Spectral Density, 802.11a 20 MHz, SISO, Channel 36	35
Plot 47. Peak Power Spectral Density, 802.11a 20 MHz, SISO, Channel 40	35
Plot 48. Peak Power Spectral Density, 802.11a 20 MHz, SISO, Channel 48	35
Plot 49. Peak Power Spectral Density, 802.11ac 20 MHz, MIMO, Channel 36	36
Plot 50. Peak Power Spectral Density, 802.11ac 20 MHz, MIMO, Channel 40	36
Plot 51. Peak Power Spectral Density, 802.11ac 20 MHz, MIMO, Channel 48	36
Plot 52. Peak Power Spectral Density, 802.11ac 20 MHz, SISO, Channel 36	37
Plot 53. Peak Power Spectral Density, 802.11ac 20 MHz, SISO, Channel 40	37
Plot 54. Peak Power Spectral Density, 802.11ac 20 MHz, SISO, Channel 48	37
Plot 55. Peak Power Spectral Density, 802.11ac 40 MHz, MIMO, Channel 36	38
Plot 56. Peak Power Spectral Density, 802.11ac 40 MHz, MIMO, Channel 44	38
Plot 57. Peak Power Spectral Density, 802.11ac 40 MHz, SISO, Channel 36	39
Plot 58. Peak Power Spectral Density, 802.11ac 40 MHz, SISO, Channel 44	39
Plot 59. Peak Power Spectral Density, 802.11ac 80 MHz, MIMO, Channel 36	40
Plot 60. Peak Power Spectral Density, 802.11ac 80 MHz, SISO, Channel 36	41
Plot 61. Peak Power Spectral Density, 802.11n 20 MHz, MIMO, Channel 36	42
Plot 62. Peak Power Spectral Density, 802.11n 20 MHz, MIMO, Channel 40	42
Plot 63. Peak Power Spectral Density, 802.11n 20 MHz, MIMO, Channel 48	42
Plot 64. Peak Power Spectral Density, 802.11n 20 MHz, SISO, Channel 36	43
Plot 65. Peak Power Spectral Density, 802.11n 20 MHz, SISO, Channel 40	43
Plot 66. Peak Power Spectral Density, 802.11n 20 MHz, SISO, Channel 48	43
Plot 67. Peak Power Spectral Density, 802.11n 40 MHz, MIMO, Channel 36	44
Plot 68. Peak Power Spectral Density, 802.11n 40 MHz, MIMO, Channel 44	44
Plot 69. Peak Power Spectral Density, 802.11n 40 MHz, SISO, Channel 36	45
Plot 70. Peak Power Spectral Density, 802.11n 40 MHz, SISO, Channel 44	45
Plot 71. Spurious Emissions, Worst Case Emission Plot, 30 MHz – 1 GHz	48
Plot 72. Spurious Emissions, 802.11a 20 MHz, MIMO, Low Channel	49
Plot 73. Spurious Emissions, 802.11a 20 MHz, MIMO, Mid Channel	49
Plot 74. Spurious Emissions, 802.11a 20 MHz, MIMO, High Channel	49
Plot 75. Spurious Emissions, 802.11a 20 MHz, SISO, Low Channel	50
Plot 76. Spurious Emissions, 802.11a 20 MHz, SISO, Mid Channel	50
Plot 77. Spurious Emissions, 802.11a 20 MHz, SISO, High Channel	50
Plot 78. Spurious Emissions, 802.11ac 20 MHz, MIMO, Low Channel	51
Plot 79. Spurious Emissions, 802.11ac 20 MHz, MIMO, Mid Channel	51
Plot 80. Spurious Emissions, 802.11ac 20 MHz, MIMO, High Channel	51
Plot 81. Spurious Emissions, 802.11ac 20 MHz, SISO, Low Channel	52
Plot 82. Spurious Emissions, 802.11ac 20 MHz, SISO, Mid Channel	52
Plot 83. Spurious Emissions, 802.11ac 20 MHz, SISO, High Channel	52

Plot 84. Spurious Emissions, 802.11ac 40 MHz, MIMO, Low Channel.....	53
Plot 85. Spurious Emissions, 802.11ac 40 MHz, MIMO, High Channel	53
Plot 86. Spurious Emissions, 802.11ac 40 MHz, SISO, Low Channel	54
Plot 87. Spurious Emissions, 802.11ac 40 MHz, SISO, High Channel.....	54
Plot 88. Spurious Emissions, 802.11ac 80 MHz, MIMO, Low Channel.....	55
Plot 89. Spurious Emissions, 802.11ac 80 MHz, SISO, Low Channel	56
Plot 90. Spurious Emissions, 802.11n 20 MHz, MIMO, Low Channel	57
Plot 91. Spurious Emissions, 802.11n 20 MHz, MIMO, Mid Channel	57
Plot 92. Spurious Emissions, 802.11n 20 MHz, MIMO, High Channel.....	57
Plot 93. Spurious Emissions, 802.11n 20 MHz, SISO, Low Channel	58
Plot 94. Spurious Emissions, 802.11n 20 MHz, SISO, Mid Channel	58
Plot 95. Spurious Emissions, 802.11n 20 MHz, SISO, High Channel.....	58
Plot 96. Spurious Emissions, 802.11n 40 MHz, MIMO, Low Channel	59
Plot 97. Spurious Emissions, 802.11n 40 MHz, MIMO, High Channel.....	59
Plot 98. Spurious Emissions, 802.11n 40 MHz, SISO, Low Channel	60
Plot 99. Spurious Emissions, 802.11n 40 MHz, SISO, High Channel.....	60
Plot 100. Band Edge, 802.11a 20 MHz, MIMO, Channel 36, Average	61
Plot 101. Band Edge, 802.11a 20 MHz, MIMO, Channel 36, Peak.....	61
Plot 102. Band Edge, 802.11a 20 MHz, MIMO, Channel 38, Average	61
Plot 103. Band Edge, 802.11a 20 MHz, MIMO, Channel 38, Peak.....	62
Plot 104. Band Edge, 802.11a 20 MHz, MIMO, Channel 40, Average	62
Plot 105. Band Edge, 802.11a 20 MHz, MIMO, Channel 40, Peak.....	62
Plot 106. Band Edge, 802.11a 20 MHz, MIMO, Channel 42, Average	63
Plot 107. Band Edge, 802.11a 20 MHz, MIMO, Channel 42, Peak.....	63
Plot 108. Band Edge, 802.11a 20 MHz, MIMO, Channel 44, Average	63
Plot 109. Band Edge, 802.11a 20 MHz, MIMO, Channel 44, Peak.....	64
Plot 110. Band Edge, 802.11a 20 MHz, MIMO, Channel 46, Average	64
Plot 111. Band Edge, 802.11a 20 MHz, MIMO, Channel 46, Peak.....	64
Plot 112. Band Edge, 802.11a 20 MHz, MIMO, Channel 48, Average	65
Plot 113. Band Edge, 802.11a 20 MHz, MIMO, Channel 48, Peak.....	65
Plot 114. Band Edge, 802.11a 20 MHz, SISO, Channel 36, Average	66
Plot 115. Band Edge, 802.11a 20 MHz, SISO, Channel 36, Peak.....	66
Plot 116. Band Edge, 802.11a 20 MHz, SISO, Channel 38, Average	66
Plot 117. Band Edge, 802.11a 20 MHz, SISO, Channel 38, Peak.....	67
Plot 118. Band Edge, 802.11a 20 MHz, SISO, Channel 40, Average	67
Plot 119. Band Edge, 802.11a 20 MHz, SISO, Channel 40, Peak.....	67
Plot 120. Band Edge, 802.11a 20 MHz, SISO, Channel 42, Average	68
Plot 121. Band Edge, 802.11a 20 MHz, SISO, Channel 42, Peak.....	68
Plot 122. Band Edge, 802.11a 20 MHz, SISO, Channel 44, Average	68
Plot 123. Band Edge, 802.11a 20 MHz, SISO, Channel 44, Peak.....	69
Plot 124. Band Edge, 802.11a 20 MHz, SISO, Channel 46, Average	69
Plot 125. Band Edge, 802.11a 20 MHz, SISO, Channel 46, Peak.....	69
Plot 126. Band Edge, 802.11a 20 MHz, SISO, Channel 48, Average	70
Plot 127. Band Edge, 802.11a 20 MHz, SISO, Channel 48, Peak.....	70
Plot 128. Band Edge, 802.11ac 20 MHz, MIMO, Channel 36, Average	71
Plot 129. Band Edge, 802.11ac 20 MHz, MIMO, Channel 36, Peak	71
Plot 130. Band Edge, 802.11ac 20 MHz, MIMO, Channel 38, Average	71
Plot 131. Band Edge, 802.11ac 20 MHz, MIMO, Channel 38, Peak	72
Plot 132. Band Edge, 802.11ac 20 MHz, MIMO, Channel 40, Average	72
Plot 133. Band Edge, 802.11ac 20 MHz, MIMO, Channel 40, Peak	72
Plot 134. Band Edge, 802.11ac 20 MHz, MIMO, Channel 42, Average	73
Plot 135. Band Edge, 802.11ac 20 MHz, MIMO, Channel 42, Peak	73
Plot 136. Band Edge, 802.11ac 20 MHz, MIMO, Channel 44, Average	73
Plot 137. Band Edge, 802.11ac 20 MHz, MIMO, Channel 44, Peak	74
Plot 138. Band Edge, 802.11ac 20 MHz, MIMO, Channel 46, Average	74
Plot 139. Band Edge, 802.11ac 20 MHz, MIMO, Channel 46, Peak	74
Plot 140. Band Edge, 802.11ac 20 MHz, MIMO, Channel 48, Average	75

Plot 141. Band Edge, 802.11ac 20 MHz, MIMO, Channel 48, Peak	75
Plot 142. Band Edge, 802.11ac 20 MHz, SISO, Channel 36, Average	76
Plot 143. Band Edge, 802.11ac 20 MHz, SISO, Channel 36, Peak.....	76
Plot 144. Band Edge, 802.11ac 20 MHz, SISO, Channel 38, Average	76
Plot 145. Band Edge, 802.11ac 20 MHz, SISO, Channel 38, Peak.....	77
Plot 146. Band Edge, 802.11ac 20 MHz, SISO, Channel 40, Average	77
Plot 147. Band Edge, 802.11ac 20 MHz, SISO, Channel 40, Peak.....	77
Plot 148. Band Edge, 802.11ac 20 MHz, SISO, Channel 42, Average	78
Plot 149. Band Edge, 802.11ac 20 MHz, SISO, Channel 42, Peak.....	78
Plot 150. Band Edge, 802.11ac 20 MHz, SISO, Channel 44, Average	78
Plot 151. Band Edge, 802.11ac 20 MHz, SISO, Channel 44, Peak.....	79
Plot 152. Band Edge, 802.11ac 20 MHz, SISO, Channel 46, Average	79
Plot 153. Band Edge, 802.11ac 20 MHz, SISO, Channel 46, Peak.....	79
Plot 154. Band Edge, 802.11ac 20 MHz, SISO, Channel 48, Average	80
Plot 155. Band Edge, 802.11ac 20 MHz, SISO, Channel 48, Peak.....	80
Plot 156. Band Edge, 802.11ac 40 MHz, MIMO, Channel 36, Average	81
Plot 157. Band Edge, 802.11ac 40 MHz, MIMO, Channel 36, Peak	81
Plot 158. Band Edge, 802.11ac 40 MHz, MIMO, Channel 44, Average	81
Plot 159. Band Edge, 802.11ac 40 MHz, MIMO, Channel 44, Peak	82
Plot 160. Band Edge, 802.11ac 40 MHz, SISO, Channel 36, Average	83
Plot 161. Band Edge, 802.11ac 40 MHz, SISO, Channel 36, Peak.....	83
Plot 162. Band Edge, 802.11ac 40 MHz, SISO, Channel 44, Average	83
Plot 163. Band Edge, 802.11ac 40 MHz, SISO, Channel 44, Peak.....	84
Plot 164. Band Edge, 802.11ac 80 MHz, MIMO, Channel 36, Average	85
Plot 165. Band Edge, 802.11ac 80 MHz, MIMO, Channel 36, Peak	85
Plot 166. Band Edge, 802.11ac 80 MHz, SISO, Channel 36, Average	86
Plot 167. Band Edge, 802.11ac 80 MHz, SISO, Channel 36, Peak.....	86
Plot 168. Band Edge, 802.11n 20 MHz, MIMO, Channel 36, Average	87
Plot 169. Band Edge, 802.11n 20 MHz, MIMO, Channel 36, Peak.....	87
Plot 170. Band Edge, 802.11n 20 MHz, MIMO, Channel 38, Average	87
Plot 171. Band Edge, 802.11n 20 MHz, MIMO, Channel 38, Peak.....	88
Plot 172. Band Edge, 802.11n 20 MHz, MIMO, Channel 40, Average	88
Plot 173. Band Edge, 802.11n 20 MHz, MIMO, Channel 40, Peak.....	88
Plot 174. Band Edge, 802.11n 20 MHz, MIMO, Channel 42, Average	89
Plot 175. Band Edge, 802.11n 20 MHz, MIMO, Channel 42, Peak.....	89
Plot 176. Band Edge, 802.11n 20 MHz, MIMO, Channel 44, Average	89
Plot 177. Band Edge, 802.11n 20 MHz, MIMO, Channel 44, Peak.....	90
Plot 178. Band Edge, 802.11n 20 MHz, MIMO, Channel 46, Average	90
Plot 179. Band Edge, 802.11n 20 MHz, MIMO, Channel 46, Peak.....	90
Plot 180. Band Edge, 802.11n 20 MHz, MIMO, Channel 48, Average	91
Plot 181. Band Edge, 802.11n 20 MHz, MIMO, Channel 48, Peak	91
Plot 182. Band Edge, 802.11n 20 MHz, SISO, Channel 36, Average.....	92
Plot 183. Band Edge, 802.11n 20 MHz, SISO, Channel 36, Peak	92
Plot 184. Band Edge, 802.11n 20 MHz, SISO, Channel 38, Average	92
Plot 185. Band Edge, 802.11n 20 MHz, SISO, Channel 38, Peak	93
Plot 186. Band Edge, 802.11n 20 MHz, SISO, Channel 40, Average	93
Plot 187. Band Edge, 802.11n 20 MHz, SISO, Channel 40, Peak	93
Plot 188. Band Edge, 802.11n 20 MHz, SISO, Channel 42, Average	94
Plot 189. Band Edge, 802.11n 20 MHz, SISO, Channel 42, Peak	94
Plot 190. Band Edge, 802.11n 20 MHz, SISO, Channel 44, Average	94
Plot 191. Band Edge, 802.11n 20 MHz, SISO, Channel 44, Peak	95
Plot 192. Band Edge, 802.11n 20 MHz, SISO, Channel 46, Average	95
Plot 193. Band Edge, 802.11n 20 MHz, SISO, Channel 46, Peak	95
Plot 194. Band Edge, 802.11n 20 MHz, SISO, Channel 48, Average	96
Plot 195. Band Edge, 802.11n 20 MHz, SISO, Channel 48, Peak	96
Plot 196. Band Edge, 802.11n 40 MHz, MIMO, Channel 36, Average	97
Plot 197. Band Edge, 802.11n 40 MHz, MIMO, Channel 36, Peak	97

Plot 198. Band Edge, 802.11n 40 MHz, MIMO, Channel 44, Average	97
Plot 199. Band Edge, 802.11n 40 MHz, MIMO, Channel 44, Peak.....	98
Plot 200. Band Edge, 802.11n 40 MHz, SISO, Channel 36, Average.....	99
Plot 201. Band Edge, 802.11n 40 MHz, SISO, Channel 36, Peak	99
Plot 202. Band Edge, 802.11n 40 MHz, SISO, Channel 44, Average.....	99
Plot 203. Band Edge, 802.11n 40 MHz, SISO, Channel 44, Peak	100
Plot 204. Conducted Emissions, Phase Line	103
Plot 204. Conducted Emissions, Neutral Line.....	104

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB_μA	Decibels above one microamp
dB_μV	Decibels above one microvolt
dB_μA/m	Decibels above one microamp per meter
dB_μV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	Kilohertz
kPa	Kilopascal
kV	Kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	Microhenry
μ	Microfarad
μs	Microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the ARRIS DCX3635, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the DCX3635. ARRIS should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the DCX3635, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with ARRIS, purchase order number AR1062669. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference	Description	Results
§15.203	Antenna Requirement	Compliant
§15.403(i)	26dB Occupied Bandwidth	Compliant
§15.407 (a)(1)(ii)	Maximum Conducted Output Power	Compliant
§15.407 (a)(1)(ii)	Maximum Power Spectral Density	Compliant
§15.407 (b)(1)& (6 - 7)	Undesirable Emissions	Compliant
§15.407(b)(6)	Conducted Emission Limits	Compliant
§15.407(f)	RF Exposure	Compliant

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by ARRIS to perform testing on the DCX3635, under ARRIS's purchase order number AR1062669.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the ARRIS DCX3635.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	DCX3635
Model(s) Variants:	DCX3635/6K00/0522/0500 DCX3635/6K80/0522/0500 DCX3635/6K00/0522/1000 DCX3635/6K80/0522/1000
EUT Specifications:	Primary Power: 120 VAC, 60 Hz FCC ID: ACQ-DCX3635M Type of Modulations: OFDM, MCS, MNSS Equipment Code: NII Max. RF Output Power: 25.36dBm EUT Frequency Ranges: 5180-5240 MHz
Analysis:	The results obtained relate only to the item(s) tested.
Environmental Test Conditions:	Temperature: 15-35° C Relative Humidity: 30-60% Barometric Pressure: 860-1060 mbar
Type of Filing:	Original
Evaluated by:	Surinder Singh
Report Date(s):	October 23, 2015

Table 2. EUT Summary

B. References

CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
789033 D02 General UNII Test Procedures New Rules v01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The ARRIS DCX3635, Equipment Under Test (EUT), is a media gateway with an embedded multi-channel full-band capture QAM and DOCSIS 3.0 front-end receiver that bridges to a video back-end processor supporting video presentation and transcoding as well as other embedded functions. It also functions as an Access Point (AP) through dual concurrent WiFi, specifically IEEE802.11n and IEEE802.11ac supporting 3x3 MIMO, with IP data routing capability through dual Gigabit Ethernet ports. It is capable of presenting encrypted SD and HD video content through HDMI™ and Analog Composite (SD content only), digital audio is presented through HDMI™ and Optical SPDIF, and analog audio is presented through baseband left and right connectors. The DCX3635W is home networking capable through WiFi, MoCA®, and Gigabit Ethernet. This model has removable CableCard for content security. User interface is through IR or RF4CE remote control.

E. Mode of Operation

Normal operation will not be simulated. This device will be configured to perform the required functions for FCC part 15 intentional radiators.

F. Method of Monitoring EUT Operation

Spectrum Analyzer.

G. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

H. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to ARRIS upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The EUT employs an integrated antenna.

Test Engineer(s): Surinder Singh

Test Date(s): 07/08/15

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15. 403(i) 26dB Bandwidth

Test Requirements: **§ 15.403(i):** For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, $VBW > RBW$. The 26 dB Bandwidth was measured and recorded.


Test Results The 26 dB Bandwidth was compliant with the requirements of this section.

Test Engineer(s): Surinder Singh


Test Date(s): 08/13/15




Occupied Bandwidth, 802.11a, Port 1

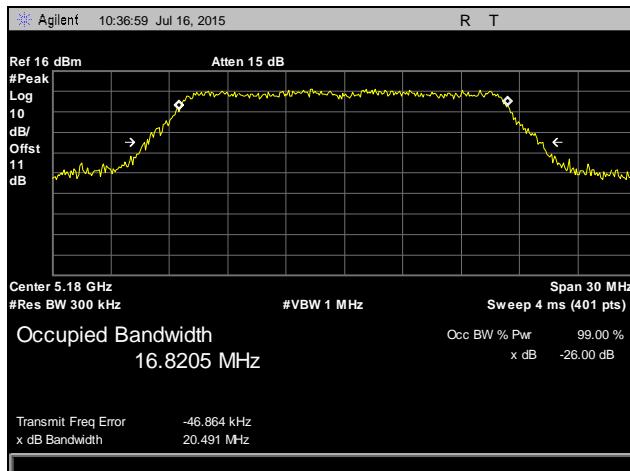

Plot 1. Occupied Bandwidth, 802.11a, 5180 MHz, Port 1

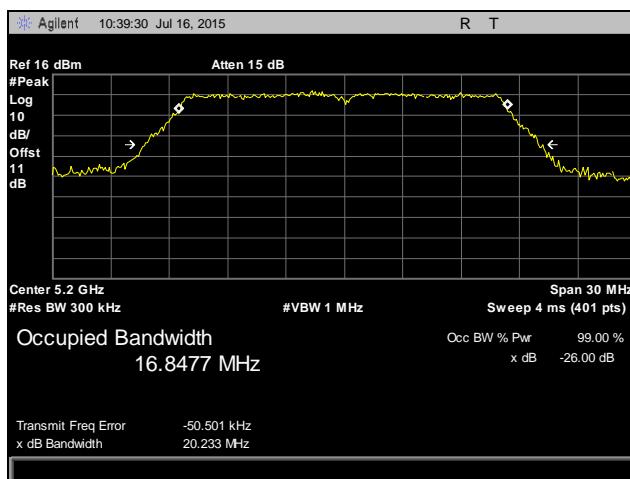


Plot 2. Occupied Bandwidth, 802.11a, 5200 MHz, Port 1

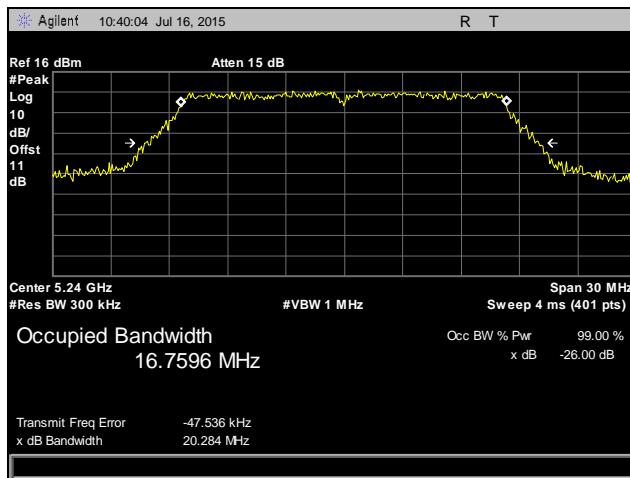


Plot 3. Occupied Bandwidth, 802.11a, 5240 MHz, Port 1


Occupied Bandwidth, 802.11ac 20 MHz, Port 1

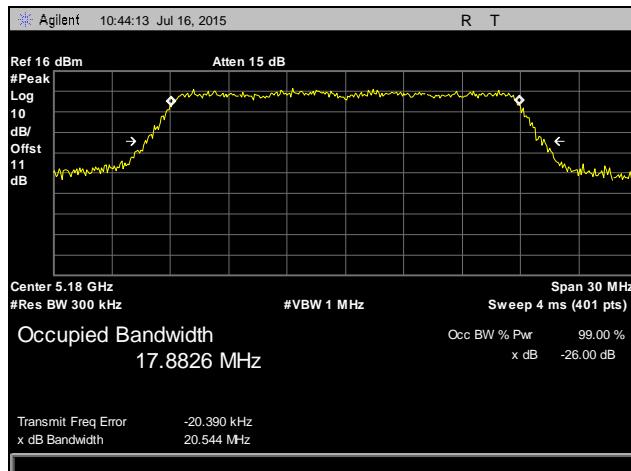

Plot 4. Occupied Bandwidth, 802.11ac 20 MHz, 5180 MHz, Port 1

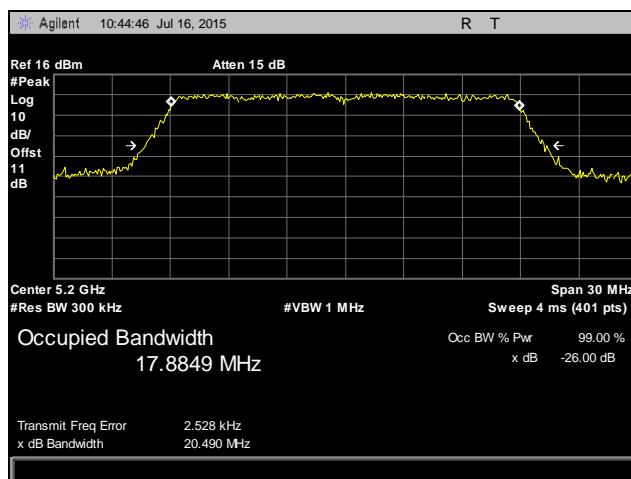


Plot 5. Occupied Bandwidth, 802.11ac 20 MHz, 5200 MHz, Port 1

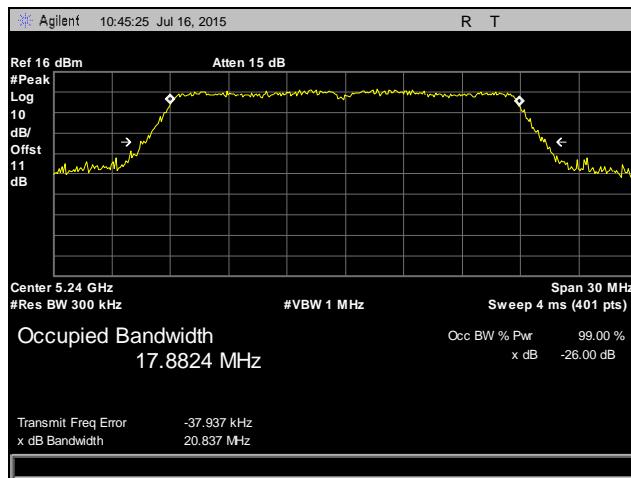


Plot 6. Occupied Bandwidth, 802.11ac 20 MHz, 5240 MHz, Port 1

Occupied Bandwidth, 802.11ac 40 MHz, Port 1

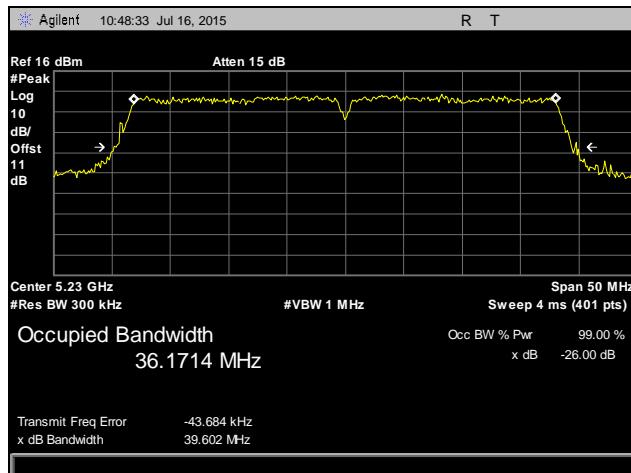


Plot 7. Occupied Bandwidth, 802.11ac 40 MHz, 5190 MHz, Port 1

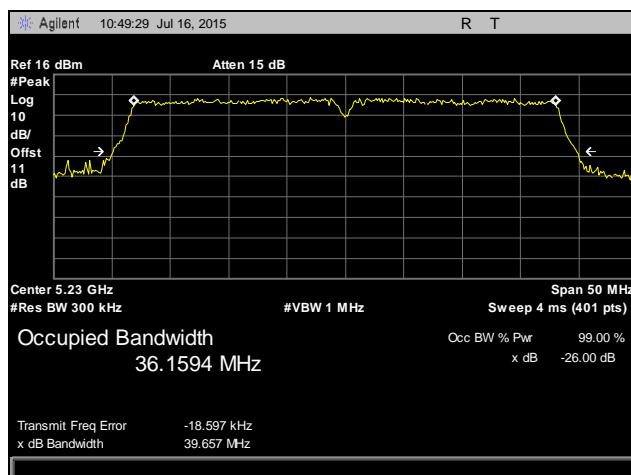


Plot 8. Occupied Bandwidth, 802.11ac 40 MHz, 5230 MHz, Port 1

Occupied Bandwidth, 802.11ac 80 MHz, Port 1

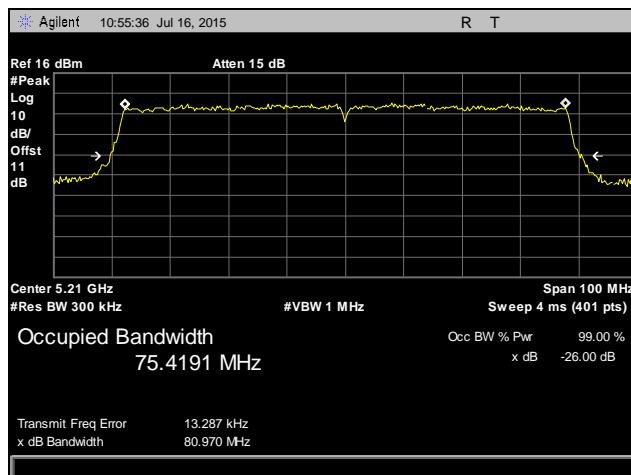


Plot 9. Occupied Bandwidth, 802.11ac 80 MHz, 5210 MHz, Port 1


Occupied Bandwidth, 802.11n 20 MHz, Port 1

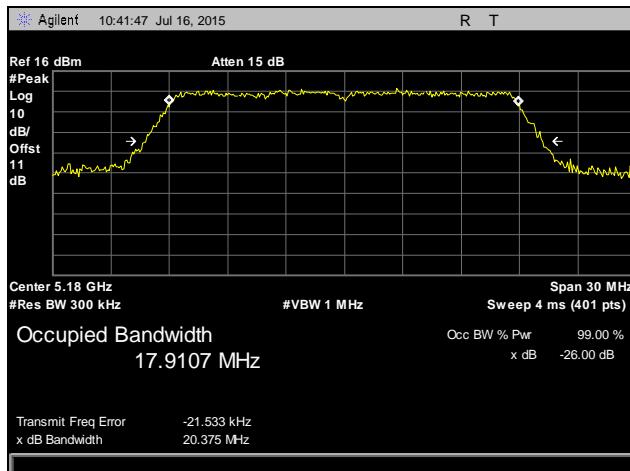

Plot 10. Occupied Bandwidth, 802.11n 20 MHz, 5180 MHz, Port 1

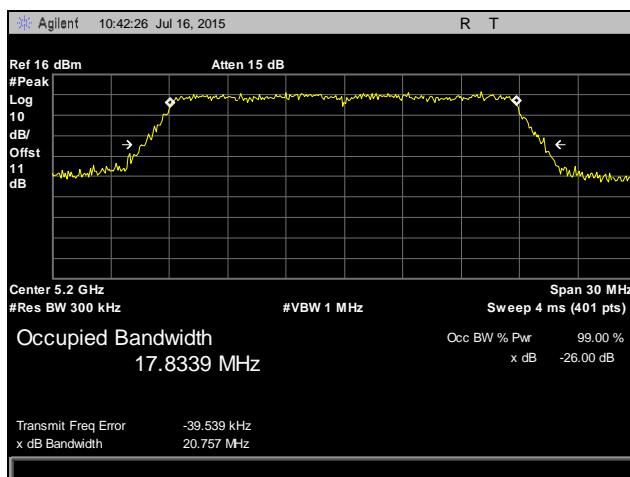


Plot 11. Occupied Bandwidth, 802.11n 20 MHz, 5200 MHz, Port 1

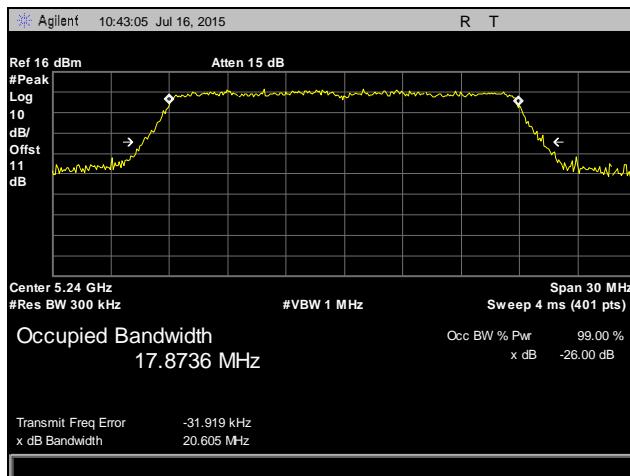


Plot 12. Occupied Bandwidth, 802.11n 20 MHz, 5240 MHz, Port 1

Occupied Bandwidth, 802.11n 40 MHz, Port 1

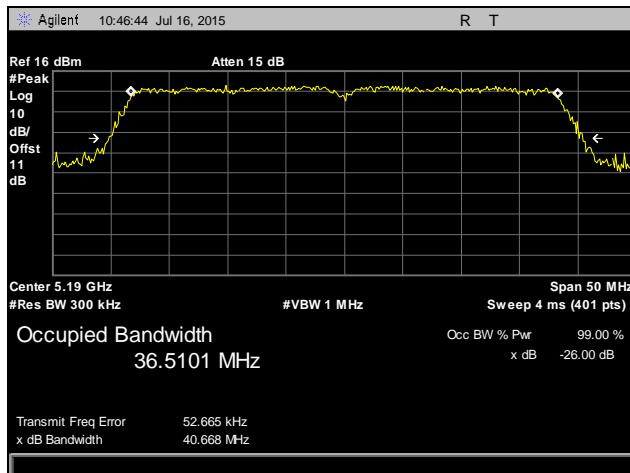

Plot 13. Occupied Bandwidth, 802.11n 40 MHz, 5190 MHz, Port 1

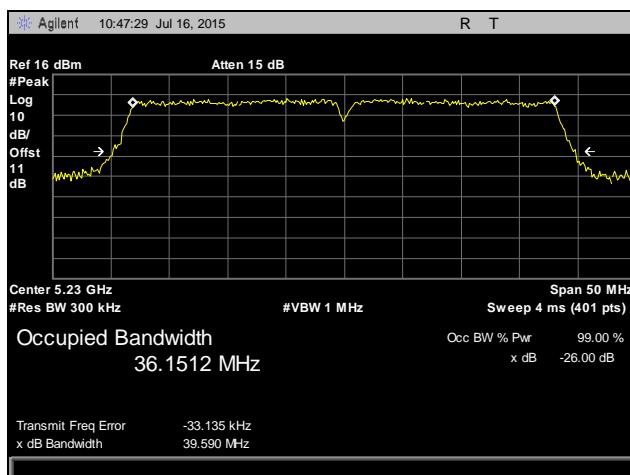

Plot 14. Occupied Bandwidth, 802.11n 40 MHz, 5230 MHz, Port 1

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(1) Maximum Conducted Output Power

Test Requirements:

§15.407(a)(1)(ii): For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure:

The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on all channels. Only low, mid and high channel plots were incorporated in test report. However, all other channel conducted power measurement was recorded in tabular form. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01.

Test Results:

The EUT as tested is compliant with the requirements of this section.

Test Engineer(s):

Surinder Singh

Test Date(s):

08/13/15



Maximum Conducted Output Power 20MHz Band 802.11a/ac/n						
Channel	Frequency GHz	Measured Peak Output Power (dBm)/20MHz Ant 1	Mode	Power Limit (dBm)	Antenna Gain (dB)	Margin (dB)
36	5180	19.06	a	30	5.8	-10.94
38	5190	20.13	a	30	5.8	-9.87
40	5200	18.26	a	30	5.8	-11.74
42	5210	17.94	a	30	5.8	-12.06
44	5220	17.46	a	30	5.8	-12.54
46	5230	17.49	a	30	5.8	-12.51
48	5240	25.19	a	30	5.8	-4.81
36	5180	19.67	n	30	5.8	-10.33
38	5190	20.33	n	30	5.8	-9.67
40	5200	17.91	n	30	5.8	-12.09
42	5210	18.19	n	30	5.8	-11.81
44	5220	17.89	n	30	5.8	-12.11
46	5230	18.94	n	30	5.8	-11.06
48	5240	25.36	n	30	5.8	-4.64
36	5180	19.94	ac	30	5.8	-10.06
38	5190	20.16	ac	30	5.8	-9.84
40	5200	18.03	ac	30	5.8	-11.97
42	5210	17.34	ac	30	5.8	-12.66
44	5220	17.64	ac	30	5.8	-12.36
46	5230	18.67	ac	30	5.8	-11.33
48	5240	25.23	ac	30	5.8	-4.77

Table 4. Conducted Output Power, Test Results, 802.11a/ac/n 20 MHz

Maximum Conducted Output Power 20MHz Band 802.11a/n/ac Mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Measured Peak Output Power (dBm)/20MHz Ant 0	Output Power (dBm)/20MHz Ant 1	Output Power (dBm)/20MHz Ant 2	Mode	Total Output Power (dBm)	Antenna Gain (dB)	Power Limit (dBm)	Margin (dB)
36	5180	14.11	14.27	14.15	a	18.95	9.6	26.4	-7.45
38	5190	13.19	13.88	13.82	a	18.41	9.6	26.4	-7.99
40	5200	12.06	12.03	12.61	a	17.01	9.6	26.4	-9.39
42	5210	9.06	9.12	9.25	a	13.92	9.6	26.4	-12.48
44	5220	9.37	9.84	10.05	a	14.53	9.6	26.4	-11.87
46	5230	9.16	9.37	9.64	a	14.17	9.6	26.4	-12.23
48	5240	19.56	19.61	19.84	a	24.44	9.6	26.4	-1.96
36	5180	14.26	14.34	14.69	n	19.21	9.6	26.4	-7.19
38	5190	13.54	13.84	14.08	n	18.60	9.6	26.4	-7.80
40	5200	12.19	12.33	12.84	n	17.23	9.6	26.4	-9.17
42	5210	10.05	10.24	10.47	n	15.03	9.6	26.4	-11.37
44	5220	10.08	10.41	10.35	n	15.05	9.6	26.4	-11.35
46	5230	10.11	10.29	10.48	n	15.07	9.6	26.4	-11.33
48	5240	19.3	19.9	19.97	n	24.50	9.6	26.4	-1.90
36	5180	14.28	14.87	14.87	ac	19.45	9.6	26.4	-6.95
38	5190	13.28	13.47	13.84	ac	18.31	9.6	26.4	-8.09
40	5200	11.49	11.82	11.84	ac	16.49	9.6	26.4	-9.91
42	5210	10.08	10.23	10.52	ac	15.05	9.6	26.4	-11.35
44	5220	9.94	10.16	10.22	ac	14.88	9.6	26.4	-11.52
46	5230	10.08	10.28	10.33	ac	15.00	9.6	26.4	-11.40
48	5240	19.75	20.13	20.07	ac	24.76	9.6	26.4	-1.64

Table 5. Conducted Output Power, Test Results, 802.11a/ac/n 20 MHz, MIMO

Maximum Conducted Output Power 40MHz Band 802.11a/ac/n Mode (dBm)						
Channel	Frequency GHz	Output Power (dBm)/40MHz Ant 0	Mode	Power Limit (dBm)	Antenna Gain (dB)	Margin (dB)
36	5190	15.68	n	30	5.8	-14.32
36	5190	15.53	ac	30	5.8	-14.47
44	5230	20.54	n	30	5.8	-9.46
44	5230	20.77	ac	30	5.8	-9.23

Table 6. Conducted Output Power, Test Results, 802.11ac/n 40 MHz

Maximum Conducted Output Power 40MHz Band 11n/ac mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Output Power (dBm)/40MHz Ant 0	Output Power (dBm)/40MHz Ant 1	Output Power (dBm)/40MHz Ant 2	Mode	Total Output Power (dBm)	Antenna Gain (dB)	Power Limit (dBm)	Margin (dB)
36	5190	13.17	13.44	13.87	n	18.28	9.6	26.4	-8.12
36	5190	13.03	12.41	12.95	ac	17.57	9.6	26.4	-8.82
44	5230	13.28	13.69	13.54	n	18.28	9.6	26.4	-8.12
44	5230	13.26	13.54	13.46	ac	18.19	9.6	26.4	-8.21

Table 7. Conducted Output Power, Test Results, 802.11ac/n 40 MHz, MIMO


Maximum Conducted Output Power 80MHz Band 802.11ac mode SISO (dBm)						
Channel	Frequency GHz	Measured Peak Output Power (dBm)/80MHz Ant 0	Mode	Power Limit (dBm)	Antenna Gain (dB)	Margin (dB)
36	5210	15.81	ac	30	5.8	-14.19

Table 8. Conducted Output Power, Test Results, 802.11ac 80 MHz, SISO


Maximum Conducted Output Power 80MHz Band 802.11ac mode MIMO (3*3) (dBm)								
Chanel Carrier	Frequency MHz	Output Power (dBm)/80MHz Ant 0	Output Power (dBm)/80MHz Ant 1	Output Power (dBm)/80MHz Ant 2	Total Output Power (dBm)	Antenna Gain (dB)	Power Limit (dBm)	Margin (dB)
36	5210	10.11	10.82	10.69	15.32	9.6	26.4	-11.08

Table 9. Conducted Output Power, Test Results, 802.11ac 80 MHz, MIMO


Conducted Output Power, 802.11a 20 MHz, MIMO

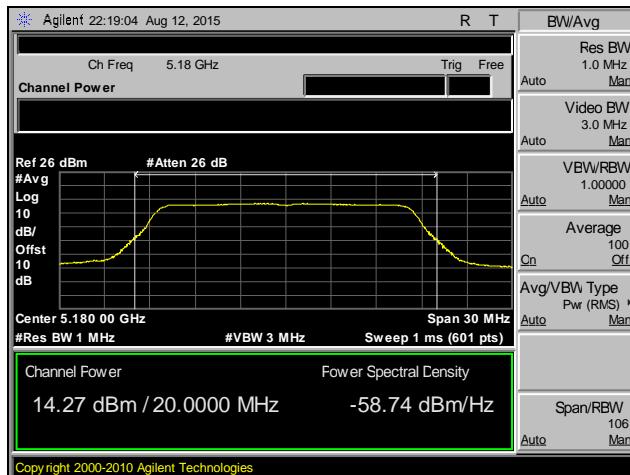

Plot 15. Conducted Output Power, 802.11a 20 MHz, MIMO, Channel 36

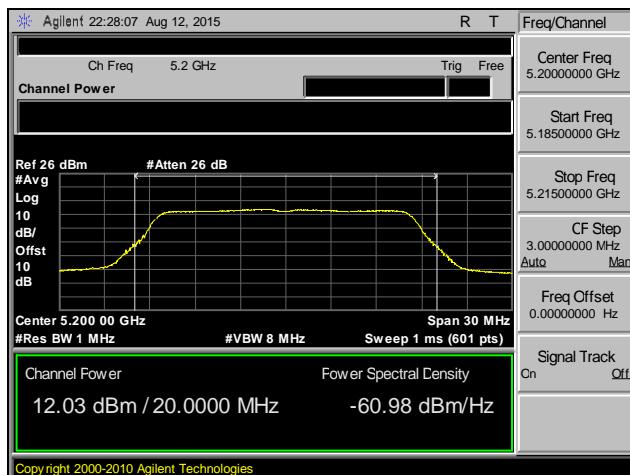


Plot 16. Conducted Output Power, 802.11a 20 MHz, MIMO, Channel 40

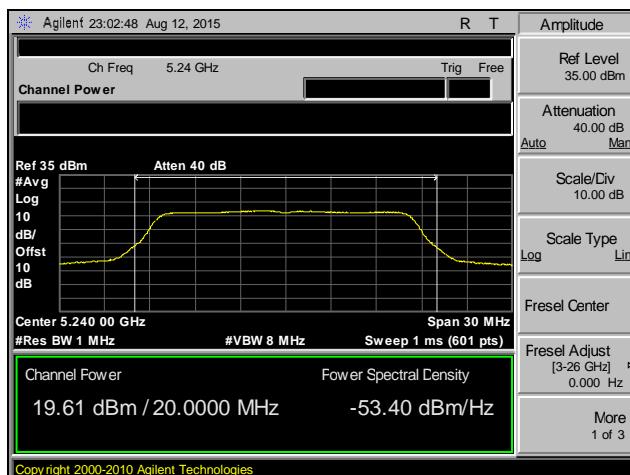


Plot 17. Conducted Output Power, 802.11a 20 MHz, MIMO, Channel 48


Conducted Output Power, 802.11a 20 MHz, SISO

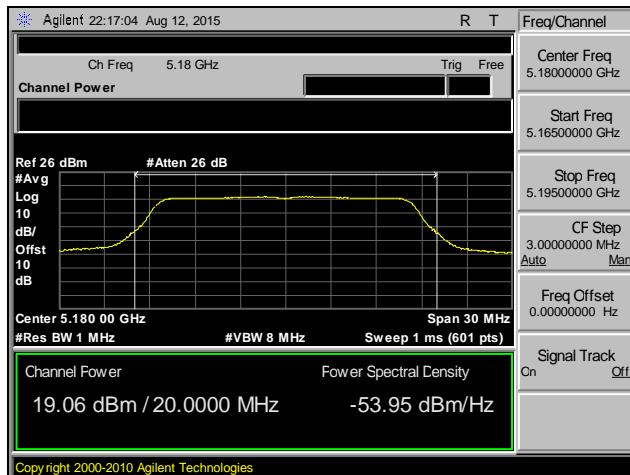

Plot 18. Conducted Output Power, 802.11a 20 MHz, SISO, Channel 36

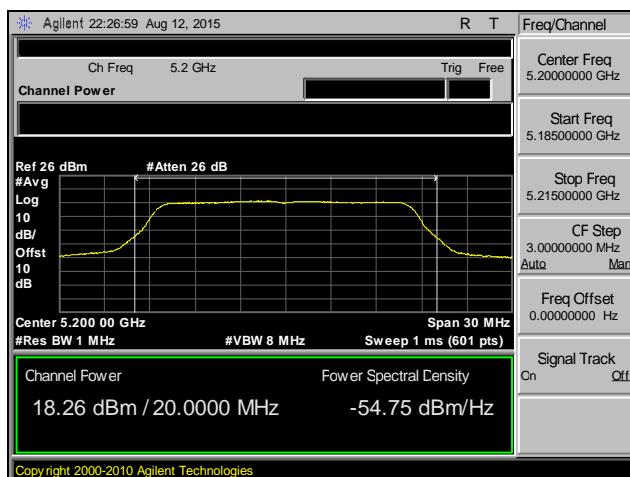


Plot 19. Conducted Output Power, 802.11a 20 MHz, SISO, Channel 40

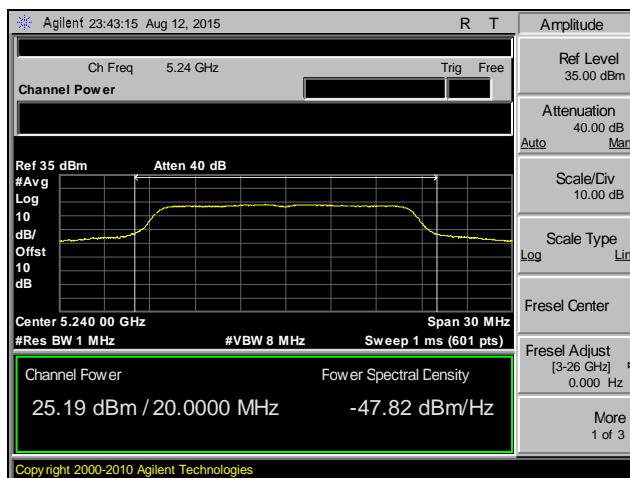


Plot 20. Conducted Output Power, 802.11a 20 MHz, SISO, Channel 48


Conducted Output Power, 802.11ac 20 MHz, MIMO

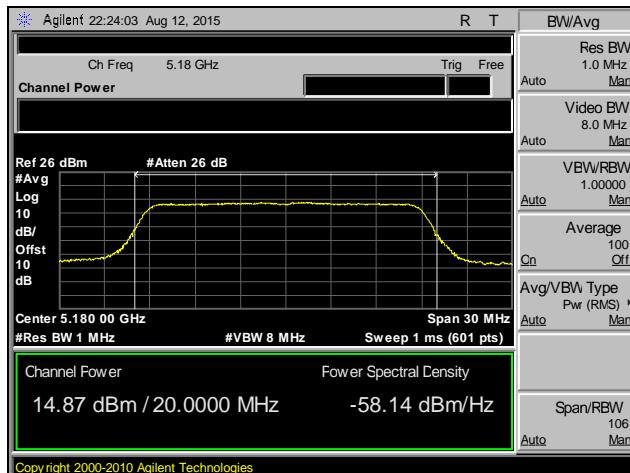

Plot 21. Conducted Output Power, 802.11ac 20 MHz, MIMO, Channel 36

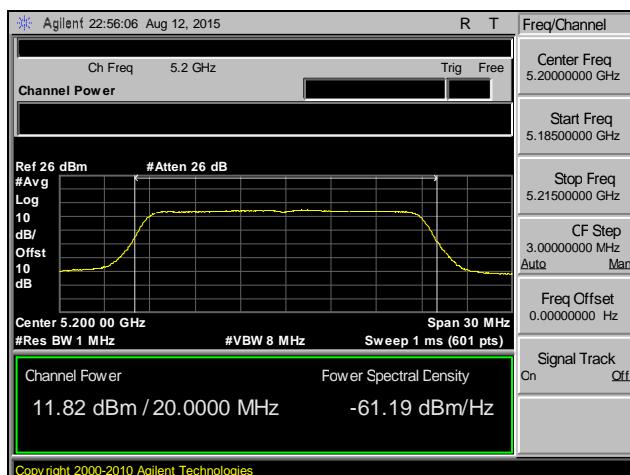

Plot 22. Conducted Output Power, 802.11ac 20 MHz, MIMO, Channel 40

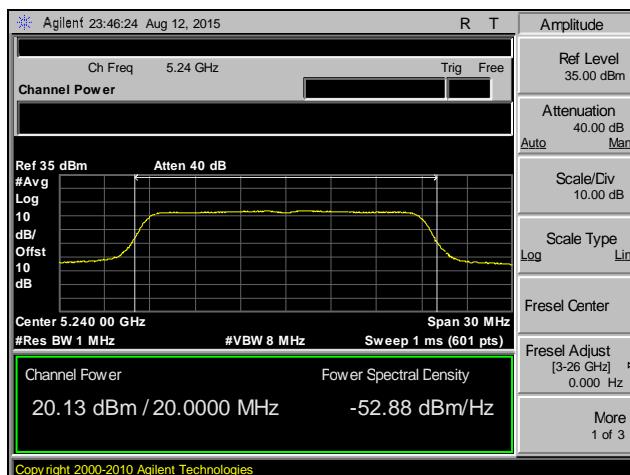


Plot 23. Conducted Output Power, 802.11ac 20 MHz, MIMO, Channel 48


Conducted Output Power, 802.11ac 20 MHz, SISO



Plot 24. Conducted Output Power, 802.11ac 20 MHz, SISO, Channel 36

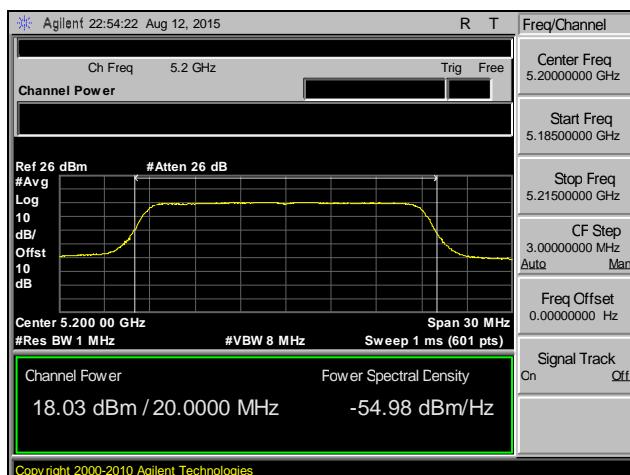


Plot 25. Conducted Output Power, 802.11ac 20 MHz, SISO, Channel 40

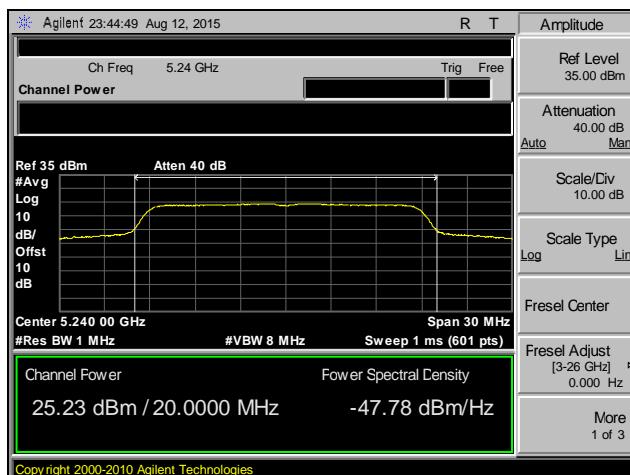

Plot 26. Conducted Output Power, 802.11ac 20 MHz, SISO, Channel 48

Conducted Output Power, 802.11ac 40 MHz, MIMO

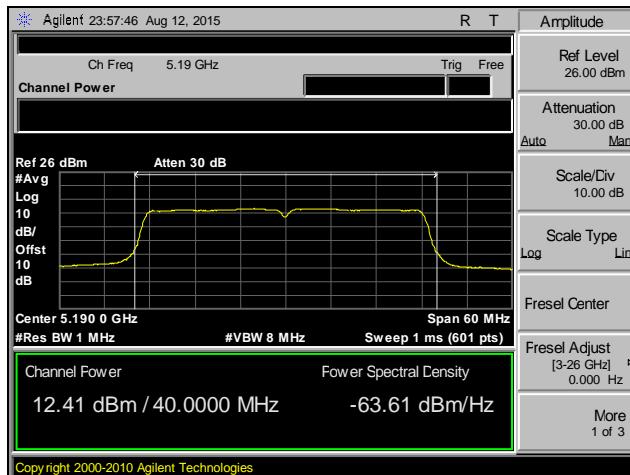


Plot 27. Conducted Output Power, 802.11ac 40 MHz, MIMO, Channel 36




Plot 28. Conducted Output Power, 802.11ac 40 MHz, MIMO, Channel 44

Conducted Output Power, 802.11ac 40 MHz, SISO

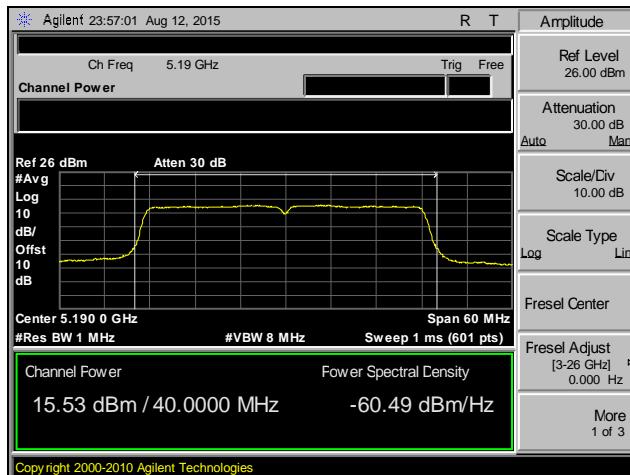


Plot 29. Conducted Output Power, 802.11ac 40 MHz, SISO, Channel 36

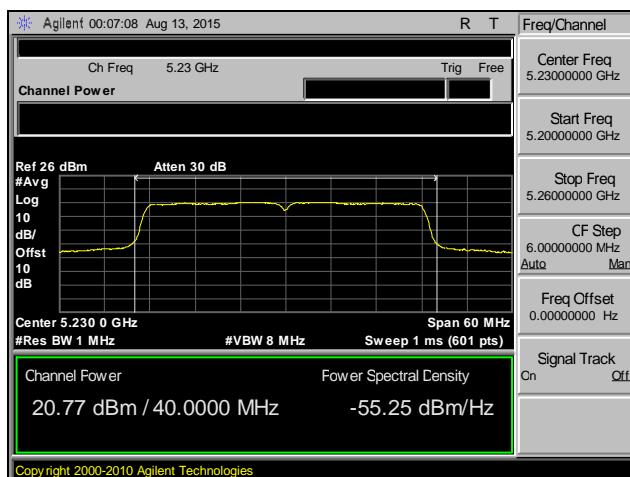


Plot 30. Conducted Output Power, 802.11ac 40 MHz, SISO, Channel 44

Conducted Output Power, 802.11ac 80 MHz, MIMO

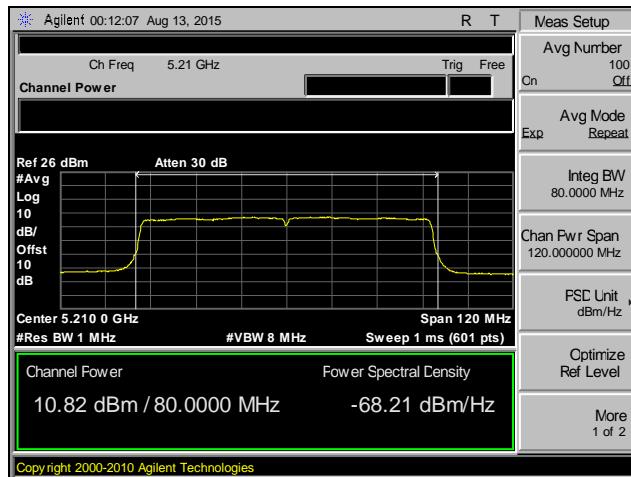


Plot 31. Conducted Output Power, 802.11ac 80 MHz, MIMO, Channel 36

Conducted Output Power, 802.11ac 80 MHz, SISO

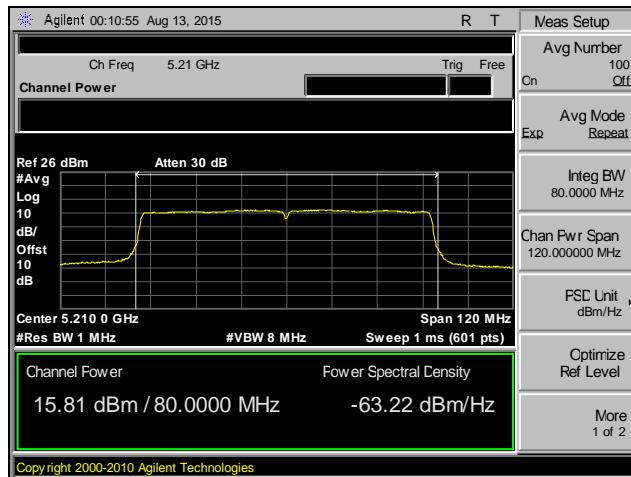


Plot 32. Conducted Output Power, 802.11ac 80 MHz, SISO, Channel 36


Conducted Output Power, 802.11n 20 MHz, MIMO

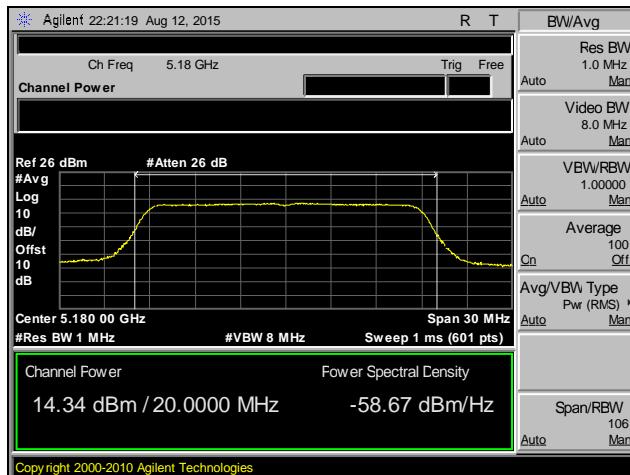

Plot 33. Conducted Output Power, 802.11n 20 MHz, MIMO, Channel 36

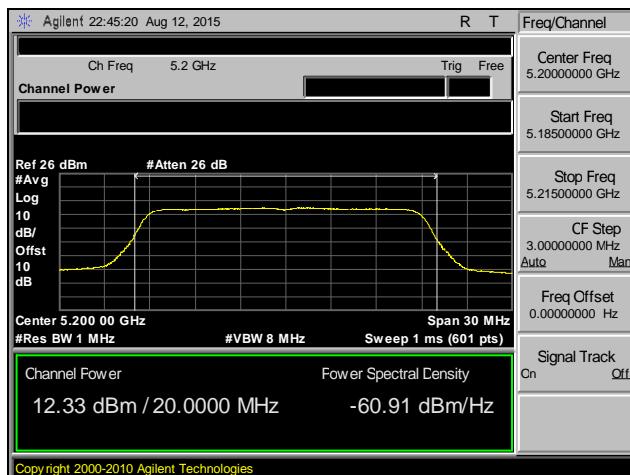


Plot 34. Conducted Output Power, 802.11n 20 MHz, MIMO, Channel 40

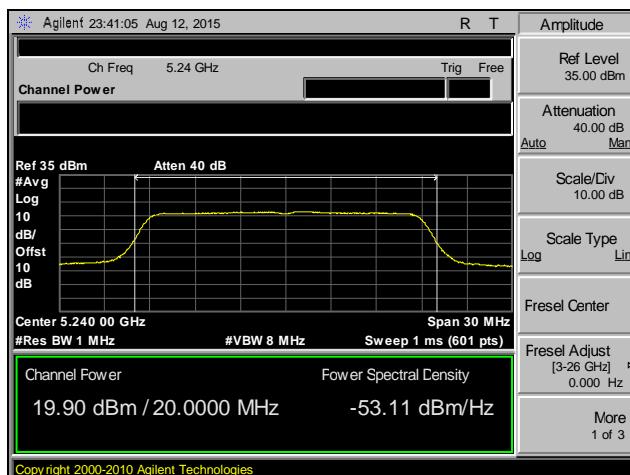


Plot 35. Conducted Output Power, 802.11n 20 MHz, MIMO, Channel 48


Conducted Output Power, 802.11n 20 MHz, SISO

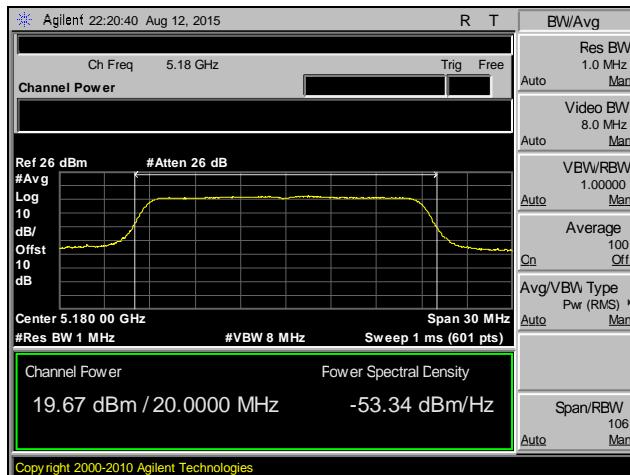

Plot 36. Conducted Output Power, 802.11n 20 MHz, SISO, Channel 36

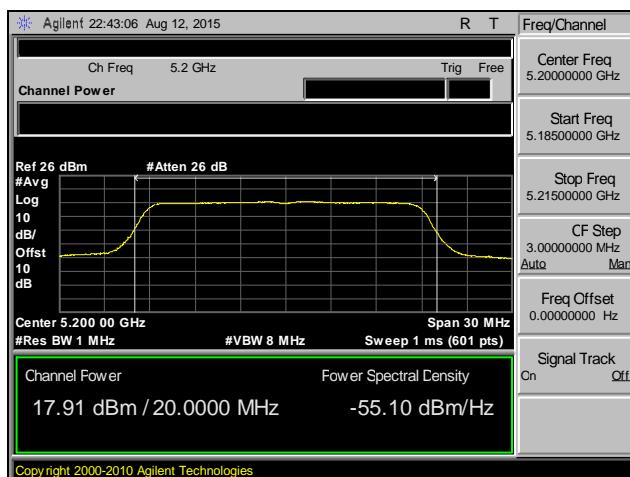


Plot 37. Conducted Output Power, 802.11n 20 MHz, SISO, Channel 40

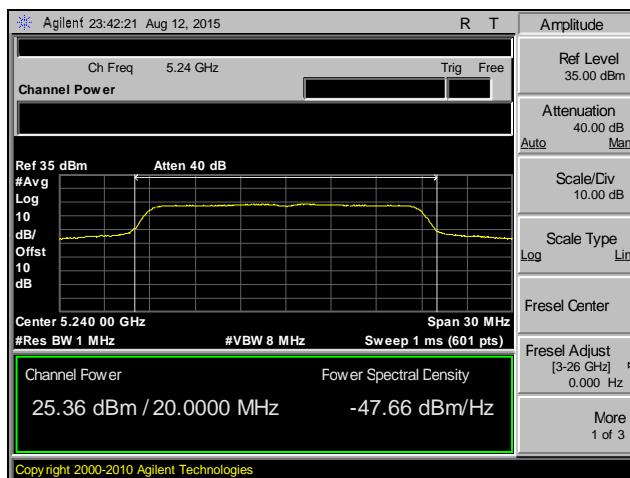


Plot 38. Conducted Output Power, 802.11n 20 MHz, SISO, Channel 48

Conducted Output Power, 802.11n 40 MHz, MIMO

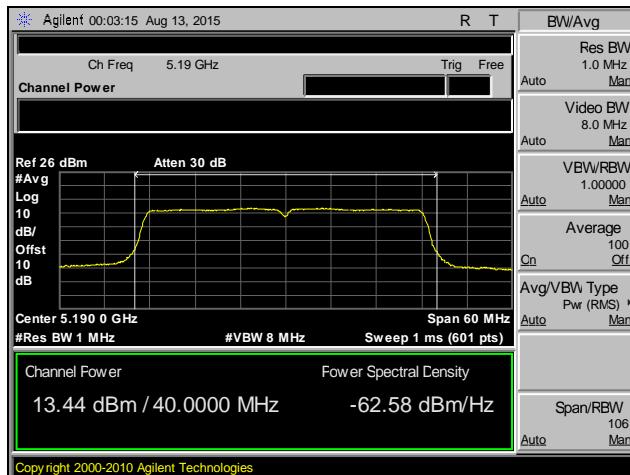


Plot 39. Conducted Output Power, 802.11n 40 MHz, MIMO, Channel 36

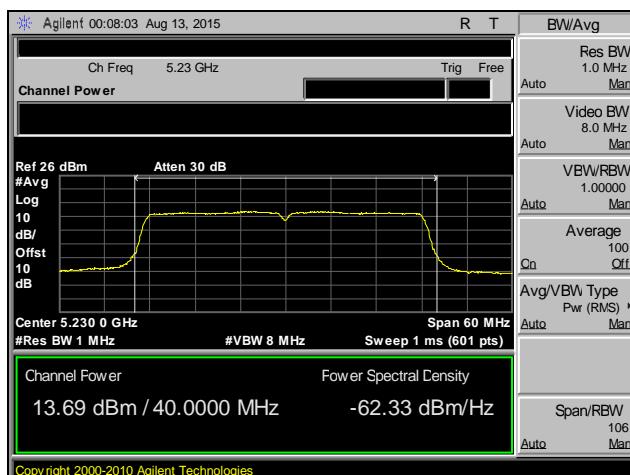


Plot 40. Conducted Output Power, 802.11n 40 MHz, MIMO, Channel 44

Conducted Output Power, 802.11n 40 MHz, SISO

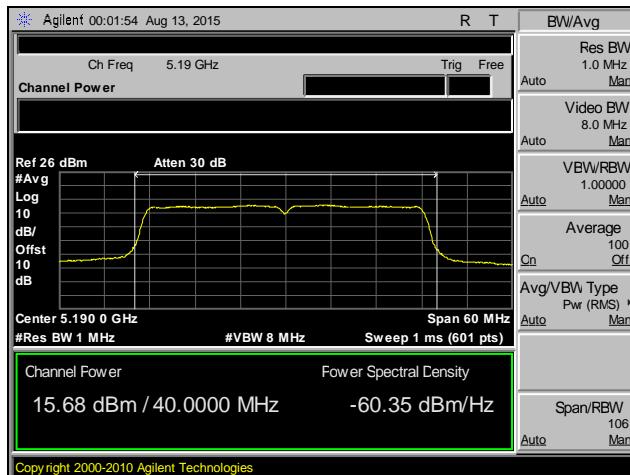

Plot 41. Conducted Output Power, 802.11n 40 MHz, SISO, Channel 36

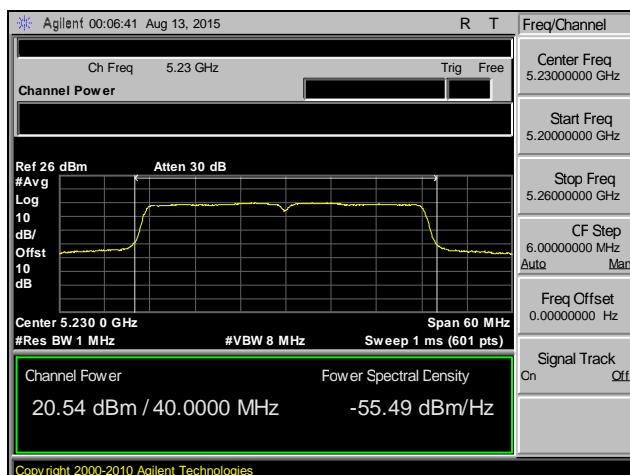

Plot 42. Conducted Output Power, 802.11n 40 MHz, SISO, Channel 44

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(1) Maximum Power Spectral Density

Test Requirements: §15.407(a)(1)(i): In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure: The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power spectral density was measured according KDB 789033 D02 General UNII Test Procedures v01.

Test Results: The EUT as tested is compliant with the requirements of this section.

Test Engineer(s): Surinder Singh

Test Date(s): 08/17/15



Maximum Conducted Output Power 20MHz Band 802.11a/ac/n							
Channel	Frequency GHz	Power spectral density (dBm)/1MHz Ant 1		Mode	PSD Limit (dBm)	Antenna Gain (dB)	Margin (dB)
36	5180	7.864		a	17	5.8	-9.136
40	5200	7.385		a	17	5.8	-9.615
48	5240	13.44		a	17	5.8	-3.56
36	5180	7.661		n	17	5.8	-9.339
40	5200	7.065		n	17	5.8	-9.935
48	5240	12.87		n	17	5.8	-4.13
36	5180	8.5		ac	17	5.8	-8.5
40	5200	6.6		ac	17	5.8	-10.4
48	5240	12.7		ac	17	5.8	-4.3

Table 10. Peak Power Spectral Density, Test Results, 802.11a/ac/n 20 MHz

Maximum Conducted Output Power 20MHz Band 802.11a/n/ac Mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Power spectral density (dBm)/1MHz Ant 0	Power spectral density (dBm)/1MHz Ant 1	Power spectral density (dBm)/1MHz Ant 2	Mode	Total Output PSD (dBm)	Antenna Gain (dB)	PSD Limit (dBm)	Margin (dB)
36	5180	3.495	3.523	3.478	a	8.27	9.6	13.4	-5.13
40	5200	0.346	0.33	0.412	a	5.13	9.6	13.4	-8.27
48	5240	8.24	8.605	8.212	a	13.13	9.6	13.4	-0.27
36	5180	2.49	2.729	2.856	n	7.47	9.6	13.4	-5.93
40	5200	0.64	0.9	0.96	n	5.61	9.6	13.4	-7.79
48	5240	8.06	8.48	8.24	n	13.03	9.6	13.4	-0.37
36	5180	3.15	3.024	3.19	ac	7.89	9.6	13.4	-5.51
40	5200	1.28	1.3	1.46	ac	6.12	9.6	13.4	-7.28
48	5240	8.056	9.184	8.11	ac	13.25	9.6	13.4	-0.15

Table 11. Peak Power Spectral Density, Test Results, 802.11a/ac/n 20 MHz, MIMO

Maximum Conducted Output Power 40MHz Band 802.11a/ac/n Mode (dBm)							
Channel	Frequency GHz	Power spectral density (dBm)/1MHz Ant 1		Mode	PSD Limit (dBm)	Antenna Gain (dB)	Margin (dB)
36	5190	1.15		n	17	5.8	-15.85
36	5190	1.28		ac	17	5.8	-15.72
44	5230	6.458		n	17	5.8	-10.542
44	5230	6.146		ac	17	5.8	-10.854

Table 12. Peak Power Spectral Density, Test Results, 802.11ac/n 40 MHz

Maximum Conducted Output Power 40MHz Band 11n/ac mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Power spectral density (dBm)/1MHz Ant 0	Power spectral density (dBm)/1MHz Ant 1	Power spectral density (dBm)/1MHz Ant 2	Mode	Total Output PSD (dBm)	Antenna Gain (dB)	PSD Limit (dBm)	Margin (dB)
36	5190	-1.6	-1.774	-1.8	n	3.05	9.6	13.4	-10.35
36	5190	-1.82	-1.858	-1.9	ac	2.91	9.6	13.4	-10.49
44	5230	-0.57	-0.59	-0.52	n	4.21	9.6	13.4	-9.19
44	5230	-0.36	-0.37	-0.19	ac	4.47	9.6	13.4	-8.93

Table 13. Peak Power Spectral Density, Test Results, 802.11ac/n 40 MHz, MIMO


Maximum Conducted Output Power 80MHz Band 802.11ac mode SISO (dBm)						
Channel	Frequency GHz	Power spectral density (dBm)/1MHz Ant 1	Mode	PSD Limit (dBm)	Antenna Gain (dB)	Margin (dB)
36	5210	-1.839	ac	17	5.8	-18.839

Table 14. Peak Power Spectral Density, Test Results, 802.11ac 80 MHz


Maximum Conducted Output Power 80MHz Band 802.11ac mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Power spectral density (dBm)/1MHz Ant 0	Power spectral density (dBm)/1MHz Ant 1	Power spectral density (dBm)/1MHz Ant 2	Total Output PSD (dBm)	Antenna Gain (dB)	PSD Limit (dBm)	Margin (dB)	
36	5210	-6.22	-6.537	-6.08	-1.50	9.6	13.4	-14.90	

Table 15. Peak Power Spectral Density, Test Results, 802.11ac 80 MHz, MIMO


Peak Power Spectral Density, 802.11a 20 MHz, MIMO

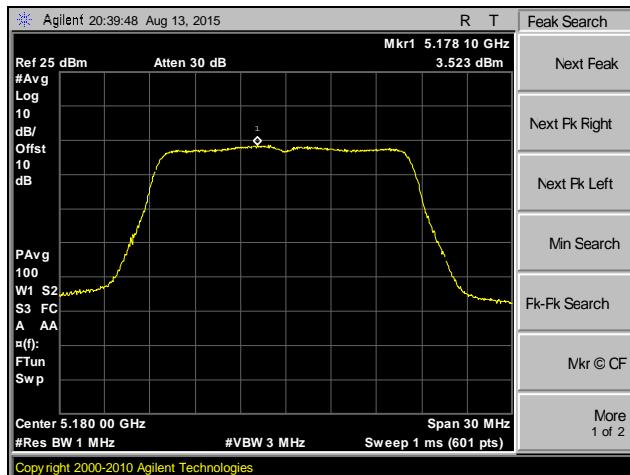

Plot 43. Peak Power Spectral Density, 802.11a 20 MHz, MIMO, Channel 36

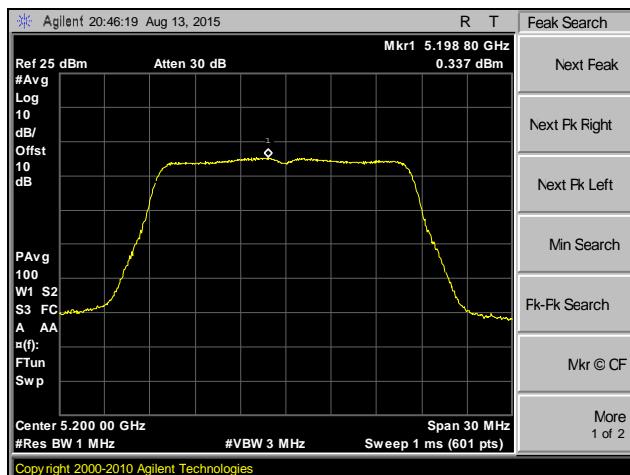


Plot 44. Peak Power Spectral Density, 802.11a 20 MHz, MIMO, Channel 40

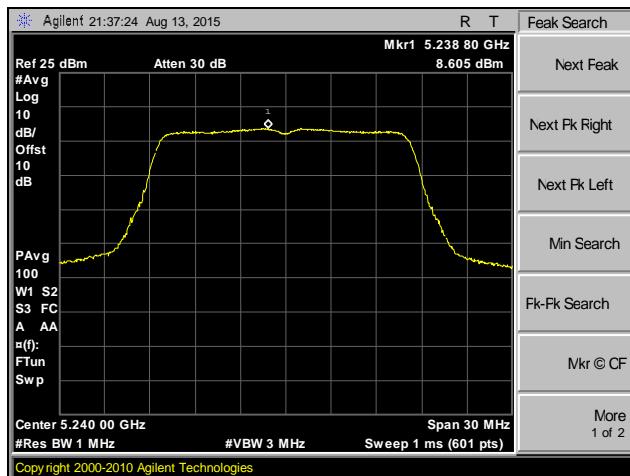


Plot 45. Peak Power Spectral Density, 802.11a 20 MHz, MIMO, Channel 48


Peak Power Spectral Density, 802.11a 20 MHz, SISO

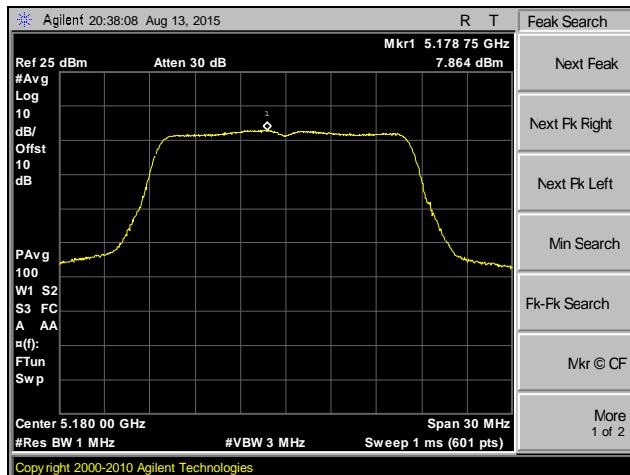

Plot 46. Peak Power Spectral Density, 802.11a 20 MHz, SISO, Channel 36

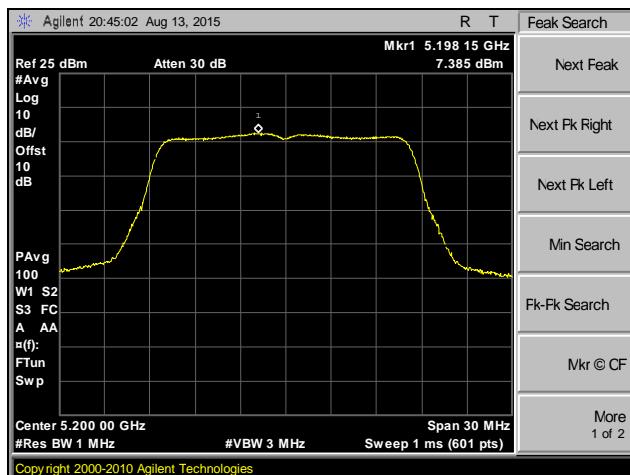


Plot 47. Peak Power Spectral Density, 802.11a 20 MHz, SISO, Channel 40

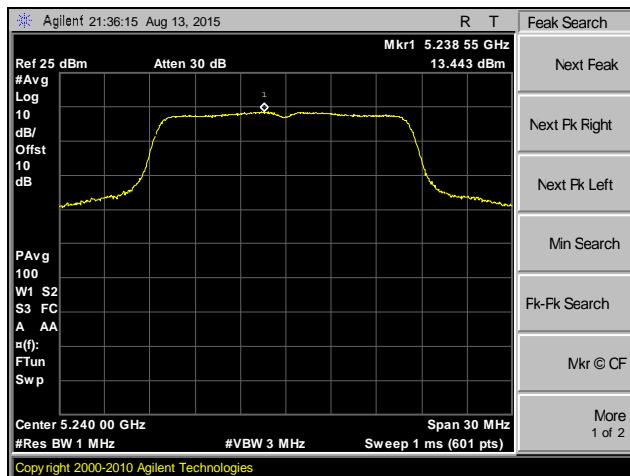


Plot 48. Peak Power Spectral Density, 802.11a 20 MHz, SISO, Channel 48


Peak Power Spectral Density, 802.11ac 20 MHz, MIMO

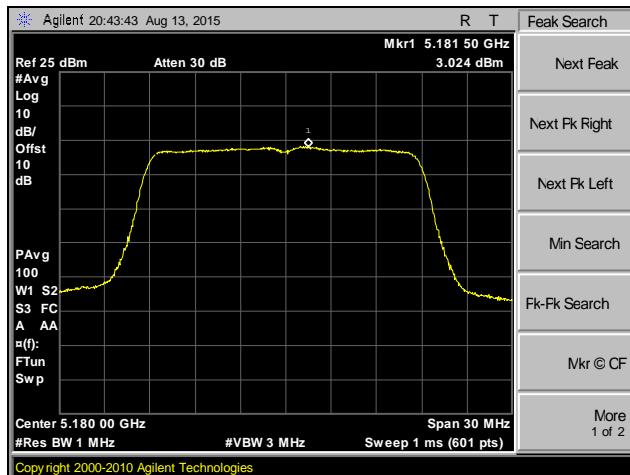

Plot 49. Peak Power Spectral Density, 802.11ac 20 MHz, MIMO, Channel 36

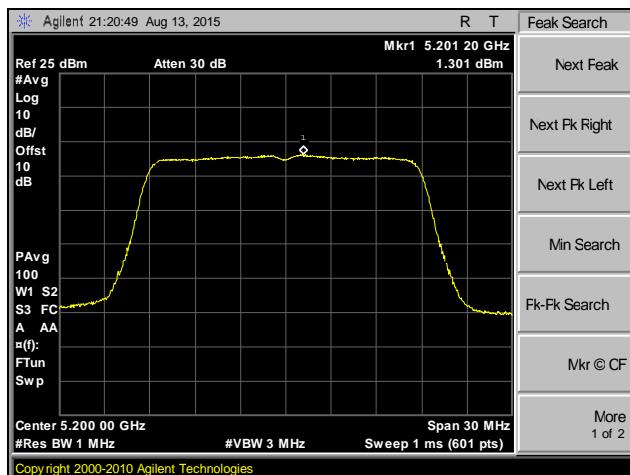


Plot 50. Peak Power Spectral Density, 802.11ac 20 MHz, MIMO, Channel 40

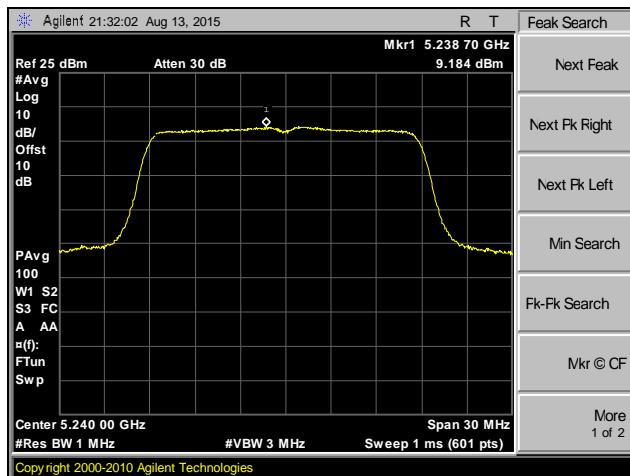


Plot 51. Peak Power Spectral Density, 802.11ac 20 MHz, MIMO, Channel 48


Peak Power Spectral Density, 802.11ac 20 MHz, SISO

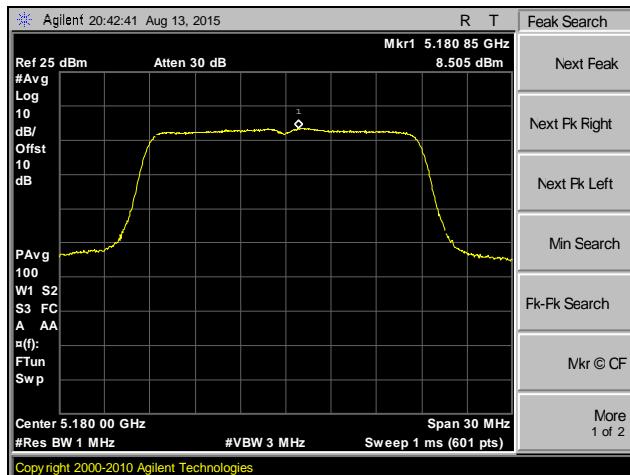

Plot 52. Peak Power Spectral Density, 802.11ac 20 MHz, SISO, Channel 36

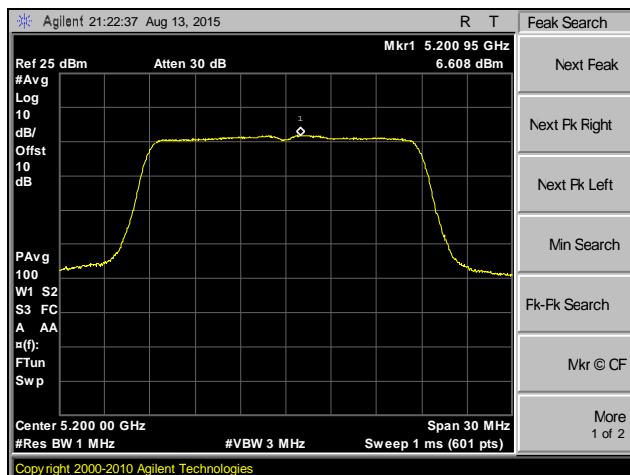


Plot 53. Peak Power Spectral Density, 802.11ac 20 MHz, SISO, Channel 40

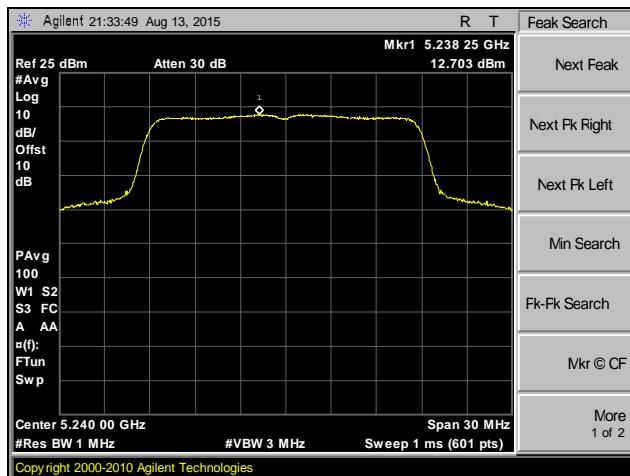


Plot 54. Peak Power Spectral Density, 802.11ac 20 MHz, SISO, Channel 48

Peak Power Spectral Density, 802.11ac 40 MHz, MIMO

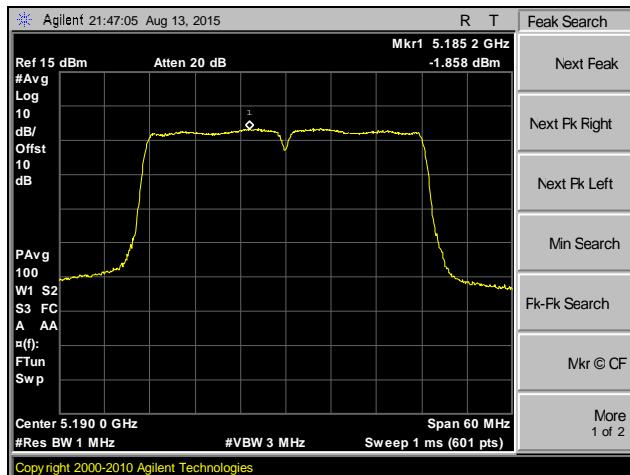


Plot 55. Peak Power Spectral Density, 802.11ac 40 MHz, MIMO, Channel 36

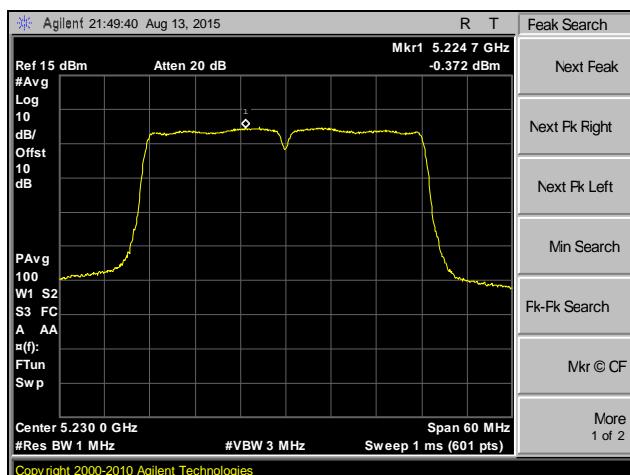


Plot 56. Peak Power Spectral Density, 802.11ac 40 MHz, MIMO, Channel 44

Peak Power Spectral Density, 802.11ac 40 MHz, SISO

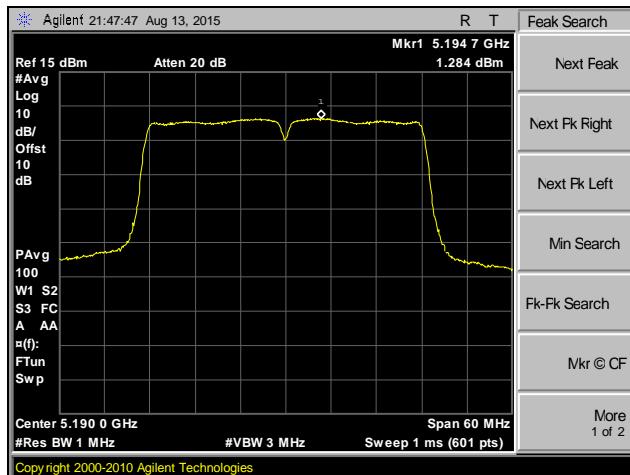


Plot 57. Peak Power Spectral Density, 802.11ac 40 MHz, SISO, Channel 36

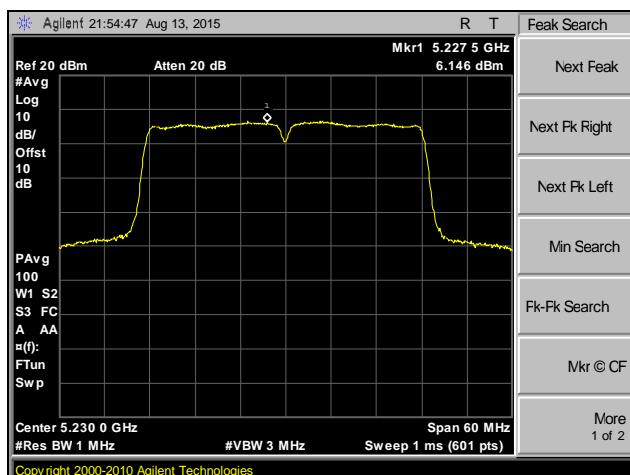


Plot 58. Peak Power Spectral Density, 802.11ac 40 MHz, SISO, Channel 44

Peak Power Spectral Density, 802.11ac 80 MHz, MIMO

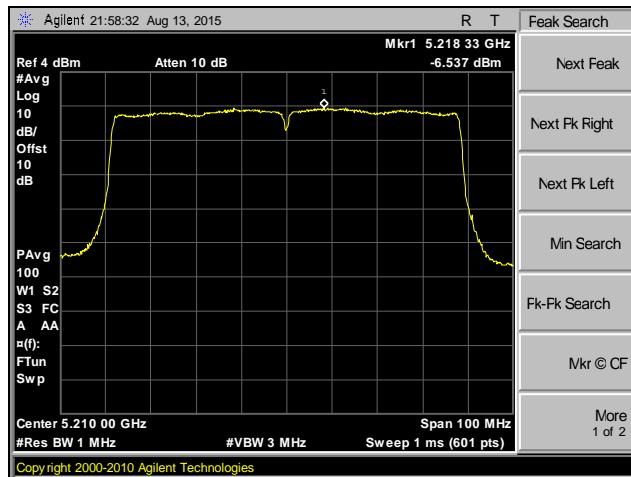


Plot 59. Peak Power Spectral Density, 802.11ac 80 MHz, MIMO, Channel 36

Peak Power Spectral Density, 802.11ac 80 MHz, SISO

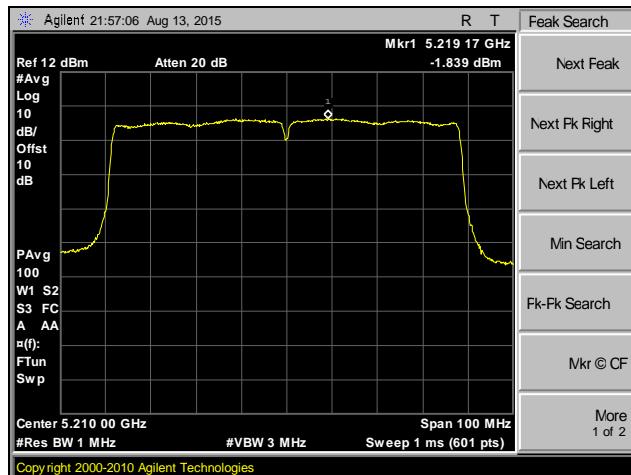


Plot 60. Peak Power Spectral Density, 802.11ac 80 MHz, SISO, Channel 36


Peak Power Spectral Density, 802.11n 20 MHz, MIMO

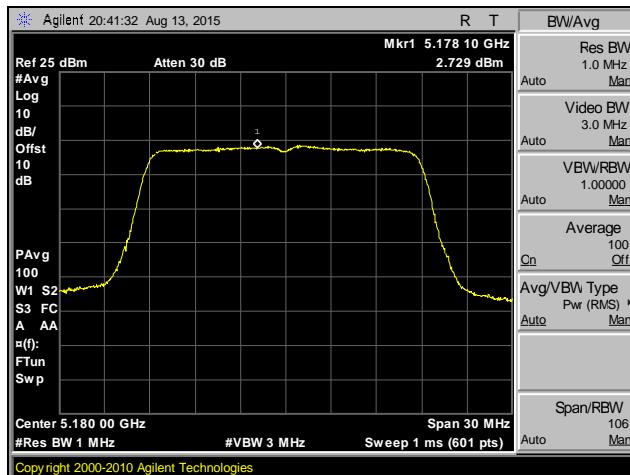

Plot 61. Peak Power Spectral Density, 802.11n 20 MHz, MIMO, Channel 36

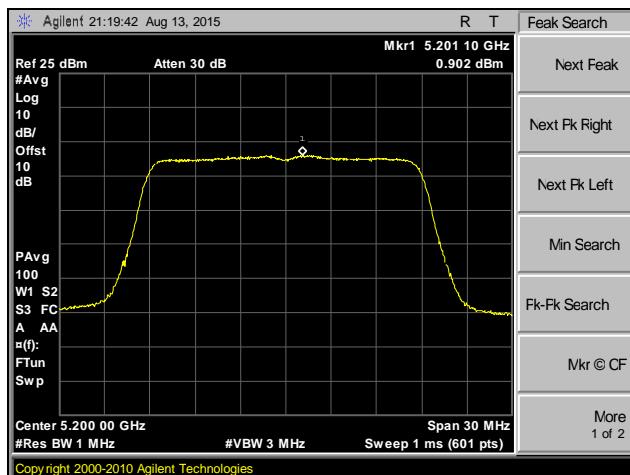


Plot 62. Peak Power Spectral Density, 802.11n 20 MHz, MIMO, Channel 40

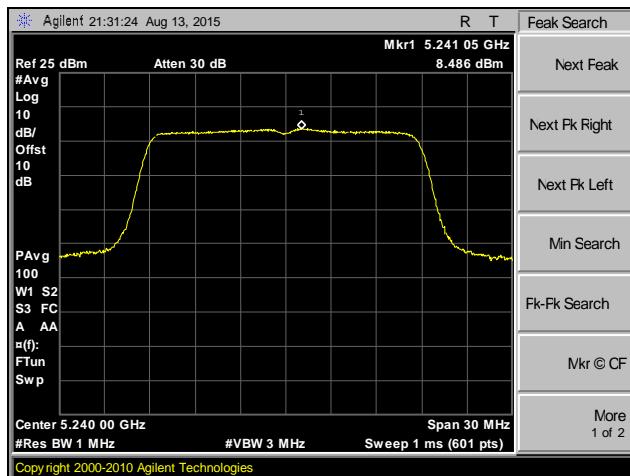


Plot 63. Peak Power Spectral Density, 802.11n 20 MHz, MIMO, Channel 48


Peak Power Spectral Density, 802.11n 20 MHz, SISO

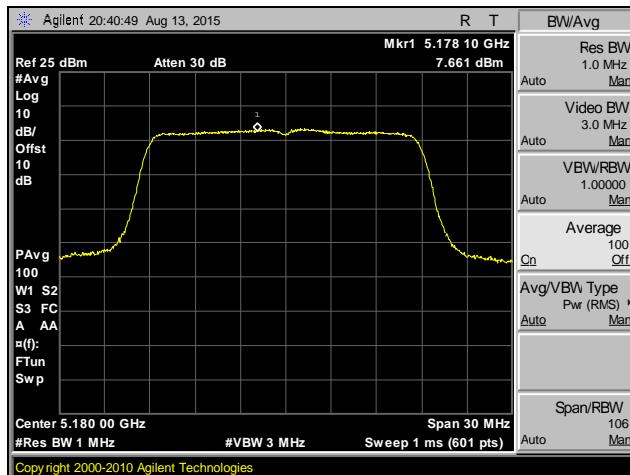

Plot 64. Peak Power Spectral Density, 802.11n 20 MHz, SISO, Channel 36

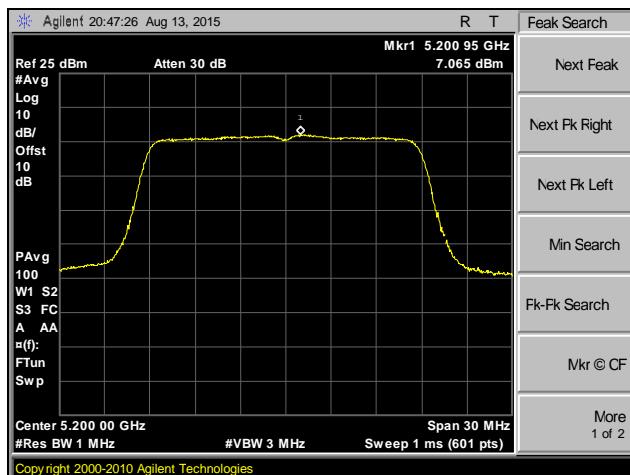


Plot 65. Peak Power Spectral Density, 802.11n 20 MHz, SISO, Channel 40

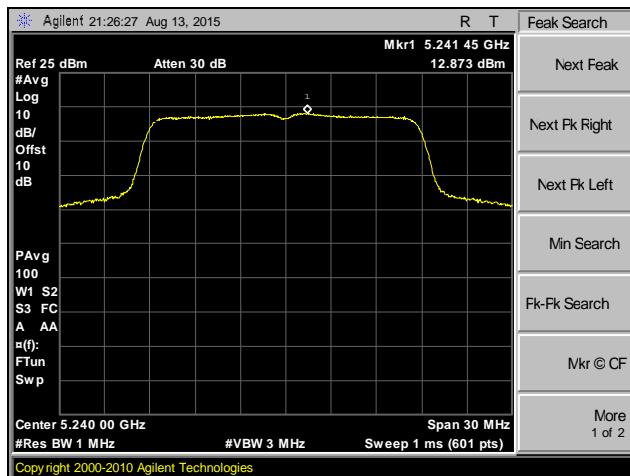


Plot 66. Peak Power Spectral Density, 802.11n 20 MHz, SISO, Channel 48

Peak Power Spectral Density, 802.11n 40 MHz, MIMO

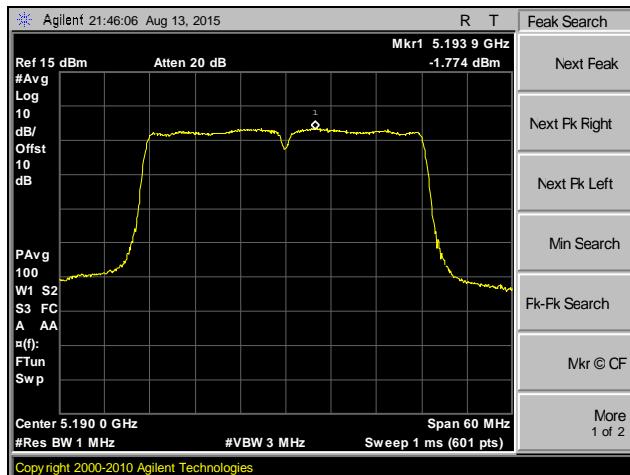


Plot 67. Peak Power Spectral Density, 802.11n 40 MHz, MIMO, Channel 36

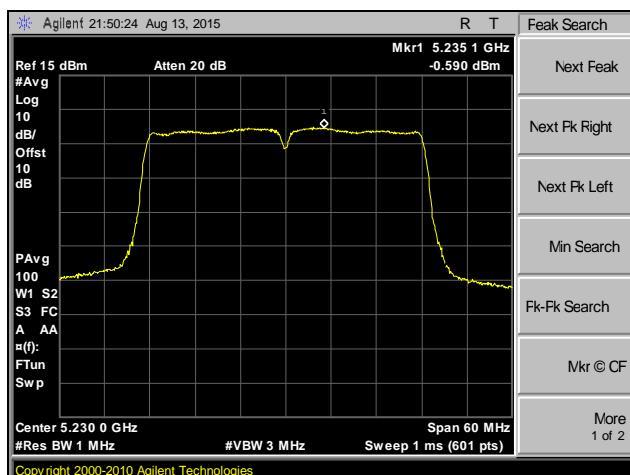


Plot 68. Peak Power Spectral Density, 802.11n 40 MHz, MIMO, Channel 44

Peak Power Spectral Density, 802.11n 40 MHz, SISO

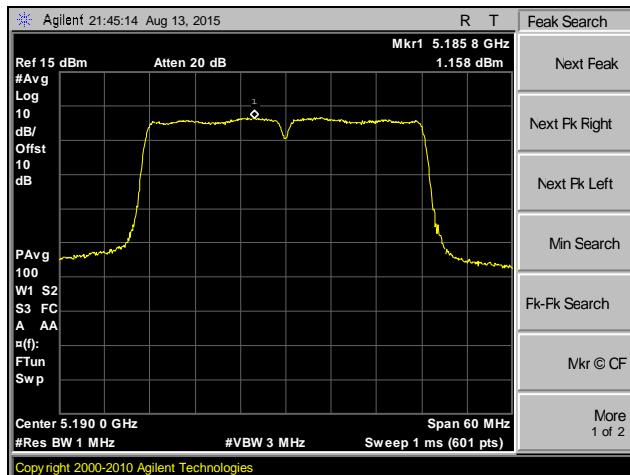

Plot 69. Peak Power Spectral Density, 802.11n 40 MHz, SISO, Channel 36

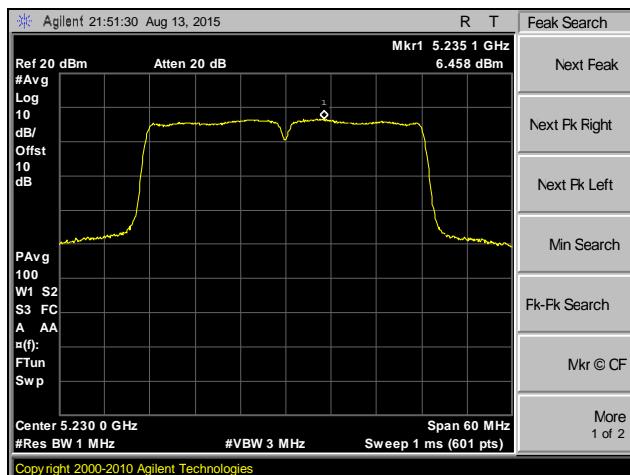

Plot 70. Peak Power Spectral Density, 802.11n 40 MHz, SISO, Channel 44

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(b)(1) & (6 – 7) Undesirable Emissions

Test Requirements: § 15.407(b)(1): For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure: Antenna-port conducted measurements in conjunction with cabinet emissions tests were performed to demonstrate compliance with the requirement of unwanted emission in the spurious domain. The following tests and methods were used as per KDB 789033 D02 General UNII Test Procedures New Rules v01

1. Cabinet emissions measurements. A radiated test shall be performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna may be replaced by a termination matching the nominal impedance of the antenna.
2. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.)

$$\text{EIRP} = E \text{ (Restricted band field strength limit)} + 20 * \log(d) - 104.77 \quad (1)$$

Where d=3 meter is measurement distance specified in FCC 15.209 requirement.

E= 54dBuV/m is the limit for spurious emission in restricted band.

Plugging these values to equation (1) above

EIRP= 54+9.54-104.77 = -41.22dBm. This was the limit used for restricted band spurious emission measurement.

3. The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.³ However, for devices that operate in multiple bands using the same transmit antenna, the highest gain of the antenna within the operating band nearest to the out-of-band frequency being measured may be used in lieu of the overall highest gain when measuring emissions at frequencies within 20 percent of the absolute frequency at the nearest edge of that band, but in no case shall a value less than 2 dBi be selected.
4. EIRP adjustments for multiple outputs. For devices with multiple outputs occupying the same or overlapping frequency ranges in the same band (e.g., MIMO or beamforming devices), the total EIRP was calculated as follows:
 - a. Computed EIRP on one of the antenna port since output power remain uniform across all antenna port for this DUT when operated under MIMO mode.

- b. Adjusted emission levels measured on individual output by $10 \log(NANT)$, where NANT is the number of outputs (For this DUT NANT is 3). Therefore $10\log(3)= 4.77\text{dB}$ was used on spectrum analyzer as reference offset to account for MIMO summation.
- c. Added the array gain term specified in KDB Publication 662911 for out-of-band and spurious signals.

The total reference level offset used on spectrum analyzer

$$\text{Offset} = 10\text{dB} (\text{external attenuator}) + 4.77\text{dB} (\text{MIMO Summation factor}) + \text{Array Gain (dBi)}$$

For Cabinet measurement: The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

Test Results:

For below 1 GHz, the EUT was compliant with the requirements of this section. Only worse case plot was included in the test report.

For above 1 GHz, the EUT was compliant with the requirements of this section.


Only noise floor was observed 18GHz.

Test Engineer(s):

Surinder Singh




Test Date(s):

08/13/15

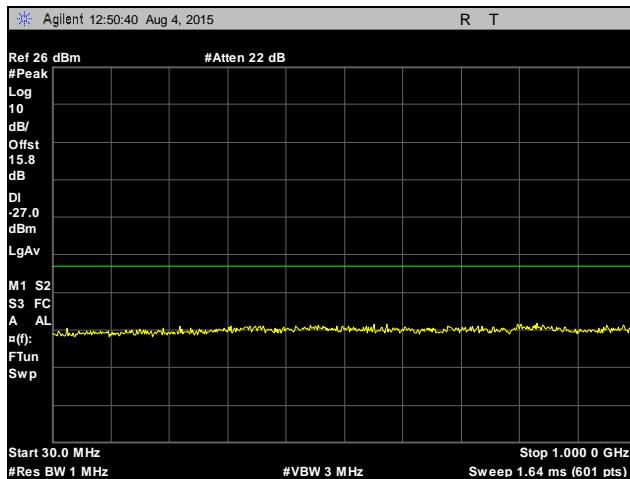


Plot 71. Spurious Emissions, Worst Case Emission Plot, 30 MHz – 1 GHz


Spurious Emissions, 802.11a 20 MHz, MIMO

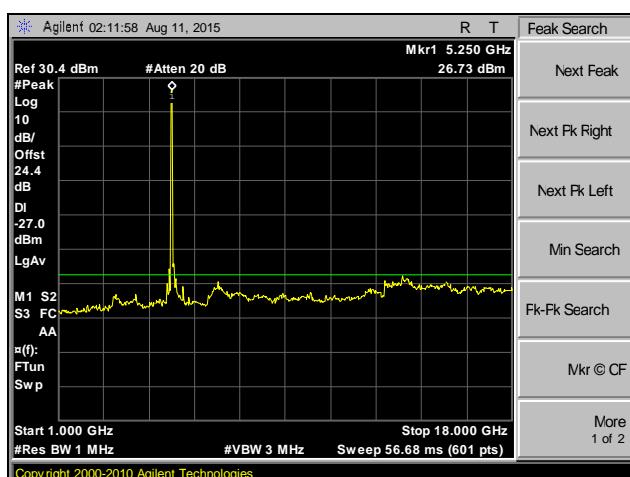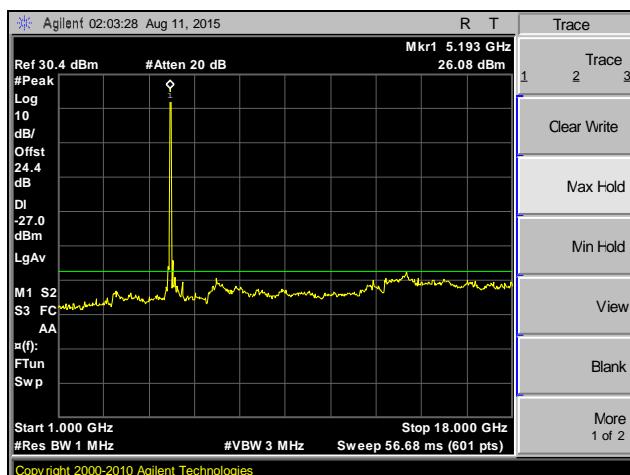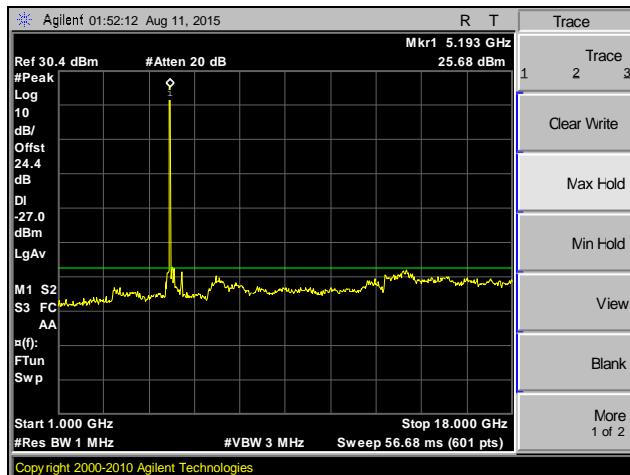


Spurious Emissions, 802.11a 20 MHz, SISO

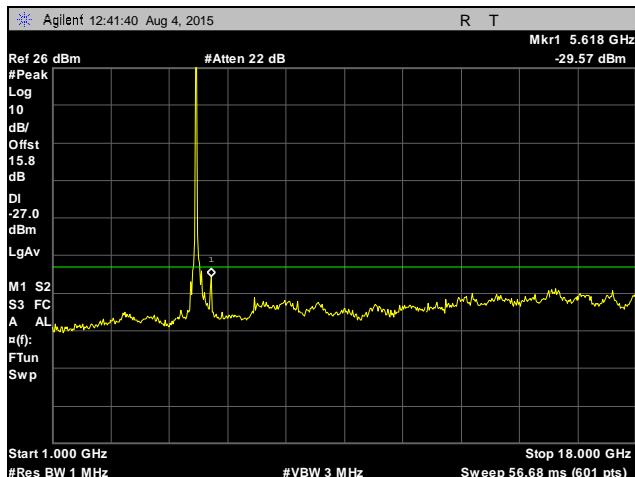

Plot 75. Spurious Emissions, 802.11a 20 MHz, SISO, Low Channel

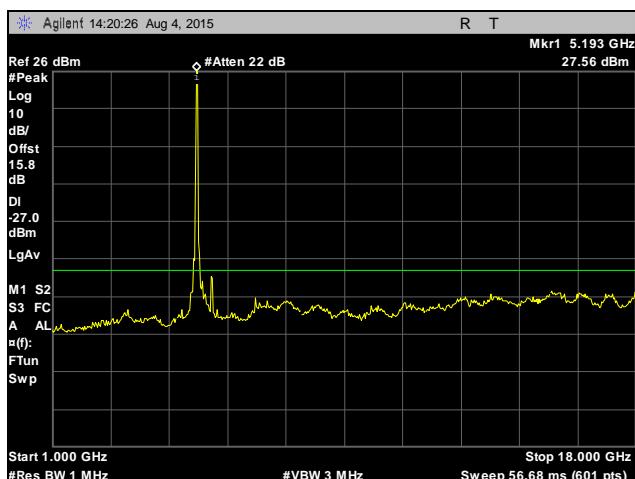


Plot 76. Spurious Emissions, 802.11a 20 MHz, SISO, Mid Channel

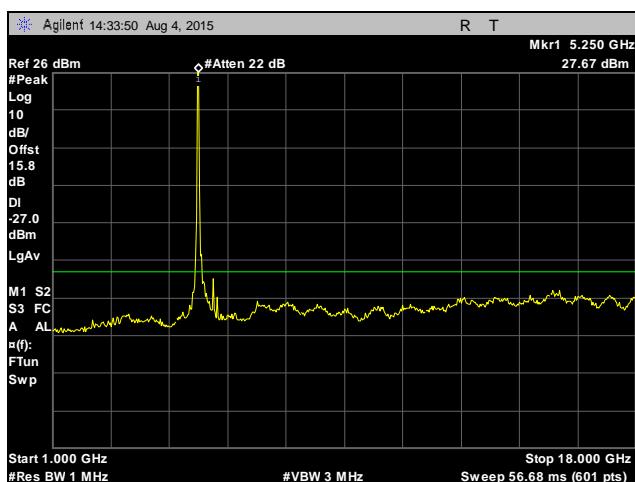


Plot 77. Spurious Emissions, 802.11a 20 MHz, SISO, High Channel


Spurious Emissions, 802.11ac 20 MHz, MIMO

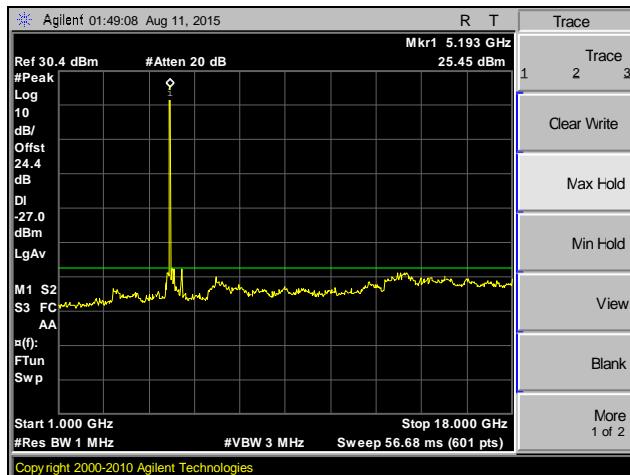

Plot 78. Spurious Emissions, 802.11ac 20 MHz, MIMO, Low Channel

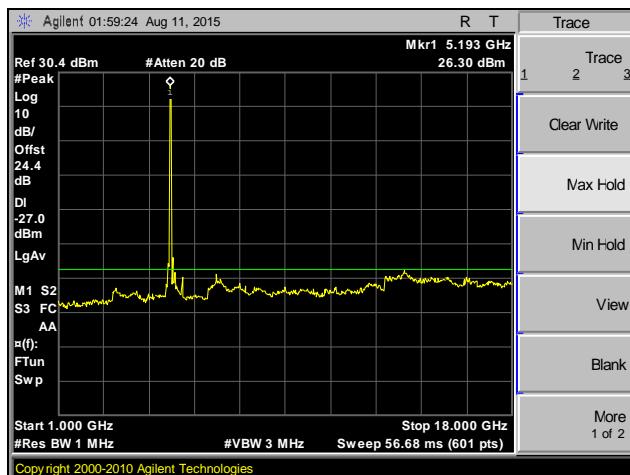


Plot 79. Spurious Emissions, 802.11ac 20 MHz, MIMO, Mid Channel

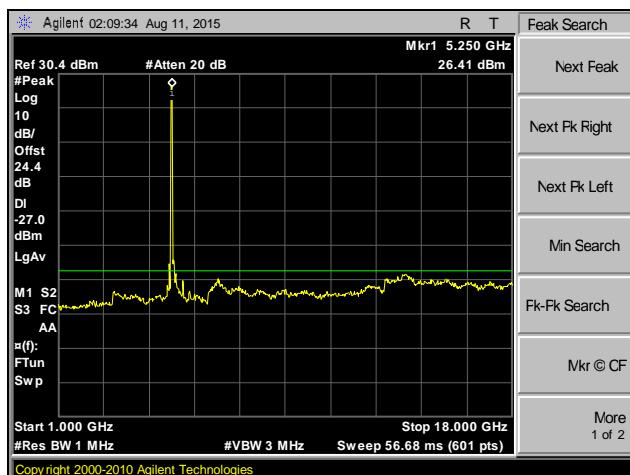


Plot 80. Spurious Emissions, 802.11ac 20 MHz, MIMO, High Channel


Spurious Emissions, 802.11ac 20 MHz, SISO

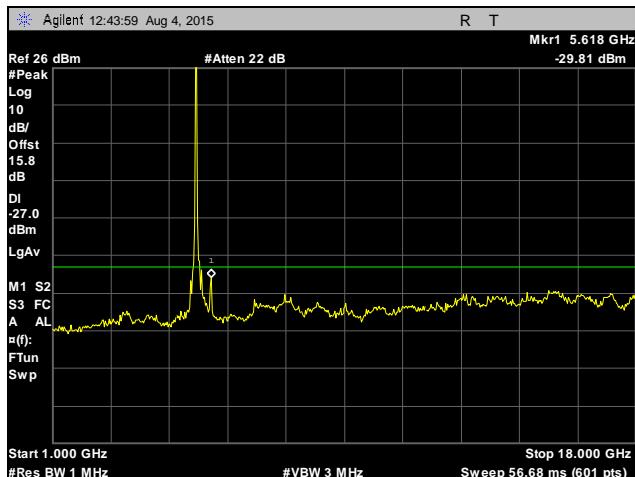

Plot 81. Spurious Emissions, 802.11ac 20 MHz, SISO, Low Channel

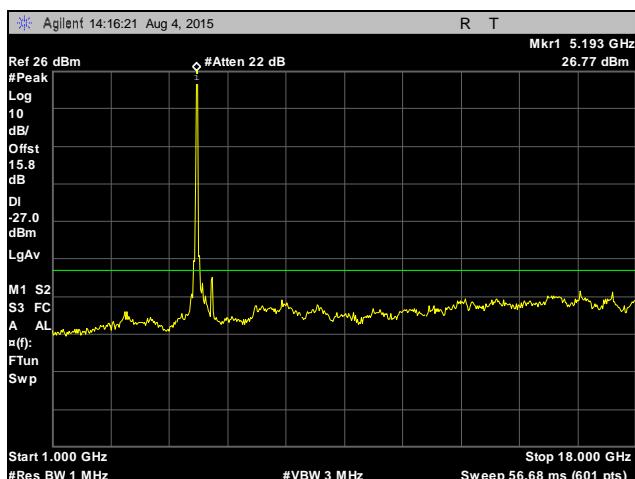


Plot 82. Spurious Emissions, 802.11ac 20 MHz, SISO, Mid Channel

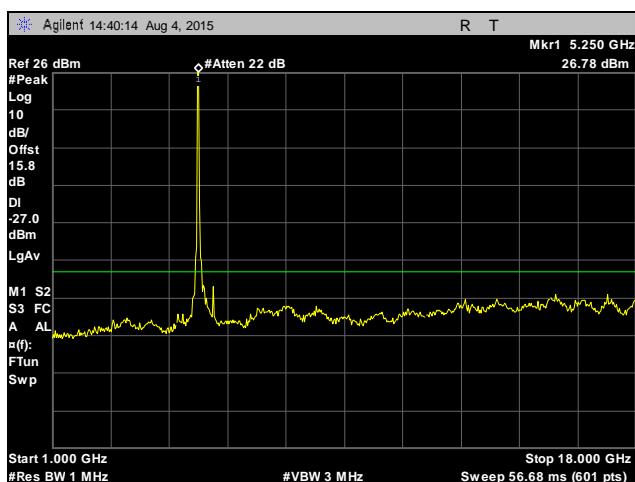


Plot 83. Spurious Emissions, 802.11ac 20 MHz, SISO, High Channel

Spurious Emissions, 802.11ac 40 MHz, MIMO

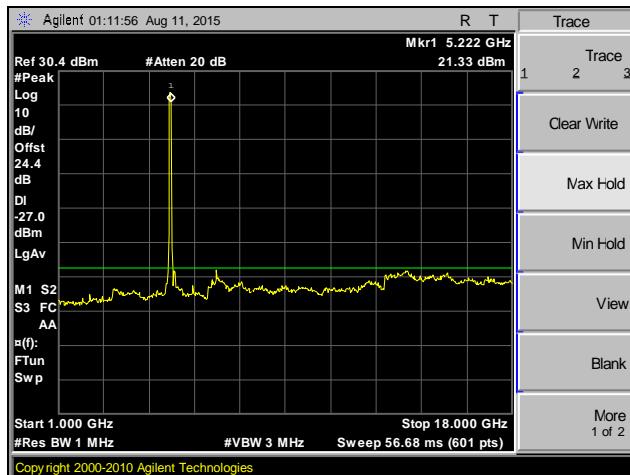


Plot 84. Spurious Emissions, 802.11ac 40 MHz, MIMO, Low Channel

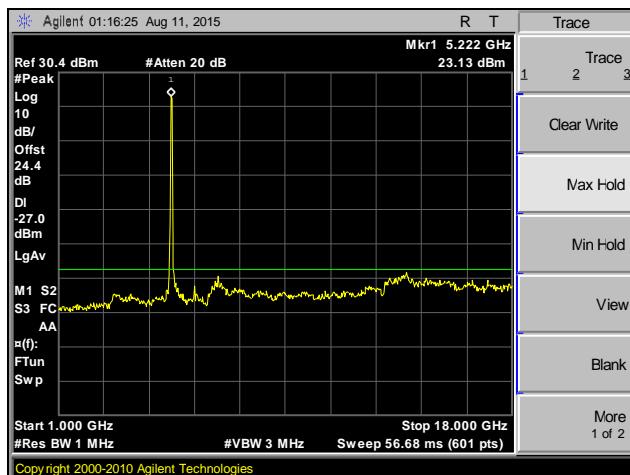


Plot 85. Spurious Emissions, 802.11ac 40 MHz, MIMO, High Channel

Spurious Emissions, 802.11ac 40 MHz, SISO

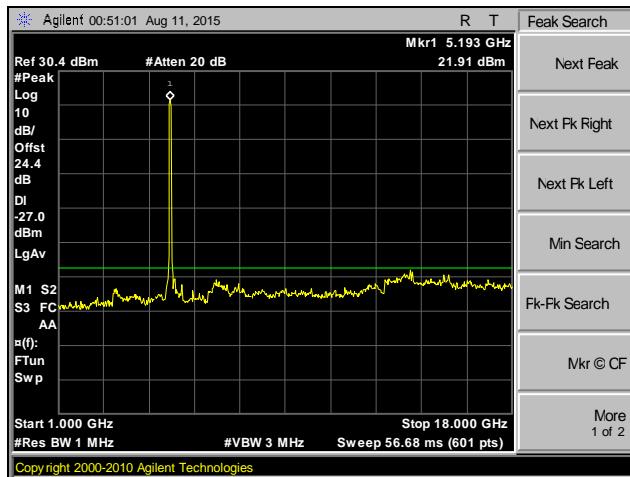


Plot 86. Spurious Emissions, 802.11ac 40 MHz, SISO, Low Channel

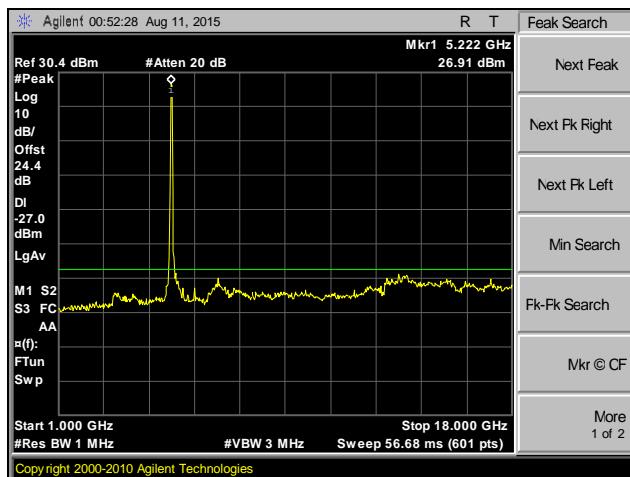


Plot 87. Spurious Emissions, 802.11ac 40 MHz, SISO, High Channel

Spurious Emissions, 802.11ac 80 MHz, MIMO

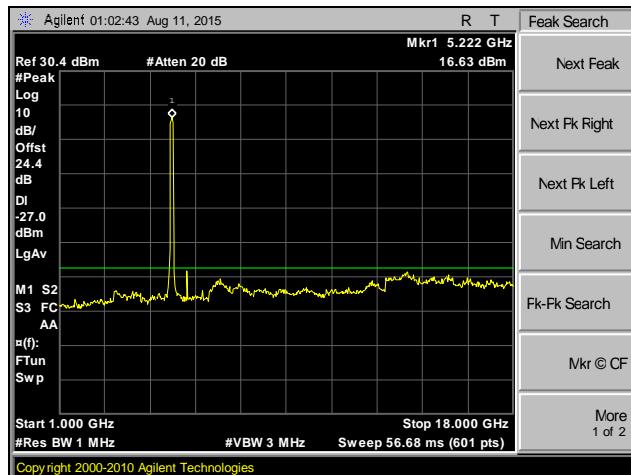


Plot 88. Spurious Emissions, 802.11ac 80 MHz, MIMO, Low Channel

Spurious Emissions, 802.11ac 80 MHz, SISO

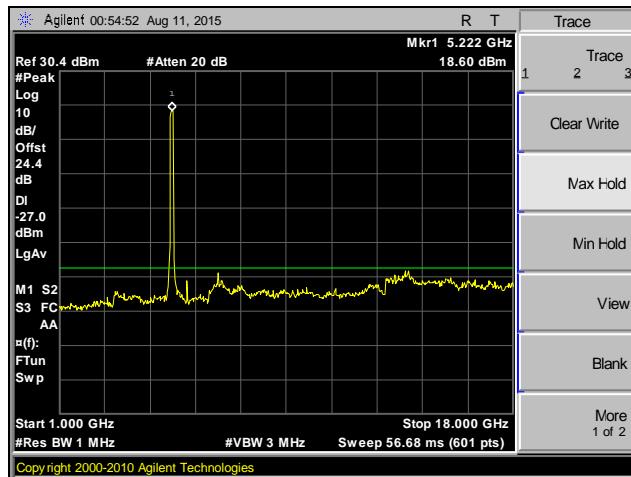


Plot 89. Spurious Emissions, 802.11ac 80 MHz, SISO, Low Channel


Spurious Emissions, 802.11n 20 MHz, MIMO

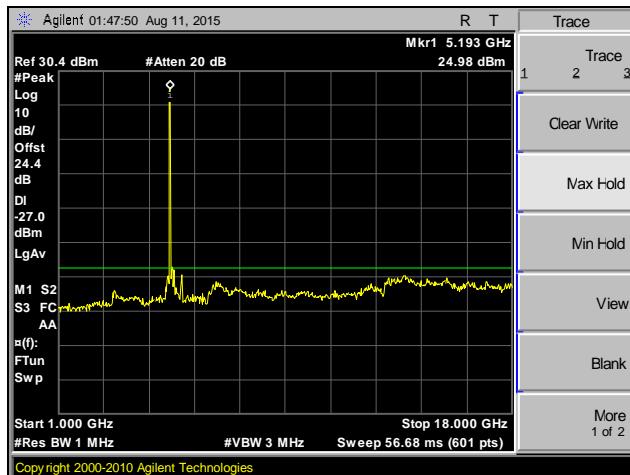

Plot 90. Spurious Emissions, 802.11n 20 MHz, MIMO, Low Channel

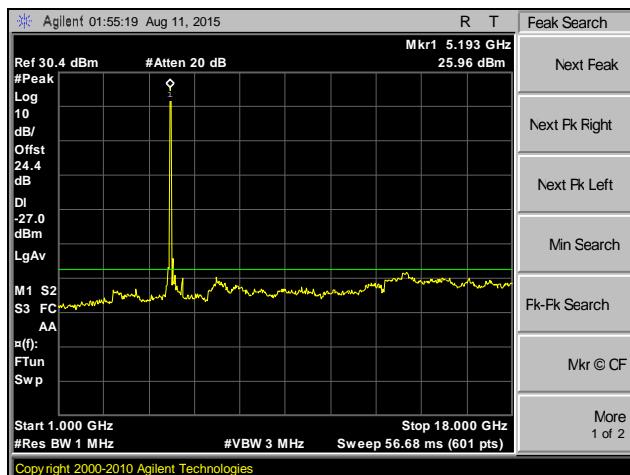


Plot 91. Spurious Emissions, 802.11n 20 MHz, MIMO, Mid Channel

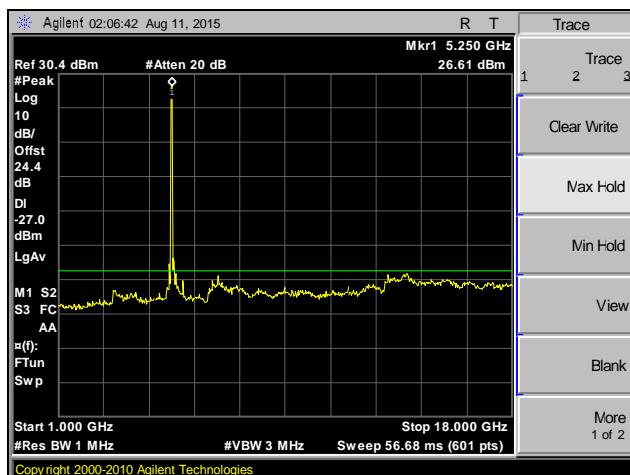


Plot 92. Spurious Emissions, 802.11n 20 MHz, MIMO, High Channel


Spurious Emissions, 802.11n 20 MHz, SISO

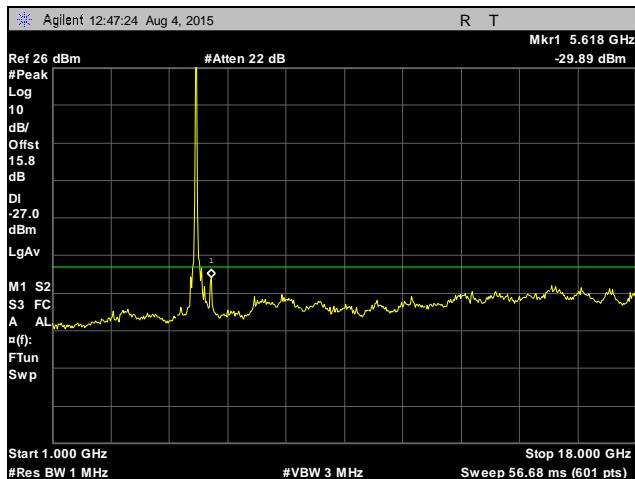

Plot 93. Spurious Emissions, 802.11n 20 MHz, SISO, Low Channel

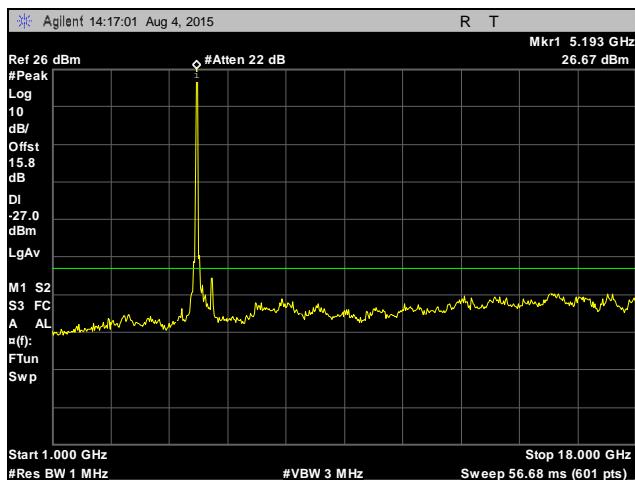


Plot 94. Spurious Emissions, 802.11n 20 MHz, SISO, Mid Channel

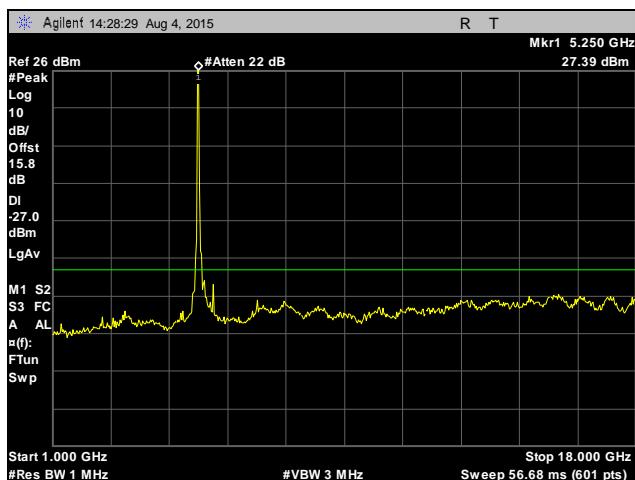


Plot 95. Spurious Emissions, 802.11n 20 MHz, SISO, High Channel

Spurious Emissions, 802.11n 40 MHz, MIMO

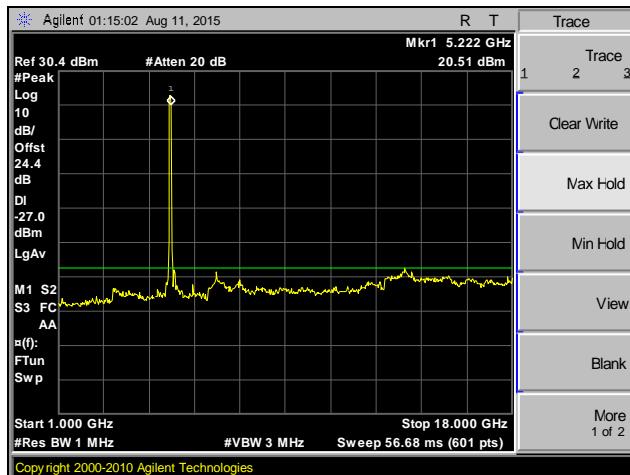


Plot 96. Spurious Emissions, 802.11n 40 MHz, MIMO, Low Channel

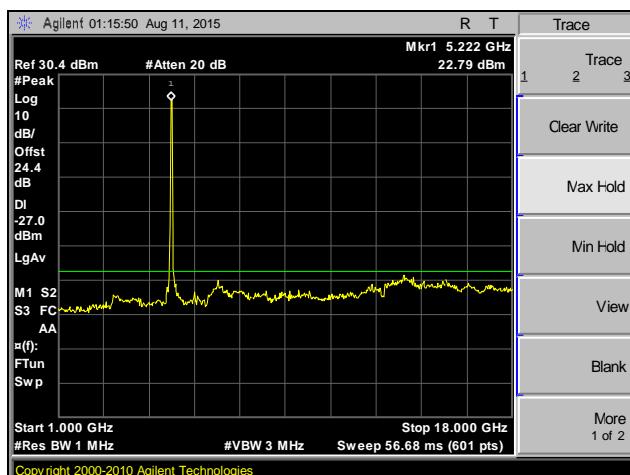


Plot 97. Spurious Emissions, 802.11n 40 MHz, MIMO, High Channel

Spurious Emissions, 802.11n 40 MHz, SISO

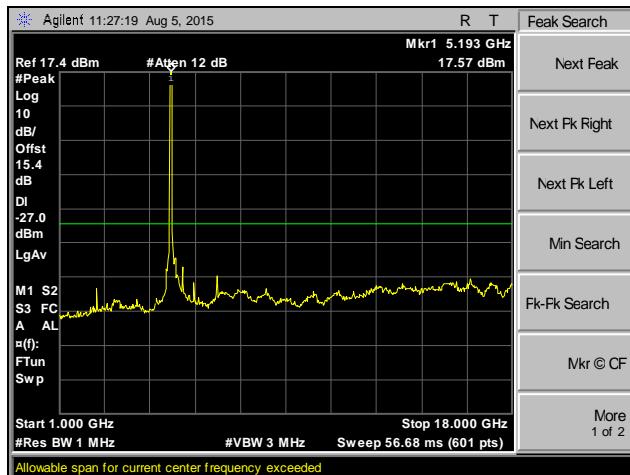


Plot 98. Spurious Emissions, 802.11n 40 MHz, SISO, Low Channel

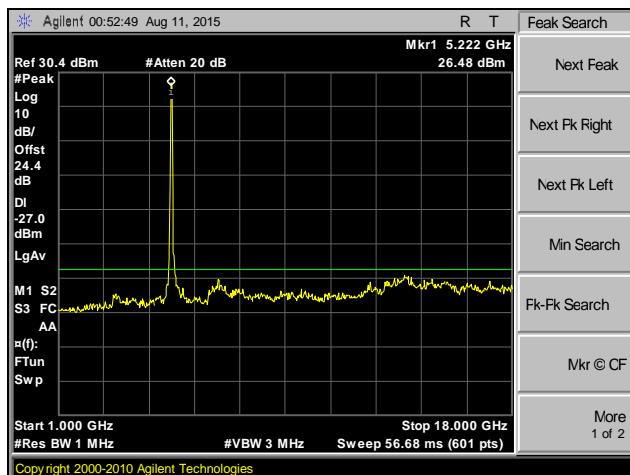


Plot 99. Spurious Emissions, 802.11n 40 MHz, SISO, High Channel


Band Edge, 802.11a 20 MHz, MIMO

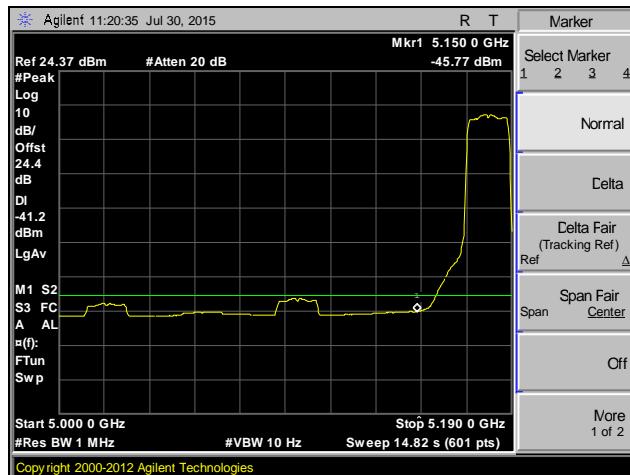


Plot 100. Band Edge, 802.11a 20 MHz, MIMO, Channel 36, Average

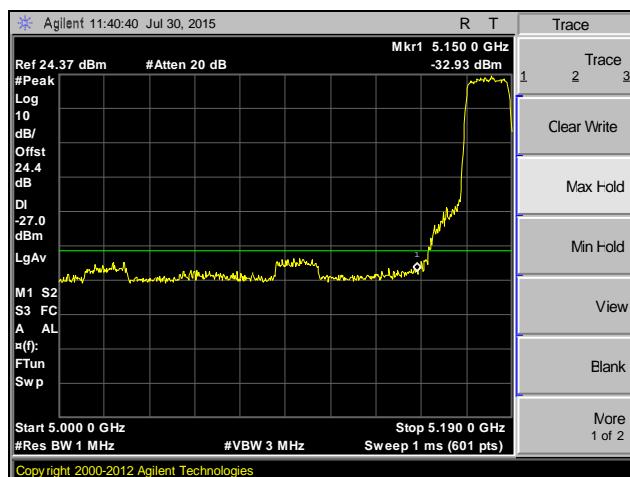


Plot 101. Band Edge, 802.11a 20 MHz, MIMO, Channel 36, Peak

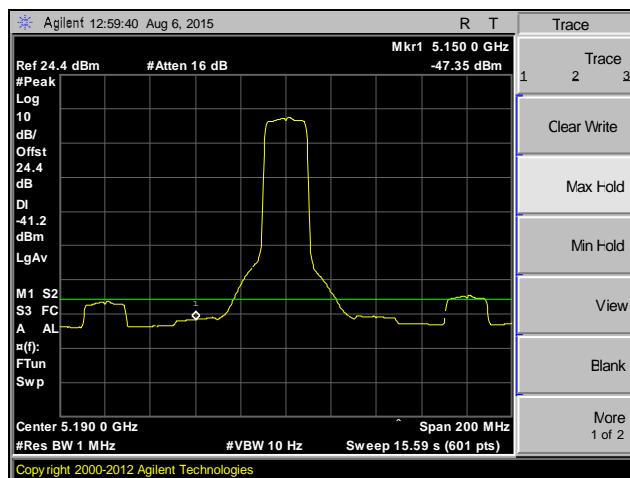


Plot 102. Band Edge, 802.11a 20 MHz, MIMO, Channel 38, Average

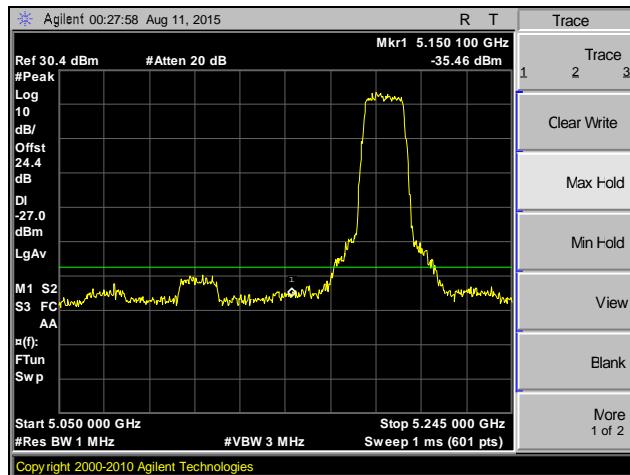


Plot 103. Band Edge, 802.11a 20 MHz, MIMO, Channel 38, Peak

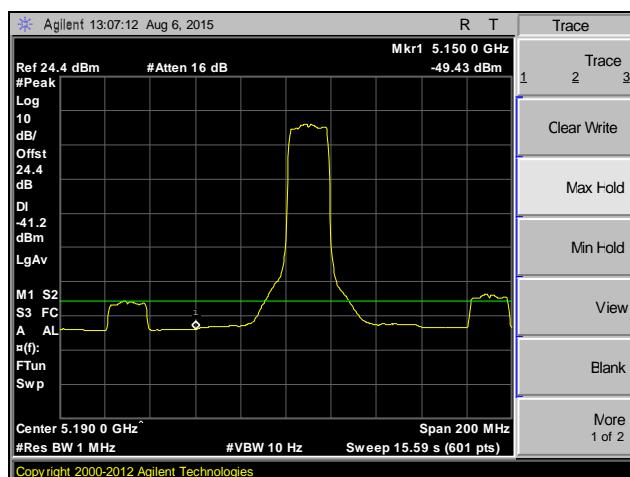


Plot 104. Band Edge, 802.11a 20 MHz, MIMO, Channel 40, Average

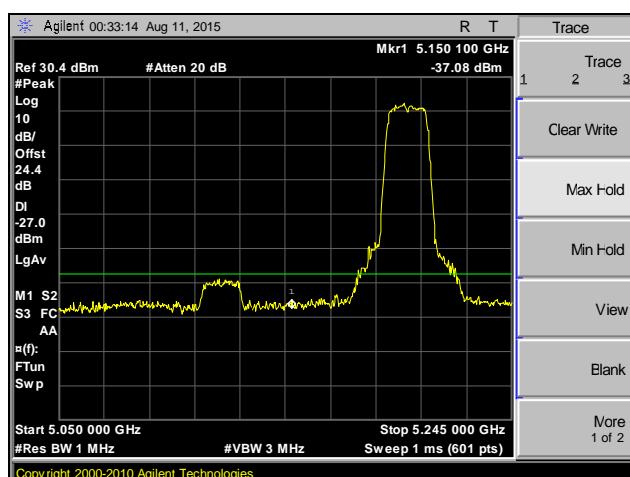


Plot 105. Band Edge, 802.11a 20 MHz, MIMO, Channel 40, Peak

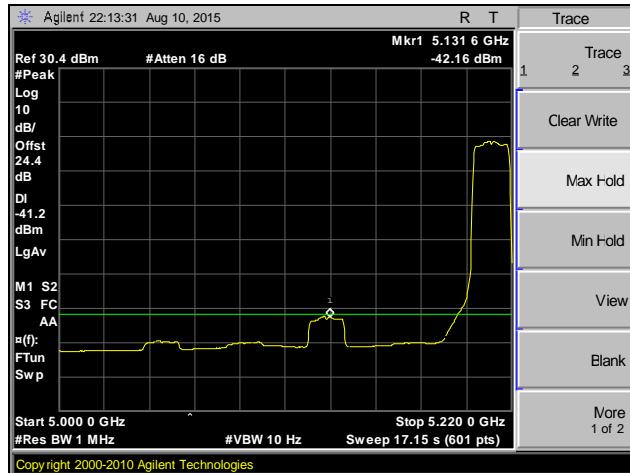


Plot 106. Band Edge, 802.11a 20 MHz, MIMO, Channel 42, Average

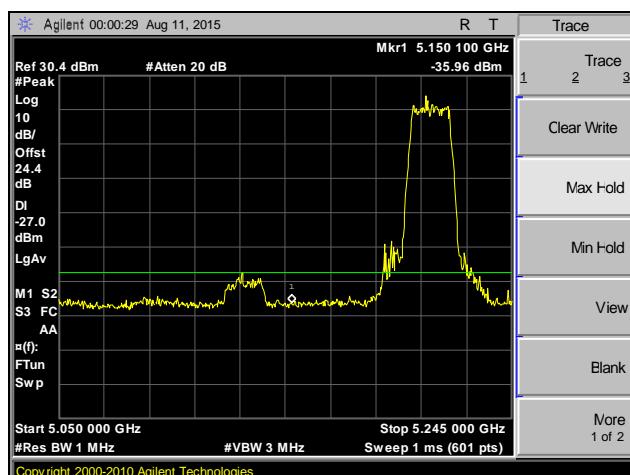


Plot 107. Band Edge, 802.11a 20 MHz, MIMO, Channel 42, Peak

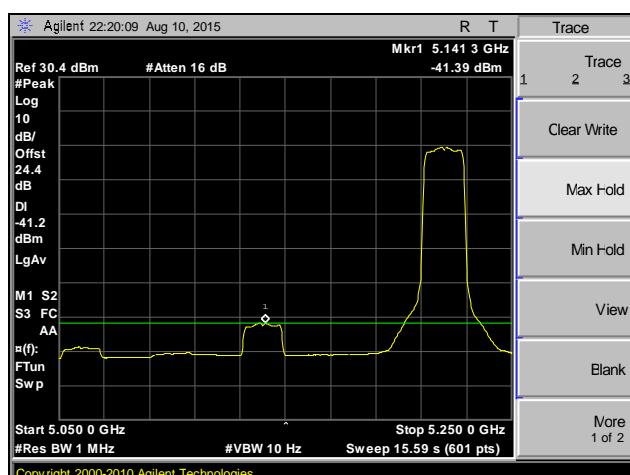


Plot 108. Band Edge, 802.11a 20 MHz, MIMO, Channel 44, Average

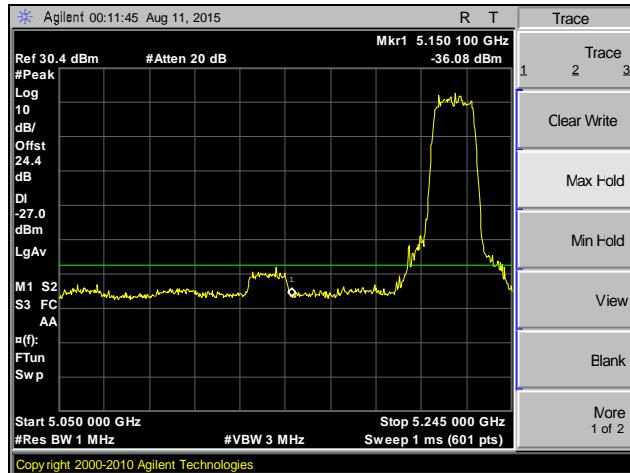


Plot 109. Band Edge, 802.11a 20 MHz, MIMO, Channel 44, Peak

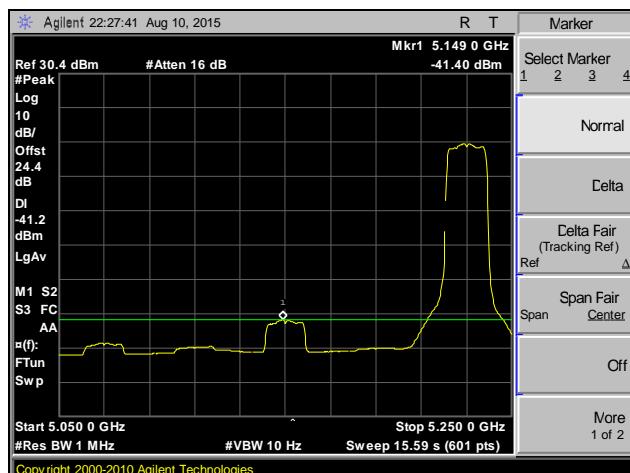


Plot 110. Band Edge, 802.11a 20 MHz, MIMO, Channel 46, Average

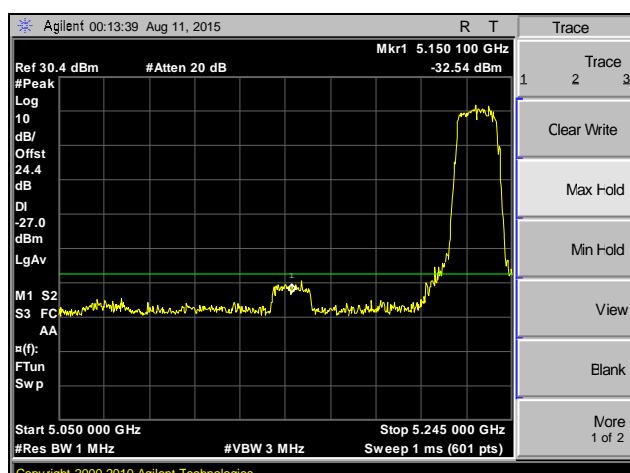

Plot 111. Band Edge, 802.11a 20 MHz, MIMO, Channel 46, Peak

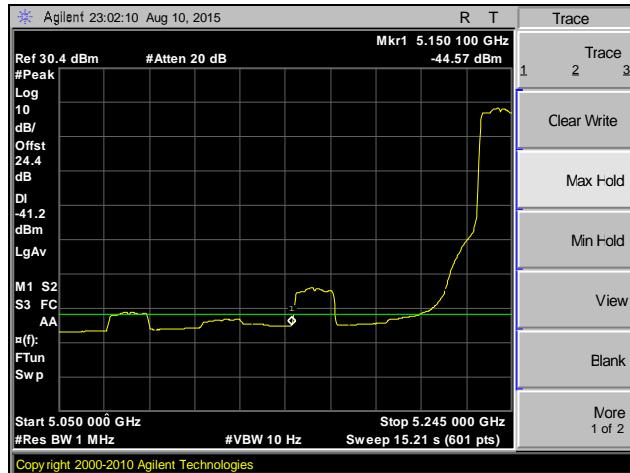


Plot 112. Band Edge, 802.11a 20 MHz, MIMO, Channel 48, Average

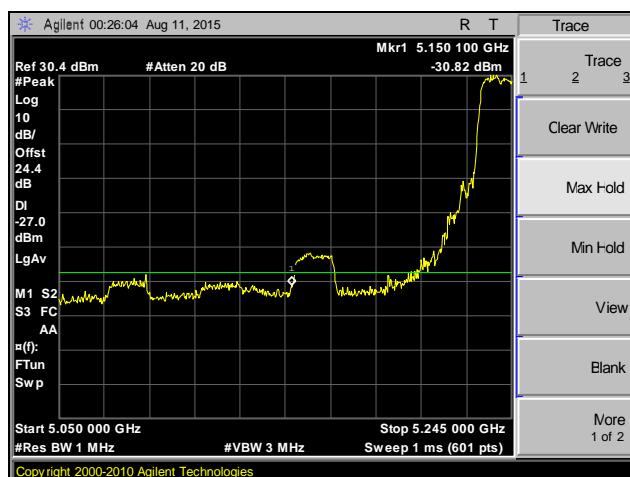

Plot 113. Band Edge, 802.11a 20 MHz, MIMO, Channel 48, Peak


Band Edge, 802.11a 20 MHz, SISO

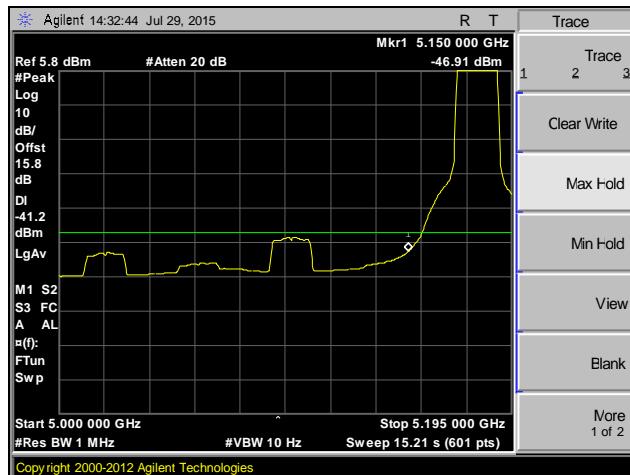


Plot 114. Band Edge, 802.11a 20 MHz, SISO, Channel 36, Average




Plot 115. Band Edge, 802.11a 20 MHz, SISO, Channel 36, Peak

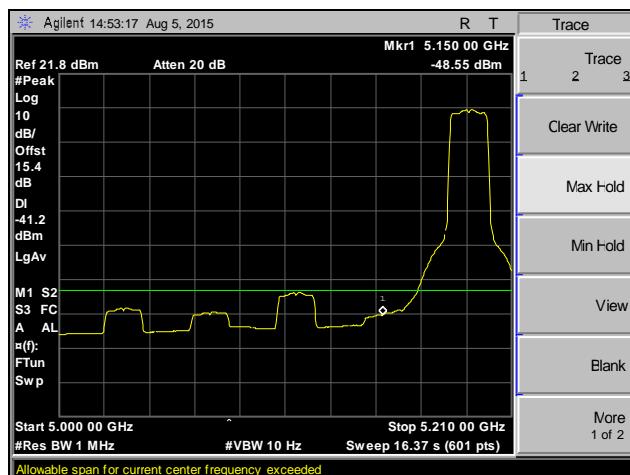


Plot 116. Band Edge, 802.11a 20 MHz, SISO, Channel 38, Average

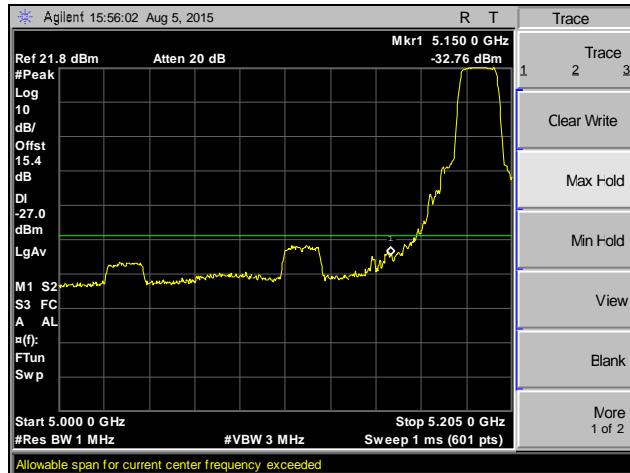


Plot 117. Band Edge, 802.11a 20 MHz, SISO, Channel 38, Peak

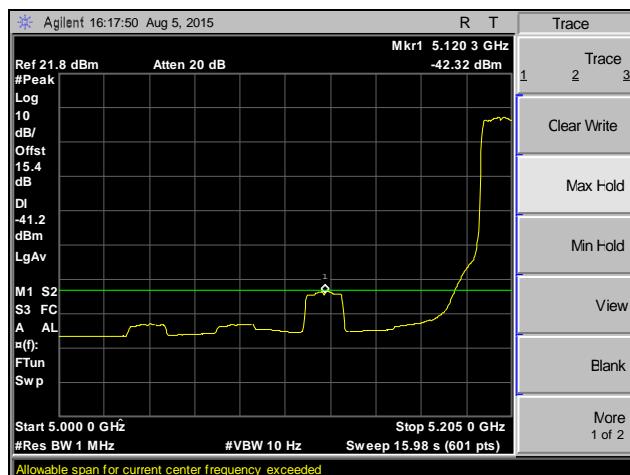


Plot 118. Band Edge, 802.11a 20 MHz, SISO, Channel 40, Average

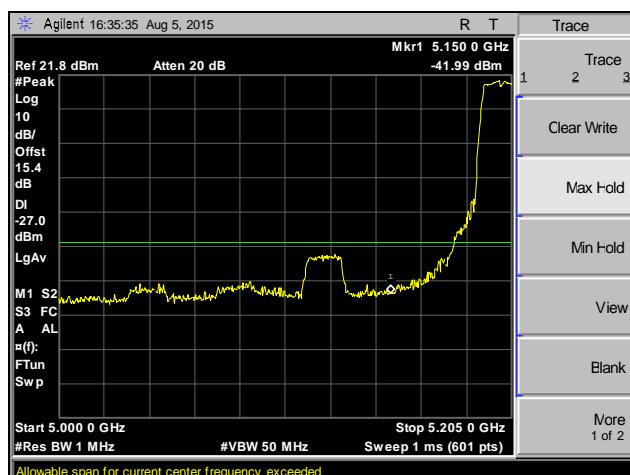


Plot 119. Band Edge, 802.11a 20 MHz, SISO, Channel 40, Peak

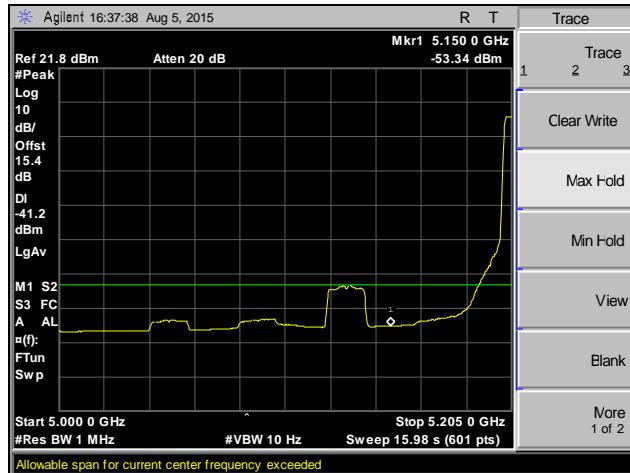


Plot 120. Band Edge, 802.11a 20 MHz, SISO, Channel 42, Average

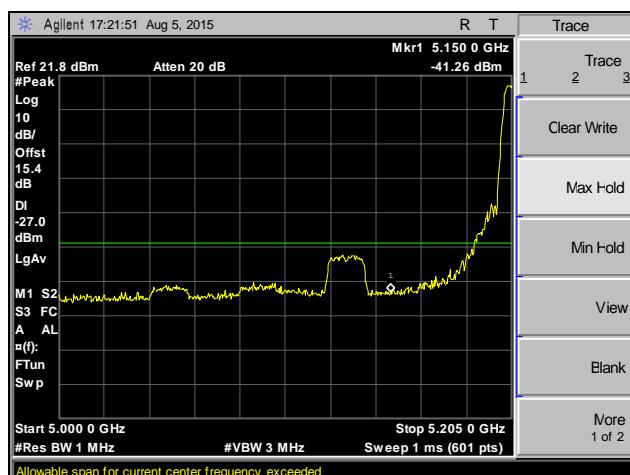


Plot 121. Band Edge, 802.11a 20 MHz, SISO, Channel 42, Peak

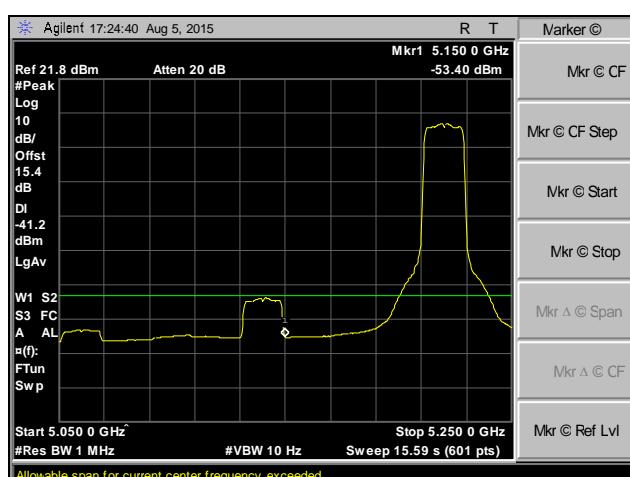


Plot 122. Band Edge, 802.11a 20 MHz, SISO, Channel 44, Average

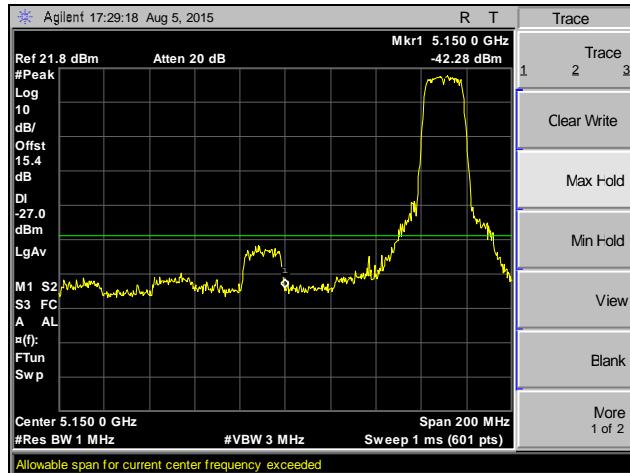


Plot 123. Band Edge, 802.11a 20 MHz, SISO, Channel 44, Peak

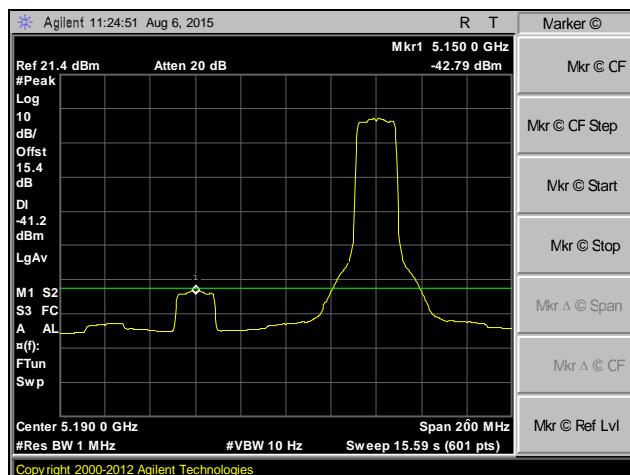


Plot 124. Band Edge, 802.11a 20 MHz, SISO, Channel 46, Average

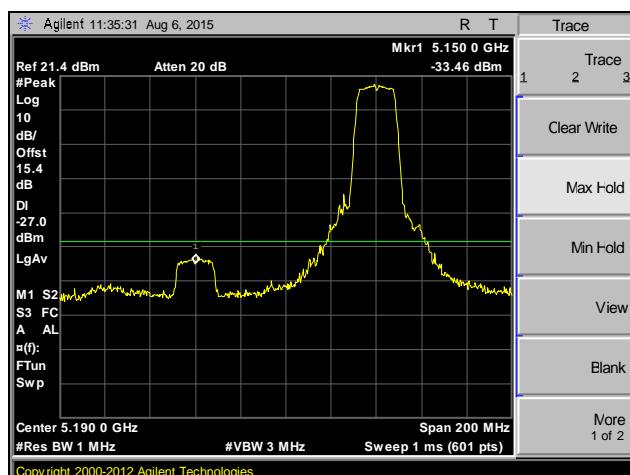

Plot 125. Band Edge, 802.11a 20 MHz, SISO, Channel 46, Peak

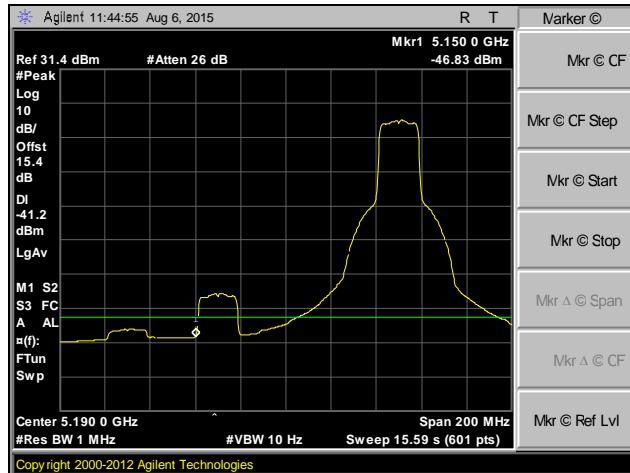


Plot 126. Band Edge, 802.11a 20 MHz, SISO, Channel 48, Average

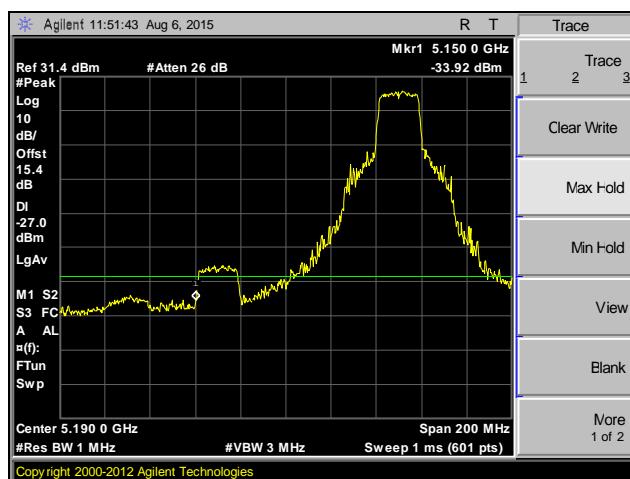


Plot 127. Band Edge, 802.11a 20 MHz, SISO, Channel 48, Peak


Band Edge, 802.11ac 20 MHz, MIMO

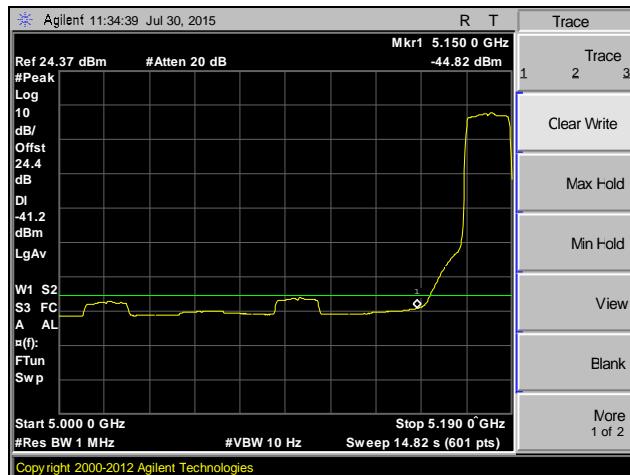


Plot 128. Band Edge, 802.11ac 20 MHz, MIMO, Channel 36, Average

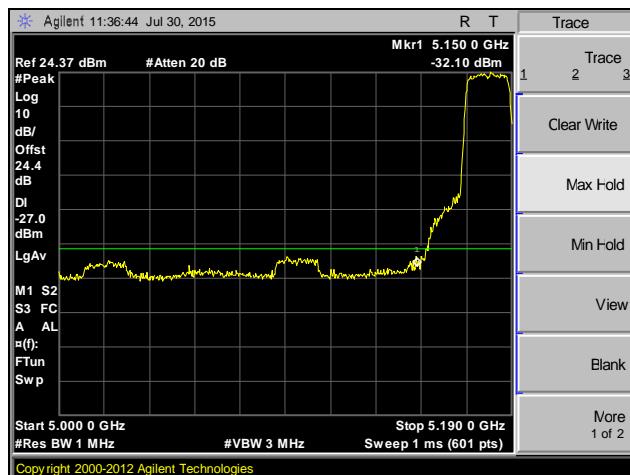


Plot 129. Band Edge, 802.11ac 20 MHz, MIMO, Channel 36, Peak

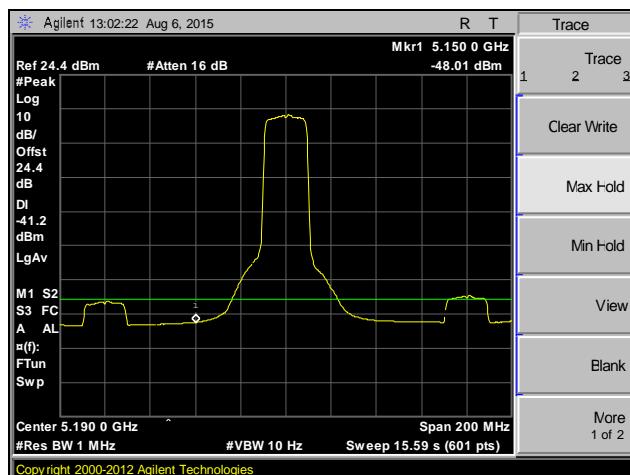


Plot 130. Band Edge, 802.11ac 20 MHz, MIMO, Channel 38, Average

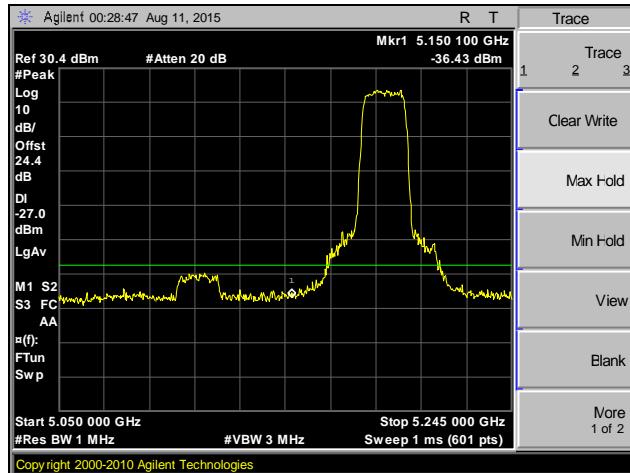


Plot 131. Band Edge, 802.11ac 20 MHz, MIMO, Channel 38, Peak

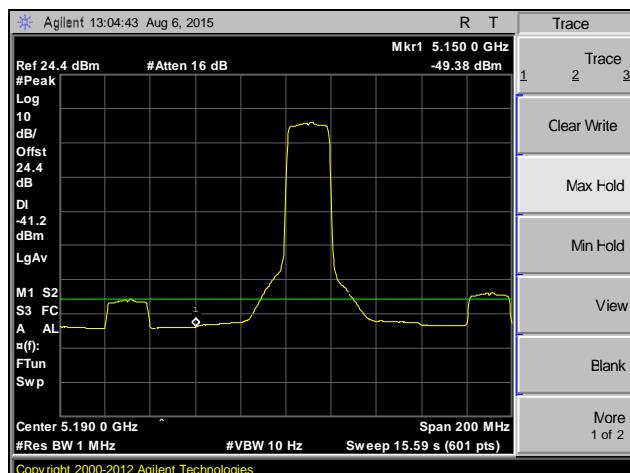


Plot 132. Band Edge, 802.11ac 20 MHz, MIMO, Channel 40, Average

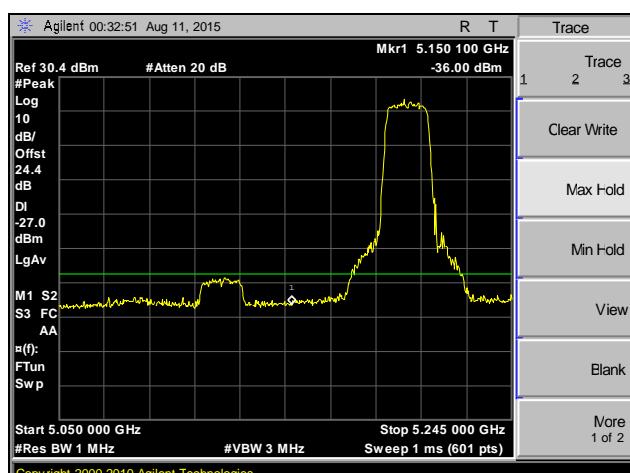


Plot 133. Band Edge, 802.11ac 20 MHz, MIMO, Channel 40, Peak

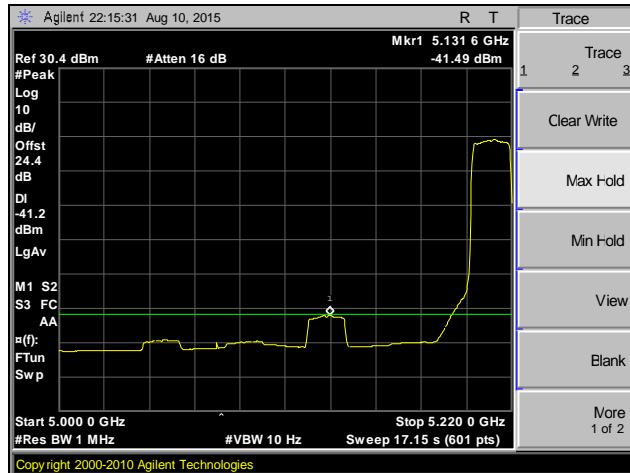


Plot 134. Band Edge, 802.11ac 20 MHz, MIMO, Channel 42, Average

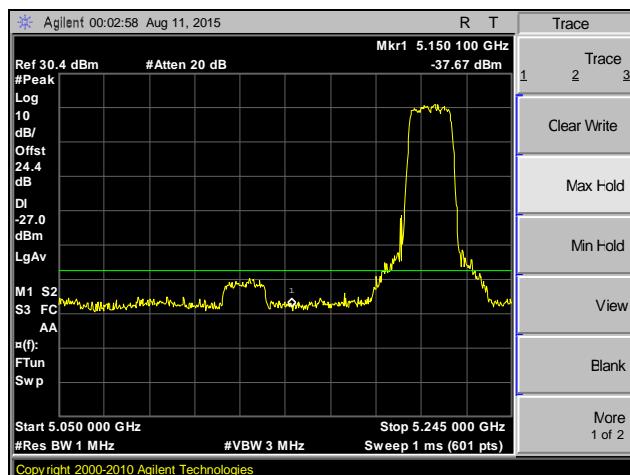


Plot 135. Band Edge, 802.11ac 20 MHz, MIMO, Channel 42, Peak

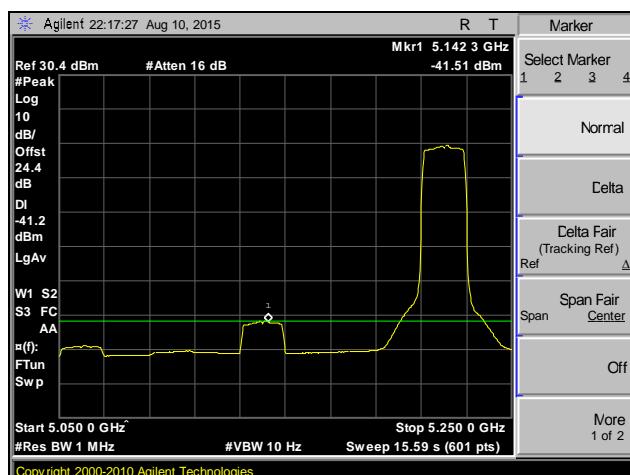


Plot 136. Band Edge, 802.11ac 20 MHz, MIMO, Channel 44, Average

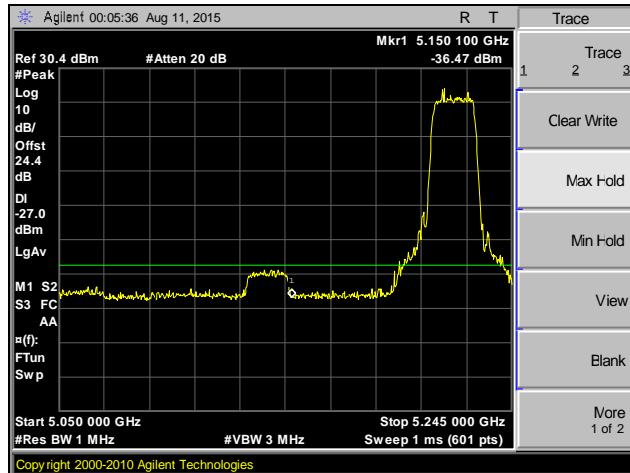


Plot 137. Band Edge, 802.11ac 20 MHz, MIMO, Channel 44, Peak

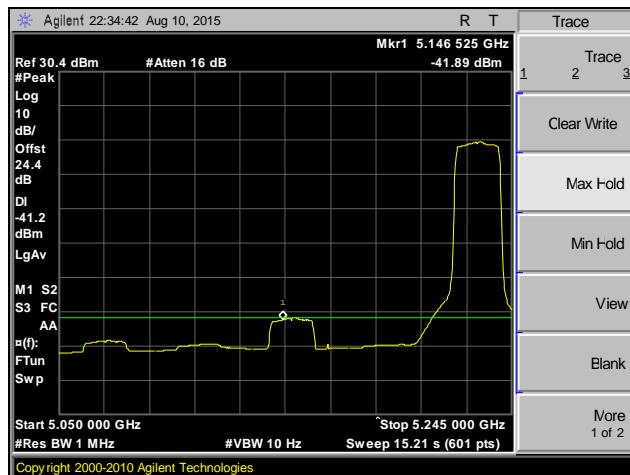


Plot 138. Band Edge, 802.11ac 20 MHz, MIMO, Channel 46, Average

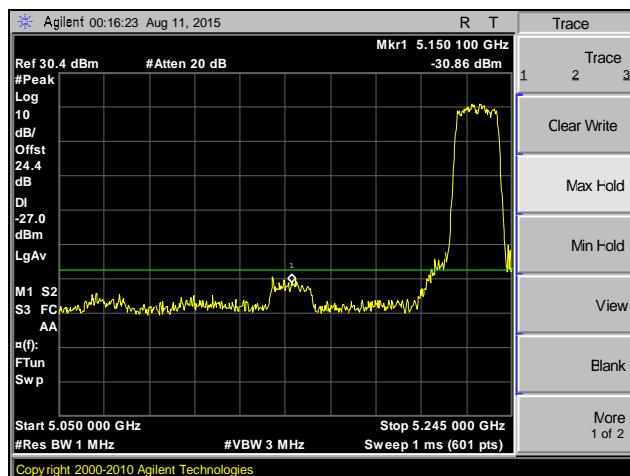

Plot 139. Band Edge, 802.11ac 20 MHz, MIMO, Channel 46, Peak

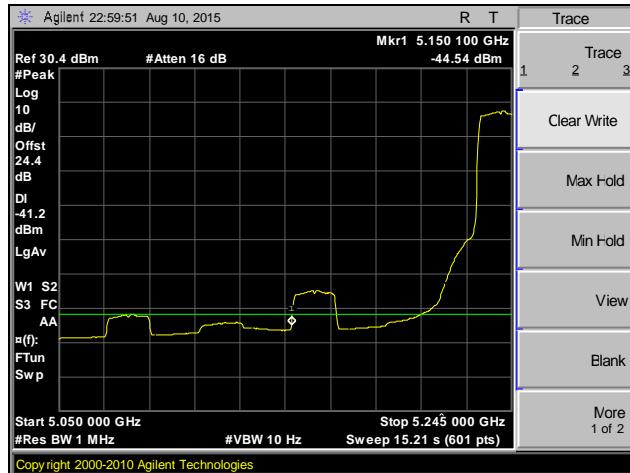


Plot 140. Band Edge, 802.11ac 20 MHz, MIMO, Channel 48, Average

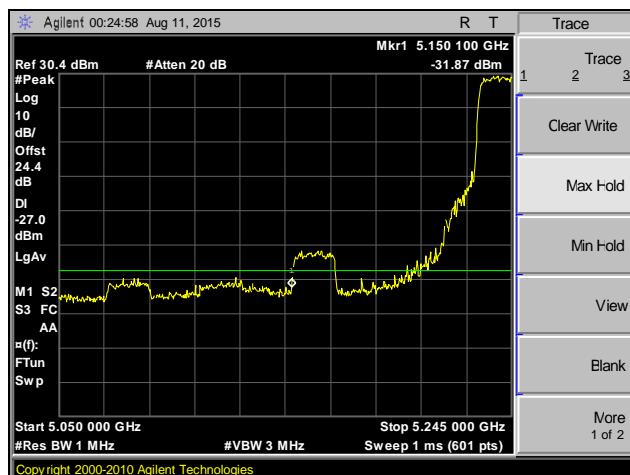

Plot 141. Band Edge, 802.11ac 20 MHz, MIMO, Channel 48, Peak


Band Edge, 802.11ac 20 MHz, SISO

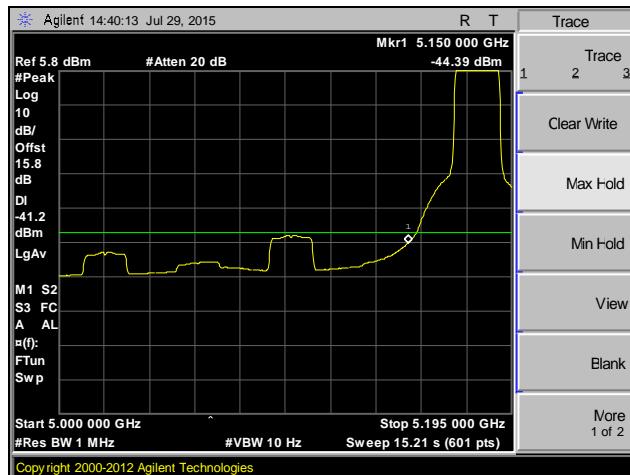


Plot 142. Band Edge, 802.11ac 20 MHz, SISO, Channel 36, Average




Plot 143. Band Edge, 802.11ac 20 MHz, SISO, Channel 36, Peak

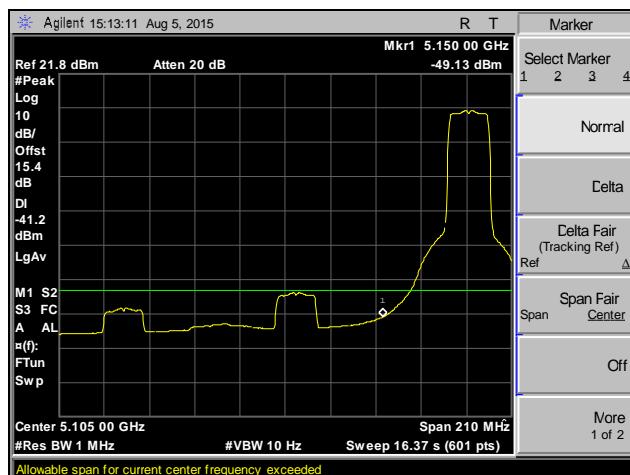

Plot 144. Band Edge, 802.11ac 20 MHz, SISO, Channel 38, Average

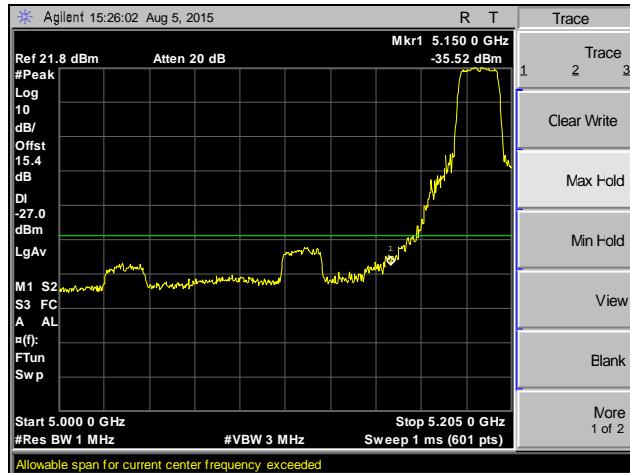


Plot 145. Band Edge, 802.11ac 20 MHz, SISO, Channel 38, Peak

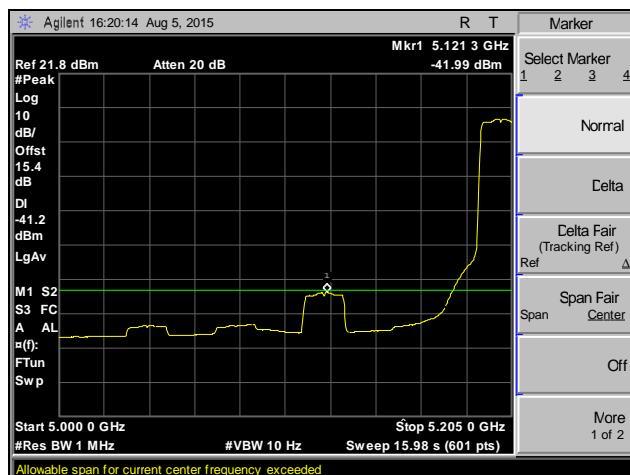


Plot 146. Band Edge, 802.11ac 20 MHz, SISO, Channel 40, Average




Plot 147. Band Edge, 802.11ac 20 MHz, SISO, Channel 40, Peak

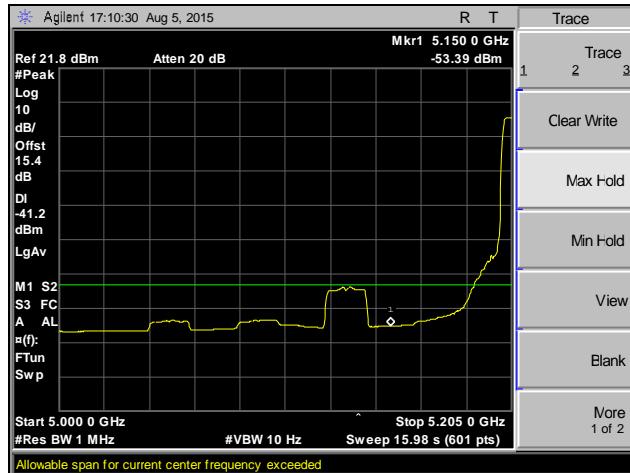


Plot 148. Band Edge, 802.11ac 20 MHz, SISO, Channel 42, Average

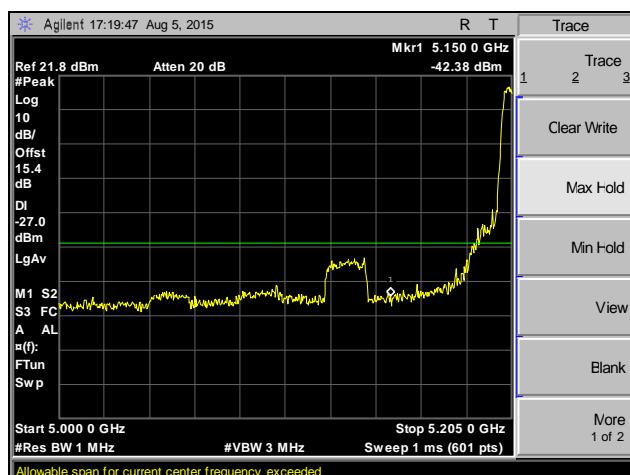


Plot 149. Band Edge, 802.11ac 20 MHz, SISO, Channel 42, Peak

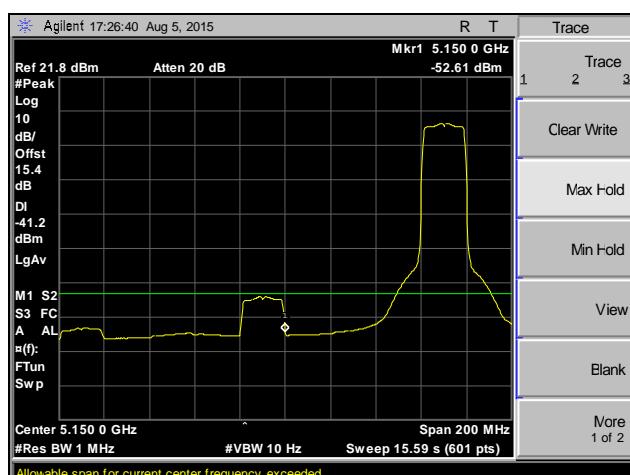


Plot 150. Band Edge, 802.11ac 20 MHz, SISO, Channel 44, Average

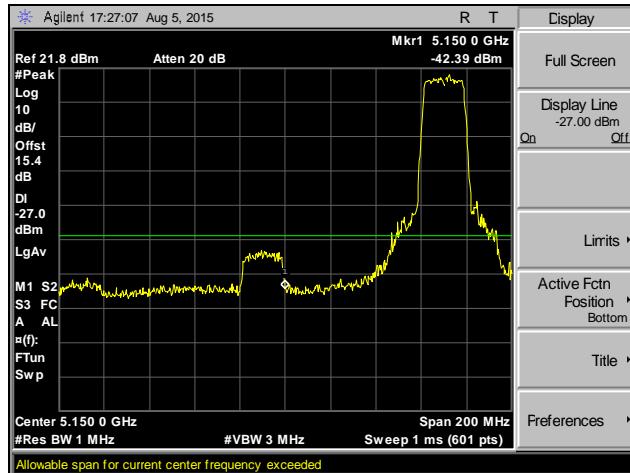


Plot 151. Band Edge, 802.11ac 20 MHz, SISO, Channel 44, Peak

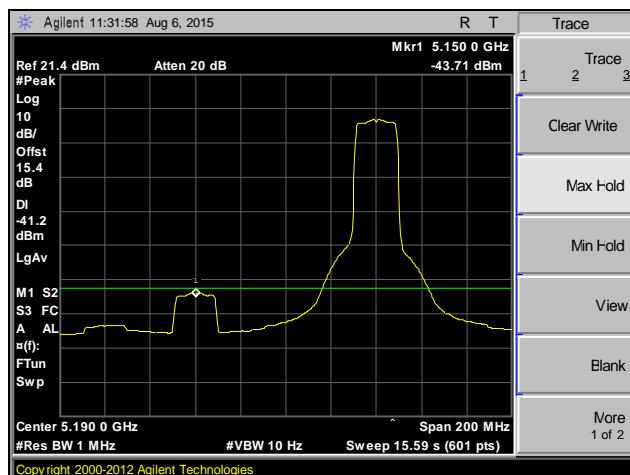


Plot 152. Band Edge, 802.11ac 20 MHz, SISO, Channel 46, Average

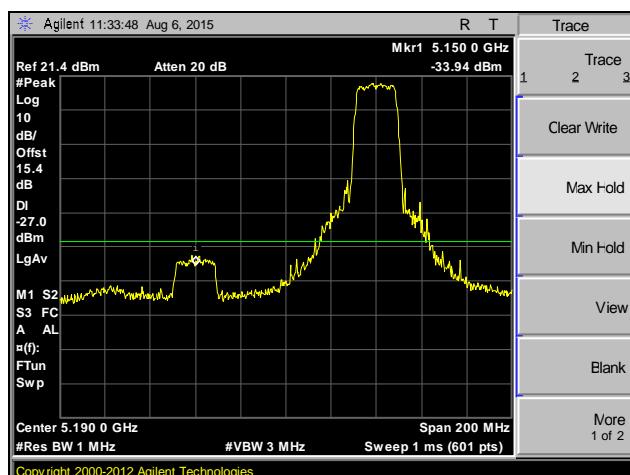

Plot 153. Band Edge, 802.11ac 20 MHz, SISO, Channel 46, Peak

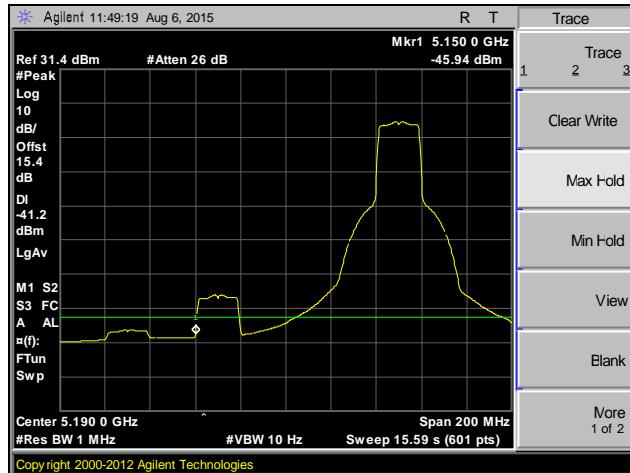


Plot 154. Band Edge, 802.11ac 20 MHz, SISO, Channel 48, Average

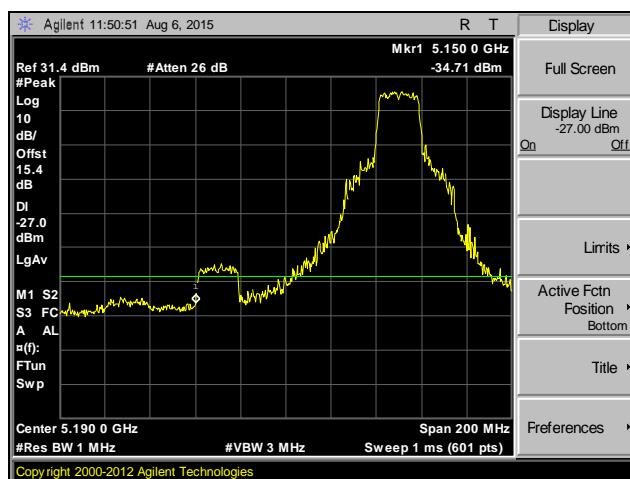


Plot 155. Band Edge, 802.11ac 20 MHz, SISO, Channel 48, Peak


Band Edge, 802.11ac 40 MHz, MIMO

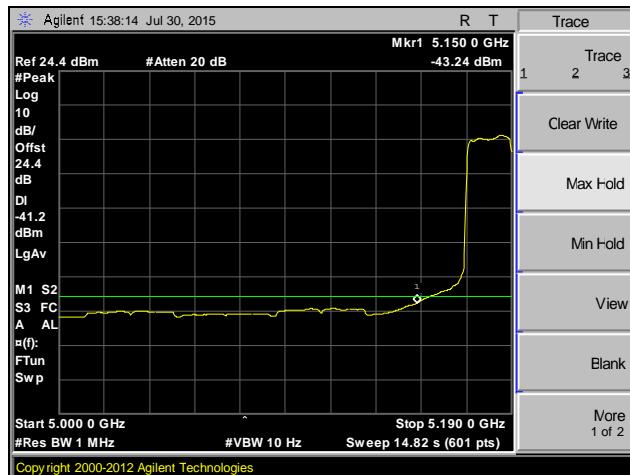


Plot 156. Band Edge, 802.11ac 40 MHz, MIMO, Channel 36, Average

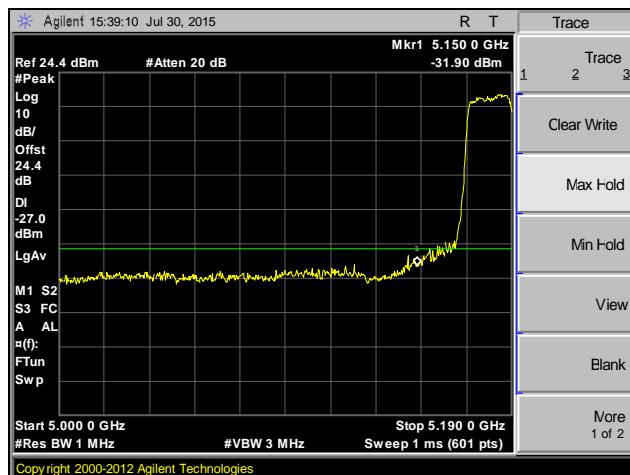

Plot 157. Band Edge, 802.11ac 40 MHz, MIMO, Channel 36, Peak

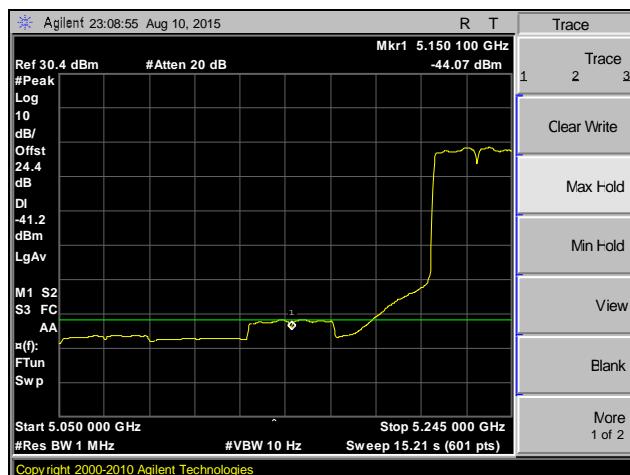


Plot 158. Band Edge, 802.11ac 40 MHz, MIMO, Channel 44, Average

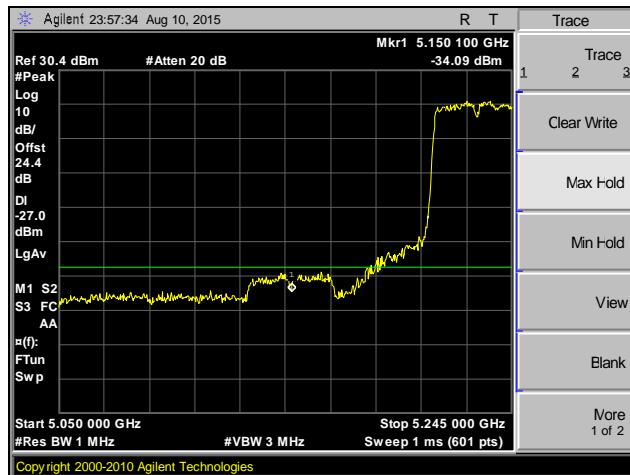

Plot 159. Band Edge, 802.11ac 40 MHz, MIMO, Channel 44, Peak


Band Edge, 802.11ac 40 MHz, SISO

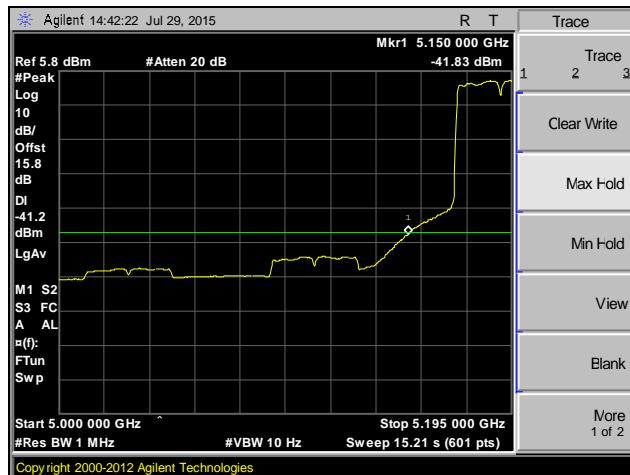


Plot 160. Band Edge, 802.11ac 40 MHz, SISO, Channel 36, Average



Plot 161. Band Edge, 802.11ac 40 MHz, SISO, Channel 36, Peak

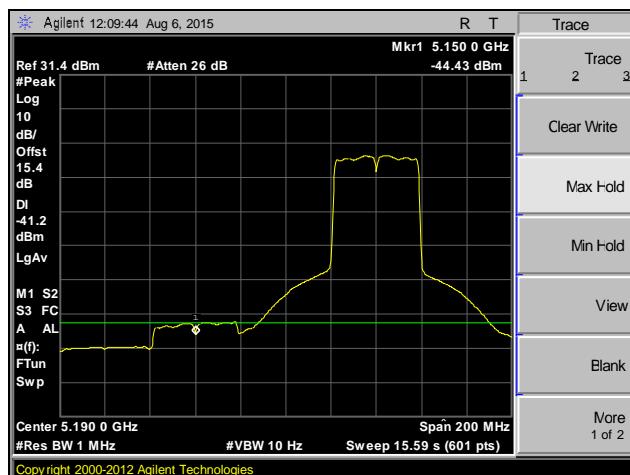


Plot 162. Band Edge, 802.11ac 40 MHz, SISO, Channel 44, Average

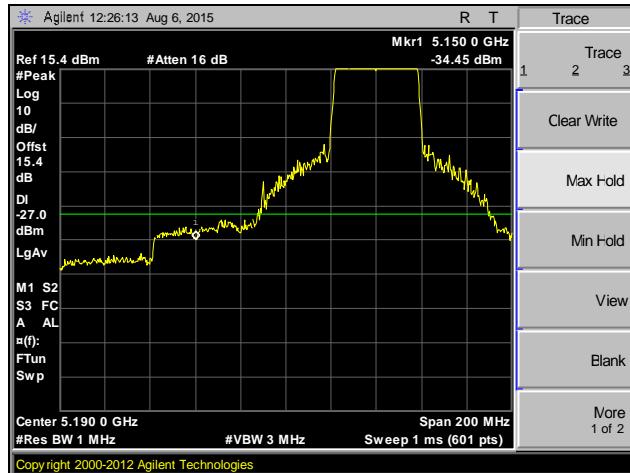


Plot 163. Band Edge, 802.11ac 40 MHz, SISO, Channel 44, Peak

Band Edge, 802.11ac 80 MHz, MIMO

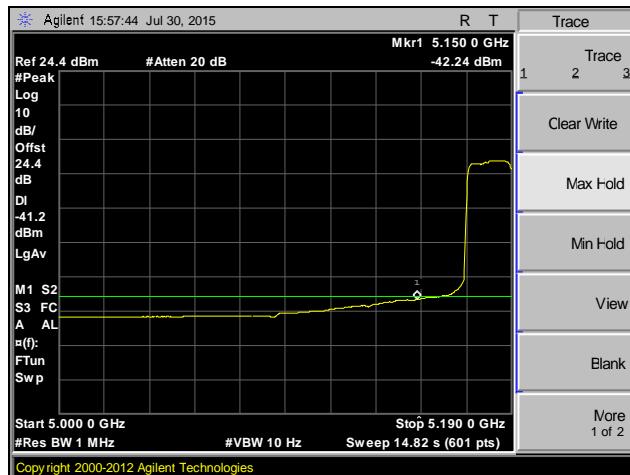


Plot 164. Band Edge, 802.11ac 80 MHz, MIMO, Channel 36, Average

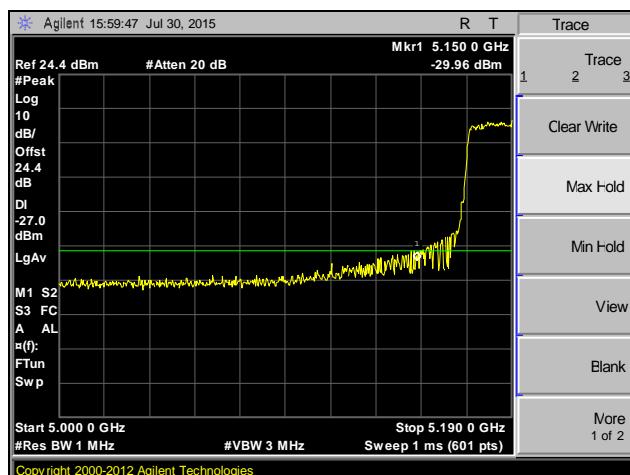


Plot 165. Band Edge, 802.11ac 80 MHz, MIMO, Channel 36, Peak

Band Edge, 802.11ac 80 MHz, SISO

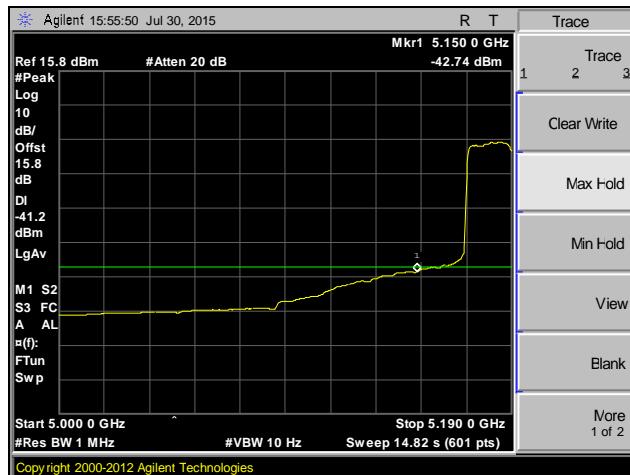


Plot 166. Band Edge, 802.11ac 80 MHz, SISO, Channel 36, Average

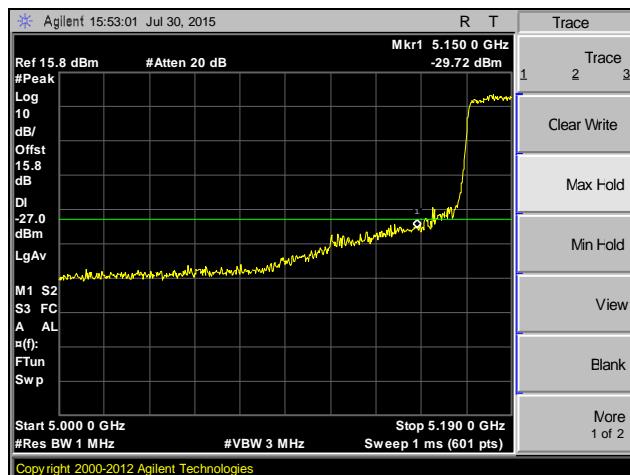


Plot 167. Band Edge, 802.11ac 80 MHz, SISO, Channel 36, Peak


Band Edge, 802.11n 20 MHz, MIMO

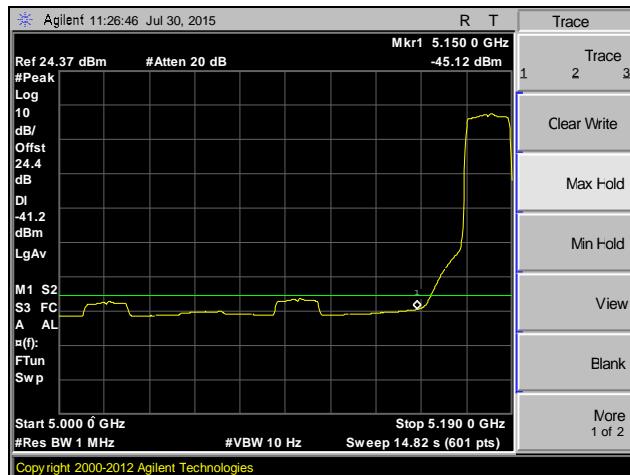


Plot 168. Band Edge, 802.11n 20 MHz, MIMO, Channel 36, Average

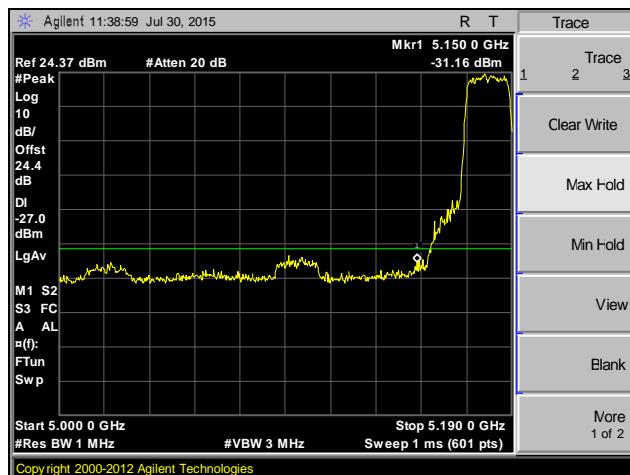


Plot 169. Band Edge, 802.11n 20 MHz, MIMO, Channel 36, Peak

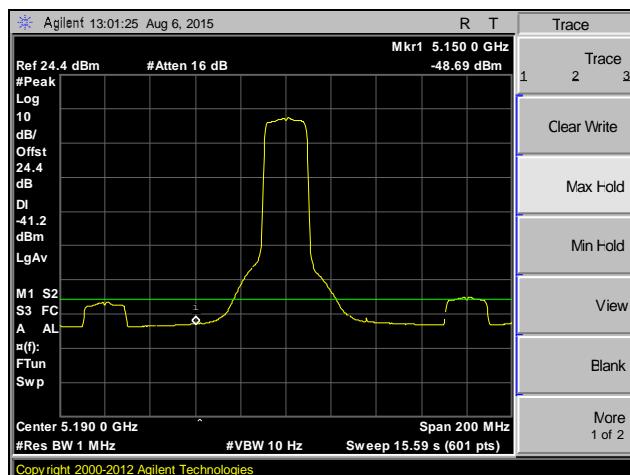


Plot 170. Band Edge, 802.11n 20 MHz, MIMO, Channel 38, Average

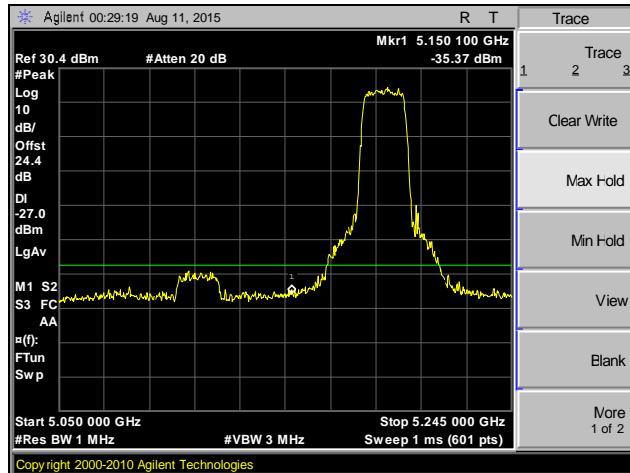


Plot 171. Band Edge, 802.11n 20 MHz, MIMO, Channel 38, Peak

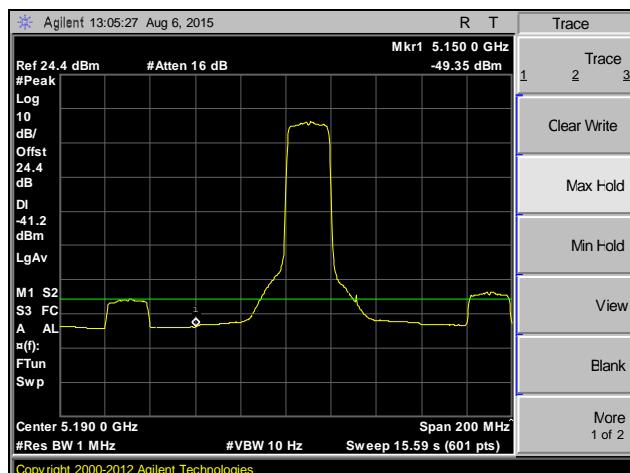


Plot 172. Band Edge, 802.11n 20 MHz, MIMO, Channel 40, Average

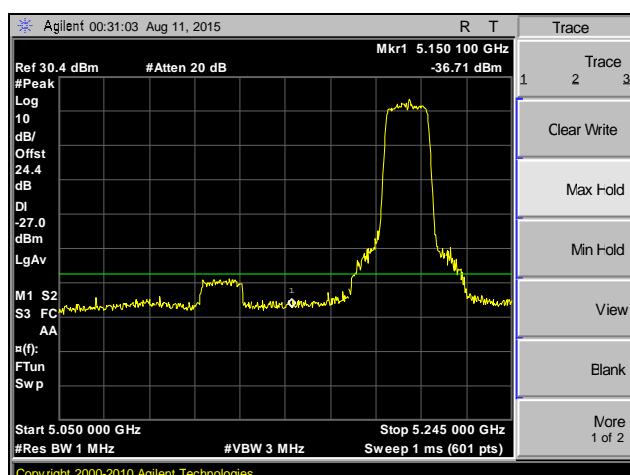


Plot 173. Band Edge, 802.11n 20 MHz, MIMO, Channel 40, Peak

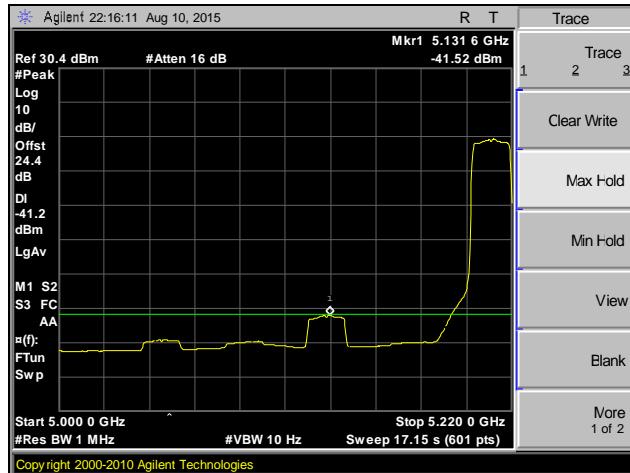


Plot 174. Band Edge, 802.11n 20 MHz, MIMO, Channel 42, Average

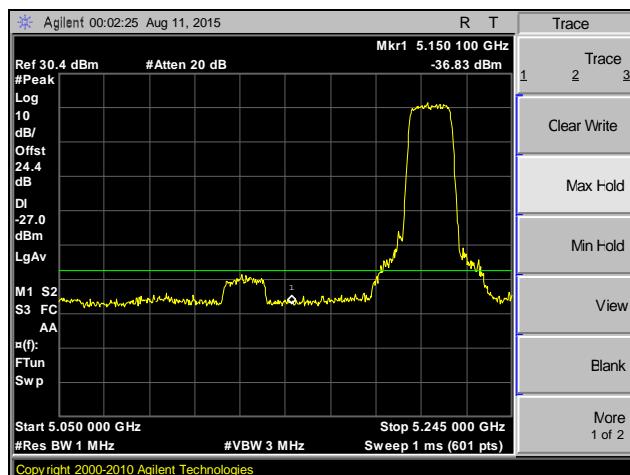


Plot 175. Band Edge, 802.11n 20 MHz, MIMO, Channel 42, Peak

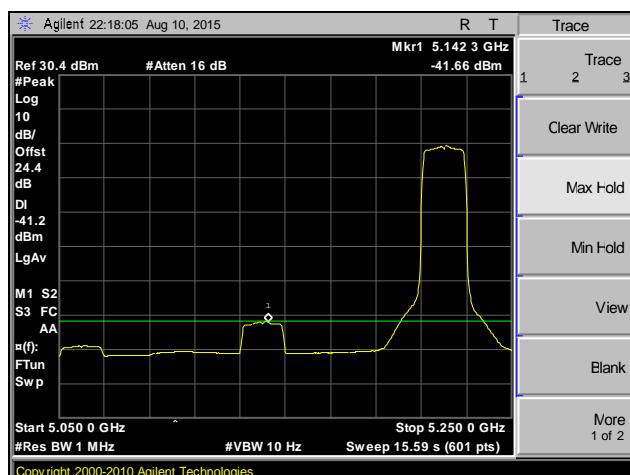


Plot 176. Band Edge, 802.11n 20 MHz, MIMO, Channel 44, Average

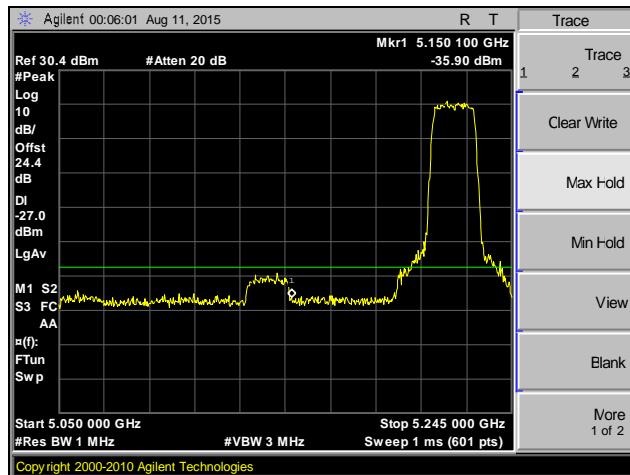


Plot 177. Band Edge, 802.11n 20 MHz, MIMO, Channel 44, Peak

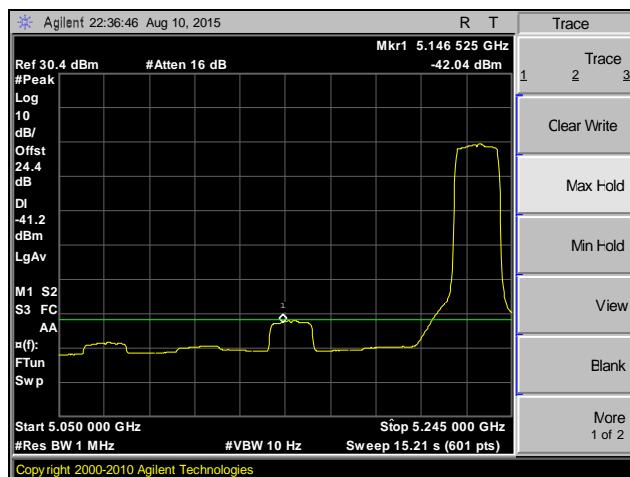


Plot 178. Band Edge, 802.11n 20 MHz, MIMO, Channel 46, Average

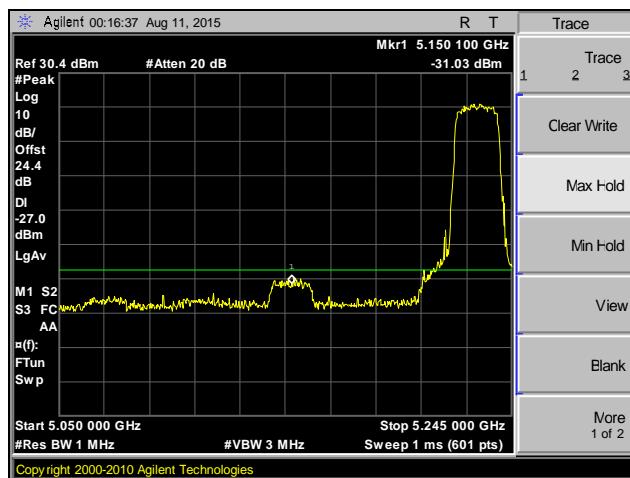

Plot 179. Band Edge, 802.11n 20 MHz, MIMO, Channel 46, Peak

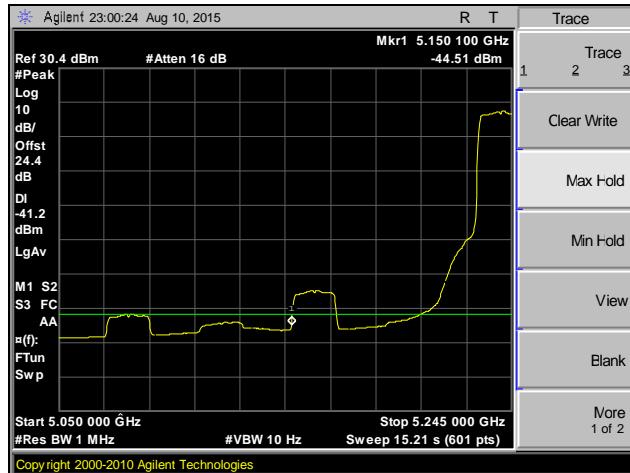


Plot 180. Band Edge, 802.11n 20 MHz, MIMO, Channel 48, Average

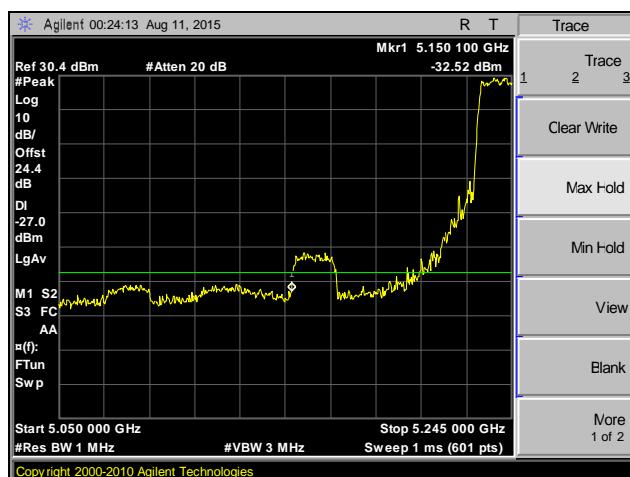

Plot 181. Band Edge, 802.11n 20 MHz, MIMO, Channel 48, Peak


Band Edge, 802.11n 20 MHz, SISO

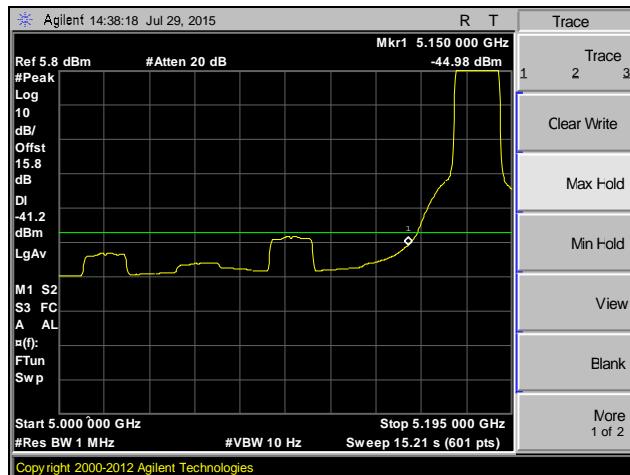

Plot 182. Band Edge, 802.11n 20 MHz, SISO, Channel 36, Average




Plot 183. Band Edge, 802.11n 20 MHz, SISO, Channel 36, Peak

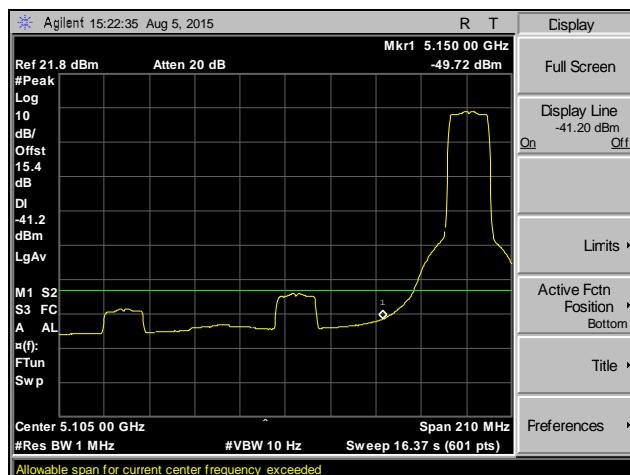


Plot 184. Band Edge, 802.11n 20 MHz, SISO, Channel 38, Average




Plot 185. Band Edge, 802.11n 20 MHz, SISO, Channel 38, Peak

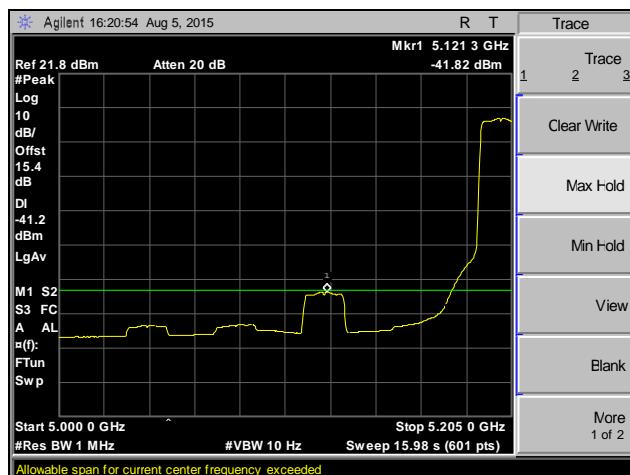


Plot 186. Band Edge, 802.11n 20 MHz, SISO, Channel 40, Average

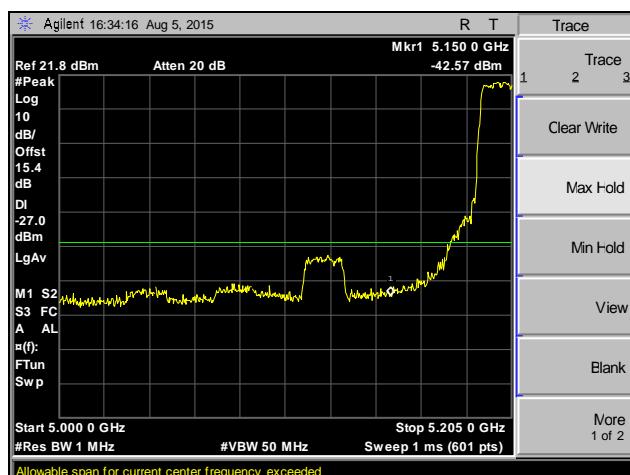


Plot 187. Band Edge, 802.11n 20 MHz, SISO, Channel 40, Peak

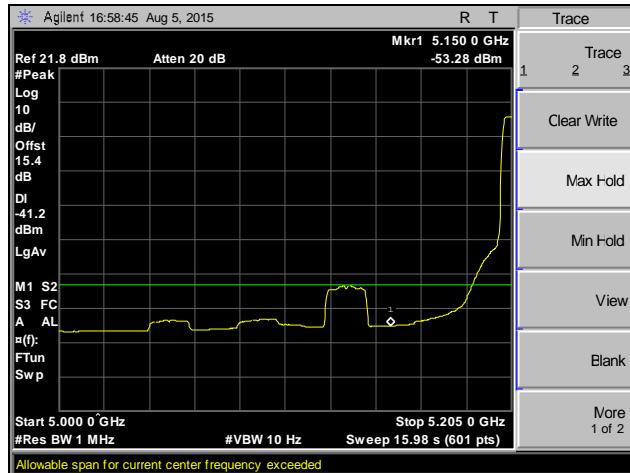


Plot 188. Band Edge, 802.11n 20 MHz, SISO, Channel 42, Average

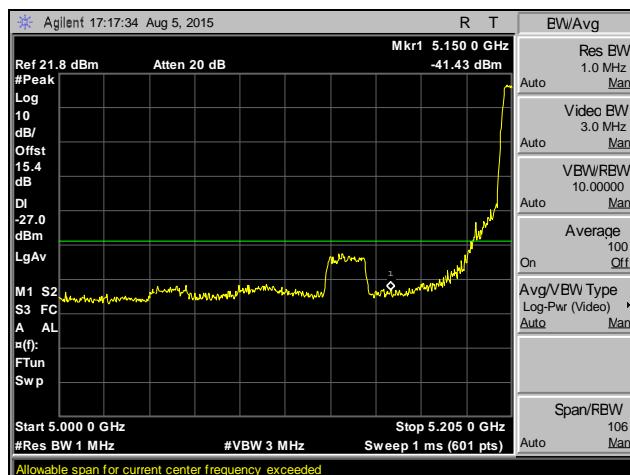


Plot 189. Band Edge, 802.11n 20 MHz, SISO, Channel 42, Peak

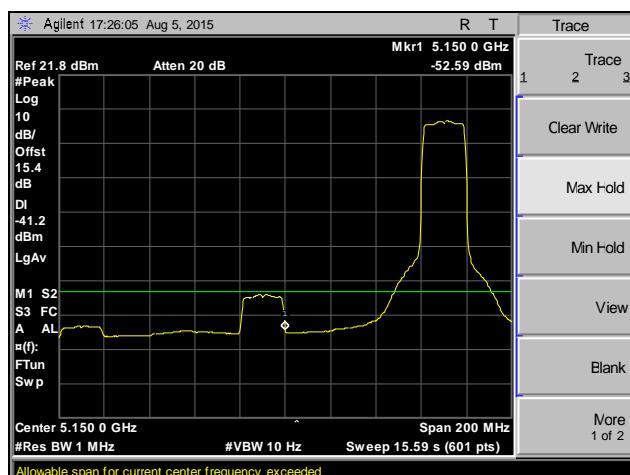


Plot 190. Band Edge, 802.11n 20 MHz, SISO, Channel 44, Average

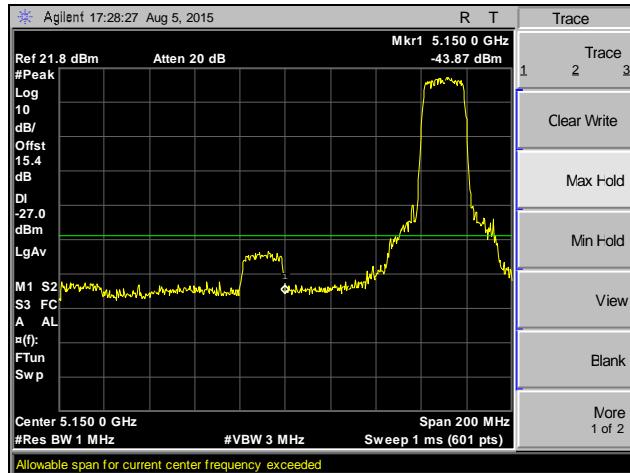


Plot 191. Band Edge, 802.11n 20 MHz, SISO, Channel 44, Peak

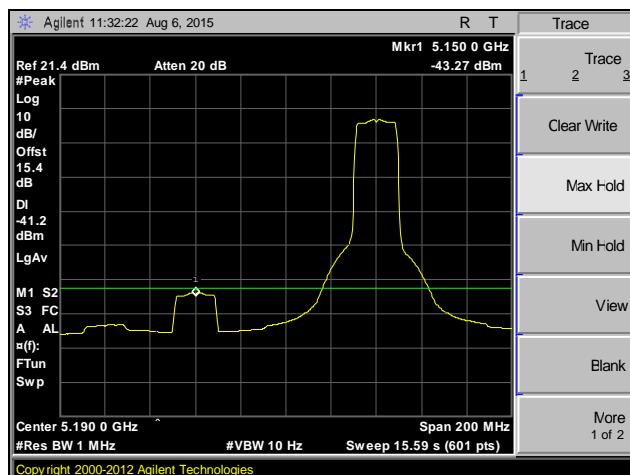


Plot 192. Band Edge, 802.11n 20 MHz, SISO, Channel 46, Average

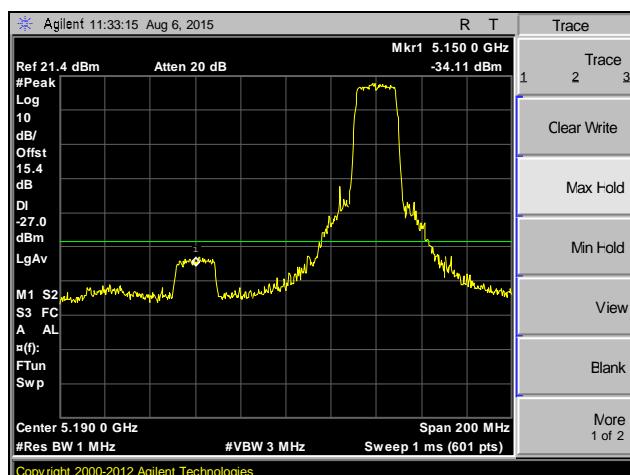

Plot 193. Band Edge, 802.11n 20 MHz, SISO, Channel 46, Peak

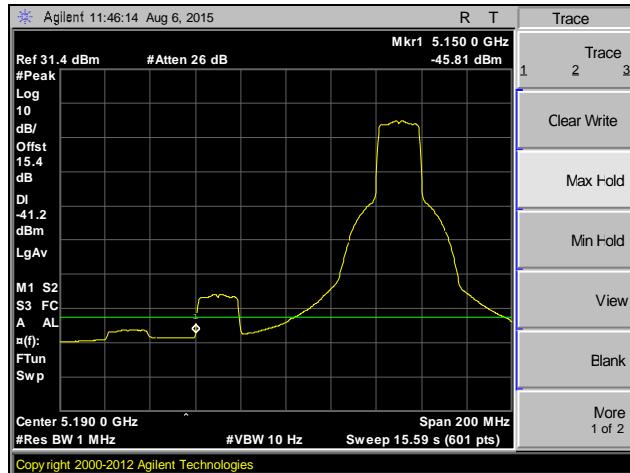


Plot 194. Band Edge, 802.11n 20 MHz, SISO, Channel 48, Average

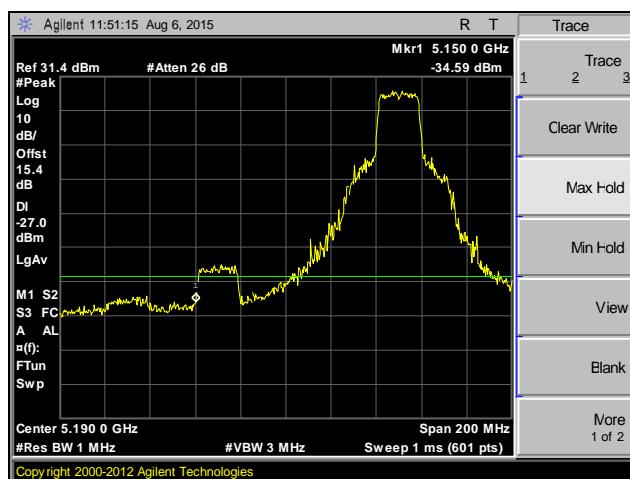


Plot 195. Band Edge, 802.11n 20 MHz, SISO, Channel 48, Peak


Band Edge, 802.11n 40 MHz, MIMO

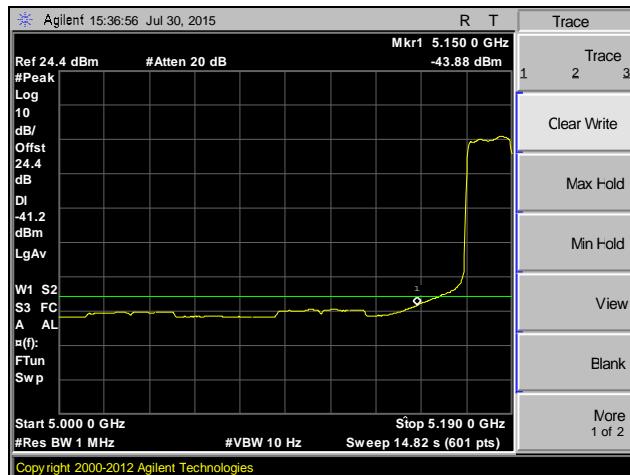


Plot 196. Band Edge, 802.11n 40 MHz, MIMO, Channel 36, Average

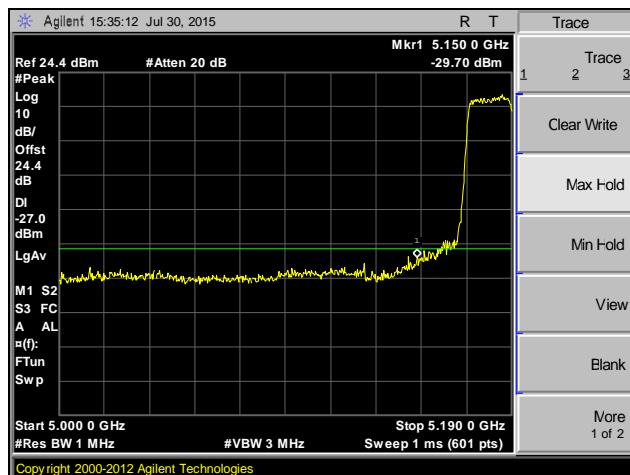

Plot 197. Band Edge, 802.11n 40 MHz, MIMO, Channel 36, Peak

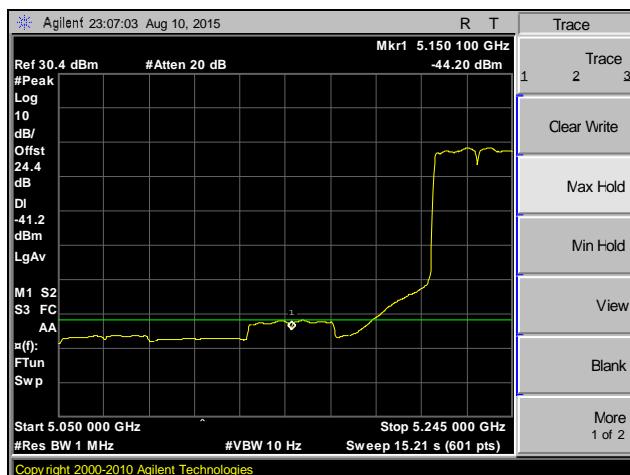


Plot 198. Band Edge, 802.11n 40 MHz, MIMO, Channel 44, Average

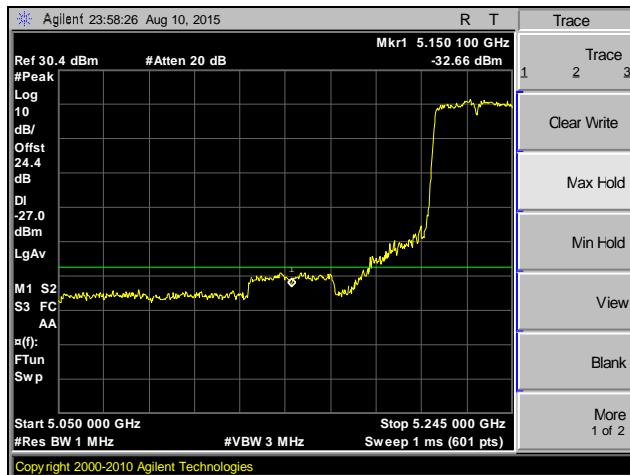

Plot 199. Band Edge, 802.11n 40 MHz, MIMO, Channel 44, Peak


Band Edge, 802.11n 40 MHz, SISO

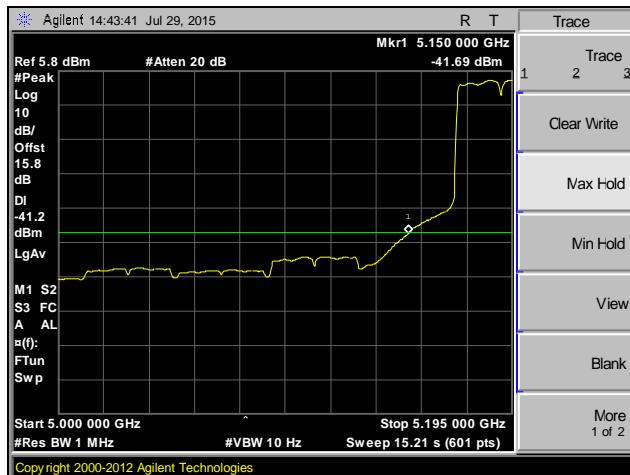


Plot 200. Band Edge, 802.11n 40 MHz, SISO, Channel 36, Average




Plot 201. Band Edge, 802.11n 40 MHz, SISO, Channel 36, Peak

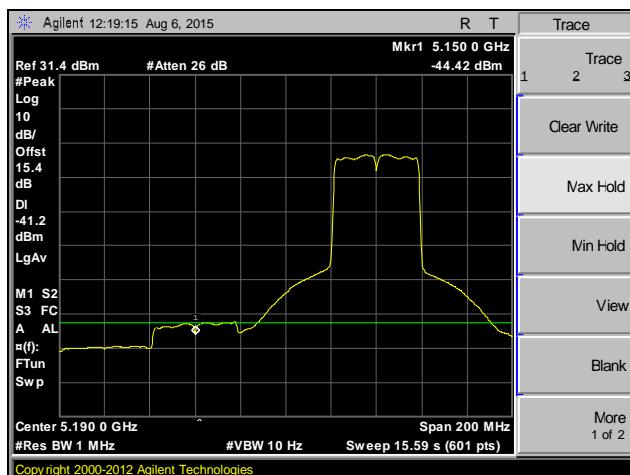

Plot 202. Band Edge, 802.11n 40 MHz, SISO, Channel 44, Average

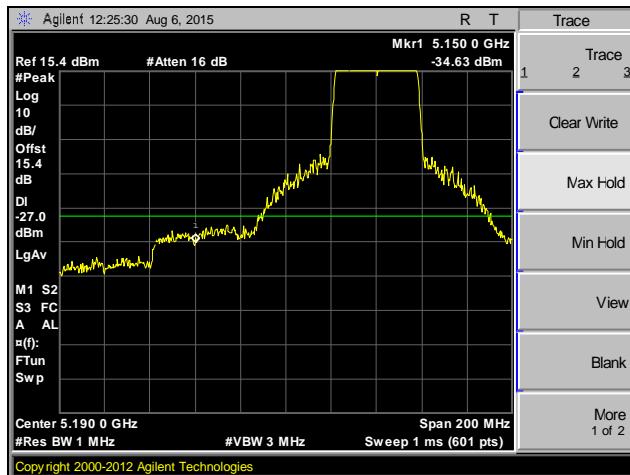

Plot 203. Band Edge, 802.11n 40 MHz, SISO, Channel 44, Peak

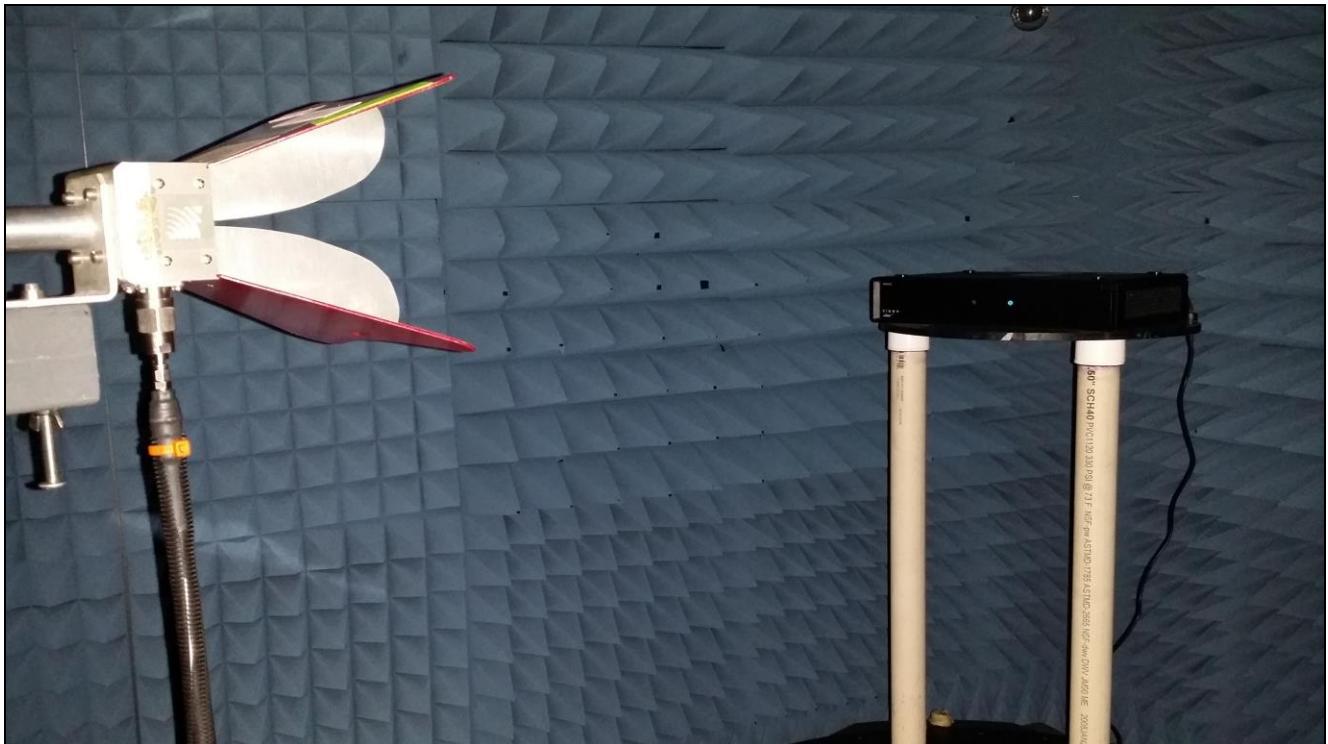

Photograph 1. Radiated Spurious Cabinet Emissions, Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(b)(6) Conducted Emissions

Test Requirement(s): § 15.407 (b)(6): Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

§ 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 – 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 16. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure:

The EUT was placed on a non-metallic table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a $50 \Omega/50 \mu\text{H}$ Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. Scans were performed with the transmitter on.

Test Results:

The EUT was compliant with requirements of this section.

Test Engineer(s):


Surinder Singh

Test Date(s):

08/20/15

Frequency (MHz)	Uncorrected Meter Reading (dB μ V) QP	Cable Loss (dB)	Corrected Measurement (dB μ V) QP	Limit (dB μ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB μ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB μ V) AVG	Limit (dB μ V) AVG	Margin (dB) AVG
0.16	54.63	0	54.63	65.46	-10.83	21.28	0	21.28	55.46	-34.18
0.395	48.23	0	48.23	57.96	-9.73	14.79	0	14.79	47.96	-33.17
1.78	37.16	0	37.16	56	-18.84	12.49	0	12.49	46	-33.51
3.27	38.16	0	38.16	56	-17.84	14.59	0	14.59	46	-31.41
8.64	25.14	0.17	25.31	60	-34.69	16.49	0.17	16.66	50	-33.34
26.46	19.64	0.17	19.81	60	-40.19	8.16	0.17	8.33	50	-41.67


Table 17. Conducted Emissions, Test Results, Phase Line

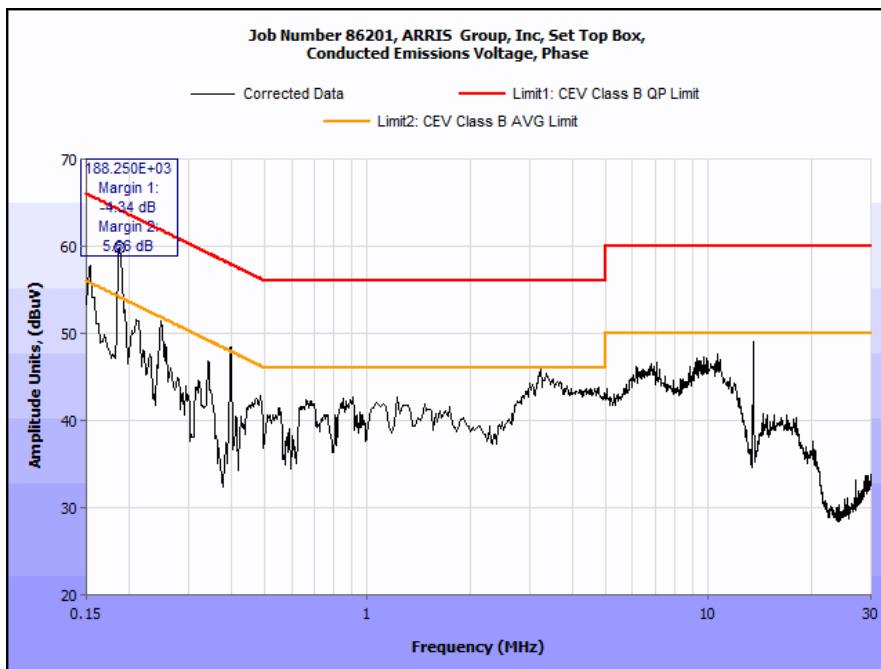

Plot 204. Conducted Emissions, Phase Line

Frequency (MHz)	Uncorrected Meter Reading (dB μ V) QP	Cable Loss (dB)	Corrected Measurement (dB μ V) QP	Limit (dB μ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB μ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB μ V) AVG	Limit (dB μ V) AVG	Margin (dB) AVG
0.17	52.14	0	52.14	64.96	-12.82	20.19	0	20.19	54.96	-34.77
0.3	43.46	0	43.46	60.24	-16.78	19.84	0	19.84	50.24	-30.4
0.38	38.13	0	38.13	58.28	-20.15	16.34	0	16.34	48.28	-31.94
1.67	32.16	0	32.16	56	-23.84	12.54	0	12.54	46	-33.46
3.15	36.43	0	36.43	56	-19.57	23.64	0	23.64	46	-22.36
16.73	33.16	0	33.16	60	-26.84	12.56	0	12.56	50	-37.44

Table 18. Conducted Emissions, Test Results, Neutral Line

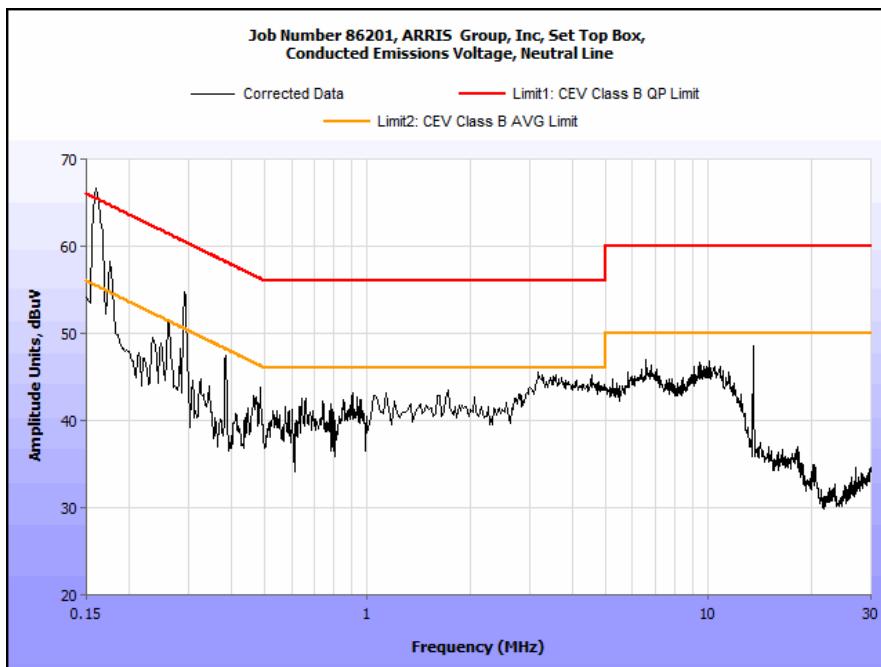

Plot 205. Conducted Emissions, Neutral Line



Photograph 2. Conducted Emissions, Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f) RF Exposure

Test Requirement(s):

§15.407(f): U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5150-5250 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Output Power = 25.36 dBm

Antenna Gain = 9.6 dBi

Power density is equal to 0.63 mW/cm².

At a distance of 20 cm.

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4870	THERM./CLOCK/HUMIDITY MONITOR	CONTROL COMPANY	06-662-4, FB70258	3/14/2014	3/14/2016
1T4829	SPECTRUM ANALYZER	AGILENT	E4407B	9/30/2014	3/30/2016
1T4818	COMB GENERATOR	COM-POWER	CGO-520	SEE NOTE	
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	7/29/2014	1/29/2016
1T4505	TEMPERATURE CHAMBER	TEST EQUITY	115	2/11/2015	2/11/2016
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	2/28/2014	8/28/2015
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4418	LISN	SOLAR ELECTRONICS	9233-50-TS-50-N	10/24/2014	4/24/2016
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	7/18/2014	7/18/2016
1T4300	SEMI-ANECHOIC CHAMBER # 1 (NSA)	EMC TEST SYSTEMS	NONE	7/24/2015	7/24/2016
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY-PROOF	81	NOT REQUIRED	
1T2665	ANTENNA; HORN	EMCO	3115	4/3/2014	10/3/2015
1T4870	THERM./CLOCK/HUMIDITY MONITOR	CONTROL COMPANY	06-662-4, FB70258	3/14/2014	3/14/2016

Table 19. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

I. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.