


FCC Test Report

FCC ID : ACQ-VIP7802ATSC
Equipment : WiFi Set Top Box
Model No. : VIP7802ATSC
Brand Name : ARRIS
Applicant : ARRIS
Address : 101 Tournament Drive, Horsham,
Pennsylvania, United States 19044
Standard : 47 CFR FCC Part 15.247
Received Date : Nov. 30, 2021
Tested Date : Jan. 06 ~ Jan. 19, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data.....	8
1.5	Test Standards	9
1.6	Reference Guidance	9
1.7	Deviation from Test Standard and Measurement Procedure.....	9
1.8	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Facility.....	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	22
3.4	Power Spectral Density	25
3.5	Emissions in Restricted Frequency Bands.....	33
3.6	Emissions in non-restricted Frequency Bands.....	49
4	TEST LABORATORY INFORMATION	56

Release Record

Report No.	Version	Description	Issued Date
FR1N3001AE	Rev. 01	Initial issue	Feb. 10, 2022

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 1.411MHz 41.98 (Margin -4.02dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 600.12MHz 41.95 (Margin -4.05dB) - PK	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 3.36	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.0 LE	2402-2480	0-39 [40]	125 kbps
				500 kbps
				1 Mbps
				2 Mbps
Note: Bluetooth LE (Low energy) uses GFSK modulation.				

1.1.2 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remarks
1	PIFA	N/A	2.7	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter
--------------------------	--------------------

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Adapter	Brand: APD Model: WB-18R12FU-ABAK Power Rating: I/P: 100-120Vac, 60Hz O/P: 12V=1.5A Power Line: 1.75m non-shielded without core
2	Remote Control	Model: T4HU2120/36K

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	Putty, Version:0.6.0	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
BT-LE(125kbps)	83.40%	0.79
BT-LE(500kbps)	57.69%	2.39
BT-LE(1Mbps)	62.33%	2.05
BT-LE(2Mbps)	33.18%	4.79


1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
BT-LE(125kbps)	default	default	default
BT-LE(500kbps)	default	default	default
BT-LE(1Mbps)	default	default	default
BT-LE(2Mbps)	default	default	default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	---	---
2	TV	CHIMEI	TL-24LF500D	---	---
3	75ohm load	ICC	75 ohm load	---	Provided by applicant.
4	Debug Board	---	---	---	---
5	USB Load cable	---	---	---	Provided by applicant.

1.3 Test Setup Chart

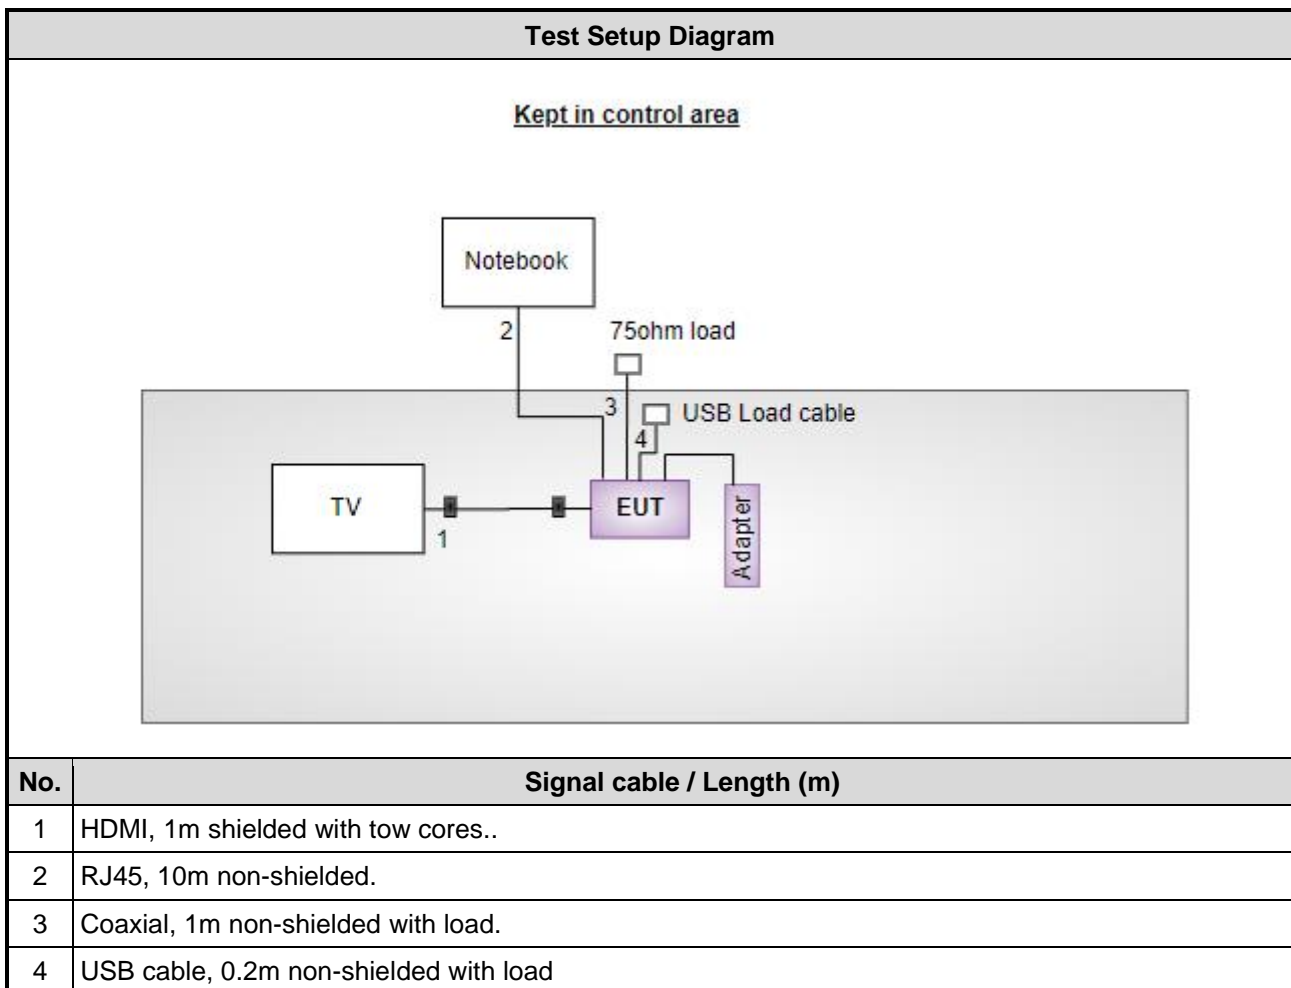

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Jan. 18, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127477	Feb. 25, 2021	Feb. 24, 2022
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Jan. 06 ~ Jan. 12, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101063	Apr. 19, 2021	Apr. 18, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2021	Nov. 03, 2022
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Jan. 19, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Measurement Software	Sporton	SENSE-15247_FS	V5.10.7.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.41 dB
Radiated emission > 1 GHz	± 4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions \leq 1GHz	BT-LE(1Mbps)	2402	---
Maximum Output Power	BT-LE(125kbps)	2402, 2440, 2480	---
6dB bandwidth	BT-LE(500kbps)	2402, 2440, 2480	
Power spectral density	BT-LE(1Mbps)	2402, 2440, 2480	
	BT-LE(2Mbps)	2402, 2440, 2480	
Radiated Emissions $>$ 1GHz	BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480 2402, 2440, 2480	---

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup



Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

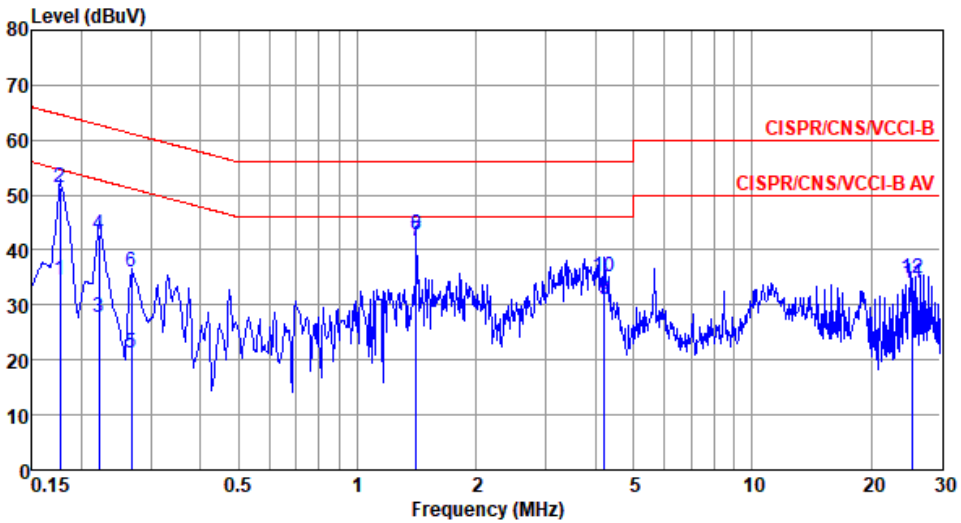Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402																																																																																																																																		
Power Phase	Line																																																																																																																																				
Test by : Joe Liao Temperature: 20°C Humidity: 60%																																																																																																																																					
																																																																																																																																					
<table border="1"> <thead> <tr> <th></th> <th>Freq MHz</th> <th>Level dBuV</th> <th>Limit Line dBuV</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Cable loss dB</th> <th>Aux dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.177</td><td>34.62</td><td>54.64</td><td>-20.02</td><td>24.68</td><td>9.65</td><td>0.08</td><td>0.21</td><td>Average</td></tr> <tr><td>2</td><td>0.177</td><td>51.50</td><td>64.64</td><td>-13.14</td><td>41.56</td><td>9.65</td><td>0.08</td><td>0.21</td><td>QP</td></tr> <tr><td>3</td><td>0.222</td><td>27.74</td><td>52.74</td><td>-25.00</td><td>17.77</td><td>9.65</td><td>0.08</td><td>0.24</td><td>Average</td></tr> <tr><td>4</td><td>0.222</td><td>42.85</td><td>62.74</td><td>-19.89</td><td>32.88</td><td>9.65</td><td>0.08</td><td>0.24</td><td>QP</td></tr> <tr><td>5</td><td>0.267</td><td>21.21</td><td>51.20</td><td>-29.99</td><td>11.20</td><td>9.65</td><td>0.08</td><td>0.28</td><td>Average</td></tr> <tr><td>6</td><td>0.267</td><td>36.11</td><td>61.20</td><td>-25.09</td><td>26.10</td><td>9.65</td><td>0.08</td><td>0.28</td><td>QP</td></tr> <tr><td>7*</td><td>1.411</td><td>41.58</td><td>46.00</td><td>-4.42</td><td>31.37</td><td>9.65</td><td>0.18</td><td>0.38</td><td>Average</td></tr> <tr><td>8</td><td>1.411</td><td>42.92</td><td>56.00</td><td>-13.08</td><td>32.71</td><td>9.65</td><td>0.18</td><td>0.38</td><td>QP</td></tr> <tr><td>9</td><td>4.224</td><td>30.86</td><td>46.00</td><td>-15.14</td><td>20.55</td><td>9.67</td><td>0.22</td><td>0.42</td><td>Average</td></tr> <tr><td>10</td><td>4.224</td><td>35.27</td><td>56.00</td><td>-20.73</td><td>24.96</td><td>9.67</td><td>0.22</td><td>0.42</td><td>QP</td></tr> <tr><td>11</td><td>25.455</td><td>33.94</td><td>50.00</td><td>-16.06</td><td>22.88</td><td>9.66</td><td>0.70</td><td>0.70</td><td>Average</td></tr> <tr><td>12</td><td>25.455</td><td>34.89</td><td>60.00</td><td>-25.11</td><td>23.83</td><td>9.66</td><td>0.70</td><td>0.70</td><td>QP</td></tr> </tbody> </table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.177	34.62	54.64	-20.02	24.68	9.65	0.08	0.21	Average	2	0.177	51.50	64.64	-13.14	41.56	9.65	0.08	0.21	QP	3	0.222	27.74	52.74	-25.00	17.77	9.65	0.08	0.24	Average	4	0.222	42.85	62.74	-19.89	32.88	9.65	0.08	0.24	QP	5	0.267	21.21	51.20	-29.99	11.20	9.65	0.08	0.28	Average	6	0.267	36.11	61.20	-25.09	26.10	9.65	0.08	0.28	QP	7*	1.411	41.58	46.00	-4.42	31.37	9.65	0.18	0.38	Average	8	1.411	42.92	56.00	-13.08	32.71	9.65	0.18	0.38	QP	9	4.224	30.86	46.00	-15.14	20.55	9.67	0.22	0.42	Average	10	4.224	35.27	56.00	-20.73	24.96	9.67	0.22	0.42	QP	11	25.455	33.94	50.00	-16.06	22.88	9.66	0.70	0.70	Average	12	25.455	34.89	60.00	-25.11	23.83	9.66	0.70	0.70	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.177	34.62	54.64	-20.02	24.68	9.65	0.08	0.21	Average																																																																																																																												
2	0.177	51.50	64.64	-13.14	41.56	9.65	0.08	0.21	QP																																																																																																																												
3	0.222	27.74	52.74	-25.00	17.77	9.65	0.08	0.24	Average																																																																																																																												
4	0.222	42.85	62.74	-19.89	32.88	9.65	0.08	0.24	QP																																																																																																																												
5	0.267	21.21	51.20	-29.99	11.20	9.65	0.08	0.28	Average																																																																																																																												
6	0.267	36.11	61.20	-25.09	26.10	9.65	0.08	0.28	QP																																																																																																																												
7*	1.411	41.58	46.00	-4.42	31.37	9.65	0.18	0.38	Average																																																																																																																												
8	1.411	42.92	56.00	-13.08	32.71	9.65	0.18	0.38	QP																																																																																																																												
9	4.224	30.86	46.00	-15.14	20.55	9.67	0.22	0.42	Average																																																																																																																												
10	4.224	35.27	56.00	-20.73	24.96	9.67	0.22	0.42	QP																																																																																																																												
11	25.455	33.94	50.00	-16.06	22.88	9.66	0.70	0.70	Average																																																																																																																												
12	25.455	34.89	60.00	-25.11	23.83	9.66	0.70	0.70	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					

Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402
Power Phase	Neutral		

Test by : Joe Liao Temperature: 20°C Humidity: 60%

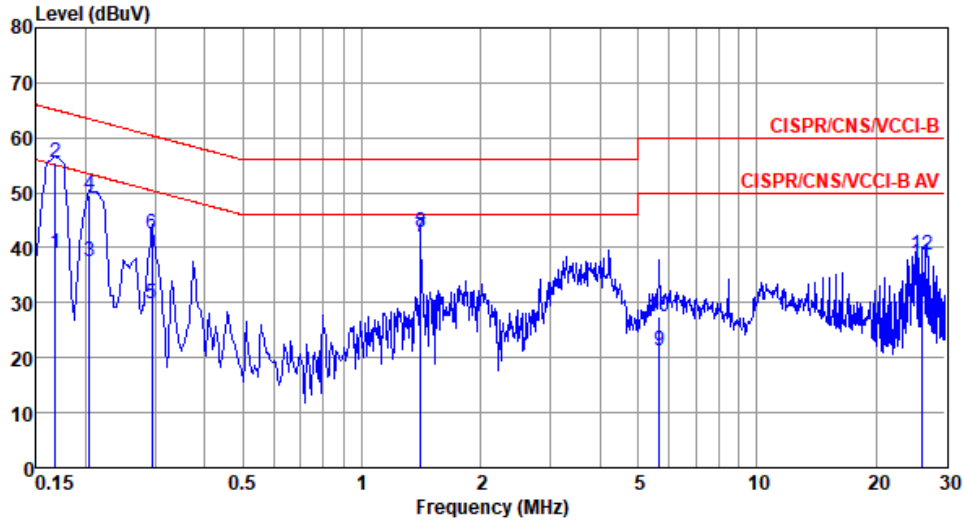

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.168	39.09	55.08	-15.99	29.15	9.69	0.08	0.17	Average
2	0.168	55.54	65.08	-9.54	45.60	9.69	0.08	0.17	QP
3	0.204	37.40	53.45	-16.05	27.46	9.68	0.08	0.18	Average
4	0.204	49.46	63.45	-13.99	39.52	9.68	0.08	0.18	QP
5	0.294	29.73	50.41	-20.68	19.79	9.67	0.08	0.19	Average
6	0.294	42.51	60.41	-17.90	32.57	9.67	0.08	0.19	QP
7*	1.411	41.98	46.00	-4.02	31.83	9.68	0.18	0.29	Average
8	1.411	42.94	56.00	-13.06	32.79	9.68	0.18	0.29	QP
9	5.653	21.36	50.00	-28.64	11.00	9.72	0.30	0.34	Average
10	5.653	27.57	60.00	-32.43	17.21	9.72	0.30	0.34	QP
11	26.085	37.20	50.00	-12.80	26.05	9.85	0.71	0.59	Average
12	26.085	38.64	60.00	-21.36	27.49	9.85	0.71	0.59	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup

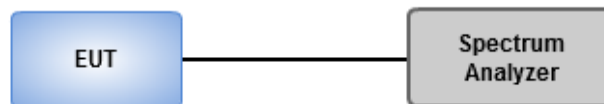

3.2.4 Test Result of 6dB and Occupied Bandwidth

Ambient Condition	21°C / 66%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(125kbps)	699.275k	1.064M	1M06F1D	692.029k	1.06M
BT-LE(500kbps)	663.043k	1.031M	1M03F1D	659.42k	1.027M
BT-LE(1Mbps)	695.652k	1.042M	1M04F1D	688.406k	1.042M
BT-LE(2Mbps)	1.239M	2.041M	2M04F1D	1.225M	2.033M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	500k	695.652k	1.06M
2440MHz	Pass	500k	699.275k	1.06M
2480MHz	Pass	500k	692.029k	1.064M
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	500k	663.043k	1.027M
2440MHz	Pass	500k	663.043k	1.027M
2480MHz	Pass	500k	659.42k	1.031M
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	692.029k	1.042M
2440MHz	Pass	500k	688.406k	1.042M
2480MHz	Pass	500k	695.652k	1.042M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.225M	2.033M
2440MHz	Pass	500k	1.232M	2.041M
2480MHz	Pass	500k	1.239M	2.041M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

BT-LE(125kbps)



2402MHz

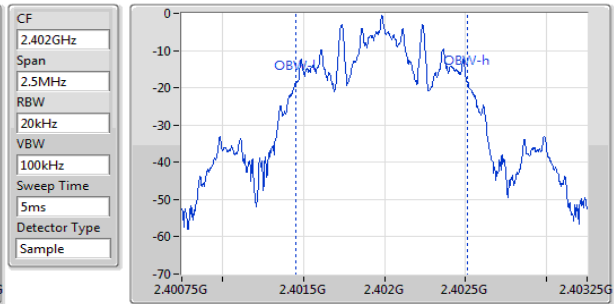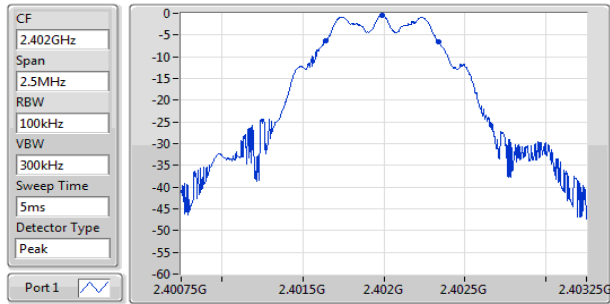

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
695.652k	2.401641G	2.402337G	1.06M	2.401454G	2.402514G	500k	1

BT-LE(125kbps)



2440MHz

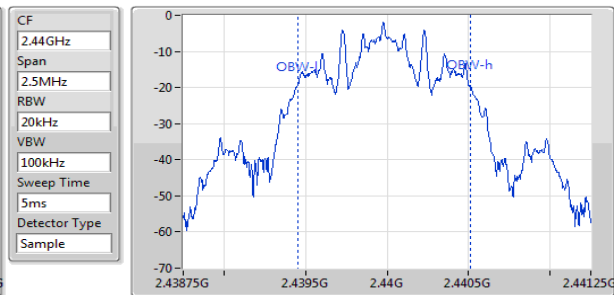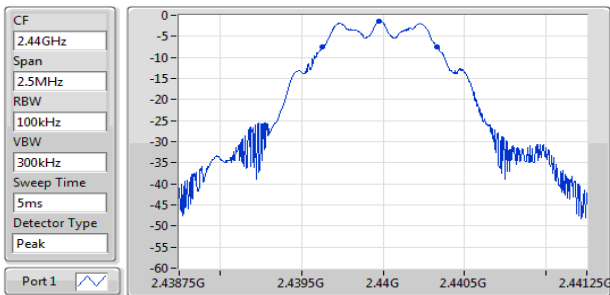

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
699.275k	2.43963G	2.44033G	1.06M	2.43945G	2.44051G	500k	1

BT-LE(125kbps)



2480MHz

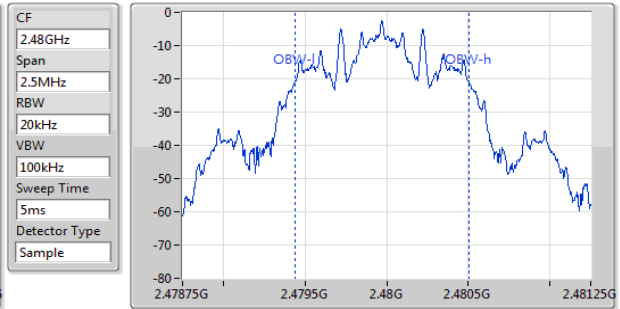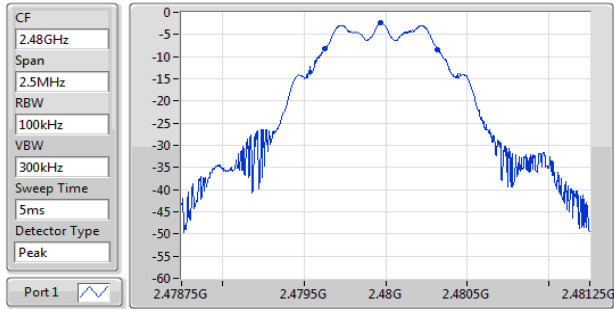

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
692.029k	2.479627G	2.480319G	1.064M	2.479439G	2.480503G	500k	1

BT-LE(500kbps)



2402MHz

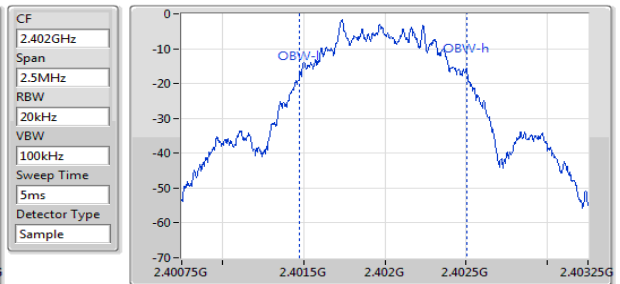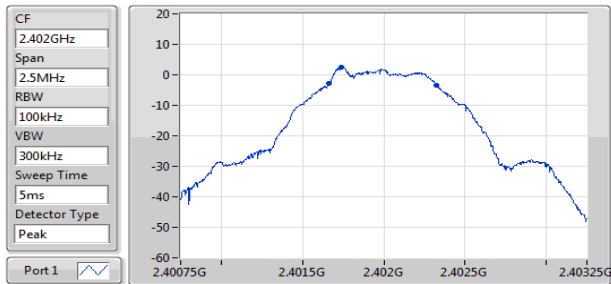

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
663.043k	2.401663G	2.402326G	1.027M	2.401475G	2.402503G	500k	1

BT-LE(500kbps)



2440MHz

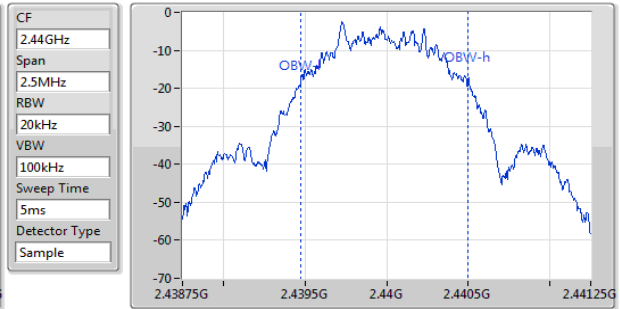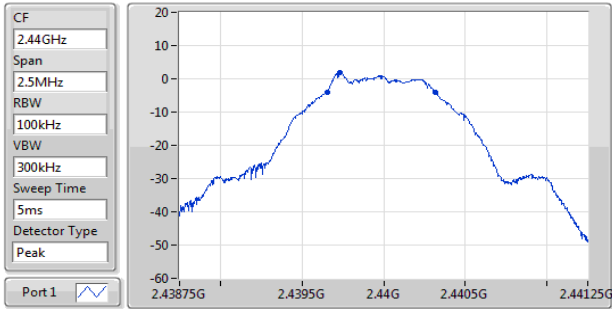

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
663.043k	2.439652G	2.440315G	1.027M	2.439472G	2.440499G	500k	1

BT-LE(500kbps)


2480MHz

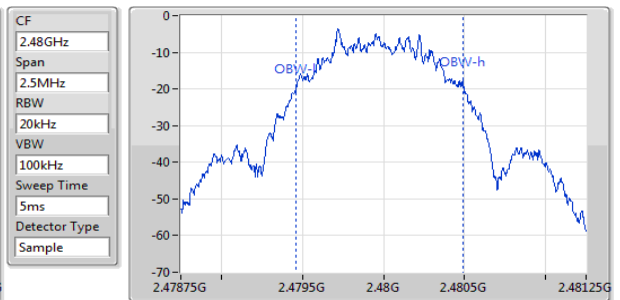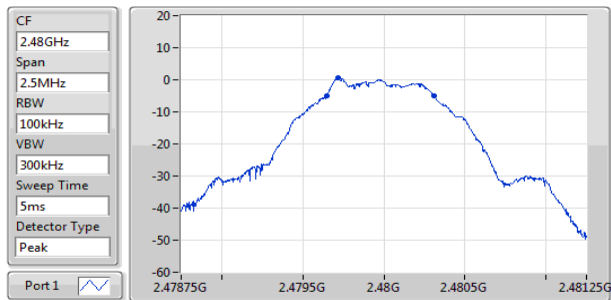

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
659.42k	2.479649G	2.480308G	1.031M	2.479461G	2.480492G	500k	1

BT-LE(1Mbps)


2402MHz

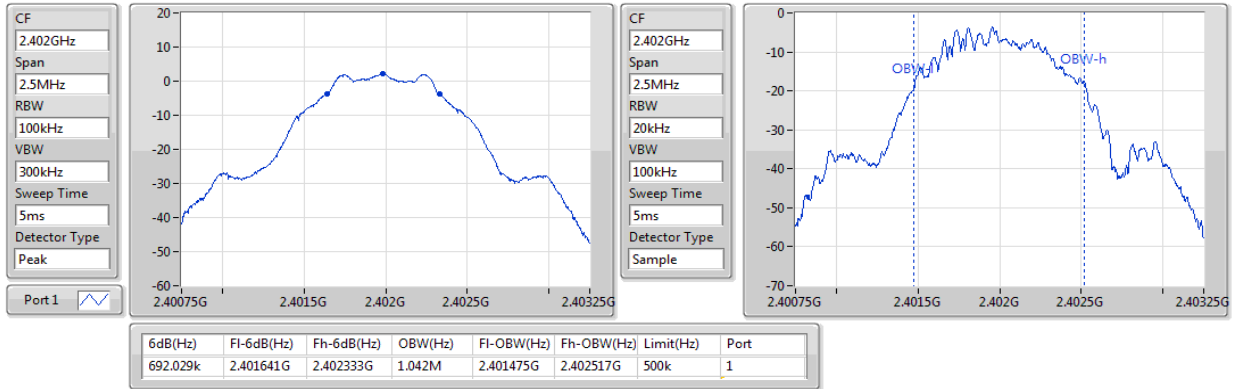

EBW-DTS

BT-LE(1Mbps)

2440MHz

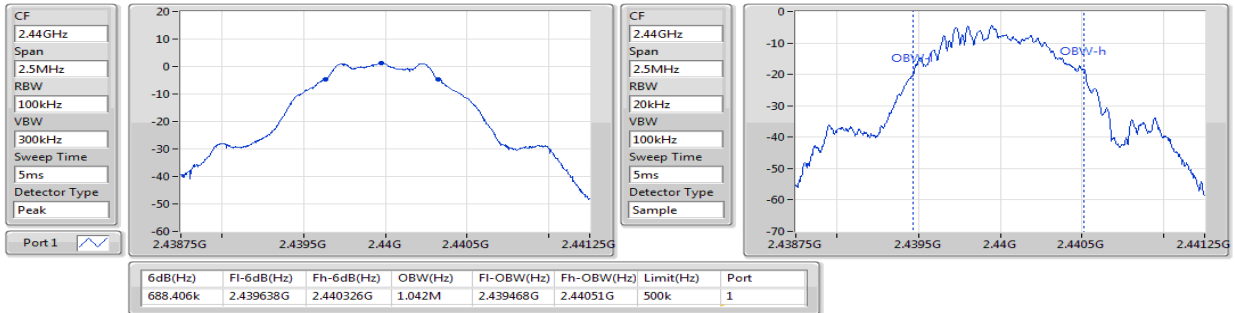


EBW-DTS

BT-LE(1Mbps)

EBW-DTS


2480MHz

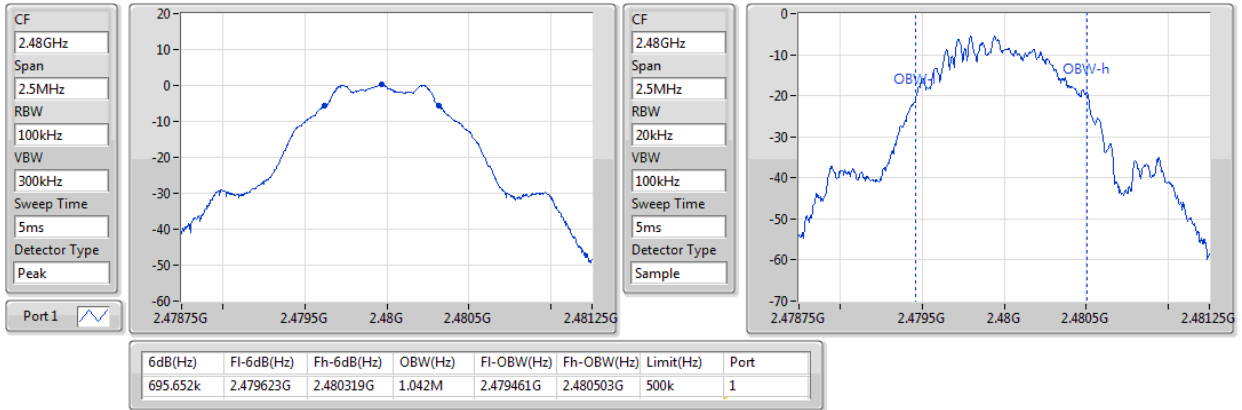

BT-LE(2Mbps)

EBW-DTS


2402MHz

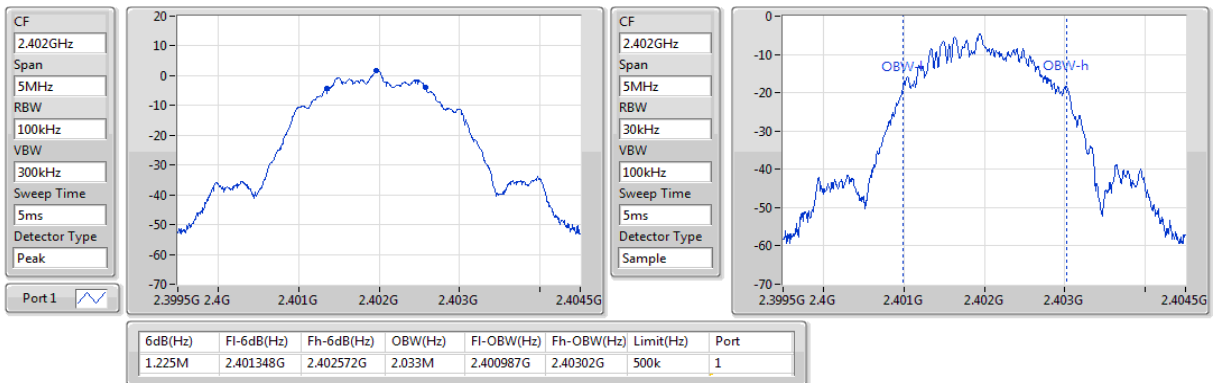

BT-LE(2Mbps)

EBW-DTS


2440MHz

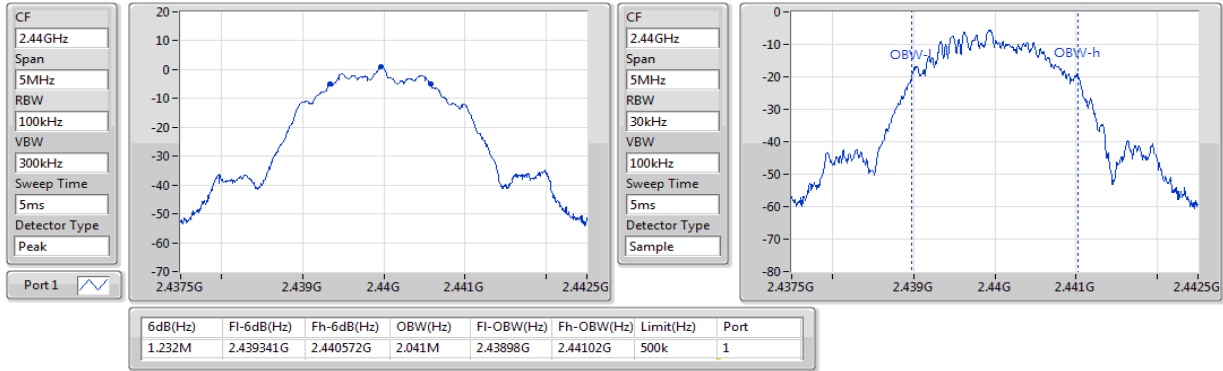

BT-LE(2Mbps)

EBW-DTS

2480MHz

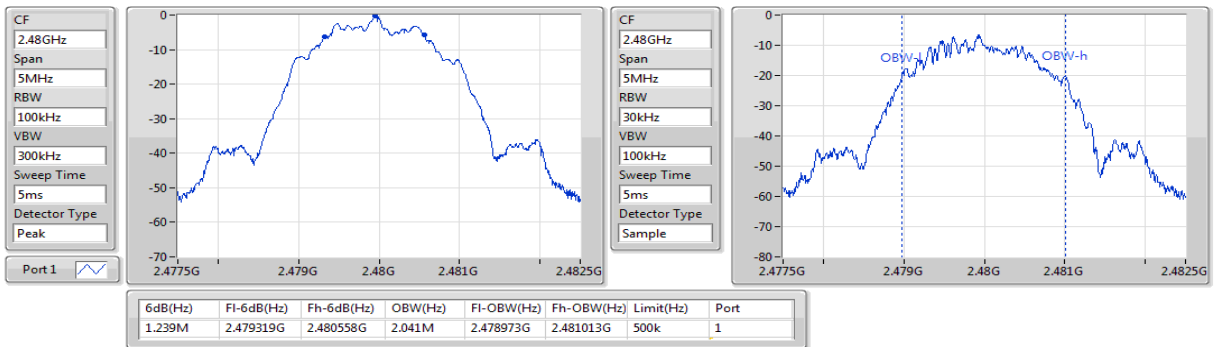

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1 Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup

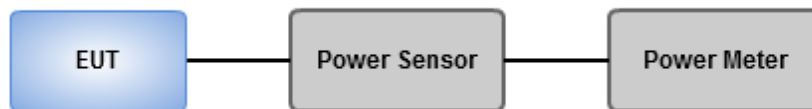

3.3.4 Test Result of Maximum Output Power

Ambient Condition	21°C / 66%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	3.32	0.00215
BT-LE(500kbps)	3.31	0.00214
BT-LE(1Mbps)	3.36	0.00217
BT-LE(2Mbps)	3.33	0.00215

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.70	3.32	30.00
2440MHz	Pass	2.70	2.68	30.00
2480MHz	Pass	2.70	1.63	30.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.70	3.31	30.00
2440MHz	Pass	2.70	2.67	30.00
2480MHz	Pass	2.70	1.64	30.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	3.36	30.00
2440MHz	Pass	2.70	2.71	30.00
2480MHz	Pass	2.70	1.69	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.70	3.33	30.00
2440MHz	Pass	2.70	2.69	30.00
2480MHz	Pass	2.70	1.64	30.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	3.01	0.00200
BT-LE(500kbps)	3.00	0.00200
BT-LE(1Mbps)	3.05	0.00202
BT-LE(2Mbps)	3.02	0.00200

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.70	3.01	-
2440MHz	Pass	2.70	2.39	-
2480MHz	Pass	2.70	1.31	-
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.70	3.00	-
2440MHz	Pass	2.70	2.38	-
2480MHz	Pass	2.70	1.32	-
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	3.05	-
2440MHz	Pass	2.70	2.46	-
2480MHz	Pass	2.70	1.37	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.70	3.02	-
2440MHz	Pass	2.70	2.40	-
2480MHz	Pass	2.70	1.32	-

Note: Average power is for reference only.

3.4 Power Spectral Density

3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


Average PSD, duty cycle $\geq 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

Average PSD, duty cycle $< 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz. Detector = RMS.
2. Set the sweep time to: ≥ 10 (number of measurement points in sweep) x (total on/off period of the transmitted signal).
3. Perform the measurement over a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log (1/x)$, where x is the duty cycle.

3.4.3 Test Setup

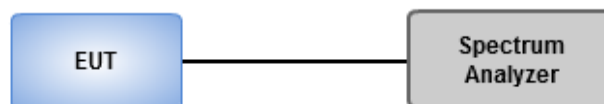

3.4.4 Test Result of Power Spectral Density

Ambient Condition	21°C / 66%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(125kbps)	-3.32
BT-LE(500kbps)	-3.74
BT-LE(1Mbps)	-12.74
BT-LE(2Mbps)	-15.15


Result

Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.70	-3.32	8.00
2440MHz	Pass	2.70	-4.34	8.00
2480MHz	Pass	2.70	-5.36	8.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.70	-3.74	8.00
2440MHz	Pass	2.70	-4.51	8.00
2480MHz	Pass	2.70	-5.57	8.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	-12.74	8.00
2440MHz	Pass	2.70	-13.55	8.00
2480MHz	Pass	2.70	-14.57	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.70	-15.15	8.00
2440MHz	Pass	2.70	-16.08	8.00
2480MHz	Pass	2.70	-17.06	8.00

BT-LE(125kbps)

PSD

2402MHz

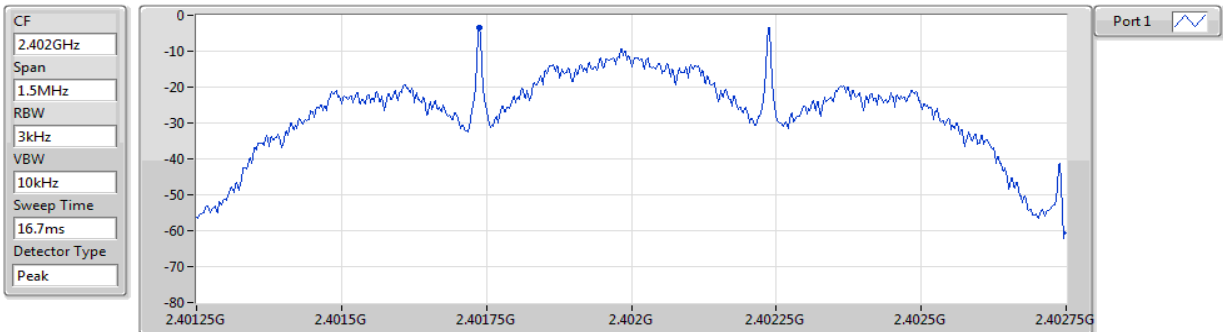


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.32	-3.32	-3.32

BT-LE(125kbps)

PSD

2440MHz

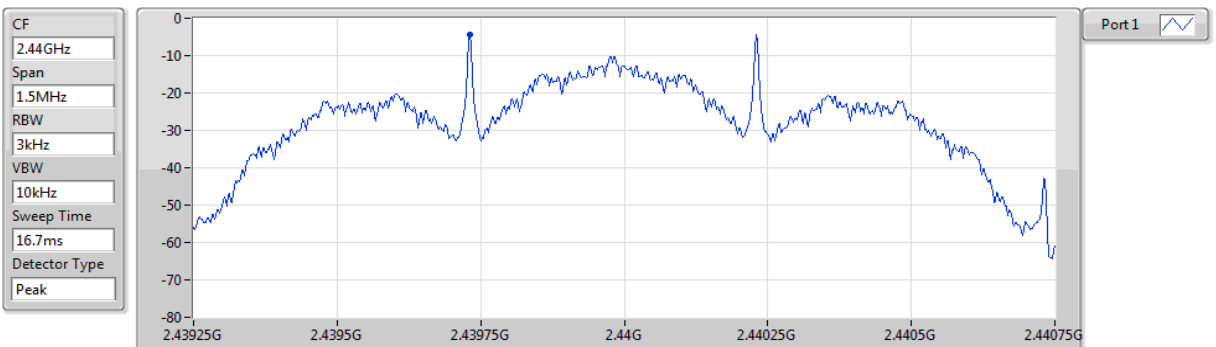


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.34	-4.34	-4.34

BT-LE(125kbps)

PSD


2480MHz

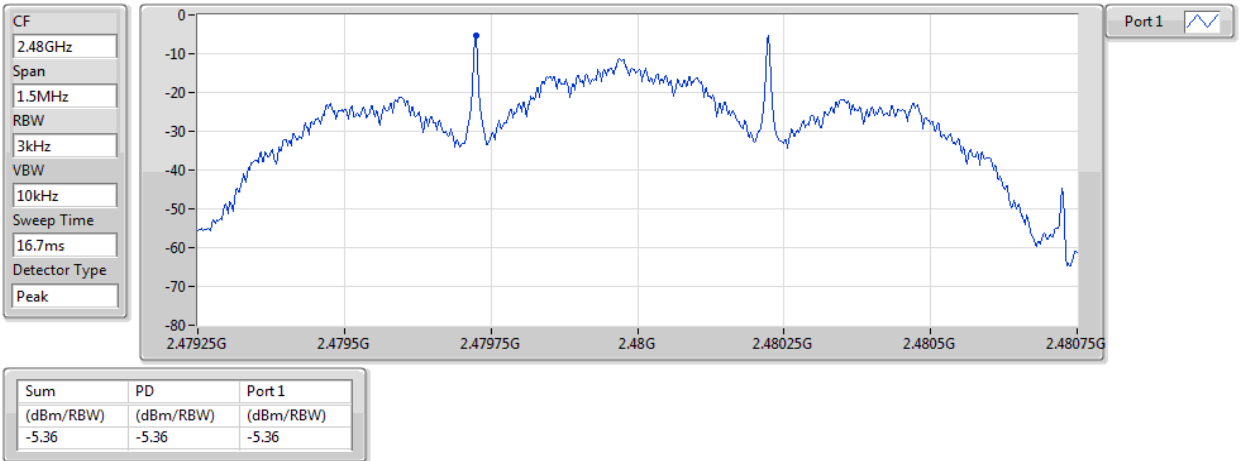

BT-LE(500kbps)

PSD


2402MHz

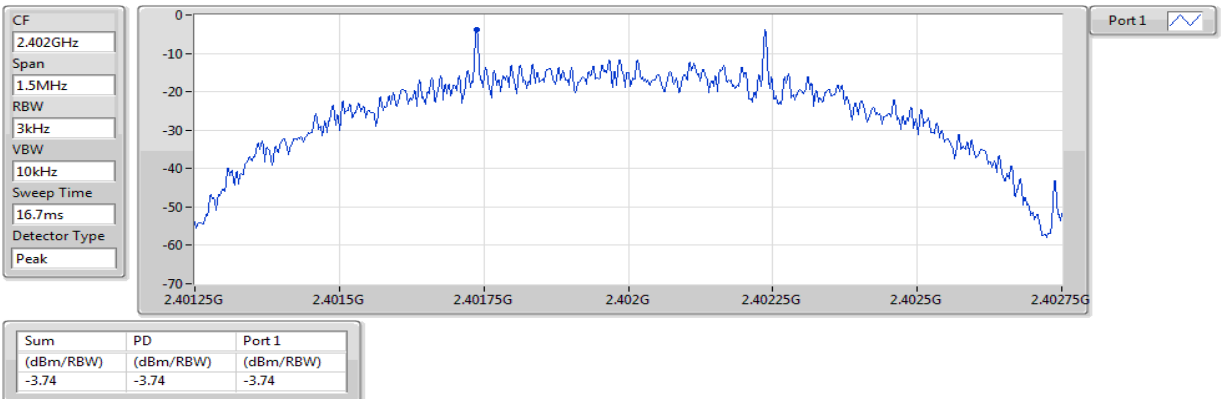

BT-LE(500kbps)

PSD


2440MHz

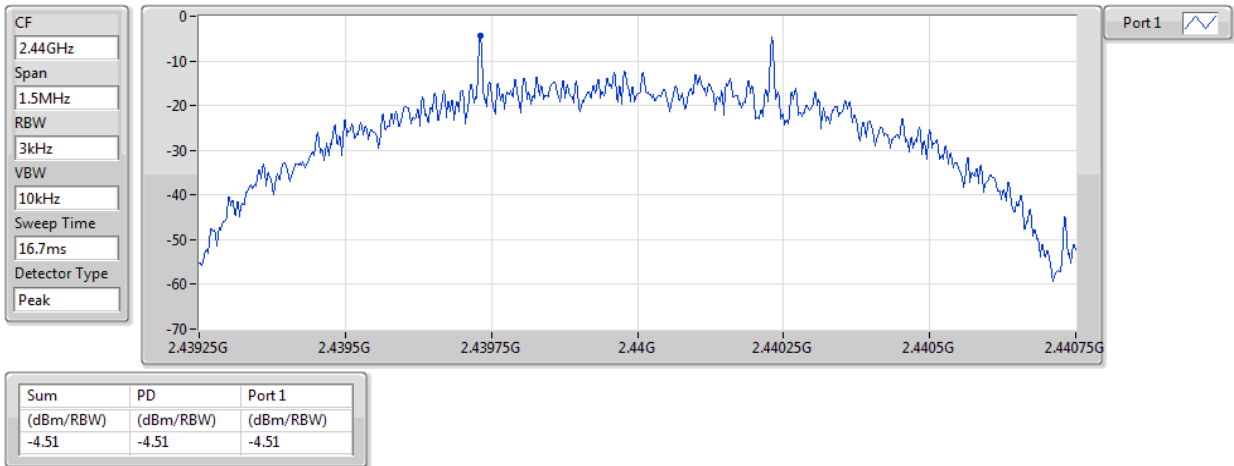

BT-LE(500kbps)

PSD


2480MHz

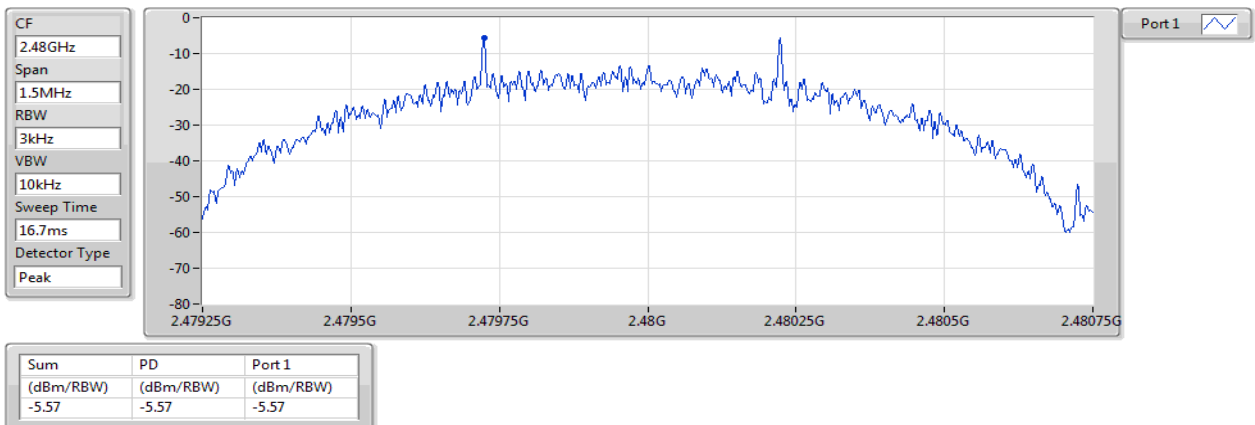

BT-LE(1Mbps)

PSD


2402MHz

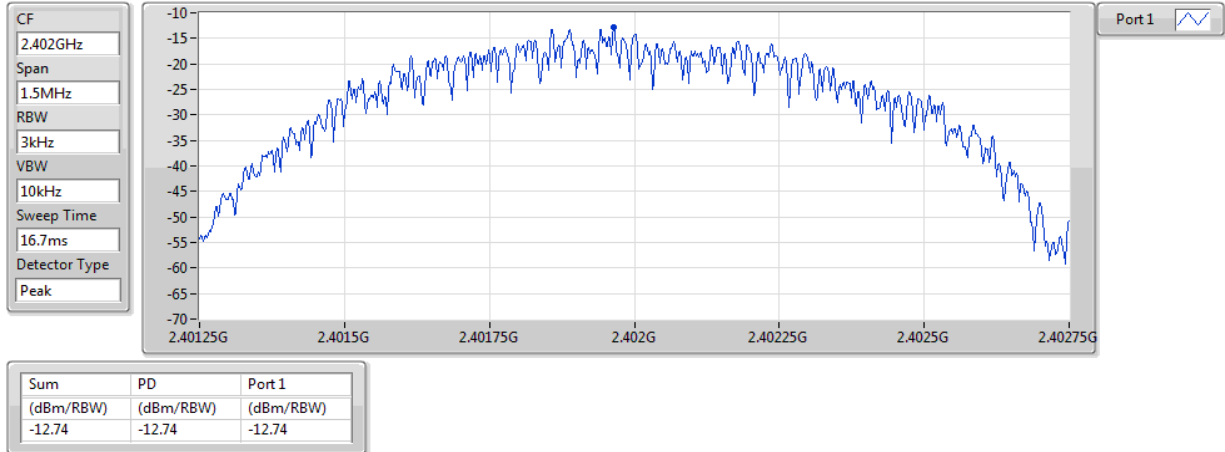

BT-LE(1Mbps)

PSD


2440MHz

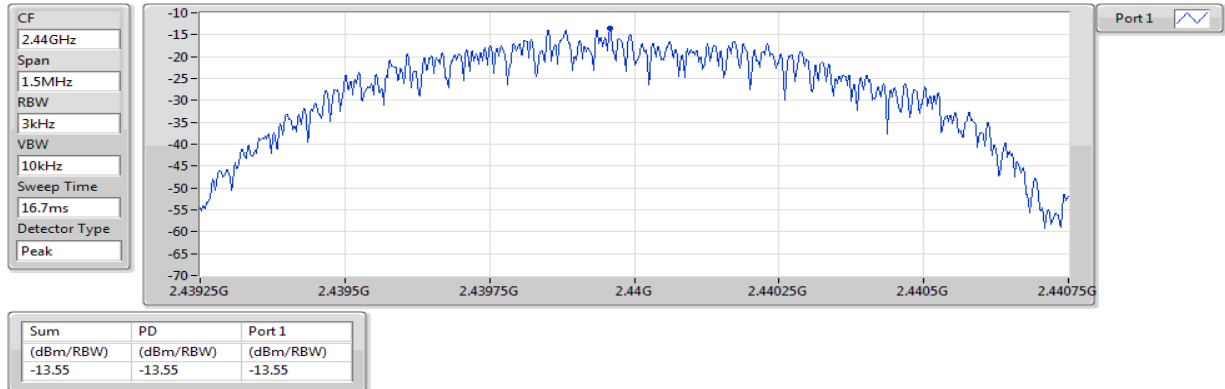

BT-LE(1Mbps)

PSD


2480MHz

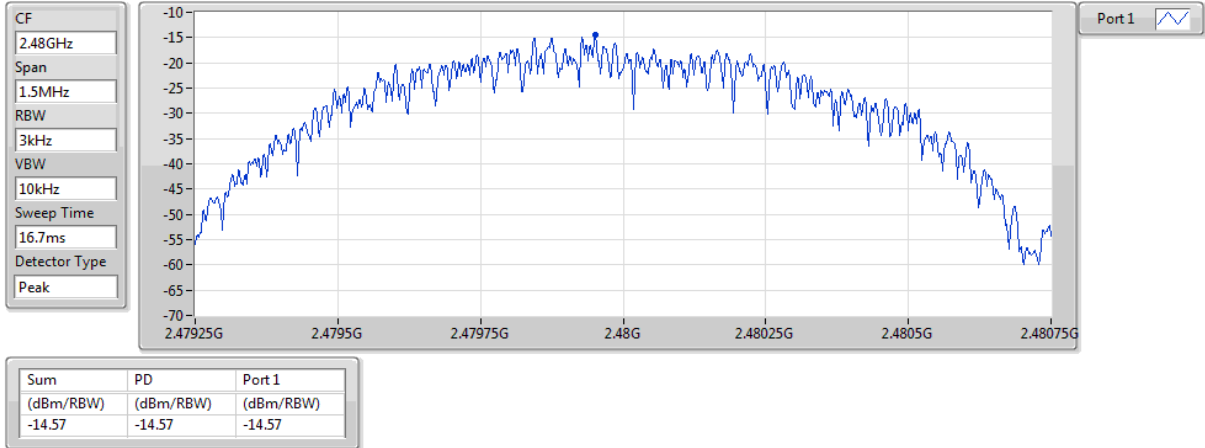

BT-LE(2Mbps)

PSD


2402MHz

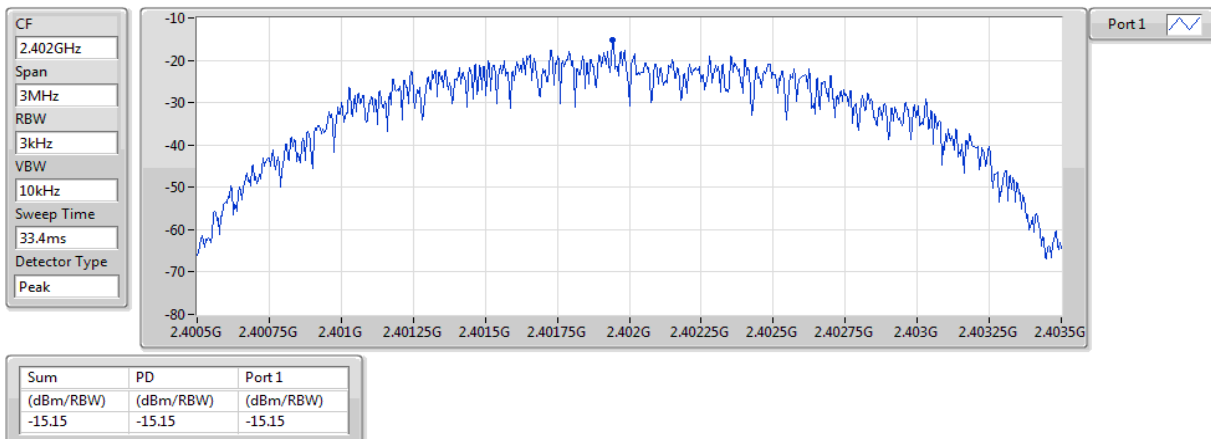

BT-LE(2Mbps)

PSD

2440MHz

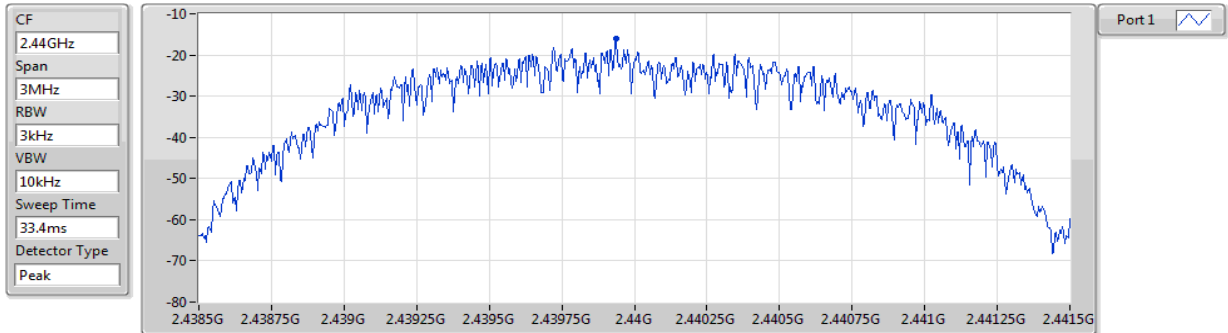


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.08	-16.08	-16.08

BT-LE(2Mbps)

PSD

2480MHz

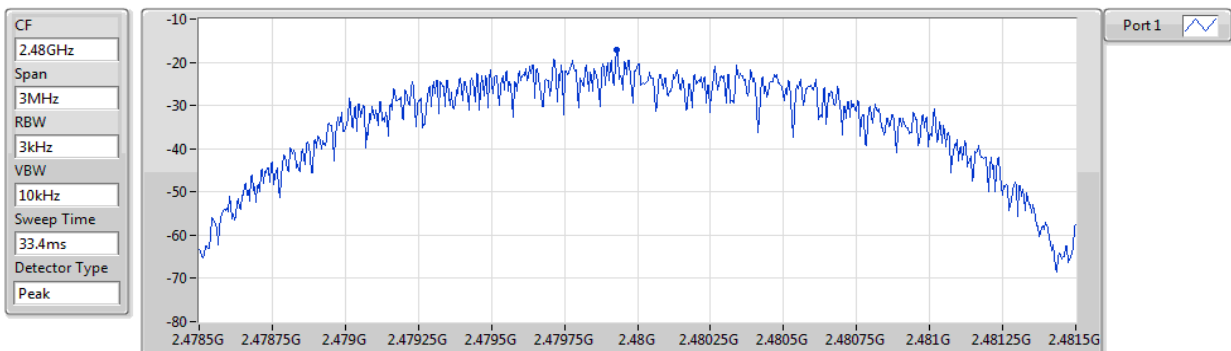

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-17.06	-17.06	-17.06

3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup


Radiated Emissions below 1 GHz

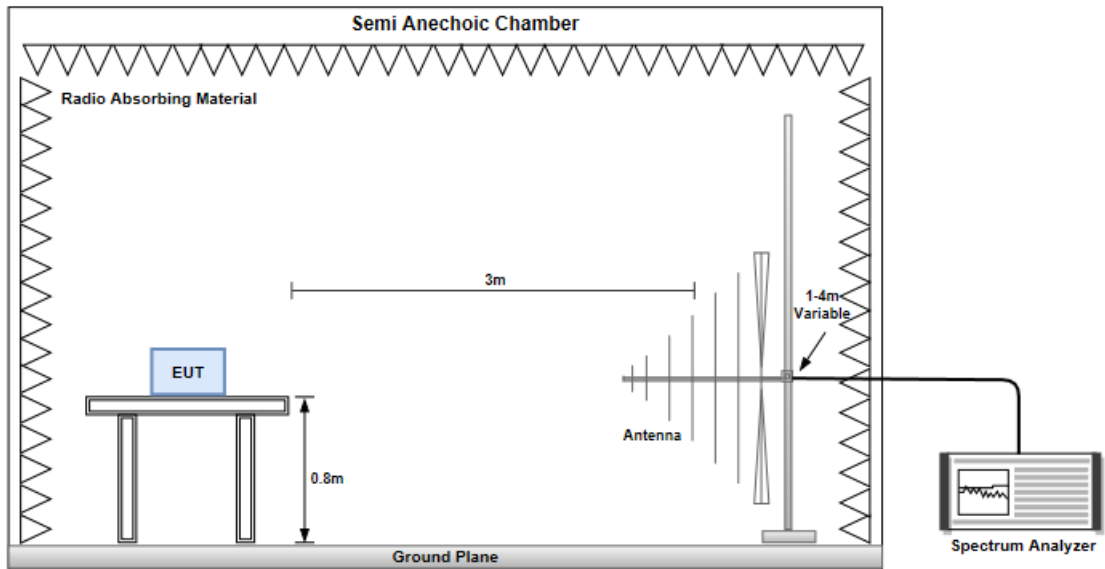

Radiated Emissions above 1 GHz

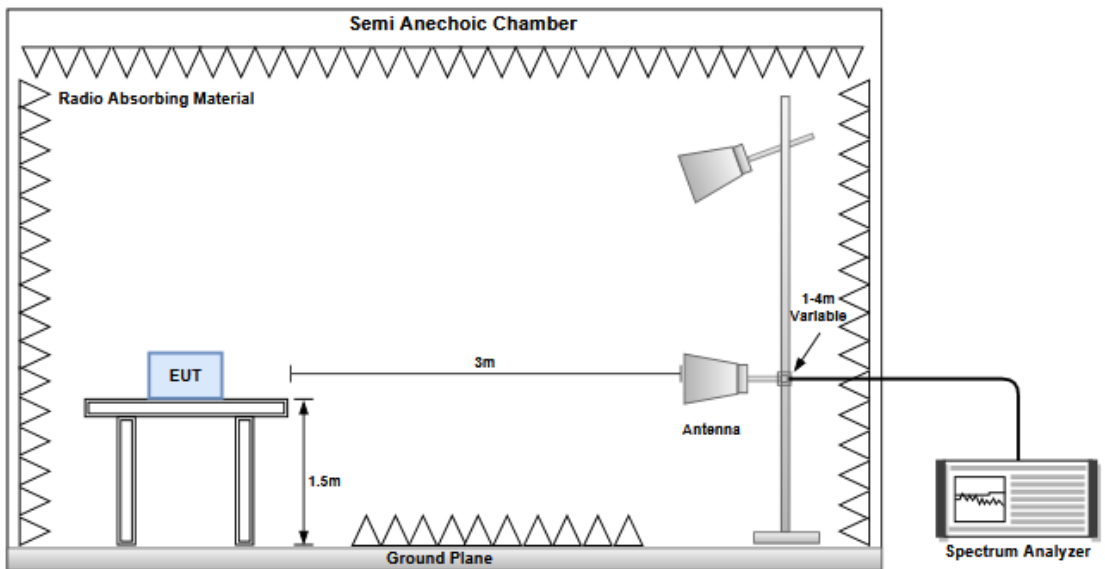


3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

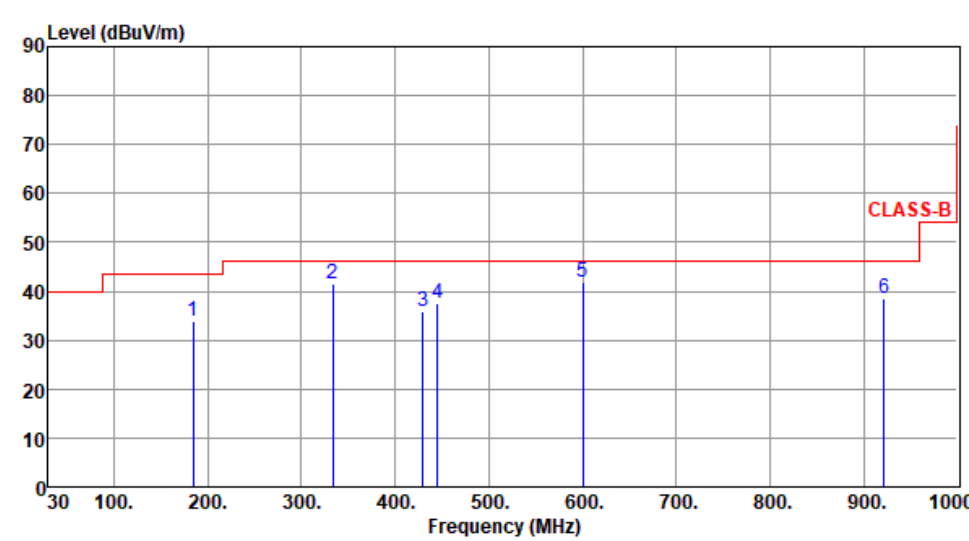Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By : Roger Lu Temperature(°C):23 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	184.23	33.85	43.50	-9.65	44.48	-10.63	Peak	---	---
2	333.25	41.59	46.00	-4.41	48.96	-7.37	Peak	---	---
3	429.64	35.99	46.00	-10.01	40.80	-4.81	Peak	---	---
4	445.35	37.59	46.00	-8.41	41.94	-4.35	Peak	---	---
5	600.12	41.95	46.00	-4.05	42.96	-1.01	Peak	---	---
6	921.43	38.65	46.00	-7.35	34.68	3.97	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

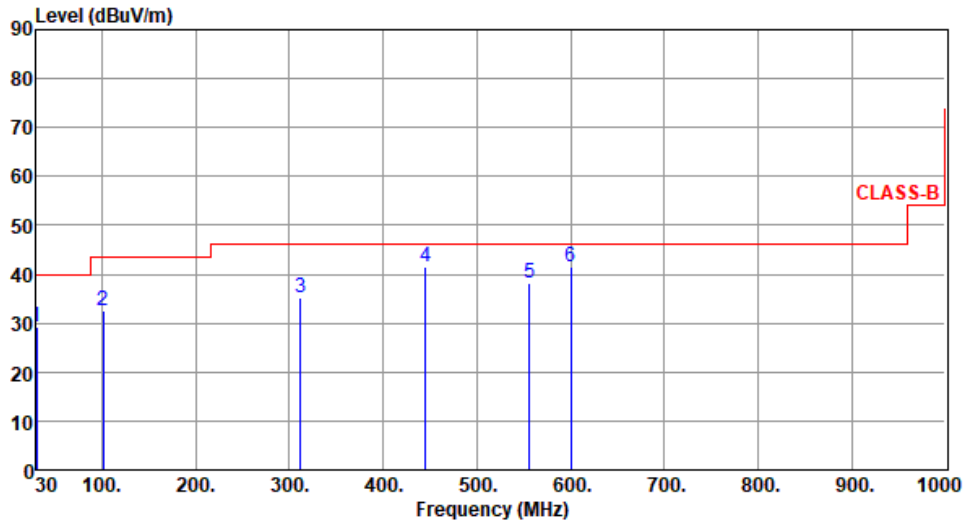

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	30.00	29.30	40.00	-10.70	39.24	-9.94	Peak	---	---
2	101.65	32.46	43.50	-11.04	45.42	-12.96	Peak	---	---
3	311.49	35.19	46.00	-10.81	42.94	-7.75	Peak	---	---
4	445.21	41.51	46.00	-4.49	45.87	-4.36	QP	100	155
5	555.74	38.19	46.00	-7.81	40.50	-2.31	Peak	---	---
6	600.36	41.37	46.00	-4.63	42.38	-1.01	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

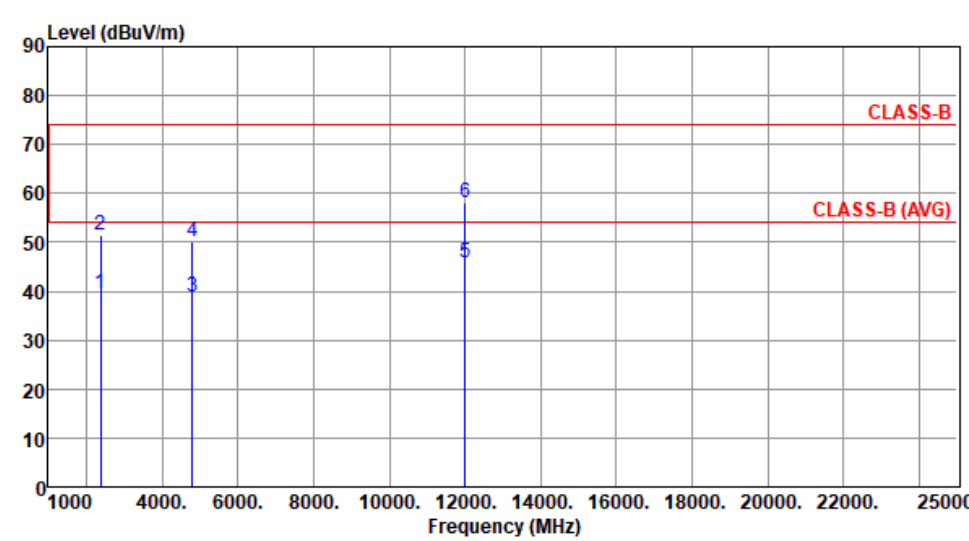Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By : Akun Chung Temperature(°C):22 Humidity(%):65									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	39.38	54.00	-14.62	42.13	-2.75	Average	102	183
2	2390.00	51.37	74.00	-22.63	54.12	-2.75	Peak	102	183
3	4804.00	38.75	54.00	-15.25	34.62	4.13	Average	100	177
4	4804.00	50.08	74.00	-23.92	45.95	4.13	Peak	100	177
5	12010.00	45.70	54.00	-8.30	32.08	13.62	Average	100	185
6	12010.00	58.26	74.00	-15.74	44.64	13.62	Peak	100	185

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

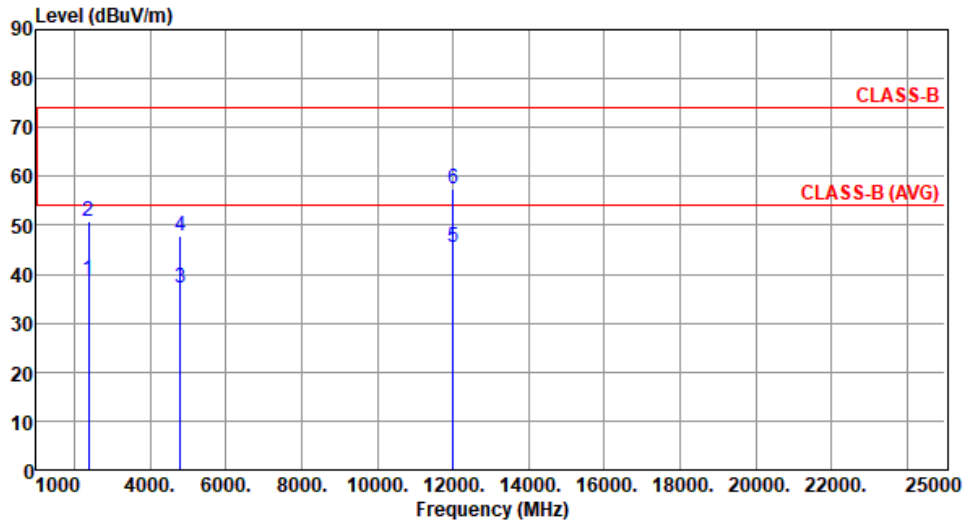

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.83	54.00	-15.17	41.58	-2.75	Average	102	169
2	2390.00	50.95	74.00	-23.05	53.70	-2.75	Peak	102	169
3	4804.00	37.15	54.00	-16.85	33.02	4.13	Average	100	148
4	4804.00	47.90	74.00	-26.10	43.77	4.13	Peak	100	148
5	12010.00	45.40	54.00	-8.60	31.78	13.62	Average	100	160
6	12010.00	57.42	74.00	-16.58	43.80	13.62	Peak	100	160


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 22 Humidity(%): 65

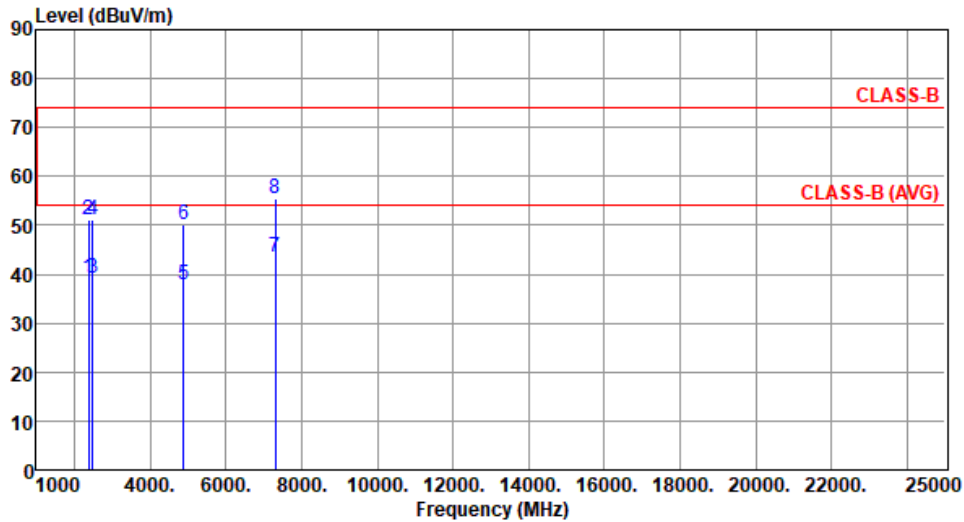


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.15	54.00	-14.85	41.90	-2.75	Average	100	180
2	2390.00	51.18	74.00	-22.82	53.93	-2.75	Peak	100	180
3	2483.50	39.04	54.00	-14.96	41.74	-2.70	Average	100	180
4	2483.50	51.01	74.00	-22.99	53.71	-2.70	Peak	100	180
5	4880.00	37.98	54.00	-16.02	33.86	4.12	Average	100	184
6	4880.00	50.00	74.00	-24.00	45.88	4.12	Peak	100	184
7	7320.00	43.52	54.00	-10.48	34.24	9.28	Average	100	186
8	7320.00	55.50	74.00	-18.50	46.22	9.28	Peak	100	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

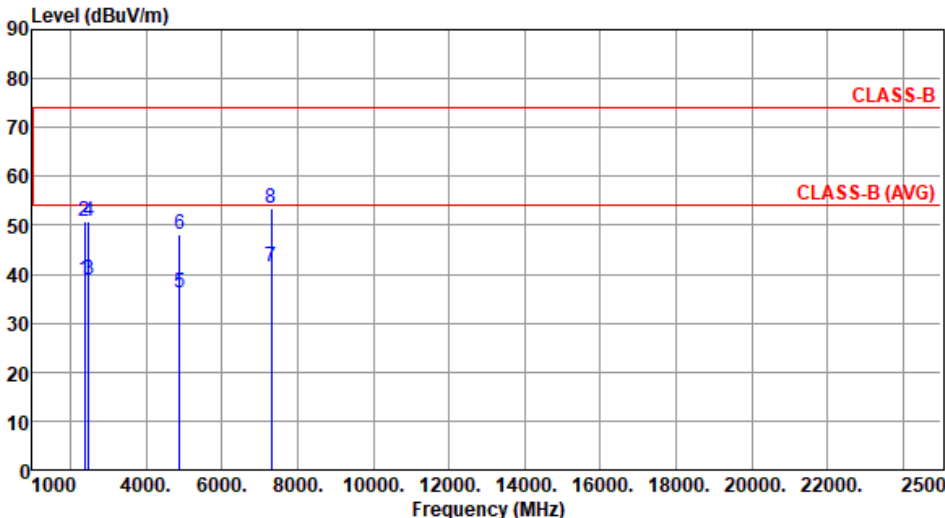Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440						
Polarization	Vertical								
Test By : Akun Chung Temperature(°C): 22 Humidity(%): 65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.80	54.00	-15.20	41.55	-2.75	Average	102	168
2	2390.00	50.95	74.00	-23.05	53.70	-2.75	Peak	102	168
3	2483.50	38.70	54.00	-15.30	41.40	-2.70	Average	102	168
4	2483.50	50.74	74.00	-23.26	53.44	-2.70	Peak	102	168
5	4880.00	36.07	54.00	-17.93	31.95	4.12	Average	100	150
6	4880.00	48.01	74.00	-25.99	43.89	4.12	Peak	100	150
7	7320.00	41.59	54.00	-12.41	32.31	9.28	Average	100	154
8	7320.00	53.39	74.00	-20.61	44.11	9.28	Peak	100	154

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

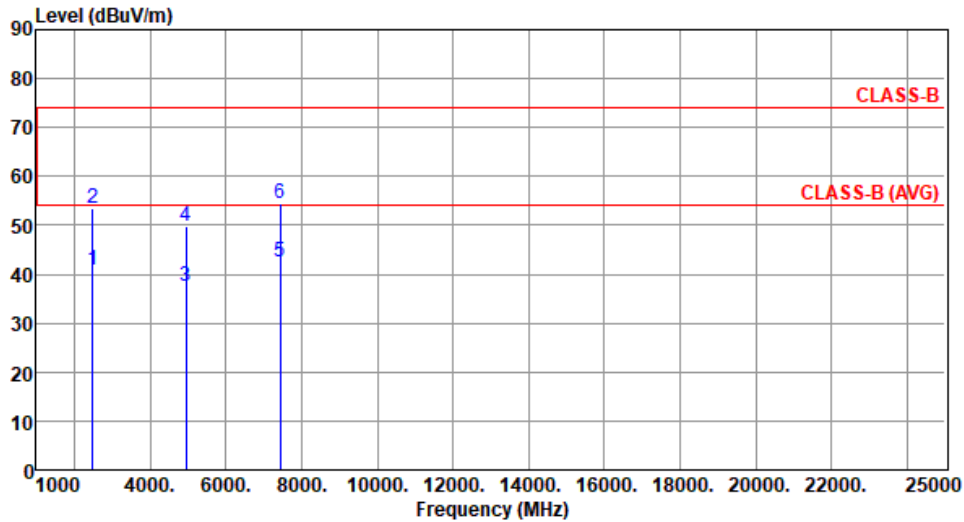



	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	40.99	54.00	-13.01	43.69	-2.70	Average	101	182
2	2483.50	53.31	74.00	-20.69	56.01	-2.70	Peak	101	182
3	4960.00	37.66	54.00	-16.34	33.63	4.03	Average	100	188
4	4960.00	49.67	74.00	-24.33	45.64	4.03	Peak	100	188
5	7440.00	42.52	54.00	-11.48	33.15	9.37	Average	100	192
6	7440.00	54.60	74.00	-19.40	45.23	9.37	Peak	100	192

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

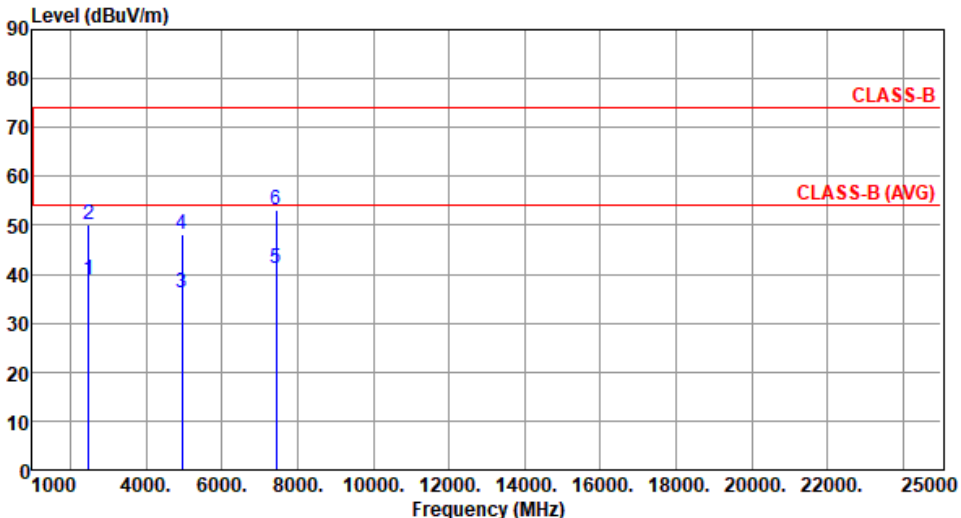
Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480						
Polarization	Vertical								
Test By :Akun Chung Temperature(°C):22 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	38.90	54.00	-15.10	41.60	-2.70	Average	103	174
2	2483.50	50.11	74.00	-23.89	52.81	-2.70	Peak	103	174
3	4960.00	36.13	54.00	-17.87	32.10	4.03	Average	100	155
4	4960.00	48.16	74.00	-25.84	44.13	4.03	Peak	100	155
5	7440.00	41.04	54.00	-12.96	31.67	9.37	Average	100	157
6	7440.00	53.08	74.00	-20.92	43.71	9.37	Peak	100	157
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

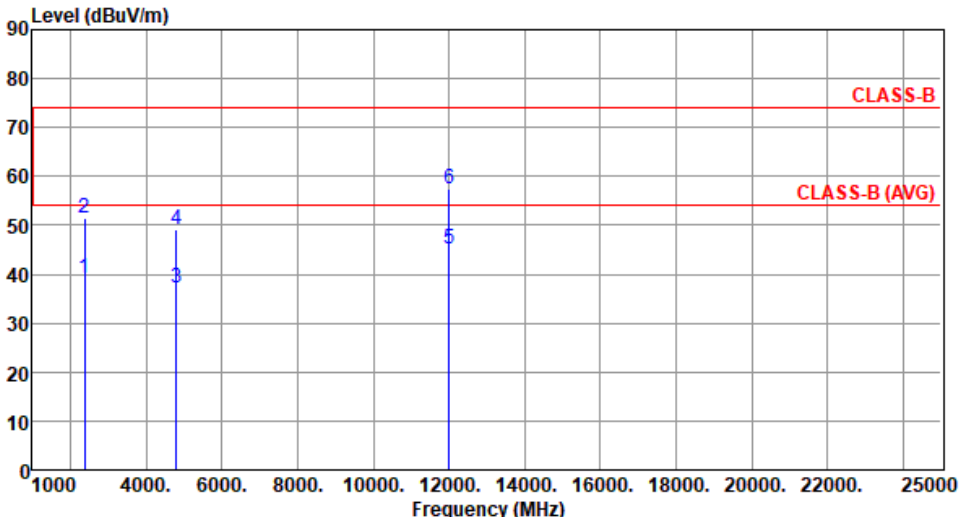Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By : Akun Chung		Temperature(°C): 22			Humidity(%): 65				
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	2390.00	39.35	54.00	-14.65	42.10	-2.75	Average	105	182
2	2390.00	51.45	74.00	-22.55	54.20	-2.75	Peak	105	182
3	4804.00	37.07	54.00	-16.93	32.94	4.13	Average	100	185
4	4804.00	49.05	74.00	-24.95	44.92	4.13	Peak	100	185
5	12010.00	45.26	54.00	-8.74	31.64	13.62	Average	100	180
6	12010.00	57.37	74.00	-16.63	43.75	13.62	Peak	100	180

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

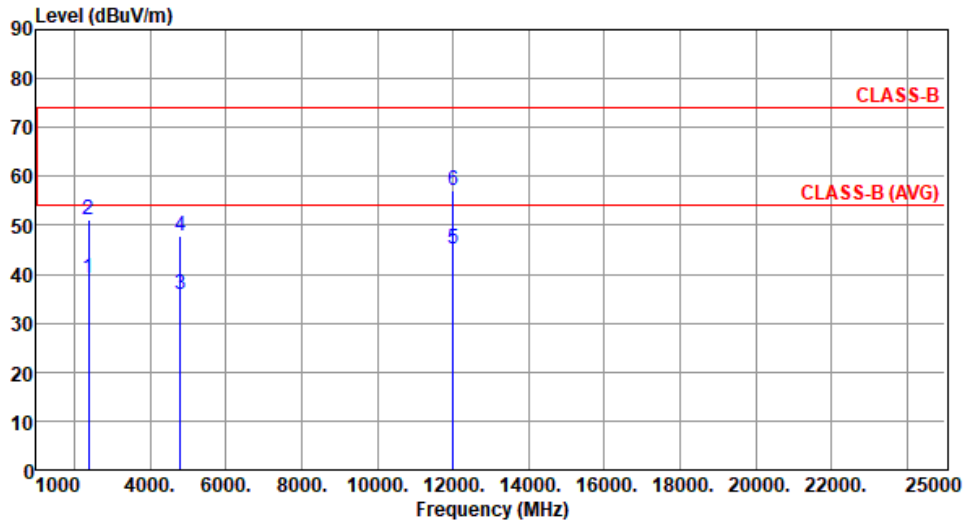

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.09	54.00	-14.91	41.84	-2.75	Average	100	178
2	2390.00	51.08	74.00	-22.92	53.83	-2.75	Peak	100	178
3	4804.00	35.70	54.00	-18.30	31.57	4.13	Average	100	152
4	4804.00	47.82	74.00	-26.18	43.69	4.13	Peak	100	152
5	12010.00	45.10	54.00	-8.90	31.48	13.62	Average	100	149
6	12010.00	57.03	74.00	-16.97	43.41	13.62	Peak	100	149


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 22 Humidity(%): 65

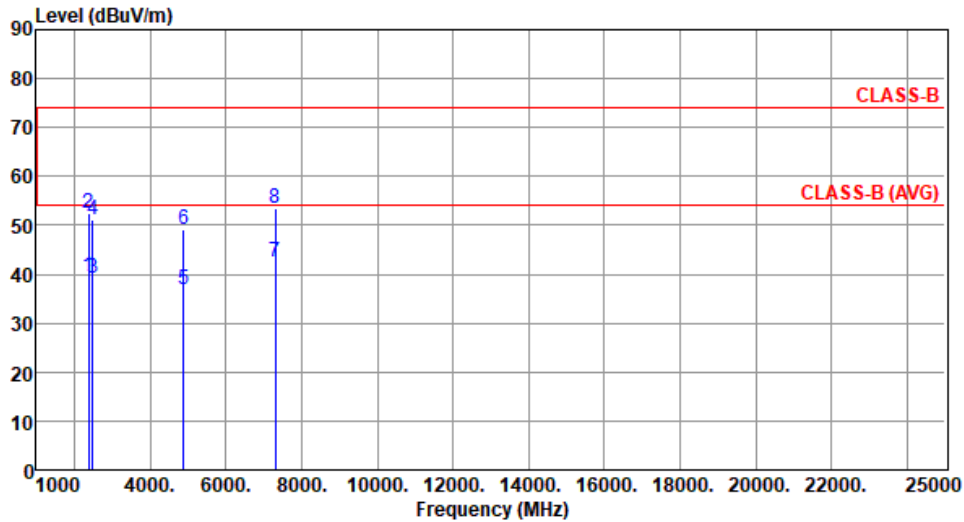


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.46	54.00	-14.54	42.21	-2.75	Average	100	187
2	2390.00	52.35	74.00	-21.65	55.10	-2.75	Peak	100	187
3	2483.50	39.30	54.00	-14.70	42.00	-2.70	Average	100	187
4	2483.50	51.29	74.00	-22.71	53.99	-2.70	Peak	100	187
5	4880.00	36.98	54.00	-17.02	32.86	4.12	Average	100	195
6	4880.00	49.07	74.00	-24.93	44.95	4.12	Peak	100	195
7	7320.00	42.44	54.00	-11.56	33.16	9.28	Average	100	182
8	7320.00	53.53	74.00	-20.47	44.25	9.28	Peak	100	182

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

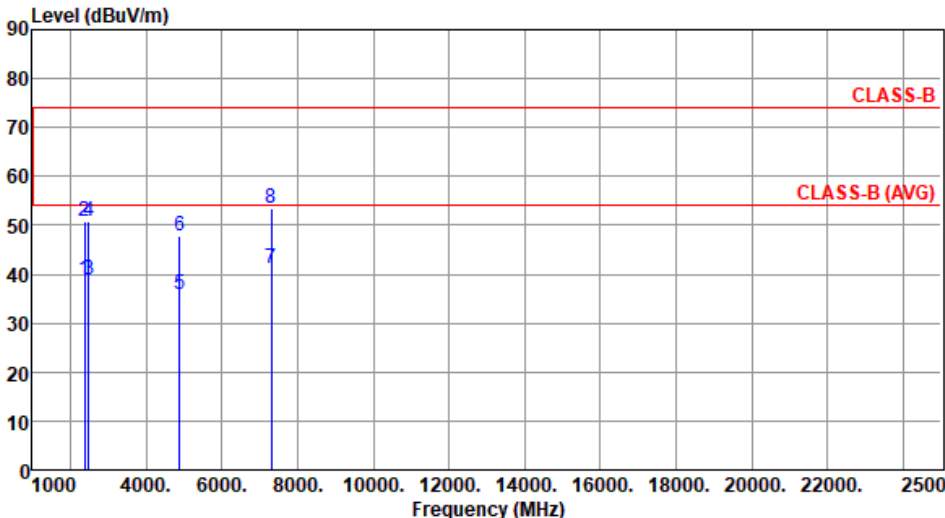Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440						
Polarization	Vertical								
Test By : Akun Chung Temperature(°C): 22 Humidity(%): 65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.94	54.00	-15.06	41.69	-2.75	Average	100	173
2	2390.00	50.89	74.00	-23.11	53.64	-2.75	Peak	100	173
3	2483.50	38.83	54.00	-15.17	41.53	-2.70	Average	100	173
4	2483.50	50.83	74.00	-23.17	53.53	-2.70	Peak	100	173
5	4880.00	35.80	54.00	-18.20	31.68	4.12	Average	100	147
6	4880.00	47.74	74.00	-26.26	43.62	4.12	Peak	100	147
7	7320.00	41.29	54.00	-12.71	32.01	9.28	Average	100	149
8	7320.00	53.55	74.00	-20.45	44.27	9.28	Peak	100	149

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

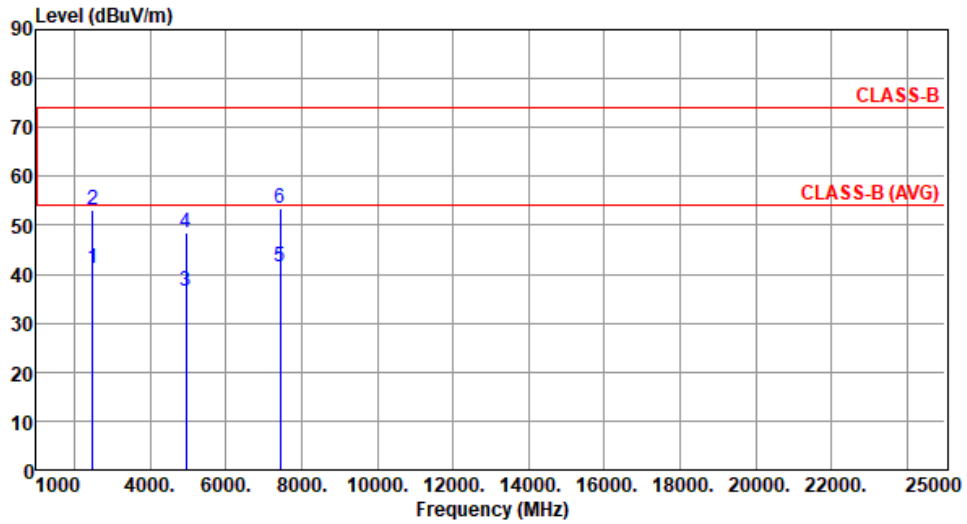

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	41.16	54.00	-12.84	43.86	-2.70	Average	100	185
2	2483.50	53.08	74.00	-20.92	55.78	-2.70	Peak	100	185
3	4960.00	36.40	54.00	-17.60	32.37	4.03	Average	100	190
4	4960.00	48.55	74.00	-25.45	44.52	4.03	Peak	100	190
5	7440.00	41.36	54.00	-12.64	31.99	9.37	Average	100	199
6	7440.00	53.40	74.00	-20.60	44.03	9.37	Peak	100	199


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

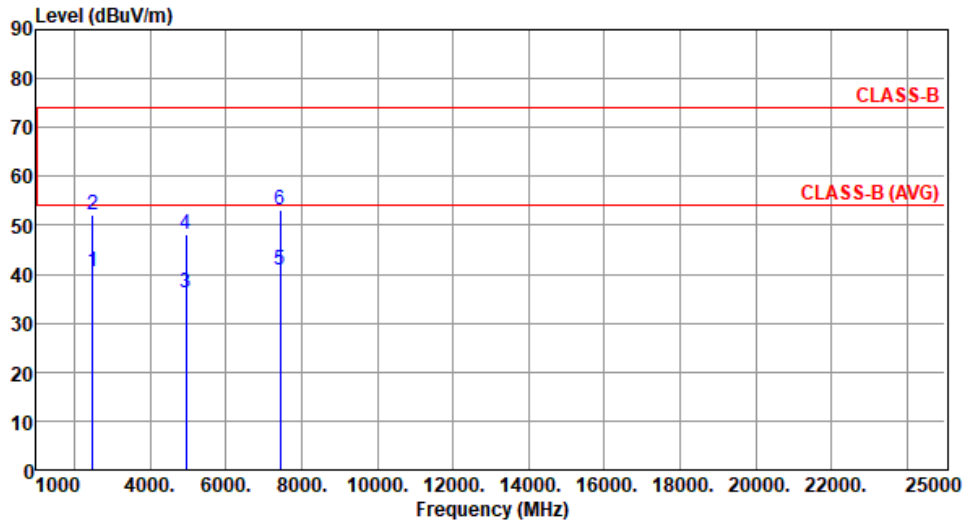

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	40.56	54.00	-13.44	43.26	-2.70	Average	100	170
2	2483.50	52.08	74.00	-21.92	54.78	-2.70	Peak	100	170
3	4960.00	36.04	54.00	-17.96	32.01	4.03	Average	100	145
4	4960.00	48.00	74.00	-26.00	43.97	4.03	Peak	100	145
5	7440.00	40.98	54.00	-13.02	31.61	9.37	Average	100	144
6	7440.00	53.01	74.00	-20.99	43.64	9.37	Peak	100	144

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement



1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup

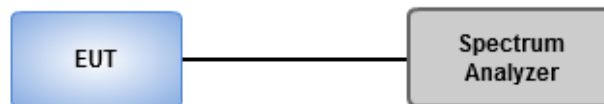


3.6.4 Test Result of Emissions in non-restricted Frequency Bands

Ambient Condition	21°C / 66%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

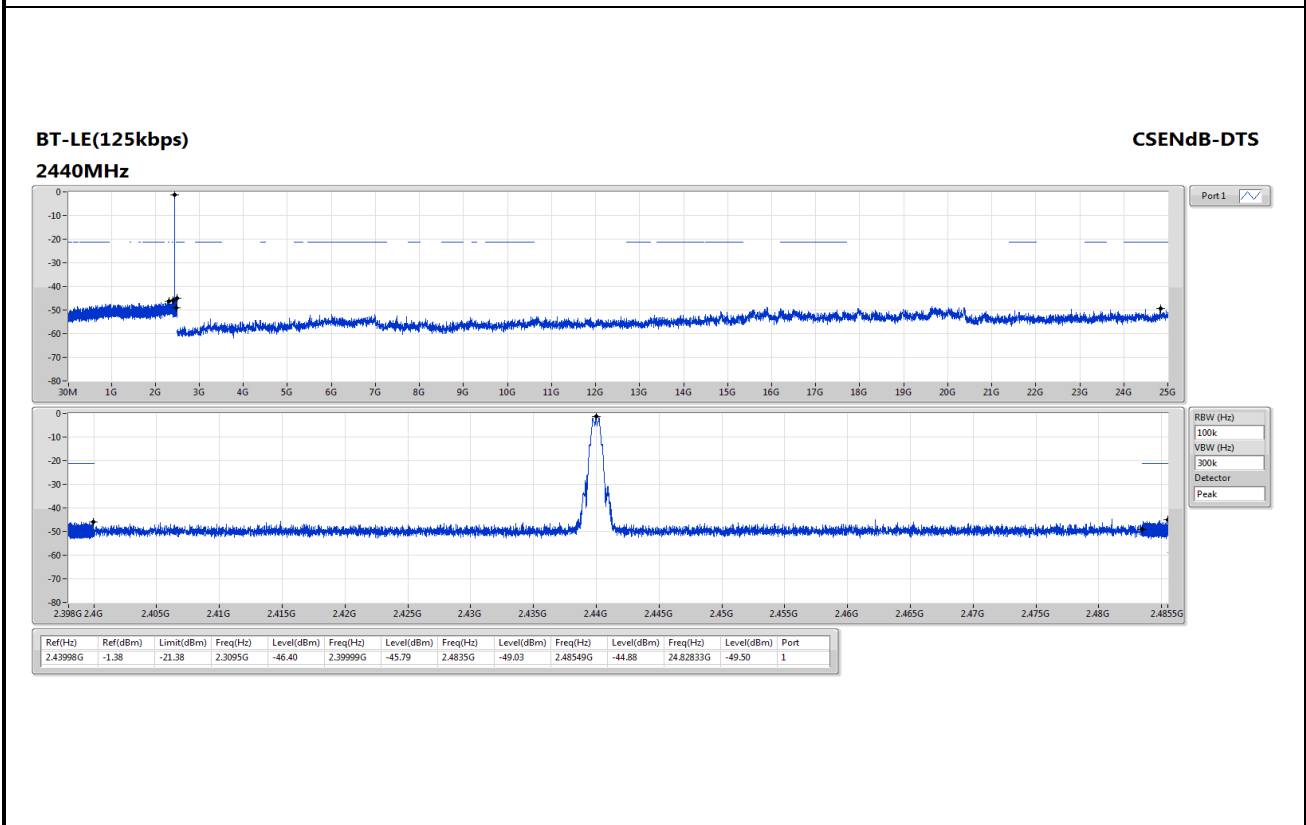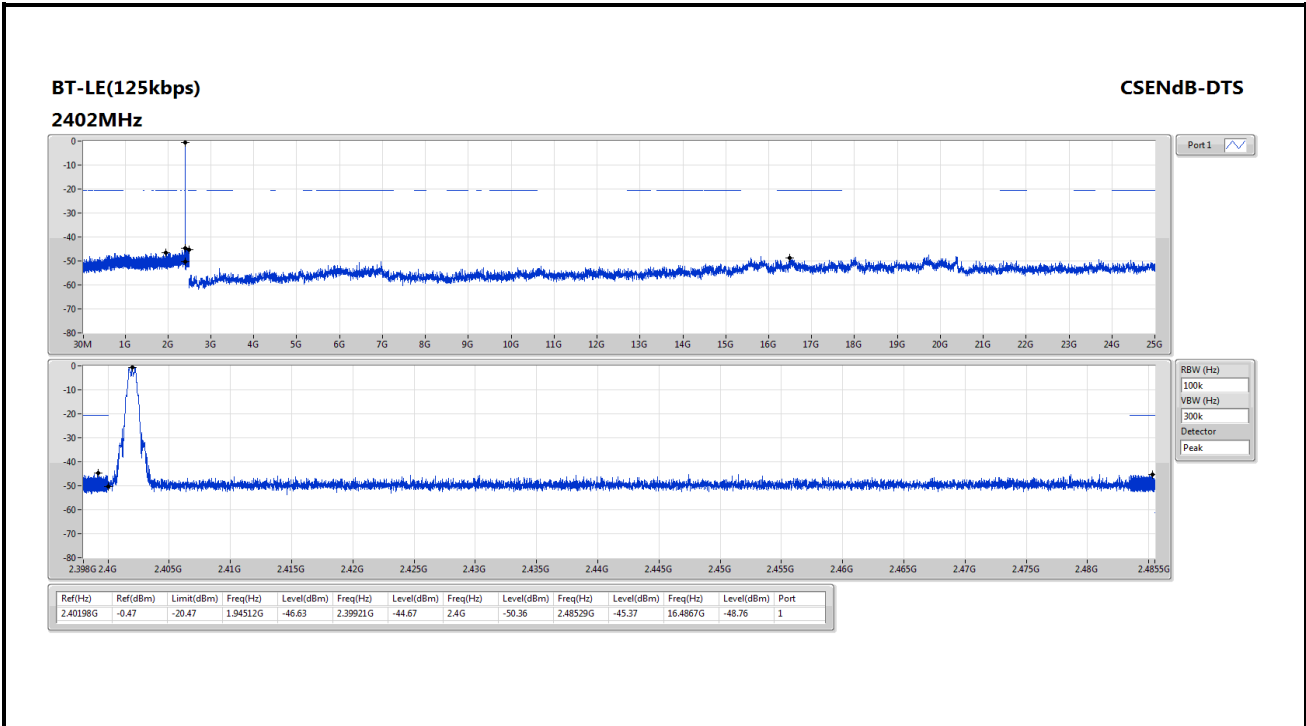


BT-LE(125kbps)
2480MHz

CSEndB-DTS

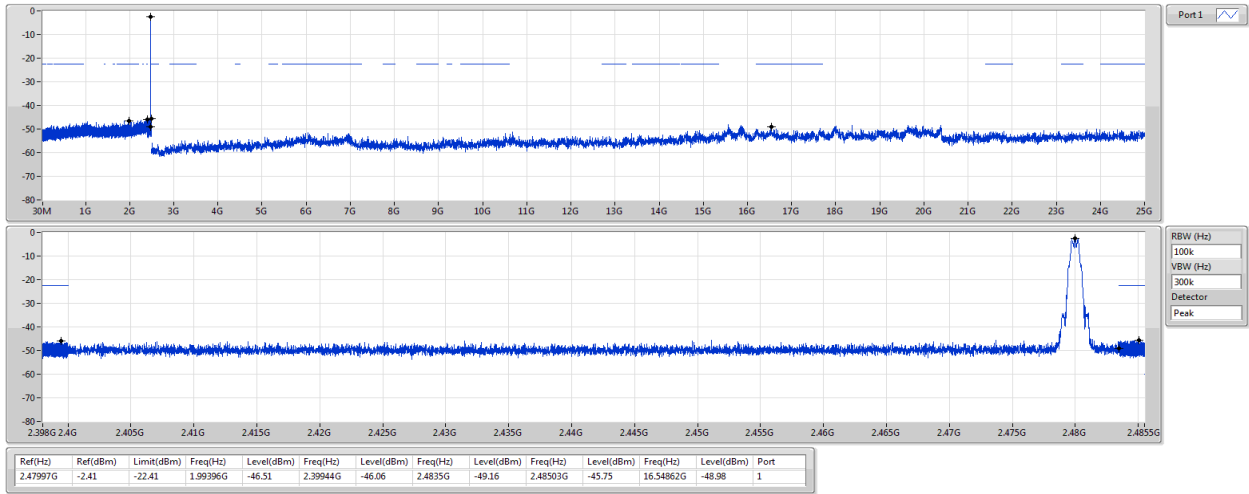


BT-LE(500kbps)
2402MHz

CSEndB-DTS

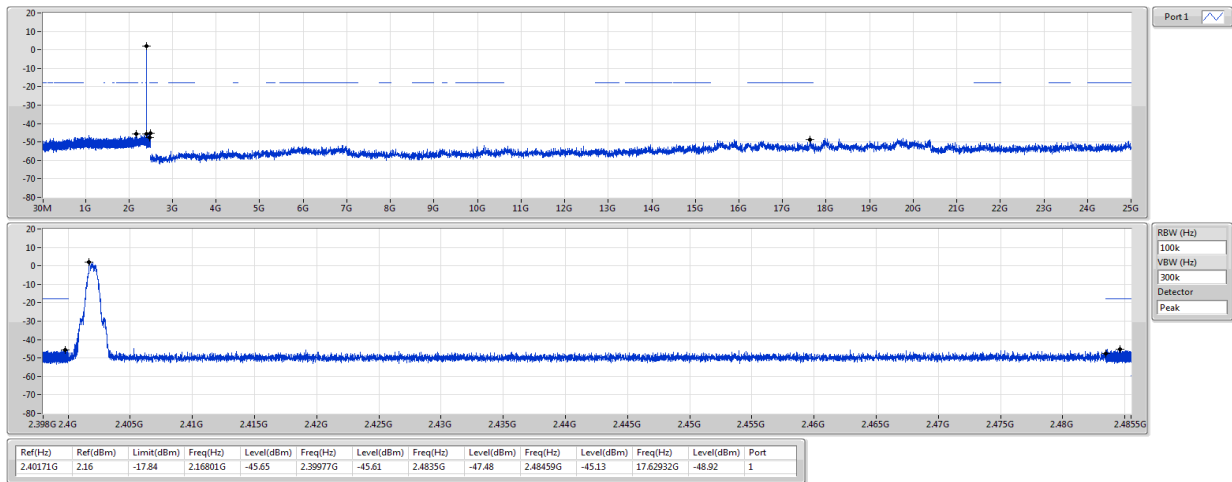


BT-LE(500kbps)
2440MHz

CSENdB-DTS

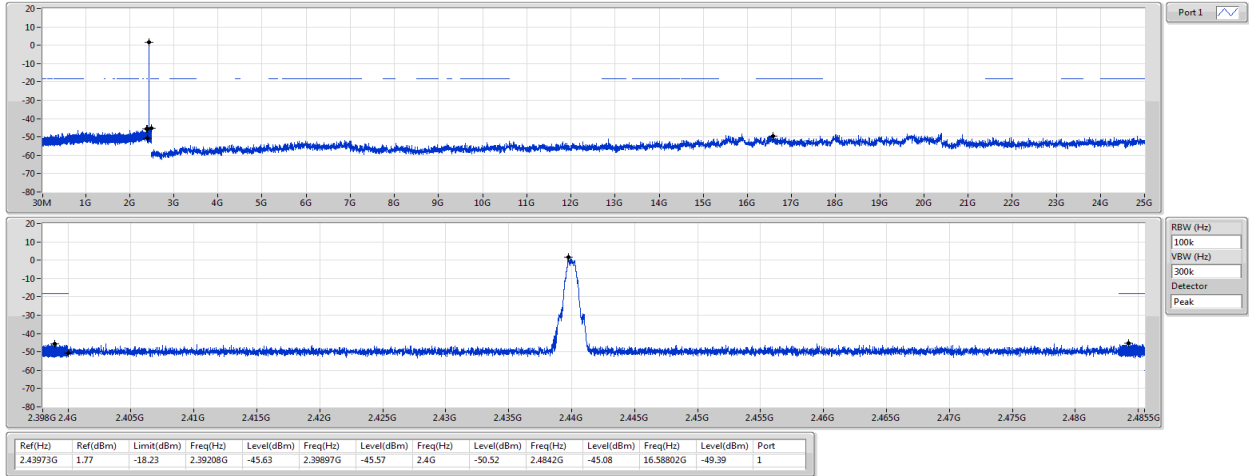


BT-LE(500kbps)
2480MHz

CSENdB-DTS

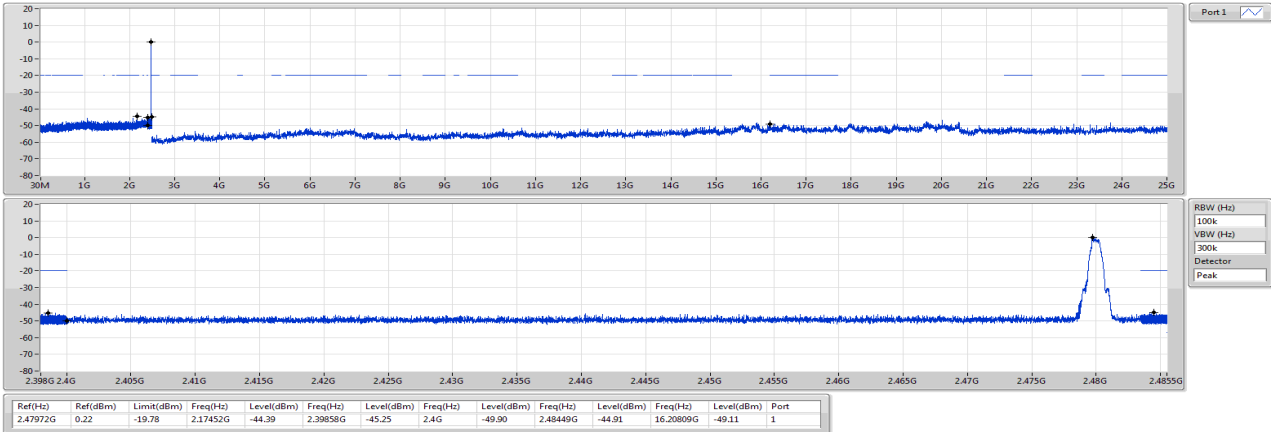


BT-LE(1Mbps)
2402MHz

CSEndB-DTS

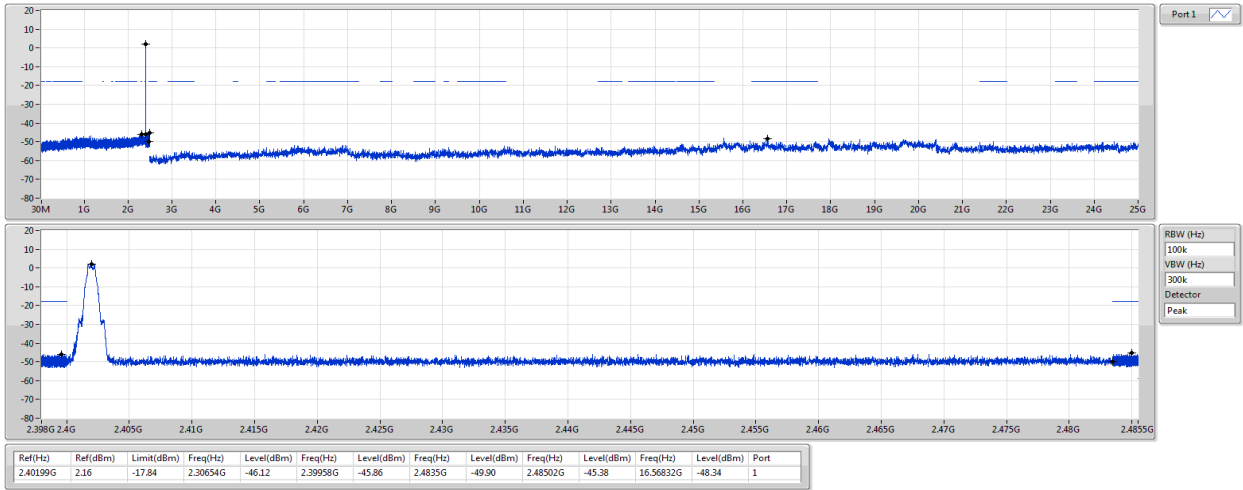


BT-LE(1Mbps)
2440MHz

CSEndB-DTS

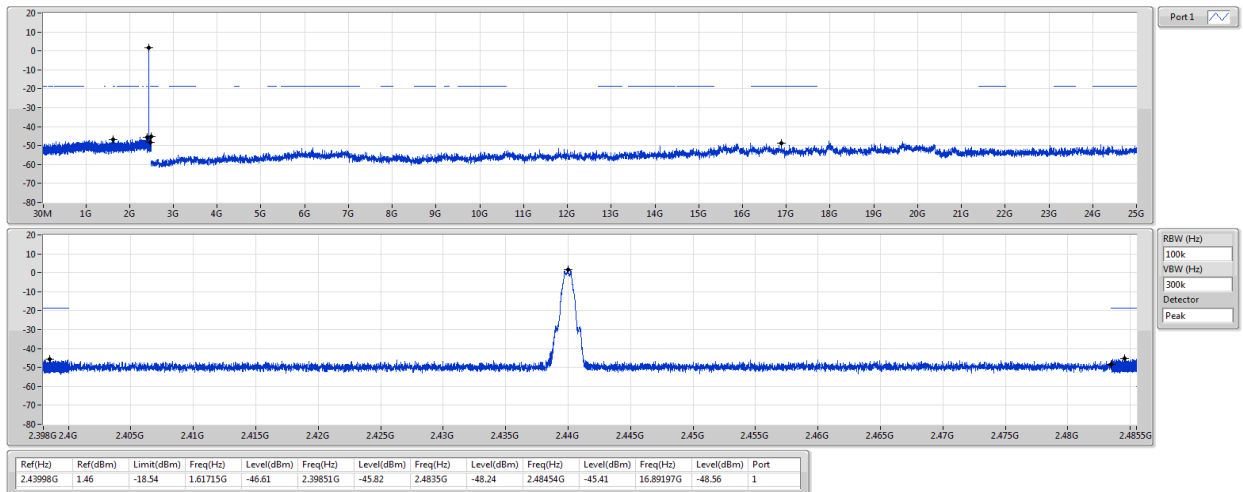


BT-LE(1Mbps)
2480MHz

CSEndB-DTS

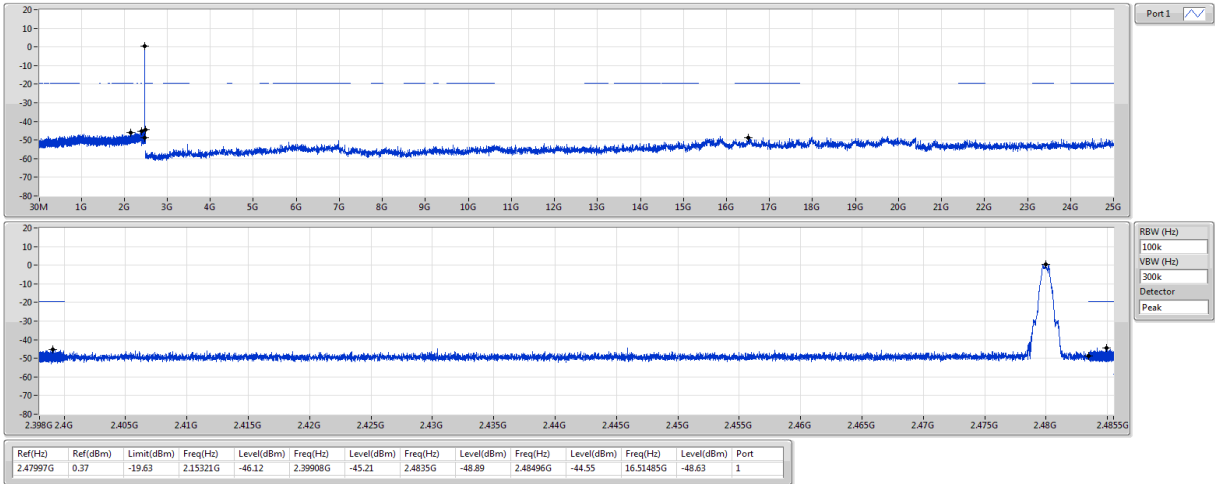


BT-LE(2Mbps)
2402MHz

CSEndB-DTS

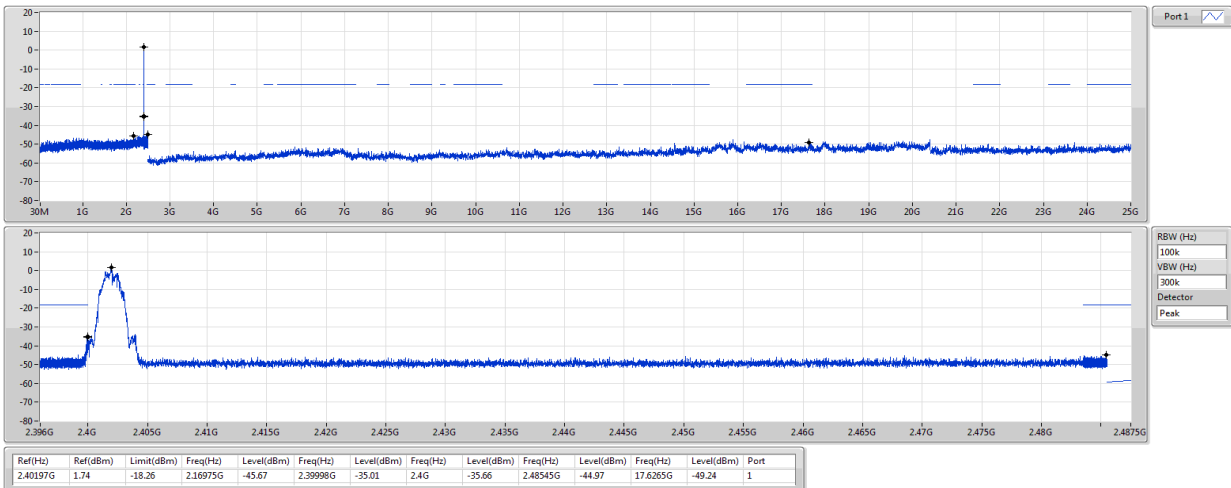


BT-LE(2Mbps)
2440MHz

CSEndB-DTS

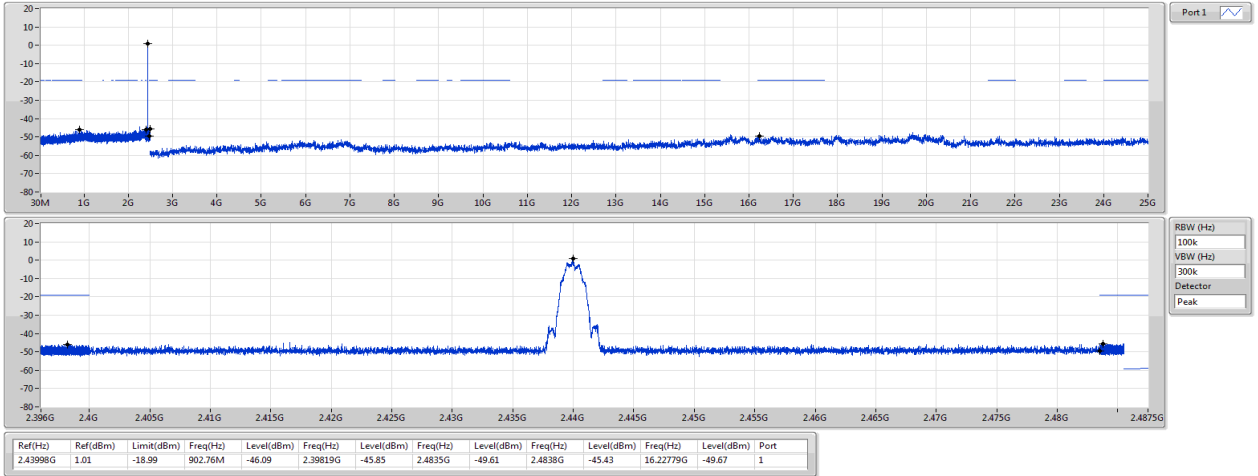

BT-LE(2Mbps)
2480MHz

CSEndB-DTS

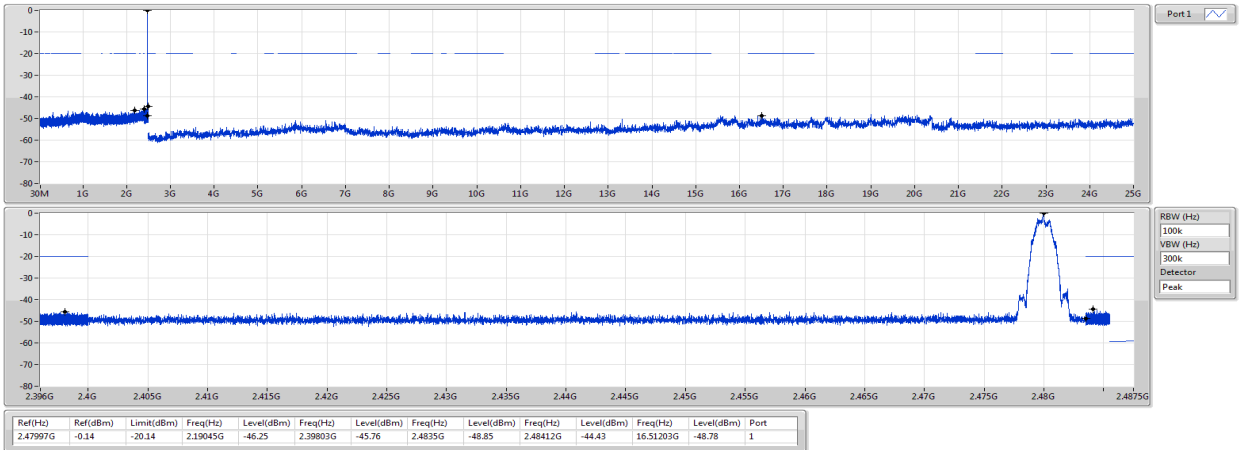

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==