



FCC TEST REPORT

REPORT NO.: RF960122H03
MODEL NO.: RSGu3500, RSGu3500-XX
RECEIVED: Jan. 22, 2007
TESTED: Jan. 31 to Feb. 13, 2007
ISSUED: Feb. 14, 2007

APPLICANT: Motorola Inc.

ADDRESS: 101 Toumament Drive, Horsham, PA 19044

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 67 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.5	DESCRIPTION OF SUPPORT UNITS	12
3.6	CONFIGURATION OF SYSTEM UNDER TEST	13
4	TEST TYPES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS.....	15
4.1.3	TEST PROCEDURES	16
4.1.4	TEST SETUP	16
4.1.5	EUT OPERATING CONDITIONS	17
4.1.6	TEST RESULTS	18
4.2	Radiated Emission Measurement.....	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	TEST INSTRUMENTS.....	21
4.2.3	TEST PROCEDURES	22
4.2.4	TEST SETUP	23
4.2.5	EUT OPERATING CONDITIONS	23
4.2.6	TEST RESULTS	24
4.2.7	TEST RESULTS - DSSS	25
4.2.8	TEST RESULTS - OFDM	32
4.3	6dB BANDWIDTH MEASUREMENT.....	39
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	39
4.3.2	TEST INSTRUMENTS.....	39
4.3.3	TEST PROCEDURE.....	40
4.3.4	TEST SETUP	40
4.3.5	EUT OPERATING CONDITIONS	40
4.3.6	TEST RESULTS –DSSS	41
4.3.7	TEST RESULTS-OFDM	44
4.4	MAXIMUM PEAK OUTPUT POWER.....	47
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	47



4.4.2	TEST INSTRUMENTS.....	47
4.4.3	TEST PROCEDURES	48
4.4.4	TEST SETUP	48
4.4.5	EUT OPERATING CONDITIONS	48
4.4.6	TEST RESULTS – DSSS	49
4.4.7	TEST RESULTS –OFDM.....	50
4.5	POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	51
4.5.2	TEST INSTRUMENTS.....	51
4.5.3	TEST PROCEDURE.....	52
4.5.4	TEST SETUP	52
4.5.5	EUT OPERATING CONDITIONS	52
4.5.6	TEST RESULTS –DSSS	53
4.5.7	TEST RESULTS –OFDM.....	56
4.6	Conducted emission and BAND EDGES MEASUREMENT	59
4.6.1	LIMITS OF condctcted emission and BAND EDGES MEASUREMENT	59
4.6.2	TEST INSTRUMENTS.....	59
4.6.3	TEST PROCEDURE.....	59
4.6.4	DEVIATION FROM TEST STANDARD.....	59
4.6.5	EUT OPERATING CONDITION.....	59
4.6.6	TEST RESULTS	60
4.7	ANTENNA REQUIREMENT	65
4.7.1	STANDARD APPLICABLE	65
4.7.2	ANTENNA CONNECTED CONSTRUCTION	65
5	INFORMATION ON THE TESTING LABORATORIES	66
	APPENDIX-A	A-1



1 CERTIFICATION

PRODUCT : Residential Seamless Mobility Gateway
BRAND NAME : Motorola
MODEL NO. : RSGu3500,RSGu3500-XX
TESTED: Jan. 31 to Feb. 13, 2007
APPLICANT : Motorola Inc.
TEST ITEM: R&D SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (Model: RSGu3500) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Claire Kuan **DATE:** Feb. 14, 2007
(Claire Kuan)

TECHNICAL ACCEPTANCE : Moris Lin **DATE:** Feb. 14, 2007
Responsible for RF (Moris Lin)

APPROVED BY : Hank Chung **DATE:** Feb. 14, 2007
(Hank Chung, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.07 dB at 0.175 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.0 dB at 4824.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Residential Seamless Mobility Gateway
MODEL NO.	RSGu3500,RSGu3500-XX
FCC ID	ACQRSGU3500
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b: 102.802mW 802.11g: 350.752mW
ANTENNA TYPE	Please see note 4 (on next page)
DATA CABLE	NA
I/O PORT	LAN Port*4, WAN Port*1, RJ-11 PORT*2

NOTE:

- The EUT has two model names which are identical to each other in all aspects except for the followings:

Brand	Model No.
Motorola	RSGu3500
	RSGu3500-XX (where XX can be a number or letter)

From the above models, model: **RSGu3500** was selected as representative model for the test and its data was recorded in this report.

2. The EUT was manufactured by following manufacturers:

Manufacturer	Manufacturer Address
SLOELECTRON (SHENZHEN) TECHNOLOGY CO., LTD	3# TIAN FU ROAD. TONG FU YU INDUSTRIAL PARK, FUYONG TOWN, BAOAN DISTRICT. SHENZHAN, CHINA.
MOTOROLA DE NOGALES S A DE C V	PARQUE INDUSTRIAL SAN CARLOS CORTINEZ Y, CALLE SAN PATRICIO LOTE 684090 NOGALES, PROLONGACION RUIZSONORA MEXICO
HONG FU JIN PRECISION INDUSTRY (SHENZHEN) CO LTD	10TH YOUSONG INDUSTRIAL DISTRICT 2ND DONGHUAN RD, NO 2 BAO'AN LONGHUA TOWN SHENZHEN GUANGDONG CHINA.

3. The EUT was pre-tested under following test modes:

Pre-test Mode	Model No.
Mode A	Talking Mode + LAN (10Mbps) + WAN (10Mbps) + RF
Mode B	Talking Mode + LAN (100Mbps) + WAN (100Mbps) + RF

4. There are two antennas provided to this EUT, please refer to the following table:

No.	Gain (dBi)	Antenna Type	Connector
1	2	Chip (only Rx function)	NA
2	3.8	Dipole	Reverse Polarity SMA Connector

From above antennas, antenna 2 was selected as representative antennas for the test

5. The EUT could be supplied with the following power adapters:

Brand:	DELTA ELECTRONICS, INC.
Model No.:	ADP-15ZB B
Input power :	AC 100-240V 0.5A, 50-60Hz (Unshielded, w/o core, 2.0m)
Output power :	DC 12V, 1.25A, with one core, Non-shielded, 1.9M

6. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.

7. The EUT complies with IEEE 802.11g standards, and backwards compatible with IEEE 802.11b products.

8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE [≥] 1G	APCM	
Antenna 2	√	√	√	√	NA

Where PLC: Power Line Conducted Emission RE<1G: Radiated Emission below 1GHz
 RE[≥]1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	11	DSSS	CCK	1

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	11	DSSS	CCK	1

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Bandedge Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Residential Seamless Mobility Gateway. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For conducted & radiated test items:


No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	Dell	PP18L	6976685584	DoC
2	NOTEBOOK COMPUTER	Dell	PP19L	CN-OHC416-70166-5C A-0448	DoC
3	NOTEBOOK COMPUTER	DELL	PP21L	CN-0GD366-70166-5B 3-09ZX	QDS-BRCM1016
4	TELEPHONE	Fujisu	K-903S	13B0001742	NA
5	TELEPHONE	Fujisu	K-903S	13B0001524	NA
6	HUB	AVSYS	110H8	01-20E-000002	NA

No.	Signal cable description
1	NA
2	NA
3	NA
4	3.0 m nonshielded telephone wire, terminated with RJ11 connector, w/o core.
5	3.0 m nonshielded telephone wire, terminated with RJ11 connector, w/o core.
6	NA

NOTE: All power cords of the above support units are non-shielded (1.8m).


3.6 CONFIGURATION OF SYSTEM UNDER TEST

For conducted test items:

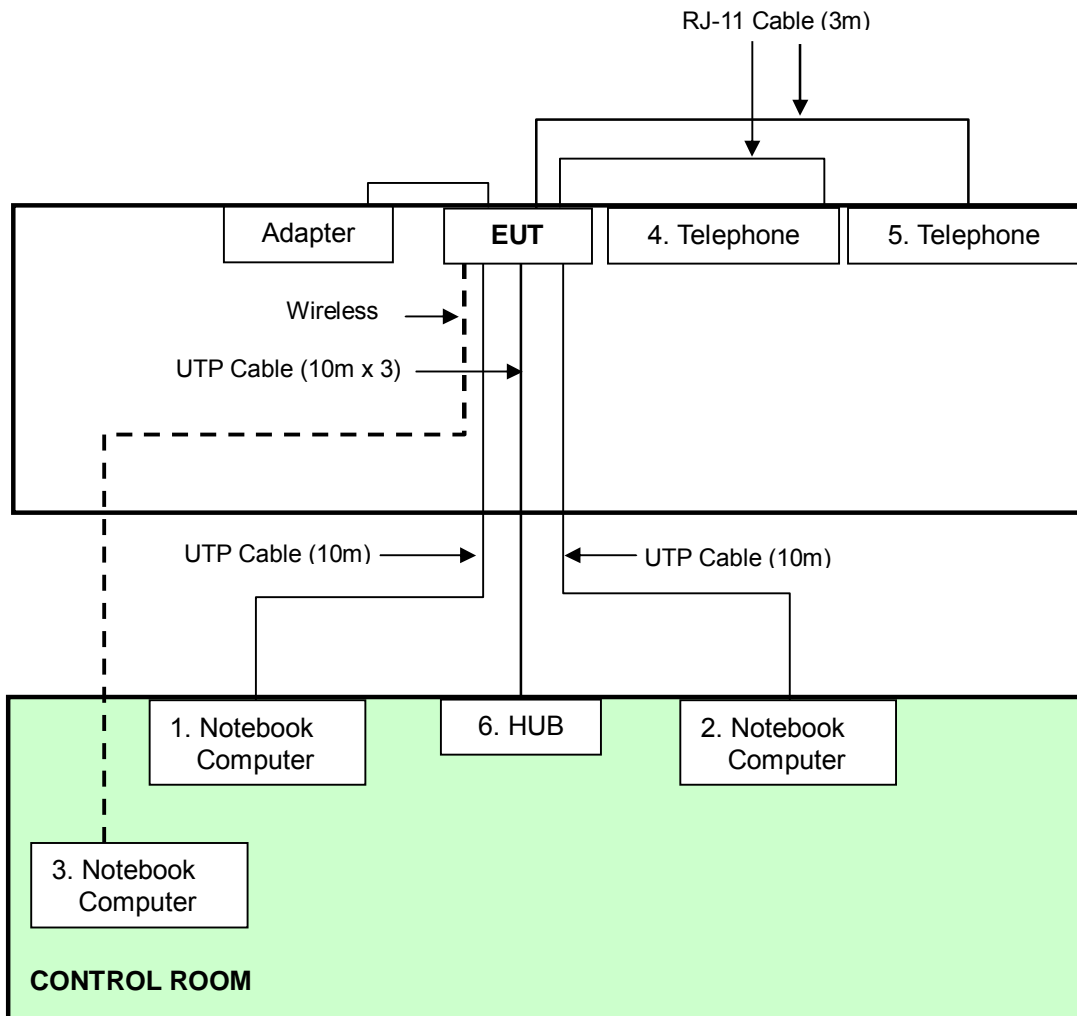

- NOTE:**
1. Support units 1-3, 6 were kept in the control room during the test.
 2. Please refer to the photos of test configuration in Item 6 also.

For Radiated test items:

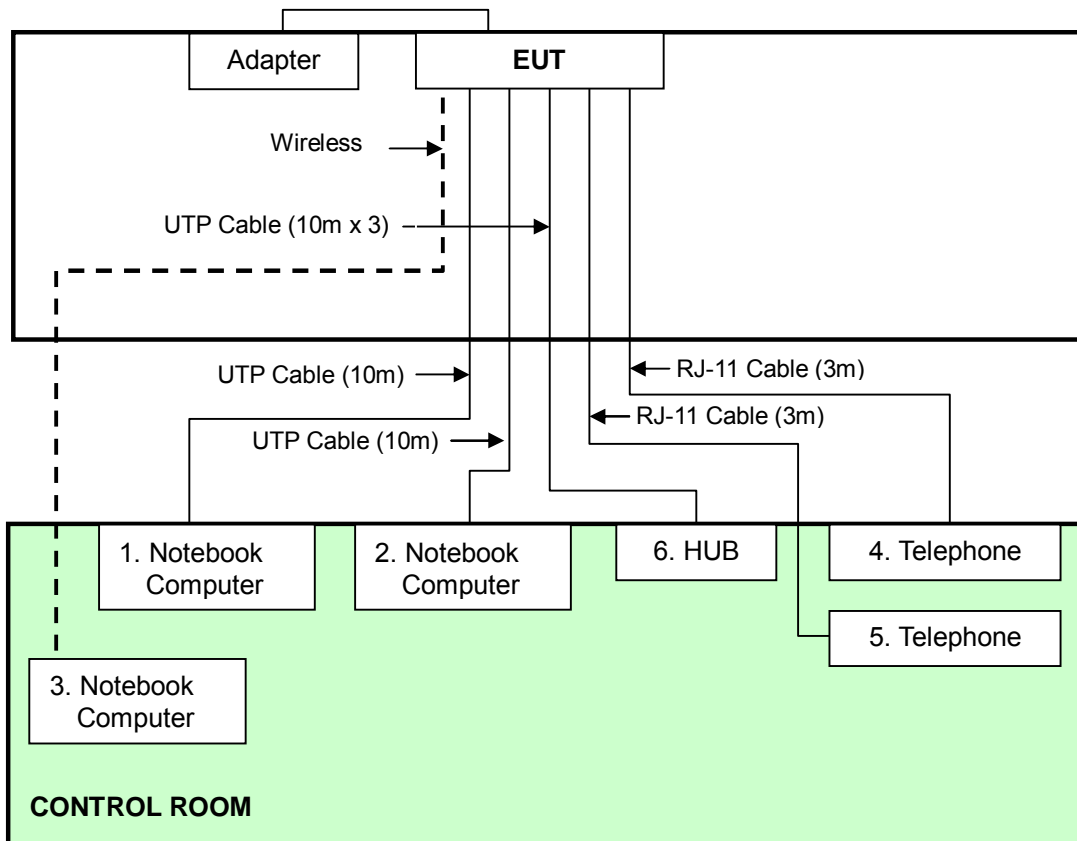

NOTE: 1. Support units 1-6 were kept in the control room during the test.
 2. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Sep. 19, 2007
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 26, 2007
Line-Impedance Stabilization Network(for Peripheral)	KNW-407	8/1395/12	Aug. 15, 2007
RF Cable (JETBAO)	RG233/U	Cable_CB_01	Dec. 09, 2007
Terminator	50	2	Oct. 30, 2007
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. B.
 3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

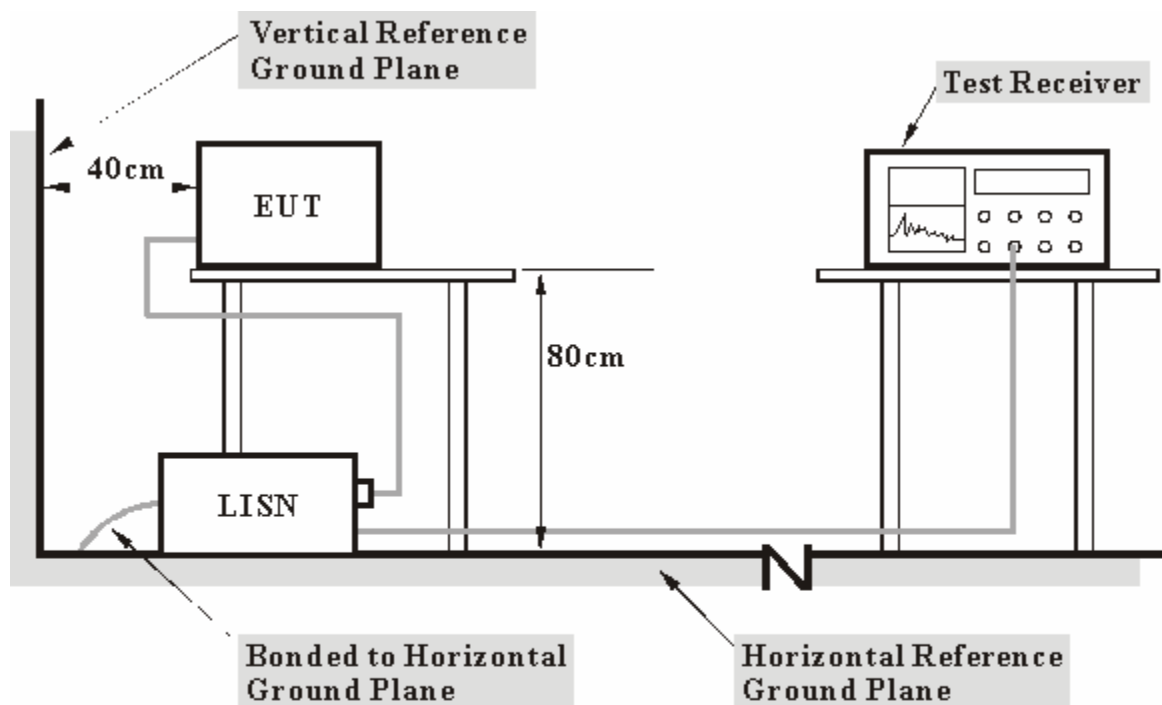

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared other computer systems (support unit 1 and support unit 2) to act as communication partner and placed them outside of testing area.
- c. The communication partner runs test program "Ping.exe" to enable EUT under transmission/receiving condition continuously via UTP cables.
- d. Support unit 4 and support unit 5 communicated to each other via EUT.
- e. Support unit 3 communicated to each other via EUT by wireless.

4.1.6 TEST RESULTS

INPUT POWER (SYSTEM)	120Vac, 60 Hz		
PHASE	Line (L)	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 971hPa	TRANSFER RATE	1Mbps
TESTED BY	Wen Yu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.175	9.60	42.06	-	51.66	-	64.73
2	0.218	9.60	33.82	-	43.42	-	62.90	52.90	-19.48	-
3	0.263	9.60	28.26	-	37.86	-	61.33	51.33	-23.47	-
4	0.306	9.60	29.54	-	39.14	-	60.07	50.07	-20.93	-
5	0.349	9.60	24.28	-	33.88	-	58.98	48.98	-25.10	-
6	0.873	9.60	20.93	-	30.53	-	56.00	46.00	-25.47	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

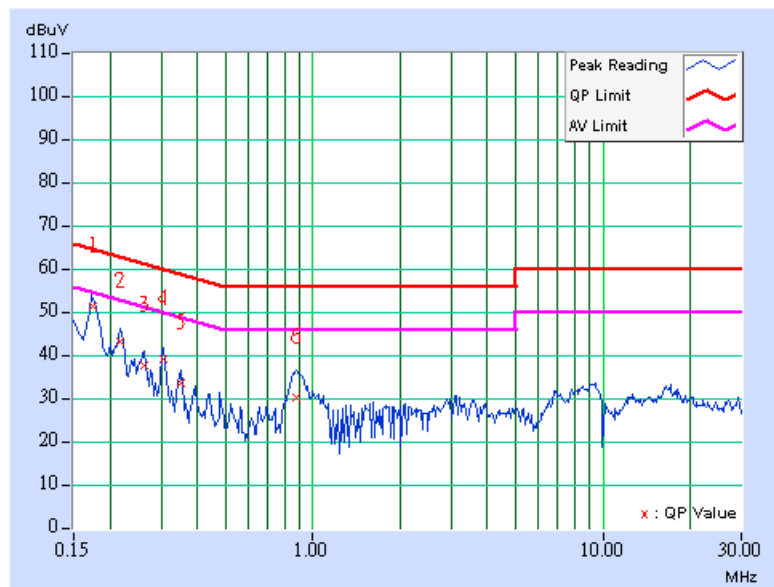

INPUT POWER (SYSTEM)	120Vac, 60 Hz		
PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 971hPa	TRANSFER RATE	1Mbps
TESTED BY	Wen Yu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	9.60	41.74	-	51.34	-	64.79	54.79	-13.45	-
2	0.216	9.60	33.06	-	42.66	-	62.96	52.96	-20.30	-
3	0.259	9.60	27.61	-	37.21	-	61.45	51.45	-24.24	-
4	0.306	9.60	31.52	-	41.12	-	60.07	50.07	-18.95	-
5	0.392	9.60	23.25	-	32.85	-	58.02	48.02	-25.17	-
6	0.869	9.60	18.48	-	28.08	-	56.00	46.00	-27.92	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

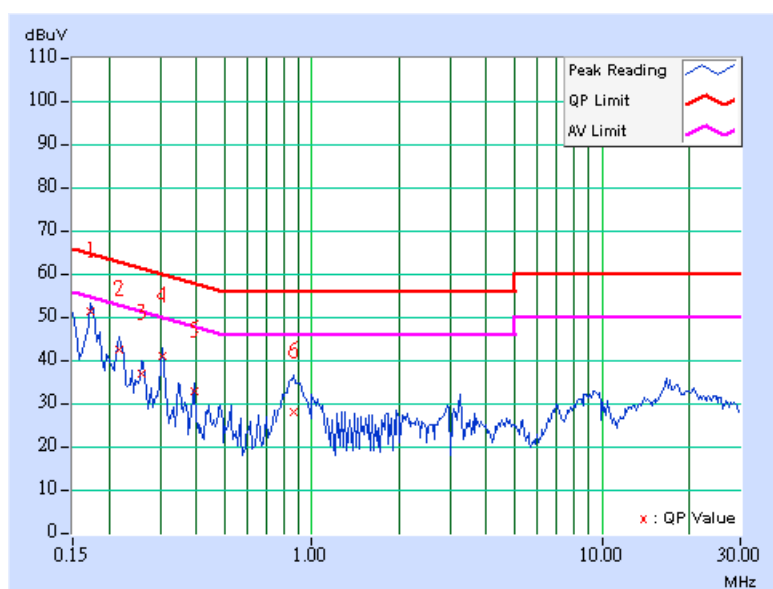

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Analyzer	FSP40	1093449540	Aug. 15, 2007
HP Pre_Amplifier	8449B	3008A01922	Sep. 18, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 20, 2007
CHASE Broadband Antenna	VULB 9168	138	Dec. 11, 2007
Schwarzbeck Horn_Antenna	BBHA9120	D124	Jan. 01, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2008
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
R&S Loop Antenna	HFH2-Z2	881058/15	Nov. 29, 2007
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 14. 2007
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Jul. 15, 2007
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~40GHz)	1.88 dB

8. Loop antenna was used for all emissions below 30 MHz.


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

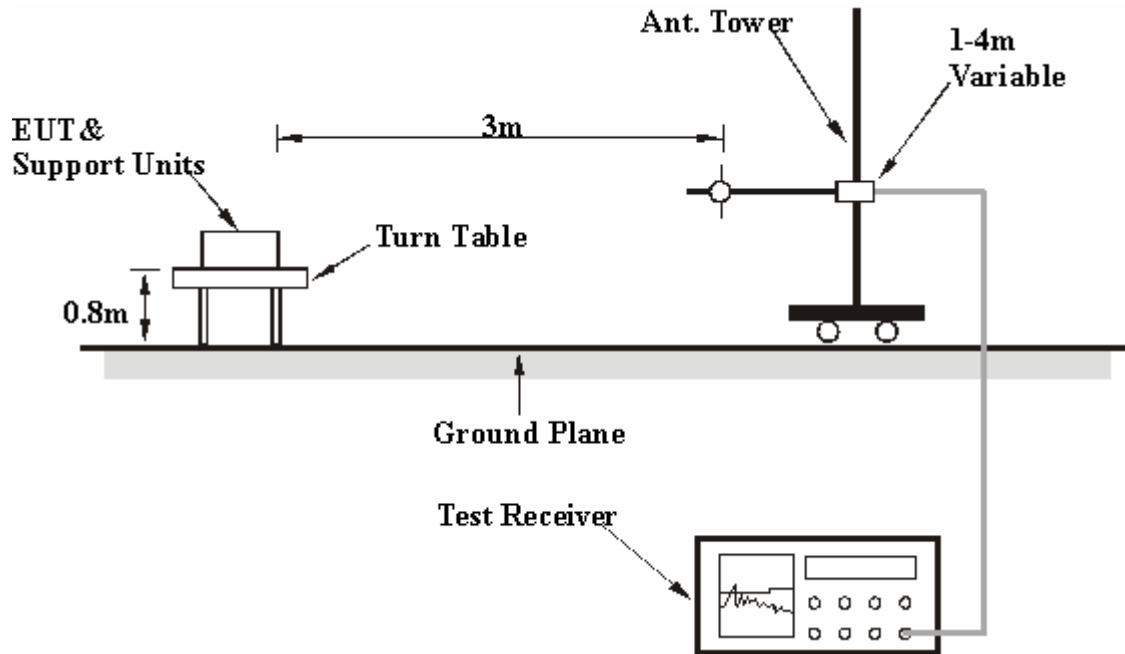

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5

4.2.6 TEST RESULTS

Below 1GHz Worst-Case Data

MODULATION TYPE	DSSS	CHANNEL	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	16deg. C, 63%RH, 961hPa	TRANSFER RATE	1Mbps
TESTED BY	Tony Chen	DETECTOR FUNCTION	Quasi-Peak, 120kHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	36.60 QP	43.50	-6.90	1.33 H	283	24.30	12.20
2	187.50	31.60 QP	43.50	-11.90	1.14 H	45	19.10	12.50
3	250.01	41.10 QP	46.00	-4.90	1.21 H	215	27.30	13.80
4	375.01	42.80 QP	46.00	-3.20	1.08 H	42	24.60	18.20
5	481.25	36.00 QP	46.00	-10.00	1.53 H	3	14.70	21.30
6	518.75	42.40 QP	46.00	-3.60	1.38 H	173	20.10	22.30
7	543.75	42.40 QP	46.00	-3.60	1.29 H	278	19.40	23.10
8	750.00	39.30 QP	46.00	-6.70	1.19 H	99	12.00	27.40
9	875.01	40.10 QP	46.00	-5.90	1.42 H	167	11.40	28.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.76	33.90 QP	40.00	-6.10	1.23 V	285	19.40	14.40
2	81.23	31.60 QP	40.00	-8.40	1.50 V	255	21.70	9.90
3	124.99	35.30 QP	43.50	-8.20	1.18 V	34	23.10	12.20
4	187.50	31.20 QP	43.50	-12.30	1.12 V	221	18.70	12.50
5	375.01	35.90 QP	46.00	-10.10	1.18 V	120	17.70	18.20
6	481.25	37.00 QP	46.00	-9.00	1.01 V	16	15.70	21.30
7	518.75	42.40 QP	46.00	-3.60	1.00 V	21	20.10	22.30
8	543.75	42.10 QP	46.00	-3.90	1.00 V	8	19.00	23.10
9	875.01	39.30 QP	46.00	-6.70	1.20 V	117	10.70	28.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS - DSSS 802.11b DSSS modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	13 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.10 PK	74.00	-16.90	1.50 H	265	25.20	31.90
1	2390.00	46.20 AV	54.00	-7.80	1.50 H	265	14.30	31.90
2	*2412.00	104.80 PK			1.52 H	266	72.80	32.00
2	*2412.00	99.80 AV			1.52 H	266	67.80	32.00
3	4824.00	51.70 PK	74.00	-22.30	1.60 H	113	15.70	36.00
3	4824.00	47.20 AV	54.00	-6.80	1.60 H	113	11.20	36.00
4	7236.00	51.70 PK	74.00	-22.30	1.28 H	203	9.50	42.20
4	7236.00	38.50 AV	54.00	-15.50	1.28 H	203	-3.70	42.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.90 PK	74.00	-11.10	1.03 V	25	31.00	31.90
1	2390.00	51.30 AV	54.00	-2.70	1.03 V	25	19.40	31.90
2	*2412.00	113.50 PK			1.00 V	26	81.50	32.00
2	*2412.00	108.80 AV			1.00 V	26	76.80	32.00
3	4824.00	55.70 PK	74.00	-18.30	1.47 V	334	19.70	36.00
3	4824.00	53.00 AV	54.00	-1.00	1.47 V	334	17.00	36.00
4	7236.00	51.80 PK	74.00	-22.20	1.27 V	240	9.60	42.20
4	7236.00	38.70 AV	54.00	-15.30	1.27 V	240	-3.50	42.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	13 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.60 PK			1.49 H	108	71.50	32.10
1	*2437.00	98.20 AV			1.49 H	108	66.10	32.10
2	4874.00	49.70 PK	74.00	-24.30	1.62 H	136	13.60	36.10
2	4874.00	43.20 AV	54.00	-10.80	1.62 H	136	7.10	36.10
3	7311.00	52.30 PK	74.00	-21.70	1.39 H	133	9.80	42.50
3	7311.00	39.60 AV	54.00	-14.40	1.39 H	133	-2.90	42.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.70 PK			1.30 V	0	78.60	32.10
1	*2437.00	105.80 AV			1.30 V	0	73.70	32.10
2	4874.00	54.40 PK	74.00	-19.60	1.29 V	331	18.30	36.10
2	4874.00	51.50 AV	54.00	-2.50	1.29 V	331	15.40	36.10
3	7311.00	52.50 PK	74.00	-21.50	1.23 V	243	10.00	42.50
3	7311.00	39.90 AV	54.00	-14.10	1.23 V	243	-2.60	42.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	13 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M



No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.10 PK			1.40 H	106	70.90	32.20
1	*2462.00	97.80 AV			1.40 H	106	65.60	32.20
2	2483.50	56.60 PK	74.00	-17.40	1.41 H	107	24.30	32.30
2	2483.50	45.90 AV	54.00	-8.10	1.41 H	107	13.60	32.30
3	4924.00	50.70 PK	74.00	-23.30	1.51 H	114	14.50	36.20
3	4924.00	44.80 AV	54.00	-9.20	1.51 H	114	8.60	36.20
4	7386.00	53.10 PK	74.00	-20.90	1.21 H	103	10.30	42.80
4	7386.00	39.50 AV	54.00	-14.50	1.21 H	103	-3.30	42.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.60 PK			1.00 V	359	78.40	32.20
1	*2462.00	105.90 AV			1.00 V	359	73.70	32.20
2	2483.50	61.70 PK	74.00	-12.30	1.25 V	0	29.40	32.30
2	2483.50	49.00 AV	54.00	-5.00	1.25 V	0	16.70	32.30
3	4924.00	53.80 PK	74.00	-20.20	1.57 V	48	17.60	36.20
3	4924.00	51.20 AV	54.00	-2.80	1.57 V	48	15.00	36.20
4	7386.00	53.20 PK	74.00	-20.80	1.25 V	63	10.40	42.80
4	7386.00	39.90 AV	54.00	-14.10	1.25 V	63	-2.90	42.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

RESTRICTED BANDEDGE (802.11b MODE, CH1, VERTICAL)

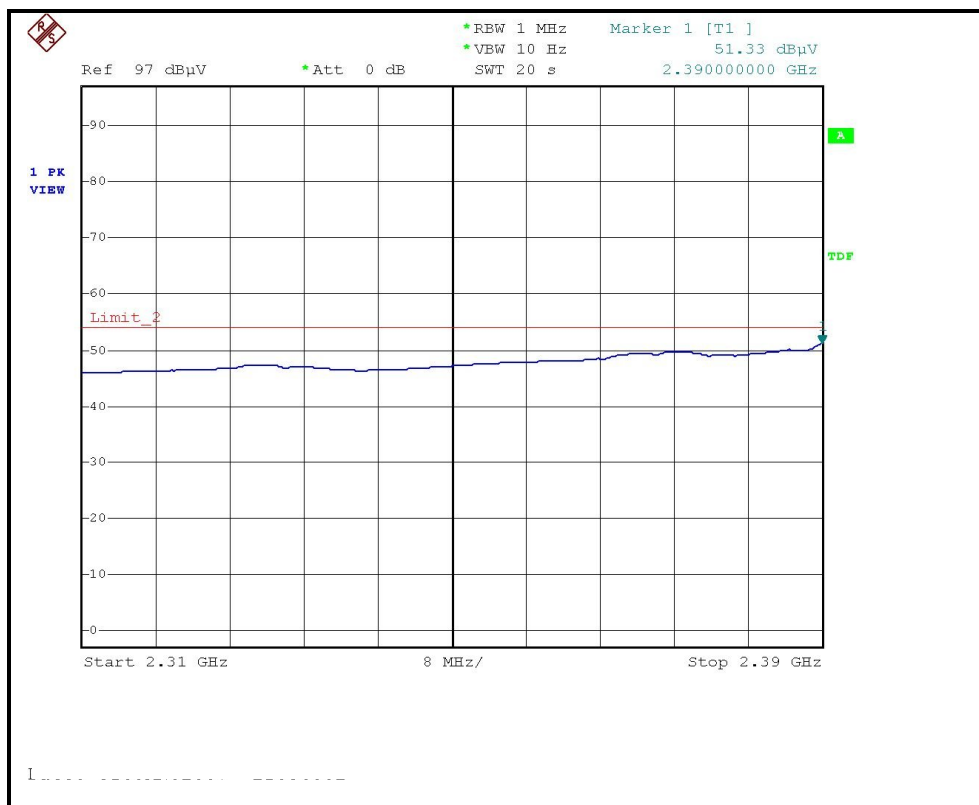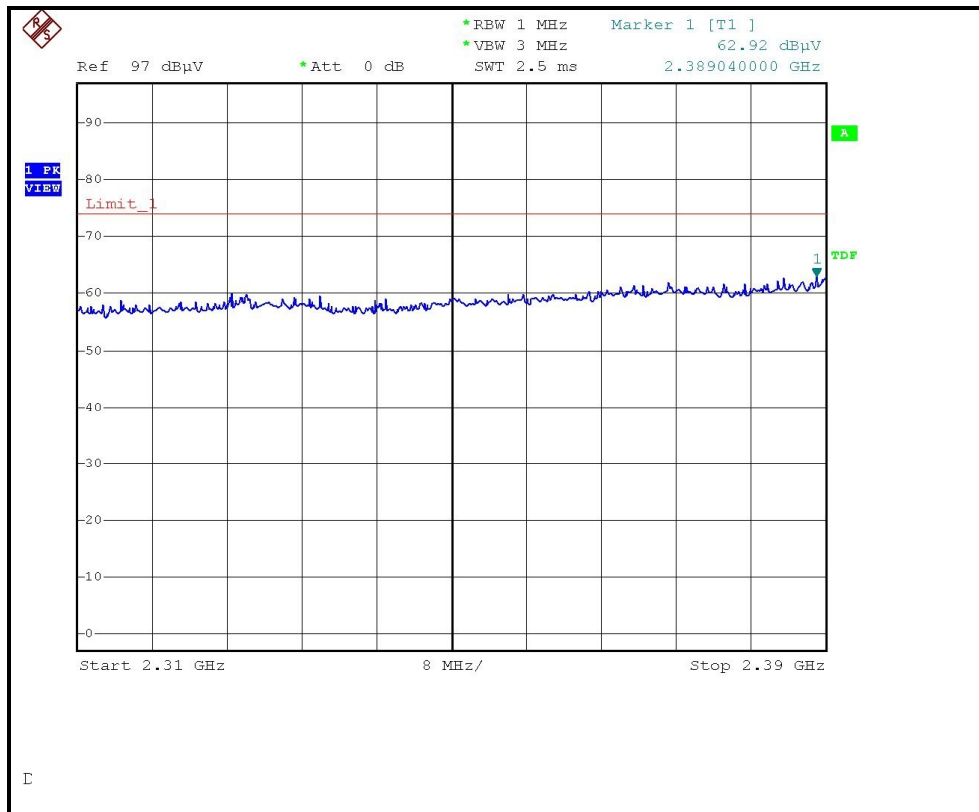

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

