

# Test Report

(FCC Rules 2.1046/2.1047/2.1049/2.1051/2.1053/2.1055/80.217)


**For**

**Trade name: Furuno**  
**Model: Transceiver for Marine Radar**  
**Type: RTR-081A**

**Report no.: FLI 12-10-082**  
**Date of issue: 13 January 2011**

**Furuno Labotech International Co., Ltd.**  
9-52 Ashihara-cho, Nishinomiya City, Hyogo 662-8580, Japan  
Tel: +81-798-63-1094 Fax: +81-798-63-1098

## Report Summary

FLI project number:	FLI 04-10-0351					
Test report number of initial issue:	FLI 12-10-082			Date of initial issue		13 January 2011
Test report number of revised/replaced issue:	---			Date of revised/replaced issue		---
Test report revision/ replacement history:	Test report no.	Rev. no.	Date	Page	Item	Description of change/reason
	---	---	---	---	---	---
Test standard(s)/ Test specifications:	FCC 47 CFR, Sections: 2.1046 - RF Power Output, 2.1047 - Modulation Characteristics, 2.1049 - Occupied Bandwidth, 2.1051 - Spurious Emissions at Antenna Terminal, 2.1055 - Frequency Stability, 2.1053 - Field Strength of Spurious Radiation, 80.217 - Suppression of Interference Aboard Ships. (Date of issue: 1 October 2008)					
Customer:	Furuno Electric Co., Ltd. 9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan					
Manufacturer:	Furuno Electric Co., Ltd. 9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan					
Trade name:	FURUNO					
Model:	Transceiver for Marine Radar					
Type:	RTR-081A					
Product function and intended use:	For Marine Safety navigation					
Number of samples tested:	One					
Serial number:	R147-0340					
Power rating:	100 - 115/ 200 - 230 VAC, 50/60 Hz, 3.2/1.6A (for Processer Unit RPU-013) (The EUT was powered through the Processor unit, not directly from AC mains.					
Product status:	Pre-production model					
Modifications made to samples during testing:	None.					
Date of receipt of samples:	5 July 2010					
Test period:	5 July 2010 to 6 December 2010					
Place of test:	Furuno Labotech International Co., Ltd. - Nishinomiya Lab. 9-52 Ashihara-Cho, Nishinomiya City, Hyogo Prefecture, 662-8580 Japan - Nishinomiya-Hama Lab. 2-20 Nishinomiya-Hama, Nishinomiya City, Hyogo Prefecture, 662-0934 Japan Anechoic Chamber used for the test has been registered by FCC. <b>(File number: 90607)</b>					
Test results/ Compliance:	Passed. The test results of this report relate only to the samples tested.					
Tested by:	Katsumi Imamura					
Written by:	Akiko Inoue					
Verified by:	Yoshihiro Ishii					
Approved by:	Date: 13 January 2011 Name: Yoshihiro Ishii Title: Manager, Technical Section, Furuno Labotech International Co., Ltd. Signature: <div style="text-align: center; margin-top: 20px;">  </div>					

## Testing Laboratory Status

Furuno Labotech International Co., Ltd. (hereafter called FLI) has been holding the following status after having been assessed according to the provisions of ISO/IEC 17025 and/or the relevant rules:

(1) Telefication Listed Testing Laboratory:

- listed by Telefication B. V., Edisonstraat 12a, 6902 PK Zevenaar, The Netherlands
- Laboratory assignment number: L116
- Date of initial certification: 26 July 1999 (\*)
- for testing the following product categories/ test standards:
  - EN 60945, Maritime navigation and radiocommunication equipment and systems - General requirements.
  - IEC 61162-1/-2, Maritime navigation and radiocommunication equipment and systems - Digital interfaces - Part 1: Single talker and multiple listeners / Part 2: Single talker and multiple listeners, high speed transmission.

(2) BSH Recognized Testing Laboratory:

- recognized by Bundesamt für Seeschifffahrt und Hydrographie, Bernhad-Nocht-Str. 78, 20359 Hamburg, Federal Republic of Germany
- Recognition certificate number: BSH4613/06201/0835/08
- Date of initial certification: 4 April 2003 (\*)
- for testing in the fields of:
  - “Marine navigational and radiocommunication equipment and systems”
  - EMC and environmental tests according to:
    - IEC 60945: 2002, DIN EN 60945: 2003
  - Radar
    - IEC 60936-1: 1999, DIN EN 60936-1: 2000
    - IEC 60936-2: 1998, DIN EN 60936-2: 1999
  - Shipborne navigational displays
    - IEC 62288: 2008

(3) TÜV Appointed EMC Test Laboratory:

- appointed by TÜV Rheinland Japan Ltd., 19-5 Shin Yokohama 3-chome, Kohoku-ku, Yokohama 222-0033 Japan
- Laboratory assignment number: UA 50046428
- Date of initial certification: 21 December 1998 (\*)
- for carrying out the tests of:
  - EN 55022, CISPR 22, EN 61000-3-2/-3, EN/IEC 61000-4-2/-3/-4/-5/-6/-8/-11, EN/IEC 61000-6-1/-2, EN/IEC 61000-6-3/-4, EN/IEC 60945, EN/IEC 61326-1, EN/IEC 61326-2-6, EN/IEC 60601-1-2, JIS T 0601-1-2, JIS C 1806-1, EN 55011, CISPR 11.

(4) RMRS Recognized Testing Laboratory:

- recognized by Russian Maritime Register of Shipping, 8, Dvortsovaya Nab., St. Petersburg, 191186 Russia
- Laboratory recognition number : 09.00110.011
- Date of initial certification : 27 January 2009 (\*)
- for carrying out testing in the field of :
  - 21001301 Electrical measurements and tests, 21001302 EMC tests, 21001500 Mechanical measurements and tests, 21002000 Equipment protection degree tests, and 21002100 Climatic tests for Ship’s radio and navigational equipment and IEC 60945 : 2002

Note: (\*) – The current certificates may be found in the FLI web site (<http://www.furuno-labotech.co.jp>).

**TABLE OF CONTENTS**

**Report Summary** ..... 2

**Testing Laboratory Status** ..... 3

**1 Principal Information** ..... 5

1.1 Equipment under test (EUT) ..... 5

1.2 Observation and comments ..... 8

**2 Test Results Summary** ..... 8

**3 Test Results**..... 9

3.1 RF Power Output (FCC Rule, 2.1046) ..... 9

3.2 Modulation Characteristics (FCC Rule, 2.1047)..... 9

3.3 Occupied Bandwidth (FCC Rule, 2.1049) ..... 10

3.4 Frequency Stability (FCC Rule, 2.1055)..... 11

3.5 Spurious Emissions ..... 12

    3.5.1 Spurious Emissions at Antenna Terminal (FCC Rule, 2.1051)..... 12

    3.5.2 Field Strength of Spurious Radiation (FCC Rule, 2.1053)..... 12

3.6 Suppression of Interference Aboard Ships (FCC Rule, 80.217) ..... 14

**4 Test Setup for Measurement:** ..... 16

**5 Measuring Equipment List:**..... 18

**6 Photograph of Test Setup/Arrangement**..... 20

**7 RF Envelope and Spectrum of the output pulse**..... 22

**8 Spurious Emission Plots measured at Antenna Terminal** ..... 29

**9 Field Strength Plots of Spurious Radiation**..... 30

**10 Field Strength Plots for Suppression of Interference Aboard Ships** ..... 36

# 1 Principal Information

## 1.1 Equipment under test (EUT)

### 1.1.1 General

- (a) Trade name: Furuno
- (b) Manufacturer: Furuno Electric Co., Ltd.  
Ashihara-cho 9-52, Nishinomiya-city, 662-8580 Japan
- (c) Model:

	Type	Serial Number	
Transceiver unit	RTR-081A	R147-0340	
Scanner unit	RSB-103	R143-0308	
Antenna:	XN-20AF XN-24AF		One (1) selectable.

- (d) Primary Function: Search, Navigation and Anti-collision
- (e) Frequency Range: Fixed frequency, X-band (9410 MHz)  
Type of Emission: P0N
- (f) Power Supply: 100 VAC, 60 Hz (fed through the specified external equipment, not directly from AC mains)

### 1.1.2 Radar Sensor

#### 1.1.2.1 Transceiver

**Type:** RTR-081A

#### (1) Transmitter

- (a) Assignable Frequency for Shipborne Radar:  
Between 9300 and 9500 MHz (FCC Rule, 80.375 (d)-(1))
- (b) Type of RF Generator  
Magnetron Type: MG5436  
Peak Output Power: 25kW nominal
- (c) Magnetron Ratings  
Center frequency of Magnetron: 9410 MHz  
Tolerances:  $\pm 30$  MHz  
Pulling: 23 MHz  
Tolerance for 20°C temperature variation: -5 MHz

(d) Pulse Characteristics:

Pulse type	S1	S2	M1	M2	M3	L1	L2
Pulselength (μs)	0.07	0.15	0.30	0.50	0.70	1.2	1.2
P.R.R.(Hz)	3000	3000	1500	1000	1000	600	500

**(2) Modulator**

- (a) FET Type: 2SK1466  
Trigger Voltage: Approx. +16 VDC positive

**(3) Receiver**

- (a) Passband  
RF Stage: 100 MHz  
IF Stage:

Pulse type	S1	S2	M1	M2	M3	L1	L2
Passband (MHz)	40	40	10	10	10	3	3

- (b) Gain (overall): approximately 130 dB  
(c) Overall Noise Figure: 6 dB (typical)  
(d) Video Output Voltage: 5 V positive  
(e) Features Provided: Sensitivity Time Controls (Anti-clutter Sea),  
Fast Time Constant (Anti-clutter Rain)  
(f) If receiver is tunable, describe method for adjusting frequency:  
by adjustment of tuning voltage of receiver local oscillator (Automatic and manual)

**1.1.2.2 Antenna and Scanner**

- (a) Antenna Rotation ON-OFF Switch: Provided.  
(b) Antenna structure: Slotted array antenna  
(installed on the Scanner)

- (c) Antenna size:

Antenna type	XN20AF	XN24AF
Length (cm)	206	257

- (d) Type of Beam: Vertical fan

- (e) Beam Width (3 dB):

Antenna type	XN20AF	XN24AF
Horizontal (°)	1.23	0.95
Vertical (°)	20	20

- (f) Polarization: Horizontal

(g) Antenna Gain:

Antenna type	XN20AF	XN24AF
Gain (dB)	30.0	31.5

(h) Attenuation of Major Side Lobes with respect to main beam:

Antenna type	XN20AF	XN24AF
Within $\pm 10^\circ$ (dB)	-28	-28
Outside $\pm 10^\circ$ (dB)	-32	-32

(i) Scanning (rotating or oscillating): Rotating over 360° continuously clockwise

(j) Antenna Rotation Rate: 24 rpm

(k) Number of Degrees Scanned: 360°

(l) Sector Scan: Not provided.

(m) Rated Loss of Transmission line per hundred feet: 9.2 dB

**1.1.3 Operational Features**

(a) Is positive means provided to indicate whether or not the overall operation of the equipment is such that it may be relied upon to provide effective operation in accordance with its primary function:

Yes (Magnetron/Xtal checker)

(b) Is the equipment for continuous operation: Yes

(c) Is provision made for operation with shore based radar beacons (RACONS):

Yes (RACONS)

**1.1.4 Line Power Supply Requirements**

(a) Input Voltage: 100 - 115/ 200 - 230 VAC, 50/60 Hz(for Processer Unit RPU-013)  
(Transceiver unit was powered through the Processor unit, not directly from AC mains)

3.2 / 1.6A

(b) Power consumption: 320 W

**1.1.5 Construction Features**

(a) Does equipment embody replacement units with chassis type assembly: Yes

(b) Are fuse alarms provided: No

(c) State units that are weatherproof: Antenna Unit (IEC 60529 – IP26)

(d) If all units are not housed in a single container, indicate number and give description of individual units:

- 1 X Transceiver                   Type:                   RTR-081A
- 1 X Antenna Unit                   Type:                   RSB-103 (24 rpm)
- 1 X Processor Unit                Type:                   RPU-013
- 1 X Control Unit                   Type:                   RCU-014
- 1 X Monitor Unit                   Type:                   MU-231CR (23.1 inch LCD)

- (e) Approximate Weight of Complete Installation:  
     Antenna Unit:                      42 kg (with Antenna XN24AF installed.)
- (f) Approximate space required for installation excluding scanner: not applicable.

**1.2 Observation and comments**

None.

**2 Test Results Summary**

CFR 47 Section	Item	Result	Test Engineer
2.1046	RF Power Output	Passed.	K. Imamura
2.1047	Modulation Characteristics	Passed.	K. Imamura
2.1049	Occupied Bandwidth	Passed.	K. Imamura
2.1055	Frequency Stability	Passed.	K. Imamura
	Spurious Emissions	---	---
2.1051	- Spurious Emissions at Antenna Terminal	Passed.	K. Imamura
2.1053	- Field Strength of Spurious Radiation	Passed.	K. Imamura
80.217	Suppression of Interference Aboard Ships	Passed.	K. Imamura



### 3 Test Results

#### 3.1 RF Power Output (FCC Rule, 2.1046)

**(1) Test conditions:**

For all TX (S1/S2/M1/M2/M3/L1/L2) Pulses, the transmitter output power was measured at the antenna port with Antenna replaced with the Non-reflective load.

**(2) Test setup:**

See Clause 4.

**(3) Test Results:**

Pulse type	S1	S2	M1	M2	M3	L1	L2
Magnetron Output, mean (W):	5.5	10.2	9.2	11.0	16.1	16.1	13.9
Magnetron Output, peak (kW):	17.1	18.7	19.0	20.8	22.1	23.0	23.1

Environmental conditions observed: On 30 November 2010, 21°C to 22°C, 53% to 50%RH

Power supply voltage measured (\*):100.0 VAC to 100.0 VAC.

(\*): Power input voltages to the external equipment (Processor Unit RPU-013) measured.

#### 3.2 Modulation Characteristics (FCC Rule, 2.1047)

**(1) Test Conditions:**

The RF envelope of the magnetron output pulse was measured using an envelope detector and an oscilloscope.  
Each pulse spectrum was measured using a spectrum analyzer.

**(2) Test setup:**

See Clause 4.

**(3) Limits (FCC Rule, 80.213 (g)):**

Upper limit frequency,  $f(U) = f_0 + f(AUBW)/2 - 1.5/T$

Lower limit frequency,  $f(L) = f_0 - f(AUBW)/2 + 1.5/T$

Note: Assigned frequency ( $f_0$ ): 9410 MHz

Authorized bandwidth ( $f(AUBW)$ ): 100 MHz

**(4) Test Results:**

Complied.

Pulse type	S1	S2	M1	M2	M3	L1	L2	Result
Pulselength T (μs) (-3 dB points)	0.108	0.183	0.323	0.528	0.730	1.204	1.204	Not applicable
Rise time $t_r$ (μs) (10 - 90 % amplitude)	0.011	0.011	0.011	0.011	0.011	0.011	0.011	Not applicable

Pulse type	S1	S2	M1	M2	M3	L1	L2	Result
Decay time $t_f$ ( $\mu$ s) (90 - 10 % amplitude)	0.128	0.112	0.180	0.158	0.114	0.114	0.114	Not applicable
PRR (Hz)	2989	2989	1502	1003	1003	584	502	Not applicable
Guard Band $f(1.5/T)$ (MHz) (*)	13.9	8.2	4.6	2.8	2.1	1.2	1.2	Not applicable
f(U) (MHz)	9446.1	9451.8	9455.4	9457.2	9457.9	9458.8	9458.8	Complied
f(L) (MHz)	9373.9	9368.2	9364.6	9362.8	9362.1	9361.2	9361.2	Complied
Frequency at maximum emission (MHz)	9413.5	9412.0	9411.0	9410.0	9407.0	9406.5	9407.0	Complied

(\*): Guard Band is specified to be equal to  $1.5/T$  MHz, where "T" is the pulselength in microseconds.  
(FCC Rule, 80.209(b))

Measured Plots: See Clause 7.

Environmental conditions observed: On 30 November 2010, 21°C to 22°C, 53% to 50%RH

Power supply voltage measured (\*):100.0 VAC to 100.0 VAC.

(\*): Power input voltages to the external equipment (Processor Unit RPU-013) measured.

### 3.3 Occupied Bandwidth (FCC Rule, 2.1049)

#### (1) Test conditions:

For all TX (S1/S2/M1/M2/M3/L1/L2) Pulses, the transmitter occupied bandwidth was measured at the antenna port with Antenna replaced with the Non-reflective load.

#### (2) Test setup:

See Clause 4.

#### (3) Test Results:

Pulse type	S1	S2	M1	M2	M3	L1	L2
Occupied bandwidth (MHz)	60.0	56.6	62.0	26.0	11.7	7.5	7.2

Environmental conditions observed: On 30 November 2010, 21°C to 22°C, 53% to 50%RH

Power supply voltage measured (\*):100.0 VAC to 100.0 VAC.

(\*): Power input voltages to the external equipment (Processor Unit RPU-013) measured.

### 3.4 Frequency Stability (FCC Rule, 2.1055)

#### (1) Test Conditions:

- 1) Radar Transmitter settings: All TX (S1/S2/M1/M2/M3/L1/L2) Pulses
- 2) Ambient Temperature settings: - 20°C to + 50°C (10°C interval)
- 3) Power Supply Voltage settings: 85 /115 % of nominal voltage (85 VAC/133 VAC)

#### (2) Test setup:

See Clause 4.

#### (3) Frequency Tolerance Limits (FCC Rule, 80.213 (g)):

Pulse type	S1	S2	M1	M2	M3	L1	L2
f(U) (MHz)	9446.1	9451.8	9455.4	9457.2	9457.9	9458.8	9458.8
f(L) (MHz)	9373.9	9368.2	9364.6	9362.8	9362.1	9361.2	9361.2

See Clause 3.2 for details.

#### (4) Test Results:

Complied.

Power Supply Voltage setting (\*): 85 VAC

Pulse type		S1	S2	M1	M2	M3	L1	L2	Result
Frequency at maximum emission (MHz)	-30°C	9422.0	9420.5	9420.5	9418.0	9416.0	9416.0	9416.0	Complied
	-20°C	9420.3	9418.8	9418.6	9416.4	9414.2	9414.1	9414.2	Complied
	-10°C	9418.6	9417.1	9416.7	9414.8	9412.4	9412.2	9412.4	Complied
	0°C	9416.9	9415.4	9414.8	9413.2	9410.6	9410.3	9410.6	Complied
	+10°C	9415.2	9413.7	9412.9	9411.6	9408.8	9408.4	9408.8	Complied
	+20°C	9413.5	9412.0	9411.0	9410.0	9407.0	9406.5	9407.0	Complied
	+30°C	9411.5	9410.0	9409.3	9408.2	9405.3	9404.7	9405.0	Complied
	+40°C	9409.5	9408.0	9407.7	9406.3	9403.7	9402.8	9403.0	Complied
	+50°C	9407.5	9406.0	9406.0	9404.5	9402.0	9401.0	9401.0	Complied

Power Supply Voltage setting (\*):133 VAC

Pulse type		S1	S2	M1	M2	M3	L1	L2	Result
Frequency at maximum emission (MHz)	-30°C	9422.0	9420.5	9420.5	9418.0	9416.0	9416.0	9416.0	Complied
	-20°C	9420.3	9418.8	9418.6	9416.4	9414.2	9414.1	9414.2	Complied
	-10°C	9418.6	9417.1	9416.7	9414.8	9412.4	9412.2	9412.4	Complied
	0°C	9416.9	9415.4	9414.8	9413.2	9410.6	9410.3	9410.6	Complied
	+10°C	9415.2	9413.7	9412.9	9411.6	9408.8	9408.4	9408.8	Complied
	+20°C	9413.5	9412.0	9411.0	9410.0	9407.0	9406.5	9407.0	Complied
	+30°C	9411.5	9410.0	9409.3	9408.2	9405.3	9404.7	9405.0	Complied
	+40°C	9409.5	9408.0	9407.7	9406.3	9403.7	9402.8	9403.0	Complied
	+50°C	9407.5	9406.0	9406.0	9404.5	9402.0	9401.0	9401.0	Complied

Environmental conditions observed: On 6 July 2010, 24°C to 24°C, 53% to 53%RH

On 7 July 2010, 25°C to 25°C, 54% to 54%RH

On 8 July 2010, 24°C to 24°C, 51% to 51%RH

(\*): Power input voltages to the external equipment (Processor Unit RPU-013) measured.

**3.5 Spurious Emissions**

**3.5.1 Spurious Emissions at Antenna Terminal (FCC Rule, 2.1051)**

**(1) Test Conditions:**

For all TX (S1/S2/M1/M2/M3/L1/L2) Pulses, the transmitter output power will be measured at the antenna port with Antenna replaced with the Non-reflective load.

**(2) Test setup:**

See Clause 4.

**(3) Emission Limits (FCC Rule, 80.211 (f)):**

Frequency removed from the assigned frequency	Emission attenuation (mean power, dB)
50 - 100 % (of the authorized bandwidth)	At least 25
100 - 250 % (of the authorized bandwidth)	At least 35
more than 250 % (*) (of the authorized bandwidth)	At least 43 + 10 log <sub>10</sub> (mean power in watts)

Note: (1) Authorized bandwidth = 100 MHz

(\*) - for the relevant frequency bands, tests were performed according to FCC Rule, 2.1053. See Clause 3.5.2.

**(4) Test Results:**

Complied.

From the results of the pre-tests, the EUT emission level was found to be the maximum with S1 pulse. Consequently, the test was performed only with S1 pulse.

Spectrum Plots: See Clause 8.

Environmental conditions observed: On 30 November 2010, 21°C to 22°C, 53% to 50%RH

Power supply voltage measured (\*):100.0 VAC to 100.0 VAC.

(\*): Power input voltages to the external equipment (Processor Unit RPU-013) measured.

**3.5.2 Field Strength of Spurious Radiation (FCC Rule, 2.1053)**

**(1) Test Conditions:**

For all TX (S1/S2/M1/M2/M3/L1/L2) Pulses, the Radiated Emission test was performed.

(a) For the test frequency range of 9 kHz to 2000 MHz, the Antenna for Transceiver was replaced with the rotating non-reflective load. Spurious emissions for 9 kHz to 2000 MHz are not found at the antenna terminal due to its structure (Waveguide tube). The EUT cabinet radiation was measured with the EUT rotated 360°.

(b) For 2 GHz to 40 GHz, the Antenna was set to the Scanner Unit with the stop mode and directed so as to detect the maximum spurious radiation.

**(2) Test Site:** FLI Nishinomiya-Hama Laboratory, Semi-Anechoic Chamber  
(FCC file number: 90607)

**(3) Distance between the radar set and measuring antenna:** 3 m

**(4) Test setup:**

For the test frequency range of 2 GHz to 40 GHz, the GRP (Ground reference plane, metal floor) between the EUT and the measuring (receiving) antenna was lined with the Radio Absorbers (2.4 m × 3.0 m × 0.5 m) to reduce the influences of the reflections of the RF waves from the floor.

**Measuring (Receiving) Antenna height and polarization:**

- (a1) 1.5 m for the test frequency range of 9 kHz to 30 MHz,
- (a2) 1 m to 4 m for the test frequency range of 30 MHz to 2000 MHz,
- (b) 2.2 m that was same as those for the EUT for the test frequency range of 2 GHz to 40 GHz.
- (c) Antenna polarization: vertical and horizontal.

**EUT height:**

- (a) 0.8 m for the test frequency range of 9 kHz to 2000 MHz,
- (b) 2.2 m for the test frequency range of 2 GHz to 40 GHz (To reduce the influences of the reflections from GRP).

See Clauses 4 and 6.

**(5) Field Strength Limits (FCC Rule, 80.211 (f)):**

Frequency removed from the assigned frequency	Frequency (MHz) (for X-band)	Emission attenuation (mean power, dB)
50 - 100 % (*) (of the authorized bandwidth)	9,310 - 9,360	At least 25
	9,460 - 9,510	
100 - 250 % (*)	9,160 - 9,310	At least 35
	9,510 - 9,660	
more than 250 %	0.009 - 9,160	At least 43 + 10 log <sub>10</sub> (mean power in watts)
	9,660 - 40,000	

Note: (1) Assigned frequency (center frequency) = 9410 MHz

(2) Authorized bandwidth = 100 MHz

(\*) - for the relevant frequency bands, tests were performed according to FCC Rule, 2.1051. See Clause 3.5.1.

**(6) Test Results:**

Complied.

From the results of the pre-tests, the spurious emission level was found to be the maximum with L1 pulse. Consequently, the test was performed only with L1 pulse.

[ Limit ] = 43 + 10 log<sub>10</sub> (mean power in watts)

$$= 43 + 10 \log_{10} (16.1)$$

$$= 55 \text{ dB}$$

where, [ mean power in watts ] = 16.1 W for L1 pulse. See 3.1.

For this time, Limit of 60 dB was applied for the test.

The electric field strength of the maximum power radiation was 180.7 dB $\mu$ V/m with L1 pulse. Consequently, the allowable emission limit was set to 120.7 dB $\mu$ V/m (= 180.7 dB $\mu$ V/m - 60 dB).

As a result, the minimum emission attenuation was found to be more than 60 dB.

Spectrum plots: See Clause 9.

Spurious Emission Frequency and Electric Field Strength that were prominent are listed in the following table.

Frequency (GHz)	Antenna Polarization	Pulse type	Electric Field Strength measured (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
28.210	Horizontal	L1	97.13	120.7	23.57
18.836	Vertical	L1	93.53	120.7	27.17

Environmental conditions observed: On 3 December 2010, 22°C to 23°C, 62% to 59%RH  
Power supply voltage measured (\*):100.0 VAC to 100.0 VAC.

On 6 December 2010, 21°C to 22°C, 65% to 58%RH  
Power supply voltage measured (\*):100.0 VAC to 100.0 VAC.

(\*): Power input voltages to the external equipment (Processor Unit RPU-013) measured.

### 3.6 Suppression of Interference Aboard Ships (FCC Rule, 80.217)

(1) Test Conditions/Test Setup: Stand-by mode/ See Clause 4.

(2) Test frequency range: 9 kHz to 40 GHz

(3) Spurious Emission Limits for Receivers:

(a) for delivered power to artificial antenna,

Frequency	Power to artificial antenna		Resolution bandwidth of Spectrum analyzer
	( $\mu$ W)	(dBm)	
9 kHz - 150 kHz	400	-4	1 kHz
150 kHz - 30 MHz		-4	10 kHz
30 MHz - 100 MHz	4,000	+6	100 kHz
100 MHz to 300 MHz	40,000	+16	
300 MHz - 1 GHz	400,000	+26	
1 GHz - 40 GHz			1 MHz

**(4) Test Results:**

Complied.

Frequency (GHz)	Power to artificial antenna measured		Limits		Margin
	(dBm)	( $\mu$ W)	(dBm)	( $\mu$ W)	(dB)
9.550	-56.03	0.0025	+26.0	400000	82.03

Tests were performed with the EUT Standby mode (= receive only mode).

Spurious emission levels measured for the specified test frequency range were found below the limits.

Environmental conditions observed: On 2 December 2010, 20°C to 21°C, 56% to 53%RH


Power supply voltage measured (\*):100.0 VAC to 100.0 VAC.

(\*): Power input voltages to the external equipment (Processor Unit RPU-013) measured.


Spectrum plots: See Clause 10.

## 4 Test Setup for Measurement:

### (1) Test Setup for Clauses 3.1, 3.2, 3.3, 3.4, and 3.5.1.

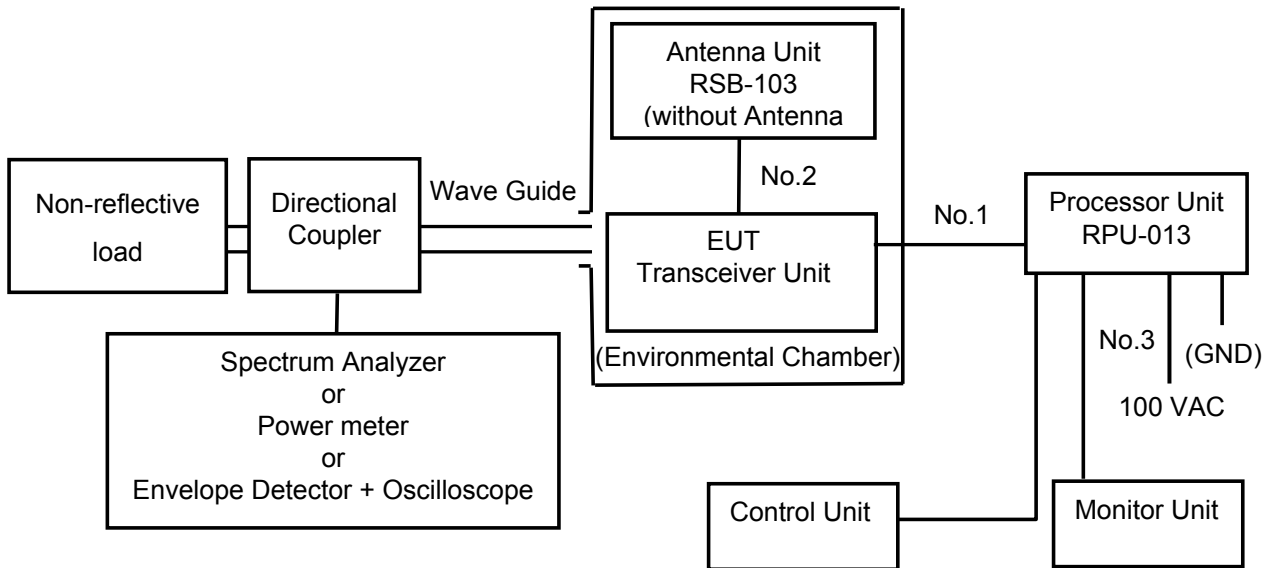


### (2) Test Setup for Clause 3.5.2.

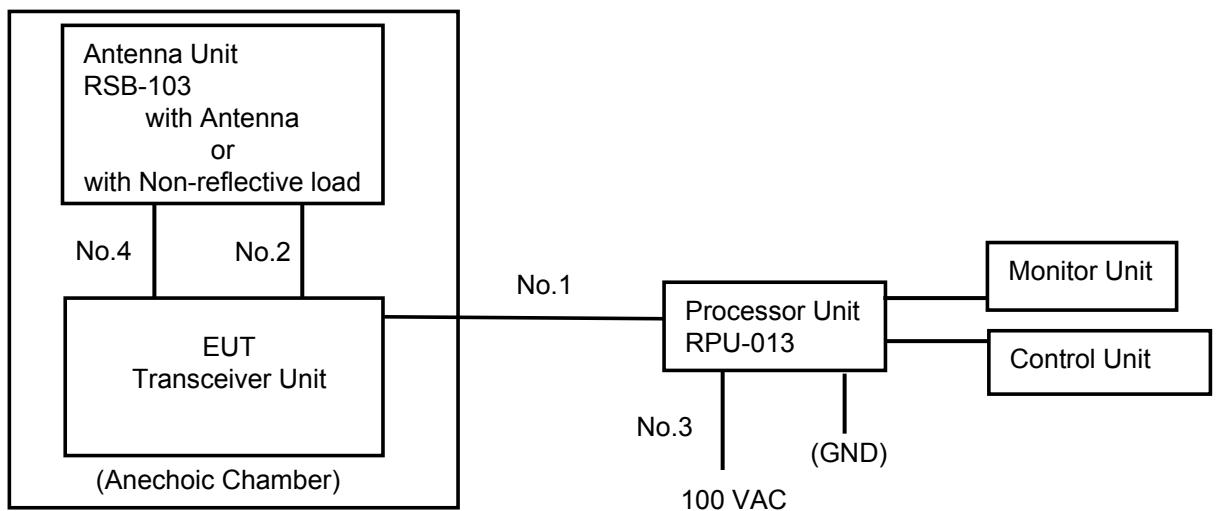



**(3) Test Setup for Clause 3.6.**

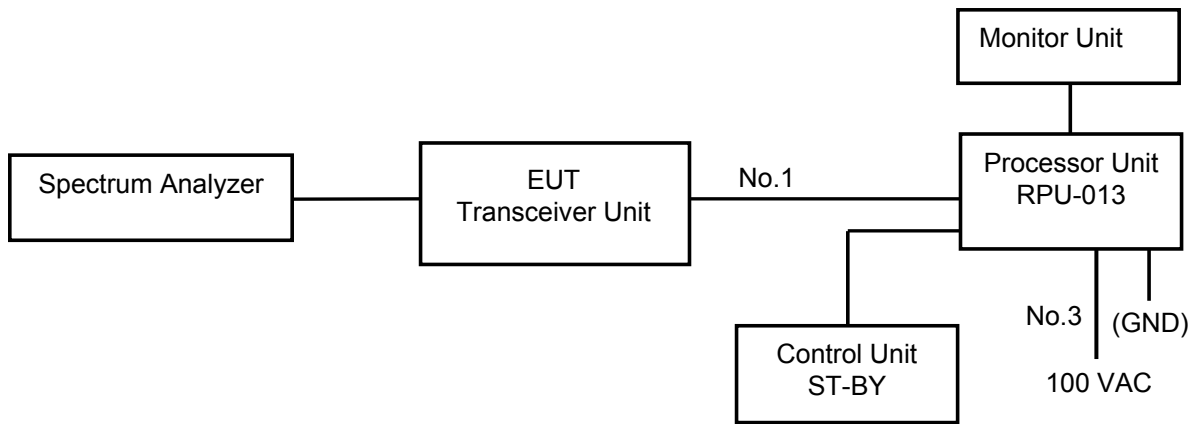

Cable designations:

No.	Name	Length (m)
1	RW-9600	20
2	250V-MPYCY-19	20
3	DPYC-2.5	5
4	WRJ-9	3

## 5 Measuring Equipment List:

Measuring/Test instruments have been appropriately calibrated/maintained according to the FLI programs/procedures and ISO/IEC 17025. Measuring/Test instruments used for the tests are listed below.

### (1) For 3.1 RF Power Output:

C/N	Instrument	Type	S/N	Manufacturer
HT552	Power meter	E4481B	GB43315050	Agilent
HT325	Power Sensor	8481A	2702A70235	Agilent
HT656	Crystal Detector	432B	MY42243767	Agilent
8411096	Directional Coupler (X-band)	5D364S	R05762	Shimada
8411057	Dummy Load (X-band)	4D376	---	Shimada
8408087	Frequency Counter	TR5824A	41940036	Advantest
0404008	Attenuator	8494B	MY42141964	Agilent
0404008	Attenuator	8495B	MY42140929	Agilent
HT168	Oscilloscope	TDS680B	B030202	Tektronix

### (2) For 3.2 Modulation Characteristics:

C/N	Instrument	Type	S/N	Manufacturer
HT552	Power meter	E4481B	GB43315050	Agilent
HT325	Power Sensor	8481A	2702A70235	Agilent
HT656	Crystal Detector	432B	MY42243767	Agilent
8411096	Directional Coupler (X-band)	5D364S	R05762	Shimada
8411057	Dummy Load (X-band)	4D376	---	Shimada
8408087	Frequency Counter	TR5824A	41940036	Advantest
0404008	Attenuator	8494B	MY42141964	Agilent
0404008	Attenuator	8495B	MY42140929	Agilent
HT168	Oscilloscope	TDS680B	B030202	Tektronix

### (3) For 3.3 Occupied Bandwidth and for 3.5.1 Spurious Emissions at Antenna Terminal:

C/N	Instrument	Type	S/N	Manufacturer
8411096	Directional Coupler (X-band)	5D364S	R05762	Shimada
8411057	Dummy Load (X-band)	4D376	---	Shimada
HT676	Spectrum Analyzer	8564EC	4103A00440	Agilent
0404008	Attenuator	8494B	MY42141964	Agilent
0404008	Attenuator	8495B	MY42140929	Agilent
KB-011	Coaxial cable	SUCOFLEX 106 - 2m	12226/6	SUHNER
KB-137	3.5 mm cable	MWX221-2m	0804S167	Junkosha

### (4) For 3.4 Frequency Stability:

C/N	Instrument	Type	S/N	Manufacturer
HT370	Climatic chamber (L)	TBE-3HW5GE2F	3013000995	Tabai Espec
HT128	Temperature recorder (L)	437006/R1182	4370TB580	Yokogawa
8411096	Directional Coupler	5D364S	R05762	Shimada
8411057	Dummy Load	4D376	R05763	Shimada
----	Waveguide (for X-band)	WRJ-10 (l = 60 cm)	----	Furuno
HT676	Spectrum Analyzer	8564EC	4103A00440	Agilent
HT654	Attenuator	8494B	MY42148134	Agilent

C/N	Instrument	Type	S/N	Manufacturer
HT655	Attenuator	8495B	MY42144403	Agilent
KB-011	Coaxial cable	SUCOFLEX 100 - 2m	12226/6	SUHNER
KB-137	Coaxial cable	MWX221 - 2m	0804S167	Junkosha
HT432	DC power supply	PAN55-20	AK003307	Kikusui

(5) For 3.5.2 Field Strength of Spurious Radiation:


C/N	Instrument	Type	S/N	Manufacturer
HT463	Spectrum analyzer (9 kHz to 3 GHz)	R3132	110401654	Advantest
HT565	Loop antenna (0.15 - 30 MHz)	HFH2-Z2	100093	Rohde & Schwarz
HT459	Biconical antenna (30 MHz to 300 MHz)	VBA6106A	1296	Schaffner
HT331	Log periodic antenna (300 MHz to 1000 MHz)	UHALP9107	8411059	Schwarzbeck
HT467	Double-ridged waveguide horn antenna (1 GHz to 18 GHz)	3115	6520	EMCO
HT518	Pre-amplifier (30 MHz to 2 GHz)	87405A	3207A01643	Agilent
HT365	Semi-anechoic Chamber	3mSAC	D-002	Riken
512043	Spectrum Analyzer	FSU46	200015	Rohde & Schwarz
740060501	Horn antenna (18 GHz to 26.5 GHz)	42-442-6	E414109-01	A.H. Systems
0511041	Low-noise amplifier	JSWV4-18002600-30-8P	1058348	MITEQ
----	DC power supply for Low-noise amplifier	EX-375L2	405650060347	Takasago
740060502	Horn antenna (26.5 GHz to 40 GHz)	28-442-6	E414209-01	A.H. Systems
----	Notch Filter (X-band)	CBR-X7-3A	R9865001	Shimada
----	Notch Filter (S-band)	CBR-S7-3A	R1189001	Shimada
----	Coaxial cable	SUCOFLEX 106 - 2m	----	SUHNER
----	Coaxial cable	SUCOFLEX 104 - 2m	----	SUHNER
----	Coaxial cable	SUCOFLEX 104 - 5m	250497	SUHNER
----	Coaxial cable	SUCOFLEX 102 - 5m	265055	SUHNER

(6) For 3.6 Suppression of Interference Aboard Ships:

C/N	Instrument	Type	S/N	Manufacturer
HT676	Spectrum Analyzer	8564EC	4103A00440	Agilent
KB-137	3.5 mm cable	MWX221-2m	0804S167	Junkosha

## 6 Photograph of Test Setup/Arrangement

(1) For Temperature (TX frequency stability) tests,

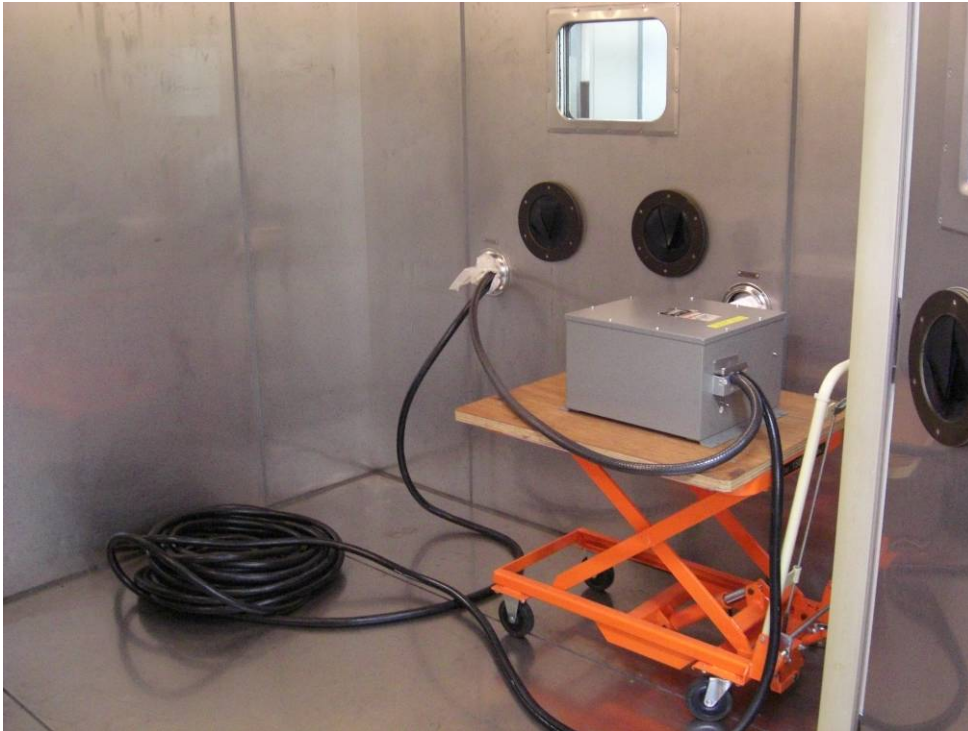

(2) For Spurious Emission measurements,



for 9 kHz to 2000 MHz



for 2 GHz to 40 GHz

## 7 RF Envelope and Spectrum of the output pulse

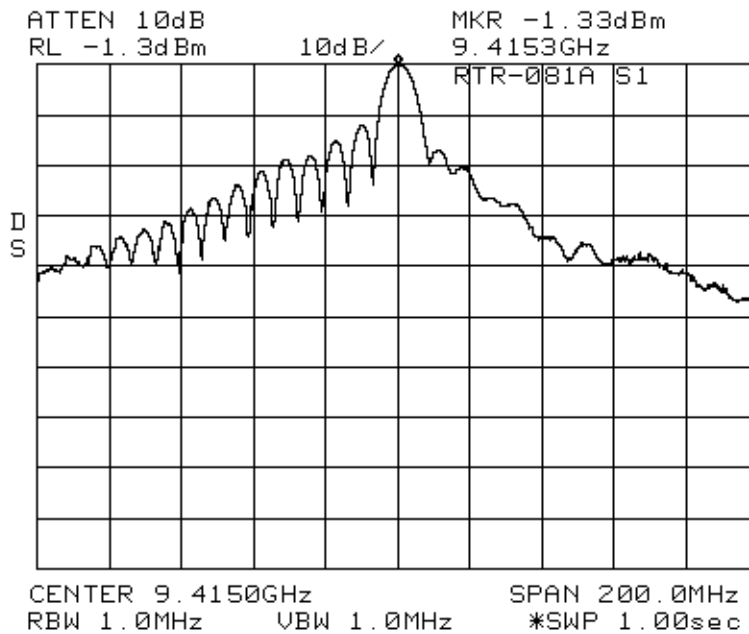
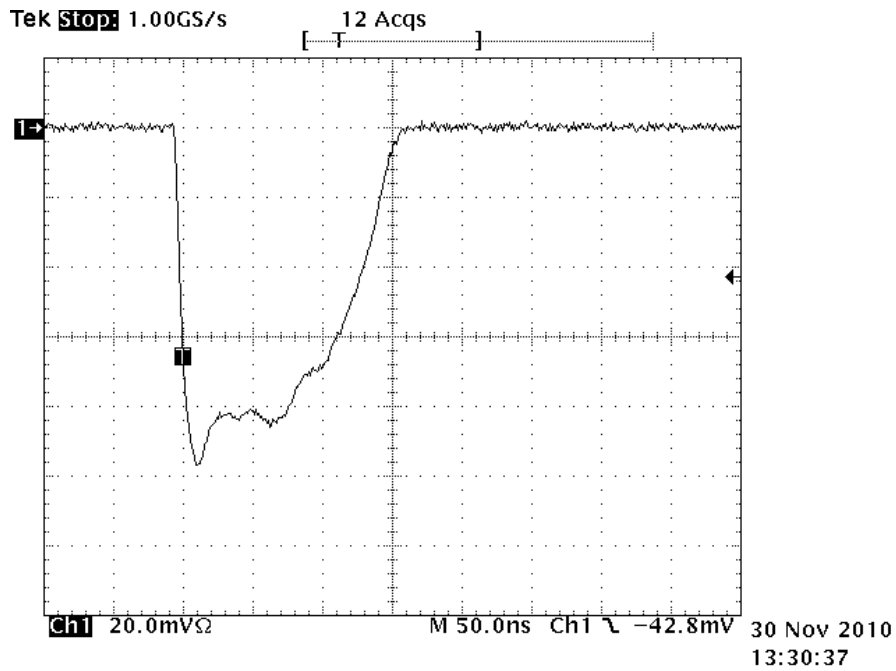


Fig. 7.1 S1 Pulse Envelope and Spectrum

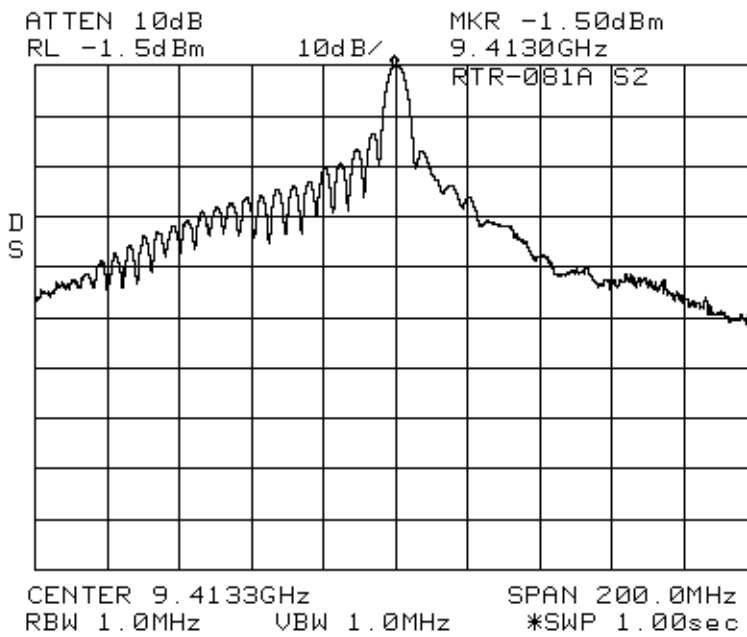
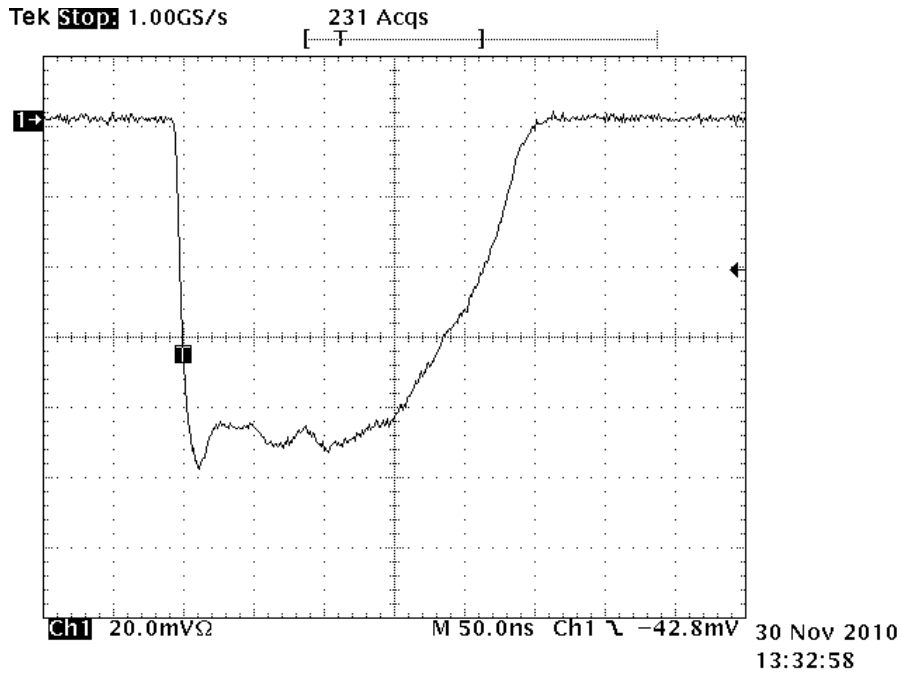


Fig. 7.2 S2 Pulse Envelope and Spectrum

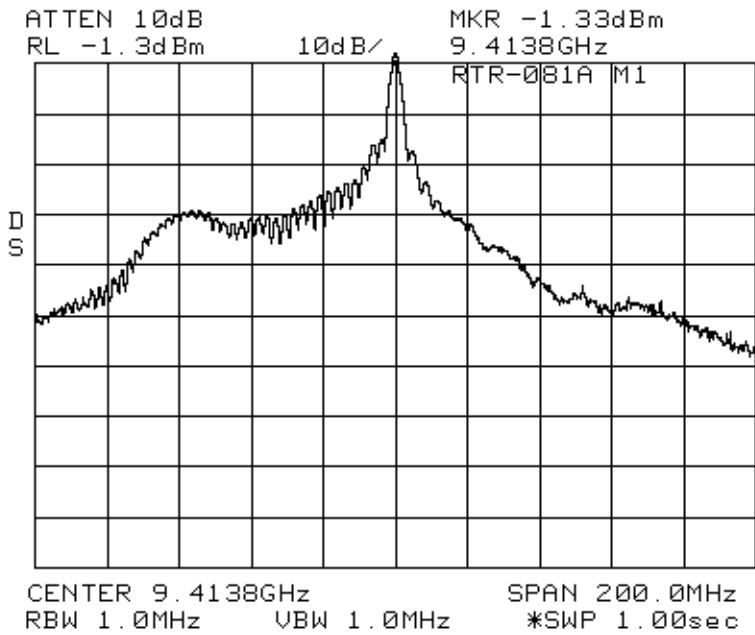
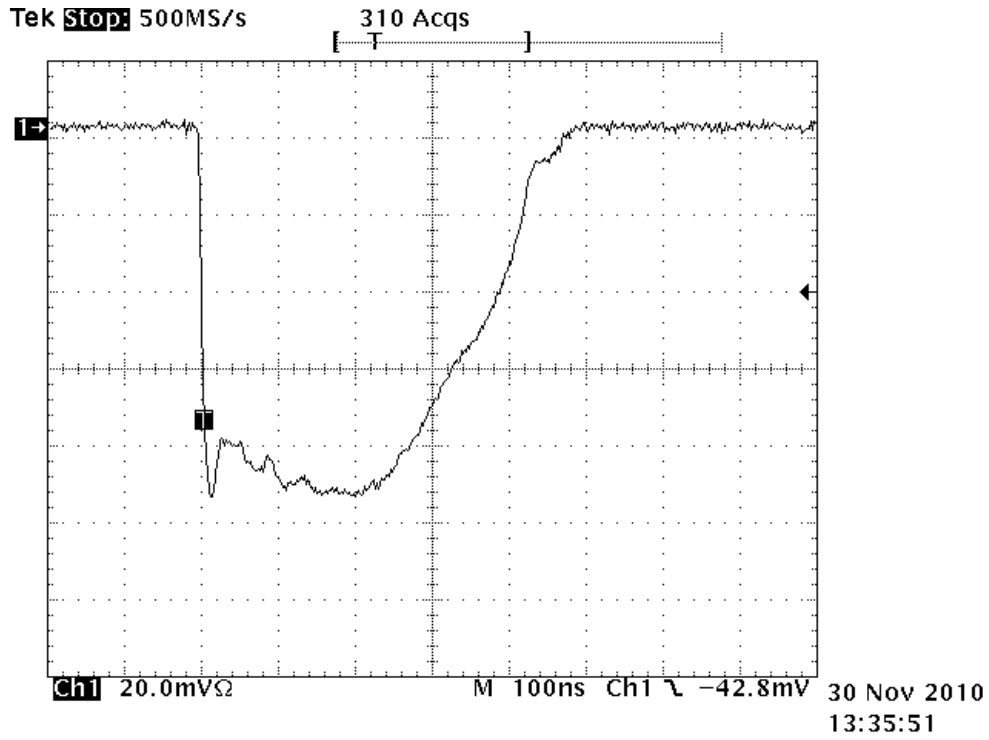


Fig. 7.3 M1 Pulse Envelope and Spectrum



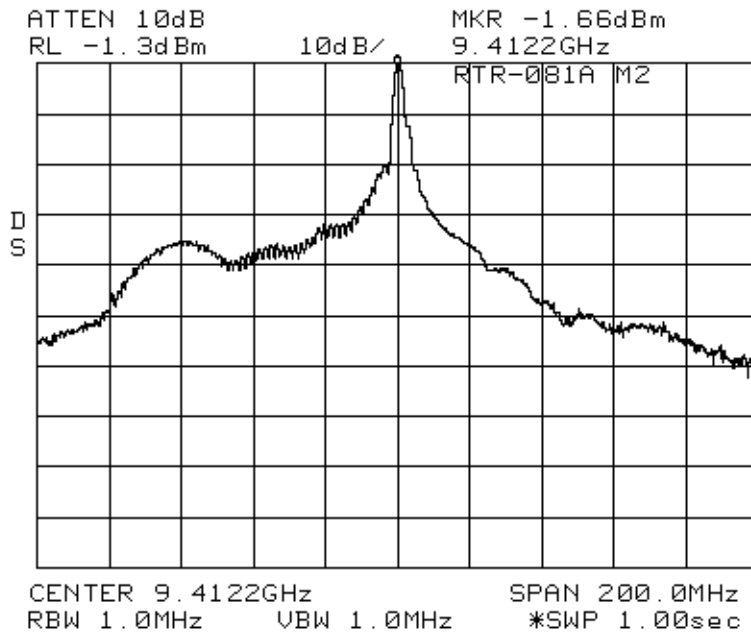
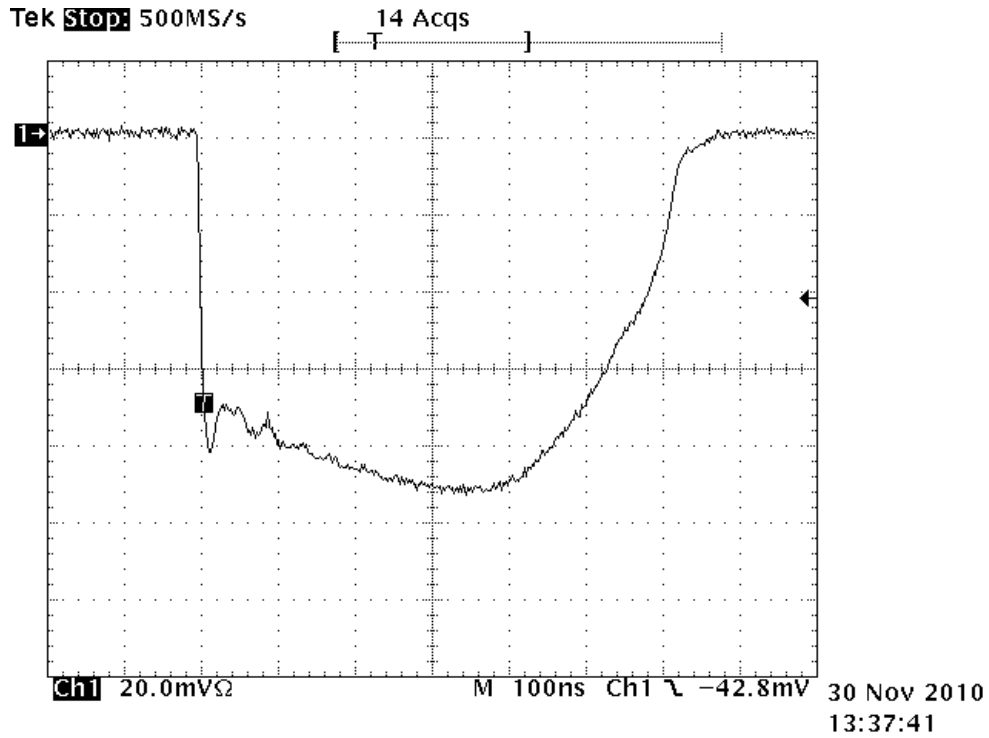


Fig. 7.4 M2 Pulse Envelope and Spectrum

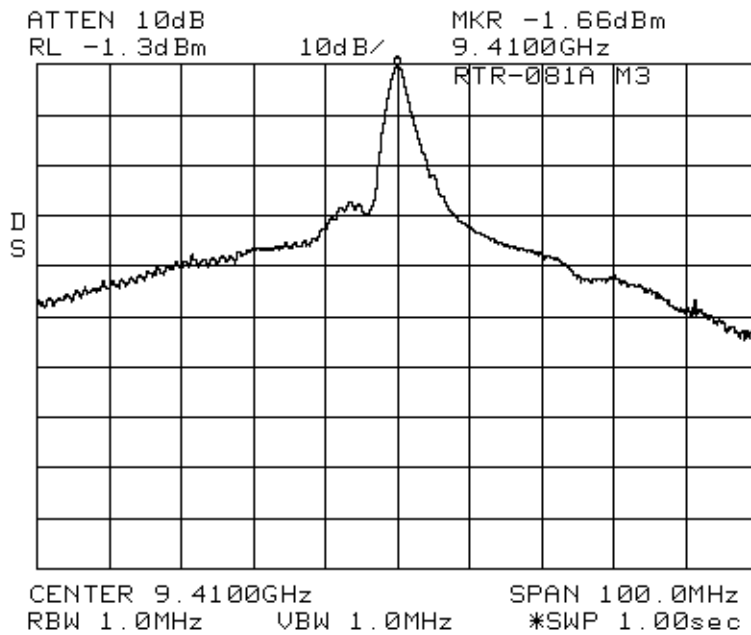
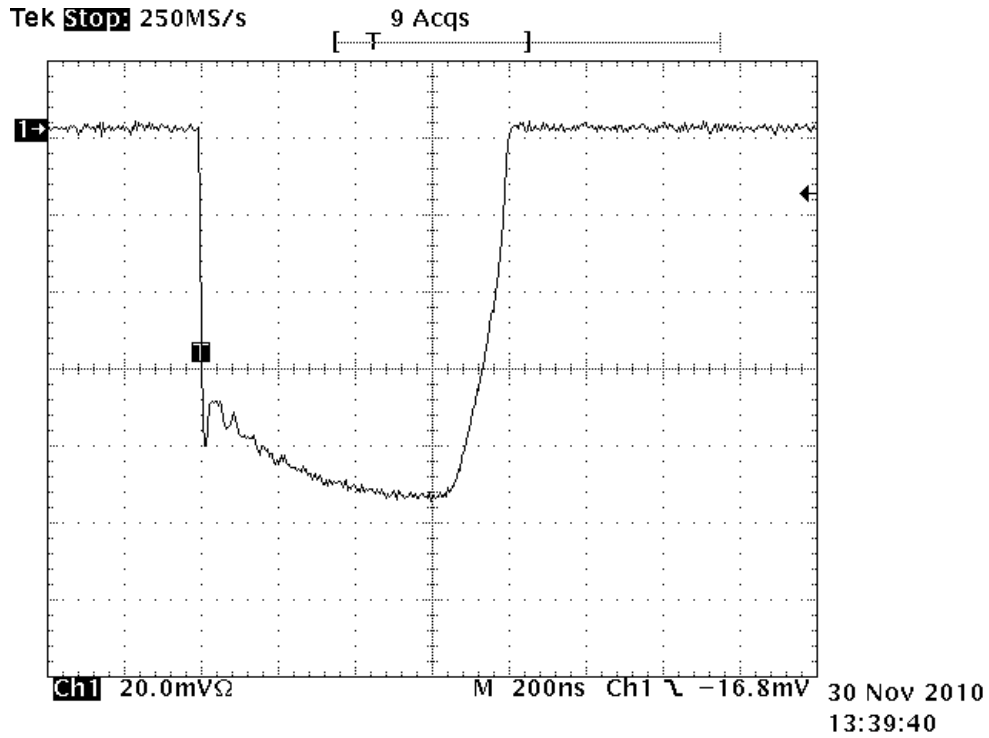


Fig. 7.5 M3 Pulse Envelope and Spectrum

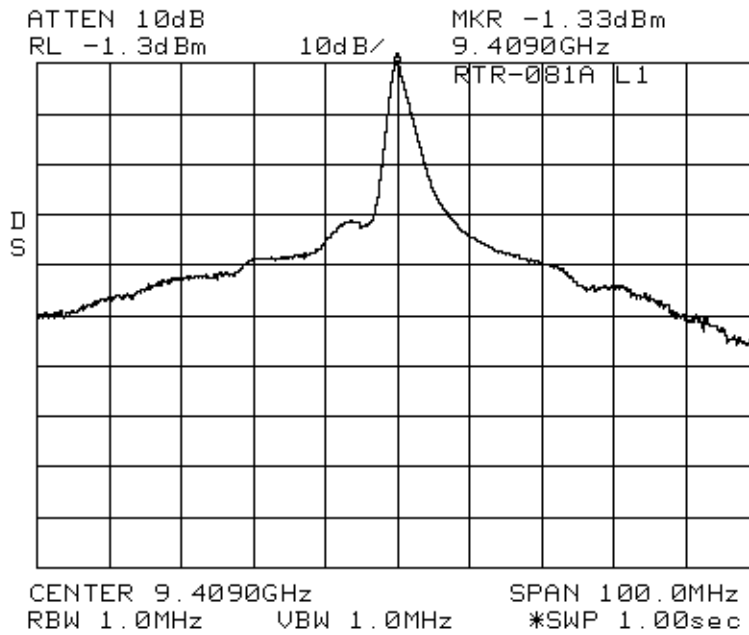
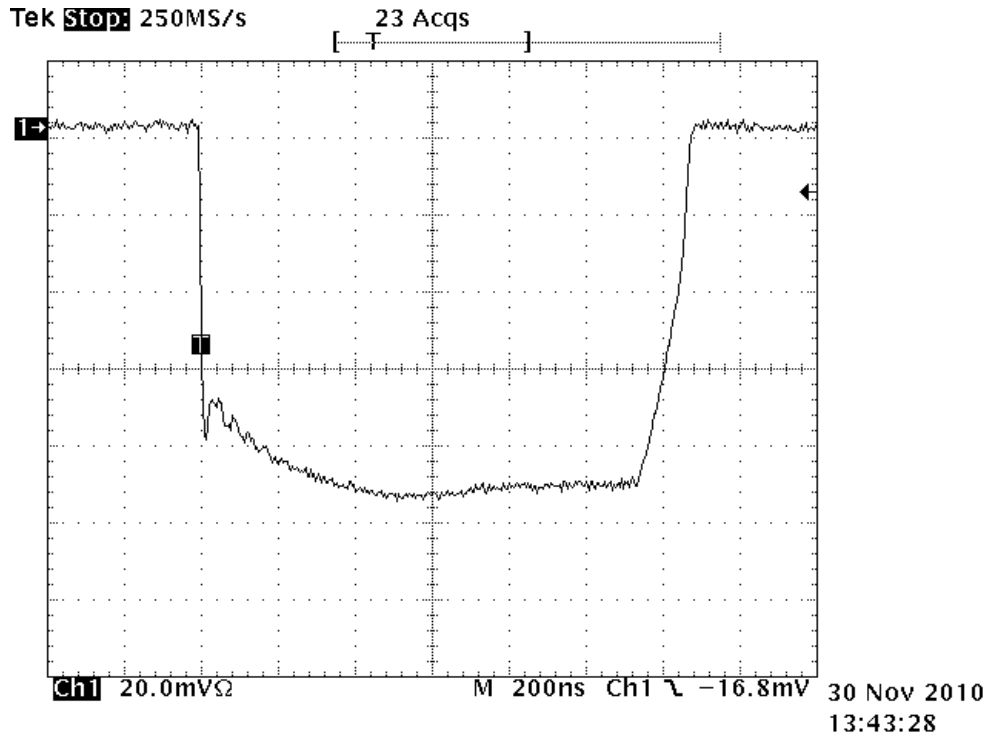


Fig. 7.6 L1 Pulse Envelope and Spectrum



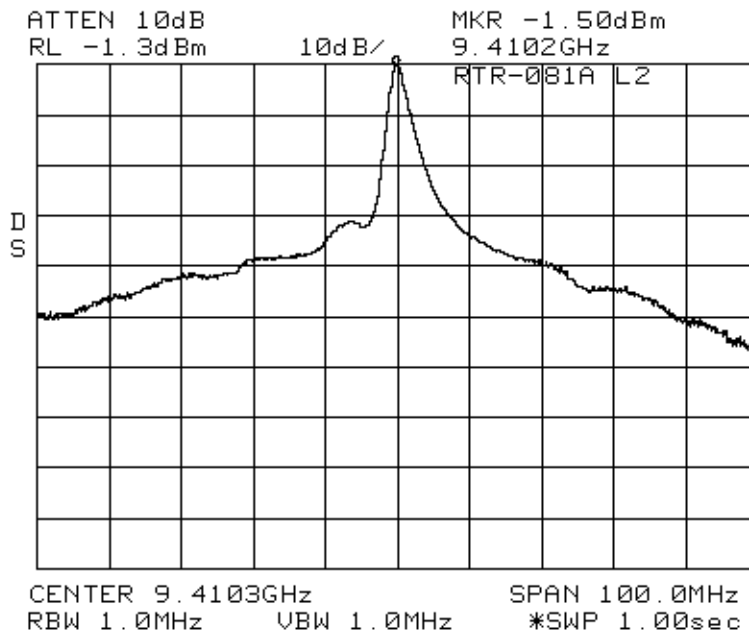


Fig. 7.7      L2 Pulse Envelope and Spectrum

## 8 Spurious Emission Plots measured at Antenna Terminal



for S1 pulse

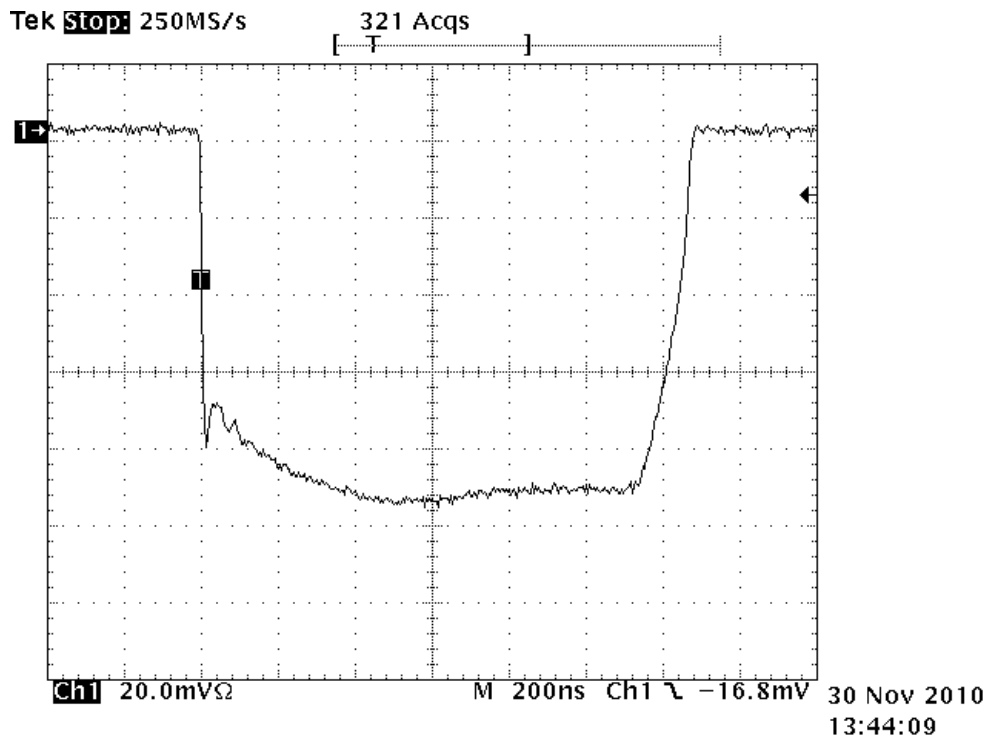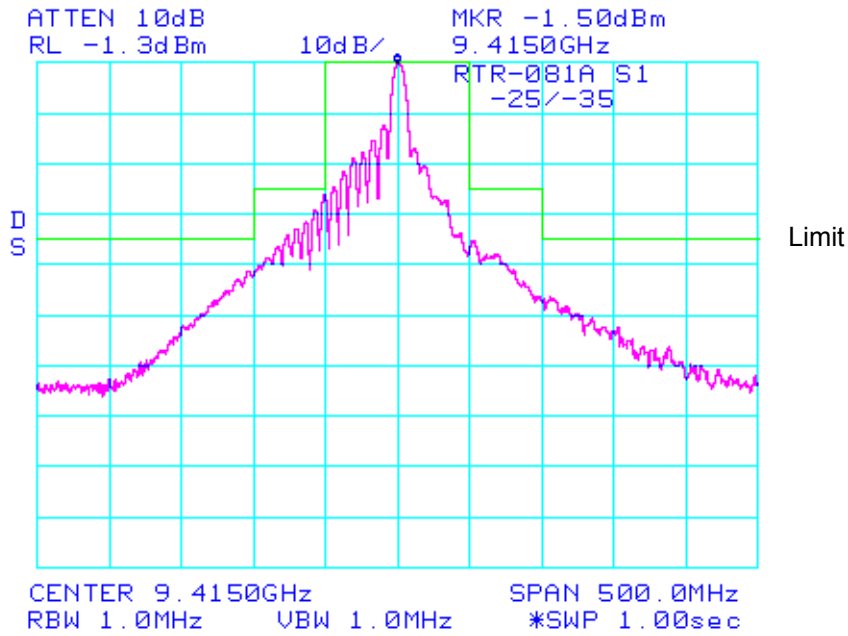

## 9 Field Strength Plots of Spurious Radiation

### 9.1 Maximum power radiation level (for L1 Pulse)

- Horizontal

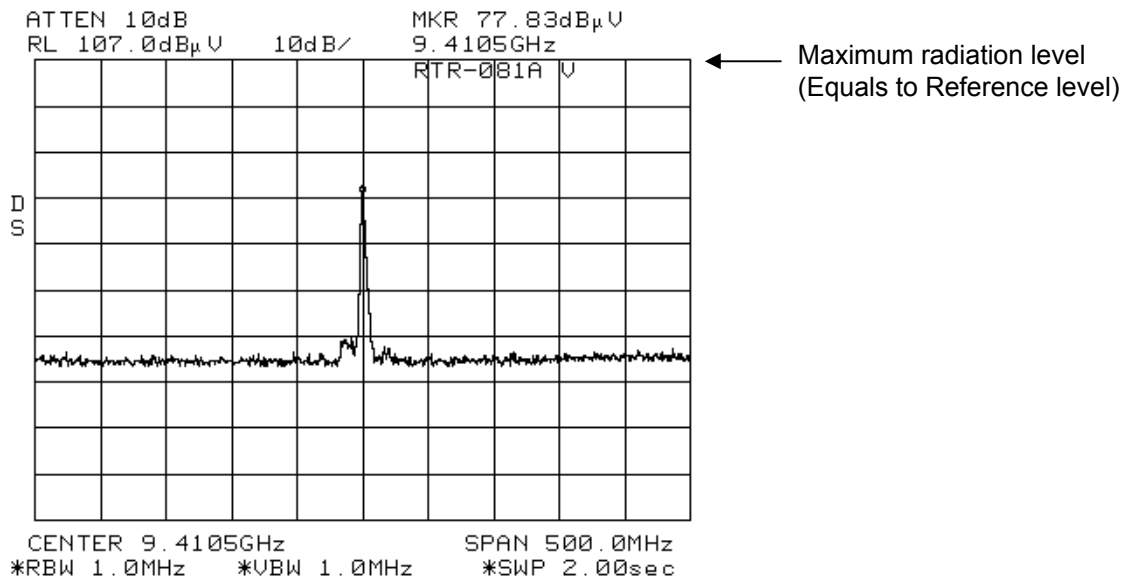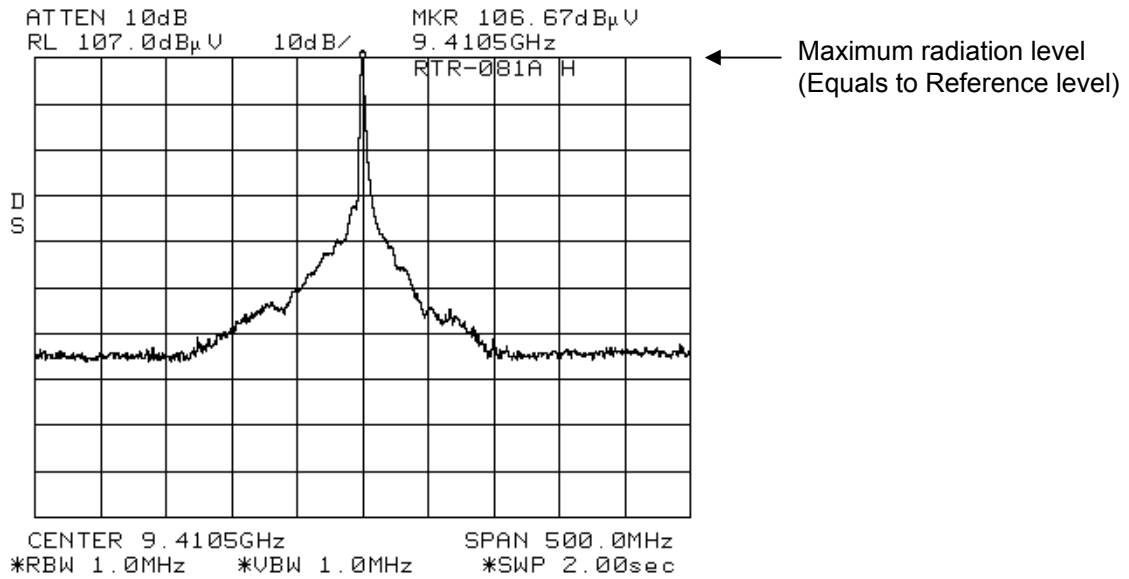

- Vertical


For the maximum power radiation level, the voltage value measured by the spectrum analyzer was converted into the electric field strength with the measuring antenna factor, Cable loss and Amp. gain.

Maximum power radiation level = 180.7 dBμV/m

Therefore, Emission Limit = 180.7 dBμV/m - 60 dB = 120.7 dBμV/m

**9.2 Spurious emissions (L1 pulse)**

(1) for 9 kHz to 30 MHz

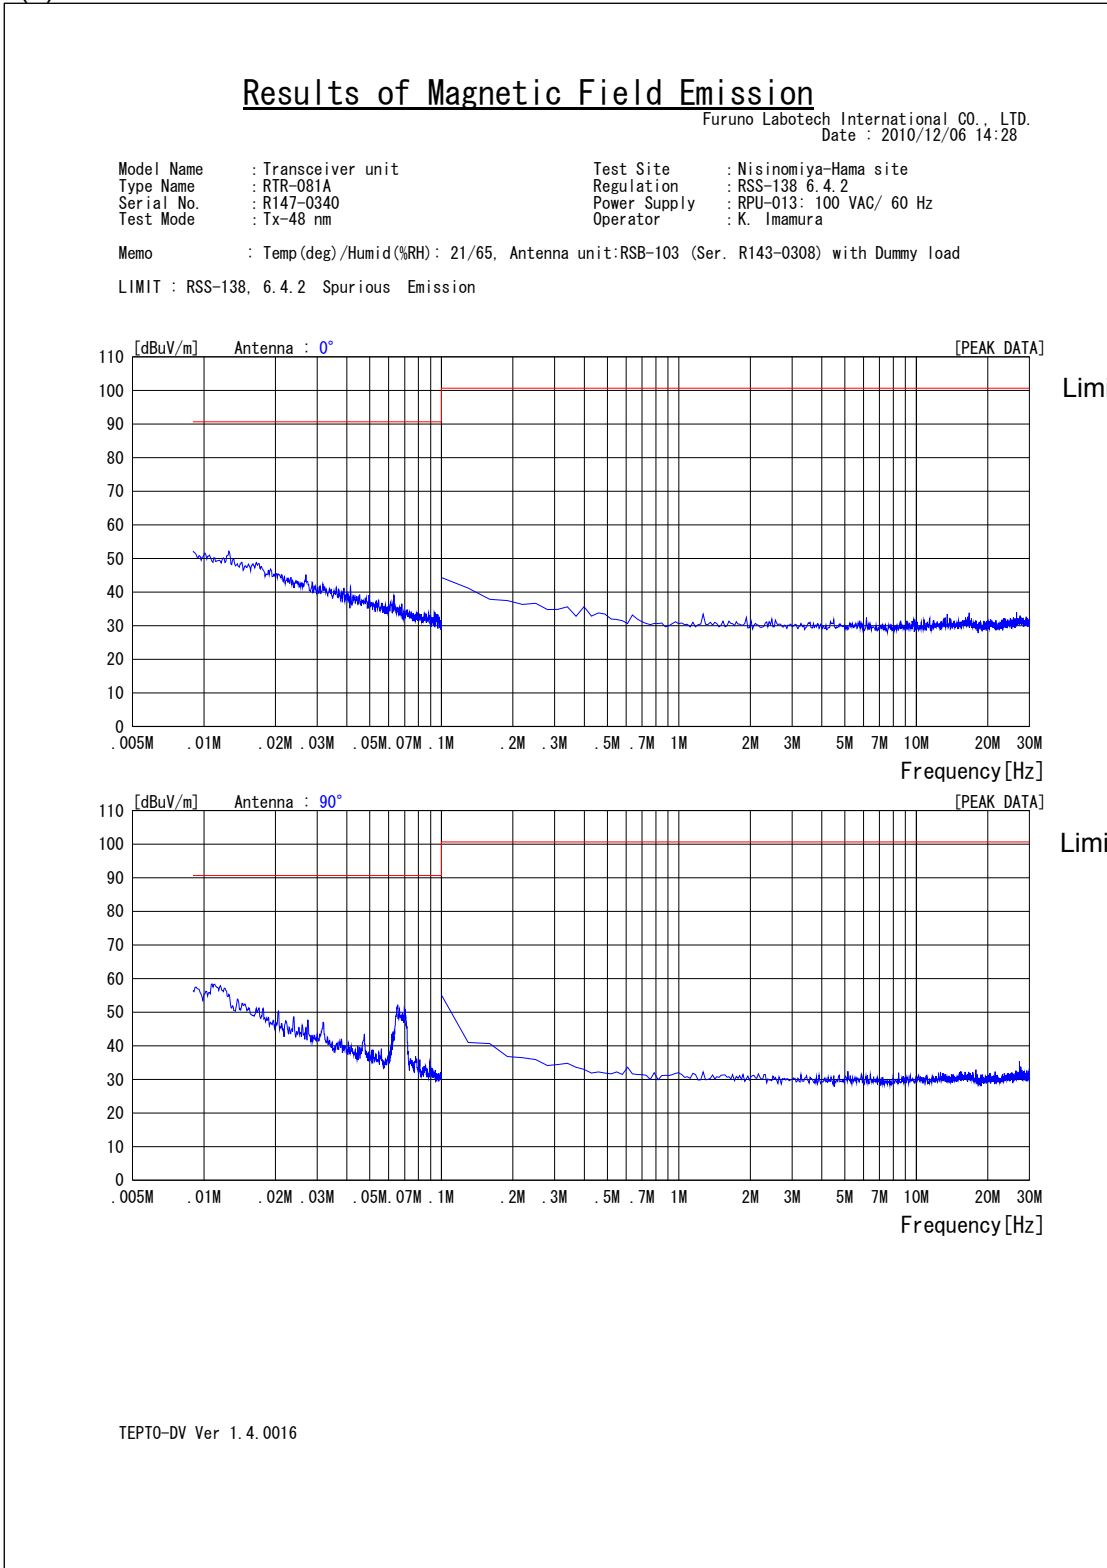

(\*) The resolution bandwidth of the spectrum analyzer for the frequency range of 9 kHz to 100 kHz was set to 1 kHz, and to 10 kHz for 100 kHz to 30 MHz, instead of 1 MHz for the frequency range of 2 GHz to 40 GHz. The applicable limit was set at 30 dB lower than that computed in Clause 9.1 for the former frequency range, and 20 dB lower for the latter frequency range.

(2) for 30 MHz to 2000 MHz

2010/Dec/06 14:15



**Results of Radiated Emission**

Furuno Labotech International  
Date : 2010/Dec/06 13:36

Model Name	: Transceiver unit	Test Site	: Nishinomiya-hama site
Type Name	: RTR-081A	Regulation	: RSS-138 6.4.2
Serial. No.	: R147-0340	Power Supply	: RPU-013: 100 VAC/ 60 Hz
Test Mode	: Tx-48 nm	Operator	: K. Imamura

Memo : Temp(deg)/Humid(%RH) : 21/65, Antenna unit:RSB-103 (Ser. R143-0308) with Dummy load

LIMIT : RSS-138, 6.4.2 Spurious Emissions

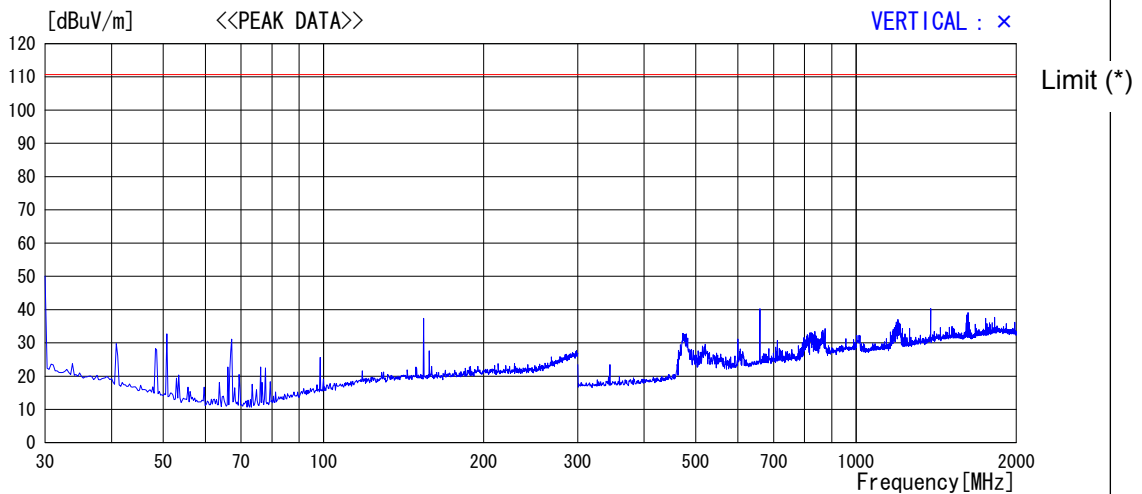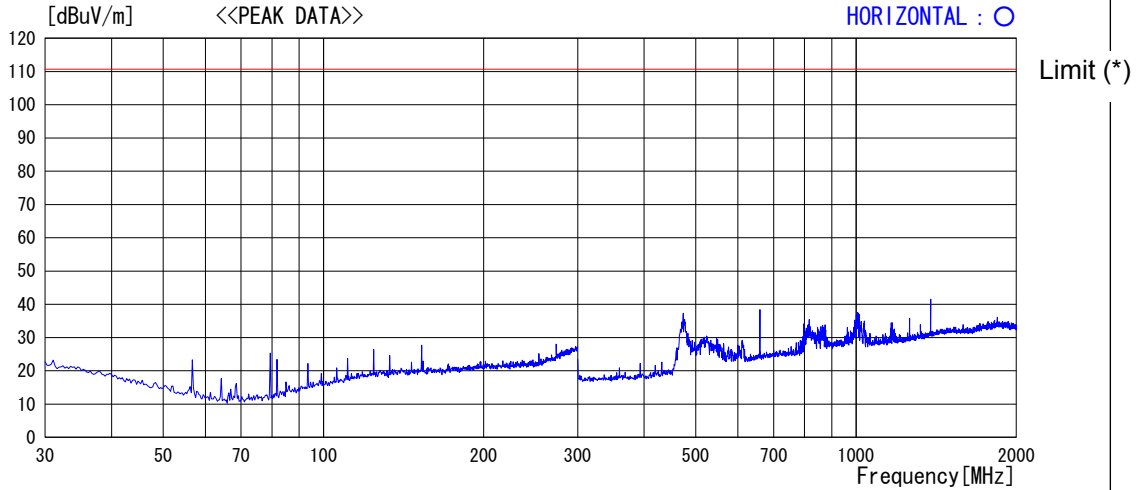

TEPT0-DV Ver 1.4.0016

(\*) The resolution bandwidth of the spectrum analyzer for the frequency range of 30 MHz to 2000 MHz was set to 100 kHz instead of 1 MHz for the frequency range of 2 GHz to 40 GHz. The applicable limit was set at 10 dB lower than that computed in Clause 9.1.

















