

# Test Report

(FCC Rules 2.1046/2.1047/2.1049/2.1051/2.1053/2.1055/80.217)

**For**

**Trade name: Furuno**  
**Model: Transceiver for Radar Sensor DRS12A**  
**Type: RTR-094A**

**Report no.: FLI 12-11-051**

**Date of issue: 13 April 2011**

**Furuno Labotech International Co., Ltd.**

1-16 Fukazu-cho, Nishinomiya-shi, Hyogo 663-8203, Japan

Tel: +81 (0) 798 63 1094 Fax: +81 (0) 798 63 1098

URL: <http://www.furuno-labotech.co.jp>

## Report Summary

FLI project number:	FLI 04-10-0326				
Test report number:	FLI 12-11-051	Date of Initial Issue:		13 April 2011	
Revision number:	---		Date of Revised Issue:		---
Test report revision made:	Rev. no.	Date	Page	Item	Description of change
	---	---	---	---	---
Test standard(s)/ Test specifications:	FCC 47 CFR, Sections: 2.1046 - RF Power Output, 2.1047 - Modulation Characteristics, 2.1049 - Occupied Bandwidth, 2.1051 - Spurious Emissions at Antenna Terminal, 2.1055 - Frequency Stability, 2.1053 - Field Strength of Spurious Radiation, 80.217 - Suppression of Interference Aboard Ships. (Date of issue: 1 October 2009)				
Customer:	Furuno Electric Co., Ltd. 9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan				
Manufacturer:	Furuno Electric Co., Ltd. 9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan				
Trade name:	FURUNO				
Model:	Transceiver for Radar Sensor DRS12A				
Type:	RTR-094A				
Product function and intended use:	For maritime safety navigation				
Number of samples tested:	One				
Serial number:	4389-0001				
Power rating:	12 - 24 VDC, 92 W Note: the EUT was powered through the specified equipment (PSU-012), not directly from mains power supply.				
Product status:	Pre-production model				
Modifications made to samples during testing:	None.				
Date of receipt of samples:	13 August 2010				
Test period:	18, 19 August 2010, 9, 10, 18, 28 February 2011, and 1 March 2011				
Place of test:	Furuno Labotech International Co., Ltd. - Nishinomiya Lab. 9-52 Ashihara-Cho, Nishinomiya City, Hyogo Prefecture, 662-8580 Japan - Nishinomiya-Hama Lab. 2-20 Nishinomiya-Hama, Nishinomiya City, Hyogo Prefecture, 662-0934 Japan Anechoic Chamber used for the test has been registered by FCC. <b>(File number: 90607)</b>				
Test results/ Compliance:	Passed. The test results of this report relate only to the samples tested.				
Tested by:	Katsumi Imamura and Akira Inoue				
Written by:	Akiko Inoue				
Verified by:	Yoshihiro Ishii				
Approved by:	Date: 13 April 2011 Name: Yoshihiro Ishii Title: Manager, Technical Section, Furuno Labotech International Co., Ltd. Signature: 				

## Testing Laboratory Status

Furuno Labotech International Co., Ltd. (hereafter called FLI) has been holding the following status after having been assessed according to the provisions of ISO/IEC 17025 and/or the relevant rules:

(1) Telefication Listed Testing Laboratory:

- listed by Telefication B. V., Edisonstraat 12a, 6902 PK Zevenaar, The Netherlands
- Laboratory assignment number: L116
- Date of initial certification: 26 July 1999 (\*)
- for testing the following product categories/ test standards:
  - EN 60945, Maritime navigation and radiocommunication equipment and systems - General requirements.
  - IEC 61162-1/-2, Maritime navigation and radiocommunication equipment and systems - Digital interfaces - Part 1: Single talker and multiple listeners / Part 2: Single talker and multiple listeners, high speed transmission.

(2) BSH Recognized Testing Laboratory:

- recognized by Bundesamt für Seeschifffahrt und Hydrographie, Bernhad-Nocht-Str. 78, 20359 Hamburg, Federal Republic of Germany
- Recognition certificate number: BSH4613/06201/0835/08
- Date of initial certification: 4 April 2003 (\*)
- for testing in the fields of:
  - “Marine navigational and radiocommunication equipment and systems”
  - EMC and environmental tests according to:
    - IEC 60945: 2002, DIN EN 60945: 2003
  - Radar
 

IEC 60936-1: 1999, DIN EN 60936-1: 2000	- Shipborne navigational displays
IEC 60936-2: 1998, DIN EN 60936-2: 1999	IEC 62288: 2008

(3) TÜV Appointed EMC Test Laboratory:

- appointed by TÜV Rheinland Japan Ltd., 19-5 Shin Yokohama 3-chome, Kohoku-ku, Yokohama 222-0033 Japan
- Laboratory assignment number: UA 50046428
- Date of initial certification: 21 December 1998 (\*)
- for carrying out the tests of:
  - EN 55022, CISPR 22, EN 61000-3-2/-3, EN/IEC 61000-4-2/-3/-4/-5/-6/-8/-11, EN/IEC 61000-6-1/-2, EN/IEC 61000-6-3/-4, EN/IEC 60945, EN/IEC 61326-1, EN/IEC 61326-2-6, EN/IEC 60601-1-2, JIS T 0601-1-2, JIS C 1806-1, EN 55011, CISPR 11.

(4) RMRS Recognized Testing Laboratory:

- recognized by Russian Maritime Register of Shipping, 8, Dvortsovaya Nab., St. Petersburg, 191186 Russia
- Laboratory recognition number : 09.00110.011
- Date of initial certification : 27 January 2009 (\*)
- for carrying out testing in the field of :
  - 21001301 Electrical measurements and tests, 21001302 EMC tests, 21001500 Mechanical measurements and tests, 21002000 Equipment protection degree tests, and 21002100 Climatic tests for Ship’s radio and navigational equipment and IEC 60945 : 2002

Note: (\*) – The current certificates may be found in the FLI web site (<http://www.furuno-labotech.co.jp>).

**TABLE OF CONTENTS**

**Report Summary** ..... 2

**Testing Laboratory Status** ..... 3

**1 Principal Information** ..... 5

1.1 Equipment under test (EUT) ..... 5

1.2 Observation and comments ..... 8

**2 Test Results Summary** ..... 8

**3 Test Results**..... 9

3.1 RF Power Output (FCC Rule, 2.1046) ..... 9

3.2 Modulation Characteristics (FCC Rule, 2.1047)..... 9

3.3 Occupied Bandwidth (FCC Rule, 2.1049) ..... 10

3.4 Frequency Stability (FCC Rule, 2.1055)..... 11

3.5 Spurious Emissions ..... 12

    3.5.1 Spurious Emissions at Antenna Terminal (FCC Rule, 2.1051)..... 12

    3.5.2 Field Strength of Spurious Radiation (FCC Rule, 2.1053)..... 13

3.6 Suppression of Interference Aboard Ships (FCC Rule, 80.217) ..... 15

**4 Test Setup for Measurement:** ..... 17

**5 Measuring Equipment List:**..... 19

**6 Photograph of Test Setup/Arrangement**..... 21

**7 RF Envelope and Spectrum of the output pulse** ..... 23

**8 Spurious Emission Plots measured at Antenna Terminal** ..... 30

**9 Field Strength Plots of Spurious Radiation**..... 31

**10 Field Strength Plots for Suppression of Interference Aboard Ships** ..... 37

# 1 Principal Information

## 1.1 Equipment under test (EUT)

### 1.1.1 General

- (a) Trade name: Furuno
- (b) Manufacturer: Furuno Electric Co., Ltd.  
Ashihara-cho 9-52, Nishinomiya-city, 662-8580 Japan
- (c) Model: Radar Sensor DRS12A

	Type	Serial Number	Note
Radar Sensor	DRS12A	4389-0001	
Scanner	RSB-118	---	Antenna rotation rate: 24/36/48 rpm
Transceiver	RTR-094A	---	Contained in the Scanner.
Antenna	XN12A XN13A	---	One (1) selectable.

- (d) Primary Function: Search, Navigation and anticollision
- (e) Frequency Range: Fixed frequency, X-band (9410 MHz)  
Type of Emission: P0N
- (f) Power Supply: 12 - 24 VDC (\*), 92 W (for PSU-012).  
(\*): Power input voltages to the external equipment (Power Booster PSU-012). DRS12A was powered through the voltage regulator built in the PSU-012, not directly from the external mains power supply.

### 1.1.2 Radar Sensor

#### 1.1.2.1 Transceiver

**Type:** RTR-094A  
(Contained in the Scanner)

#### (1) Transmitter

- (a) Assignable Frequency for Shipborne Radar:  
Between 9300 and 9500 MHz (FCC Rule, 80.375 (d)-(1))
- (b) Type of RF Generator  
Magnetron Type: MAF1565N  
Peak Output Power: 12 kW nominal
- (c) Magnetron Ratings  
Center frequency of Magnetron: 9410 MHz  
Tolerances  
Manufacturing:  $\pm 30$  MHz  
Pulling: 23 MHz  
Tolerance for 20°C temperature variation: -5 MHz

(d) Pulse Characteristics:

Pulse type	S1	S2	M1	M2	M3	L1	L2
Pulse length ( $\mu$ s)	0.08	0.15	0.30	0.50	0.70	0.80	0.80
P.R.R.(Hz)	3000	3000	1500	1000	600	600	550

**(2) Modulator**

- (a) FET Type: 2SK1450  
Trigger Voltage: Approx. +20 VDC positive

**(3) Receiver**

- (a) Passband  
RF Stage: 60 MHz  
IF Stage:

Pulse type	S1	S2	M1	M2	M3	L1	L2
Passband (MHz)	20	20	20	1.7	1.7	1.7	1.7

- (b) Gain (overall): approximately 100 dB  
(c) Overall Noise Figure: 4.5 dB (typical)  
(d) Video Output Voltage:  $\pm 1$  V differential  
(e) Features Provided: Sensitivity Time Controls (Anti-clutter Sea),  
Fast Time Constant (Anti-clutter Rain)  
(f) If receiver is tunable, describe method for adjusting frequency:  
by adjustment of tuning voltage of receiver local oscillator (Automatic and manual)

**1.1.2.2 Antenna and Scanner**

- (a) Antenna Rotation ON-OFF Switch: Not Provided.  
(b) Antenna structure: Slotted array antenna  
(installed on the Scanner)

- (c) Antenna size:

Antenna type	XN12A	XN13A
Length (cm)	126 (4 ft.)	180 (6 ft.)

- (d) Type of Beam: Vertical fan

- (e) Beam Width (3 dB):

Antenna type	XN12A	XN13A
Horizontal ( $^{\circ}$ )	1.9	1.4
Vertical ( $^{\circ}$ )	22	22

- (f) Polarization: Horizontal

(g) Antenna Gain:

Antenna type	XN12A	XN13A
Gain (dB)	28.5	30.0

(h) Attenuation of Major Side Lobes with respect to main beam:

Antenna type	XN12A	XN13A
Within $\pm 10^\circ$ (dB)	27	29
Outside $\pm 10^\circ$ (dB)	34	37

(i) Scanning (rotating or oscillating): Rotating over 360° continuously clockwise

(j) Antenna Rotation Rate: 24/36/48 rpm

(k) Number of Degrees Scanned: 360°

(l) Sector Scan: Not provided.

(m) Rated Loss of Transmission line per hundred feet:  
Negligible. (Transmission path is only in the scanner unit.)

**1.1.3 Operational Features**

(a) Is positive means provided to indicate whether or not the overall operation of the equipment is such that it may be relied upon to provide effective operation in accordance with its primary function:

Yes (Receiver tuning indicator)

(b) Is the equipment for continuous operation: Yes

(c) Is provision made for operation with shore based radar beacons (RACONS):

Yes (RACONS)

**1.1.4 Line Power Supply Requirements**

(a) Input Voltage: 12 - 24 VDC (\*)

(\*): Power input voltages to the external equipment (Power Booster PSU-012). DRS12A was powered through the voltage regulator built in the PSU-012, not directly from the external mains power supply.

(b) Power consumption: 92 W (for PSU-012)

**1.1.5 Construction Features**

(a) Does equipment embody replacement units with chassis type assembly: Yes

(b) Are fuse alarms provided: No

(c) State units that are weatherproof: Rader Sensor (IEC 60529 – IP26)

(d) If all units are not housed in a single container, indicate number and give description of individual units:

1 X Radar Sensor

Scanner	Type: RSB-118
Transceiver	Type: RTR-094 (contained in the Scanner)
Antenna	XN12A or XN13A

(e) Approximate Weight of Complete Installation:

Radar Sensor: 25 kg (with Antenna XN13A installed.)

(f) Approximate space required for installation excluding scanner: not applicable.

## 1.2 Observation and comments

None.

## 2 Test Results Summary

CFR 47 Section	Item	Result	Test Engineer
2.1046	RF Power Output	Passed.	K. Imamura
2.1047	Modulation Characteristics	Passed.	K. Imamura
2.1049	Occupied Bandwidth	Passed.	K. Imamura
2.1055	Frequency Stability	Passed.	A. Inoue
	Spurious Emissions	---	---
2.1051	- Spurious Emissions at Antenna Terminal	Passed.	K. Imamura
2.1053	- Field Strength of Spurious Radiation	Passed.	K. Imamura and A. Inoue
80.217	Suppression of Interference Aboard Ships	Passed.	K. Imamura



### 3 Test Results

#### 3.1 RF Power Output (FCC Rule, 2.1046)

**(1) Test conditions:**

For all TX (S1/S2/M1/M2/M3/L1/L2) Pulses, the transmitter output power was measured at the antenna port with Antenna replaced with the Non-reflective load.

**(2) Test setup:**

See Clause 4.

**(3) Test Results:**

Pulse type	S1	S2	M1	M2	M3	L1	L2
Magnetron Output, mean (W):	1.37	2.70	3.53	4.24	3.54	4.08	3.73
Magnetron Output, peak (kW):	7.03	7.68	8.14	8.41	8.46	8.49	8.47

Environmental conditions observed: On 9 February 2011, 22°C to 22°C, 43% to 43 %RH

Power supply voltage measured (\*): 24.0 VDC to 24.0 VDC.

(\*): Power input voltages to the external equipment (Power Booster PSU-012) measured. DRS12A was powered through the voltage regulator built in the PSU-012, not directly from the external mains power supply.

#### 3.2 Modulation Characteristics (FCC Rule, 2.1047)

**(1) Test Conditions:**

The RF envelope of the magnetron output pulse was measured using an envelope detector and an oscilloscope.

Each pulse spectrum was measured using a spectrum analyzer.

**(2) Test setup:**

See Clause 4.

**(3) Limits (FCC Rule, 80.213 (g)):**

Upper limit frequency,  $f(U) = f_0 + f(AUBW)/2 - 1.5/T$

Lower limit frequency,  $f(L) = f_0 - f(AUBW)/2 + 1.5/T$

Note: Assigned frequency ( $f_0$ ): 9410 MHz

Authorized bandwidth ( $f(AUBW)$ ): 100 MHz

**(4) Test Results:**

Complied.

Pulse type	S1	S2	M1	M2	M3	L1	L2	Result
Pulselength T (μs) (-3 dB points)	0.065	0.117	0.289	0.504	0.698	0.800	0.800	Not applicable
Rise time t <sub>r</sub> (μs) (10 - 90 % amplitude)	0.012	0.014	0.016	0.016	0.016	0.016	0.016	Not applicable
Decay time t <sub>f</sub> (μs) (90 - 10 % amplitude)	0.080	0.088	0.095	0.095	0.095	0.095	0.095	Not applicable
PRR (Hz)	3000	3000	1500	1000	600	600	550	Not applicable
Guard Band f(1.5/T) (MHz) (*)	23.1	12.8	5.2	3.0	2.1	1.9	1.9	Not applicable
f(U) (MHz)	9436.9	9447.2	9454.8	9457.0	9457.9	9458.1	9458.1	Not applicable
f(L) (MHz)	9383.1	9372.8	9365.2	9363.0	9362.1	9361.9	9361.9	Not applicable
Frequency at maximum emission (MHz)	9417.0	9417.0	9417.0	9417.0	9417.0	9417.0	9417.0	Complied

(\*): Guard Band is specified to be equal to 1.5/T MHz, where "T" is the pulselength in microseconds.  
(FCC Rule, 80.209(b))

Measured Plots: See Clause 7.

Environmental conditions observed: On 9 February 2011, 22°C to 22°C, 43% to 43 %RH

Power supply voltage measured (\*): 24.0 VDC to 24.0 VDC.

(\*): Power input voltages to the external equipment (Power Booster PSU-012) measured. DRS12A was powered through the voltage regulator built in the PSU-012, not directly from the external mains power supply.

**3.3 Occupied Bandwidth (FCC Rule, 2.1049)**

**(1) Test conditions:**

For all TX (S1/S2/M1/M2/M3/L1/L2) Pulses, the transmitter occupied bandwidth was measured at the antenna port with Antenna replaced with the Non-reflective load.

**(2) Test setup:**

See Clause 4.

**(3) Test Results:**

Pulse type	S1	S2	M1	M2	M3	L1	L2
Occupied bandwidth (MHz)	56.7	40.5	21.4	13.4	10.5	9.3	9.2

Environmental conditions observed: On 10 February 2011, 21°C to 23°C, 49% to 45%RH

Power supply voltage measured (\*): 24.0 VDC to 24.0 VDC.

(\*): Power input voltages to the external equipment (Power Booster PSU-012) measured. DRS12A was powered through the voltage regulator built in the PSU-012, not directly from the external mains power supply.

### 3.4 Frequency Stability (FCC Rule, 2.1055)

#### (1) Test Conditions:

- 1) Radar Transmitter settings: All TX (S1/S2/M1/M2/M3/L1/L2) Pulses
- 2) Ambient Temperature settings: - 30°C to + 50°C (10°C interval)
- 3) Power Supply Voltage settings: 85 /115 % of nominal voltage (10.2 VDC/27.6 VDC)

#### (2) Test setup:

See Clause 4.

#### (3) Frequency Tolerance Limits (FCC Rule, 80.213 (g)):

Pulse type	S1	S2	M1	M2	M3	L1	L2
f(U) (MHz)	9436.9	9447.2	9454.8	9457.0	9457.9	9458.1	9458.1
f(L) (MHz)	9383.1	9372.8	9365.2	9363.0	9362.1	9361.9	9361.9

See Clause 3.2 for details.

#### (4) Test Results:

Complied.

Power Supply Voltage setting (\*): 10.2 VDC

Pulse type		S1	S2	M1	M2	M3	L1	L2	Result
Frequency at maximum emission (MHz)	-30°C	9422.5	9422.5	9422.5	9422.5	9422.5	9422.5	9422.5	Complied
	-20°C	9421.4	9421.4	9421.4	9421.4	9421.4	9421.4	9421.4	Complied
	-10°C	9420.3	9420.3	9420.3	9420.3	9420.3	9420.3	9420.3	Complied
	0°C	9419.2	9419.2	9419.2	9419.2	9419.2	9419.2	9419.2	Complied
	+10°C	9418.1	9418.1	9418.1	9418.1	9418.1	9418.1	9418.1	Complied
	+20°C	9417.0	9417.0	9417.0	9417.0	9417.0	9417.0	9417.0	Complied
	+30°C	9416.5	9416.5	9416.5	9416.5	9416.5	9416.3	9416.3	Complied
	+40°C	9416.0	9416.0	9416.0	9416.0	9416.0	9415.7	9415.7	Complied
	+50°C	9415.5	9415.5	9415.5	9415.5	9415.5	9415.0	9415.0	Complied

Power Supply Voltage setting (\*): 27.6 VDC

Pulse type		S1	S2	M1	M2	M3	L1	L2	Result
Frequency at maximum emission (MHz)	-30°C	9422.5	9422.5	9422.5	9422.5	9422.5	9422.5	9422.5	Complied
	-20°C	9421.4	9421.4	9421.4	9421.4	9421.4	9421.4	9421.4	Complied
	-10°C	9420.3	9420.3	9420.3	9420.3	9420.3	9420.3	9420.3	Complied
	0°C	9419.2	9419.2	9419.2	9419.2	9419.2	9419.2	9419.2	Complied
	+10°C	9418.1	9418.1	9418.1	9418.1	9418.1	9418.1	9418.1	Complied
	+20°C	9417.0	9417.0	9417.0	9417.0	9417.0	9417.0	9417.0	Complied
	+30°C	9416.7	9416.7	9416.7	9416.5	9416.5	9416.5	9416.5	Complied
	+40°C	9416.3	9416.3	9416.3	9416.0	9416.0	9416.0	9416.0	Complied
	+50°C	9416.0	9416.0	9416.0	9415.5	9415.5	9415.5	9415.5	Complied

Environmental conditions observed: On 18 August 2010, 25°C to 25°C, 54% to 54%RH

On 19 August 2010, 24°C to 25°C, 54% to 61%RH

(\*): Power input voltages to the external equipment (Power Booster PSU-012) measured. DRS12A was powered through the voltage regulator built in the PSU-012, not directly from the external mains power supply.

**3.5 Spurious Emissions**

**3.5.1 Spurious Emissions at Antenna Terminal (FCC Rule, 2.1051)**

**(1) Test Conditions:**

For all TX (S1/S2/M1/M2/M3/L1/L2) Pulses, the transmitter output power will be measured at the antenna port with Antenna replaced with the Non-reflective load.

**(2) Test setup:**

See Clause 4.

**(3) Emission Limits (FCC Rule, 80.211 (f)):**

Frequency removed from the assigned frequency	Emission attenuation (mean power, dB)
50 - 100 % (of the authorized bandwidth)	At least 25
100 - 250 % (of the authorized bandwidth)	At least 35
more than 250 % (*) (of the authorized bandwidth)	At least $43 + 10 \log_{10}$ (mean power in watts)

Note: (1) Authorized bandwidth = 100 MHz

(\*) - for the relevant frequency bands, tests were performed according to FCC Rule, 2.1053. See Clause 3.5.2.

**(4) Test Results:**

Complied.

From the results of the pre-tests, the EUT emission level was found to be the maximum with S1 pulse. Consequently, the test was performed only with S1 pulse.

Spectrum Plots: See Clause 8.

Environmental conditions observed: On 10 February 2011, 21°C to 23°C, 49% to 45%RH

Power supply voltage measured (\*): 24.0 VDC to 24.0 VDC.

(\*): Power input voltages to the external equipment (Power Booster PSU-012) measured. DRS12A was powered through the voltage regulator built in the PSU-012, not directly from the external mains power supply.

### 3.5.2 Field Strength of Spurious Radiation (FCC Rule, 2.1053)

#### (1) Test Conditions:

For all TX (S1/S2/M1/M2/M3/L1/L2) Pulses, the Radiated Emission test was performed.

(a) For the test frequency range of 9 kHz to 2000 MHz, the Antenna for Transceiver was replaced with the rotating non-reflective load. Spurious emissions for 9 kHz to 2000 MHz are not found at the antenna terminal due to its structure (Waveguide tube). The EUT cabinet radiation was measured with the EUT rotated 360°.

(b) For 2 GHz to 40 GHz, the Antenna was set to the Transceiver with the stop mode.

#### (2) Test Site: FLI Nishinomiya-Hama Laboratory, Semi-Anechoic Chamber

(FCC file number: 90607)

#### (3) Distance between the radar set and measuring antenna: 3 m

#### (4) Test setup:

For the test frequency range of 2 GHz to 40 GHz, the GRP (Ground reference plane, metal floor) between the EUT and the measuring (receiving) antenna was lined with the Radio Absorbers (2.4 m × 3.0 m × 0.5 m) to reduce the influences of the reflections of the RF waves from the floor.

#### Measuring (Receiving) Antenna height and polarization:

(a1) 1.5 m for the test frequency range of 9 kHz to 30 MHz,

(a2) 1 m to 4 m for the test frequency range of 30 MHz to 2000 MHz,

(b) 2.1 m that was same as those for the EUT for the test frequency range of 2 GHz to 40 GHz.

(c) Antenna polarization: vertical and horizontal.

#### EUT height:

(a) 0.8 m for the test frequency range of 9 kHz to 2000 MHz,

(b) 2.1 m for the test frequency range of 2 GHz to 40 GHz (To reduce the influences of the reflections from GRP).

See Clauses 4 and 6.

**(5) Field Strength Limits (FCC Rule, 80.211 (f)):**

Frequency removed from the assigned frequency	Frequency (MHz) (for X-band)	Emission attenuation (mean power, dB)
50 - 100 % (*) (of the authorized bandwidth)	9,310 - 9,360	At least 25
	9,460 - 9,510	
100 - 250 % (*)	9,160 - 9,310	At least 35
	9,510 - 9,660	
more than 250 %	0.009 - 9,160	At least 43 + 10 log <sub>10</sub> (mean power in watts)
	9,660 - 40,000	

Note: (1) Assigned frequency (center frequency) = 9410 MHz

(2) Authorized bandwidth = 100 MHz

(\*) - for the relevant frequency bands, tests were performed according to FCC Rule, 2.1051. See Clause 3.5.1.

**(6) Test Results:**

Complied.

From the results of the pre-tests, the spurious emission level was found to be the maximum with Antenna XN13A, L1 pulse. Consequently, the test was performed only with Antenna XN13A, L1 pulse.

$$\begin{aligned}
 [\text{Limit}] &= 43 + 10 \log_{10} (\text{mean power in watts}) \\
 &= 43 + 10 \log_{10} (4.1) \\
 &= 49.1 \text{ dB}
 \end{aligned}$$

where, [ mean power in watts ] = 4.1 W for L1 pulse. See 3.1.

For this time, Limit of 60 dB was applied for the test.

The electric field strength of the maximum power radiation was 179.1 dB $\mu$ V/m with L1 pulse. Consequently, the allowable emission limit was set to 119.1 dB $\mu$ V/m (= 179.1 dB $\mu$ V/m - 60 dB).

As a result, the minimum emission attenuation was found to be more than 60 dB.

Spectrum plots: See Clause 9.

Spurious Emission Frequency and Electric Field Strength that were prominent were listed in the following table.

Frequency (GHz)	Antenna Polarization	Pulse type	Electric Field Strength measured (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
18.836	Horizontal	L1	84.6	119.1	34.5
18.836	Vertical	L1	70.6	119.1	48.5

Environmental conditions observed: On 28 February 2011, 21°C to 22°C, 65% to 58 %RH

Power supply voltage measured (\*): 24.0 VDC to 24.0 VDC.

On 1 March 2011, 21°C to 21°C, 57% to 57 %RH

Power supply voltage measured (\*): 24.0 VDC to 24.0 VDC.

(\*): Power input voltages to the external equipment (Power Booster PSU-012) measured. DRS12A was powered through the voltage regulator built in the PSU-012, not directly from the external mains power supply.

### 3.6 Suppression of Interference Aboard Ships (FCC Rule, 80.217)

**(1) Test Conditions/Test Setup:** Same as those for Clause 3.5.2 (2) to (5) except for the EUT operating mode.

**(2) Test frequency range:** 14 kHz to 40 GHz

**(3) Spurious Emission Limits for Receivers:**

(a) for delivered power to artificial antenna,

Frequency	Power to artificial antenna		Resolution bandwidth of Spectrum analyzer		
	( $\mu$ W)	(dBm)			
9 kHz - 150 kHz	400	-4	1 kHz		
150 kHz - 30 MHz			10 kHz		
30 MHz - 100 MHz	4,000	+6	100 kHz		
100 MHz to 300 MHz				40,000	+16
300 MHz - 1 GHz				400,000	+26
1 GHz - 40 GHz			1 MHz		

**(4) Test Results:**

Complied.

Spurious emission levels measured were found to be attenuated below the measuring equipment noise floor.

Tests were performed with the EUT Standby mode (= receive only mode).

Spectrum plots: See Clause 10.

Environmental conditions observed: On 18 February 2011, 23°C to 23°C, 52% to 55 %RH

Power supply voltage measured (\*): 24.0 VDC to 24.0 VDC.


(\*): Power input voltages to the external equipment (Power Booster PSU-012) measured. DRS12A was powered through the voltage

regulator built in the PSU-012, not directly from the external mains power supply.




## 4 Test Setup for Measurement:


### (1) Test Setup for Clauses 3.1, 3.2, 3.3, 3.4, and 3.5.1.

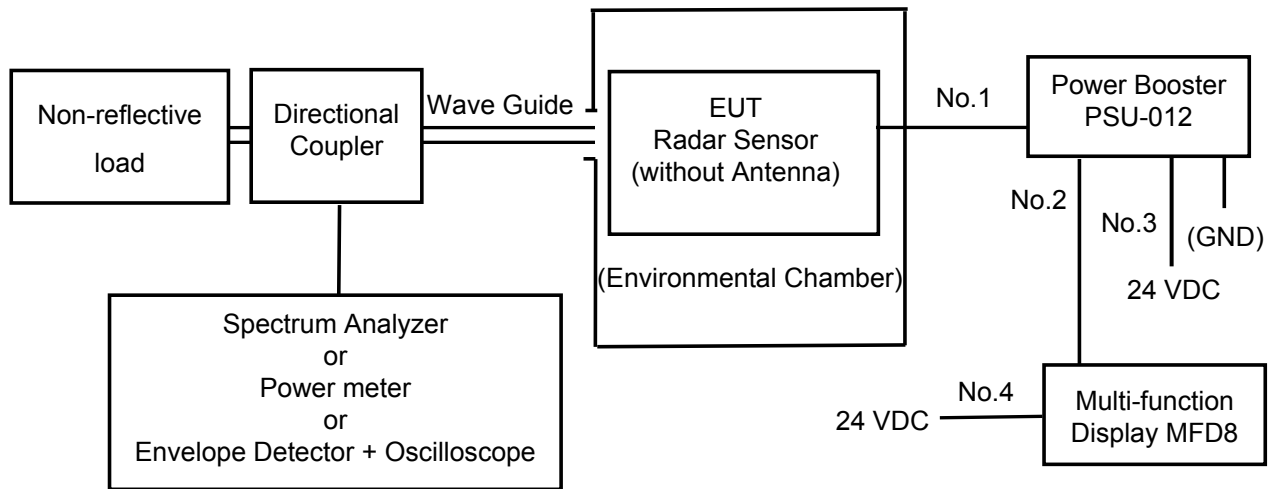

### (2) Test Setup for Clause 3.5.2.

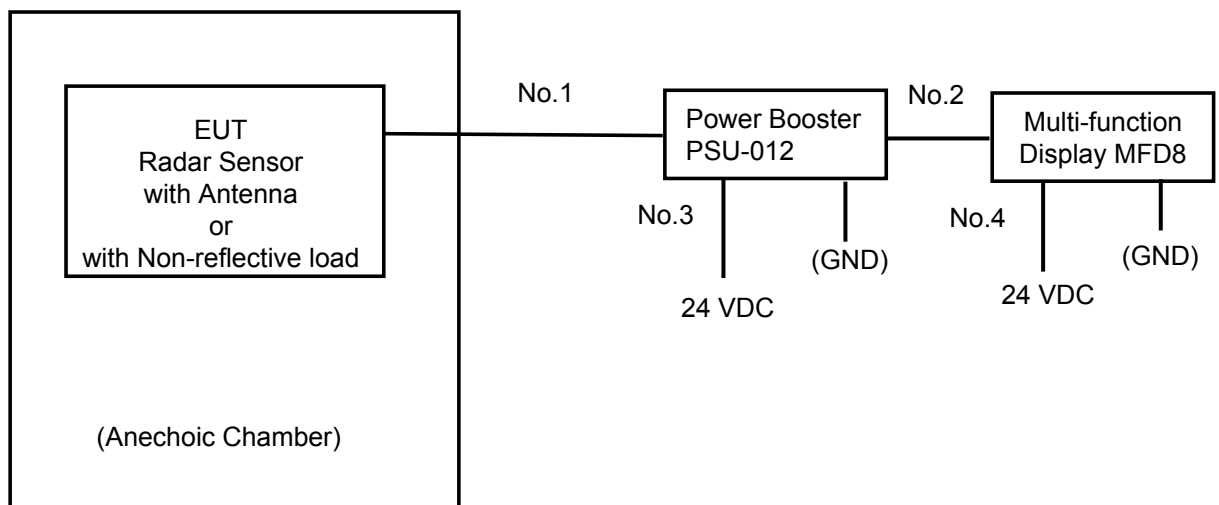

**(3) Test Setup for Clause 3.6.**

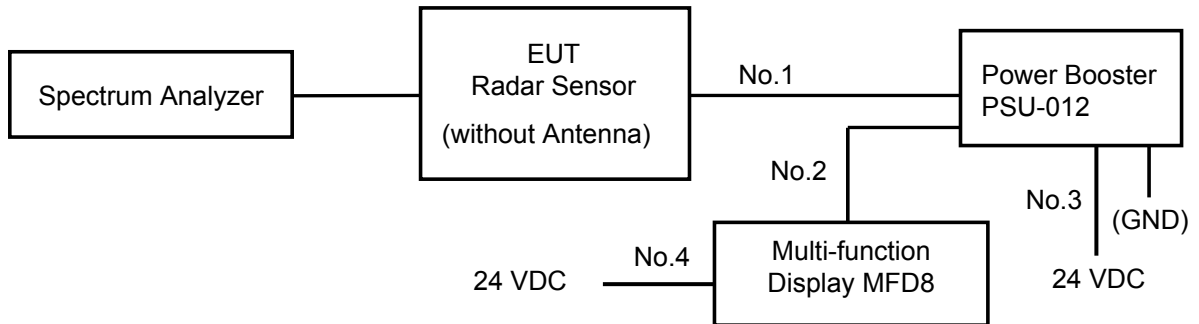

Cable designations:

No.	Name	Length (m)
1	19S1127	20
2	19S1181	5
3	03S9801	5
4	MJ-A3SPF0017-050ZC	5

## 5 Measuring Equipment List:

### (1) For 3.1 Transmitter Output Power:

C/N	Instrument	Type	S/N	Manufacturer	Date of last calibration
8408089	Power meter	436A	2410A19137	Agilent	19 November 2010
8408089	Power Sensor	8481A	2349A39603	Agilent	19 November 2010
HT656	Crystal Detector	432B	MY42243767	Agilent	1 March 2010
8411096	Directional Coupler (X-band)	5D364S	R05762	Shimada	17 March 2010
8411057	Dummy Load (X-band)	4D376	---	Shimada	---
8408087	Frequency Counter	TR5824A	41940036	Advantest	4 April 2010
0404008	Attenuator	8494B	MY42141964	Agilent	23 March 2010
0404008	Attenuator	8495B	MY42140929	Agilent	4 March 2010
HT594	Oscilloscope	DSO6102	MY44001501	Agilent	8 November 2010

### (2) For 3.2 Modulation Characteristics:

C/N	Instrument	Type	S/N	Manufacturer	Date of last calibration
8408089	Power meter	436A	2410A19137	Agilent	19 November 2010
8408089	Power Sensor	8481A	2349A39603	Agilent	19 November 2010
HT656	Crystal Detector	432B	MY42243767	Agilent	1 March 2010
8411096	Directional Coupler (X-band)	5D364S	R05762	Shimada	17 March 2010
8411057	Dummy Load (X-band)	4D376	---	Shimada	---
8408087	Frequency Counter	TR5824A	41940036	Advantest	4 April 2010
0404008	Attenuator	8494B	MY42141964	Agilent	23 March 2010
0404008	Attenuator	8495B	MY42140929	Agilent	4 March 2010
HT594	Oscilloscope	DSO6102	MY44001501	Agilent	8 November 2010

### (3) For 3.3 Occupied Bandwidth and for 3.5.1 Spurious Emissions at Antenna Terminal:

C/N	Instrument	Type	S/N	Manufacturer	Date of last calibration
8411096	Directional Coupler (X-band)	5D364S	R05762	Shimada	17 March 2010
8411057	Dummy Load (X-band)	4D376	---	Shimada	---
HT676	Spectrum Analyzer	8564EC	4103A00440	Agilent	15 February 2010
0404008	Attenuator	8494B	MY42141964	Agilent	23 March 2010
0404008	Attenuator	8495B	MY42140929	Agilent	4 March 2010
KB-011	Coaxial cable	SUCOFLEX 106 - 2m	12226/6	SUHNER	---
KB-137	3.5 mm cable	MWX221-2m	0804S167	Junkosha	---

### (4) For 3.4 Frequency Stability:

C/N	Instrument	Type	S/N	Manufacturer	Date of last calibration
HT370	Climatic chamber (L)	TBE-3HW5GE2F	3013000995	Tabai Espec	12 September 2010
HT128	Temperature recorder (L)	437006/R1182	4370TB580	Yokogawa	19 July 2010
8411096	Directional Coupler	5D364S	R05762	Shimada	17 March 2010
8411057	Dummy Load	4D376	R05763	Shimada	17 March 2010
----	Waveguide (for X-band)	WRJ-10 (l = 60 cm)	----	Furuno	---
HT676	Spectrum Analyzer	8564EC	4103A00440	Agilent	15 February 2010
HT654	Attenuator	8494B	MY42148134	Agilent	23 March 2010

C/N	Instrument	Type	S/N	Manufacturer	Date of last calibration
HT655	Attenuator	8495B	MY42144403	Agilent	4 March 2010
KB-011	Coaxial cable	SUCOFLEX 100 - 2m	12226/6	SUHNER	---
KB-137	Coaxial cable	MWX221 - 2m	0804S167	Junkosha	---
HT432	DC power supply	PAN55-20	AK003307	Kikusui	---

**(5) For 3.5.2 Field Strength of Spurious Radiation:**

C/N	Instrument	Type	S/N	Manufacturer	Date of last calibration
HT463	Spectrum analyzer (9 kHz to 3 GHz)	R3132	110401654	Advantest	23 July 2010
HT565	Loop antenna (0.15 - 30 MHz)	HFH2-Z2	100093	Rohde & Schwarz	23 July 2010
HT459	Biconical antenna (30 MHz to 300 MHz)	VBA6106A	1296	Schaffner	13 August 2010
HT331	Log periodic antenna (300 MHz to 1000 MHz)	UHALP9107	8411059	Schwarzbeck	13 August 2010
HT467	Double-ridged waveguide horn antenna (1 GHz to 18 GHz)	3115	6520	EMCO	12 August 2010
HT518	Pre-amplifier (30 MHz to 2 GHz)	87405A	3207A01643	Agilent	19 August 2010
HT365	Semi-anechoic Chamber	3mSAC	D-002	Riken	15 September 2010
33704347	Spectrum Analyzer	E4446A	US45300557	Agilent	15 February 2011
740060501	Horn antenna (18 GHz to 26.5 GHz)	42-442-6	E414109-01	A.H. Systems	---
0511041	Low-noise amplifier	JSWV4-18002600-30-8P	1058348	MITEQ	---
----	DC power supply for Low-noise amplifier	EX-375L2	405650060347	Takasago	---
740060502	Horn antenna (26.5 GHz to 40 GHz)	28-442-6	E414209-01	A.H. Systems	---
----	Notch Filter (X-band)	CBR-X7-3A	R9865001	Shimada	---
-----	Coaxial cable	SUCOFLEX 106 - 2m	-----	SUHNER	---
-----	Coaxial cable	SUCOFLEX 104 - 2m	-----	SUHNER	---
-----	Coaxial cable	SUCOFLEX 104 - 5m	250497	SUHNER	---
-----	Coaxial cable	SUCOFLEX 102 - 5m	265055	SUHNER	---

**(6) For 3.6 Spurious Emission Limits for Receivers:**

C/N	Instrument	Type	S/N	Manufacturer	Date of last calibration
HT676	Spectrum Analyzer	8564EC	4103A00440	Agilent	15 February 2010
KB-137	3.5 mm cable	MWX221-2m	0804S167	Junkosha	---

## 6 Photograph of Test Setup/Arrangement


(1) For Temperature (TX frequency stability) tests,



(2) For Spurious Emission measurements,



for 9 kHz to 2000 MHz

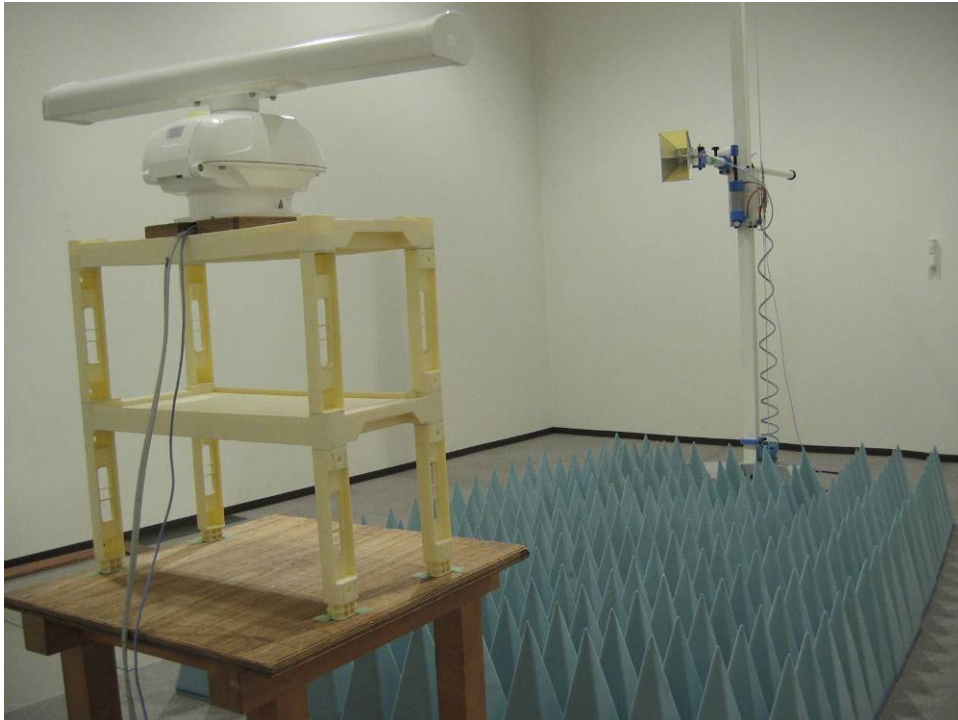

for 2 GHz to 40 GHz

## 7 RF Envelope and Spectrum of the output pulse

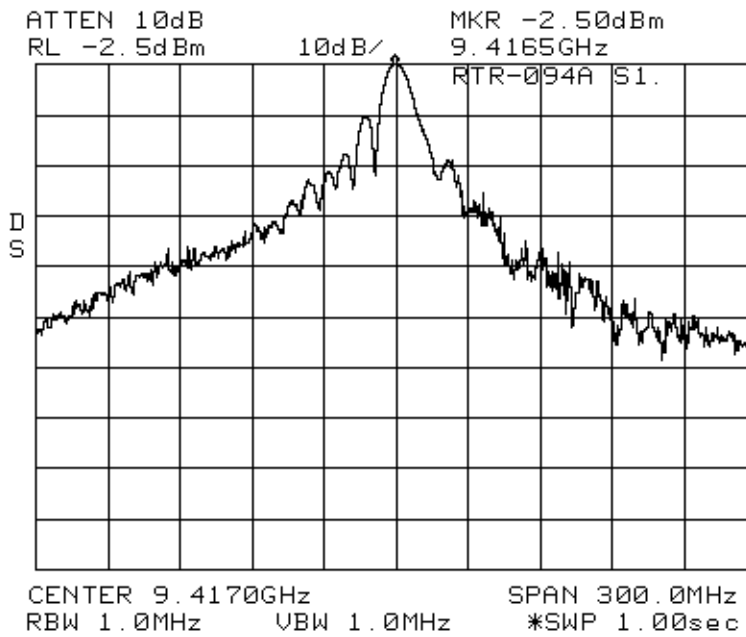
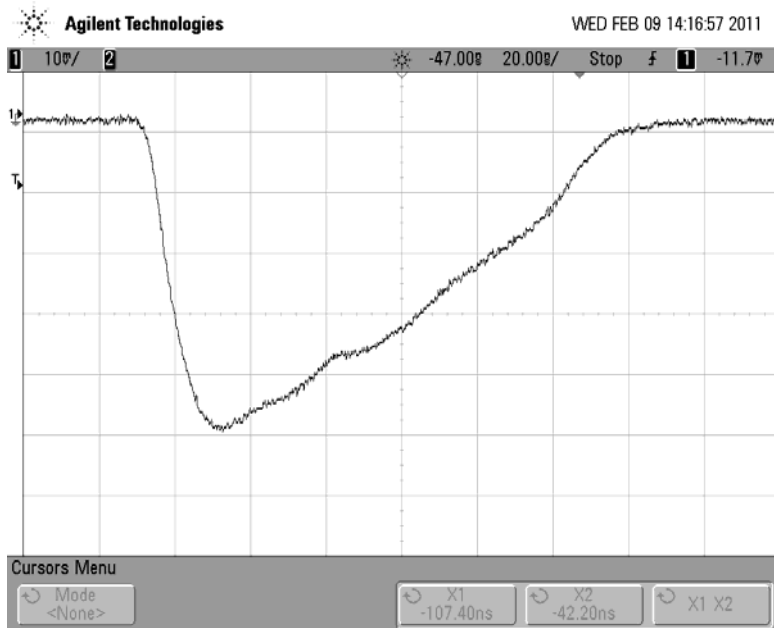


Fig. 7.1 S1 Pulse Envelope and Spectrum

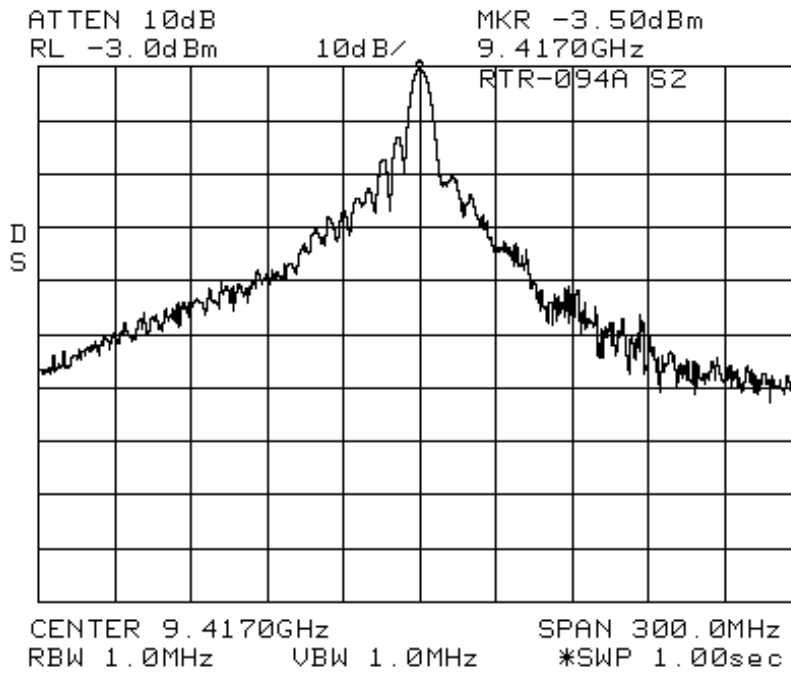
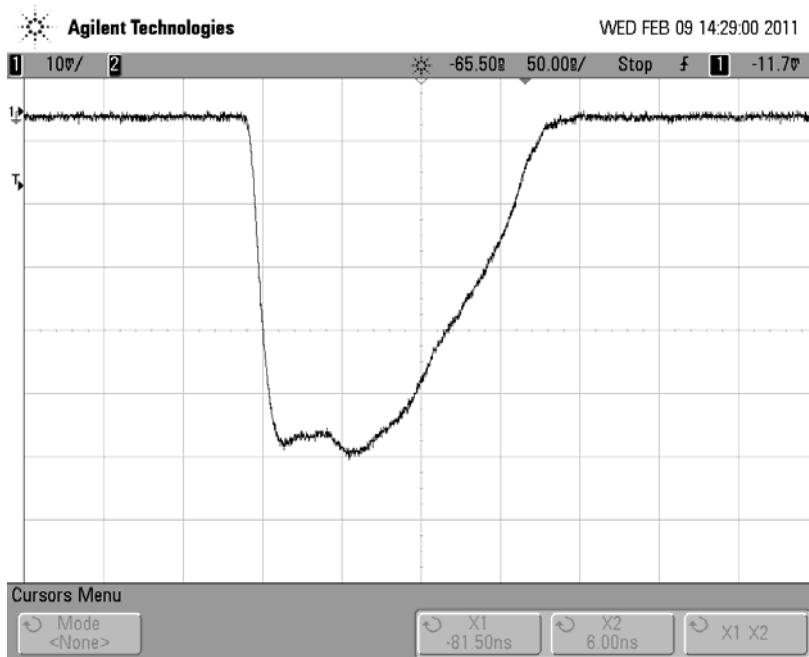


Fig. 7.2 S2 Pulse Envelope and Spectrum



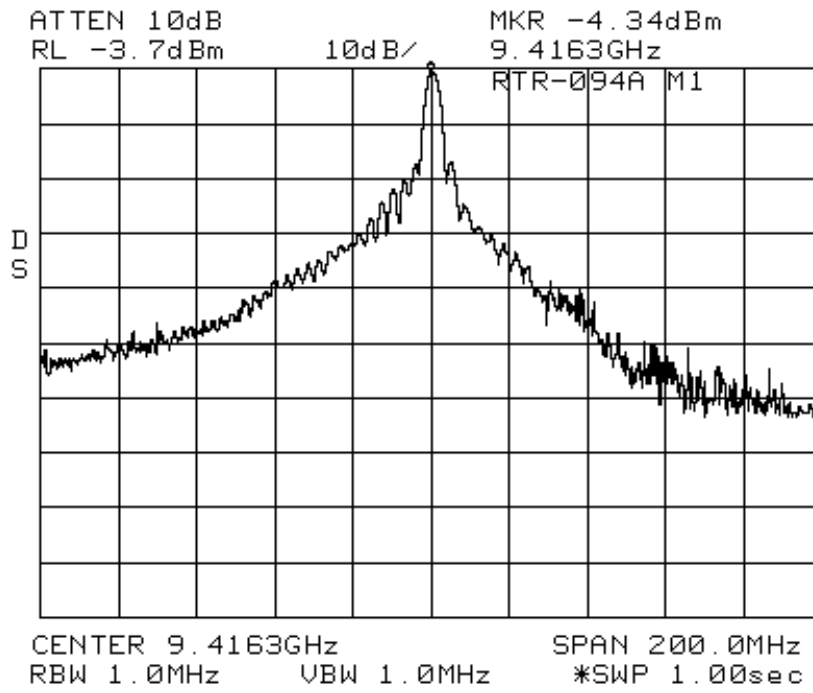
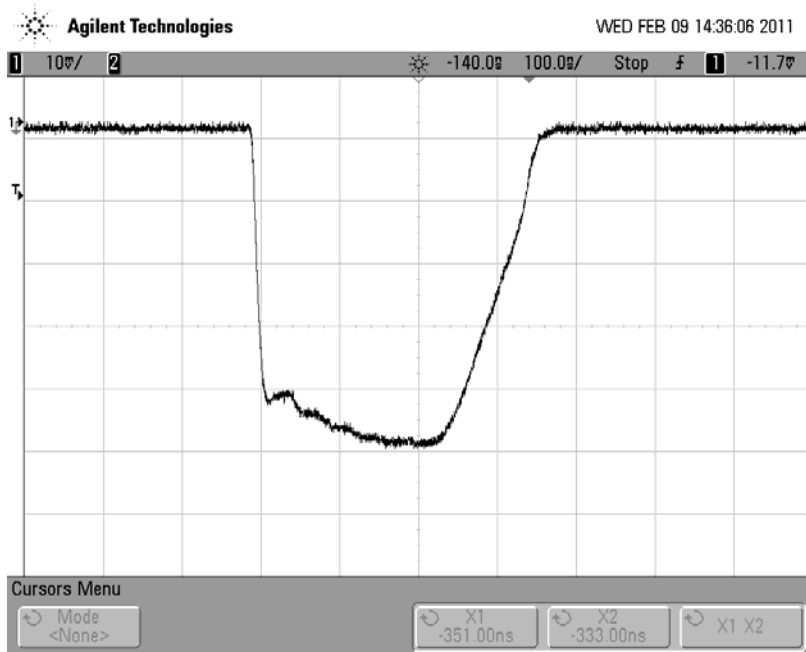


Fig. 7.3 M1 Pulse Envelope and Spectrum

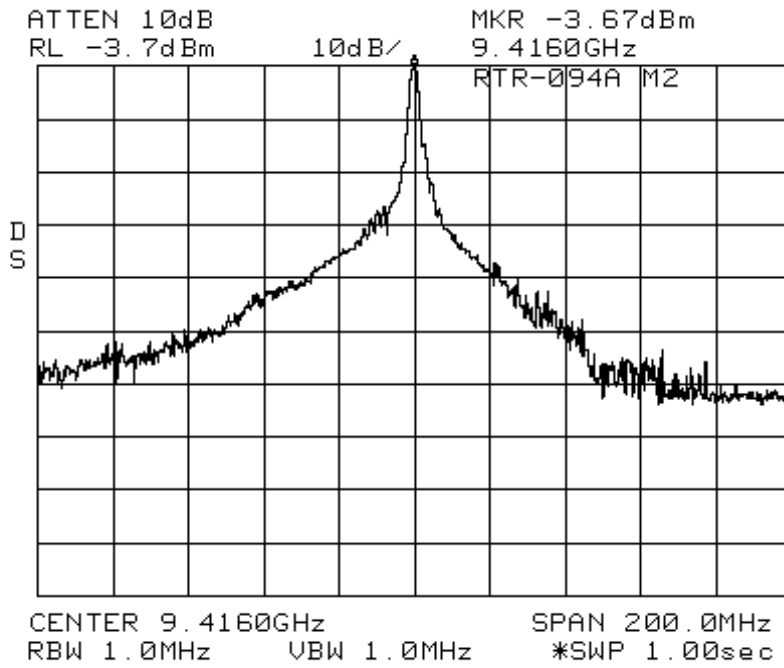
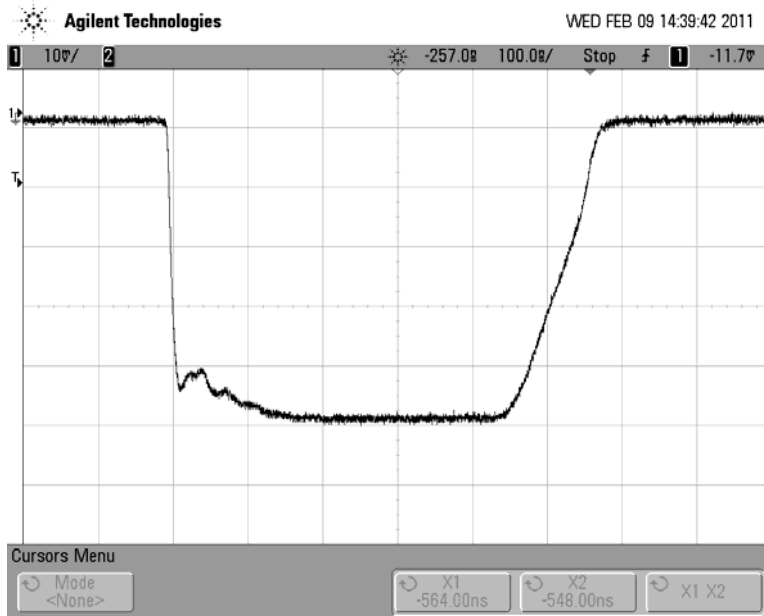


Fig. 7.4 M2 Pulse Envelope and Spectrum

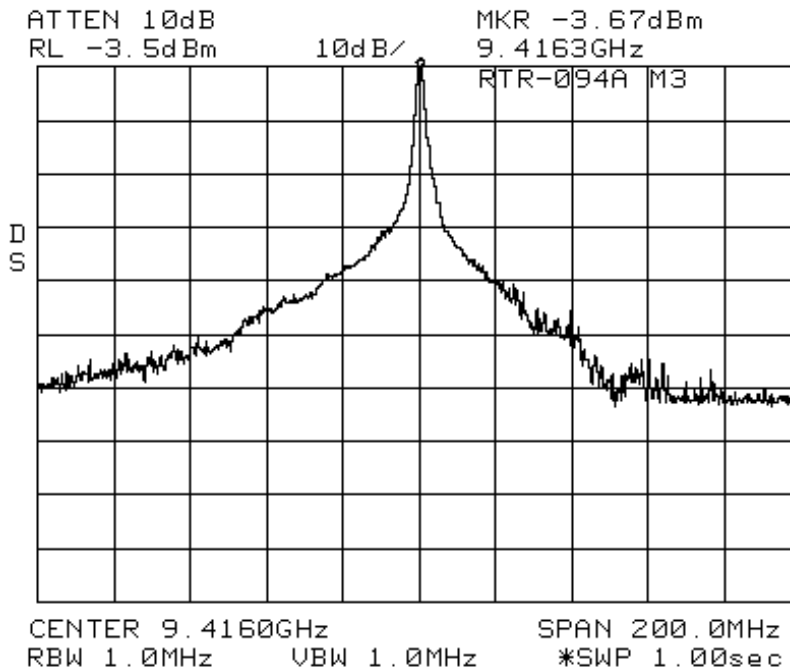
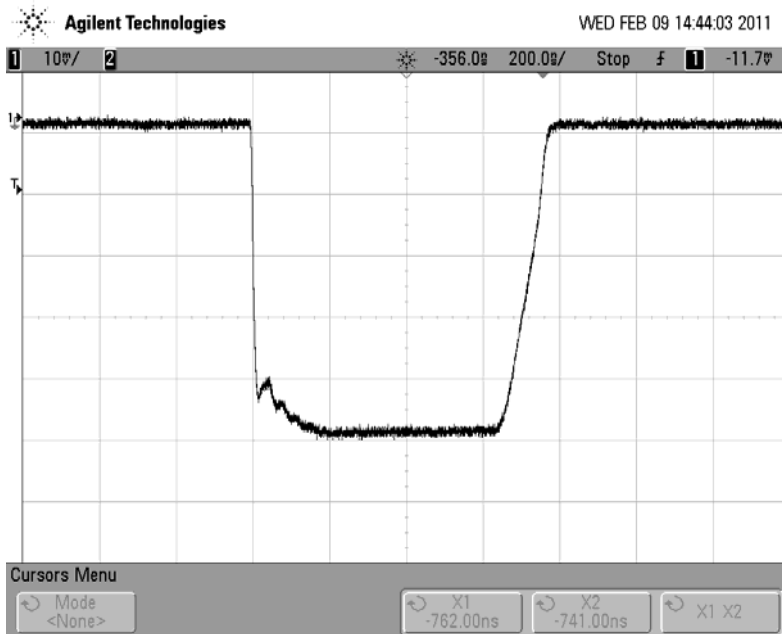


Fig. 7.5 M3 Pulse Envelope and Spectrum

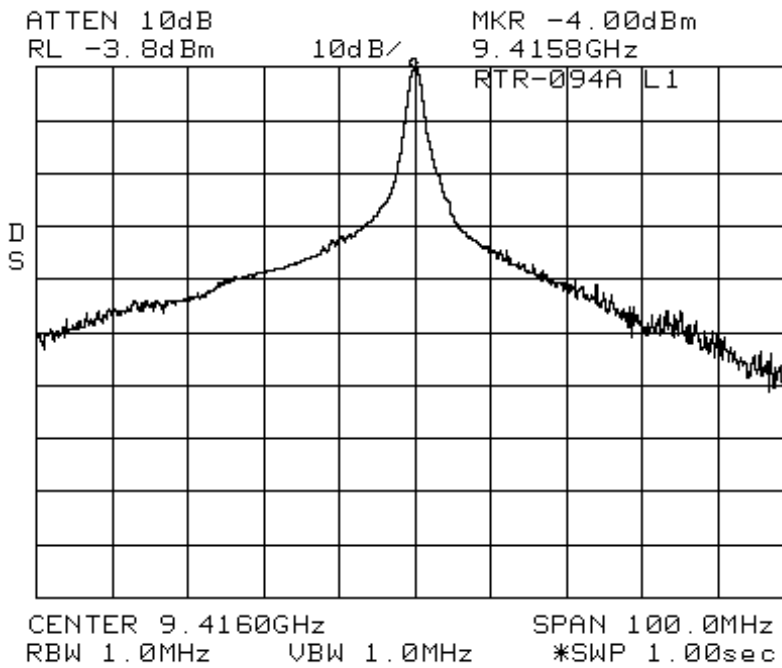
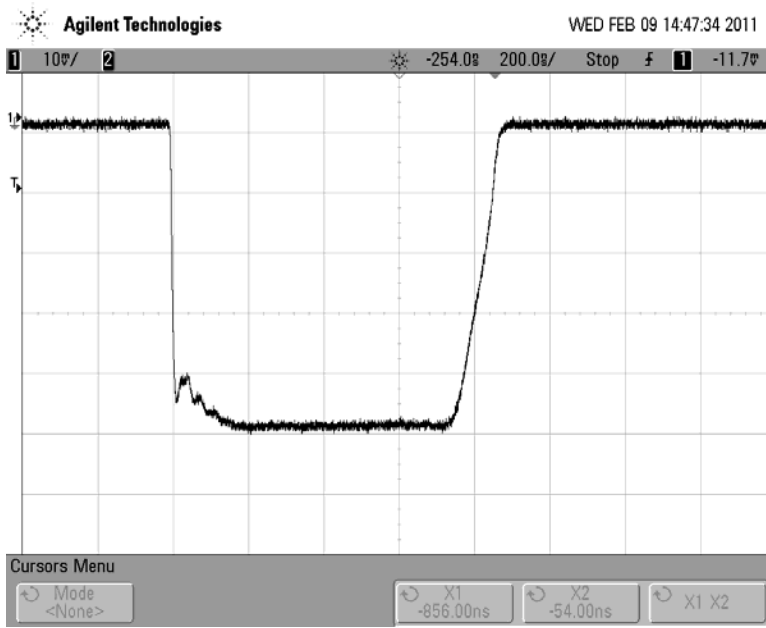


Fig. 7.6 L1 Pulse Envelope and Spectrum



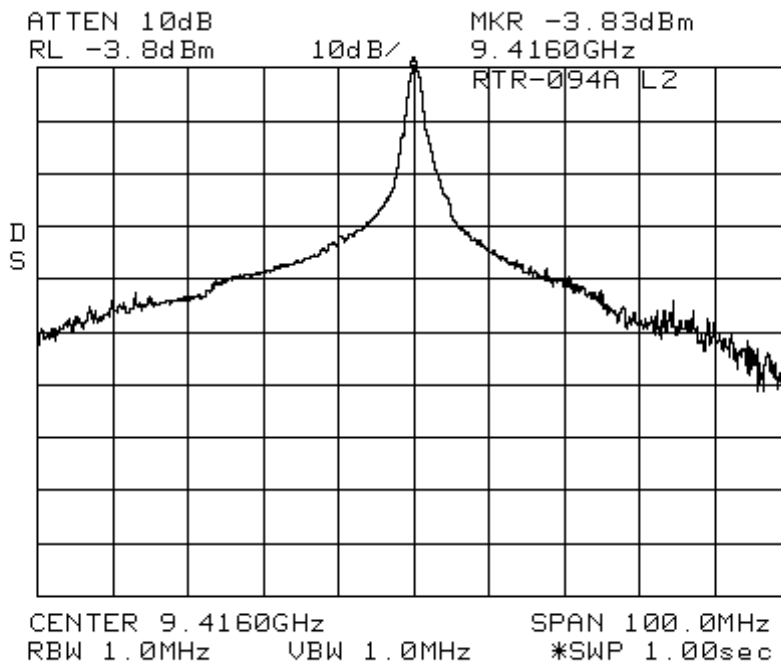


Fig. 7.7 L2 Pulse Envelope and Spectrum

## 8 Spurious Emission Plots measured at Antenna Terminal


for S1 pulse

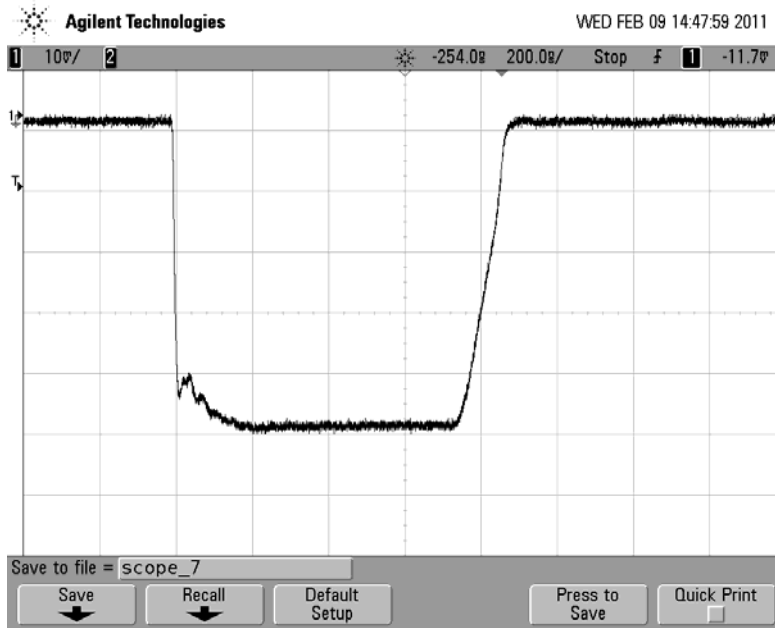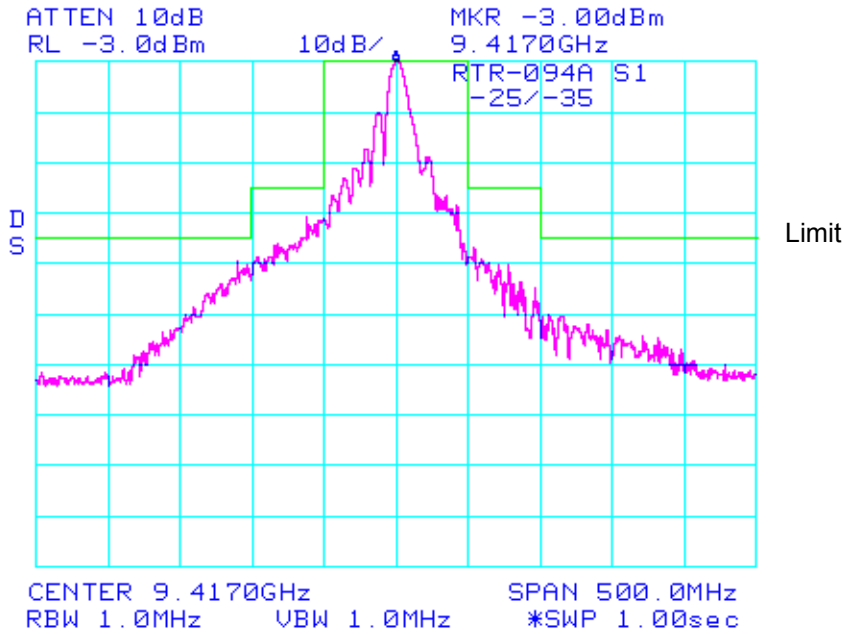


# 9 Field Strength Plots of Spurious Radiation

## 9.1 Maximum power radiation level (for L1 Pulse)

- Horizontal

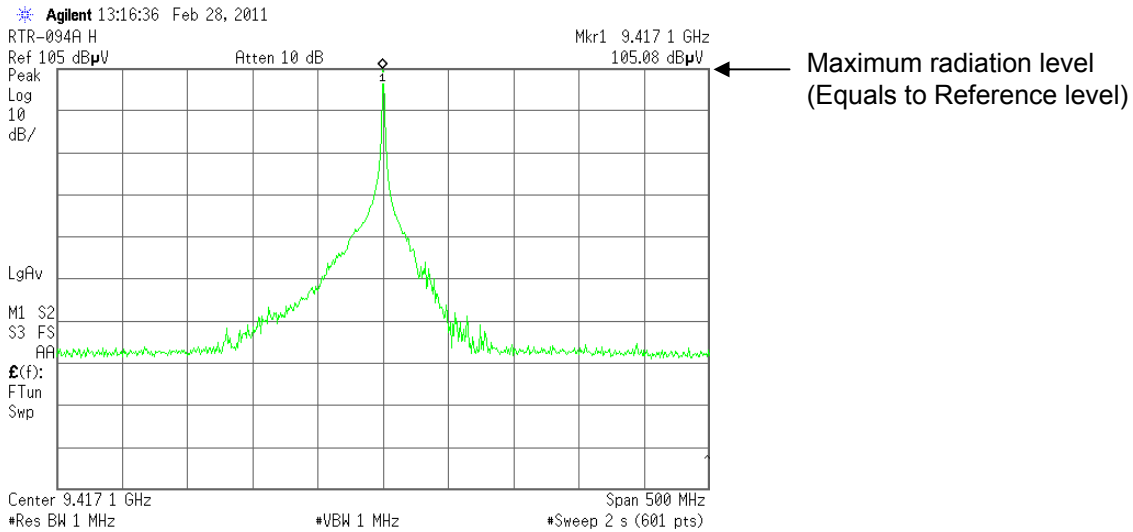

- Vertical

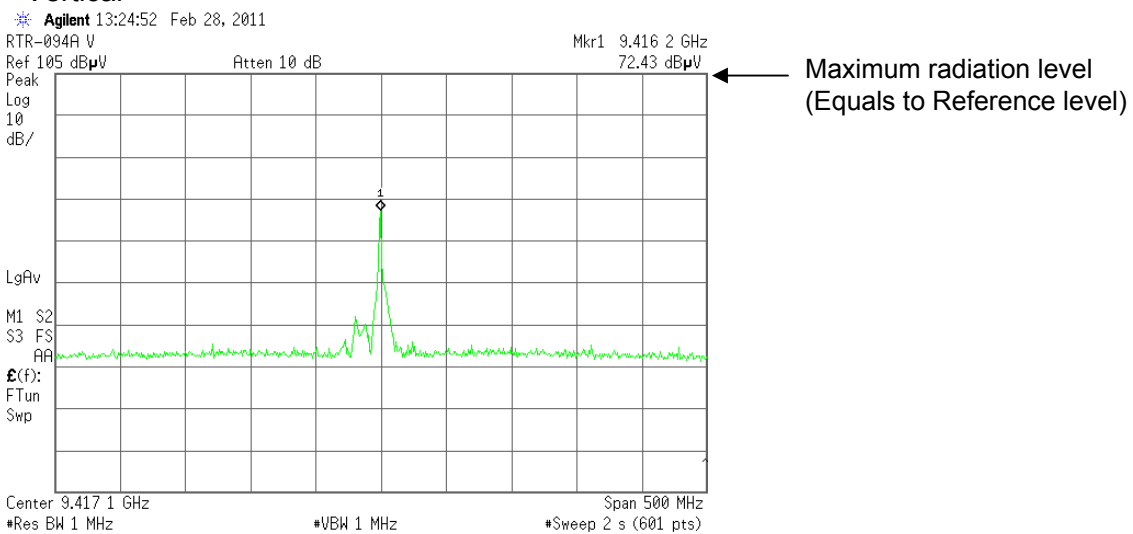


For the maximum power radiation level, the voltage value measured by the spectrum analyzer was converted into the electric field strength with the measuring antenna factor, Cable loss and Amp. gain.

Maximum power radiation level = 179.1 dBμV/m

Therefore, Emission Limit = 179.1 dBμV/m - 60 dB = 119.1 dBμV/m

**9.2 Spurious emissions (L1 pulse)**


(1) for 9 kHz to 30 MHz

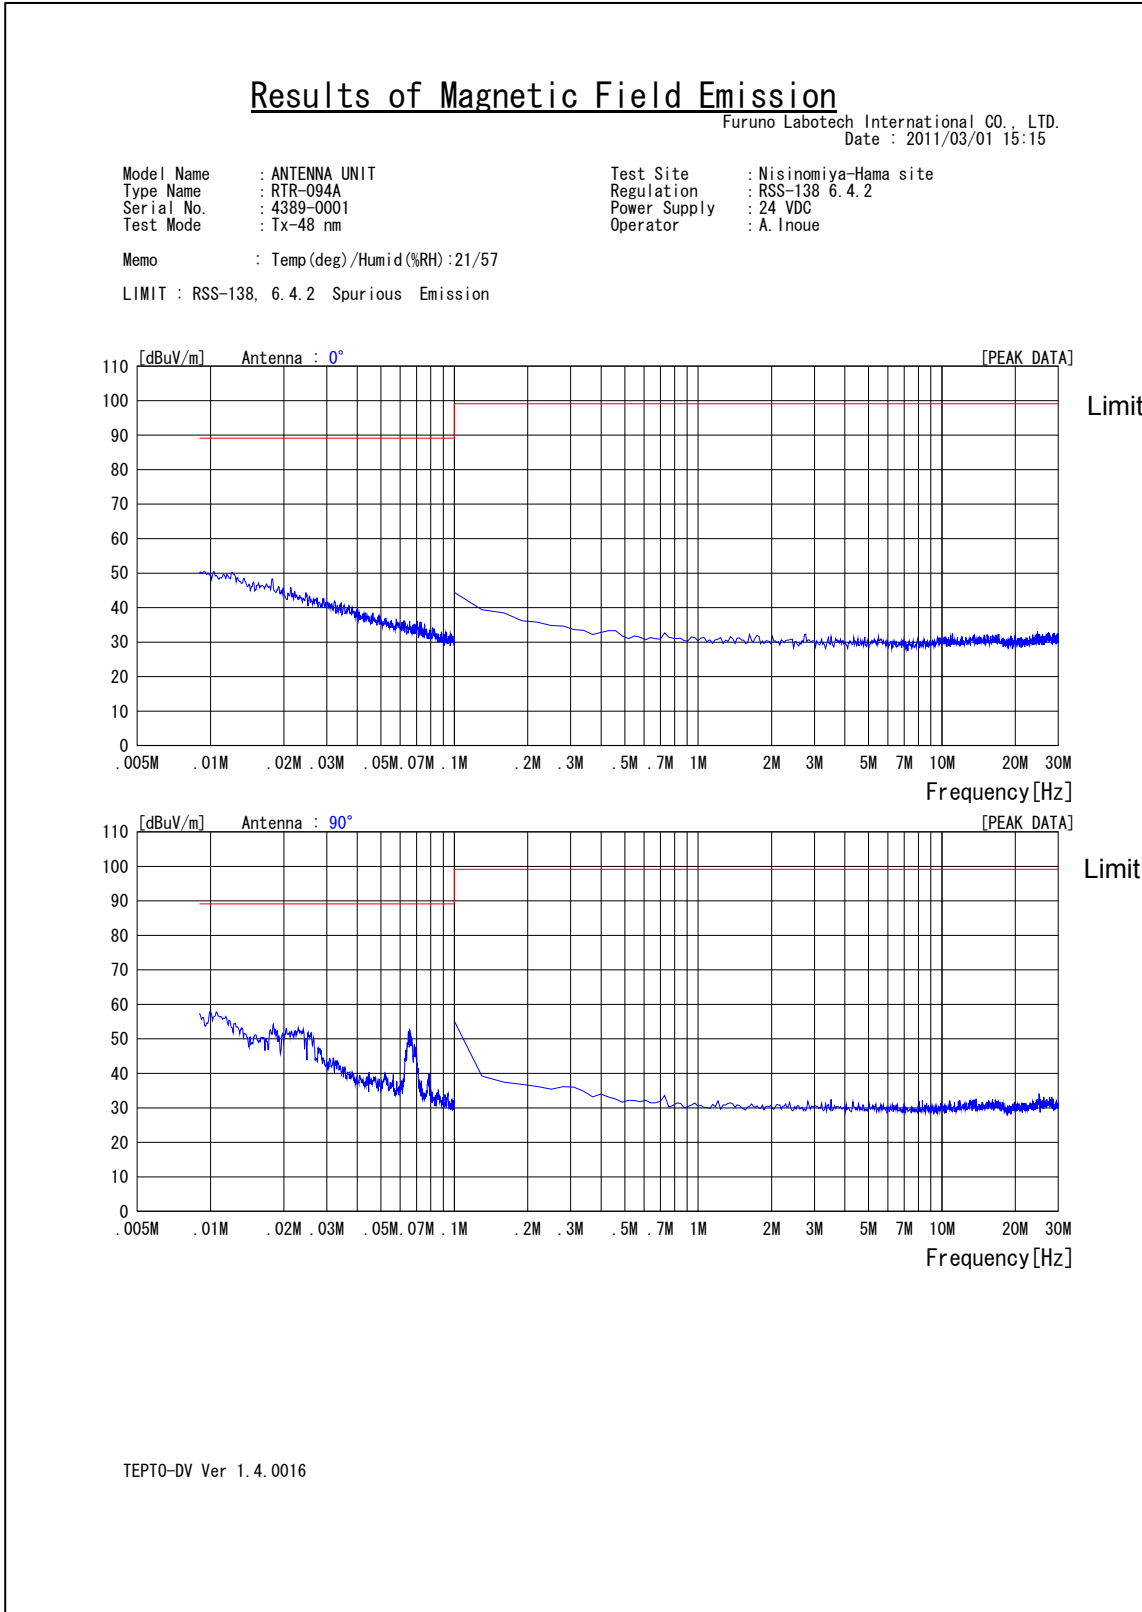

(\*) The resolution bandwidth of the spectrum analyzer in the frequency range of 9 kHz to 100 kHz was set to 1 kHz, and 100 kHz to 30 MHz, to 10 kHz, instead of 1 MHz at the frequency range from 2 GHz to 40 GHz. The applicable limit was set at 30 dB lower than that computed in Clause 9.1 for the former frequency range, and 20 dB lower for the latter frequency range.




(2) for 30 MHz to 2000 MHz

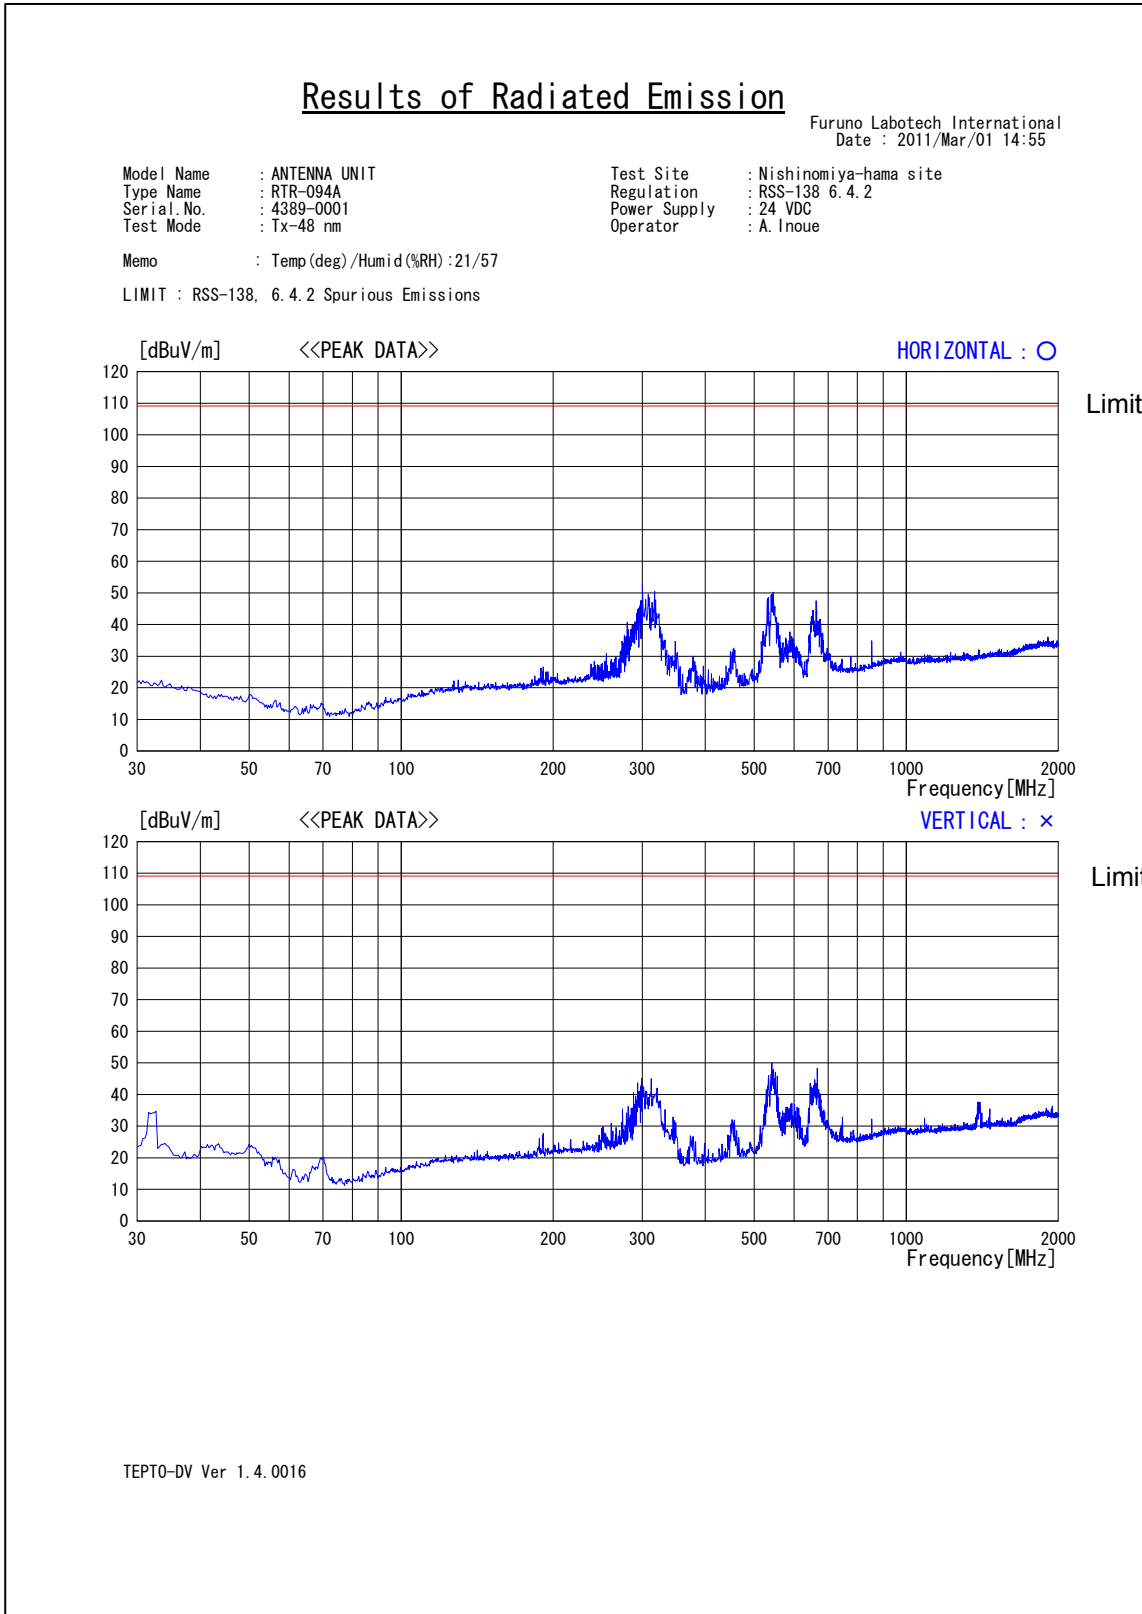


(\*) The resolution bandwidth of the spectrum analyzer in the frequency range of 30 MHz to 2000 MHz was set to 100 kHz instead of 1 MHz at the frequency range from 2 GHz to 40 GHz. The applicable limit was set at 10 dB lower than that computed in Clause 9.1.

( 3 ) for 2 GHz to 18 GHz

- for Horizontal

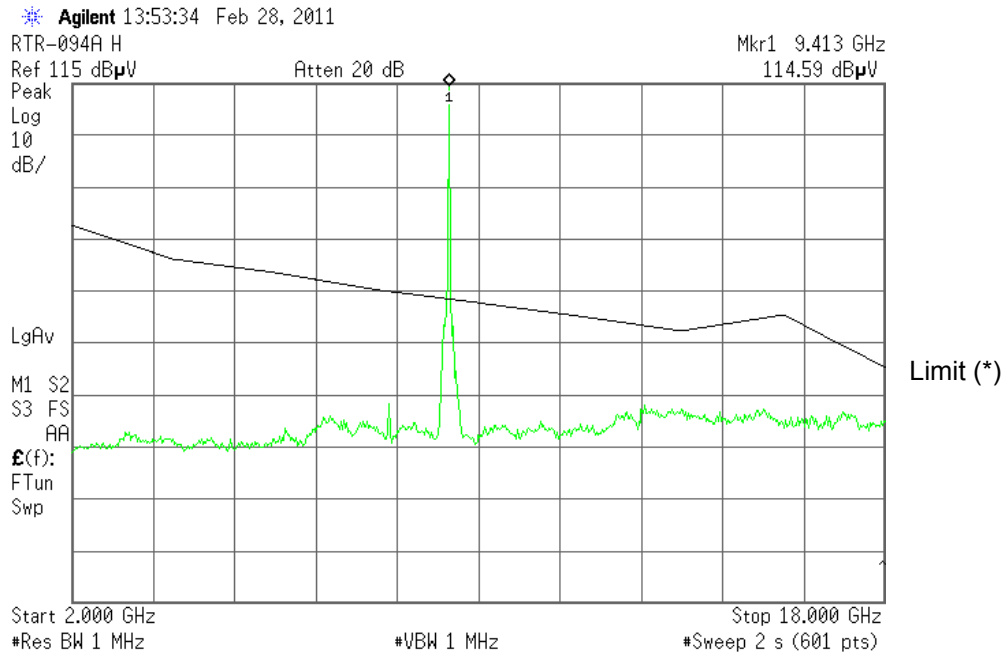


- for Vertical

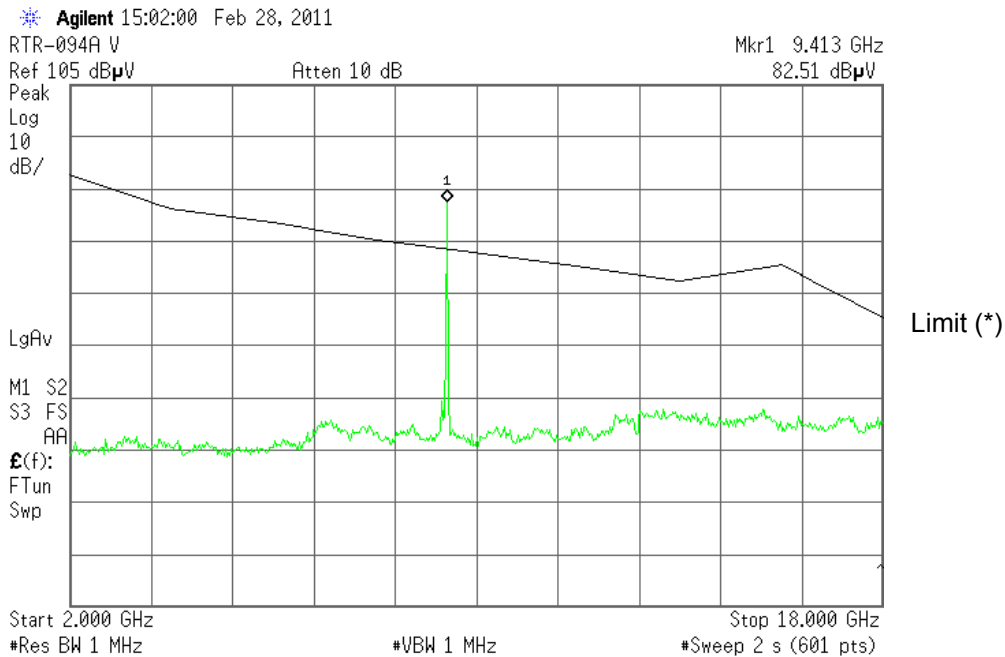


The notch filter ( Pass band:  $9410 \pm 150$  MHz) was inserted between the measuring antenna and Spectrum Analyzer to prevent the excessive input to Spectrum Analyzer only for the test frequency range of 2 GHz to 18 GHz.

(\*) The Limit is represented by the voltage value, which was derived from the electric field strength value with Antenna factor, Cable loss and Amp. gain.

(4) for 18 GHz to 26.5 GHz  
- for Horizontal

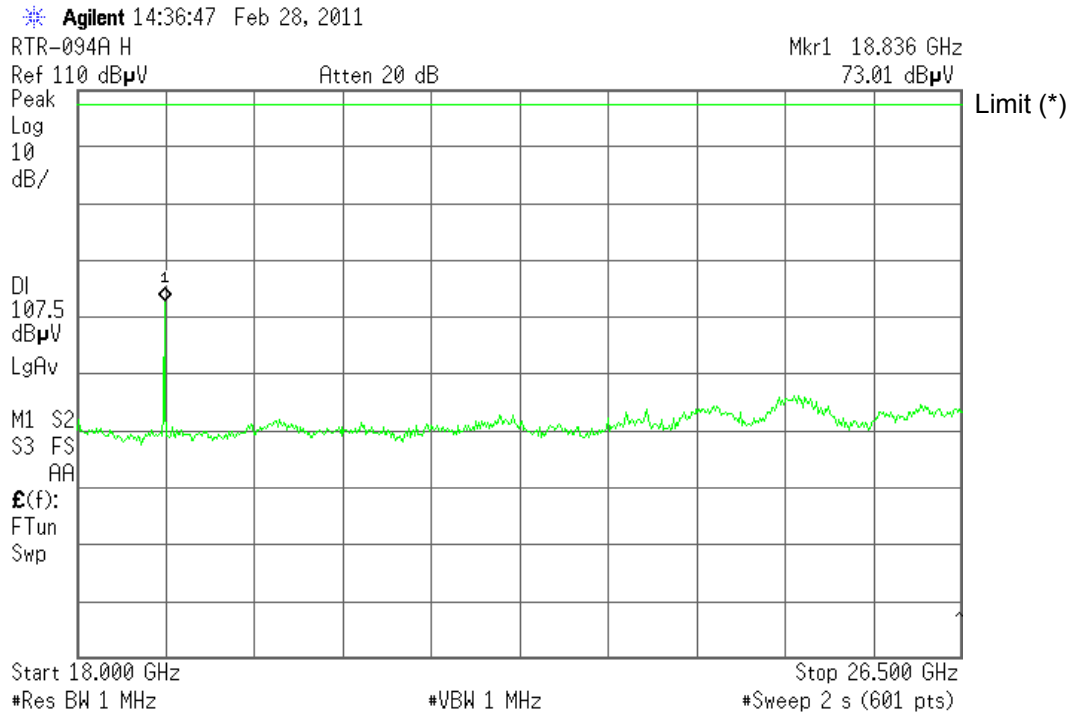


- for Vertical

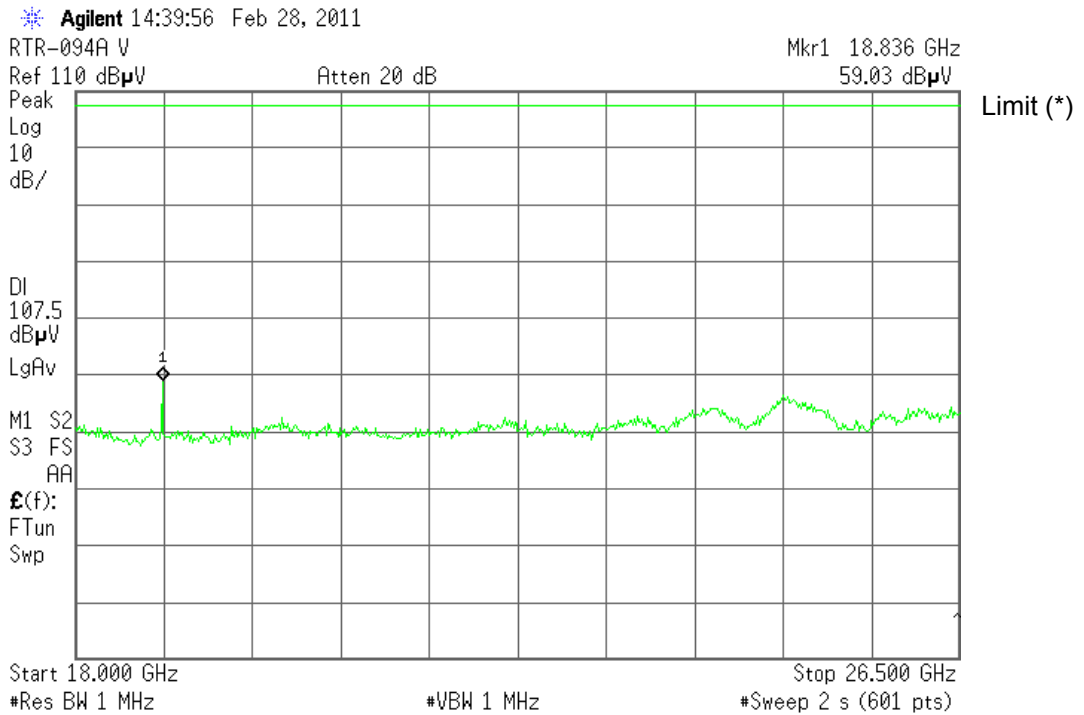


(\*) The Limit is represented by the voltage value, which was derived from the electric field strength value with Antenna factor, Cable loss and Amp. gain.

Minimum limit line for the frequency range of 18 GHz to 26.5 GHz is indicated in the above plots.

(5) for 26.5 GHz to 40 GHz  
- for Horizontal

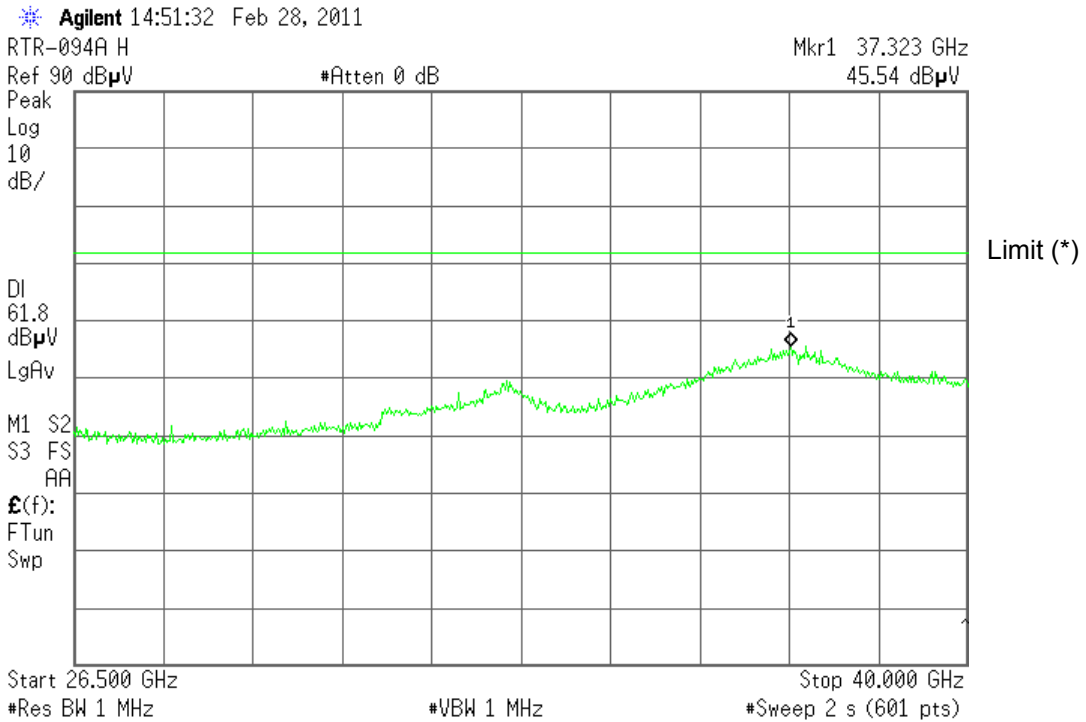

- for Vertical

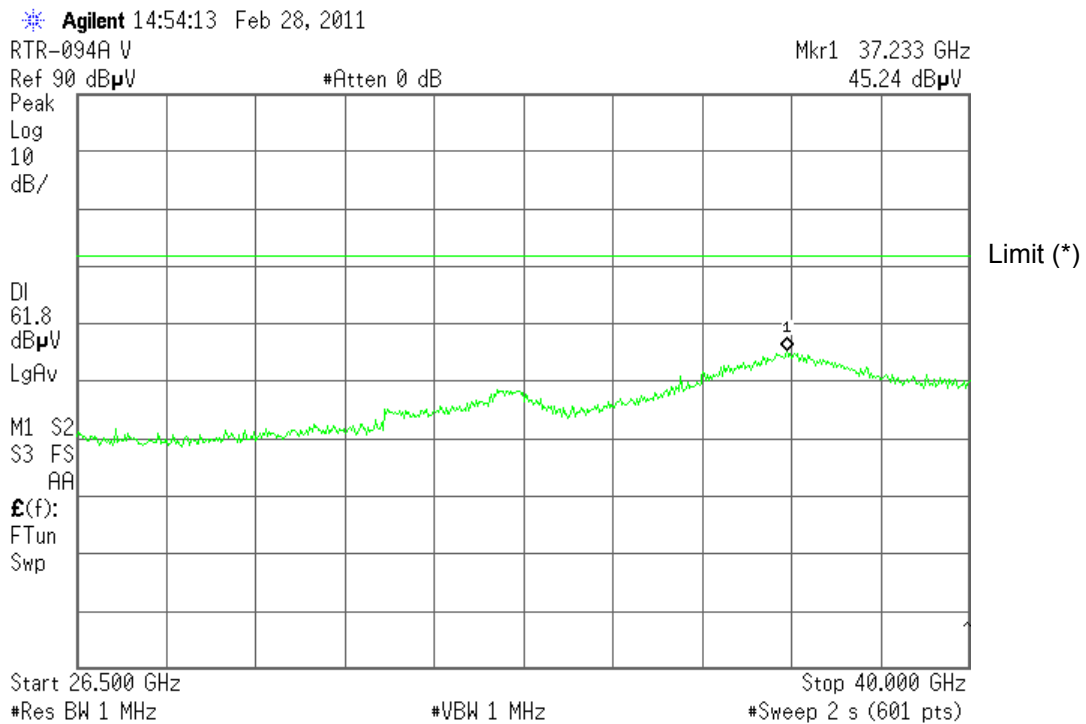

(\*) Emission limit was converted from the electric field strength into the voltage values with Antenna factor, Cable loss and Amp. gain added to the calculation.

Minimum limit line for the frequency range of 26.5 GHz to 40 GHz is indicated in the above plots.











