

Safety Test Report

for human exposure

(EN 60945 and EN/IEC 62311)

For

Trade name: Furuno
Model: MARINE RADAR
Type: MODEL1815

Report No.: LIC 12-16-117

Date of Issue: 22 December 2016

Labotech International Co., Ltd.

1-16, Fukazu-cho, Nishinomiya-shi, Hyogo, 663-8203 Japan
Tel: +81 (0) 798 63 1094 Fax: +81 (0) 798 63 1098
URL: <http://www.labotech-intl.co.jp/>

Report Summary

LIC project number:	LIC 04-16-0555/-0682		
Test report number of initial issue:	LIC 12-16-117	Date of initial issue	22 December 2016
Test report number of revised/replaced issue:	---	Date of revised/replaced issue	---
Test report revision/ replacement history:	---		
Test standard(s)/ Test specifications:	EN 62311: 2008, and IEC 62311: 2007 ICNIRP Guideline Gen.Pub.1998 EN 62233: 2005 EN 60945: 2002, 12.2 RF radiation.		
Customer:	Furuno Electric Co., Ltd. 9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan		
Manufacturer:	Furuno Electric Co., Ltd. 9-52 Ashihara-Cho, Nishinomiya-City, 662-8580 Japan		
Trade name:	Furuno		
Model:	MARINE RADAR		
Type:	MODEL1815		
Product function and intended use:	For Marine Safety Navigation		
Number of samples tested:	One		
Serial number:	R000-1700-0001		
Power rating:	12 - 24 VDC, 3.2 - 1.6 A		
Product status:	Pre-production model		
Modifications made to samples during testing:	None.		
Date of receipt of samples:	14 September 2016		
Test period:	From 5 October 2016 to 24 November 2016		
Place of test:	Labotech International Co., Ltd. - LABOTECH EMC Center 1-16, Fukazu-cho, Nishinomiya-shi, Hyogo, 663-8203 Japan		
Test results/ Compliance:	Passed. The test results of this report relate only to the samples tested.		
Tested by:	Osamu Araki		
Written by:	Akiko Inoue		
Verified by:	Yasuharu Nakamura		
Approved by:	Date: 22 December 2016 Name: Yasuharu Nakamura Title: Manager, Technical Department, Labotech International Co., Ltd. Signature: 		

Testing Laboratory Status

Labotech International Co., Ltd. (hereafter called "LIC") has been holding the following status after having been assessed according to the provisions of ISO/IEC 17025 and/or the relevant rules:

(1) JAB Accredited Testing Laboratory:

- accredited by Japan Accreditation Board (JAB),
- Laboratory accreditation number: RTL03220
- Date of initial accreditation: 14 January 2011 (*)
- Scope of accreditation: Electrical testing - EMC, Climatic, and Vibration tests

(2) Telefication Listed Testing Laboratory:

- listed by Telefication B. V., (The Netherlands)
- Laboratory assignment number: L116
- Date of initial listing: 26 July 1999 (*)
- for testing the following product categories/ test standards: EN 60945, IEC 61162-1/-2, IEC/EN 61162-450 and IEC 62288

(3) TÜV Appointed EMC Test Laboratory:

- appointed by TÜV Rheinland Japan Ltd.,
- Laboratory assignment number: UA 50046428
- Date of initial appointment: 21 December 1998 (*)
- for carrying out the tests of:
EN 55011, CISPR 11, EN 55012, CISPR 12, EN 55022, CISPR 22, EN 55024, CISPR 24, EN 55025, CISPR 25, EN/IEC 61000-3-2/-3, EN/IEC 61000-4-2/-3/-4/-5/-6/-8/-11, EN/IEC 61000-6-1/-2/-3/-4, EN/IEC 60945, EN/IEC 61326-1, EN/IEC 61326-2-6, EN/IEC 60601-1-2, JIS T 0601-1-2, JIS C 1806-1, ISO 11452-1/-2/-4, EN ISO 14982, IEC 62236-3-2, EN 50121-3-2.

(4) RMRS Recognized Testing Laboratory:

- recognized by Russian Maritime Register of Shipping (RMRS), (Russia)
- Laboratory recognition number: 11.02594.011
- Date of initial recognition: 27 January 2009 (*)
- for carrying out testing in the field of:
Electrical measurements and tests, EMC tests, Mechanical measurements and tests, Equipment protection degree tests, and Climatic tests for Ship's radio and navigational equipment and IEC 60945: 2002

(5) RRR Recognized Test Laboratory:

- recognized by Russian River Register (RRR), (Russia)
- Recognition certificate number: 154262 (*)
- Date of initial recognition: 31 May 2013
- for carrying out of tests of ships radio and navigation equipment

(6) DNV GL Recognized Environmental Test Laboratory:

- recognized by Det Norske Veritas AS, Germanischer Lloyd (DNV GL), (Norway)
- Recognition certificate number: 262.1-015854-J-12
- Date of initial recognition: 12 July 2013 (*)
- Scope of recognition: Testing according to the standards IEC 60945, IEC 61162-1/-2/-450, IEC 62288, IEC 62388 and IEC 62252 Annex E
- Application: Provisions of Environmental, interface and safety testing.

(7) CCS Recognized Test Agency :

- recognized by China Classification Society
- Recognition certificate number : DB13A00001
- Date of initial recognition : 29 January 2014 (*)
- Scope of recognition : Performance/Environmental/EMC/Special purpose/Safety precautions tests for Electrical & Electronic Product including Maritime Navigation and Radio-communication Equipment & Systems

Note: (*) – The current certificates may be found in the LIC web site (<http://www.labotech-intl.co.jp/>).

TABLE OF CONTENTS

Report Summary.....	2
Testing Laboratory Status.....	3
1 Principal Information	5
1.1 Equipment under test (EUT).....	5
1.2 Observation and comments	5
1.3 Test Conditions	5
1.4 Test items.....	6
1.5 Measurement Uncertainty	6
2 Test Results	7
3 Date of test and environmental conditions observed during testing	7
4 List of Measuring/Test Instruments	8
5 EUT Setup/Test Arrangement.....	9
6 EUT Test data obtained	10

1 Principal Information

1.1 Equipment under test (EUT)

Configurations of the EUT unit(s):

No. (*)	Name	Type	Serial number	Test set-up	Note
	MODEL1815				
11	Antenna Unit	RSB-127-120	R000-1700-0004	Table-top	Scanner RSB-127 and Transceiver RTR-120. TX freq.: 9410 MHz, TX power: 4 kW _{pep} .
12	Display Unit	RDP-157	1000-6300-0004	Table-top	

(*): Item number(s) is(are) corresponding to the unit(s) shown in Clause 5 “EUT Setup/Test Arrangement” and Clause 6 “Photographs of Test Setup/Arrangement” of this report.

Size and Mass of the EUT unit(s):

No.	Name	Type	Dimensions (W × H × D, or φ × H) (mm)	Mass (kg)
11	Antenna Unit	RSB-127-120	Φ488 x 220	4.9
12	Display Unit	RDP-157	233 x 270 x 158	2.2

Configurations of the Associated unit(s) (AU) forming the system except EUT:

No. (*)	Name	Type	Unit serial number	Manufacturer	Note
13	EXT BUZZER	OP03-21	---	Furuno	

(*): Item number(s) is(are) corresponding to the unit(s) shown in Clause 5 “EUT Setup/Test Arrangement” of this report.

Auxiliary Equipment (AE) used for exercising and/or monitoring the operation and/or the performance of the EUT during testing: None.

Software(s) contained in the EUT:

No.	Category	Name/Type	Program name	Program number	Rev. number
11	EUT	Antenna Unit	Boot	0359366-T1.03	---
			App	0359367-T1.04	---
12	EUT	Display Unit	Boot	0359374-T1.02	---
			App	0359375-T1.06	---

1.2 Observation and comments

Test items to be performed were specified by the customer.

1.3 Test Conditions

For Radar TX mode (under IEC 60945): 24 VDC

TX mode

EUT setting:

Range: 0.5 NM

For Radar Standby modes (under IEC 62311): 24 VDC

1.4 Test items

For Radar TX mode,

EN 60945 Clause no.	Item (Method)
12.2	RF Radiation

For Radar Standby modes,

EN 62311 Clause no.	Item (Method)
8	Sources with multiple frequencies
8.2	Frequency range from 1 Hz – 10 MHz (ICNIRP-based)
8.2.1	Frequency domain assessment
8.2.2	Time domain assessment
8.3	Frequency range from 100 kHz – 300 GHz (ICNIRP-based)

1.5 Measurement Uncertainty

±2.3 dB (IEC 60945)

30% (IEC 62311: 2007, Clause 6)

2 Test Results

2.1 for Radar TX mode

with Antenna stopped (based on IEC 60945),

Unit	Distance to 100 W/m ² (m)	Distance to 50 W/m ² (m)	Distance to 10 W/m ² (m)
RSB-120-127	None	0	0.85

Note: the Probe was located on the TX antenna main beam line, and Peak point was searched with the Probe varied horizontally and vertically.

2.2 for Radar Standby modes (based on IEC/EN 62311)

Unit	Results	Note
RSB-120-127	Passed at 0 cm.	See Clause 6 of this report for details.

Note: Following test conditions/limits were applied for the tests:

- (1) Distance: From 0 cm to 30 cm apart from EUT surface.(according to IEC 62233),
(The EUT passed the tests at 0 cm, so, tests at 10/30 cm were not performed.)
- (2) Measuring equipment: Complied with "ICNIRP guideline Gen.Pub.1998".
- (3) Test frequency range (including Upper test frequency):
For H-field, 10 Hz to 1 GHz.
For E-field, 100 kHz to 50 GHz (> EUT TX frequency 9.410 GHz × 5 = 47.050 GHz).
- (4) Compliance to limits: Reference level (according to ICNIRP guideline Gen.Pub.1998).
- (5) EUT directions observed: 0° through 360°.

Unit	Results	Note
RDP-157	Passed at 0 cm.	See Clause 6 of this report for details.

Note: Following test conditions/limits were applied for the tests:

- (1) Distance: From 0 cm to 30 cm apart from EUT surface.(according to IEC 62233),
(The EUT passed the tests at 0 cm, so, tests at 10/30 cm were not performed.)
- (2) Measuring equipment: Complied with "ICNIRP guideline Gen.Pub.1998".
- (3) Test frequency range (including Upper test frequency):
For H-field, 10 Hz to 1 GHz.
For E-field, 100 kHz to 50 GHz (> EUT TX frequency 9.410 GHz × 5 = 47.050 GHz).
- (4) Compliance to limits: Reference level (according to ICNIRP guideline Gen.Pub.1998).
- (5) EUT directions observed: 0° through 360°

3 Date of test and environmental conditions observed during testing

	Item	Date of test	Temperature, humidity (Before-test to After-test)	Power supply voltage (Before-test to After-test)
IEC/EN 62311	Human exposure (Radar Standby)	20 October 2016	See Clause 6 for details.	24.0 VDC to 24.0 VDC.
		24 October 2016		24.0 VDC to 24.0 VDC.
EN 60945, 12.2	Electromagnetic radiofrequency radiation: (Radar TX mode)	5 October 2016	25°C to 25°C, 68%RH to 68%RH.	24.0 VDC to 24.0 VDC.

4 List of Measuring/Test Instruments

Measuring/Test instruments have been appropriately calibrated/maintained according to the LIC programs/ procedures. Measuring/Test instruments used for the tests are listed below.

4.1 for Radar TX mode (under EN 60945 and IEC/EN 62311)

(*)	C/N	Instrument	Type	S/N	Manufacturer	Note
--	HT919	Broadband field meter	NBM-520	D-0684	Narda	Used for IEC/EN 62311 test.
--	HT919-2	Electric field probe(300 k - 50 GHz)	ED5091	01061	Narda	
X	HT590	RF Radiation meter	EMR-300/33C	AY-0029/F-0021	Narda	Used for IEC 60945 test.
X	HT779	Semi-Anechoic chamber	10mSAC	90984	TOKIN	
X	HT780	Programmable AC/DC Power Supply	ES18000W	9128767-1 +9128767-2	NF	--


Note (*): X – used for tests, -- – not used.

4.2 for Radar Standby modes (under IEC/EN 62311)

(*)	C/N	Instrument	Type	S/N	Manufacturer
X	HT918	Exposure level tester (Magnetic field)	ELT-400	N-0191	Narda
X	HT918-1	100 cm ² magnetic field probe	--	M-0634	Narda
X	HT919	Broadband field meter (Electric and Magnetic fields)	NBM-520	D-0684	Narda
X	HT919-1	field probe (100 kHz - 3 GHz)	EF0391	D-0628	Narda
X	HT919-2	field probe (300 kHz - 50 GHz)	ED5091	01061	Narda
X	HT919-3	Magnetic field probe (300 kHz - 30 MHz)	HF3061	D-0239	Narda
X	HT919-4	Magnetic field probe (27 MHz - 1 GHz)	HF0191	D-0175	Narda
--	HT590	RF Radiation meter	EMR-300/33C	AY-0029/F-0021	Narda
X	HT368	Anechoic chamber	3mAC	D-001	Riken
--	HT152	AC power supply (200 VAC to 240 VAC)	CVCF-2	191514	NF
--	HT153	AC power supply (100 VAC to 120 VAC)	CVCF-1	191513	NF
X	HT151	DC power supply	GP035-30	101439048	Takasago


Note (*): X – used for tests, -- – not used.

5 EUT Setup/Test Arrangement

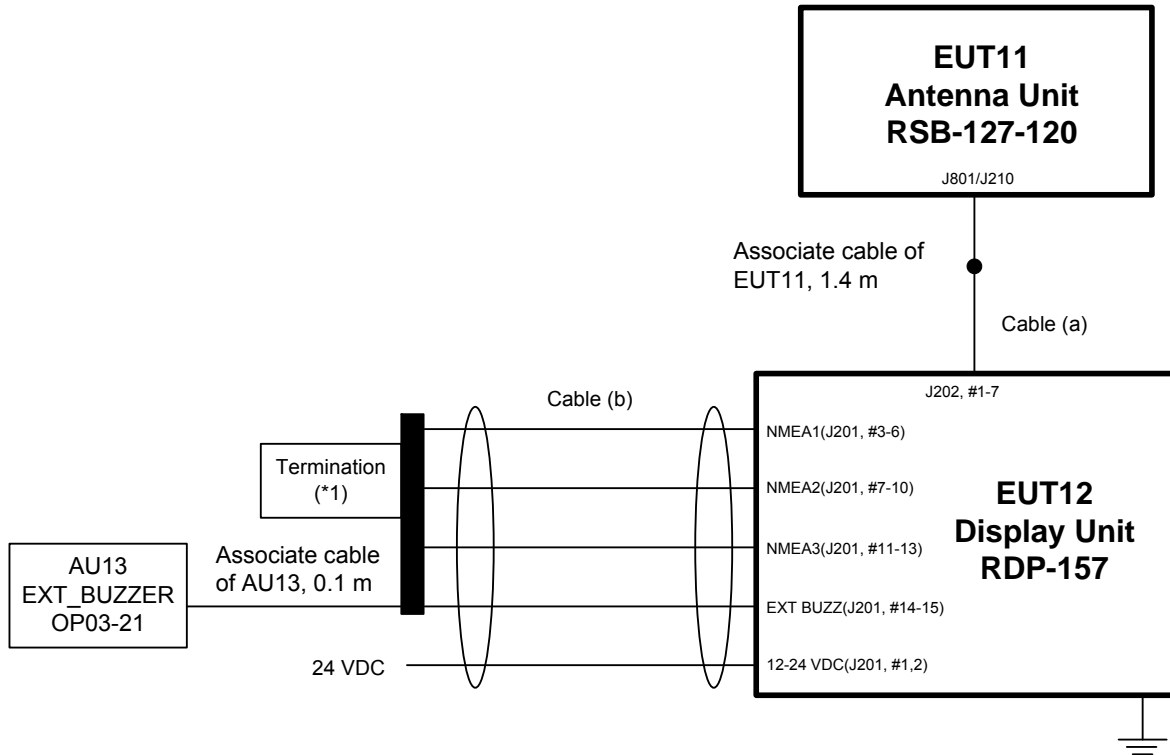

Note: AU - Associated Unit.

(*1): Termination

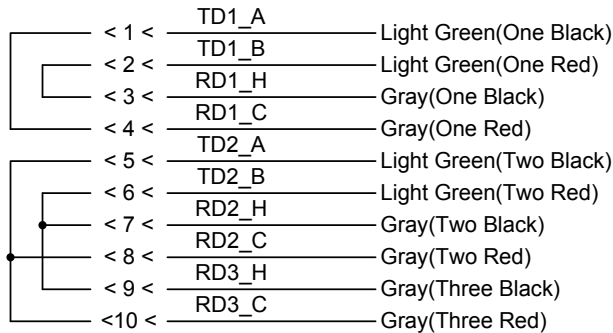


List of Cables used

No.	Category	Name	Type	Length (m)	Number of cables used	Cable shielding
a	DC Power Signal/control	Power/Ethernet Cable	FRU-CF-FF-20M	20	1	Yes.
b	DC Power Signal/control	Power/NMEA Cable	FRU-CF-F01	3.3	1	Yes.

6 EUT Test data obtained

For Antenna unit

Date & Location:	24 Oct, 2016, LIC EMC Center
Manufacture:	Furuno Electric Co., Ltd.
Product Category:	Pre-production model
Model Name (S/N)	RSB-127-120 (R000-1700-0004)
Standard:	ICNIRP Guideline Gen.Pub.1998
Power supply voltage:	24 VDC
Temperature, humidity:	22°C, 56%RH to 22°C, 56%RH
Operating Mode:	Radar Standby mode
Operator:	O.Araki
Result:	Passed. (at 0 cm)
Measurement uncertainty value:	30%

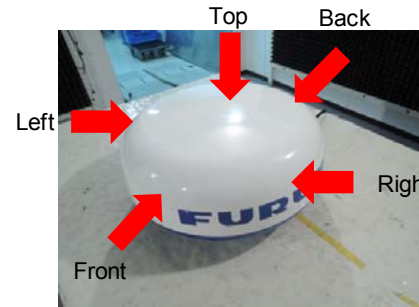

The uncertainty values specified under each assessment method are the maximum allowed uncertainty.
If the uncertainty value is not specified, then a default value of 30 % shall be used. (Refer to EN 62311: 2008/IEC 62311: 2007, Clause 6)

Field	frequency range	Measuring equipment used	Measurement mode applied	Limits (Reference level)	Distance	Measured value	Max. point	Result
H-Field	10 Hz to 400 kHz	narda ELT-400	Std Mode	100%	Ambient	0.183	--	--
					0 cm	0.191	Top	Passed.
					10 cm		Top	
					30 cm		Top	
	300 kHz to 30 MHz	narda NBM-520 (HF3061)	MAX Hold (Peak)	0.073 A/m	Ambient	0.0044	--	--
					0 cm	0.0177	Top	Passed.
					10 cm		Top	
					30 cm		Top	
					27 MHz to 1 GHz	narda NBM-520 (HF0191)	MAX Hold (Peak)	0.073 A/m
0 cm	0.0274	Top	Passed.					
10 cm		Top						
30 cm		Top						
E-Field	100 kHz to 3 GHz	narda NBM-520 (EF0391)	MAX Hold (Peak)	27.5 V/m	Ambient	0.13	--	--
					0 cm	0.83	Top	Passed.
					10 cm		Top	
					30 cm		Top	
	3 GHz to 50 GHz	narda NBM-520 (ED5091)	MAX Hold (Peak)	20%	Ambient	0.0233	--	--
					0 cm	0.4677	Back	Passed.
					10 cm		Back	
30 cm		Back						

For Display unit

Date & Location:	20 Oct, 2016, LIC EMC Center
Manufacture:	Furuno Electric Co., Ltd.
Product Category:	Pre-production model
Model Name (S/N)	RDP-157 (1000-6300-0004)
Standard:	ICNIRP Guideline Gen.Pub. 1998
Power supply voltage:	24 VDC
Temperature, humidity:	23°C, 58%RH to 23°C, 58%RH
Operating Mode:	Radar Standby mode
Operator:	O.Araki
Result:	Passed. (at 0 cm)
Measurement uncertainty value:	30%



The uncertainty values specified under each assessment method are the maximum allowed uncertainty.

If the uncertainty value is not specified, then a default value of 30 % shall be used. (Refer to EN 62311: 2008/IEC 62311: 2007, Clause 6)

Field	frequency range	Measuring equipment used	Measurement mode applied	Limits (Reference level)	Distance	Measured value	Max. point	Result				
H-Field	10 Hz to 400 kHz	narda ELT-400	Std Mode	100%	Ambient	0.184	--	--				
					0 cm	0.551	Back	Passed.				
					10 cm		Back					
					30 cm		Back					
	300 kHz to 30 MHz	narda NBM-520 (HF3061)	MAX Hold (Peak)	0.073 A/m	Ambient	0.0044	--	--				
					0 cm	0.0136	Back	Passed.				
					10 cm		Back					
					30 cm		Back					
					27 MHz to 1 GHz	narda NBM-520 (HF0191)	MAX Hold (Peak)	0.073 A/m	Ambient	0.0099	--	--
									0 cm	0.0145	Back	Passed.
	10 cm		Back									
	30 cm		Back									
E-Field	100 kHz to 3 GHz	narda NBM-520 (EF0391)	MAX Hold (Peak)	27.5 V/m	Ambient	0.13	--	--				
					0 cm	2.3	Back	Passed.				
					10 cm		Back					
					30 cm		Back					
	3 GHz to 50 GHz	narda NBM-520 (ED5091)	MAX Hold (Peak)	20%	Ambient	0.0233	--	--				
					0 cm	0.4576	Back	Passed.				
					10 cm		Back					
					30 cm		Back					