



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

TEST REPORT

According to : FCC 47CFR part 15 subpart C § 15.247

Test Report No. : CTK-2014-01170
Date of Issue : 2014-09-25
FCC ID : ADMADP-611
Model/Type No. : ADP-611
Kind of Product : Digital Pen
Applicant : Pen Generations, Inc.
Applicant Address : 8th Fl., Pangyotechnovalley SOLID Space, 220 Pangyoyeokro
Bundang-gu, Seongnam-si, Gyeonggi-do, Korea 463-400
Manufacturer : Pen Generations, Inc.
Manufacturer Address : 8th Fl., Pangyotechnovalley SOLID Space, 220 Pangyoyeokro
Bundang-gu, Seongnam-si, Gyeonggi-do, Korea 463-400
Contact Person : Sang Nyeon Cho / Assistant Manager
Telephone : +82-31-600-0840
Received Date : 2014-09-04
Test period : Start : 2014-09-19 End : 2014-09-24
Test Results : ☒ In Compliance ☐ Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by

Y. T. Lee

Young-taek Lee
Test Engineer
Date: 2014-09-25

Reviewed by

Y. J. Park

Young-Joon, Park
Technical Manager
Date: 2014-09-25



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
2014-09-25	Issued (CTK-2014-01170)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Tested Frequency.....	4
1.2 Duty Cycle	5
1.3 Model Differences	5
1.4 Device Modifications.....	5
1.5 Peripheral Devices	5
1.6 Calibration Details of Equipment Used for Measurement	6
1.7 Test Facility.....	6
1.8 Laboratory Accreditations and Listings.....	6
2.0 Summary of tests	7
2.1 Technical Characteristic Test	8
2.1.1 6dB Bandwidth	8
2.1.2 Maximum peak Conducted Output Power	11
2.1.3 Power Spectral Density	14
2.1.4 Band - edge	17
2.1.5 Field Strength of Emissions	22
2.1.6 AC Conducted Emissions.....	31
APPENDIX A – Test Equipment Used For Tests	34



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

1.0 General Product Description

Equipment model name : ADP-611

Serial number : Prototype

EUT condition : Pre-production, not damaged

Antenna type : Chip antenna Gain 1.99 dBi

Frequency Range : 2402 MHz – 2480 MHz

RF output power : -4.751 dBm Peak Conducted

Number of channels : 40

Type of Modulation : GFSK (Bluetooth 4.0 - LE)

Rated Channel spacing : 2 MHz

Power Source : DC 3.7 V (Rechargeable Lithium Polymer Battery)

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2440	2480



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

1.2 Duty Cycle

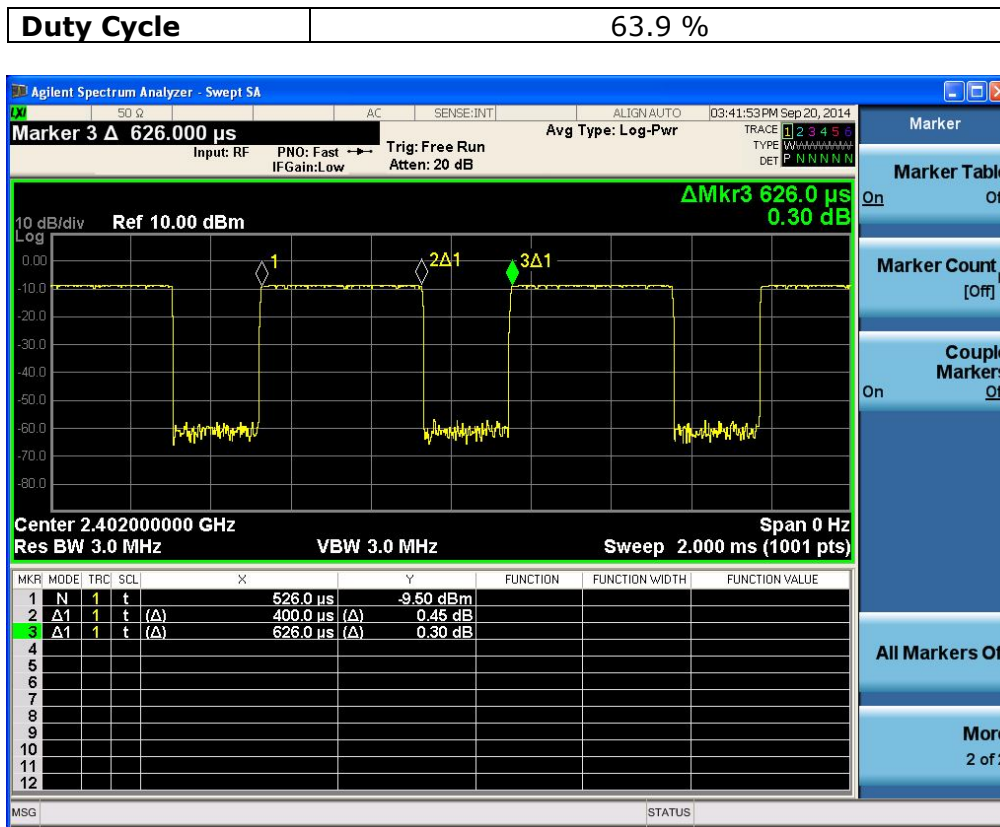

1.3 Model Differences

Not applicable

1.4 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.5 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
BLUETOOTH TESTER	TESCOM	TC-3000C	3000C000377
Notebook Computer	TOSHIBA CORPORATION	PSL48K-00L00K	Z7037782R
AC/DC ADAPTER	TOSHIBA CORPORATION	ADP-75SB	708W15Y01MK



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.8 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Maximum Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(e)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
				C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:
- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in
558074 D01 DTS Meas Guidance v03r01.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

2.1 Technical Characteristic Test

2.1.1 6dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 300 kHz ($VBW \geq 3 \times RBW$)

Trace = Max hold

Sweep = auto

Detector function = peak

Measurement Data:

Test mode : Continuous modulated carrier

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2402	0.693	Complies
2440	0.687	Complies
2480	0.694	Complies

Minimum Standard:

6 dB Bandwidth > 500kHz

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

2402 MHz



2440 MHz






CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2480 MHz

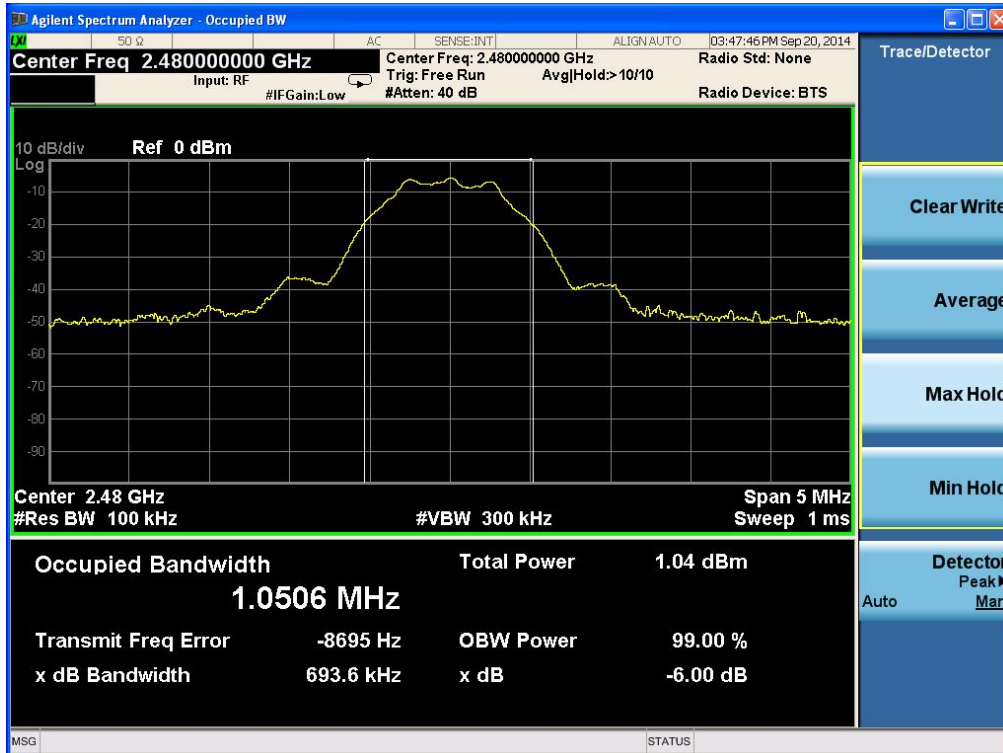



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.2 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

Maximum Peak Output Power from the EUT were measured according to the dictates power measurement procedure in section 9.1.1 of KDB 558074.

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW $\geq$ DTS bandwidth
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 3 \times$ RBW
- d) Sweep time = auto couple
- e) Detector = peak
- e) Trace mode= max hold
- f) Allow trace to fully stabilize.
- g) Use peak marker function to determine the peak amplitude level.

Limit

< 1 W (30 dBm)

Test Results

Test mode : Continuous modulated carrier

Frequency (MHz)	Test results		
	Reading power(dBm)	Peak output power (mW)	Result
2402	-7.532	0.177	Complies
2440	-6.047	0.248	Complies
2480	-4.751	0.335	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2402 MHz

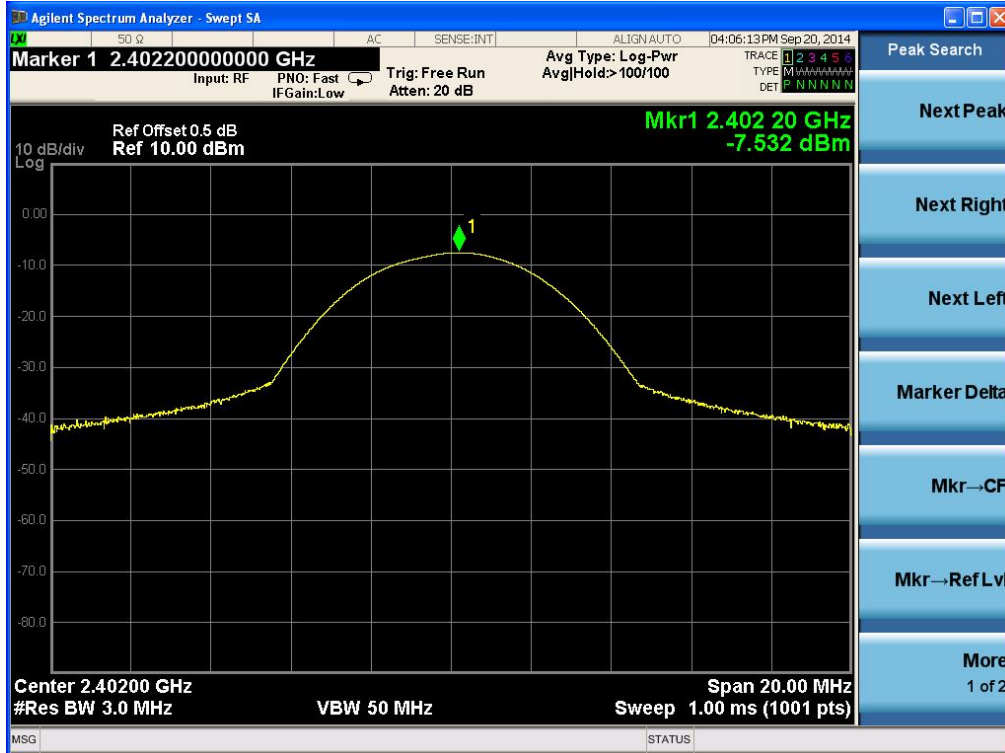

2440 MHz

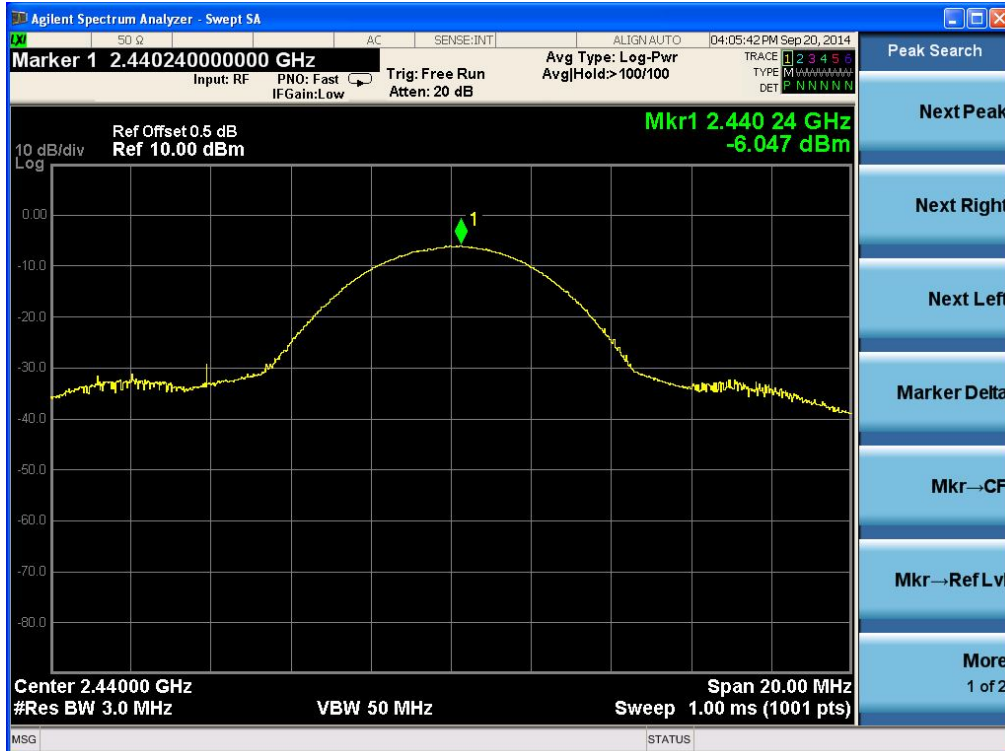



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

2480 MHz

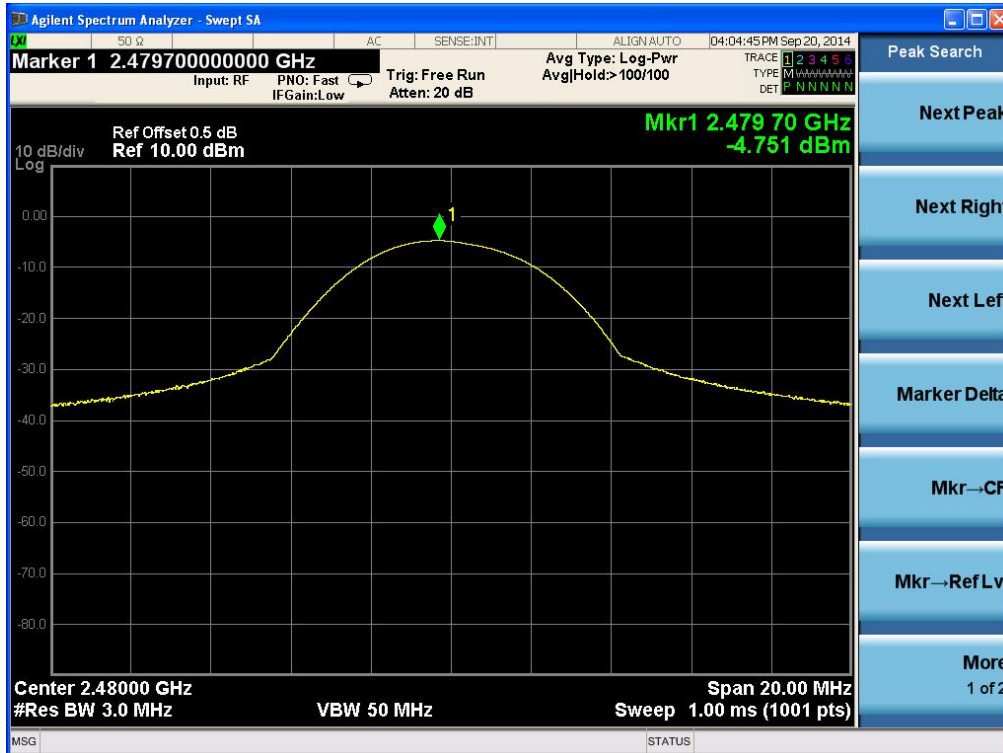



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.3 Power Spectral Density

Procedure:

Power Spectral Density from the EUT were measured according to the dictates PKPSD measurement procedure in section 10.2 of KDB 558074.

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- d) Set the VBW $\geq 3 \times \text{RBW}$
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceed limit, reduce RBW(no less than 3 kHz) and repeat.

Test mode : Continuous modulated carrier

Frequency (MHz)	Test Results	
	dBm	Result
2402	-8.115	Complies
2440	-6.857	Complies
2480	-5.276	Complies

Minimum Standard:

Power Spectral Density	< 8dBm @ 3 kHz BW
------------------------	-------------------

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

Power Density Measurement

2402 MHz



2440 MHz





(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Agilent Spectrum Analyzer - Swept SA

50 GHz AC SENSE:INT ALIGN: AUTO 04:04:07 PM Sep 20, 2014

Marker 1 2.480004500000 GHz

Input: RF PNO: Far IF Gain: Low Trig: Free Run Atten: 20 dB

Avg Type: Log-Pwr Avg/Hold: >100/100

TRACE 1 2 3 4 5 6 TYPE M M M M M M DET P N N N N N

Ref Offset 0.5 dB Ref 10.00 dBm

Mkr1 2.480 004 5 GHz -5.276 dBm

10 dB/div Log



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

2.1.4 Band - edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 300 kHz ($VBW \geq 3 \times RBW$)

Span = 50 MHz

Detector function = peak

Trace = Max hold

Sweep = auto

Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.

Minimum Standard:	> 20 dBc
--------------------------	----------

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

Band-edge Measurements

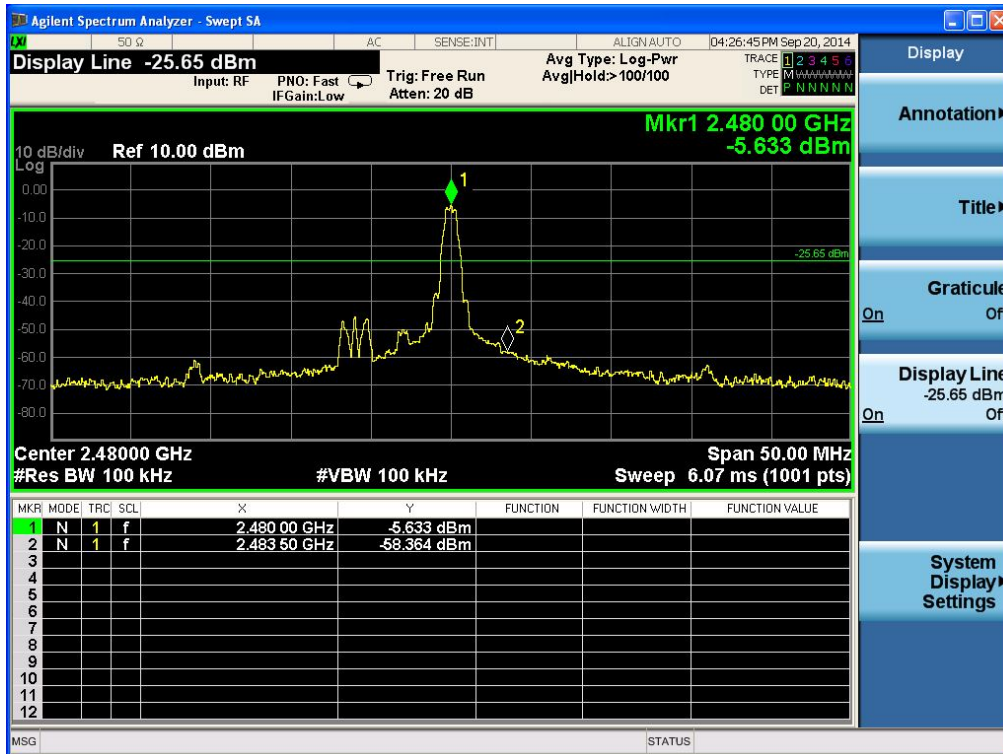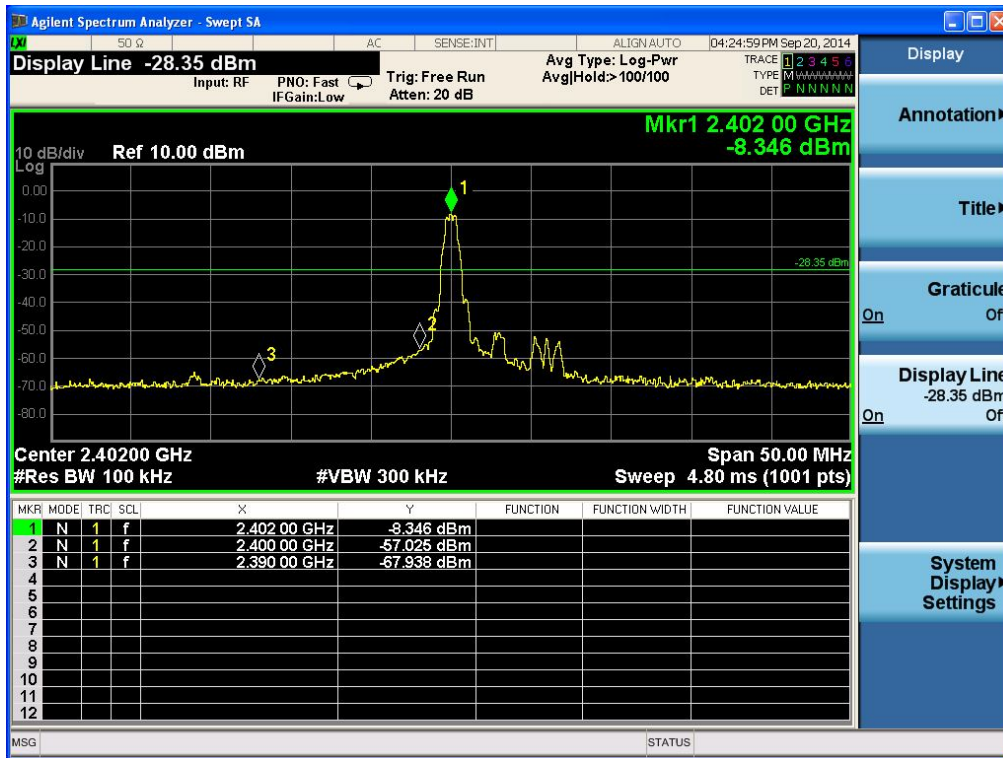



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band – edge (at 20 dB blow) – Low channel
Frequency Range = 30 MHz ~ 10th harmonic





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel
Frequency Range = 30 MHz ~ 10th harmonic





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic




2.1.5 Field Strength of Emissions

Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)
☒ 3 m SAC (test distance : 3 m)

Configuration

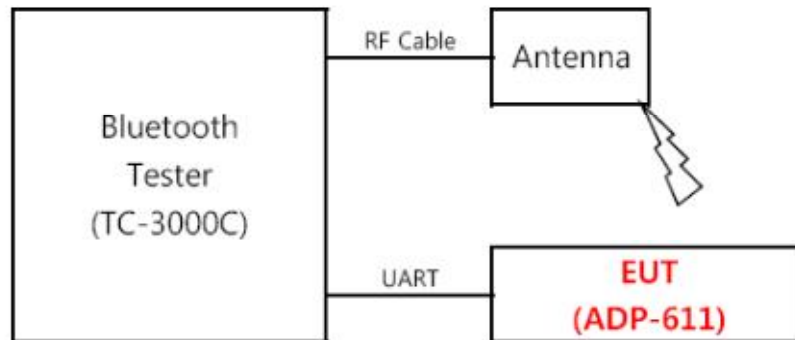

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz

VBW $\geq$ RBW

Sweep = auto



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Limit

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 1 MHz for peak measurement and 10 Hz for average measurement.(Duty Cycle is > 98%,)
- 4) Duty Cycle is < 98%, VBW setting will need to > 1/T.

Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

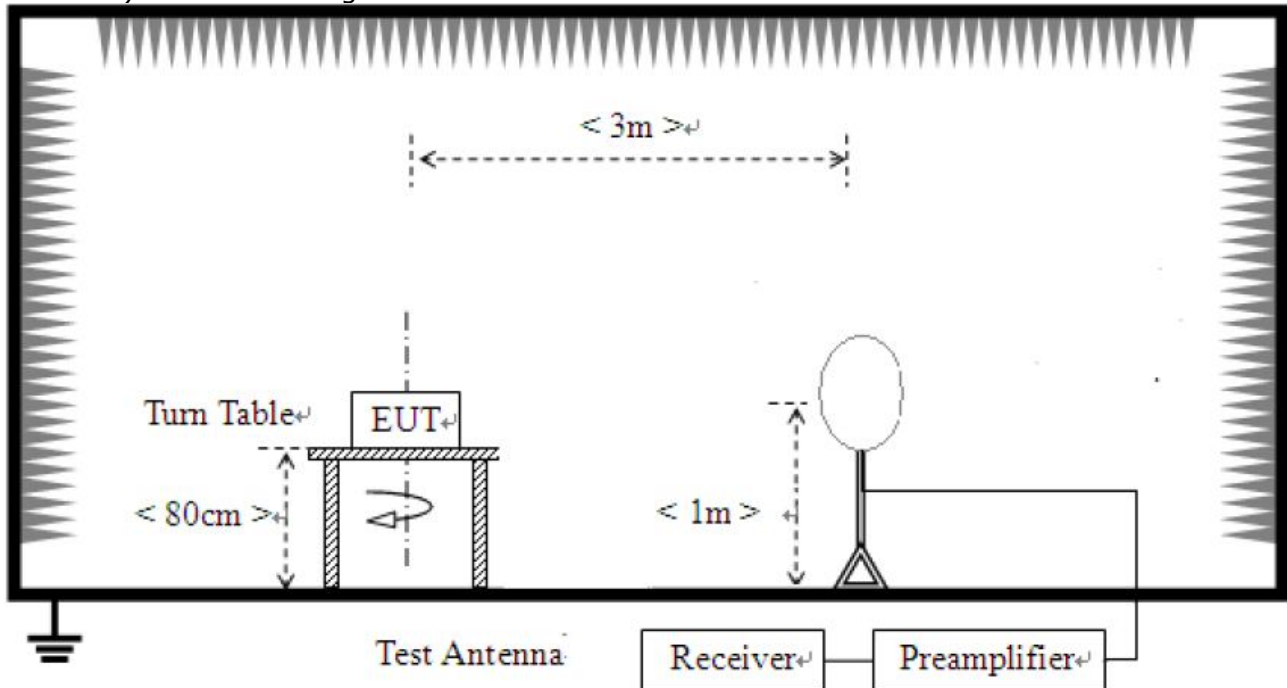

2) For field strength of emissions from 30 MHz to 1 GHz

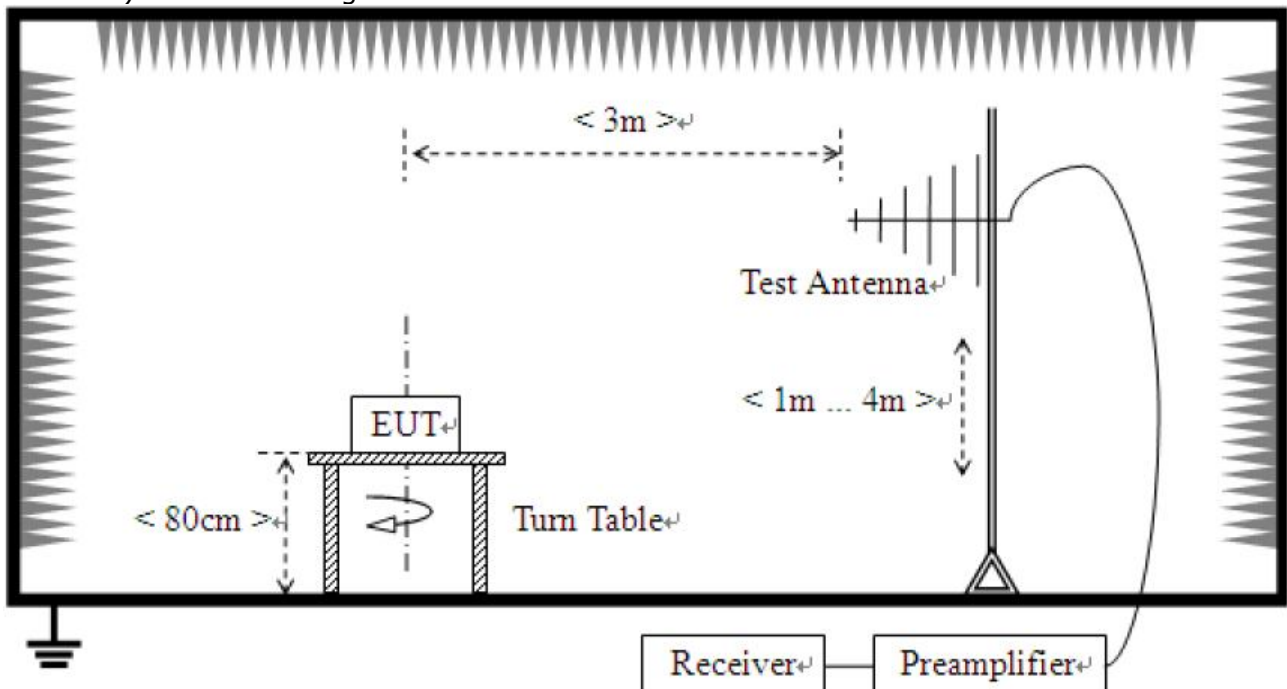

3) For field strength of emissions above 1 GHz

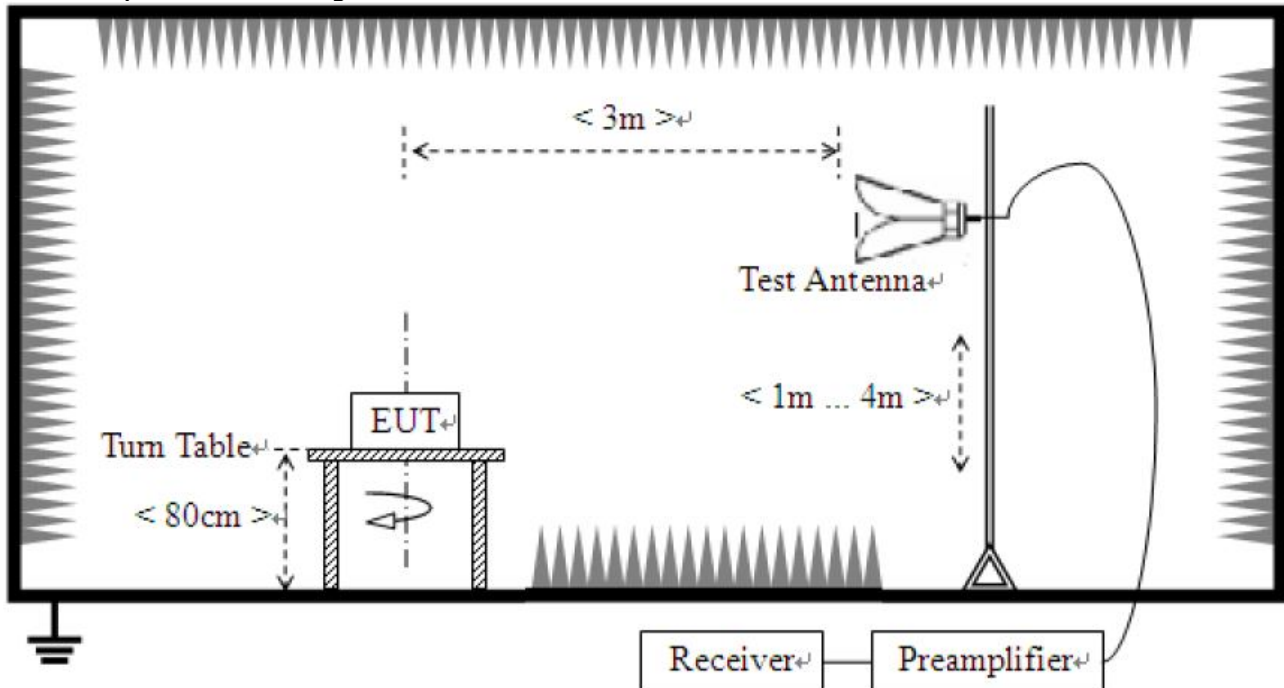

Test Results

1) 9 kHz to 30 MHz

EUT	Digital Pen	Measurement Detail	
Model	ADP-611	Frequency Range	9 kHz – 30 MHz
Test mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2) 30 MHz to 1 GHz

Test mode : Continuous modulated carrier, High Channel(2480 MHz)


EUT	Digital Pen	Measurement Detail	
Model	ADP-611	Frequency Range	Below 1000MHz
Mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
837.283	41.7	4.3	Peak

Test Data

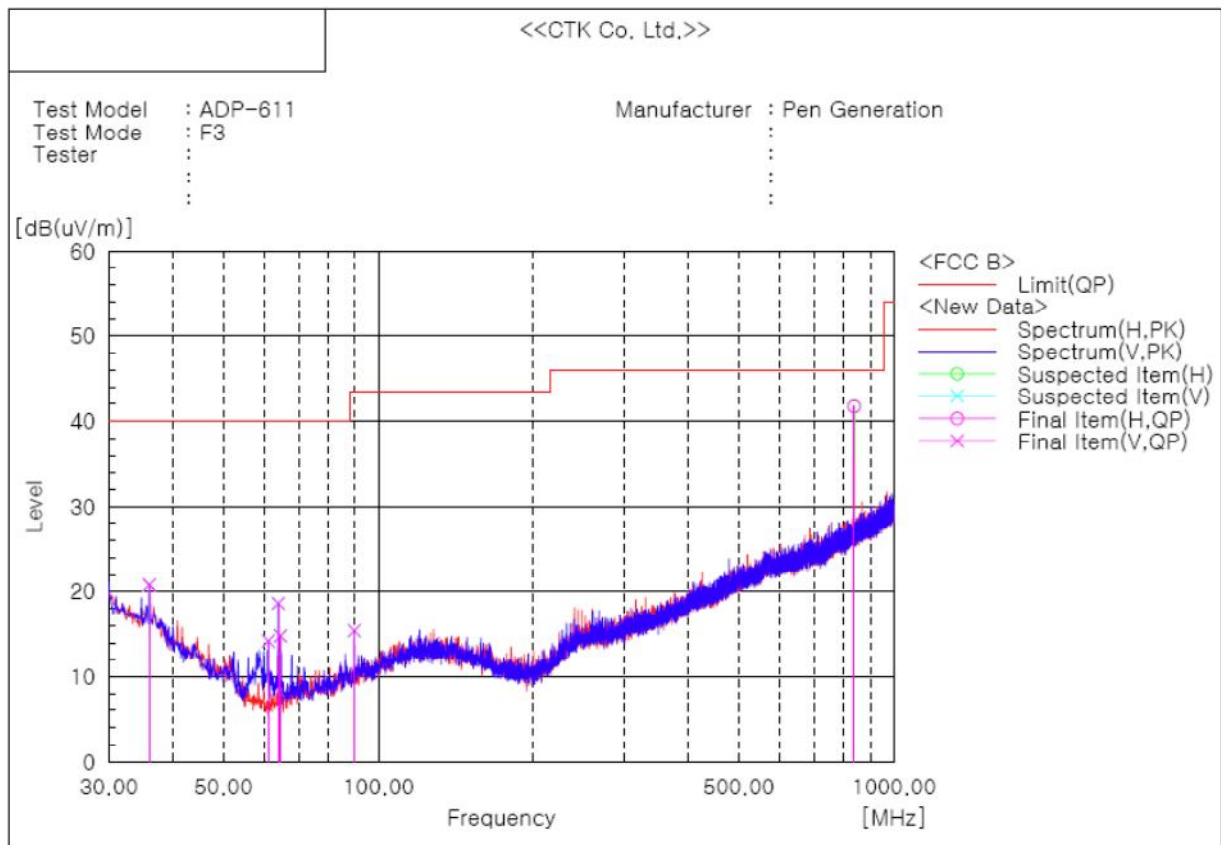

Spectrum Selection

No.	Frequency (P)	Reading	c.f	Result PK	Limit QP	Margin QP	Height	Angle
	[MHz]	[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]
1	35.941	V 29.8	-9.0	20.8	40.0	19.2	205.0	233.0
2	61.161	V 32.9	-18.7	14.2	40.0	25.8	100.0	201.0
3	63.950	V 37.2	-18.6	18.6	40.0	21.4	100.0	89.0
4	64.556	V 33.4	-18.6	14.8	40.0	25.2	205.0	308.0
5	89.776	V 30.8	-15.4	15.4	43.5	28.1	100.0	89.0
6	837.283	H 38.2	3.5	41.7	46.0	4.3	400.0	313.0



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

3) above 1 GHz

EUT	Digital Pen	Measurement Detail	
Model	ADP-611	Frequency Range	1-25GHz
Channel	Low (2402 MHz)	Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4804	25.7	28.3	Average

Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable				AV / Peak		AV / Peak		AV / Peak		
4804.00	12.8	22.9	V	1.0	12.9	54.0	74.0	25.7	35.8	28.3	38.2

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor	Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
	AV / Peak				AV / Peak	AV / Peak	AV / Peak
No emissions were detected at a level greater than 20dB below limit.							



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

EUT	Digital Pen	Measurement Detail	
Model	ADP-611	Frequency Range	1-25GHz
Channel	Mid (2440 MHz)	Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4880	27.6	26.4	Average

Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
					Antenna + Amp. Gain + Cable						
4880.00	14.8	24.6	V	1.0	12.8	54.0	74.0	27.6	37.4	26.4	36.6



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

EUT	Digital Pen	Measurement Detail	
Model	ADP-611	Frequency Range	1-25GHz
Channel	High (2480 MHz)	Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	28.3	25.7	Average

Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	15.5 : 25.6	V	1.0	12.8	54.0 : 74.0	28.3 : 38.4	25.7 : 35.6

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB]
				Antenna + Amp. Gain + Cable			AV / Peak
No emissions were detected at a level greater than 20dB below limit.							



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

2.1.6 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

☒ Complies

Test mode : Continuous modulated carrier, High Channel(2480 MHz)

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
0.4785	44.6	11.7	Quasi-peak



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea


Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

Test Data

[L1]

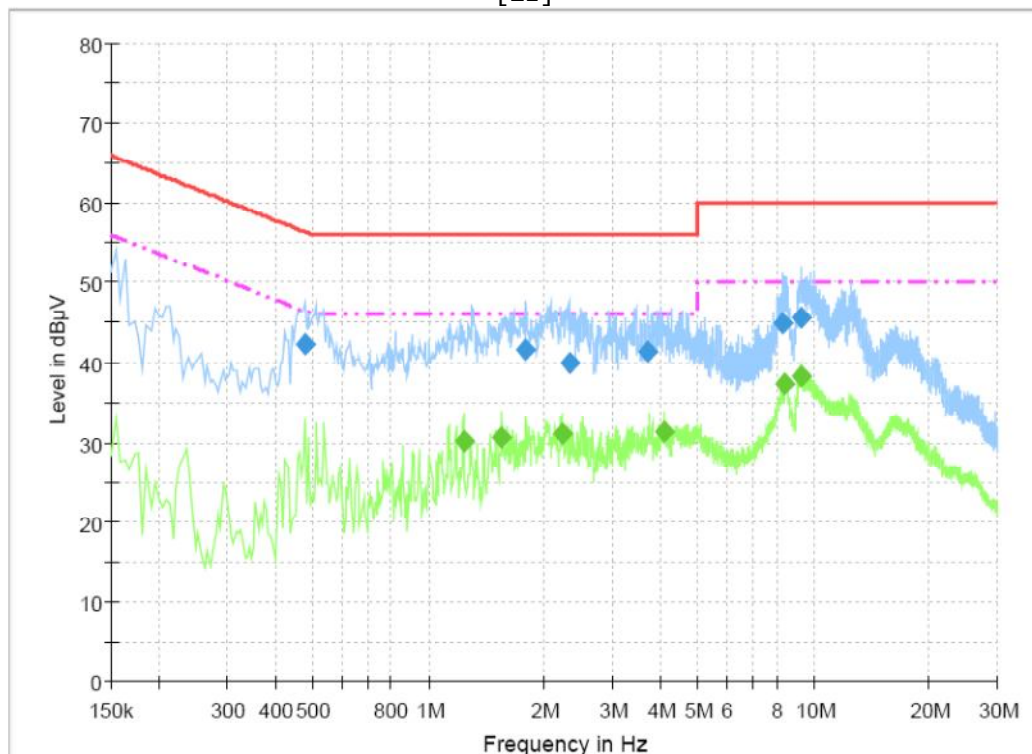

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.478500	42.3	1000.0	9.000	On	L1	9.9	14.1	56.4
1.792500	41.6	1000.0	9.000	On	L1	9.7	14.4	56.0
2.319000	40.0	1000.0	9.000	On	L1	9.7	16.0	56.0
3.709500	41.3	1000.0	9.000	On	L1	9.7	14.7	56.0
8.349000	44.8	1000.0	9.000	On	L1	9.8	15.2	60.0
9.244500	45.5	1000.0	9.000	On	L1	9.8	14.5	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.234500	30.3	1000.0	9.000	On	L1	9.7	15.7	46.0
1.549500	30.7	1000.0	9.000	On	L1	9.7	15.3	46.0
2.233500	31.2	1000.0	9.000	On	L1	9.7	14.8	46.0
4.087500	31.4	1000.0	9.000	On	L1	9.7	14.6	46.0
8.389500	37.3	1000.0	9.000	On	L1	9.8	12.7	50.0
9.240000	38.1	1000.0	9.000	On	L1	9.8	11.9	50.0



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

[NEUTRAL]

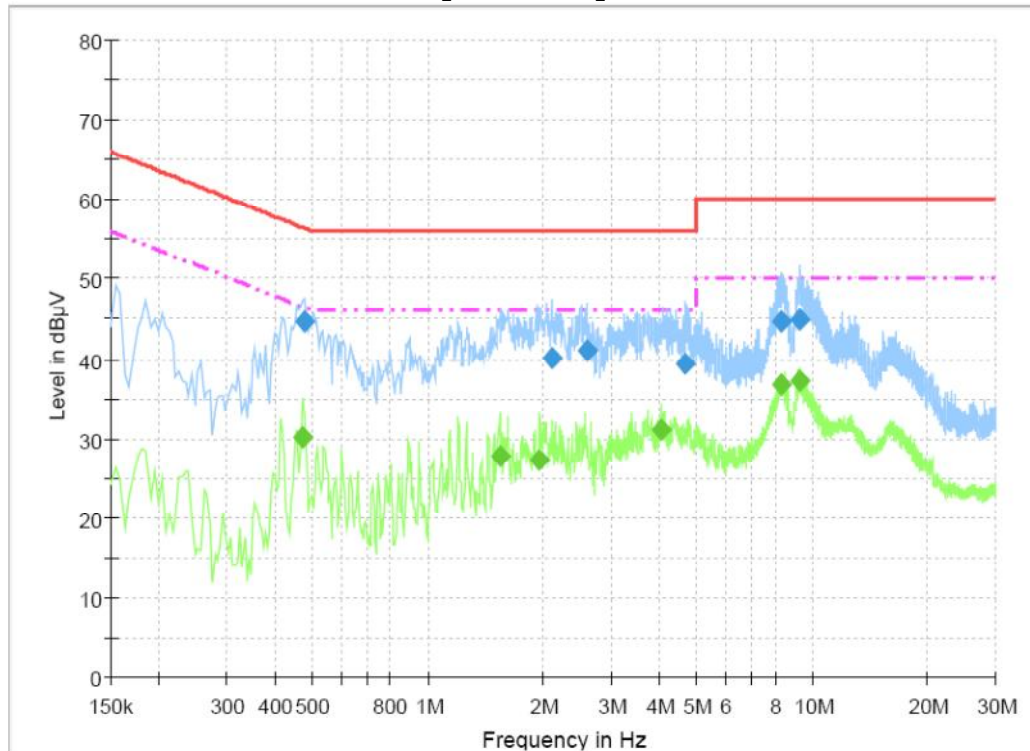

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.478500	44.6	1000.0	9.000	On	N	9.9	11.7	56.4
2.103000	40.1	1000.0	9.000	On	N	9.7	15.9	56.0
2.602500	41.0	1000.0	9.000	On	N	9.7	15.0	56.0
4.668000	39.4	1000.0	9.000	On	N	9.7	16.6	56.0
8.304000	44.7	1000.0	9.000	On	N	9.8	15.3	60.0
9.267000	44.8	1000.0	9.000	On	N	9.8	15.2	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.474000	30.1	1000.0	9.000	On	N	9.9	16.4	46.4
1.540500	27.8	1000.0	9.000	On	N	9.7	18.2	46.0
1.959000	27.2	1000.0	9.000	On	N	9.7	18.8	46.0
4.051500	31.1	1000.0	9.000	On	N	9.7	14.9	46.0
8.344500	36.7	1000.0	9.000	On	N	9.8	13.3	50.0
9.267000	37.2	1000.0	9.000	On	N	9.8	12.8	50.0



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2013-11-08	2014-11-08
2	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2013-12-06	2014-12-06
3	EMI Test Receiver	Rohde & Schwarz	ESR	101088	2014-07-29	2015-07-29
4	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2014-05-15	2015-05-15
5	Bilog Antenna	Schaffner	CBL6111C	2551	2014-05-08	2016-05-08
6	Double Ridged Guide Antenna	ETS-Lindgren	3117	00154525	2013-07-03	2015-07-03
7	Double Ridged Guide Antenna	ETS-Lindgren	3116	00062916	2013-03-20	2015-03-20
8	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2014-05-19	2016-05-19
9	Attenuator	Rohde & Schwarz	DNF	272.4110.50-1	2013-11-12	2014-11-12
10	PREAMPLIFIER	Agilent	8449B	3008A02307	2013-11-08	2014-11-08
11	AMPLIFIER	Sonoma Instrument Co.	310	291721	2013-03-21	2015-02-06
12	Band Reject Filter	Wainwright Instruments GmbH	WRCGV 2400/2483- 2375/2505- 50/10EE	2	2014-08-25	2015-08-25
13	Signal Generator	Agilent	E4432B	US40054094	2013-11-08	2014-11-08
14	Signal Generator	HP	8341B	2819A01563	2013-11-08	2014-11-08
15	DC Power Supply	Topward	6303D	711196	2014-03-20	2015-03-20
16	LISN	Rohde & Schwarz	ENV216	101151	2013-11-08	2014-11-08
17	BLUETOOTH TESTER	TESCOM	TC-3000C	3000C000377	2013-11-08	2014-11-08